

FCC TEST REPORT

Product Name: MLU-X1000 Accelerator
Model No.: MLU-X1000
Add. Model No.: N/A
Report Number: 200827004EMC-1R1
Test Standards: FCC 47 CFR Part 15 Subpart B
FCC ID: 2ARVF-MLU-X1000
Test Result: PASS
Date of Issue: November 11, 2020

Prepared for:

Cambricon Technologies Corporation Limited
11/F, Block D, Zhizhen Tower, No.7 Zhichun Road, Haidian District,
Beijing, China

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
16/F, Block A, Building 6, Baoneng Science and Technology Park,
Qingxiang Road No.1, Longhua New District, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by:

Ryan Zhou

Ryan Zhou
Senior Project Engineer

Reviewed by:

Kevin Liang

Kevin Liang
Assistant Manager

Approved by:

Billy Li

Billy Li
Technical Director

Date:

November 11, 2020



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Version

Version No.	Date	Description
V1.0	November 11, 2020	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>UTTR-EMC-FCCPART15B-V1.0

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 DESCRIPTION OF SUPPORT UNITS	4
1.4 TEST LOCATION	5
1.5 TEST FACILITY	5
1.6 DEVIATION FROM STANDARDS	5
1.7 ABNORMALITIES FROM STANDARD CONDITIONS	5
1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	5
1.9 MEASUREMENT UNCERTAINTY	6
2. TEST SUMMARY	7
3. EQUIPMENT LIST	8
4. TEST CONFIGURATION	9
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	9
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	9
4.1.2 RECORD OF NORMAL ENVIRONMENT	9
4.2 TEST MODES	9
4.3 TEST SETUP	10
4.3.1 FOR RADIATED EMISSIONS TEST SETUP	10
4.3.2 FOR CONDUCTED EMISSIONS TEST SETUP	11
4.4 SYSTEM TEST CONFIGURATION	11
5. REFERENCE DOCUMENTS FOR TESTING	12
6. EMC REQUIREMENTS SPECIFICATION	12
6.1 RADIATED EMISSION	12
6.2 CONDUCTED EMISSION	30
APPENDIX 1 PHOTOS OF TEST SETUP	39
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	39

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Cambricon Technologies Corporation Limited
Address of Applicant:	11/F, Block D, Zhizhen Tower, No.7 Zhichun Road, Haidian District, Beijing, China
Manufacturer:	Cambricon Technologies Corporation Limited
Address of Manufacturer:	11/F, Block D, Zhizhen Tower, No.7 Zhichun Road, Haidian District, Beijing, China

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	MLU-X1000 Accelerator
Model No.:	MLU-X1000
Add. Model No.:	N/A
DUT Stage:	Identical Prototype
Rated Voltage:	115-127V~ 14.2A 50/60Hz 200-240V~ 14.9A 50/60Hz
Classification of digital devices:	Class A
Highest Internal Frequency:	6 GHz
Software Version:	V1.0
Hardware Version:	V1.0
Sample Received Date:	July 29, 2020
Sample Tested Date:	August 5, 2020 to September 17, 2020

1.2.2 Description of Accessories

None

1.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Server	N/A	NF5280M5	219186304	Applicant
SWITCHING POWER SUPPLY	Great Wall	GW-CRPS3000L5R	2K050034305	Applicant
SWITCHING POWER SUPPLY	DELTA	DPS-3000AB-19 A	JUMD2017000007	Applicant
LED Monitor	LG	U320S	187A3028-00001D	UnionTrust
Mouse	DELL	MOCZUL	CN-0V7623-73826-65K-00XR	UnionTrust
Keyboard	DELL	KB216t	CN-0RKRON-7161 6-66O-0U4V-A03	UnionTrust

2) Support Cable

Description	Quantity	Cable Type	Length (m)	Supplied by
Power Cable	1	Unshielded without ferrite	1.50	UnionTrust
VGA Cable	1	Unshielded without ferrite	1.00	UnionTrust

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.0

1.4 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109
Telephone: +86 (0) 755 2823 0888
Fax: +86 (0) 755 2823 0886

1.5 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194
Test Firm Registration Number: 259480

1.6 DEVIATION FROM STANDARDS

None.

1.7 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.9 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.2 dB
2	Conducted emission 150KHz-30MHz	±2.7 dB
3	Radiated emission 9KHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-26GHz	± 4.6 dB
7	Radiated emission 26GHz-40GHz	± 4.6 dB

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart B Test Cases			
Test Item	Test Requirement	Test Method	Result
Conducted Emission	FCC 47 CFR Part 15.107	ANSI C63.4-2014	PASS
Radiated Emission	FCC 47 CFR Part 15.109	ANSI C63.4-2014	PASS



3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Dec. 03, 2018	Dec. 03, 2021
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	Nov. 24, 2019	Nov. 23, 2020
<input type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Nov. 16, 2019	Nov. 15, 2020
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	Nov. 16, 2019	Nov. 15, 2020
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	Nov. 16, 2019	Nov. 15, 2020
<input type="checkbox"/>	Broadband Antenna (Pre-amplifier)	ETS-LINDGREN	3142E-PA	00201891	Nov. 24, 2019	Nov. 23, 2020
<input type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103002	Nov. 24, 2019	Nov. 23, 2020
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3117	00164202	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	Nov. 16, 2019	Nov. 15, 2020
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3116C	00200180	Jun. 19, 2020	Jun. 18, 2021
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Jun. 23, 2020	Jun. 23, 2021
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	LISN	ETS-Lindgren	3816/2SH	00201088	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	AC120V 60Hz or AC 240V 50Hz	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment



Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Tested by
Conducted Emission	24.4	54.0	99.41	Tripp Jiang
Radiated Emission	25.5	54.0	100.0	Lucas OuYang

4.2 TEST MODES


Test Item	EMI Test Modes
Radiated Emission	TM1: Run test system (AC120V/60Hz) TM2: Run test system (AC240V/50Hz)
Conducted Emission	TM1: Run test system (AC120V/60Hz) TM2: Run test system (AC240V/50Hz)

4.3 TEST SETUP

4.3.1 For Radiated Emissions test setup

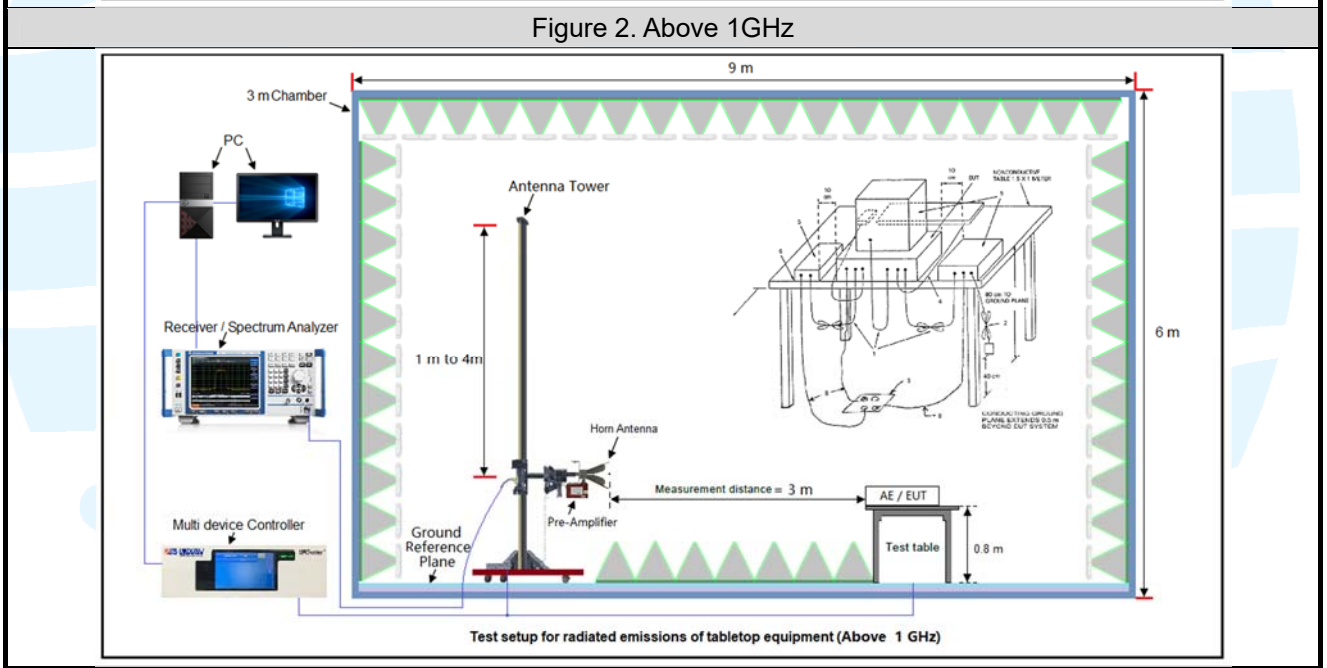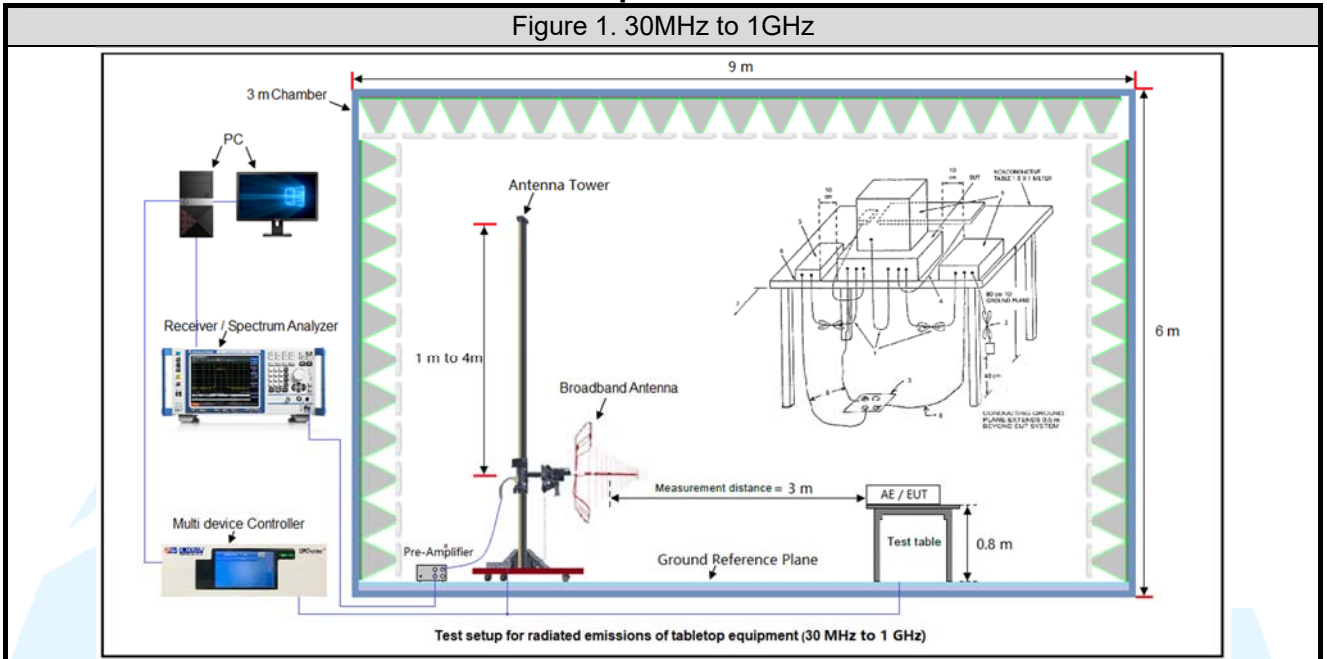

4.3.2 For Conducted Emissions test setup

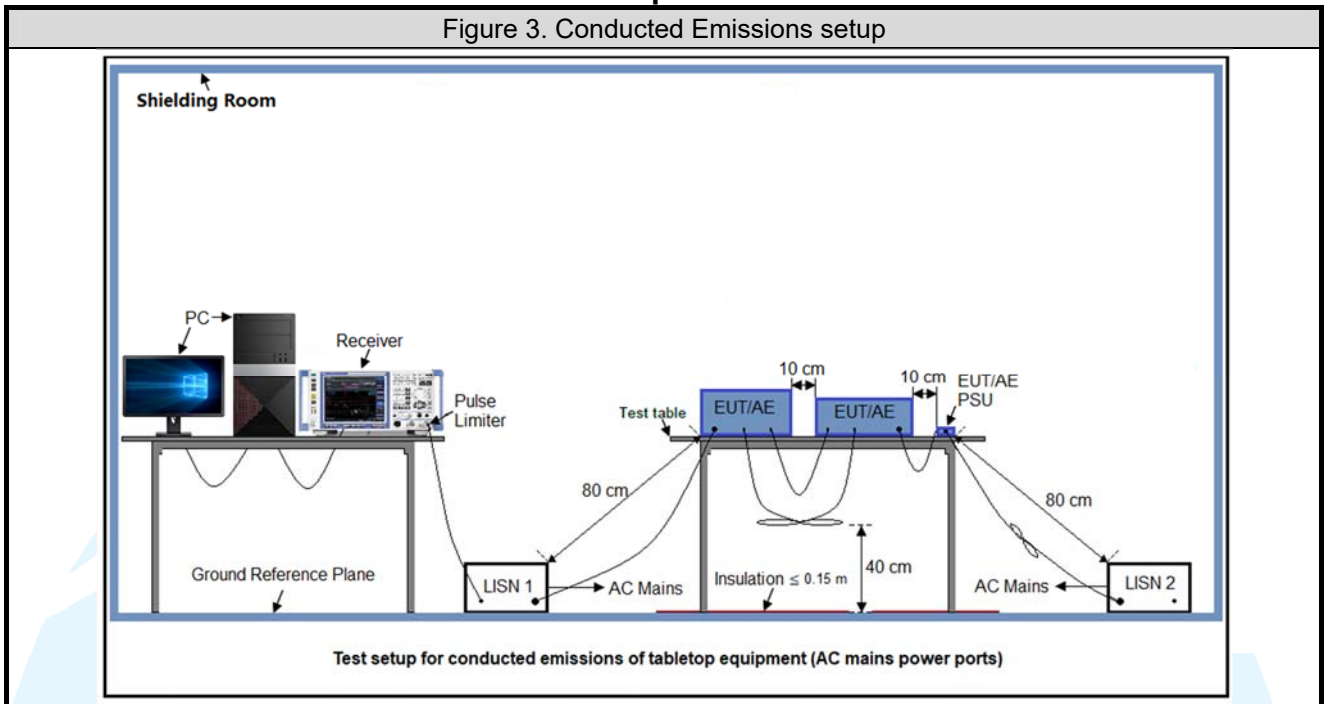

4.4 SYSTEM TEST CONFIGURATION

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic (according to KDB 896810 D02 SDoC FAQ v01r01) of the highest fundamental frequency or to 40 GHz, whichever is lower.

5. REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
3	KDB 174176 D01 Line Conducted FAQ v01r01	AC power-line conducted emission frequency asked questions
4	KDB 896810 D02 SDoC FAQ v01r02	Supplier's Declaration of Conformity frequency asked questions

6. EMC REQUIREMENTS SPECIFICATION

6.1 RADIATED EMISSION

Test Requirement: FCC 47 CFR Part 15.109

Test Method: ANSI C63.4-2014

Receiver Setup:

Frequency: (f) (MHz)	Detector type	Measurement receiver bandwidth	
		RBW	VBW
$30 \leq f \leq 1\,000$	Quasi Peak	120 kHz	300 kHz
$f \geq 1000$	Peak	1 MHz	3 MHz
	Average	1 MHz	3 MHz

Measured frequency range

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705-108	1000.
108-500	2000.
500-1000	5000.
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Limits:

Limits for Class A devices

Frequency (MHz)	limits at 10 m (dBµV/m)		
	QP Detector	PK Detector	AV Detector
30-88	39.1	--	--
88-216	43.5	--	--
216-960	46.4	--	--
960 to 1000	49.5	--	--

3m limit=10m limit +k, where $k=20\log(d1/d2)=20\log(10/3)=10$ so 3m limit=10m limit+10.5

Frequency (MHz)	limits at 3 m (dBµV/m)		
	QP Detector	PK Detector	AV Detector
30-88	49.6	--	--
88-216	54.0	--	--
216-960	56.9	--	--
960 to 1000	60.0	--	--
Above 1000	--	79.5	59.5

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.0

Remark:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.3.1 for details.

Test Procedures:**1. From 30 MHz to 1GHz test procedure as below:**

- 1) The Product was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- 2) Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- 3) For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

2. Above 1GHz test procedure as below:


- 1) The Product was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- 2) Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- 3) For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The measurement data as follows:

Below 1GHz(Quasi Peak):
 Mode 1 120V~ 60Hz by SWITCHING POWER SUPPLY Model GW-CRPS3000L5R
 Horizontal

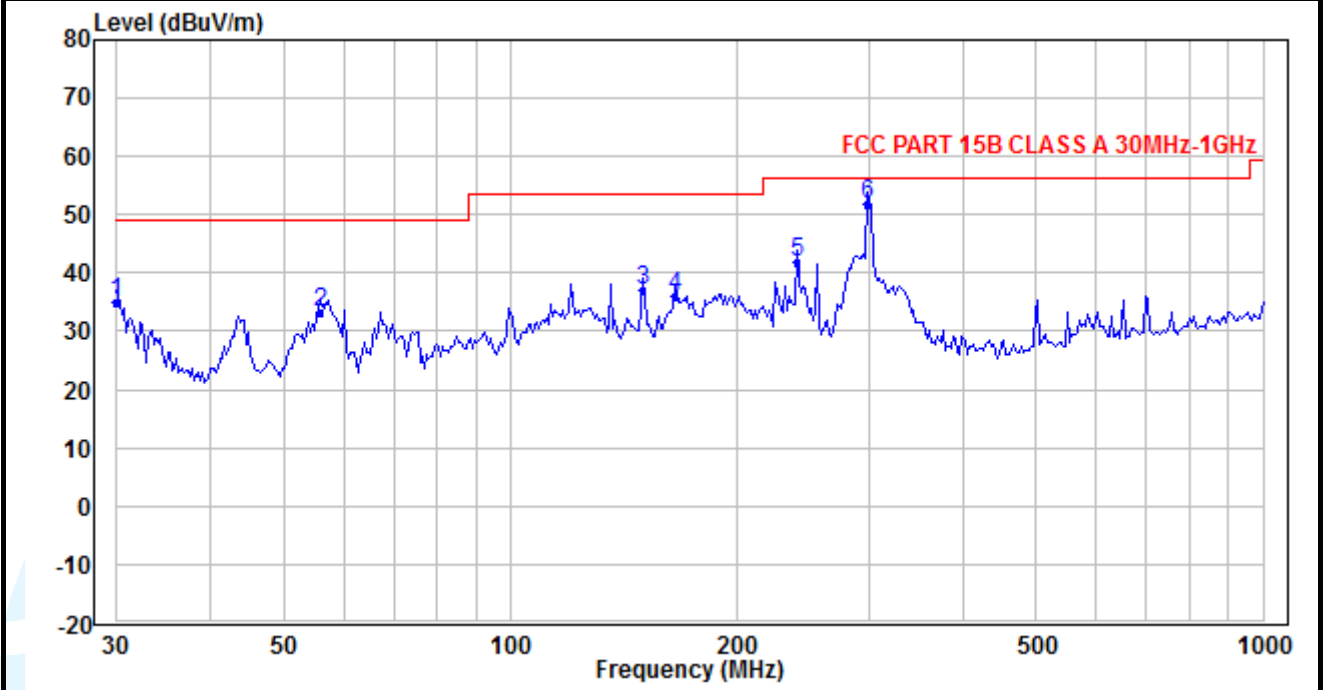

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.000	40.90	-5.79	35.11	49.60	-14.49	QP
2	56.071	48.84	-15.50	33.34	49.60	-16.26	QP
3	149.968	48.53	-11.51	37.02	54.00	-16.98	QP
4	165.472	46.85	-10.70	36.15	54.00	-17.85	QP
5	240.144	49.19	-7.22	41.97	56.90	-14.93	QP
6	298.666	57.50	-5.60	51.90	56.90	-5.00	QP

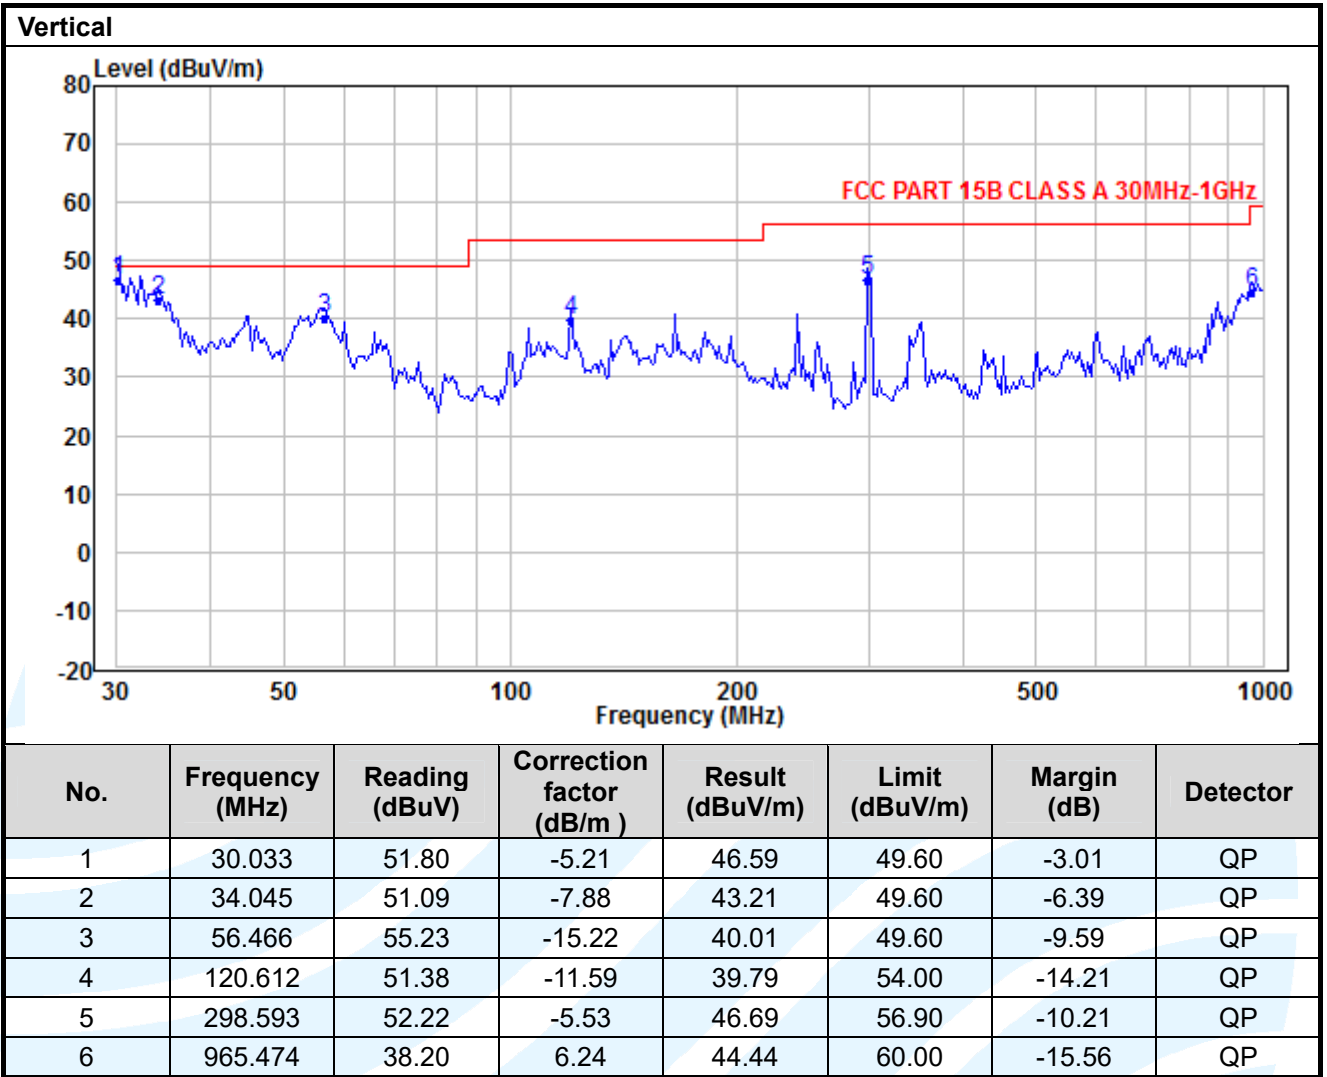

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.0

Below 1GHz(Quasi Peak):
 Mode 2 240V~ 50Hz by SWITCHING POWER SUPPLY Model GW-CRPS3000L5R
 Horizontal

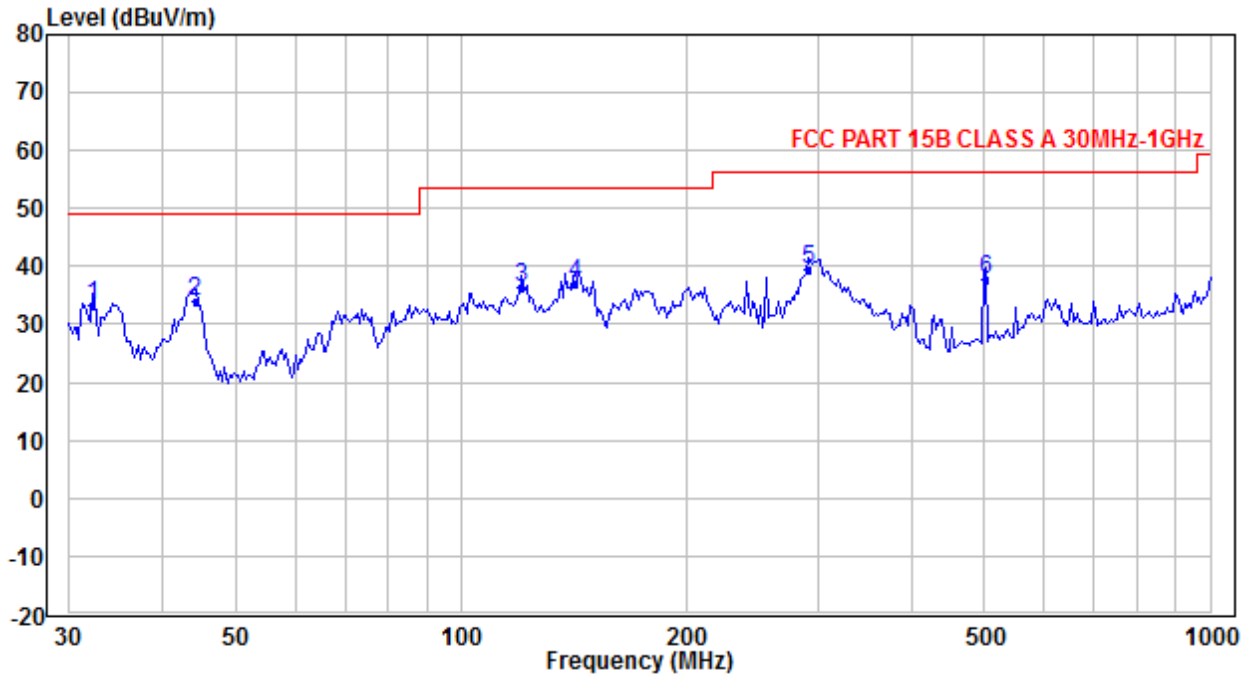

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.184	40.29	-7.09	33.20	49.60	-16.40	QP
2	44.154	47.25	-13.19	34.06	49.60	-15.54	QP
3	120.612	48.70	-12.26	36.44	54.00	-17.56	QP
4	141.769	48.92	-11.91	37.01	54.00	-16.99	QP
5	290.317	45.29	-5.76	39.53	56.90	-17.37	QP
6	502.247	38.61	-0.86	37.75	56.90	-19.15	QP

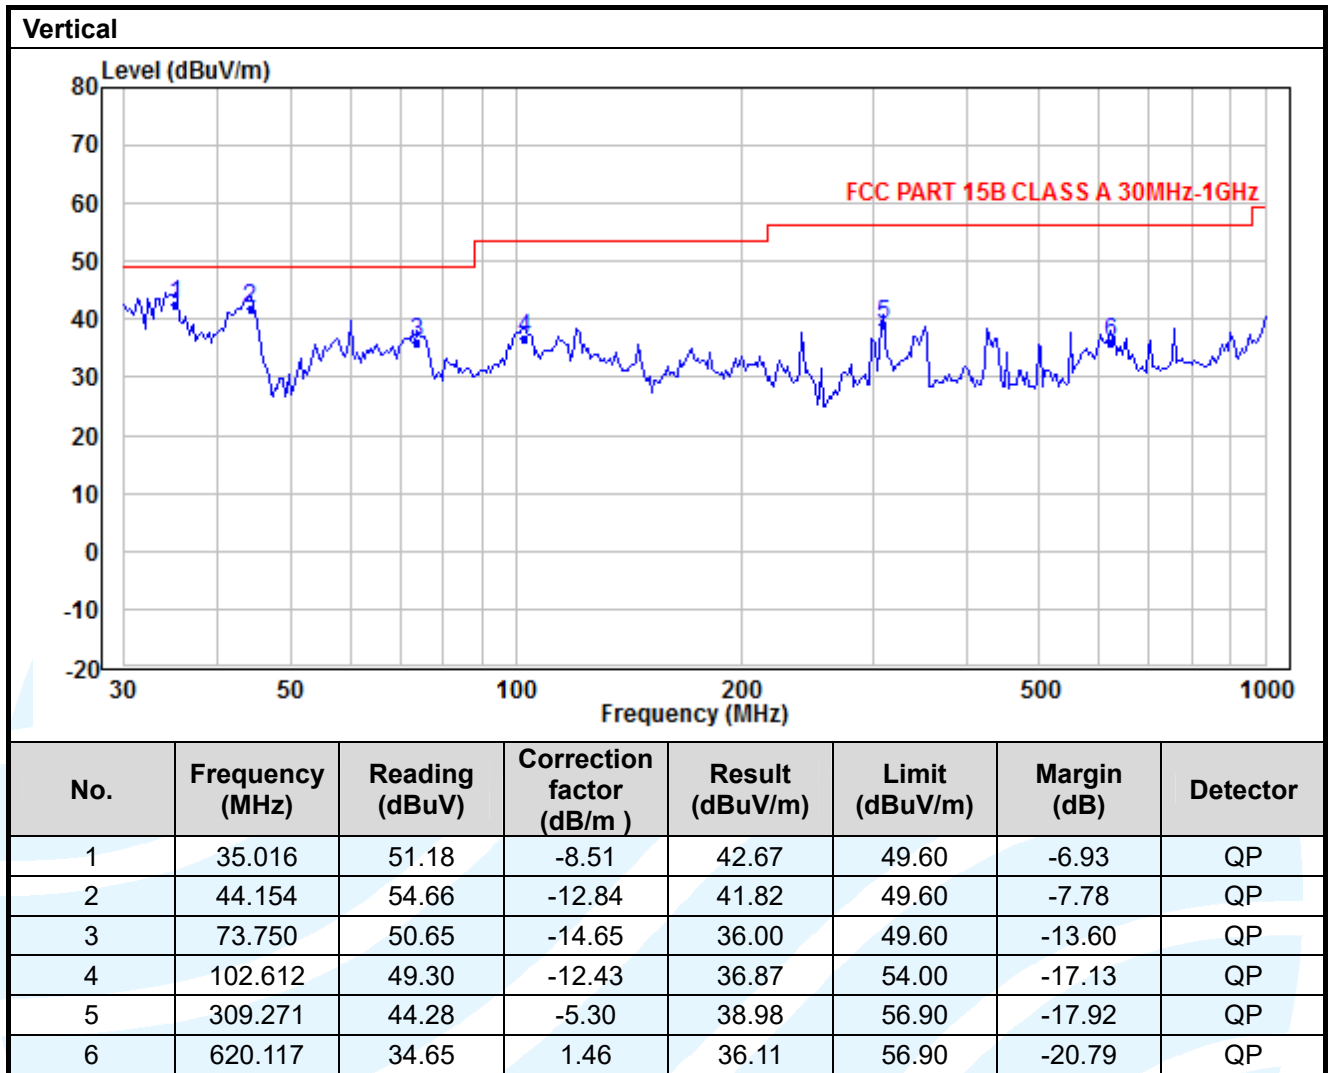

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.0

Below 1GHz(Quasi Peak):
 Mode 1 120V~ 60Hz by SWITCHING POWER SUPPLY Model DPS-3000AB-19 A
 Horizontal

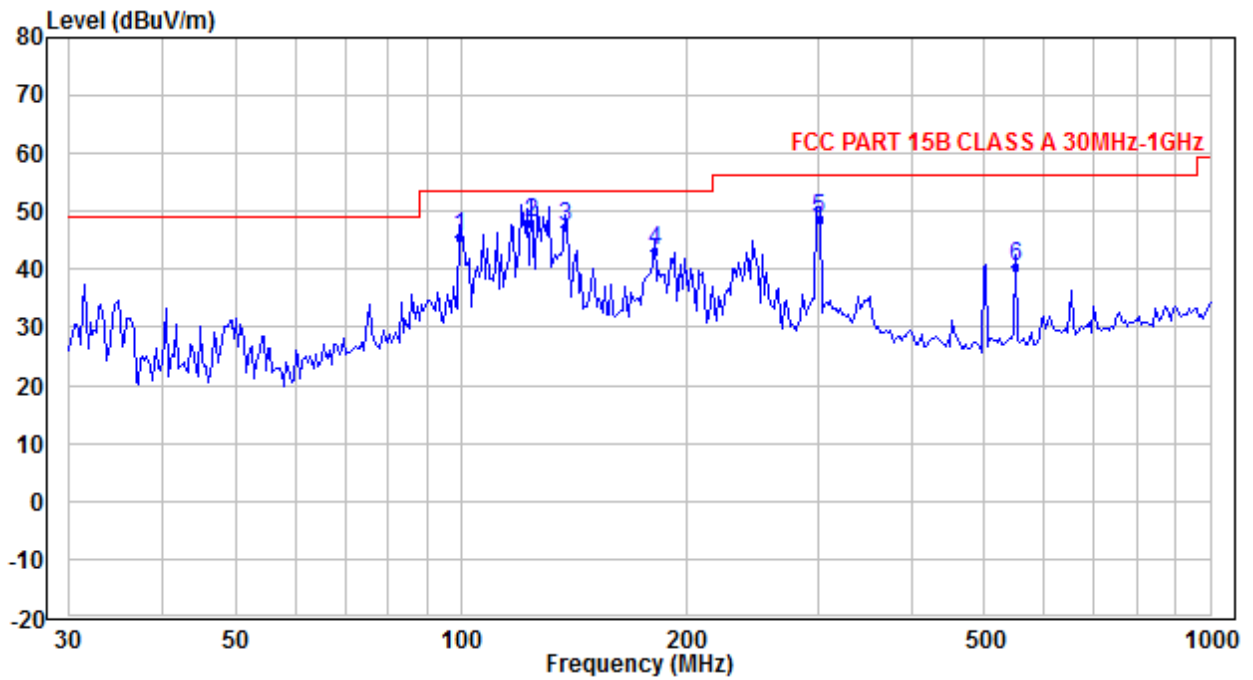

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	99.768	57.91	-12.31	45.60	54.00	-8.40	QP
2	124.050	60.73	-12.56	48.17	54.00	-5.83	QP
3	137.840	59.64	-12.27	47.37	54.00	-6.63	QP
4	181.300	53.31	-10.15	43.16	54.00	-10.84	QP
5	300.699	54.51	-5.75	48.76	56.90	-8.14	QP
6	550.290	40.92	-0.36	40.56	56.90	-16.34	QP

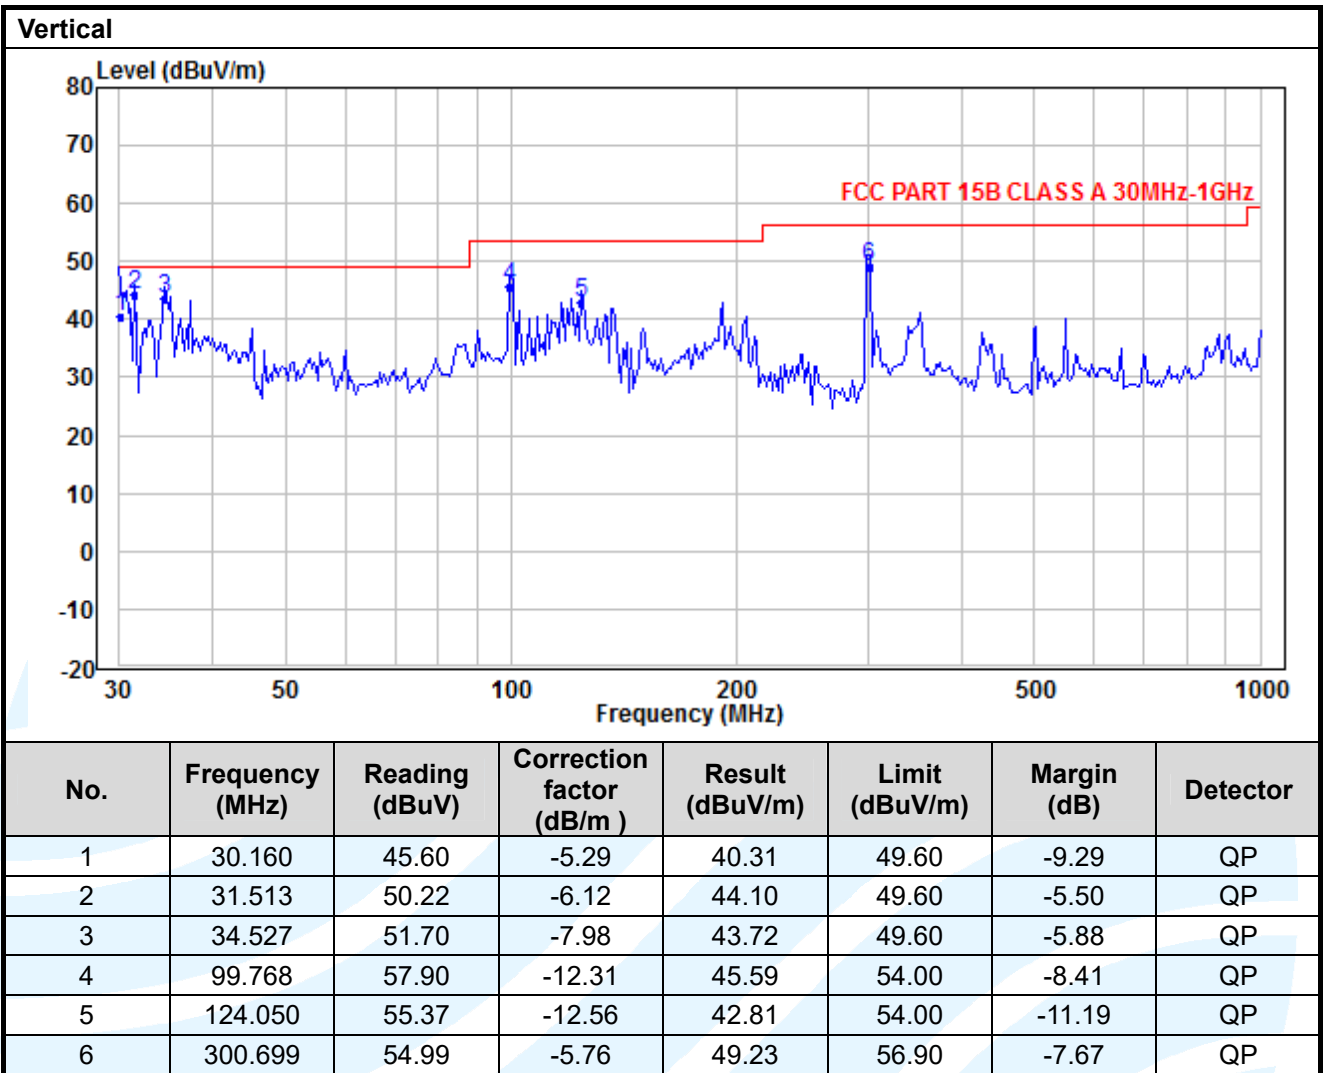

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.0


Below 1GHz(Quasi Peak):
 Mode 2 240V~ 50Hz by SWITCHING POWER SUPPLY Model DPS-3000AB-19 A
 Horizontal

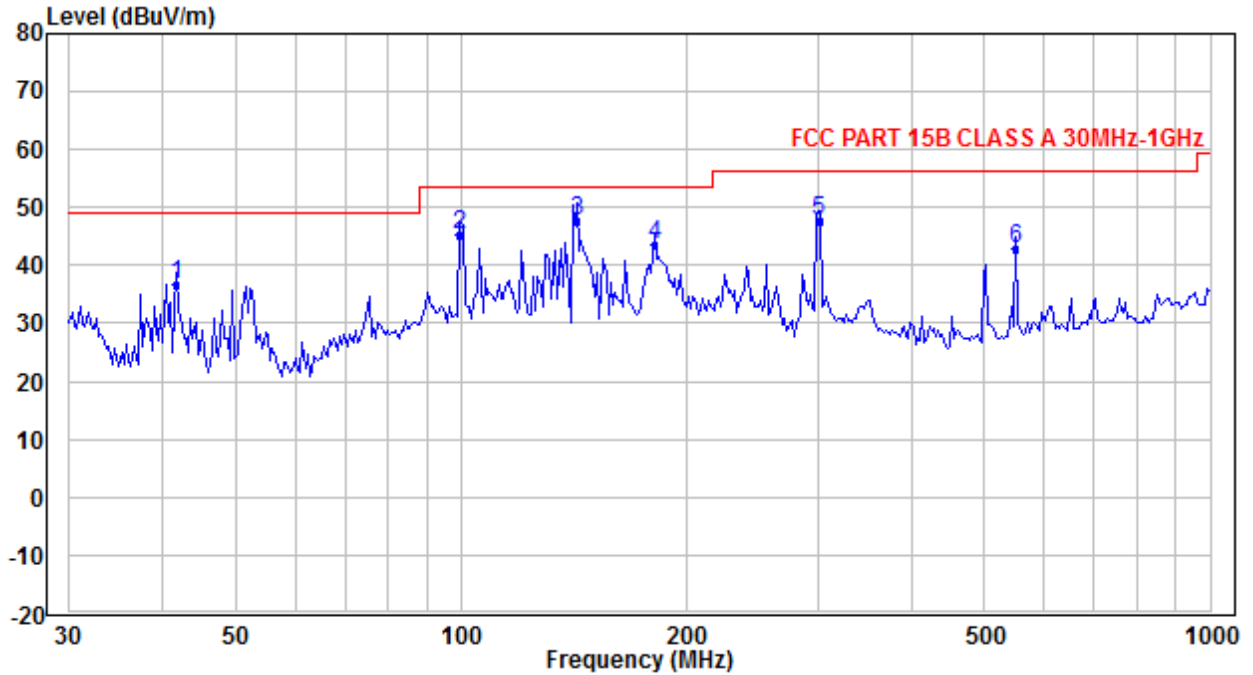

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	41.741	47.80	-11.02	36.78	49.60	-12.82	QP
2	99.768	57.75	-12.31	45.44	54.00	-8.56	QP
3	142.769	59.79	-11.92	47.87	54.00	-6.13	QP
4	181.300	53.65	-10.15	43.50	54.00	-10.50	QP
5	300.699	53.30	-5.75	47.55	56.90	-9.35	QP
6	550.290	43.37	-0.36	43.01	56.90	-13.89	QP

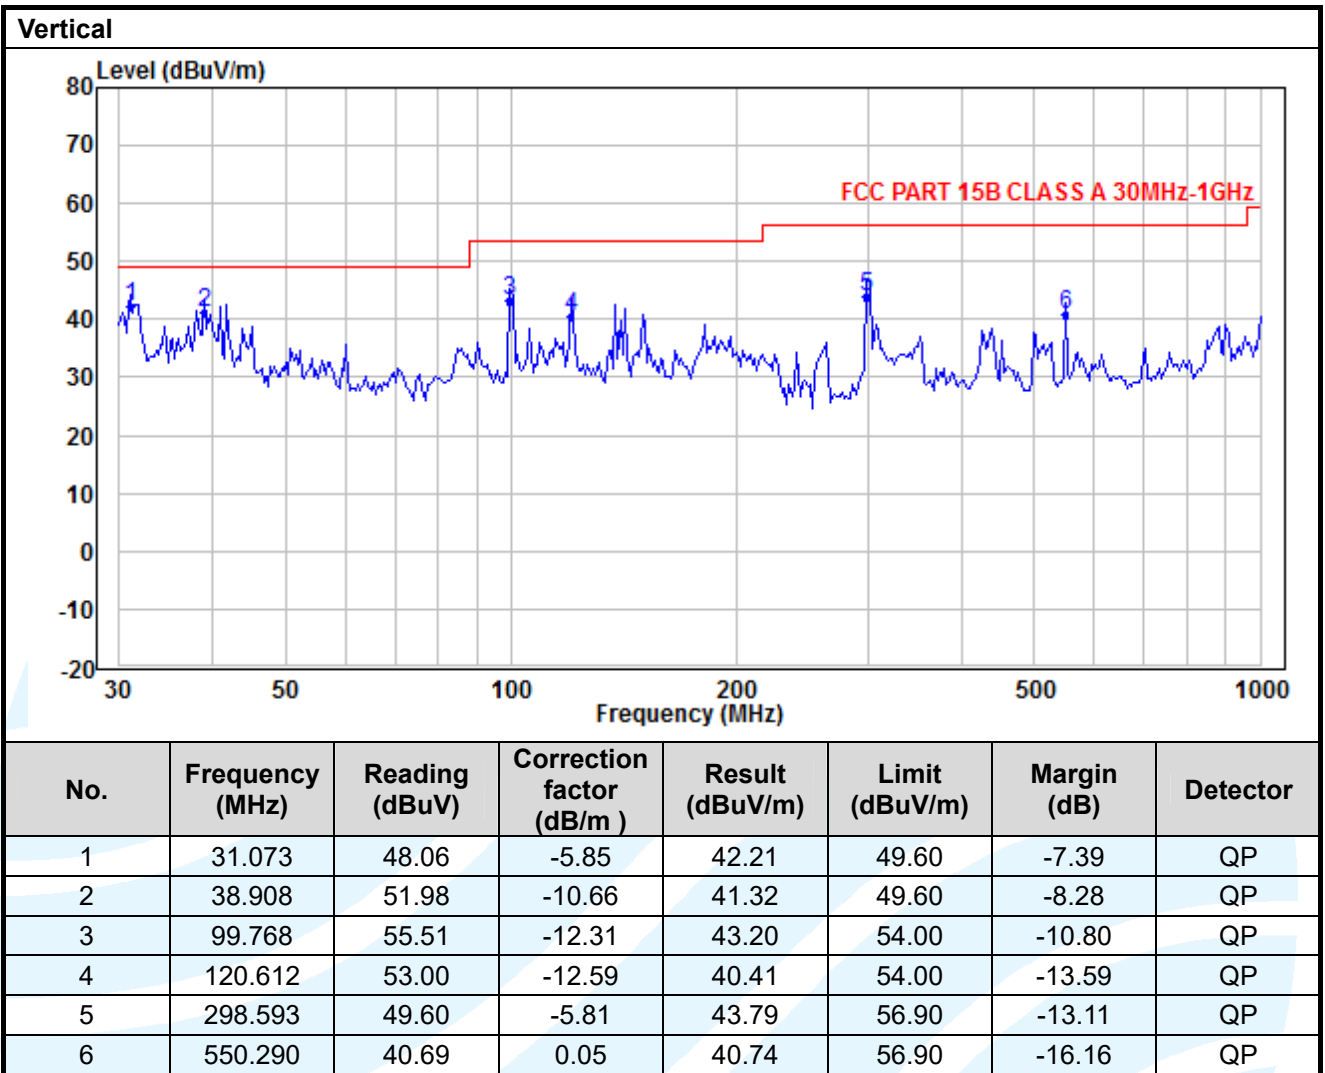

Above 1GHz(Peak & Average)
Mode 1 120V~ 60Hz by SWITCHING POWER SUPPLY Model GW-CRPS3000L5R
Horizontal

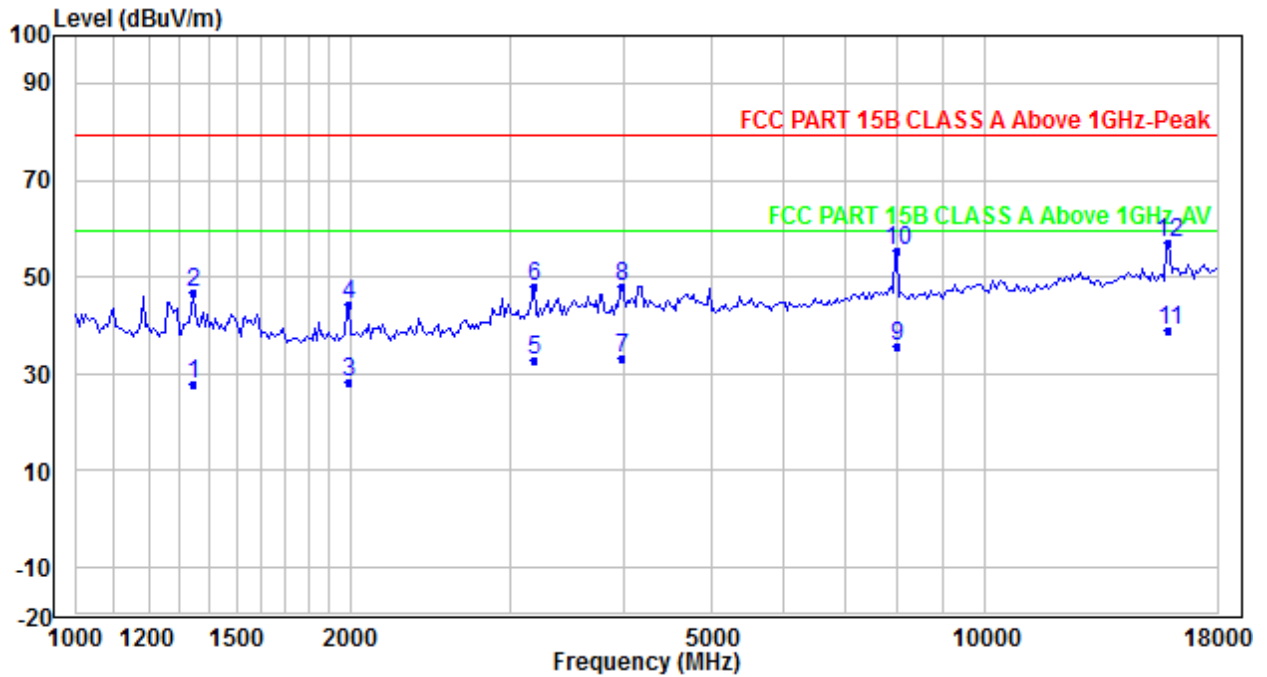

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1343.675	39.94	-11.98	27.96	59.50	-31.54	Average
2	1343.675	58.94	-11.98	46.96	79.50	-32.54	Peak
3	1992.295	38.12	-9.89	28.23	79.50	-51.27	Average
4	1992.295	54.12	-9.89	44.23	79.50	-35.27	Peak
5	3185.042	39.42	-6.58	32.84	59.50	-26.66	Average
6	3185.042	54.42	-6.58	47.84	79.50	-31.66	Peak
7	3992.296	37.45	-4.22	33.23	59.50	-26.27	Average
8	3992.296	52.45	-4.22	48.23	79.50	-31.27	Peak
9	8000.034	33.37	2.21	35.58	59.50	-23.92	Average
10	8000.034	53.37	2.21	55.58	79.50	-23.92	Peak
11	15938.420	27.67	11.46	39.13	59.50	-20.37	Average
12	15938.420	45.67	11.46	57.13	79.50	-22.37	Peak

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.0

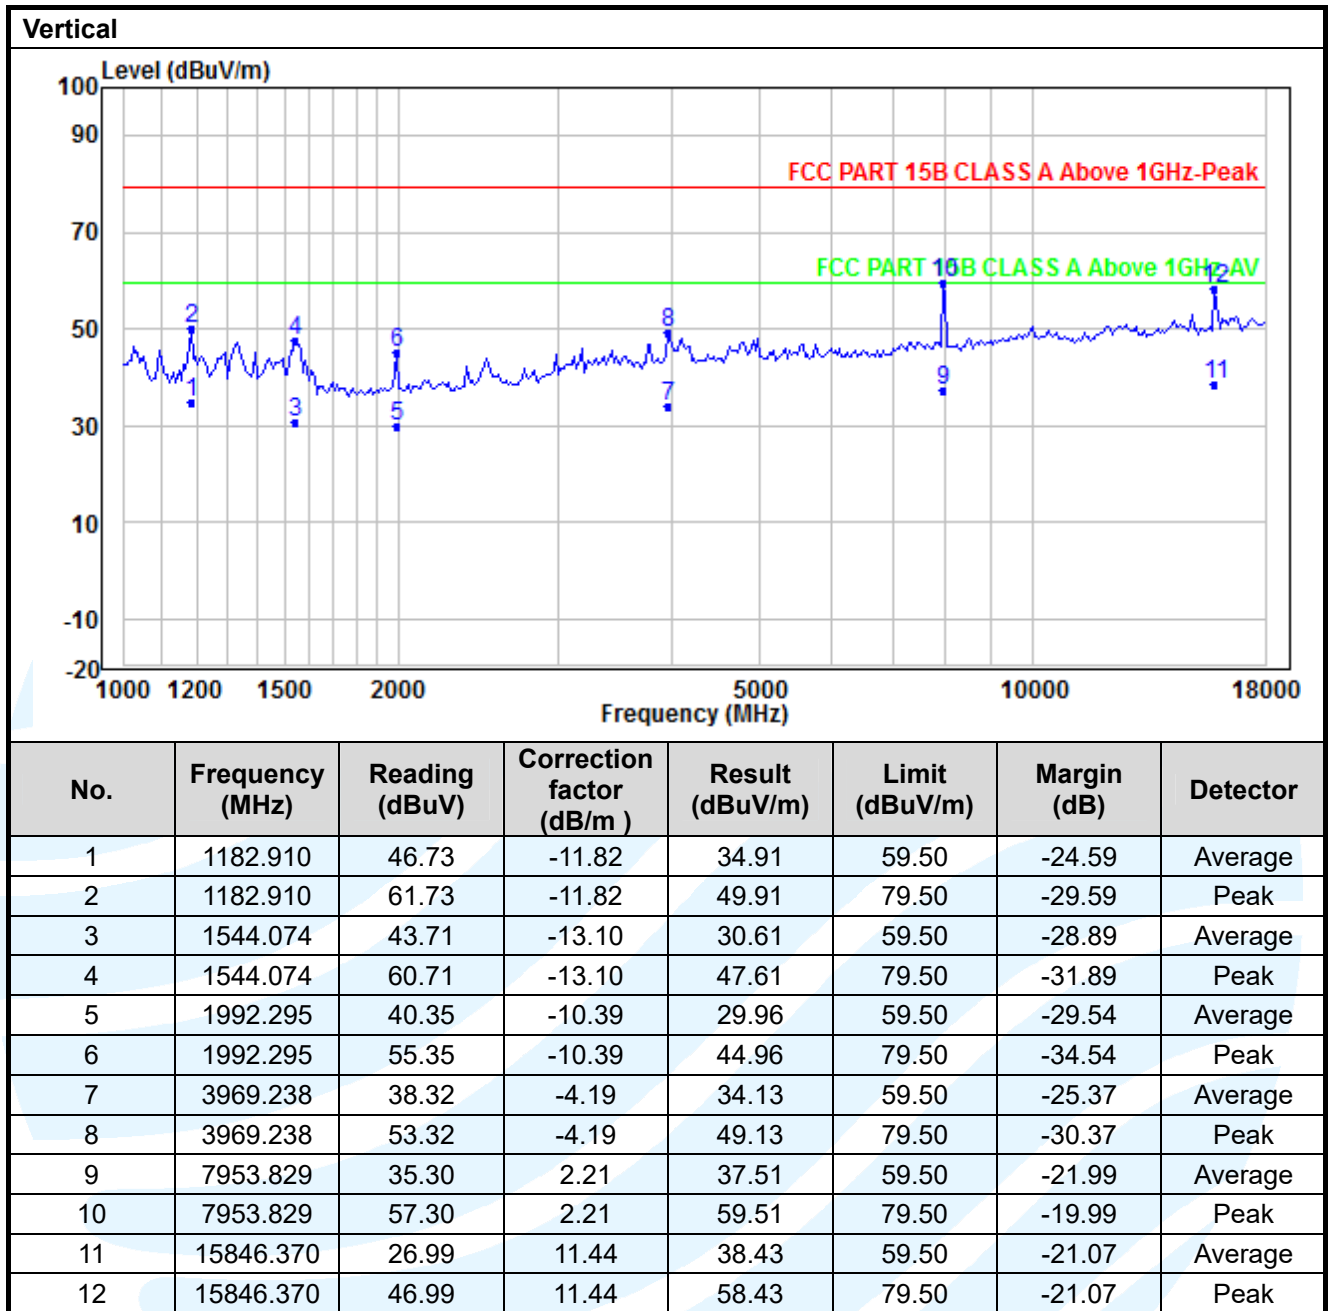

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.0

Above 1GHz(Peak & Average)
 Mode 2 240V~ 50Hz by SWITCHING POWER SUPPLY Model GW-CRPS3000L5R
 Horizontal

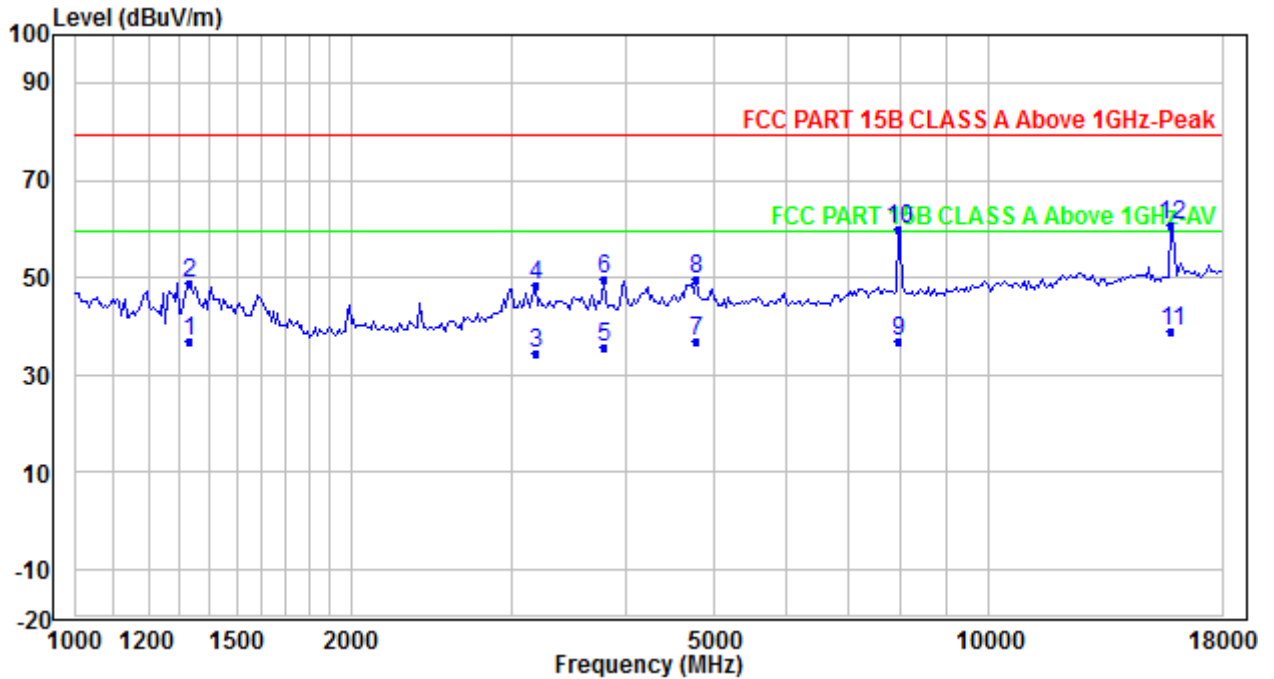

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1328.199	49	-11.94	37.06	59.5	-22.44	Average
2	1328.199	61	-11.94	49.06	79.5	-30.44	Peak
3	3185.042	40.96	-6.58	34.38	59.5	-25.12	Average
4	3185.042	54.96	-6.58	48.38	79.5	-31.12	Peak
5	3789.505	40.35	-4.73	35.62	59.5	-23.88	Average
6	3789.505	54.35	-4.73	49.62	79.5	-29.88	Peak
7	4777.554	40.1	-3.35	36.75	59.5	-22.75	Average
8	4777.554	53.1	-3.35	49.75	79.5	-29.75	Peak
9	7953.829	34.86	2.11	36.97	59.5	-22.53	Average
10	7953.829	57.86	2.11	59.97	79.5	-19.53	Peak
11	15846.37	27.44	11.34	38.78	59.5	-20.72	Average
12	15846.37	49.44	11.34	60.78	79.5	-18.72	Peak

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.0

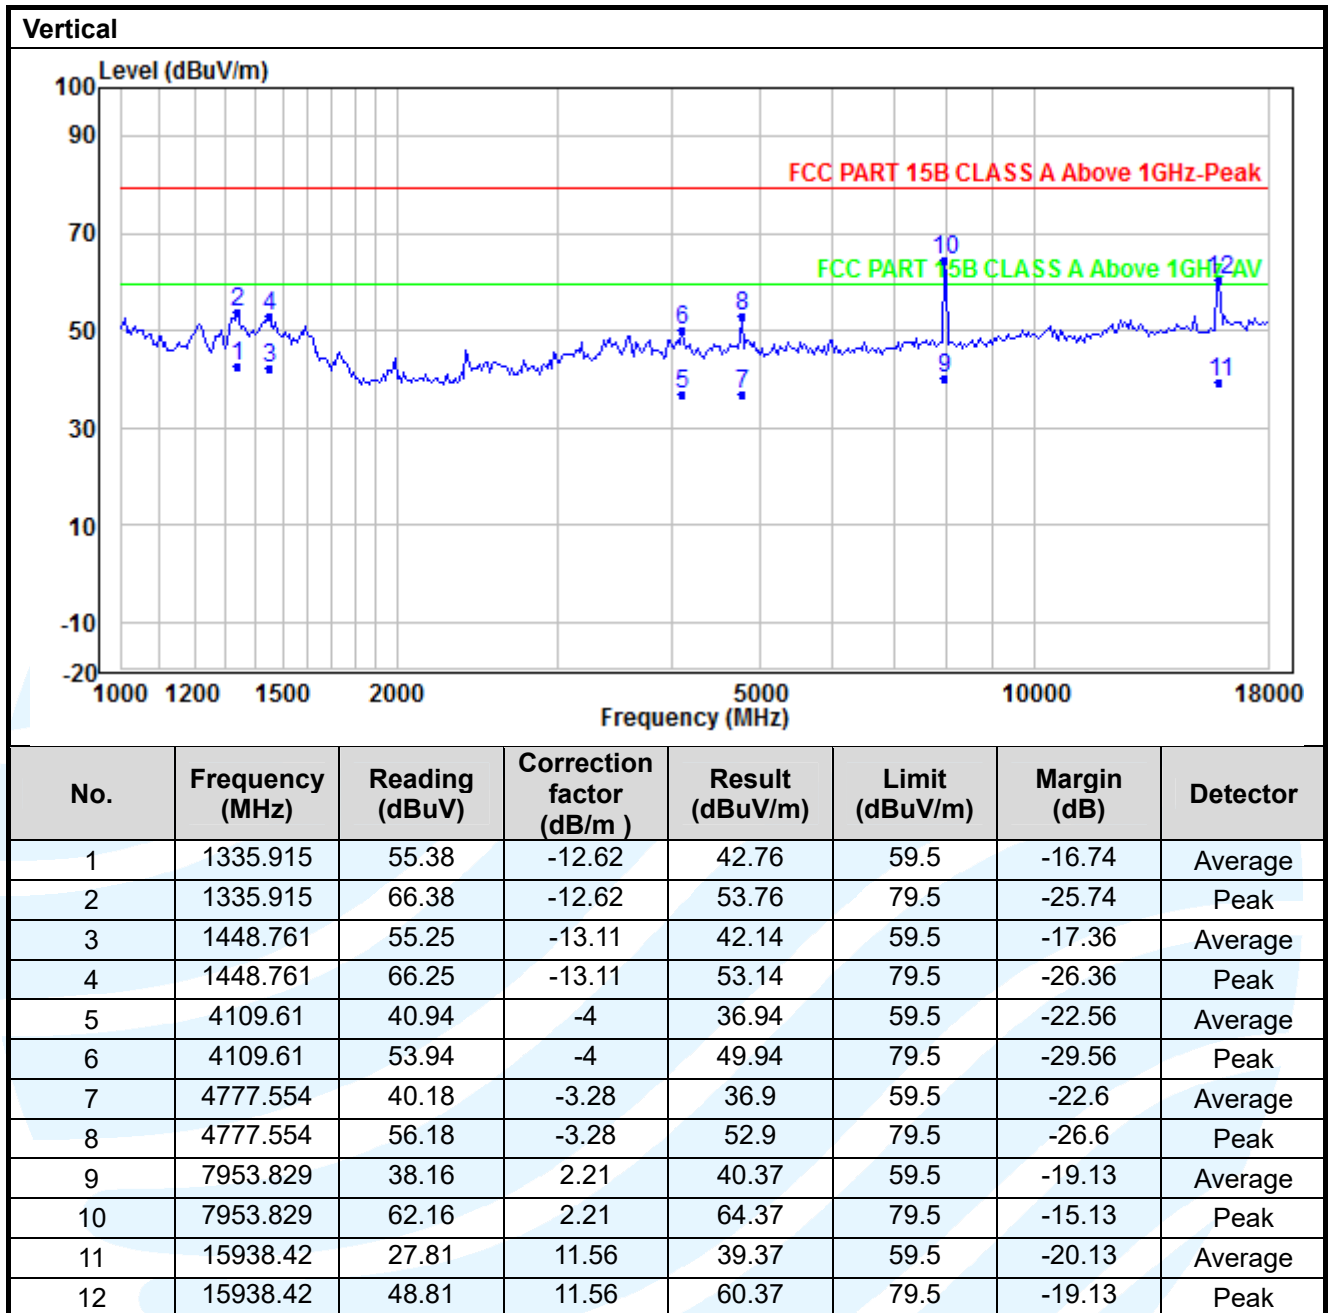

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.0

Above 1GHz(Peak & Average)
Mode 1 120V~ 60Hz by SWITCHING POWER SUPPLY Model DPS-3000AB-19 A
Horizontal

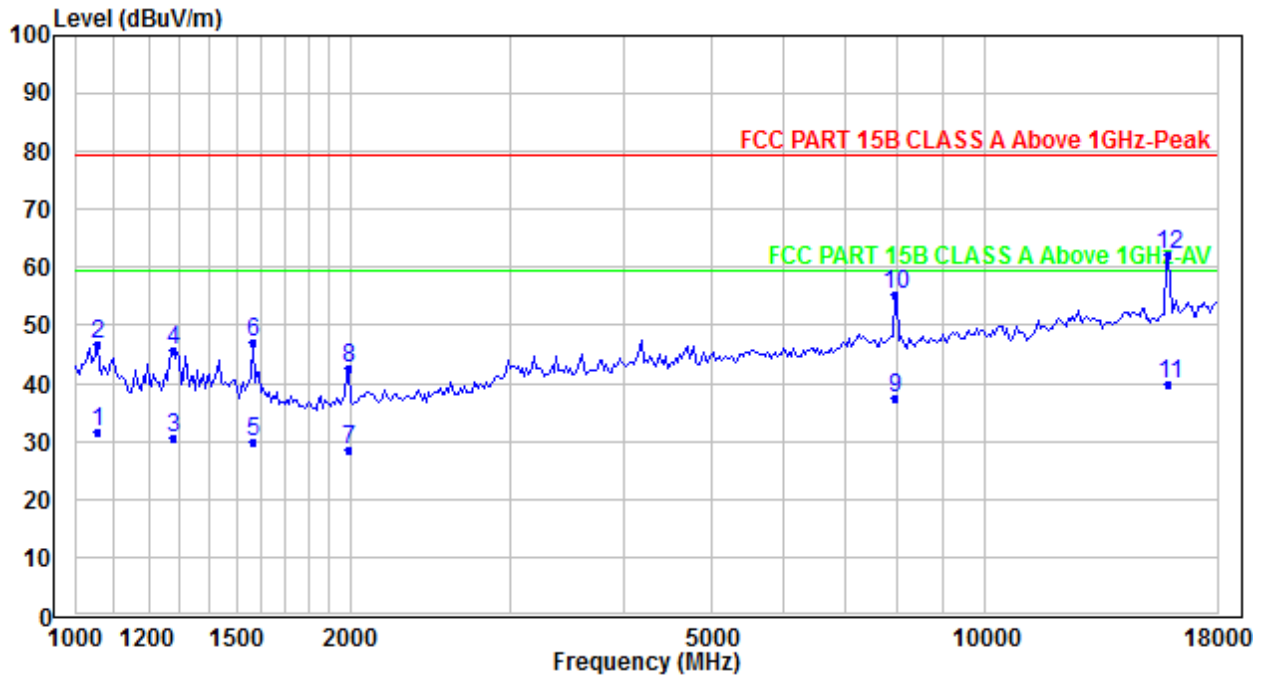

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1053.514	42.56	-10.84	31.72	59.50	-27.78	Average
2	1053.514	57.56	-10.84	46.72	79.50	-32.78	Peak
3	1275.423	42.35	-11.75	30.60	59.50	-28.90	Average
4	1275.423	57.35	-11.75	45.60	79.50	-33.90	Peak
5	1562.066	42.11	-12.15	29.96	59.50	-29.54	Average
6	1562.066	59.11	-12.15	46.96	79.50	-32.54	Peak
7	1992.295	38.58	-9.89	28.69	59.50	-30.81	Average
8	1992.295	52.58	-9.89	42.69	79.50	-36.81	Peak
9	7953.829	35.34	2.11	37.45	59.50	-22.05	Average
10	7953.829	53.34	2.11	55.45	79.50	-24.05	Peak
11	15938.420	28.57	11.46	40.03	59.50	-19.47	Average
12	15938.420	50.57	11.46	62.03	79.50	-17.47	Peak

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.0

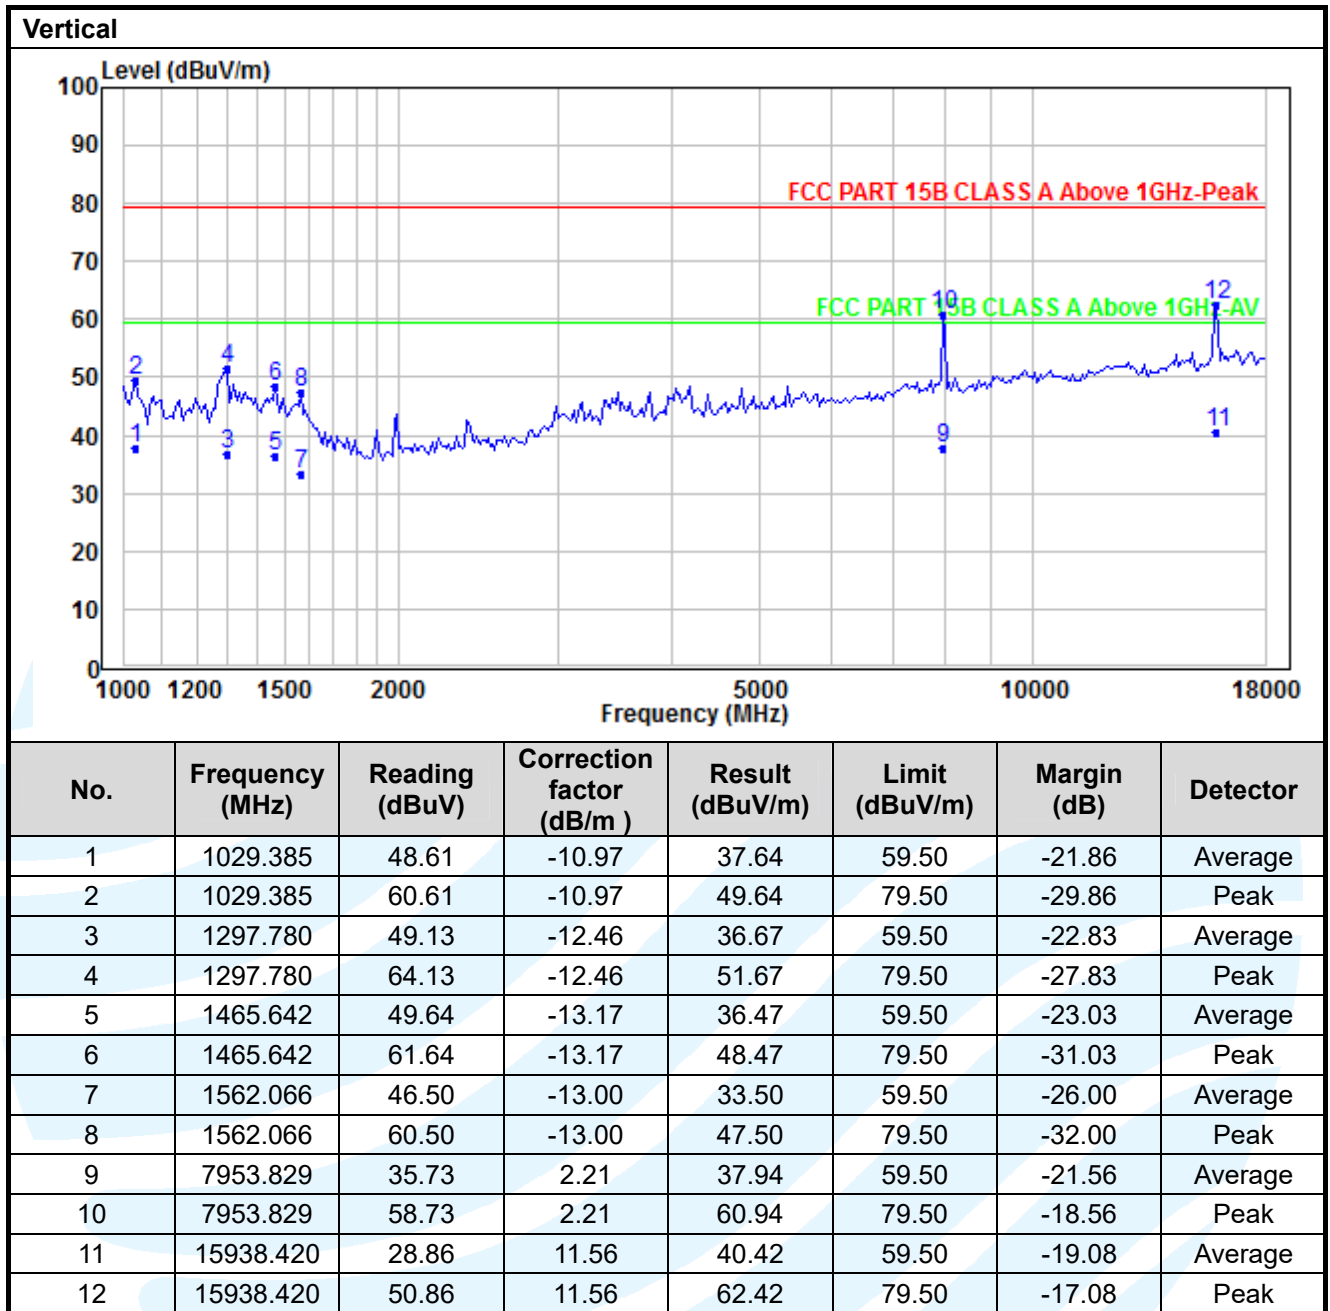

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.0

Above 1GHz(Peak & Average)
Mode 2 240V~ 50Hz by SWITCHING POWER SUPPLY Model DPS-3000AB-19 A
Horizontal

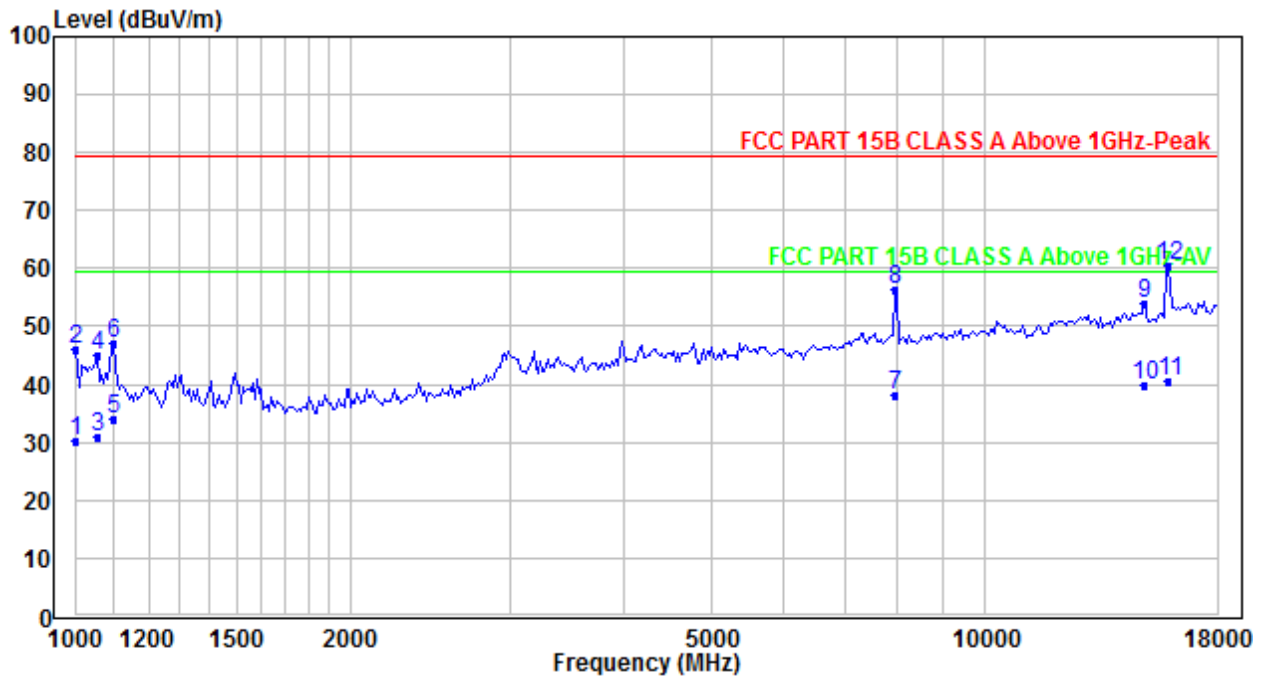

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1000.000	40.79	-10.61	30.18	59.50	-29.32	Average
2	1000.000	56.79	-10.61	46.18	79.50	-33.32	Peak
3	1053.514	41.76	-10.84	30.92	59.50	-28.58	Average
4	1053.514	55.76	-10.84	44.92	79.50	-34.58	Peak
5	1097.108	44.94	-11.00	33.94	59.50	-25.56	Average
6	1097.108	57.94	-11.00	46.94	79.50	-32.56	Peak
7	7953.829	36.10	2.11	38.21	59.50	-21.29	Average
8	7953.829	54.10	2.11	56.21	79.50	-23.29	Peak
9	14954.580	41.91	11.96	53.87	79.50	-25.63	Average
10	14954.580	27.91	11.96	39.87	59.50	-19.63	Peak
11	15938.420	29.13	11.46	40.59	59.50	-18.91	Average
12	15938.420	49.13	11.46	60.59	79.50	-18.91	Peak

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.0

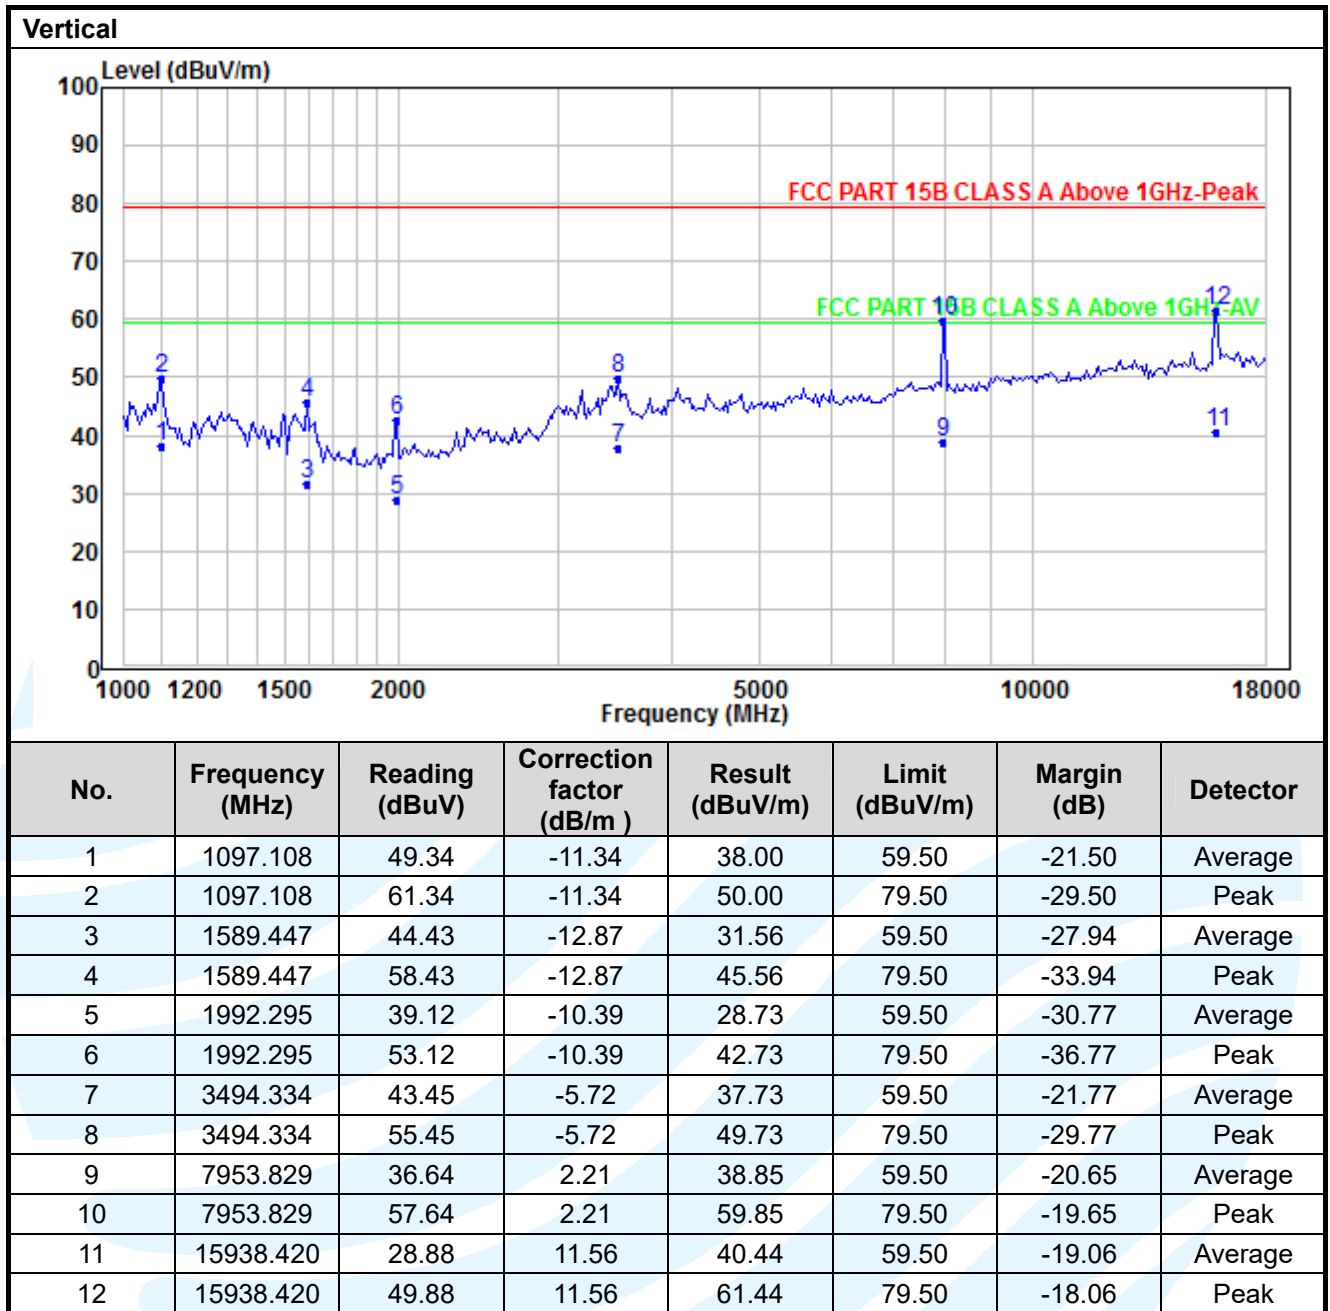

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit
4. For Radiated Emission above 18GHz, there was not any unwanted emission detected.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.0

6.2 CONDUCTED EMISSION

Test Requirement: FCC 47 CFR Part 15.107

Test Method: ANSI C63.4-2014

Limits:

Limits for Class A devices

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.3.2 for details.

Test Procedures:

- 1) The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- 2) The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- 3) For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The measurement data as follows:


Quasi Peak and Average:

Mode 1 120V~ 60Hz by SWITCHING POWER SUPPLY Model GW-CRPS3000L5R

Live Line

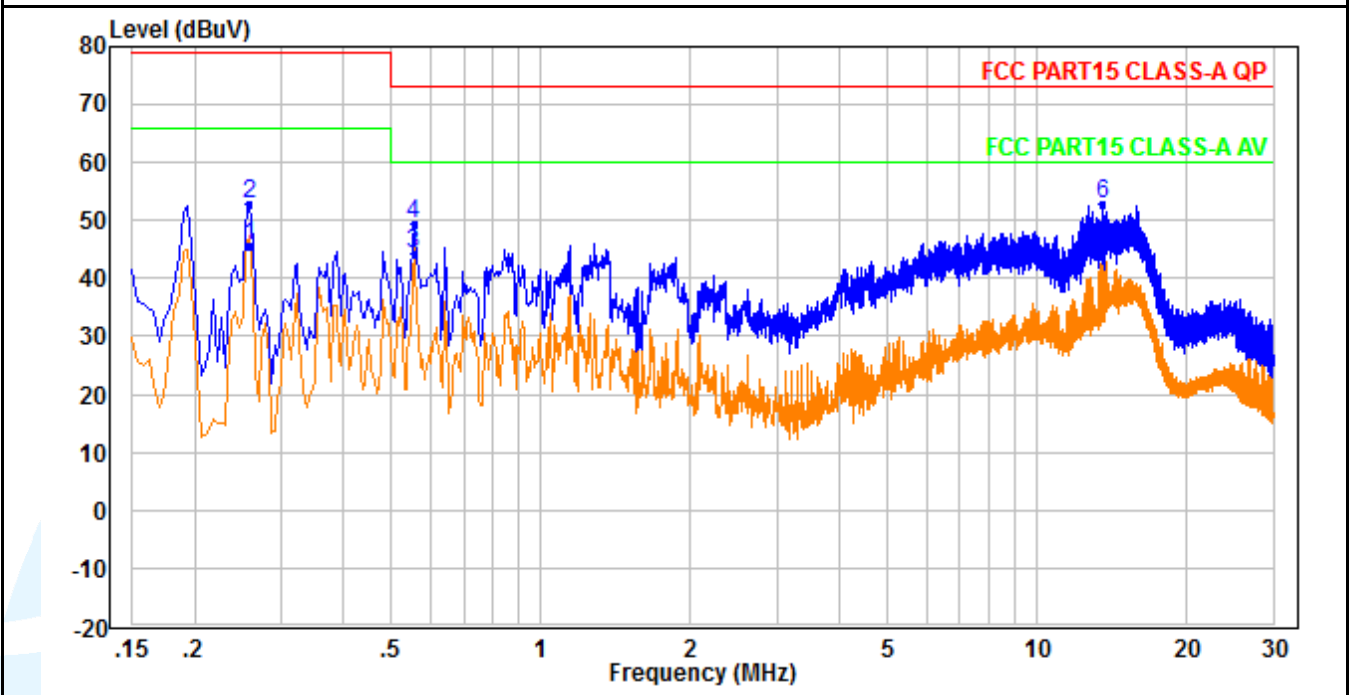

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.258	36.48	9.15	45.63	66.00	-20.37	Average
2	0.258	43.81	9.15	52.96	79.00	-26.04	QP
3	0.554	35.05	9.31	44.36	60.00	-15.64	Average
4	0.554	40.13	9.31	49.44	73.00	-23.56	QP
5	13.621	33.94	9.81	43.75	60.00	-16.25	Average
6	13.621	43.08	9.81	52.89	73.00	-20.11	QP

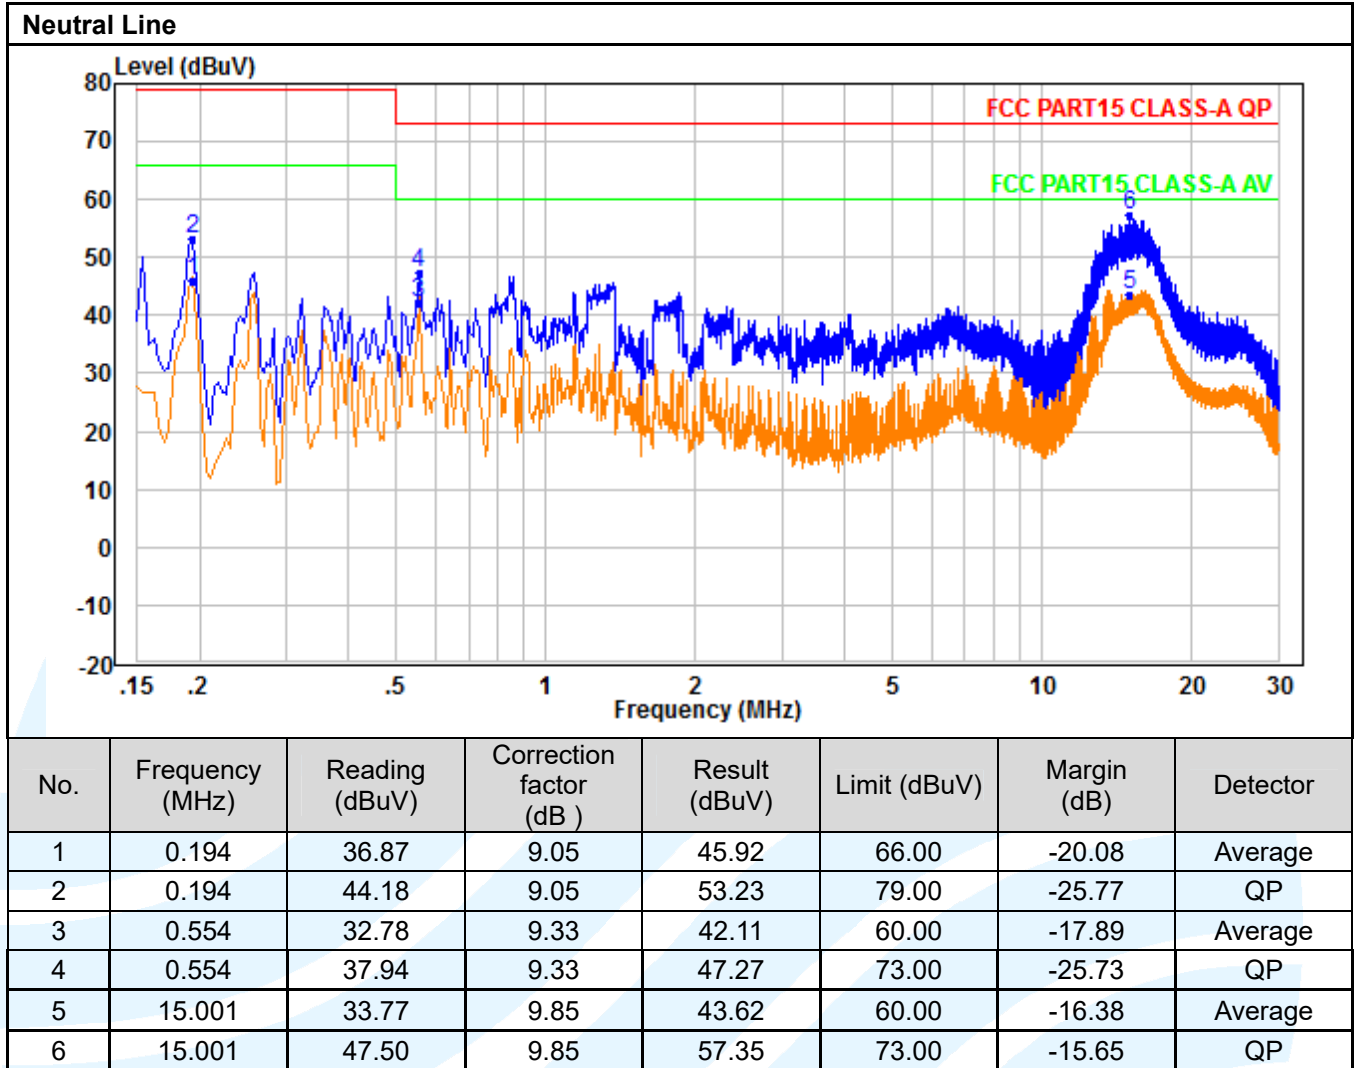

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.0

**Quasi Peak and Average:
Mode 2 240V~ 50Hz by SWITCHING POWER SUPPLY Model GW-CRPS3000L5R**

Live Line

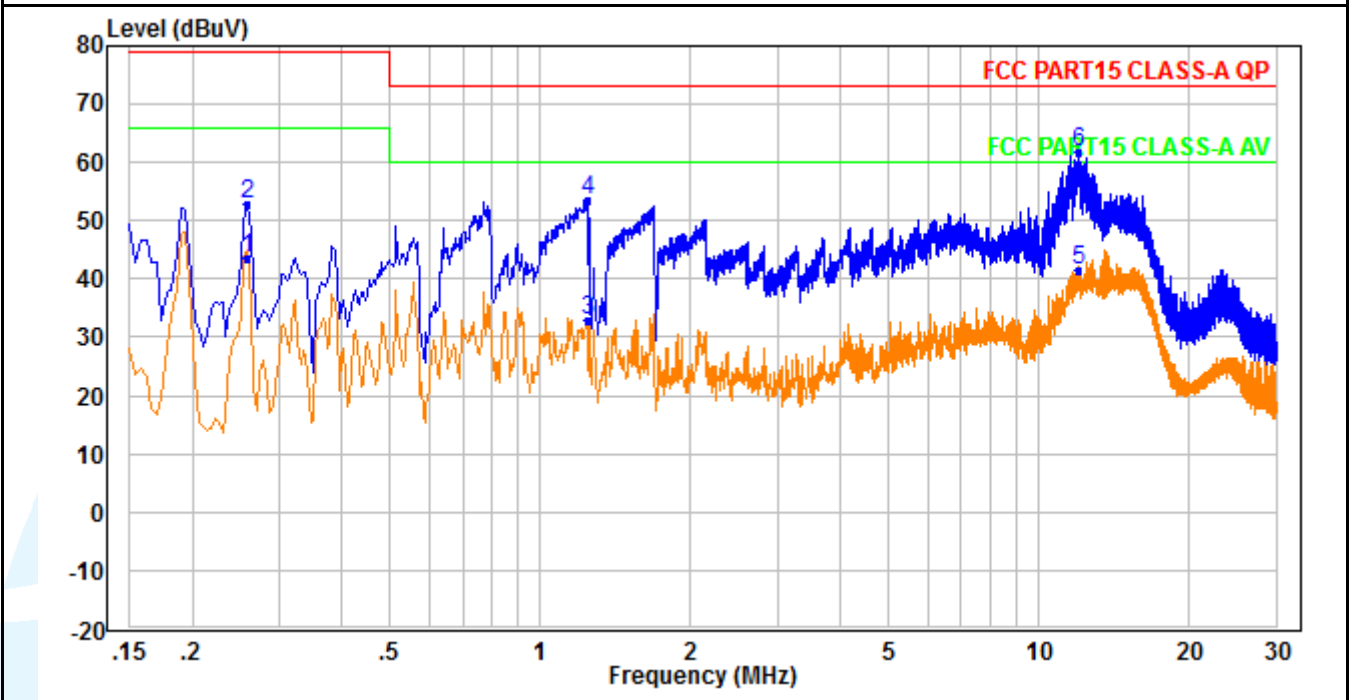

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.258	34.34	9.15	43.49	66.00	-22.51	Average
2	0.258	43.72	9.15	52.87	79.00	-26.13	QP
3	1.242	23.51	9.47	32.98	60.00	-27.02	Average
4	1.242	44.24	9.47	53.71	73.00	-19.29	QP
5	12.057	31.67	9.74	41.41	60.00	-18.59	Average
6	12.057	52.06	9.74	61.80	73.00	-11.20	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.0

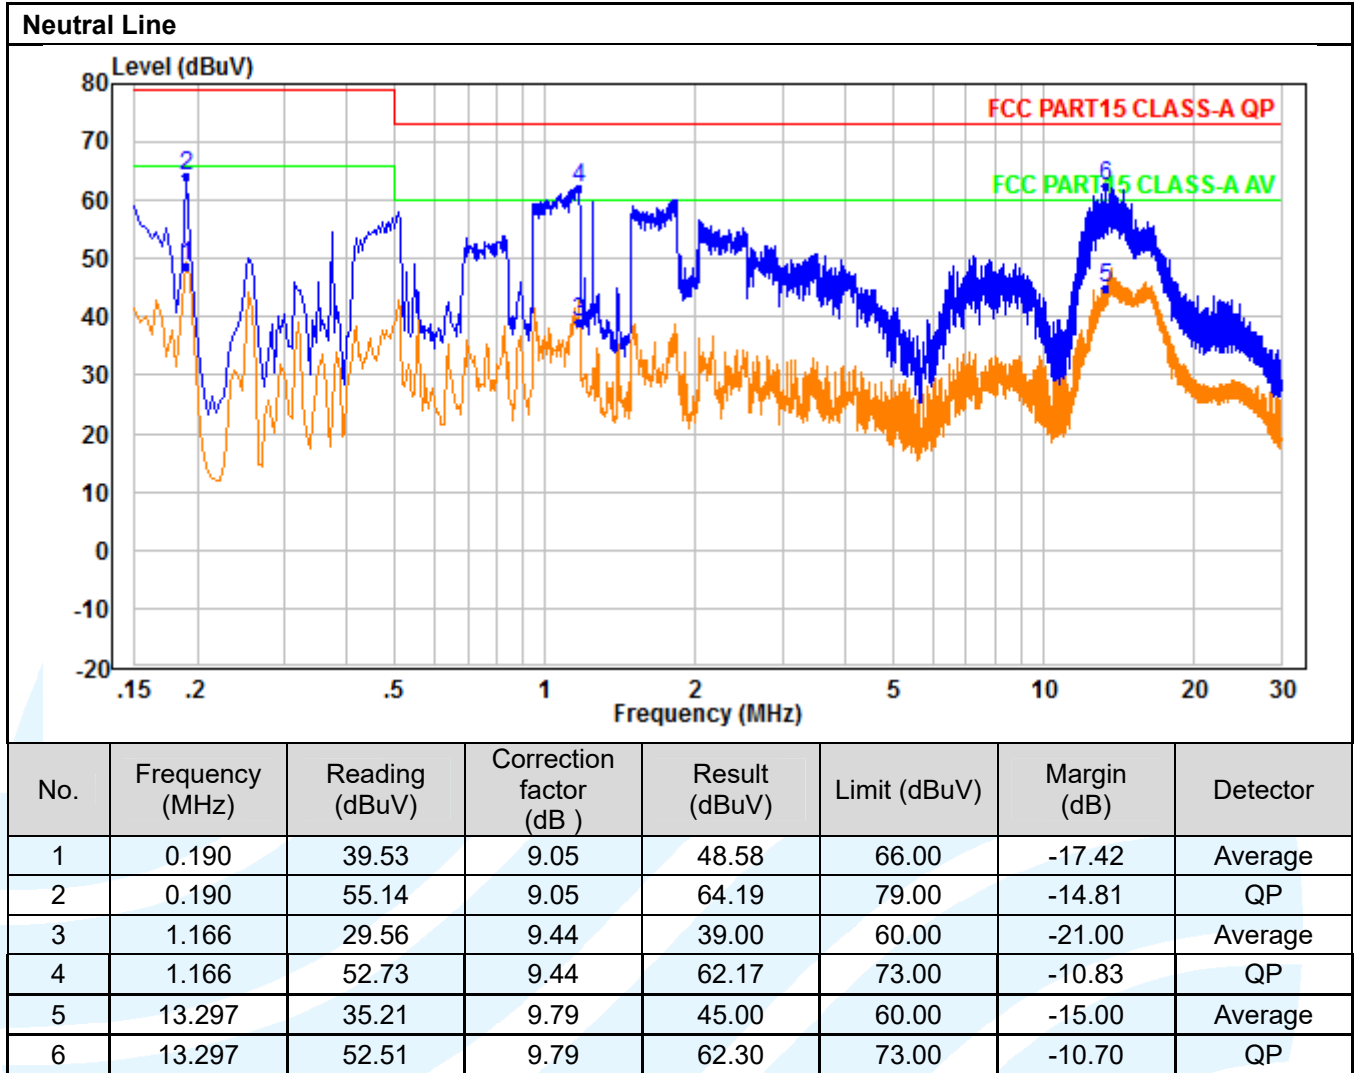

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.0

**Quasi Peak and Average:
Mode 1 120V~ 60Hz by SWITCHING POWER SUPPLY Model DPS-3000AB-19 A**

Live Line

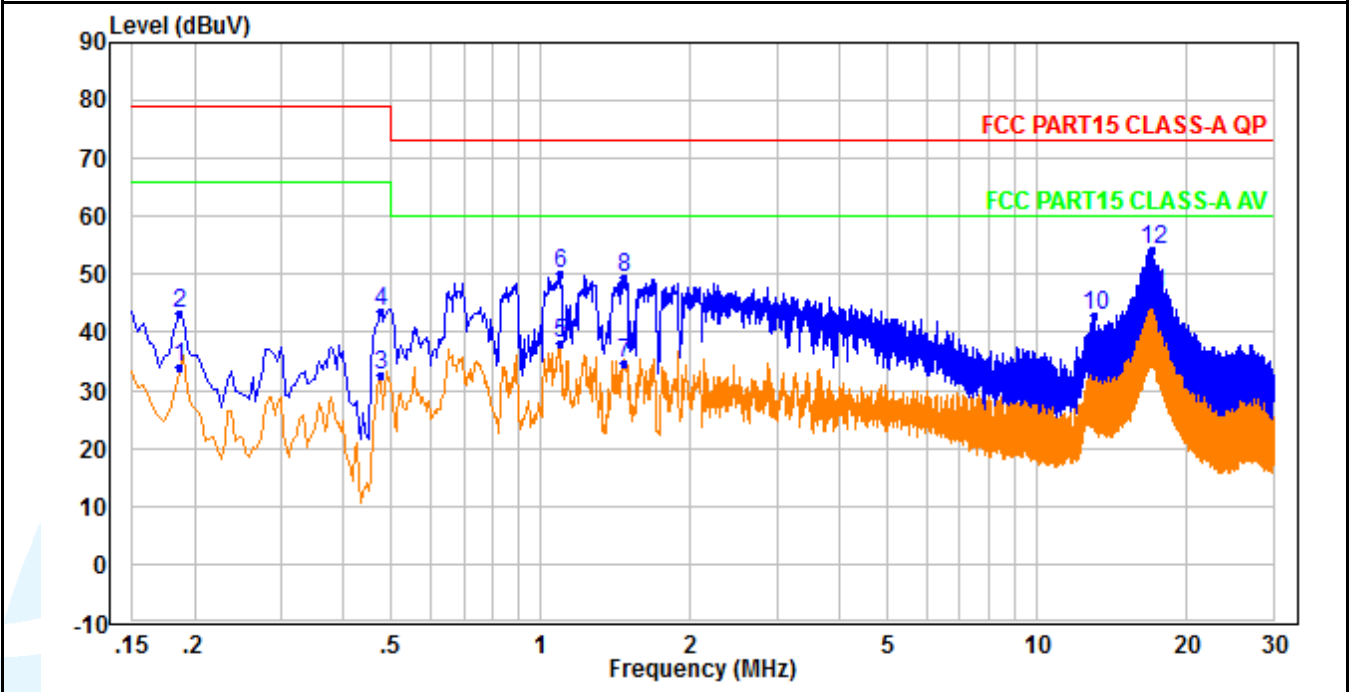

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.186	24.91	9.05	33.96	66.00	-32.04	Average
2	0.186	34.18	9.05	43.23	79.00	-35.77	QP
3	0.474	23.32	9.28	32.60	66.00	-33.40	Average
4	0.474	34.26	9.28	43.54	79.00	-35.46	QP
5	1.098	28.82	9.42	38.24	60.00	-21.76	Average
6	1.098	40.57	9.42	49.99	73.00	-23.01	QP
7	1.466	25.33	9.50	34.83	60.00	-25.17	Average
8	1.466	39.93	9.50	49.43	73.00	-23.57	QP
9	13.113	25.27	9.78	35.05	60.00	-24.95	Average
10	13.113	33.25	9.78	43.03	73.00	-29.97	QP
11	17.169	36.66	9.91	46.57	60.00	-13.43	Average
12	17.169	44.35	9.91	54.26	73.00	-18.74	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>


UTTR-EMC-FCCPART15B-V1.0

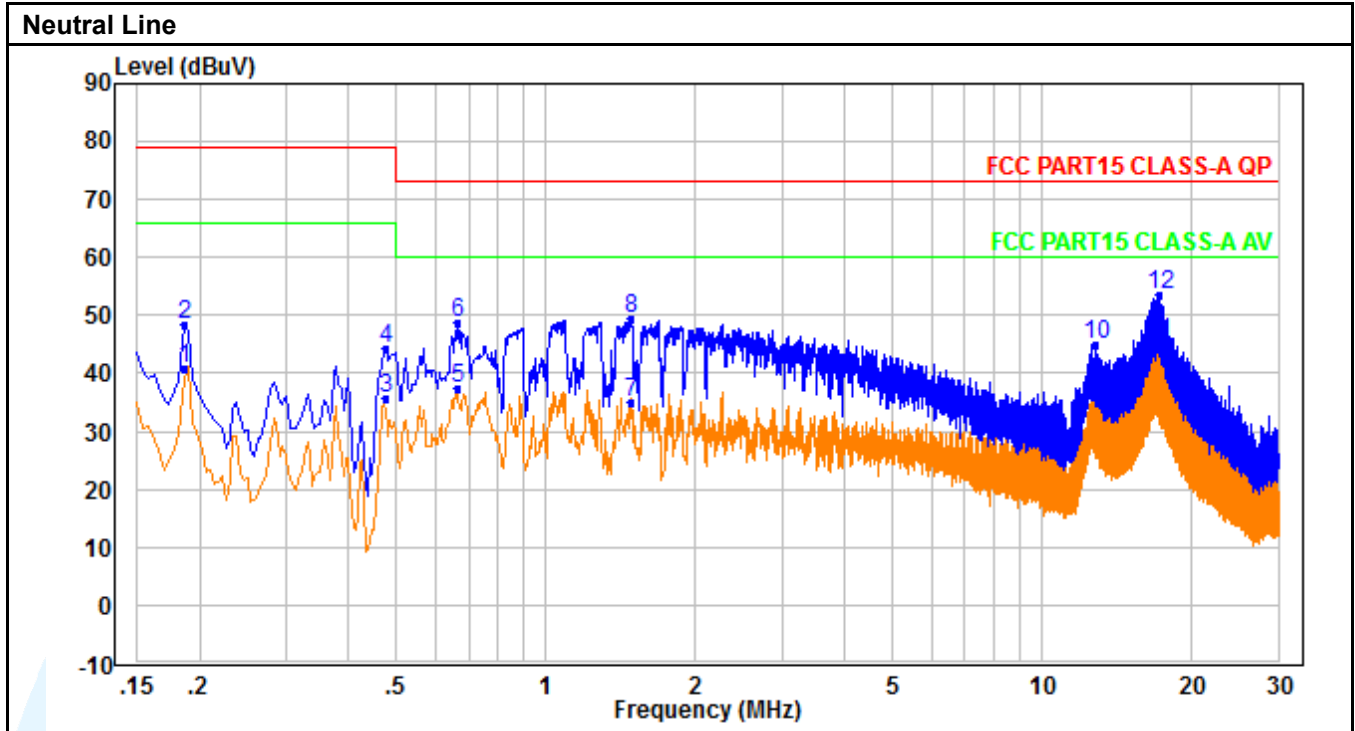


No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.186	31.64	9.05	40.69	66.00	-25.31	Average
2	0.186	39.26	9.05	48.31	79.00	-30.69	QP
3	0.474	26.39	9.30	35.69	66.00	-30.31	Average
4	0.474	35.03	9.30	44.33	79.00	-34.67	QP
5	0.666	27.97	9.37	37.34	60.00	-22.66	Average
6	0.666	39.41	9.37	48.78	73.00	-24.22	QP
7	1.486	25.56	9.50	35.06	60.00	-24.94	Average
8	1.486	40.10	9.50	49.60	73.00	-23.40	QP
9	12.833	27.38	9.77	37.15	60.00	-22.85	Average
10	12.833	35.07	9.77	44.84	73.00	-28.16	QP
11	17.265	35.34	9.91	45.25	60.00	-14.75	Average
12	17.265	43.59	9.91	53.50	73.00	-19.50	QP

**Quasi Peak and Average:
Mode 2 240V~ 50Hz by SWITCHING POWER SUPPLY Model DPS-3000AB-19 A**

Live Line

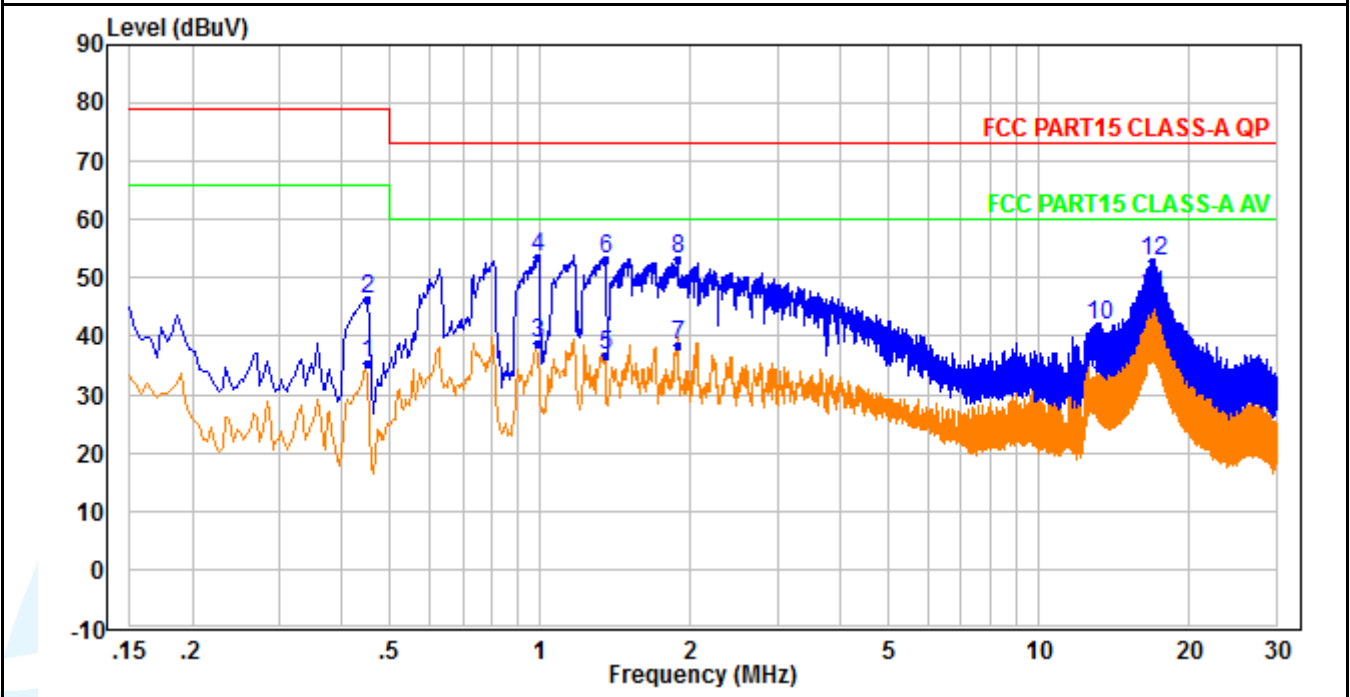

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.450	26.15	9.25	35.40	66.00	-30.60	Average
2	0.450	37.19	9.25	46.44	79.00	-32.56	QP
3	0.990	29.46	9.40	38.86	60.00	-21.14	Average
4	0.990	44.05	9.40	53.45	73.00	-19.55	QP
5	1.350	27.35	9.48	36.83	60.00	-23.17	Average
6	1.350	43.84	9.48	53.32	73.00	-19.68	QP
7	1.882	28.86	9.56	38.42	60.00	-21.58	Average
8	1.882	43.59	9.56	53.15	73.00	-19.85	QP
9	13.205	24.78	9.79	34.57	60.00	-25.43	Average
10	13.205	31.97	9.79	41.76	73.00	-31.24	QP
11	16.977	37.18	9.90	47.08	60.00	-12.92	Average
12	16.977	42.82	9.90	52.72	73.00	-20.28	QP

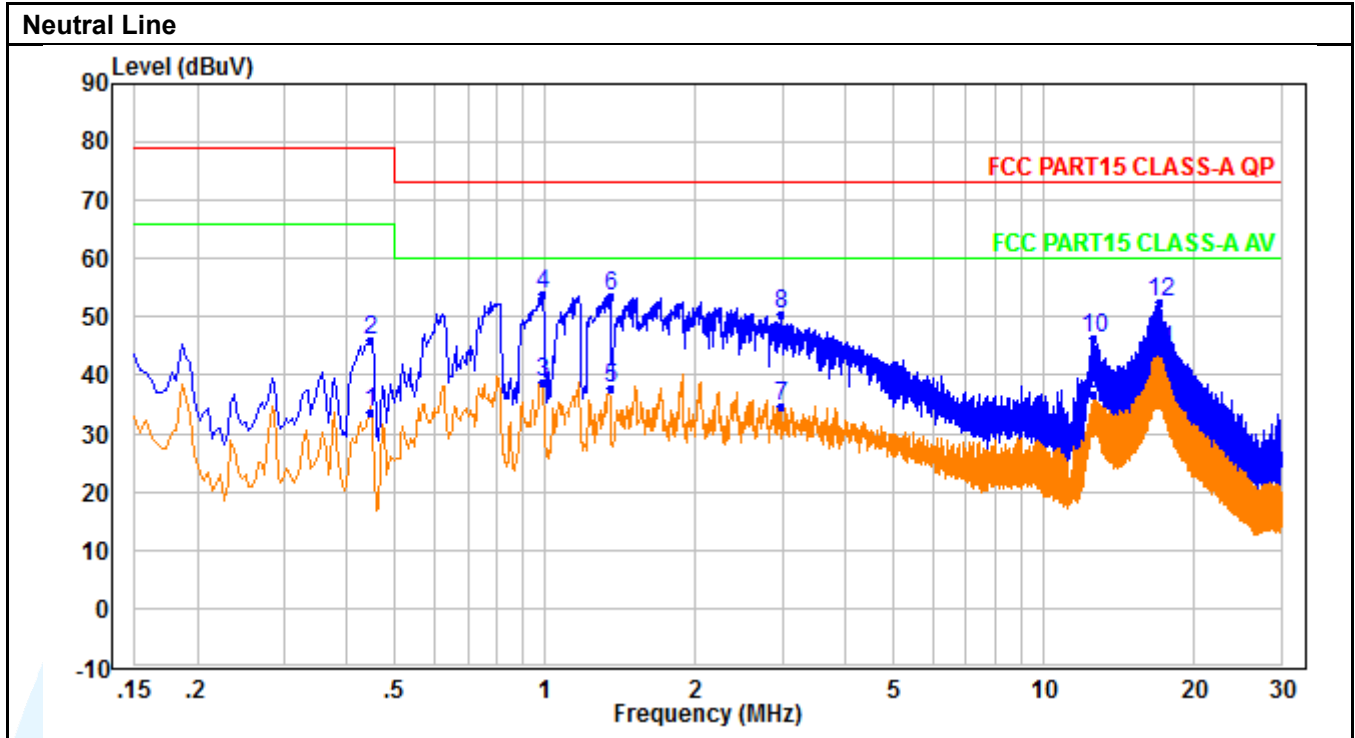

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.446	24.24	9.25	33.49	66.00	-32.51	Average
2	0.446	36.81	9.25	46.06	79.00	-32.94	QP
3	0.990	29.39	9.40	38.79	60.00	-21.21	Average
4	0.990	44.49	9.40	53.89	73.00	-19.11	QP
5	1.350	28.21	9.48	37.69	60.00	-22.31	Average
6	1.350	44.12	9.48	53.60	73.00	-19.40	QP
7	2.970	24.97	9.61	34.58	60.00	-25.42	Average
8	2.970	40.85	9.61	50.46	73.00	-22.54	QP
9	12.637	26.87	9.76	36.63	60.00	-23.37	Average
10	12.637	36.76	9.76	46.52	73.00	-26.48	QP
11	17.165	34.29	9.91	44.20	60.00	-15.80	Average
12	17.165	42.48	9.91	52.39	73.00	-20.61	QP

Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.0

APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

***** End of Report *****

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
