

Human Exposure Report

Application No.: SZEM1909018712CR
Applicant: SHENZHEN DBK ELECTRONICS CO., LTD.
Address of Applicant: No.8 Qinghua Road, Zhu Village, Fucheng New Community, Guanlan Street, Longhua District, Shenzhen City, Guangdong Province, P.R.China
Manufacturer: Dongguan DBK Energy Technology Co., Ltd
Address of Manufacturer: No.51 Zhangshen Middle Road, Xuzhen Community, Zhangmutou Town, Dongguan City, Guangdong Province, P.R. China
Factory: Dongguan DBK Energy Technology Co., Ltd
Address of Factory: No.51 Zhangshen Middle Road, Xuzhen Community, Zhangmutou Town, Dongguan City, Guangdong Province, P.R. China
Equipment Under Test (EUT):
EUT Name: Wireless charger
Model No.: CP230
Trade mark:



FCC ID: 2ARVRCP230H
Standards: 47 CFR PART 1, Subpart I, Section 1.1310
 47 CFR PART 2, Subpart J, Section 2.1091
Date of Receipt: 2019-09-20
Date of Test: 2019-09-23 to 2019-09-29
Date of Issue: 2019-10-08

Test Result :	Pass*
----------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above

Keny Xu
 EMC Laboratory Manager





<i>Revision Record</i>				
<i>Version</i>	<i>Chapter</i>	<i>Date</i>	<i>Modifier</i>	<i>Remark</i>
01		2019-10-08		Original

Authorized for issue by:			
			
		_____ Leo Li /Project Engineer	
			
		_____ Eric Fu /Reviewer	



2 Contents

1	COVER PAGE	1
2	CONTENTS	3
3	GENERAL INFORMATION	4
3.1	DETAILS OF E.U.T.	4
3.2	DESCRIPTION OF SUPPORT UNITS	4
3.3	TEST LOCATION	5
3.4	TEST FACILITY.....	5
3.5	DEVIATION FROM STANDARDS.....	5
3.6	ABNORMALITIES FROM STANDARD CONDITIONS.....	5
4	EQUIPMENTS USED DURING TEST	6
5	TEST RESULTS	7
5.1	RF EXPOSURE TEST	7
5.1.1	<i>E.U.T. Operation</i>	7
6	PHOTOGRAPHS- RF EXPOSURE SETUP	9



3 General Information

3.1 Details of E.U.T.

Power supply: Input: DC 5V/2A, DC 9V/1.67A
 Output:
 WPC: 5W(DC 5V/1A), 7.5W(DC 5V/1.5A), 10W(DC 9V/1.1A)

Cable: USB cable: 100cm unshielded

Operation frequency: 111.38-164.26kHz

Antenna Type: Loop Antenna

Modulation Type: Load Modulation

Antenna Gain: 0dBi

Remark: Tests were conducted in all load modes and the worst case 10W is reported only.

3.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
iPhone 8	Apple	A1863	F4GVQ656JC6D
AC/DC Adapter	HUAWEI	HW-050450C01	CA36YTK7J05927
Adapter	LE	EQ-24BCN	65201C44220



3.3 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

3.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 3816.01.

- **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

3.5 Deviation from Standards

None.

3.6 Abnormalities from Standard Conditions

None.



4 Equipments Used during Test

Item	Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
1	EMF Tester	Narda	ELT-400	SZE039-4	2019-07-08	2020-07-07



5 Test Results

5.1 RF Exposure test

Test Requirement: 47 CFR PART 1, Subpart I, Section 1.1310

Measurement Distance: 15cm

Limit:

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
 *=Plane-wave equivalent power density
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

5.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C Humidity: 52% RH Atmospheric Pressure: 1015 mbar

EUT Operation:

This device has been tested with mobile phone at zero charge, intermediate charge, and full charge.



5.1.2 Measurement Data

Output Voltage=DC 9V; The max output power =10W;Calculation of resistor value=8.1Ω

Magnetic Field Emissions

Operation frequency	Test Distance (cm)	Test Position	Probe Measure Result (A/m)	50% Limit (A/m)
141.7 kHz	15	Side 1	0.081	0.815
		Side 2	0.058	0.815
		Side 3	0.095	0.815
		Side 4	0.042	0.815
		Top	0.036	0.815


Mobile phone has been charge at zero charge, intermediate charge, and full charge.

Magnetic Field Emissions

Operation frequency	Test Distance (cm)	Test Position	Probe Measure Result(A/m)			50%Limit (A/m)
			zero charge	intermediate charge	full charge	
141.7 kHz	15	Side 1	0.092	0.081	0.067	0.815
		Side 2	0.069	0.059	0.046	0.815
		Side 3	0.105	0.092	0.078	0.815
		Side 4	0.054	0.046	0.029	0.815
		Top	0.046	0.033	0.025	0.815



6 Photographs- RF exposure setup

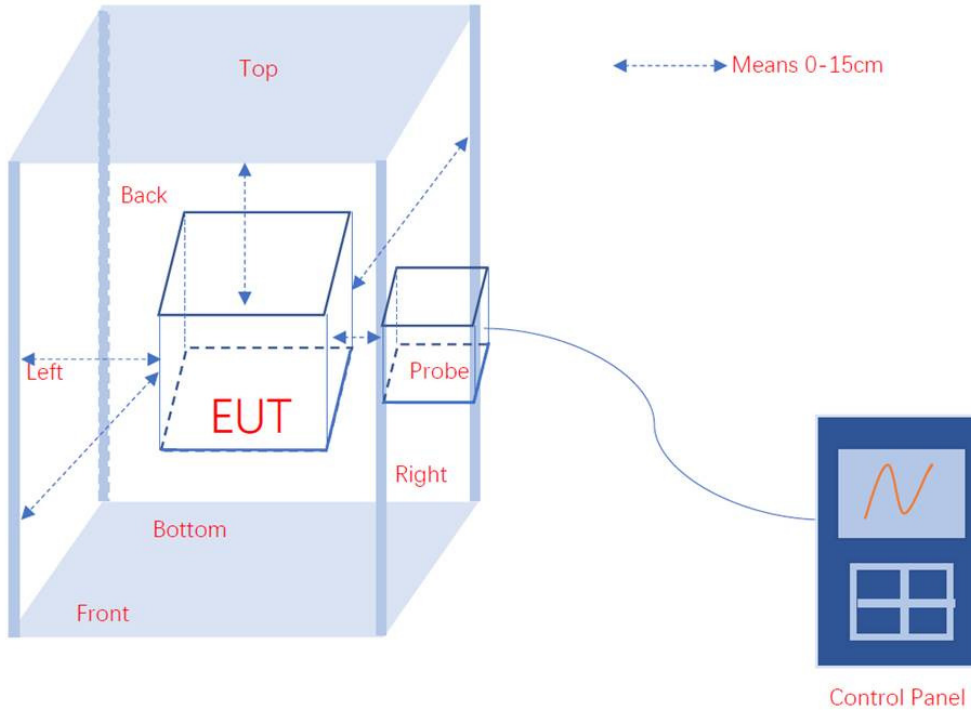

- End of the Report -

