



FCC TEST REPORT

**Test report
On Behalf of
Shenzhen Helilai Dianzi youxiangongsi
For
Mini Personal Heater
Model No.: PN500, PN350

FCC ID: 2ARWU-PN500**

Prepared for : **Shenzhen Helilai Dianzi youxiangongsi**
Shenzhen longgangqu bantianjiedao huanchengnanlu 5hao bantianguojizhongxin
Cdong C1-1108, Shenzhen, China

Prepared By : **Shenzhen HUAKE Testing Technology Co., Ltd.**
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China

Date of Test: **November 05, 2018~ November 20, 2018**
Date of Report: **November 21, 2018**
Report Number: **HK1811151592E2**



TEST RESULT CERTIFICATION

Applicant's name : Shenzhenshi Helilai Dianzi youxiangongsi
Address : Shenzhen longgangqu bantianjiedao huanchengnanlu 5hao
bantianguojizhongxin Cdong C1-1108, Shenzhen, China
Manufacture's Name : Shenzhenshi Helilai Dianzi youxiangongsi
Address : Shenzhen longgangqu bantianjiedao huanchengnanlu 5hao
bantianguojizhongxin Cdong C1-1108, Shenzhen, China

Product description

Trade Mark : Panamalar
Product name : Mini Personal Heater
Model and/or type reference : PN500, PN350

Standards : FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test :
Date (s) of performance of tests : November 05, 2018~ November 20, 2018
Date of Issue : November 21, 2018
Test Result : Pass

Testing Engineer : Gary Qian

(Gary Qian)

Technical Manager : Eden Hu

(Eden Hu)

Authorized Signatory : Jason Zhou

(Jason Zhou)



Revision History

Revision	Issue Date	Revisions	Revised By
00	November 21, 2018	Initial Issue	Jason Zhou



TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1. DESCRIPTION OF DEVICE (EUT)	5
1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS	6
1.3. EUT CONFIGURATION	6
THE FOLLOWING PERIPHERAL DEVICES AND INTERFACE CABLES WERE CONNECTED DURING THE MEASUREMENT:	6
1.4. EXTERNAL I/O CABLE	6
1.5. DESCRIPTION OF TEST FACILITY	6
1.6. STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
1.7. MEASUREMENT UNCERTAINTY	6
1.8. DESCRIPTION OF TEST MODES	7
2. TEST METHODOLOGY	8
2.1. EUT CONFIGURATION.....	8
2.2. EUT EXERCISE	8
2.3. GENERAL TEST PROCEDURES	8
3. SYSTEM TEST CONFIGURATION.....	9
3.1. JUSTIFICATION.....	9
3.2. EUT EXERCISE SOFTWARE	9
3.3. SPECIAL ACCESSORIES	9
3.4. BLOCK DIAGRAM/SCHEMATICS.....	9
3.5. EQUIPMENT MODIFICATIONS	9
3.6. TEST SETUP	9
4. SUMMARY OF TEST RESULTS.....	10
5. TEST RESULT.....	11
5.1. RADIATED EMISSIONS MEASUREMENT	11
5.2. POWER LINE CONDUCTED EMISSIONS	23
5.3. BAND-EDGE MEASUREMENTS FOR RADIATED EMISSIONS	26
6. LIST OF MEASURING EQUIPMENTS	30
7. TEST SETUP PHOTOGRAPHS OF EUT.....	31
8. EXTERIOR PHOTOGRAPHS OF THE EUT.....	31
9. INTERIOR PHOTOGRAPHS OF THE EUT	31



1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Mini Personal Heater
Model Number : PN500, PN350
Model Difference Declaration : N/A
Test Model : PN500
Power Supply : AC 100-240V 50/60Hz
Hardware version : V0.2
Software version : V1.0

Wlan

WLAN : Supported IEEE 802.11b/g/n
WLAN FCC Operation Frequency : IEEE 802.11b:2412-2462MHz
: IEEE 802.11g:2412-2462MHz
: IEEE 802.11n HT20:2412-2462MHz
WLAN Channel Number : 11 Channels for 2412-2462MHz(IEEE 802.11b/g/n HT20)
: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)
WLAN Modulation Technology : IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK)
: IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Type And Gain : Internal Antenna 3.00 dBi

Note: Antenna position refer to EUT Photos.



1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
/	/	/	/	/

1.3. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

○			

1.4. External I/O Cable

I/O Port Description	Quantity	Cable
USB Port	1	1m, unshielded
Earphone Port	1	N/A

1.5. Description of Test Facility

Designation Number: CN1229

Test Firm Registration Number: 616276

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.6. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the HUAK quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.7. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	±3.08dB	(1)
	30MHz~1000MHz	±4.42dB	(1)
	1GHz~40GHz	±4.06dB	(1)
Conduction Uncertainty	150kHz~30MHz	±2.23dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



1.8. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.

AC power line conducted emission pre-test at both at AC 120V/60Hz and AC 240V/50Hz modes, recorded worst case.

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, that was determined to be 802.11b mode(Low Channel).

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be 802.11b mode(Low Channel).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

IEEE 802.11b Mode: 1 Mbps, DSSS.

IEEE 802.11g Mode: 6 Mbps, OFDM.

IEEE 802.11n Mode HT20: MCS0, OFDM.

Antenna & Bandwidth

Antenna	One Antenna	
	20MHz	40MHz
IEEE 802.11b	<input checked="" type="checkbox"/>	<input type="checkbox"/>
IEEE 802.11g	<input checked="" type="checkbox"/>	<input type="checkbox"/>
IEEE 802.11n	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Channel List & Frequency

IEEE 802.11b/g/n HT20

Frequency Band	Channel No.	Frequency(MHz)	Channel No.	Frequency(MHz)
2412~2462MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	--	--



2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen HUAK Testing Technology Co., Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure KDB 558074 D01 DTS Meas Guidance v04 and KDB 662911 D01 Multiple Transmitter Output v02r01 are required to be used for this kind of FCC 15.247 digital modulation device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013



3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmits condition.

3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (ESP Series Modules FCC & CE Test Tool) provided by application.

3.3. Special Accessories

No.	Equipment	Manufacturer	Model No.	Serial No.	Length	shielded/ unshielded	Notes
/	/	/	/	/	/	/	/

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen HUAK Testing Technology Co., Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.



4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
/	Duty Cycle	Note ¹
§15.247(b)	Maximum Conducted Output Power	Note ¹
§15.247(e)	Power Spectral Density	Note ¹
§15.247(a)(2)	6dB Bandwidth	Note ¹
§15.247(a)	Occupied Bandwidth	Note ¹
§15.247(d)	Conducted Spurious Emissions	Note ¹
§15.209, §15.247(d)	Radiated Spurious Emissions	Compliant
§15.205	Emissions at Restricted Band	Compliant
§15.207(a)	Conducted Emissions	Compliant
§15.203	Antenna Requirements	Note ¹
§1.1310 & §2.1091	Maximum Permissible Exposure(MPE)	Note ¹

Note¹: The RF module(FCC ID: 2ANDL-TYWE1S) embed in this product has been certificate under FCC rules, test results listed in FCC website .



5. TEST RESULT

5.1. Radiated Emissions Measurement

5.1.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

5.1.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 ^m carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP



5.1.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.

--- If the EUT is a floor standing device, it is placed on the ground.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions.

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Premeasurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna height is 1.5 meter.

--- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

--- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).

--- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.



2) Sequence of testing 30 MHz to 1 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Premeasurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 3 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.

--- The final measurement will be done with QP detector with an EMI receiver.

--- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.



3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.



4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Premeasurement:


- The antenna is moved spherical over the EUT in different polarizations of the antenna.

Final measurement:


- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

5.1.4. Test Setup Layout


For radiated emissions below 30MHz

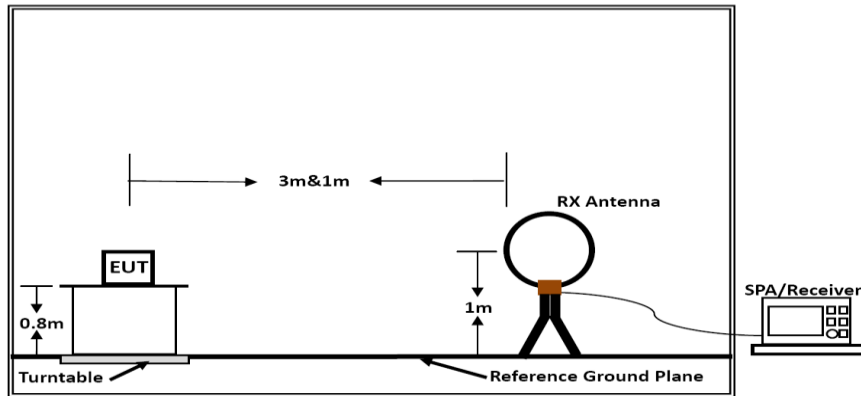

Below 30MHz

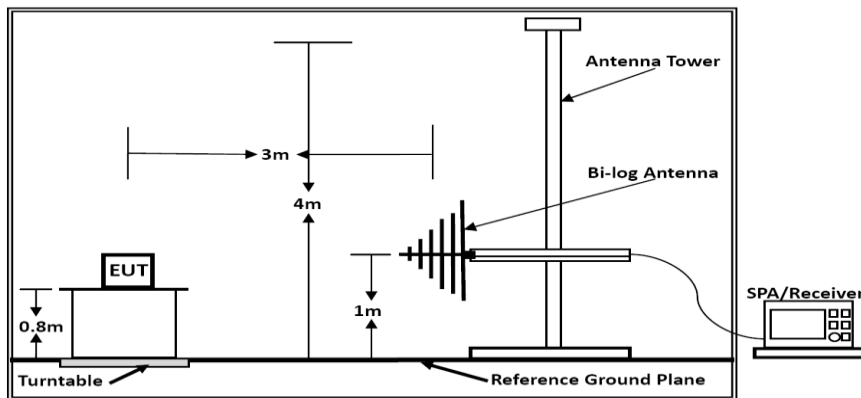

Below 1GHz

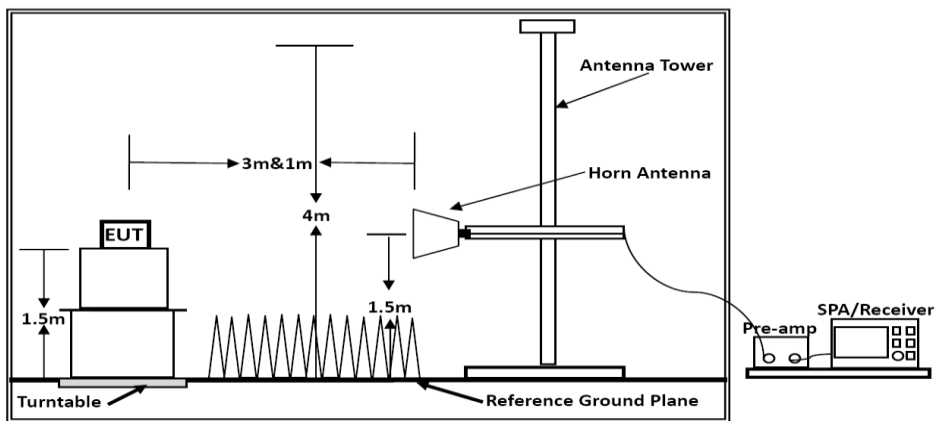

Above 1GHz

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);
 Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



5.1.6. Results of Radiated Emissions (9 KHz~30MHz)

Temperature	24.5°C	Humidity	56.2%
Test Engineer	Gary Qian	Configurations	IEEE 802.11b/g/n
Test Date	Nov 15, 2018		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


5.1.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	24.5°C	Humidity	56.2%
Test Engineer	Gary Qian	Configurations	802.11b mode (Low Channel)
Test Date	Nov 15, 2018		

The Worst Test result for 802.11b mode (Low Channel)




Vertical

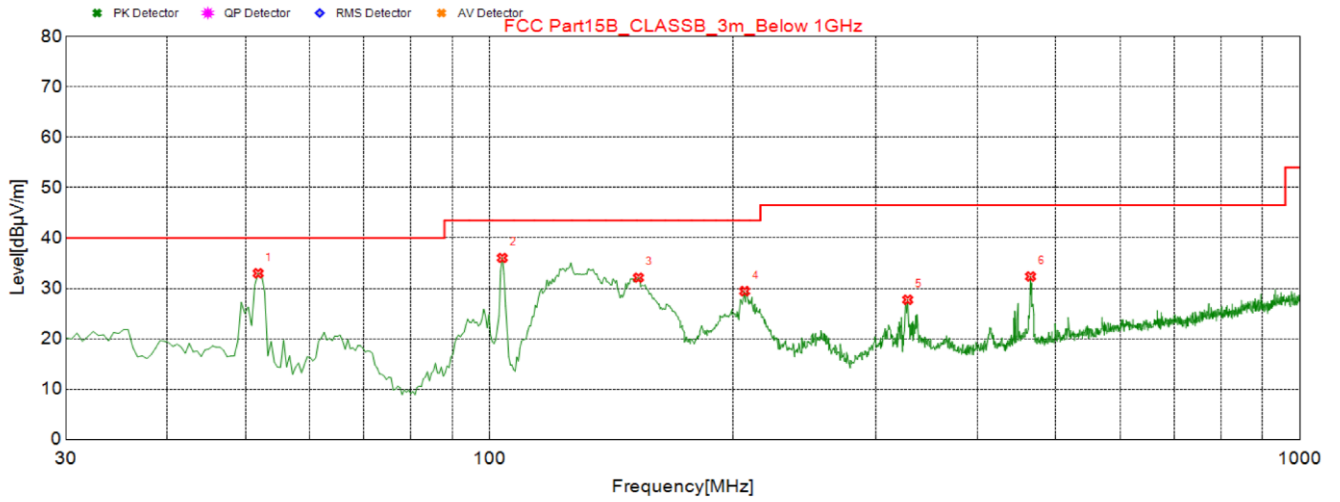

NO.	Freq. [MHz]	Result Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	51.825	32.99	-14.44	40.00	7.01	100	301	Vertical
2	103.720	36.04	-15.99	43.50	7.46	100	152	Vertical
3	152.705	32.12	-18.98	43.50	11.38	100	149	Vertical
4	206.540	29.44	-15.24	43.50	14.06	100	278	Vertical
5	328.275	27.73	-12.03	46.50	18.77	100	15	Vertical
6	465.530	32.36	-8.74	46.50	14.14	100	21	Vertical



Horizontal

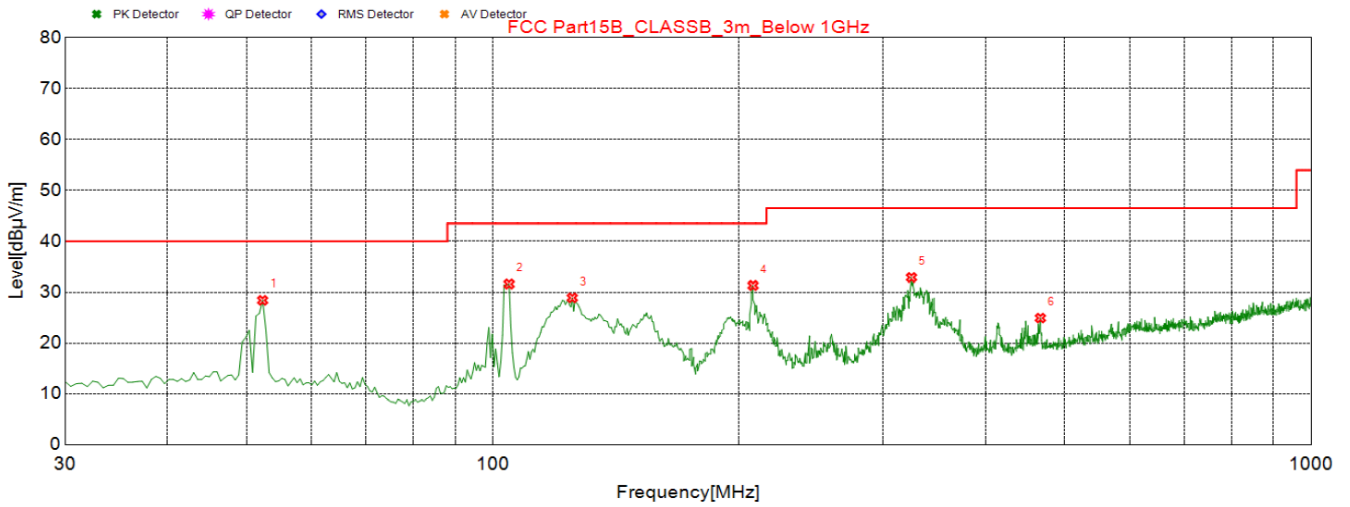

NO.	Freq. [MHz]	Result Level [dBuV/m]	Factor [dB/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle[°]	Polarity
1	52.310	28.41	-14.52	40.00	11.59	300	330	Horizontal
2	104.690	31.58	-16.00	43.50	11.92	300	349	Horizontal
3	125.060	28.9	-18.36	43.50	14.60	300	216	Horizontal
4	207.995	31.3	-15.19	43.50	12.20	100	236	Horizontal
5	324.880	32.85	-12.12	46.50	13.65	100	202	Horizontal
6	466.985	24.9	-8.71	46.50	21.60	100	12	Horizontal

Note:

- 1). Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11n HT40 (Low Channel) @ Chain 0+Chain 1
- 2). Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3). Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



5.1.8. Results for Radiated Emissions (Above 1GHz)

*IEEE 802.11b**Channel 1 / 2412 MHz*

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	57.98	33.06	35.04	3.94	59.94	74.00	14.06	Peak	Horizontal
4824.00	40.34	33.06	35.04	3.94	42.30	54.00	11.70	Average	Horizontal
4824.00	58.05	33.06	35.04	3.94	60.01	74.00	13.99	Peak	Vertical
4824.00	42.16	33.06	35.04	3.94	44.12	54.00	9.88	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	57.88	33.16	35.15	3.96	59.85	74.00	14.15	Peak	Horizontal
4874.00	43.43	33.16	35.15	3.96	45.40	54.00	8.60	Average	Horizontal
4874.00	58.34	33.16	35.15	3.96	60.31	74.00	13.69	Peak	Vertical
4874.00	45.55	33.16	35.15	3.96	47.52	54.00	6.48	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	58.19	33.26	35.14	3.98	60.29	74.00	13.71	Peak	Horizontal
4924.00	42.17	33.26	35.14	3.98	44.27	54.00	9.73	Average	Horizontal
4924.00	56.04	33.26	35.14	3.98	58.14	74.00	15.86	Peak	Vertical
4924.00	42.83	33.26	35.14	3.98	44.93	54.00	9.07	Average	Vertical

*IEEE 802.11g**Channel 1 / 2412 MHz*

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	56.46	33.06	35.04	3.94	58.42	74.00	15.58	Peak	Horizontal
4824.00	41.78	33.06	35.04	3.94	43.74	54.00	10.26	Average	Horizontal
4824.00	57.34	33.06	35.04	3.94	59.30	74.00	14.70	Peak	Vertical
4824.00	45.06	33.06	35.04	3.94	47.02	54.00	6.98	Average	Vertical



Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	57.26	33.16	35.15	3.96	59.23	74.00	14.77	Peak	Horizontal
4874.00	42.85	33.16	35.15	3.96	44.82	54.00	9.18	Average	Horizontal
4874.00	59.54	33.16	35.15	3.96	61.51	74.00	12.49	Peak	Vertical
4874.00	43.87	33.16	35.15	3.96	45.84	54.00	8.16	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	55.93	33.26	35.14	3.98	58.03	74.00	15.97	Peak	Horizontal
4924.00	40.53	33.26	35.14	3.98	42.63	54.00	11.37	Average	Horizontal
4924.00	59.33	33.26	35.14	3.98	61.43	74.00	12.57	Peak	Vertical
4924.00	40.02	33.26	35.14	3.98	42.12	54.00	11.88	Average	Vertical

IEEE 802.11n HT20

Channel 1 / 2412 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	56.70	33.06	35.04	3.94	58.66	74.00	15.34	Peak	Horizontal
4824.00	40.42	33.06	35.04	3.94	42.38	54.00	11.62	Average	Horizontal
4824.00	58.09	33.06	35.04	3.94	60.05	74.00	13.95	Peak	Vertical
4824.00	43.81	33.06	35.04	3.94	45.77	54.00	8.23	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	57.41	33.16	35.15	3.96	59.38	74.00	14.62	Peak	Horizontal
4874.00	43.60	33.16	35.15	3.96	45.57	54.00	8.43	Average	Horizontal
4874.00	57.46	33.16	35.15	3.96	59.43	74.00	14.57	Peak	Vertical
4874.00	42.49	33.16	35.15	3.96	44.46	54.00	9.54	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	56.77	33.26	35.14	3.98	58.87	74.00	15.13	Peak	Horizontal
4924.00	43.78	33.26	35.14	3.98	45.88	54.00	8.12	Average	Horizontal
4924.00	57.38	33.26	35.14	3.98	59.48	74.00	14.52	Peak	Vertical
4924.00	40.28	33.26	35.14	3.98	42.38	54.00	11.62	Average	Vertical



Notes:

1. *Measuring frequencies from 9 KHz - 10th harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.*
2. *Radiated emissions measured in frequency range from 9 KHz ~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.*
3. *Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
4. *Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;*
5. *Pre-scan at Antenna 0 and Antenna 1 for IEEE 802.11b and IEEE 802.11g mode, pre-scan at Antenna 0, Antenna 1 and Combined Antenna 0 and Antenna 1 for IEEE 802.11n mode, recorded worst case;*

5.2. Power line conducted emissions


5.2.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

5.2.2 Block Diagram of Test Setup

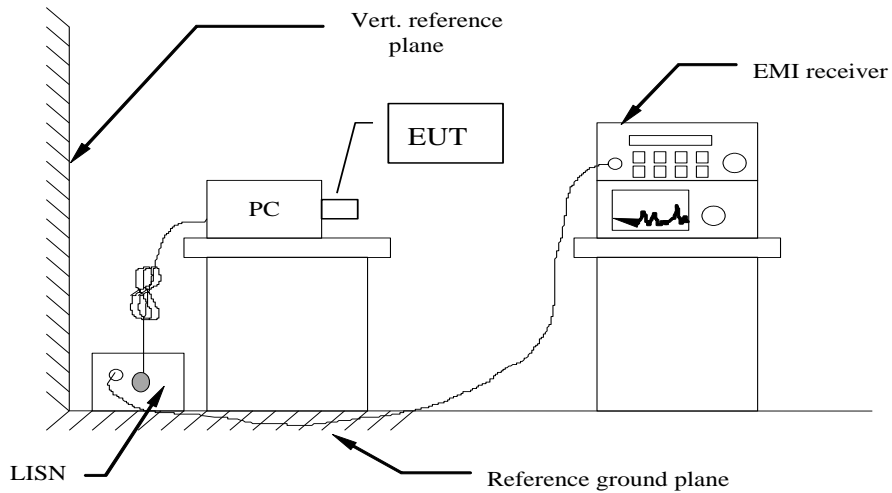

5.2.3 Test Results


Temperature	24.5°C	Humidity	56.2%
Test Engineer	Gary Qian	Configurations	802.11b (Low Channel)
Test Date	Nov 13, 2018		

The Worst Test result for 802.11b (Low Channel)




AC Conducted Emission of power adapter @ AC 120V/60Hz @ 802.11b (worst case)

Line

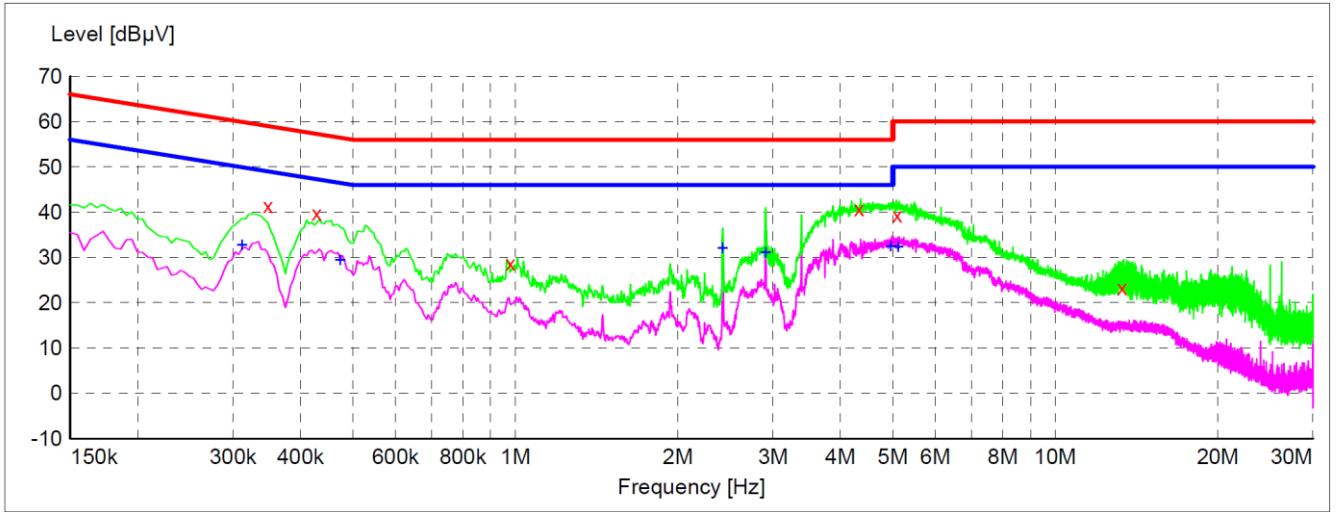

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.348000	41.40	10.2	59	17.6	QP	L1	GND
0.429000	39.80	10.1	57	17.5	QP	L1	GND
0.978000	28.70	9.8	56	27.3	QP	L1	GND
4.330500	40.70	9.8	56	15.3	QP	L1	GND
5.091000	39.30	9.8	60	20.7	QP	L1	GND
13.285500	23.20	9.9	60	36.8	QP	L1	GND
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.312000	32.60	10.2	50	17.3	AV	L1	GND
0.474000	29.30	10.0	46	17.1	AV	L1	GND
2.422500	32.00	9.8	46	14.0	AV	L1	GND
2.908500	31.00	9.8	46	15.0	AV	L1	GND
4.956000	32.40	9.8	46	13.6	AV	L1	GND
5.122500	32.30	9.8	50	17.7	AV	L1	GND

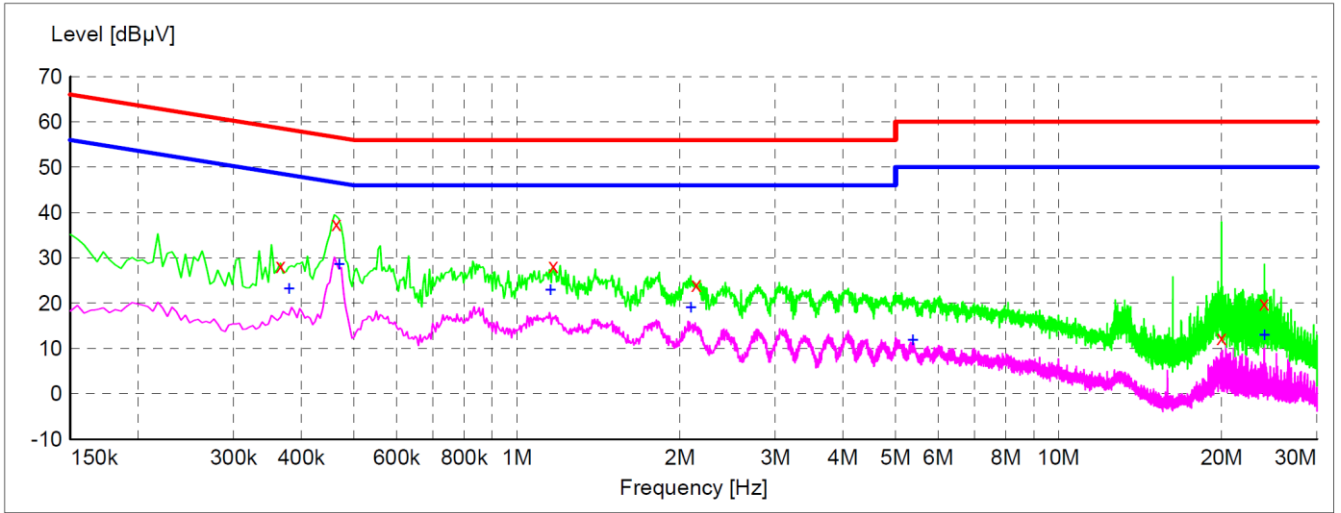

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.366000	28.20	10.1	59	30.4	QP	N	GND
0.465000	37.50	10.0	57	19.1	QP	N	GND
1.167000	28.30	9.8	56	27.7	QP	N	GND
2.143500	24.10	9.8	56	31.9	QP	N	GND
19.995000	12.40	10.4	60	47.6	QP	N	GND
23.973000	19.90	10.2	60	40.1	QP	N	GND
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.379500	23.10	10.1	48	25.2	AV	N	GND
0.469500	28.50	10.0	47	18.0	AV	N	GND
1.153500	22.80	9.8	46	23.2	AV	N	GND
2.098500	18.90	9.8	46	27.1	AV	N	GND
5.374500	11.80	9.8	50	38.2	AV	N	GND
23.986500	12.90	10.2	50	37.1	AV	N	GND

***Note: Pre-scan all modes and recorded the worst case results in this report (802.11b).


5.3. Band-edge measurements for radiated emissions

5.3.1 Standard Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.3.2 Test Setup Layout

For Radiated

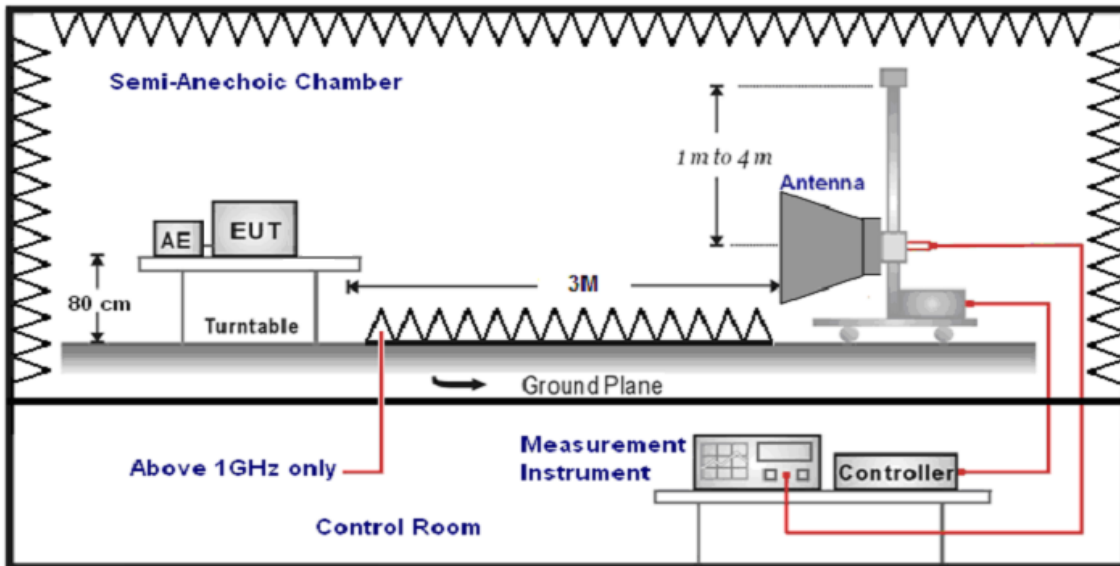

For Conducted

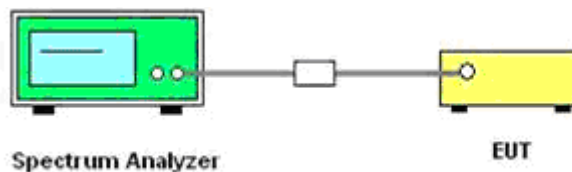

5.3.3. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of Spectrum Analyzer.

5.3.4. Test Procedures

Radiated Method:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.



3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Conducted Method:

According to KDB 558074 D01 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to an EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=1/B for AV detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the result ant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.77 = \text{EIRP} + 95.23$$

Where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Per KDB662911 D01 section b) In cases where a combination of conducted measurements and cabinet radiated measurements are permitted to demonstrate compliance with absolute radiated out-of-band and spurious limits (e.g., KDB Publications 558074 for DTS and 789033 for U-NII), the conducted measurements must be combined with directional gain to compute the radiated levels of the out-of-band and spurious emissions as described in this section.
13. Compare the resultant electric field strength level to the applicable regulatory limit.
14. Perform radiated spurious emission test duress until all measured frequencies were complete.



5.3.5 Test Results

IEEE 802.11b										
Item (Mark)	Freq (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2390.00	53.14	29.99	30.21	8.35	61.27	74	-12.73	Peak	Horizontal
1	2390.00	39.29	29.99	30.21	8.35	47.42	54	-6.58	AV ^[1]	Horizontal
2	2390.00	57.31	29.99	30.21	8.35	65.44	74	-8.56	Peak	Vertical
2	2390.00	39.59	29.99	30.21	8.35	47.72	54	-6.28	AV ^[1]	Vertical
3	2483.50	54.23	30.25	30.25	8.5	62.73	74	-11.27	Peak	Horizontal
3	2483.50	24.99	30.25	30.25	8.5	33.49	54	-20.51	AV ^[1]	Horizontal
4	2483.50	52.14	30.25	30.25	8.5	60.64	74	-13.36	Peak	Vertical
4	2483.50	26.03	30.25	30.25	8.5	34.53	54	-19.47	AV ^[1]	Vertical
5	2486.37	56.96	30.25	30.25	8.5	65.46	74	-8.54	Peak	Horizontal
5	2490.84	37.56	30.25	30.25	8.5	46.06	54	-7.94	AV ^[1]	Horizontal
6	2499.92	49.55	30.25	30.25	8.5	58.05	74	-15.95	Peak	Vertical
6	2497.15	36.41	30.25	30.25	8.5	44.91	54	-9.09	AV ^[1]	Vertical

IEEE 802.11g										
Item (Mark)	Freq (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2390.00	56.49	29.99	30.21	8.35	64.62	74	-9.38	Peak	Horizontal
1	2390.00	39.75	29.99	30.21	8.35	47.88	54	-6.12	AV ^[1]	Horizontal
2	2390.00	55.96	29.99	30.21	8.35	64.09	74	-9.91	Peak	Vertical
2	2390.00	36.75	29.99	30.21	8.35	44.88	54	-9.12	AV ^[1]	Vertical
3	2483.50	54.13	30.25	30.25	8.5	62.63	74	-11.37	Peak	Horizontal
3	2483.50	27.27	30.25	30.25	8.5	35.77	54	-18.23	AV ^[1]	Horizontal
4	2483.50	52.50	30.25	30.25	8.5	61.00	74	-13.00	Peak	Vertical
4	2483.50	26.79	30.25	30.25	8.5	35.29	54	-18.71	AV ^[1]	Vertical
5	2485.73	58.07	30.25	30.25	8.5	66.57	74	-7.43	Peak	Horizontal
5	2481.62	37.83	30.25	30.25	8.5	46.33	54	-7.67	AV ^[1]	Horizontal
6	2495.87	50.45	30.25	30.25	8.5	58.95	74	-15.05	Peak	Vertical
6	2495.94	38.93	30.25	30.25	8.5	47.43	54	-6.57	AV ^[1]	Vertical



IEEE 802.11n HT20										
Item (Mark)	Freq (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	2390.00	57.41	29.99	30.21	8.35	65.54	74	-8.46	Peak	Horizontal
1	2390.00	37.67	29.99	30.21	8.35	45.80	54	-8.20	AV ^[1]	Horizontal
2	2390.00	58.80	29.99	30.21	8.35	66.93	74	-7.07	Peak	Vertical
2	2390.00	37.20	29.99	30.21	8.35	45.33	54	-8.67	AV ^[1]	Vertical
3	2483.50	53.90	30.25	30.25	8.5	62.40	74	-11.60	Peak	Horizontal
3	2483.50	27.80	30.25	30.25	8.5	36.30	54	-17.70	AV ^[1]	Horizontal
4	2483.50	48.35	30.25	30.25	8.5	56.85	74	-17.15	Peak	Vertical
4	2483.50	28.02	30.25	30.25	8.5	36.52	54	-17.48	AV ^[1]	Vertical
5	2489.59	55.47	30.25	30.25	8.5	63.97	74	-10.03	Peak	Horizontal
5	2485.22	34.44	30.25	30.25	8.5	42.94	54	-11.06	AV ^[1]	Horizontal
6	2496.39	50.21	30.25	30.25	8.5	58.71	74	-15.29	Peak	Vertical
6	2497.18	37.60	30.25	30.25	8.5	46.10	54	-7.90	AV ^[1]	Vertical

REMARKS:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. The other emission levels were very low against the limit.
3. Over Limit=Emission Level - Limit.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=10Hz/Sweep time=Auto/Detector=Peak;



6. LIST OF MEASURING EQUIPMENTS

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 28, 2017	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 28, 2017	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 28, 2017	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2017	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2017	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Dec. 28, 2017	1 Year
11.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Dec. 28, 2017	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2017	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B	HKE-083	Dec. 28, 2017	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Dec. 28, 2017	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Dec. 28, 2017	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Dec. 28, 2017	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 28, 2017	3 Year



7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----