

FCC Test Report

Report No.: RF181115C24-6

FCC ID: 2ARXKVHE09

Test Model: VHE09

Series Model: VHE09XXX (X=A-Z, 0-9, blank or "-")

Received Date: Nov. 15, 2018

Test Date: Apr. 18 ~ May 27, 2019

Issued Date: May 29, 2019

Applicant: Veea Inc

Address: 164 E 83rd Street, New York NY, 10028, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

Test Location (1): No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)

Test Location (2): No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

FCC Registration / Designation Number: 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Description of Support Units.....	10
3.3.1 Configuration of System under Test.....	11
3.4 General Description of Applied Standards.....	12
4 Test Types and Results	13
4.1 Radiated Emission and Bandedge Measurement.....	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	13
4.1.2 Test Instruments.....	14
4.1.3 Test Procedures.....	15
4.1.4 Deviation from Test Standard.....	16
4.1.5 Test Setup.....	16
4.1.6 EUT Operating Conditions.....	17
4.1.7 Test Results.....	18
4.2 Conducted Emission Measurement.....	48
4.2.1 Limits of Conducted Emission Measurement.....	48
4.2.2 Test Instruments.....	48
4.2.3 Test Procedures.....	49
4.2.4 Deviation from Test Standard.....	49
4.2.5 Test Setup.....	49
4.2.6 EUT Operating Conditions.....	49
4.2.7 Test Results.....	50
4.3 Number of Hopping Frequency Used.....	62
4.3.1 Limits of Hopping Frequency Used Measurement.....	62
4.3.2 Test Setup.....	62
4.3.3 Test Instruments.....	62
4.3.4 Test Procedure.....	62
4.3.5 Deviation from Test Standard.....	62
4.3.6 Test Results.....	63
4.4 Dwell Time on Each Channel.....	64
4.4.1 Limits of Dwell Time on Each Channel Measurement.....	64
4.4.2 Test Setup.....	64
4.4.3 Test Instruments.....	64
4.4.4 Test Procedures.....	64
4.4.5 Deviation from Test Standard.....	64
4.4.6 Test Results.....	65
4.5 Channel Bandwidth.....	67
4.5.1 Limits of Channel Bandwidth Measurement.....	67
4.5.2 Test Setup.....	67
4.5.3 Test Instruments.....	67
4.5.4 Test Procedure.....	67
4.5.5 Deviation from Test Standard.....	67
4.5.6 EUT Operating Condition.....	67
4.5.7 Test Results.....	68
4.6 Hopping Channel Separation.....	69
4.6.1 Limits of Hopping Channel Separation Measurement.....	69

4.6.2	Test Setup	69
4.6.3	Test Instruments	69
4.6.4	Test Procedure	69
4.6.5	Deviation from Test Standard	69
4.6.6	Test Results	70
4.7	Maximum Output Power	71
4.7.1	Limits of Maximum Output Power Measurement	71
4.7.2	Test Setup	71
4.7.3	Test Instruments	71
4.7.4	Test Procedure	71
4.7.5	Deviation from Test Standard	71
4.7.6	EUT Operating Condition	71
4.7.7	Test Results	71
4.8	Conducted Out of Band Emission Measurement	72
4.8.1	Limits Of Conducted Out Of Band Emission Measurement	72
4.8.2	Test Instruments	72
4.8.3	Test Procedure	72
4.8.4	Deviation from Test Standard	72
4.8.5	EUT Operating Condition	72
4.8.6	Test Results	72
5	Pictures of Test Arrangements	75
	Appendix – Information of the Testing Laboratories	76

Release Control Record

Issue No.	Description	Date Issued
RF181115C24-6	Original release.	May 29, 2019

1 Certificate of Conformity

Product: veeahub

Brand: 

Test Model: VHE09

Series Model: VHE09XXX (X=A-Z, 0-9, blank or "-")

Sample Status: Engineering sample

Applicant: Veea Inc

Test Date: Apr. 18 ~ May 27, 2019

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : , **Date:** May 29, 2019
Pettie Chen / Senior Specialist

Approved by : , **Date:** May 29, 2019
Bruce Chen / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -2.29dB at 0.50397MHz.
15.247(a)(1)(iii)	Number of Hopping Frequency Used	Pass	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel	Pass	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	Pass	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.1dB at 286.55MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Dipole antenna: Antenna connector is RP-SMA-Male not a standard connector. Chip antenna: No antenna connector is used. PIFA antenna: Antenna connector is U.FL not a standard connector.

Note:

1. If the Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:


Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	veeaHub
Brand	
Test Model	VHE09
Series Model	VHE09XXX (X=A-Z, 0-9, blank or "-")
Model Difference	Marketing purposes
Sample Status	Engineering sample
Nominal Voltage	48Vdc (Adapter and PoE)
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology	FHSS
Transfer Rate	1/2/3Mbps
Operating Frequency	2402~2480MHz
Number of Channel	79
Output Power	2.344mW
Antenna Type	Dipole antenna with 4.1dBi gain Chip antenna with 6dBi gain PIFA antenna with 2.2dBi gain
Antenna Connector	Dipole antenna: RP-SMA-Male Chip antenna: NA PIFA antenna: U.FL
Accessory Device	Adapter
Cable Supplied	NA

Note:

1. The EUT uses following adapter and PoE.

Adapter	
Brand	EDAC Power Electronics Co., Ltd.
Model	EA1062SGR-480
Input Power	100-240Vac ~2.5A, 50-60Hz
Output Power	48Vdc / 1.35A
Power Line	1.2m DC cable with one core

PoE (Support unit)	
Model	APOE02-WM
Output Power	48Vdc

2. The EUT with Chip antenna (with maximum gain) was chosen for the Antenna Port Conducted Measurement tests.

3. WLAN, zigbee and Bluetooth technology can transmit at same time.

3.2 Description of Test Modes

79 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description	
	RE \geq 1G	RE<1G	PLC	APCM	Antenna	Power
A1	√	√	√	-	Dipole Antenna	Power from adapter
A2	-	√	√	-		Power from PoE
B1	√	√	√	√	Chip Antenna	Power from adapter
B2	-	√	√	-		Power from PoE
C1	√	√	√	-	PIFA Antenna	Power from adapter
C2	-	√	√	-		Power from PoE

Where RE \geq 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

Note:

- The antenna had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on Y-plane.
- The EUT with Chip antenna (with maximum gain) was chosen for the Antenna Port Conducted Measurement tests.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Pakcet Type
A1, B1, C1	0 to 78	0, 39, 78	FHSS	GFSK	DH5
A1, B1, C1	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Pakcet Type
A1, A2, B1, B2, C1, C2	0 to 78	78	FHSS	8DPSK	3DH5

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Pakcet Type
A1, A2, B1, B2, C1, C2	0 to 78	78	FHSS	8DPSK	3DH5

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Pakcet Type
B1	0 to 78	0, 39, 78	FHSS	GFSK	DH5
B1	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE \geq 1G	23 deg. C, 69% RH	120Vac, 60Hz	Ian Chang
RE<1G	24 deg. C, 69% RH	120Vac, 60Hz 48Vdc	Adair Peng
PLC	22 deg. C, 66% RH	120Vac, 60Hz 48Vdc	Adair Peng
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Alan Wu

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved	-
B.	Load	NA	NA	NA	NA	-
C.	USB Flash	HP	v250W	04	NA	-
D.	USB Flash	HP	v250W	05	NA	-
E.	USB Flash	HP	v250W	06	NA	-
F.	PoE	NA	APOE02-WM	NA	NA	Provided by manufacturer


Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45 cable	1	1.5	N	0	Cat5e
2.	RJ45 cable	1	6	N	0	Cat5e
3.	Console cable	1	2	N	0	-
4.	RJ45 cable	1	1.5	N	0	Cat5e

3.3.1 Configuration of System under Test

Test Mode A1, B1, C1

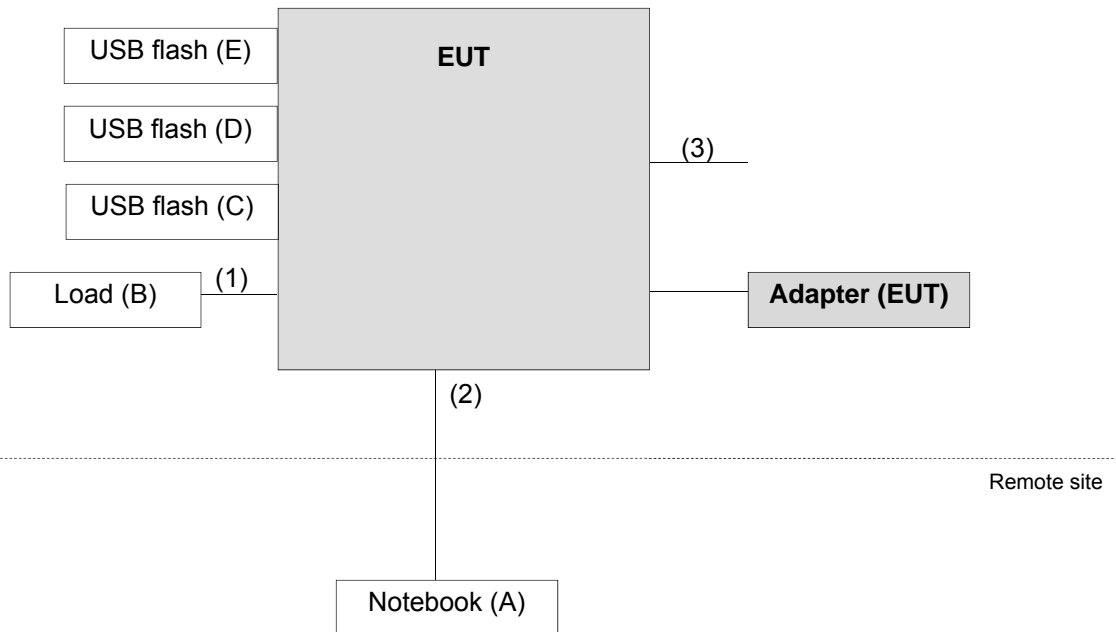

Test Mode A2, B2, C2

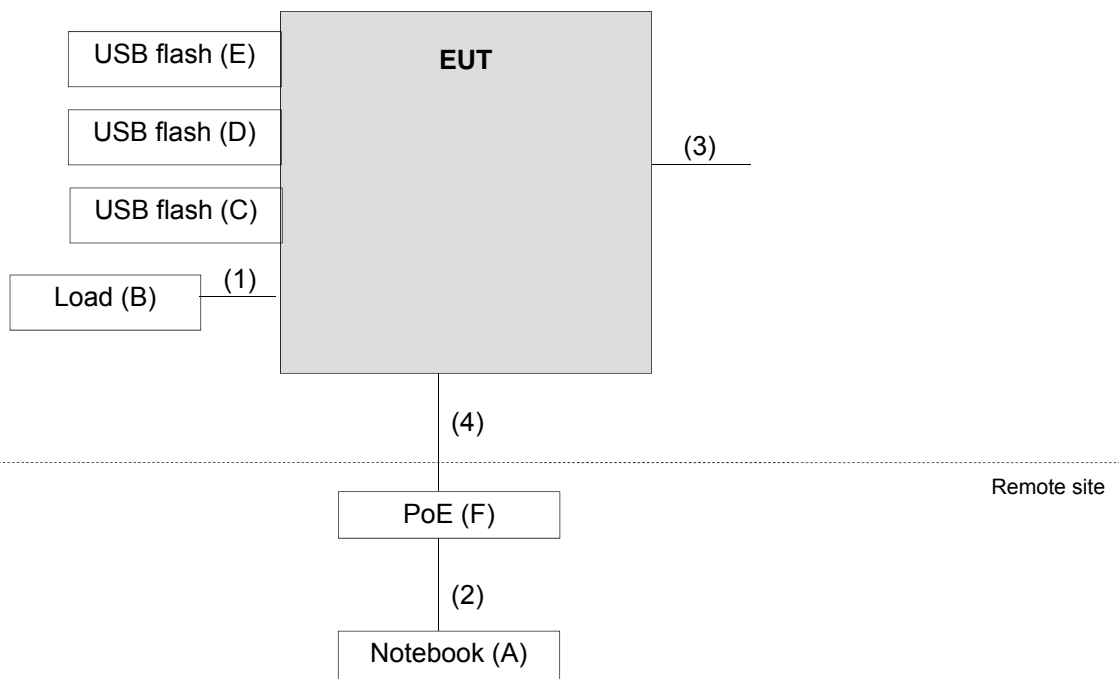

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
HP Preamplifier	8447D	2432A03504	Feb. 20, 2019	Feb. 19, 2020
HP Preamplifier	8449B	3008A01201	Feb. 21, 2019	Feb. 20, 2020
MITEQ Preamplifier	AMF-6F-260400-33-8P	892164	Feb. 20, 2019	Feb. 19, 2020
Agilent TEST RECEIVER	N9038A	MY51210129	Mar. 05, 2019	Mar. 04, 2020
Schwarzbeck Antenna	VULB 9168	139	Nov. 26, 2018	Nov. 25, 2019
Schwarzbeck Horn Antenna	BBHA-9170	212	Nov. 25, 2018	Nov. 24, 2019
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	Nov. 25, 2018	Nov. 24, 2019
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	Radiated_V7.6.15.9.5	NA	NA	NA
SUHNER RF cable With 4dB PAD	SF102	Cable-CH6-01	Aug. 13, 2018	Aug. 12, 2019
SUHNER RF cable With 3/4dB PAD	SF102	Cable-CH8-3.6m	Aug. 13, 2018	Aug. 12, 2019
KEYSIGHT MIMO Powermeasurement Test set	U2021XA	U2021XA-001	Jun. 04, 2018	Jun. 03, 2019
KEYSIGHT Spectrum Analyzer	N9030A	MY54490260	Aug. 03, 2018	Aug. 02, 2019
Loop Antenna EMCI	LPA600	270	Aug. 11, 2017	Aug. 10, 2019
EMCO Horn Antenna	3115	00028257	Nov. 25, 2018	Nov. 24, 2019
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSV40	101042	Sep. 27, 2018	Sep. 26, 2019
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY551 90004/MY55190007/ MY55210005	Jul. 17, 2018	Jul. 16, 2019

- NOTE:**
1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in Chamber No. 6.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or $3 \times \text{RBW}$ (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

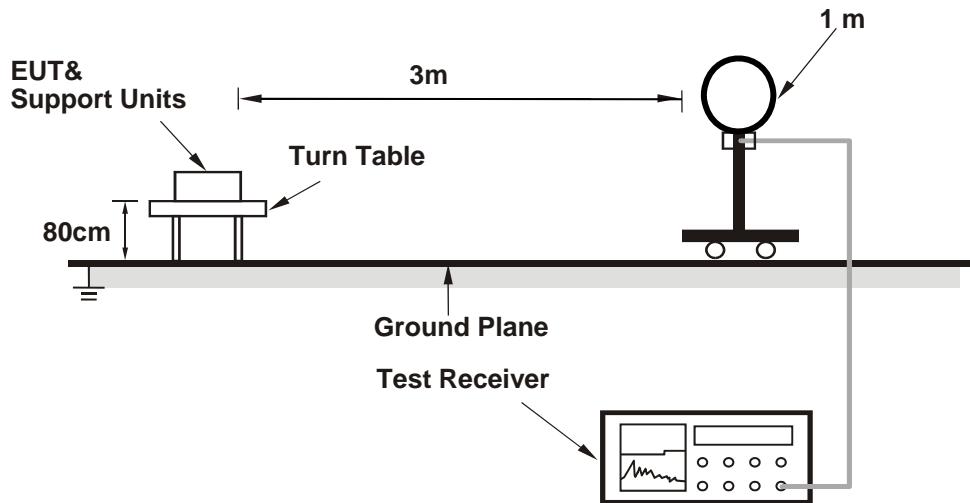

For Radiated emission 30MHz to 1GHz

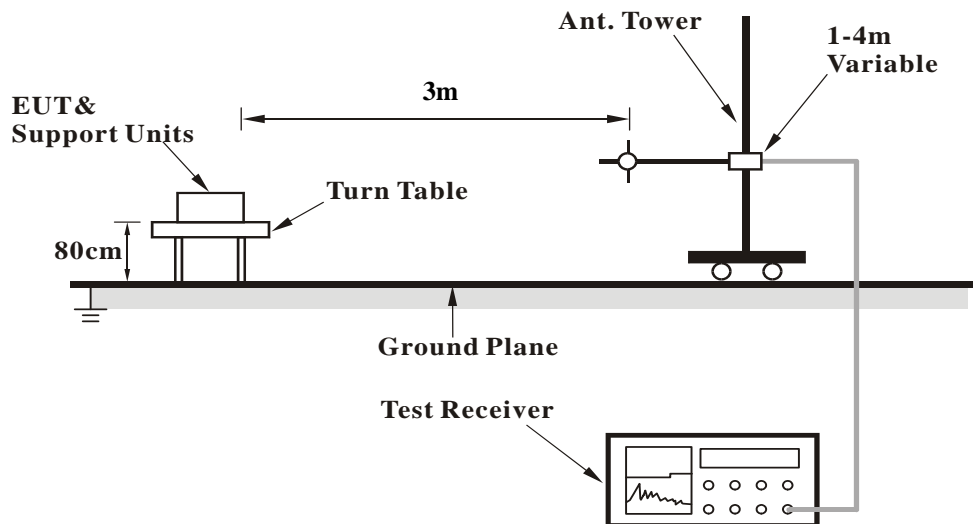

For Radiated emission above 1GHz

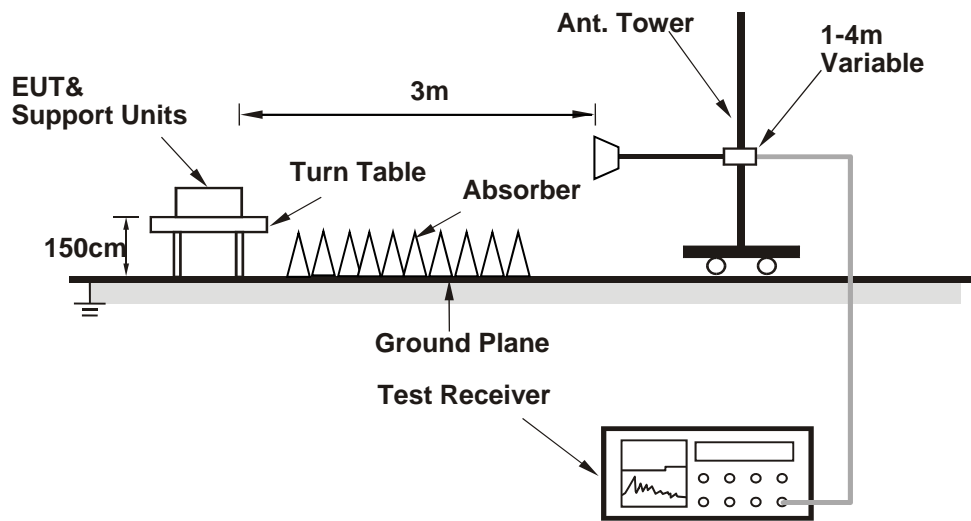

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (QRCT V3.0.264.0) to enable EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the system in full functions.

4.1.7 Test Results

Above 1GHz Data:

GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	A1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.91 PK	74.00	-20.09	2.00 H	68	54.13	-0.22
2	2390.00	40.67 AV	54.00	-13.33	2.00 H	68	40.89	-0.22
3	*2402.00	99.68 PK			2.00 H	68	99.90	-0.22
4	*2402.00	98.94 AV			2.00 H	68	99.16	-0.22
5	4804.00	54.14 PK	74.00	-19.86	1.67 H	5	47.67	6.47
6	4804.00	48.74 AV	54.00	-5.26	1.67 H	5	42.27	6.47

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.25 PK	74.00	-19.75	1.49 V	308	54.47	-0.22
2	2390.00	41.22 AV	54.00	-12.78	1.49 V	308	41.44	-0.22
3	*2402.00	106.47 PK			1.49 V	308	106.69	-0.22
4	*2402.00	105.76 AV			1.49 V	308	105.98	-0.22
5	4804.00	55.94 PK	74.00	-18.06	1.78 V	306	49.47	6.47
6	4804.00	51.45 AV	54.00	-2.55	1.78 V	306	44.98	6.47

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	A1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	95.69 PK			2.09 H	77	95.89	-0.20
2	*2441.00	94.93 AV			2.09 H	77	95.13	-0.20
3	4882.00	52.39 PK	74.00	-21.61	1.62 H	11	46.23	6.16
4	4882.00	47.04 AV	54.00	-6.96	1.62 H	11	40.88	6.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	102.27 PK			1.65 V	305	102.47	-0.20
2	*2441.00	101.38 AV			1.65 V	305	101.58	-0.20
3	4882.00	54.95 PK	74.00	-19.05	1.86 V	309	48.79	6.16
4	4882.00	49.78 AV	54.00	-4.22	1.86 V	309	43.62	6.16

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	A1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	95.72 PK			2.03 H	52	95.89	-0.17
2	*2480.00	94.92 AV			2.03 H	52	95.09	-0.17
3	2483.50	55.69 PK	74.00	-18.31	2.03 H	52	55.85	-0.16
4	2483.50	42.03 AV	54.00	-11.97	2.03 H	52	42.19	-0.16
5	4960.00	54.92 PK	74.00	-19.08	1.58 H	13	48.74	6.18
6	4960.00	49.44 AV	54.00	-4.56	1.58 H	13	43.26	6.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	101.87 PK			1.30 V	319	102.04	-0.17
2	*2480.00	101.21 AV			1.30 V	319	101.38	-0.17
3	2483.50	56.54 PK	74.00	-17.46	1.30 V	319	56.70	-0.16
4	2483.50	43.20 AV	54.00	-10.80	1.30 V	319	43.36	-0.16
5	4960.00	56.44 PK	74.00	-17.56	1.72 V	309	50.26	6.18
6	4960.00	51.48 AV	54.00	-2.52	1.72 V	309	45.30	6.18

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	A1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.74 PK	74.00	-20.26	1.46 H	72	53.96	-0.22
2	2390.00	39.93 AV	54.00	-14.07	1.46 H	72	40.15	-0.22
3	*2402.00	101.23 PK			1.46 H	72	101.45	-0.22
4	*2402.00	96.97 AV			1.46 H	72	97.19	-0.22
5	4804.00	53.69 PK	74.00	-20.31	1.67 H	6	47.22	6.47
6	4804.00	43.36 AV	54.00	-10.64	1.67 H	6	36.89	6.47

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.19 PK	74.00	-19.81	1.50 V	304	54.41	-0.22
2	2390.00	40.75 AV	54.00	-13.25	1.50 V	304	40.97	-0.22
3	*2402.00	106.92 PK			1.50 V	304	107.14	-0.22
4	*2402.00	102.60 AV			1.50 V	304	102.82	-0.22
5	4804.00	55.87 PK	74.00	-18.13	1.52 V	312	49.40	6.47
6	4804.00	45.31 AV	54.00	-8.69	1.52 V	312	38.84	6.47

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	A1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	98.76 PK			1.53 H	69	98.96	-0.20
2	*2441.00	95.16 AV			1.53 H	69	95.36	-0.20
3	4882.00	52.05 PK	74.00	-21.95	1.70 H	10	45.89	6.16
4	4882.00	40.97 AV	54.00	-13.03	1.70 H	10	34.81	6.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	104.43 PK			1.47 V	307	104.63	-0.20
2	*2441.00	101.06 AV			1.47 V	307	101.26	-0.20
3	4882.00	53.82 PK	74.00	-20.18	1.53 V	308	47.66	6.16
4	4882.00	42.80 AV	54.00	-11.20	1.53 V	308	36.64	6.16

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	A1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	96.96 PK			1.62 H	9	97.13	-0.17
2	*2480.00	93.72 AV			1.62 H	9	93.89	-0.17
3	2483.50	54.97 PK	74.00	-19.03	1.62 H	9	55.13	-0.16
4	2483.50	40.18 AV	54.00	-13.82	1.62 H	9	40.34	-0.16
5	4960.00	53.49 PK	74.00	-20.51	1.72 H	20	47.31	6.18
6	4960.00	42.81 AV	54.00	-11.19	1.72 H	20	36.63	6.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	102.37 PK			1.78 V	309	102.54	-0.17
2	*2480.00	98.00 AV			1.78 V	309	98.17	-0.17
3	2483.50	56.07 PK	74.00	-17.93	1.78 V	309	56.23	-0.16
4	2483.50	41.40 AV	54.00	-12.60	1.78 V	309	41.56	-0.16
5	4960.00	55.31 PK	74.00	-18.69	1.61 V	308	49.13	6.18
6	4960.00	44.74 AV	54.00	-9.26	1.61 V	308	38.56	6.18

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	B1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.01 PK	74.00	-19.99	3.42 H	5	54.23	-0.22
2	2390.00	40.24 AV	54.00	-13.76	3.42 H	5	40.46	-0.22
3	*2402.00	91.42 PK			3.42 H	5	91.64	-0.22
4	*2402.00	90.74 AV			3.42 H	5	90.96	-0.22
5	4804.00	50.76 PK	74.00	-23.24	1.57 H	343	44.29	6.47
6	4804.00	43.67 AV	54.00	-10.33	1.57 H	343	37.20	6.47

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.34 PK	74.00	-19.66	1.69 V	289	54.56	-0.22
2	2390.00	40.66 AV	54.00	-13.34	1.69 V	289	40.88	-0.22
3	*2402.00	92.80 PK			1.69 V	289	93.02	-0.22
4	*2402.00	92.05 AV			1.69 V	289	92.27	-0.22
5	4804.00	53.43 PK	74.00	-20.57	1.53 V	313	46.96	6.47
6	4804.00	46.51 AV	54.00	-7.49	1.53 V	313	40.04	6.47

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	B1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	96.35 PK			3.50 H	12	96.55	-0.20
2	*2441.00	95.03 AV			3.50 H	12	95.23	-0.20
3	4882.00	50.70 PK	74.00	-23.30	1.51 H	350	44.54	6.16
4	4882.00	43.39 AV	54.00	-10.61	1.51 H	350	37.23	6.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	97.90 PK			1.80 V	287	98.10	-0.20
2	*2441.00	97.19 AV			1.80 V	287	97.39	-0.20
3	4882.00	52.59 PK	74.00	-21.41	1.61 V	320	46.43	6.16
4	4882.00	46.52 AV	54.00	-7.48	1.61 V	320	40.36	6.16

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	B1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	99.99 PK			3.46 H	5	100.16	-0.17
2	*2480.00	99.26 AV			3.46 H	5	99.43	-0.17
3	2483.50	57.26 PK	74.00	-16.74	3.46 H	5	57.42	-0.16
4	2483.50	46.80 AV	54.00	-7.20	3.46 H	5	46.96	-0.16
5	4960.00	52.02 PK	74.00	-21.98	1.58 H	333	45.84	6.18
6	4960.00	44.84 AV	54.00	-9.16	1.58 H	333	38.66	6.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	102.66 PK			1.77 V	288	102.83	-0.17
2	*2480.00	101.97 AV			1.77 V	288	102.14	-0.17
3	2483.50	60.49 PK	74.00	-13.51	1.77 V	288	60.65	-0.16
4	2483.50	50.61 AV	54.00	-3.39	1.77 V	288	50.77	-0.16
5	4960.00	53.32 PK	74.00	-20.68	1.65 V	14	47.14	6.18
6	4960.00	46.37 AV	54.00	-7.63	1.65 V	14	40.19	6.18

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	B1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.91 PK	74.00	-20.09	3.43 H	10	54.13	-0.22
2	2390.00	39.78 AV	54.00	-14.22	3.43 H	10	40.00	-0.22
3	*2402.00	91.03 PK			3.43 H	10	91.25	-0.22
4	*2402.00	87.34 AV			3.43 H	10	87.56	-0.22
5	4804.00	50.66 PK	74.00	-23.34	1.55 H	339	44.19	6.47
6	4804.00	36.36 AV	54.00	-17.64	1.55 H	339	29.89	6.47

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.62 PK	74.00	-19.38	1.68 V	287	54.84	-0.22
2	2390.00	40.26 AV	54.00	-13.74	1.68 V	287	40.48	-0.22
3	*2402.00	93.65 PK			1.68 V	287	93.87	-0.22
4	*2402.00	89.22 AV			1.68 V	287	89.44	-0.22
5	4804.00	53.70 PK	74.00	-20.30	1.55 V	319	47.23	6.47
6	4804.00	38.70 AV	54.00	-15.30	1.55 V	319	32.23	6.47

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	B1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	99.35 PK			3.46 H	10	99.55	-0.20
2	*2441.00	95.14 AV			3.46 H	10	95.34	-0.20
3	4882.00	50.42 PK	74.00	-23.58	1.54 H	323	44.26	6.16
4	4882.00	35.82 AV	54.00	-18.18	1.54 H	323	29.66	6.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	101.51 PK			1.47 V	296	101.71	-0.20
2	*2441.00	97.27 AV			1.47 V	296	97.47	-0.20
3	4882.00	53.68 PK	74.00	-20.32	1.58 V	326	47.52	6.16
4	4882.00	38.82 AV	54.00	-15.18	1.58 V	326	32.66	6.16

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	B1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	98.29 PK			3.51 H	12	98.46	-0.17
2	*2480.00	94.46 AV			3.51 H	12	94.63	-0.17
3	2483.50	54.69 PK	74.00	-19.31	3.51 H	12	54.85	-0.16
4	2483.50	40.40 AV	54.00	-13.60	3.51 H	12	40.56	-0.16
5	4960.00	50.61 PK	74.00	-23.39	1.52 H	348	44.43	6.18
6	4960.00	36.14 AV	54.00	-17.86	1.52 H	348	29.96	6.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	100.54 PK			1.60 V	289	100.71	-0.17
2	*2480.00	96.30 AV			1.60 V	289	96.47	-0.17
3	2483.50	55.21 PK	74.00	-18.79	1.60 V	289	55.37	-0.16
4	2483.50	40.99 AV	54.00	-13.01	1.60 V	289	41.15	-0.16
5	4960.00	54.02 PK	74.00	-19.98	1.58 V	326	47.84	6.18
6	4960.00	38.87 AV	54.00	-15.13	1.58 V	326	32.69	6.18

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	C1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.90 PK	74.00	-20.10	1.13 H	4	54.12	-0.22
2	2390.00	41.87 AV	54.00	-12.13	1.13 H	4	42.09	-0.22
3	*2402.00	103.11 PK			1.13 H	4	103.33	-0.22
4	*2402.00	102.42 AV			1.13 H	4	102.64	-0.22
5	4804.00	49.53 PK	74.00	-24.47	1.50 H	20	43.06	6.47
6	4804.00	41.10 AV	54.00	-12.90	1.50 H	20	34.63	6.47
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.27 PK	74.00	-19.73	1.21 V	310	54.49	-0.22
2	2390.00	42.05 AV	54.00	-11.95	1.21 V	310	42.27	-0.22
3	*2402.00	104.81 PK			1.21 V	310	105.03	-0.22
4	*2402.00	103.89 AV			1.21 V	310	104.11	-0.22
5	4804.00	53.90 PK	74.00	-20.10	2.19 V	298	47.43	6.47
6	4804.00	48.64 AV	54.00	-5.36	2.19 V	298	42.17	6.47

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	C1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	102.41 PK			1.16 H	9	102.61	-0.20
2	*2441.00	101.65 AV			1.16 H	9	101.85	-0.20
3	4882.00	48.89 PK	74.00	-25.11	1.53 H	27	42.73	6.16
4	4882.00	40.14 AV	54.00	-13.86	1.53 H	27	33.98	6.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	104.42 PK			1.18 V	309	104.62	-0.20
2	*2441.00	103.57 AV			1.18 V	309	103.77	-0.20
3	4882.00	53.14 PK	74.00	-20.86	2.22 V	293	46.98	6.16
4	4882.00	48.20 AV	54.00	-5.80	2.22 V	293	42.04	6.16

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * " : Fundamental frequency.

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	C1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	102.68 PK			1.12 H	6	102.85	-0.17
2	*2480.00	101.82 AV			1.12 H	6	101.99	-0.17
3	2483.50	56.13 PK	74.00	-17.87	1.12 H	6	56.29	-0.16
4	2483.50	47.39 AV	54.00	-6.61	1.12 H	6	47.55	-0.16
5	4960.00	48.57 PK	74.00	-25.43	1.46 H	23	42.39	6.18
6	4960.00	39.96 AV	54.00	-14.04	1.46 H	23	33.78	6.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	104.71 PK			1.20 V	311	104.88	-0.17
2	*2480.00	103.79 AV			1.20 V	311	103.96	-0.17
3	2483.50	58.13 PK	74.00	-15.87	1.20 V	311	58.29	-0.16
4	2483.50	49.25 AV	54.00	-4.75	1.20 V	311	49.41	-0.16
5	4960.00	52.99 PK	74.00	-21.01	2.17 V	295	46.81	6.18
6	4960.00	48.11 AV	54.00	-5.89	2.17 V	295	41.93	6.18

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	C1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.05 PK	74.00	-19.95	1.11 H	3	54.27	-0.22
2	2390.00	41.61 AV	54.00	-12.39	1.11 H	3	41.83	-0.22
3	*2402.00	103.36 PK			1.11 H	3	103.58	-0.22
4	*2402.00	99.42 AV			1.11 H	3	99.64	-0.22
5	4804.00	50.29 PK	74.00	-23.71	1.43 H	18	43.82	6.47
6	4804.00	41.88 AV	54.00	-12.12	1.43 H	18	35.41	6.47
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.99 PK	74.00	-19.01	1.21 V	307	55.21	-0.22
2	2390.00	41.86 AV	54.00	-12.14	1.21 V	307	42.08	-0.22
3	*2402.00	105.75 PK			1.21 V	307	105.97	-0.22
4	*2402.00	101.60 AV			1.21 V	307	101.82	-0.22
5	4804.00	54.62 PK	74.00	-19.38	2.23 V	292	48.15	6.47
6	4804.00	49.71 AV	54.00	-4.29	2.23 V	292	43.24	6.47

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	C1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	102.96 PK			1.12 H	5	103.16	-0.20
2	*2441.00	99.07 AV			1.12 H	5	99.27	-0.20
3	4882.00	49.70 PK	74.00	-24.30	1.48 H	22	43.54	6.16
4	4882.00	41.43 AV	54.00	-12.57	1.48 H	22	35.27	6.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	105.16 PK			1.23 V	311	105.36	-0.20
2	*2441.00	101.09 AV			1.23 V	311	101.29	-0.20
3	4882.00	53.97 PK	74.00	-20.03	2.18 V	294	47.81	6.16
4	4882.00	49.11 AV	54.00	-4.89	2.18 V	294	42.95	6.16

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz	TEST MODE	C1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	102.17 PK			1.06 H	8	102.34	-0.17
2	*2480.00	98.24 AV			1.06 H	8	98.41	-0.17
3	2483.50	56.63 PK	74.00	-17.37	1.06 H	8	56.79	-0.16
4	2483.50	41.06 AV	54.00	-12.94	1.06 H	8	41.22	-0.16
5	4960.00	47.77 PK	74.00	-26.23	1.45 H	16	41.59	6.18
6	4960.00	39.16 AV	54.00	-14.84	1.45 H	16	32.98	6.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	104.45 PK			1.17 V	313	104.62	-0.17
2	*2480.00	100.60 AV			1.17 V	313	100.77	-0.17
3	2483.50	59.68 PK	74.00	-14.32	1.17 V	313	59.84	-0.16
4	2483.50	43.53 AV	54.00	-10.47	1.17 V	313	43.69	-0.16
5	4960.00	52.13 PK	74.00	-21.87	2.17 V	299	45.95	6.18
6	4960.00	47.75 AV	54.00	-6.25	2.17 V	299	41.57	6.18

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.


Below 1GHz worst-case data: 8DPSK

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	30.4 QP	40.0	-9.6	1.99 H	122	40.5	-10.1
2	179.61	28.3 QP	43.5	-15.2	1.49 H	230	38.5	-10.2
3	286.55	42.7 QP	46.0	-3.3	1.00 H	68	50.3	-7.6
4	430.42	38.0 QP	46.0	-8.0	1.99 H	17	42.6	-4.6
5	500.42	43.2 QP	46.0	-2.8	1.49 H	139	46.8	-3.6
6	624.85	43.9 QP	46.0	-2.1	1.00 H	33	44.6	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

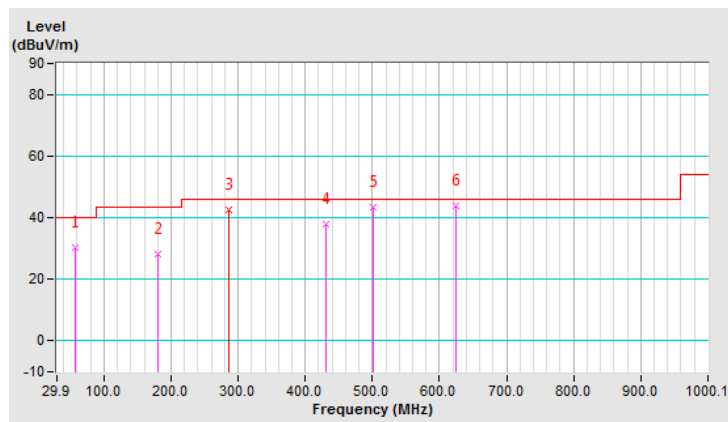


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	51.92	38.6 QP	40.0	-1.4	1.00 V	7	48.3	-9.7
2	62.95	38.0 QP	40.0	-2.0	1.49 V	15	48.3	-10.3
3	284.60	36.0 QP	46.0	-10.0	1.00 V	200	43.7	-7.7
4	432.37	39.2 QP	46.0	-6.8	1.00 V	10	43.7	-4.5
5	500.42	42.0 QP	46.0	-4.0	1.00 V	358	45.6	-3.6
6	624.85	39.7 QP	46.0	-6.3	1.00 V	48	40.4	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

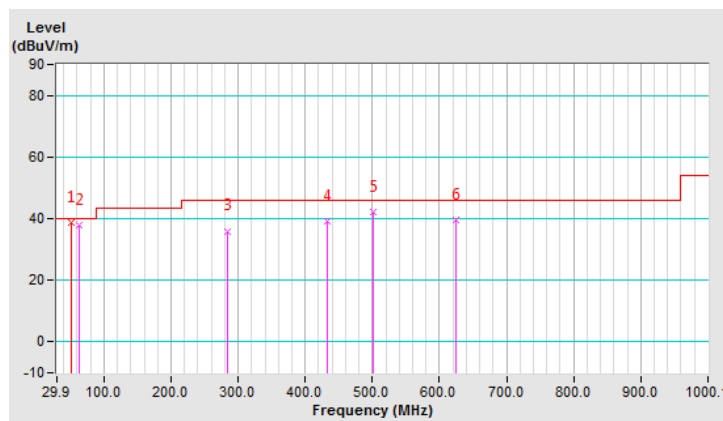


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	179.61	29.0 QP	43.5	-14.5	1.50 H	24	39.2	-10.2
2	286.55	44.5 QP	46.0	-1.5	1.00 H	85	52.1	-7.6
3	374.04	37.5 QP	46.0	-8.5	1.50 H	146	43.4	-5.9
4	500.42	34.6 QP	46.0	-11.4	1.00 H	19	38.2	-3.6
5	585.97	38.5 QP	46.0	-7.5	1.50 H	22	40.0	-1.5
6	624.85	42.0 QP	46.0	-4.0	1.00 H	88	42.7	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

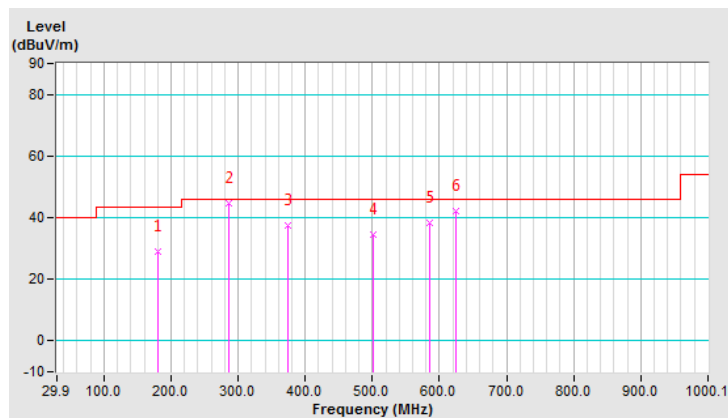


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	49.34	30.4 QP	40.0	-9.6	1.50 V	14	40.1	-9.7
2	284.60	39.9 QP	46.0	-6.1	1.00 V	207	47.6	-7.7
3	432.37	42.5 QP	46.0	-3.5	1.00 V	15	47.0	-4.5
4	500.42	40.1 QP	46.0	-5.9	1.50 V	14	43.7	-3.6
5	624.85	36.5 QP	46.0	-9.5	2.00 V	1	37.2	-0.7
6	729.84	41.7 QP	46.0	-4.3	1.00 V	287	40.5	1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

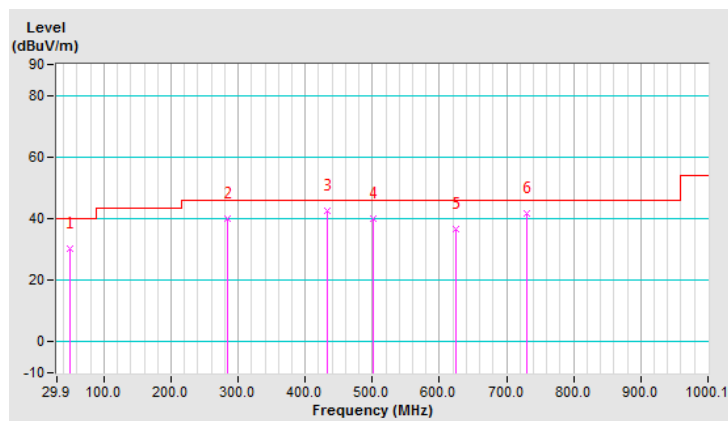


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	29.2 QP	40.0	-10.8	1.99 H	264	39.3	-10.1
2	179.61	29.1 QP	43.5	-14.4	1.00 H	244	39.3	-10.2
3	285.57	44.0 QP	46.0	-2.0	1.00 H	67	51.6	-7.6
4	430.42	37.9 QP	46.0	-8.1	1.49 H	314	42.5	-4.6
5	500.42	43.5 QP	46.0	-2.5	1.49 H	358	47.1	-3.6
6	624.85	44.3 QP	46.0	-1.7	1.00 H	36	45.0	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

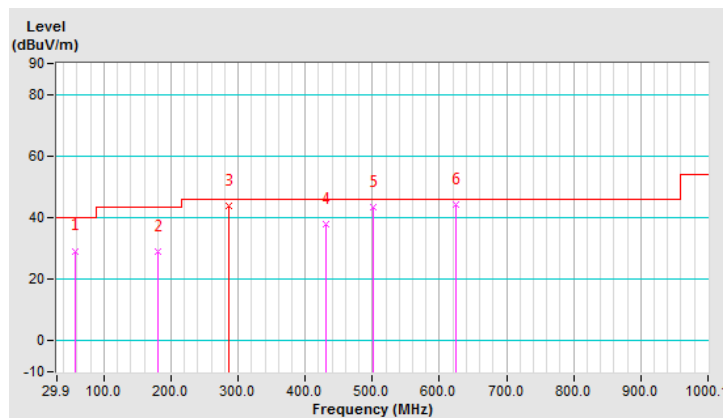


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	51.20	38.3 QP	40.0	-1.7	1.00 V	15	48.0	-9.7
2	62.95	37.8 QP	40.0	-2.2	1.01 V	4	48.1	-10.3
3	284.60	34.8 QP	46.0	-11.2	1.01 V	252	42.5	-7.7
4	434.31	39.7 QP	46.0	-6.3	1.01 V	343	44.2	-4.5
5	500.42	40.8 QP	46.0	-5.2	1.01 V	296	44.4	-3.6
6	624.85	40.5 QP	46.0	-5.5	1.01 V	16	41.2	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

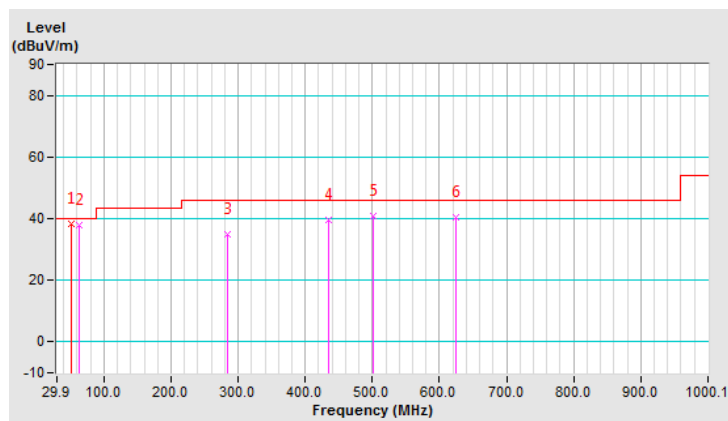


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	179.61	28.4 QP	43.5	-15.1	2.00 H	57	38.6	-10.2
2	286.55	44.9 QP	46.0	-1.1	1.00 H	84	52.5	-7.6
3	374.04	36.9 QP	46.0	-9.1	1.00 H	134	42.8	-5.9
4	500.42	35.0 QP	46.0	-11.0	1.50 H	11	38.6	-3.6
5	585.97	38.4 QP	46.0	-7.6	1.50 H	5	39.9	-1.5
6	624.85	41.3 QP	46.0	-4.7	1.00 H	64	42.0	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

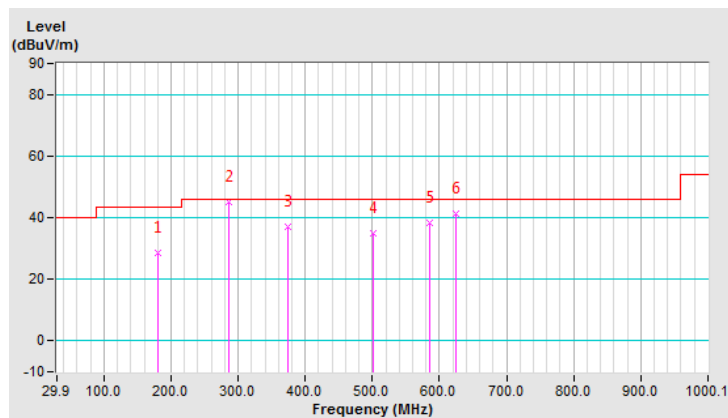


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.73	31.4 QP	40.0	-8.6	1.00 V	143	42.5	-11.1
2	220.44	29.3 QP	46.0	-16.7	1.50 V	14	39.9	-10.6
3	284.60	39.6 QP	46.0	-6.4	1.50 V	213	47.3	-7.7
4	436.26	42.6 QP	46.0	-3.4	1.00 V	15	47.1	-4.5
5	500.42	41.3 QP	46.0	-4.7	2.00 V	14	44.9	-3.6
6	624.85	37.4 QP	46.0	-8.6	1.00 V	14	38.1	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

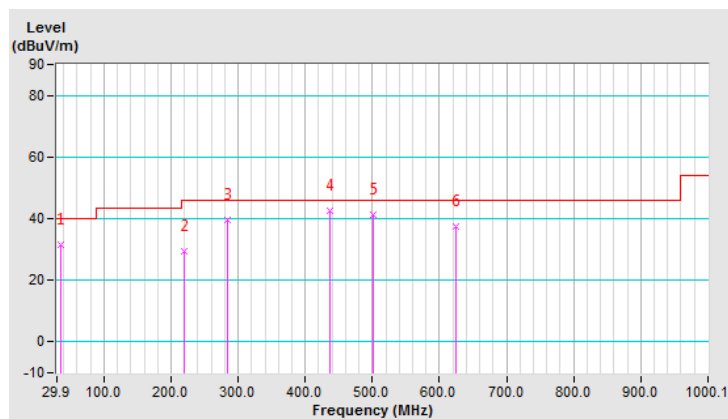


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	C1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	49.34	33.8 QP	40.0	-6.2	1.50 H	136	43.5	-9.7
2	261.27	41.7 QP	46.0	-4.3	1.00 H	103	50.5	-8.8
3	282.66	44.8 QP	46.0	-1.2	1.00 H	112	52.6	-7.8
4	500.42	39.1 QP	46.0	-6.9	2.00 H	338	42.7	-3.6
5	624.85	41.0 QP	46.0	-5.0	1.00 H	138	41.7	-0.7
6	727.90	39.0 QP	46.0	-7.0	1.00 H	13	37.8	1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

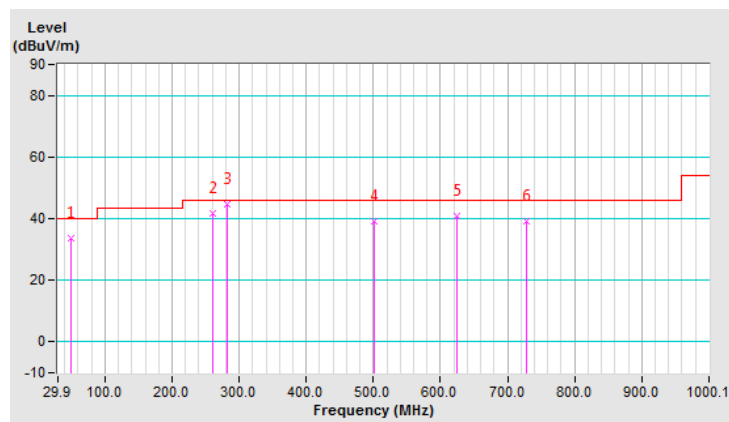


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	C1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	51.29	38.8 QP	40.0	-1.2	1.00 V	15	48.5	-9.7
2	282.66	33.0 QP	46.0	-13.0	1.00 V	210	40.8	-7.8
3	430.42	42.6 QP	46.0	-3.4	1.50 V	15	47.2	-4.6
4	475.14	37.3 QP	46.0	-8.7	2.00 V	321	41.4	-4.1
5	515.97	40.8 QP	46.0	-5.2	1.00 V	343	44.1	-3.3
6	624.85	40.4 QP	46.0	-5.6	1.00 V	31	41.1	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

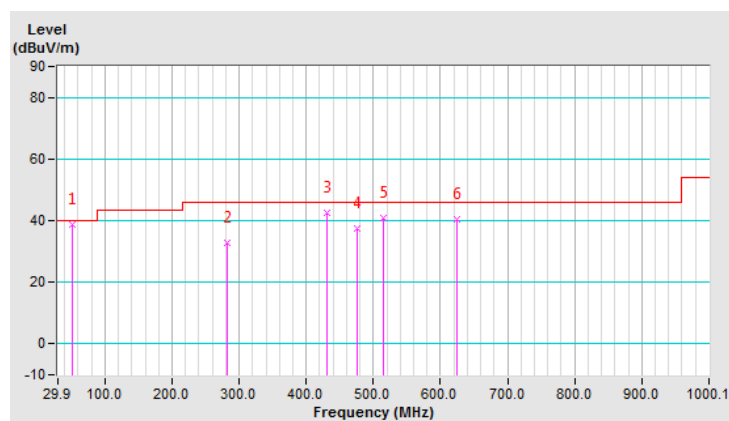


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	C2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	263.21	42.5 QP	46.0	-3.5	1.00 H	103	51.1	-8.6
2	282.66	44.3 QP	46.0	-1.7	1.00 H	103	52.1	-7.8
3	309.88	36.6 QP	46.0	-9.4	2.00 H	5	43.7	-7.1
4	500.42	36.3 QP	46.0	-9.7	1.50 H	326	39.9	-3.6
5	624.85	42.5 QP	46.0	-3.5	1.00 H	36	43.2	-0.7
6	727.90	37.5 QP	46.0	-8.5	1.00 H	5	36.3	1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

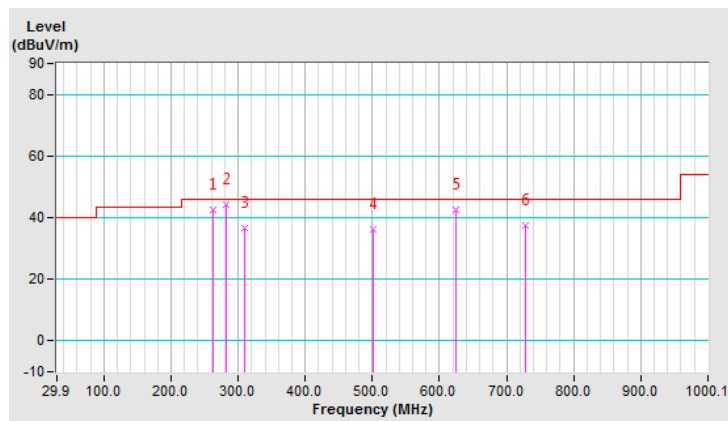


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	C2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.23	30.7 QP	40.0	-9.3	1.50 V	35	40.5	-9.8
2	280.71	41.1 QP	46.0	-4.9	1.00 V	224	48.9	-7.8
3	329.58	44.8 QP	46.0	-1.2	1.00 V	216	51.5	-6.7
4	424.59	39.5 QP	46.0	-6.5	2.00 V	35	44.3	-4.8
5	545.14	36.6 QP	46.0	-9.4	1.50 V	7	39.4	-2.8
6	624.85	36.4 QP	46.0	-9.6	1.00 V	6	37.1	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

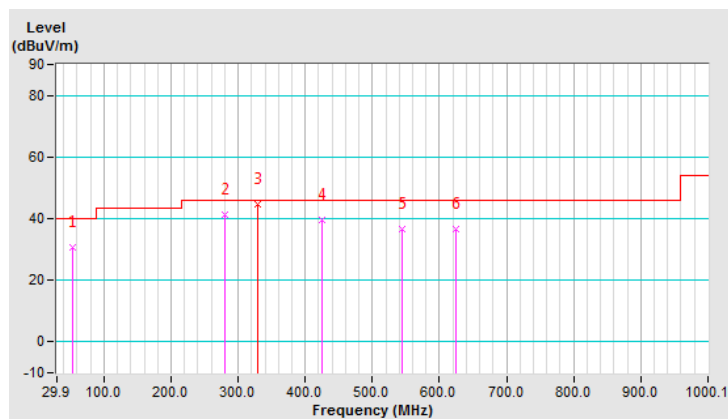

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCS 30	100288	Jan. 03, 2019	Jan. 02, 2020
RF signal cable Woken	5D-FB	Cable-cond1-01	Sep. 05, 2018	Sep. 04, 2019
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 21, 2019	Feb. 20, 2020
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 19, 2018	Aug. 18, 2019
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-12040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

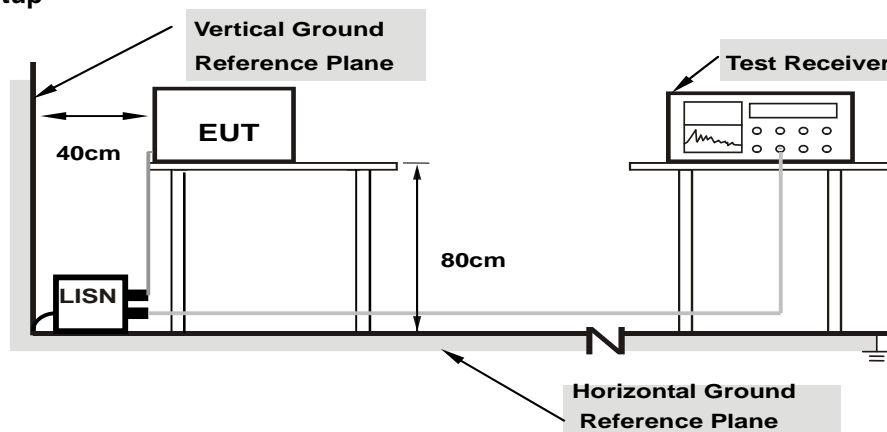

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results


Worst-case data: 8DPSK

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15811	9.69	44.48	27.01	54.17	36.70	65.56	55.56	-11.39	-18.86
2	0.25006	9.68	37.32	32.57	47.00	42.25	61.76	51.76	-14.76	-9.51
3	0.50931	9.68	37.79	33.24	47.47	42.92	56.00	46.00	-8.53	-3.08
4	2.24600	9.71	28.58	27.30	38.29	37.01	56.00	46.00	-17.71	-8.99
5	5.24600	9.77	20.96	16.89	30.73	26.66	60.00	50.00	-29.27	-23.34
6	14.72600	9.90	21.99	18.57	31.89	28.47	60.00	50.00	-28.11	-21.53

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

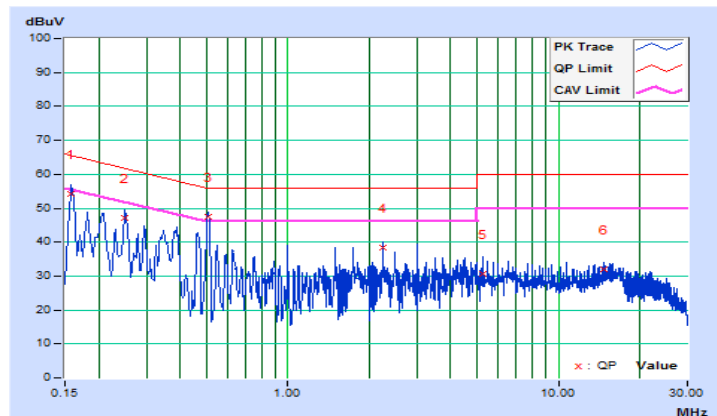


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.21000	9.66	39.07	30.24	48.73	39.90	63.21
2	0.50264	9.65	35.78	32.83	45.43	42.48	56.00	46.00	-10.57	-3.52
3	1.00200	9.64	25.26	24.33	34.90	33.97	56.00	46.00	-21.10	-12.03
4	2.24600	9.68	28.86	27.28	38.54	36.96	56.00	46.00	-17.46	-9.04
5	6.24200	9.77	24.76	21.49	34.53	31.26	60.00	50.00	-25.47	-18.74
6	15.22600	9.93	22.36	18.69	32.29	28.62	60.00	50.00	-27.71	-21.38

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

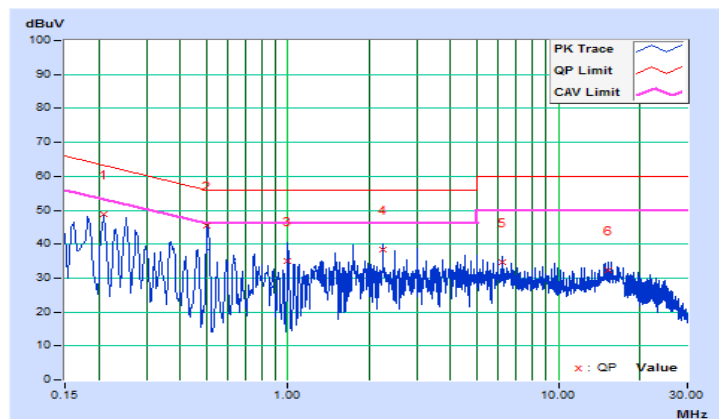


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15400	9.69	47.03	32.98	56.72	42.67	65.78
2	0.39032	9.68	20.74	13.03	30.42	22.71	58.06	48.06	-27.64	-25.35
3	1.05384	9.67	24.75	22.78	34.42	32.45	56.00	46.00	-21.58	-13.55
4	3.87800	9.75	21.05	12.07	30.80	21.82	56.00	46.00	-25.20	-24.18
5	14.99400	9.90	22.79	17.11	32.69	27.01	60.00	50.00	-27.31	-22.99
6	25.23400	9.94	13.81	11.83	23.75	21.77	60.00	50.00	-36.25	-28.23

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

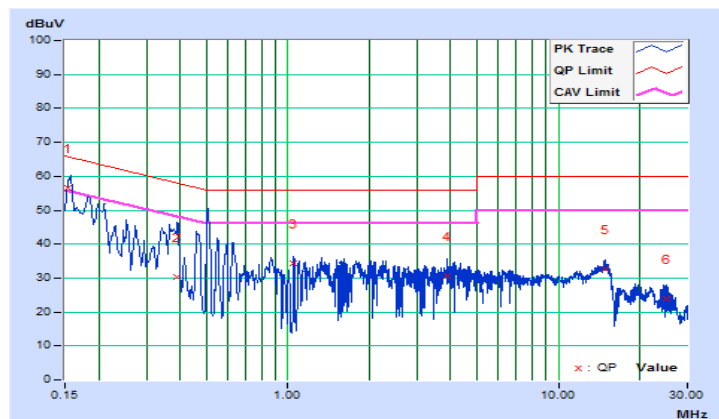


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17000	9.66	44.57	32.91	54.23	42.57	64.96
2	0.50600	9.65	38.73	33.33	48.38	42.98	56.00	46.00	-7.62	-3.02
3	1.33800	9.65	25.15	17.66	34.80	27.31	56.00	46.00	-21.20	-18.69
4	4.01000	9.72	22.84	12.63	32.56	22.35	56.00	46.00	-23.44	-23.65
5	14.99400	9.93	24.70	18.56	34.63	28.49	60.00	50.00	-25.37	-21.51
6	24.74200	10.02	16.94	15.65	26.96	25.67	60.00	50.00	-33.04	-24.33

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

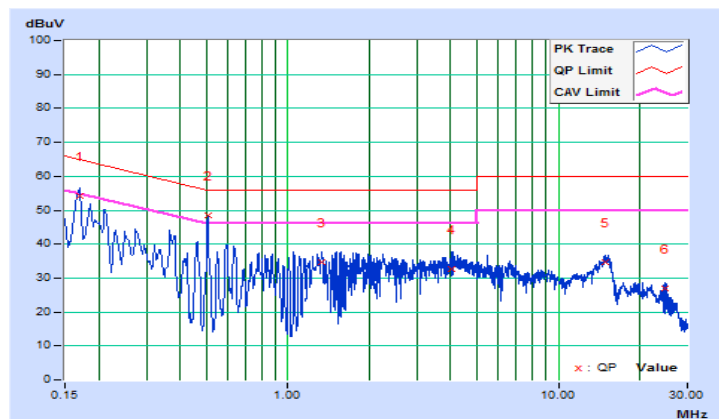


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15400	9.69	42.13	19.34	51.82	29.03	65.78
2	0.17430	9.69	39.24	28.76	48.93	38.45	64.75	54.75	-15.82	-16.30
3	0.50264	9.68	38.34	33.57	48.02	43.25	56.00	46.00	-7.98	-2.75
4	2.24600	9.71	28.39	27.29	38.10	37.00	56.00	46.00	-17.90	-9.00
5	6.49000	9.80	23.49	20.26	33.29	30.06	60.00	50.00	-26.71	-19.94
6	16.97400	9.91	21.65	16.98	31.56	26.89	60.00	50.00	-28.44	-23.11

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

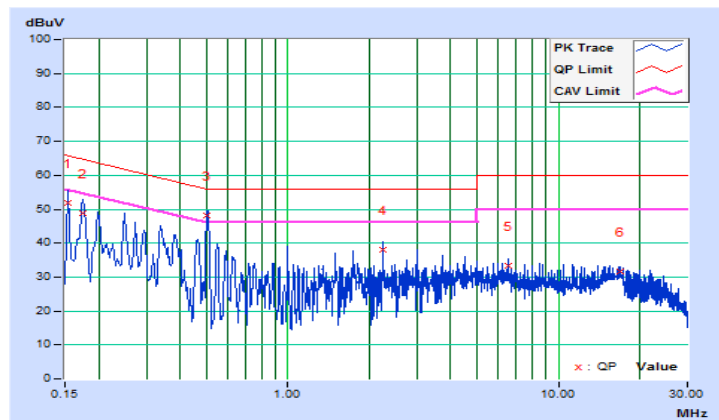


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16932	9.66	47.00	34.90	56.66	44.56	64.99
2	0.21015	9.66	38.99	30.12	48.65	39.78	63.20	53.20	-14.55	-13.42
3	0.25338	9.66	36.01	29.98	45.67	39.64	61.65	51.65	-15.98	-12.01
4	0.50397	9.65	35.54	34.06	45.19	43.71	56.00	46.00	-10.81	-2.29
5	2.24600	9.68	28.69	27.16	38.37	36.84	56.00	46.00	-17.63	-9.16
6	9.48600	9.84	21.99	19.40	31.83	29.24	60.00	50.00	-28.17	-20.76

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

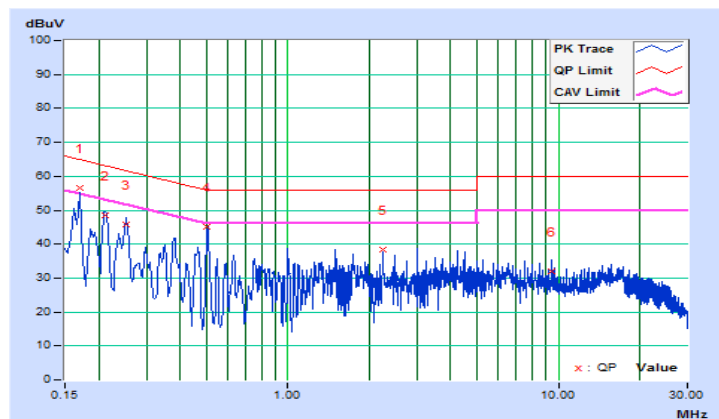


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17022	9.69	46.71	35.72	56.40	45.41	64.95
2	0.50264	9.68	40.44	32.69	50.12	42.37	56.00	46.00	-5.88	-3.63
3	1.05107	9.67	25.77	23.01	35.44	32.68	56.00	46.00	-20.56	-13.32
4	4.01400	9.75	24.33	11.95	34.08	21.70	56.00	46.00	-21.92	-24.30
5	14.74600	9.90	23.25	17.15	33.15	27.05	60.00	50.00	-26.85	-22.95
6	24.74200	9.94	16.12	14.90	26.06	24.84	60.00	50.00	-33.94	-25.16

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

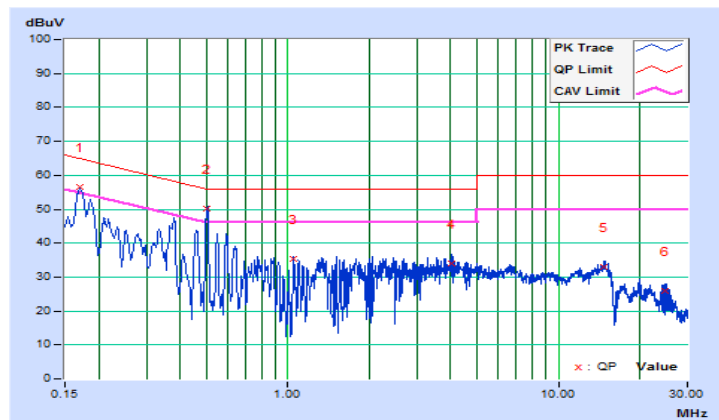


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17000	9.66	44.63	34.45	54.29	44.11	64.96	54.96	-10.67	-10.85
2	0.49869	9.65	36.38	30.82	46.03	40.47	56.02	46.02	-9.99	-5.55
3	1.05000	9.64	27.18	23.92	36.82	33.56	56.00	46.00	-19.18	-12.44
4	4.01800	9.72	25.44	13.37	35.16	23.09	56.00	46.00	-20.84	-22.91
5	15.24600	9.93	24.99	18.96	34.92	28.89	60.00	50.00	-25.08	-21.11
6	24.24600	10.02	16.31	14.21	26.33	24.23	60.00	50.00	-33.67	-25.77

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

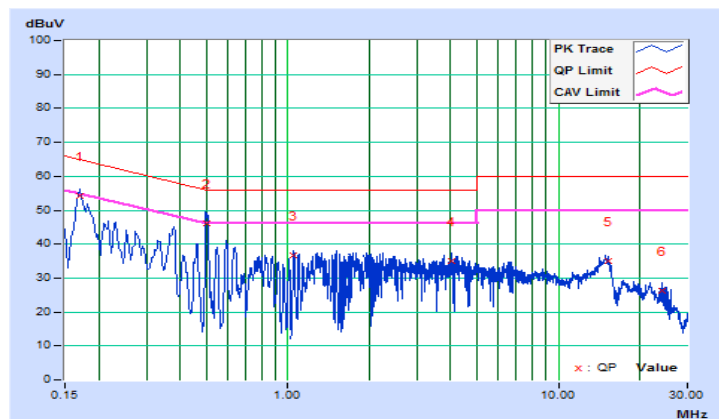


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16977	9.69	46.52	36.76	56.21	46.45	64.97
2	0.50200	9.68	39.25	33.41	48.93	43.09	56.00	46.00	-7.07	-2.91
3	1.00200	9.67	29.59	29.24	39.26	38.91	56.00	46.00	-16.74	-7.09
4	1.75000	9.69	28.74	27.93	38.43	37.62	56.00	46.00	-17.57	-8.38
5	6.49800	9.80	23.76	21.22	33.56	31.02	60.00	50.00	-26.44	-18.98
6	15.75000	9.91	23.73	20.43	33.64	30.34	60.00	50.00	-26.36	-19.66

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

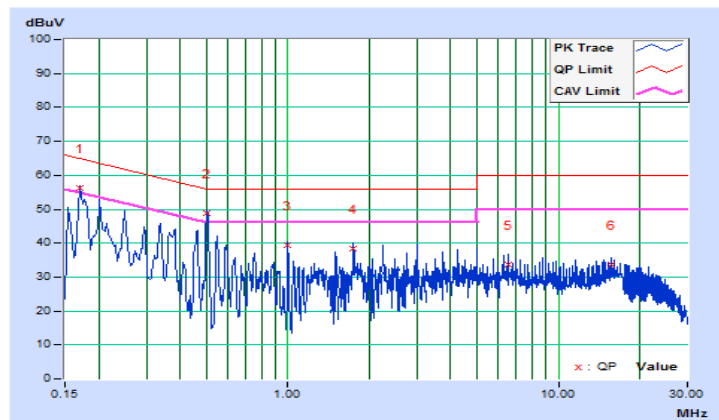


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.18133	9.66	44.99	33.82	54.65	43.48	64.42
2	0.25006	9.66	37.79	34.10	47.45	43.76	61.76	51.76	-14.31	-8.00
3	0.50000	9.65	34.69	29.21	44.34	38.86	56.00	46.00	-11.66	-7.14
4	1.75000	9.66	29.64	28.97	39.30	38.63	56.00	46.00	-16.70	-7.37
5	6.25000	9.77	25.57	22.70	35.34	32.47	60.00	50.00	-24.66	-17.53
6	17.49800	9.96	23.73	22.29	33.69	32.25	60.00	50.00	-26.31	-17.75

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

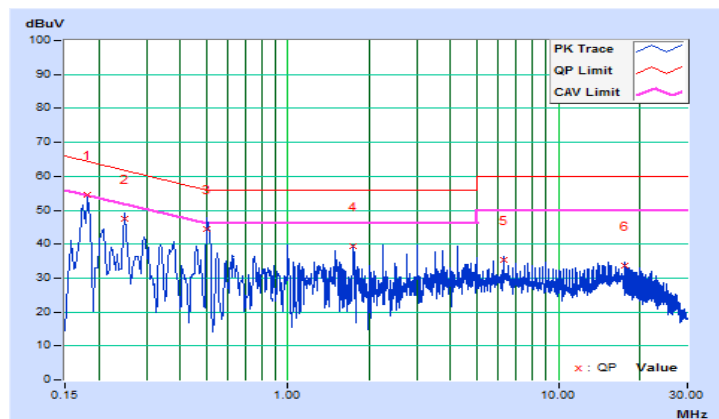


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.18200	9.68	46.78	40.94	56.46	50.62	64.39
2	0.50264	9.68	40.41	33.31	50.09	42.99	56.00	46.00	-5.91	-3.01
3	0.88600	9.67	25.38	17.63	35.05	27.30	56.00	46.00	-20.95	-18.70
4	4.06200	9.75	24.97	11.93	34.72	21.68	56.00	46.00	-21.28	-24.32
5	14.74600	9.90	23.18	17.07	33.08	26.97	60.00	50.00	-26.92	-23.03
6	24.74600	9.94	16.94	16.01	26.88	25.95	60.00	50.00	-33.12	-24.05

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

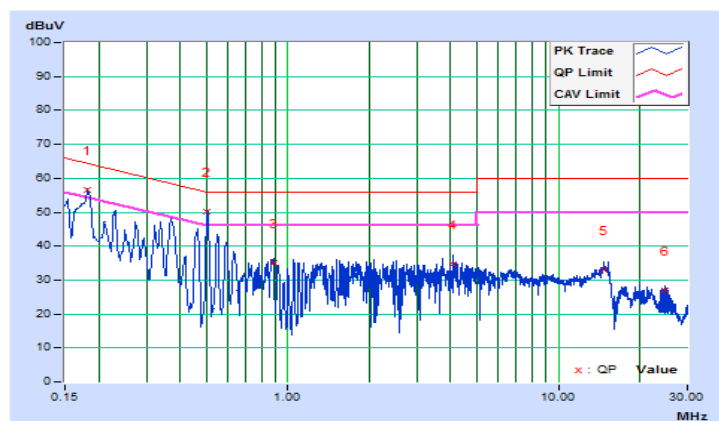


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18133	9.66	43.99	38.75	53.65	48.41	64.42	54.42	-10.77	-6.01
2	0.50200	9.65	38.86	32.13	48.51	41.78	56.00	46.00	-7.49	-4.22
3	1.05107	9.64	27.01	24.75	36.65	34.39	56.00	46.00	-19.35	-11.61
4	4.07800	9.72	25.33	13.73	35.05	23.45	56.00	46.00	-20.95	-22.55
5	14.87400	9.93	23.60	14.71	33.53	24.64	60.00	50.00	-26.47	-25.36
6	24.49400	10.02	17.12	15.52	27.14	25.54	60.00	50.00	-32.86	-24.46

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

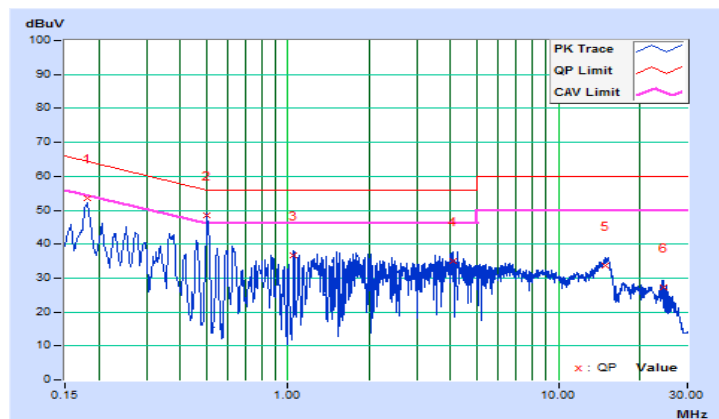


4.3 Number of Hopping Frequency Used

4.3.1 Limits of Hopping Frequency Used Measurement

At least 15 channels frequencies, and should be equally spaced.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure


- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 Test Results

There are 79 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

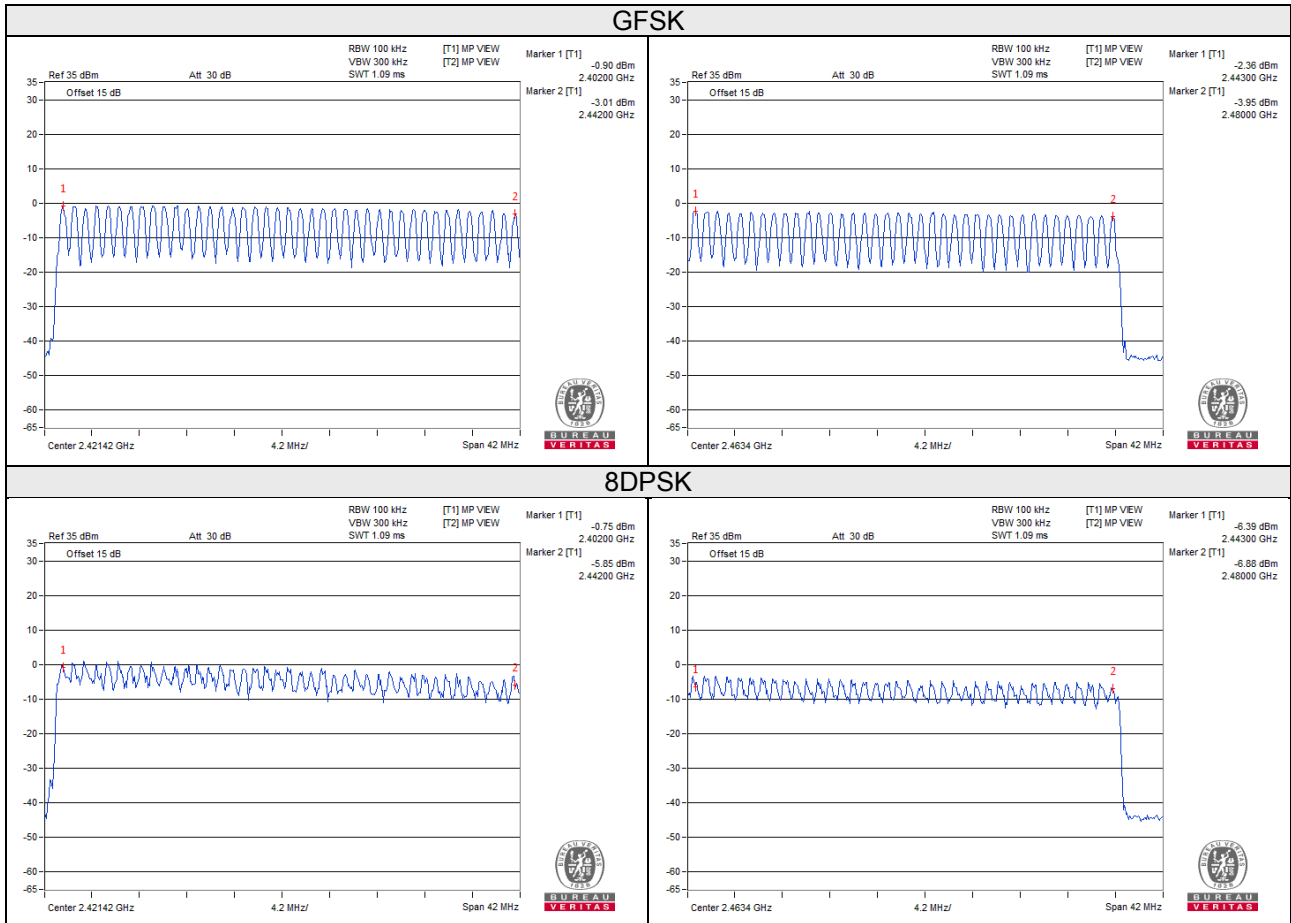


4.4 Dwell Time on Each Channel

4.4.1 Limits of Dwell Time on Each Channel Measurement

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 Test Results

GFSK

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) * 6.32 = 316.00 times	0.42	132.72	400
DH3	27 (times / 5 sec) * 6.32 = 170.64 times	1.66	283.26	400
DH5	18 (times / 5 sec) * 6.32 = 113.76 times	2.91	331.04	400

Note: Test plots of the transmitting time slot are shown as below.



8DPSK

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
3DH1	50 (times / 5 sec) * 6.32 = 316.00 times	0.44	139.04	400
3DH3	26 (times / 5 sec) * 6.32 = 164.32 times	1.73	284.27	400
3DH5	16 (times / 5 sec) * 6.32 = 101.12 times	3.01	304.37	400

Note: Test plots of the transmitting time slot are shown as below.




4.5 Channel Bandwidth

4.5.1 Limits of Channel Bandwidth Measurement

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.5.5 Deviation from Test Standard


No deviation.

4.5.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.5.7 Test Results

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	1.05	1.28
39	2441	1.05	1.28
78	2480	1.07	1.29

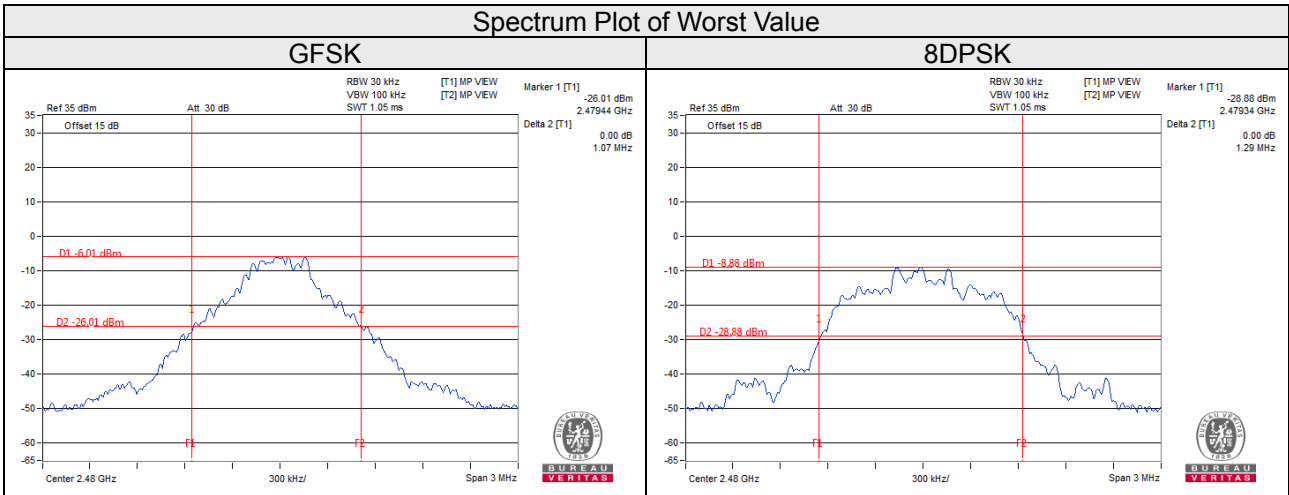


4.6 Hopping Channel Separation

4.6.1 Limits of Hopping Channel Separation Measurement

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

Measurement Procedure REF

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.


4.6.5 Deviation from Test Standard

No deviation.

4.6.6 Test Results

Channel	Frequency (MHz)	Adjacent Channel Separation (MHz)		20dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK	GFSK	8DPSK	
0	2402	1.00	1.00	1.05	1.28	0.70	0.86	Pass
39	2441	1.00	1.00	1.05	1.28	0.70	0.86	Pass
78	2480	1.00	1.00	1.07	1.29	0.72	0.86	Pass

Note: The minimum limit is two-third 20dB bandwidth.

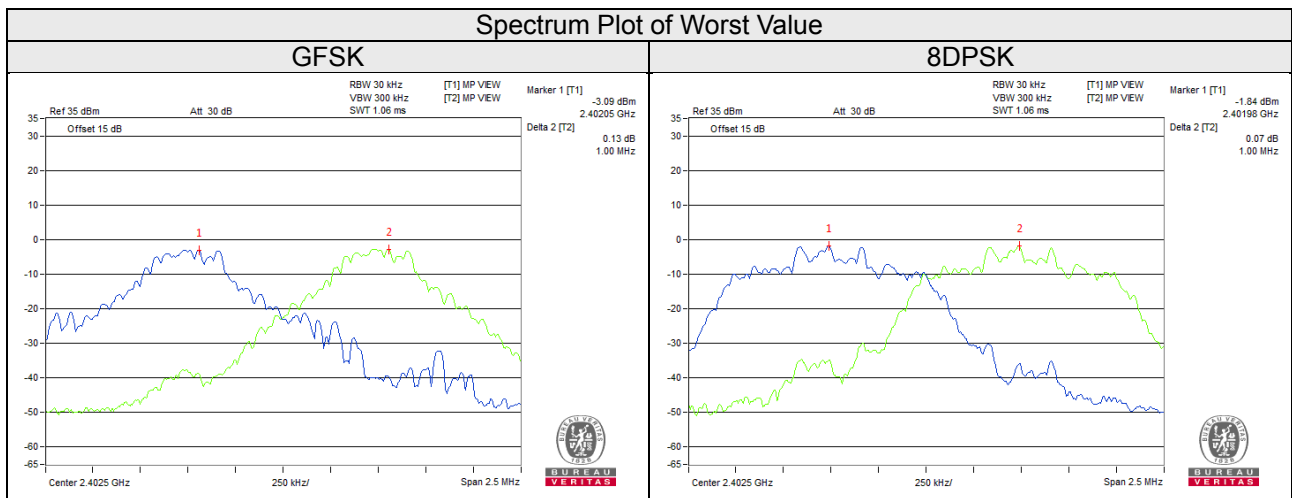


4.7 Maximum Output Power

4.7.1 Limits of Maximum Output Power Measurement

The Maximum Output Power Measurement is 125mW.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

For Peak Power

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

For Average Power

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

For Peak Power

Channel	Frequency (MHz)	Output Power (mW)		Output Power (dBm)		Power Limit (mW)	Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK		
0	2402	1.156	2.344	0.63	3.70	125	Pass
39	2441	0.953	1.387	-0.21	1.42	125	Pass
78	2480	0.705	1.074	-1.52	0.31	125	Pass

4.8 Conducted Out of Band Emission Measurement

4.8.1 Limits Of Conducted Out Of Band Emission Measurement

Below -20dB of the highest emission level of operating band (in 100kHz RBW).

4.8.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.8.3 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 Deviation from Test Standard

No deviation.

4.8.5 EUT Operating Condition



The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.6 Test Results



The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

GFSK



Hopping disabled Low Channel

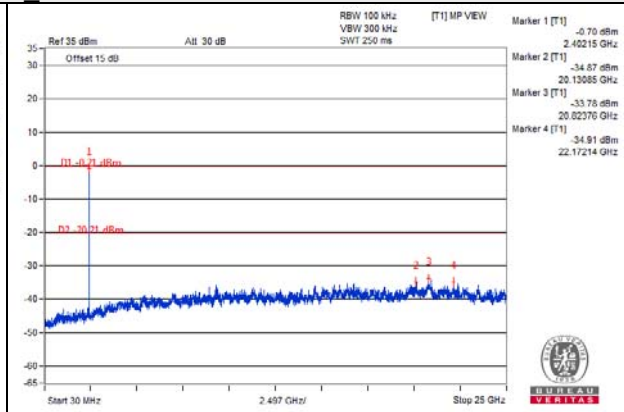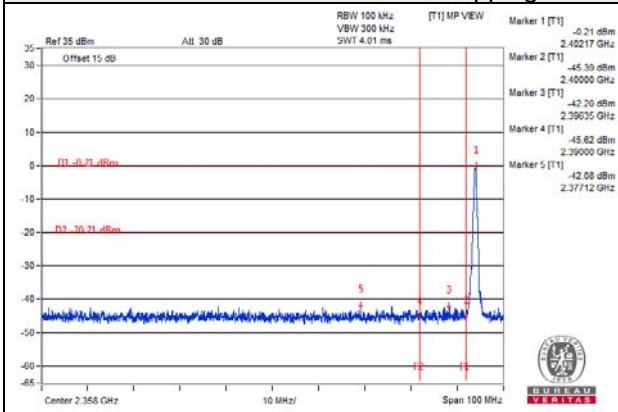



Hopping disabled High Channel

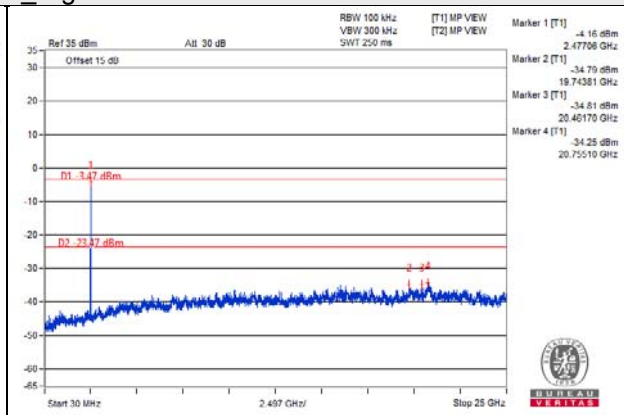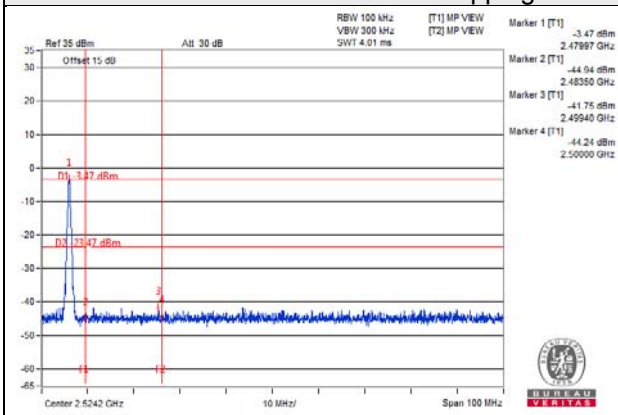

Hopping enabled Low Channel

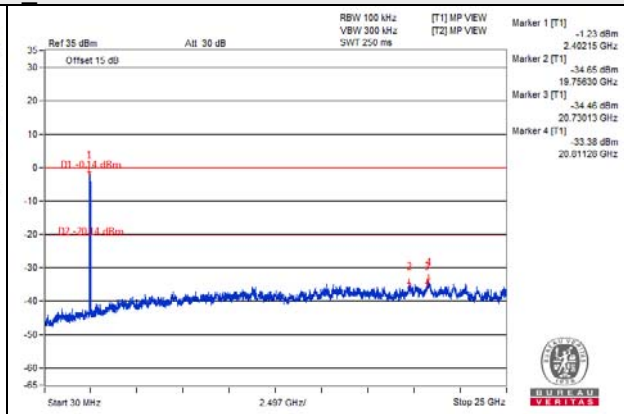
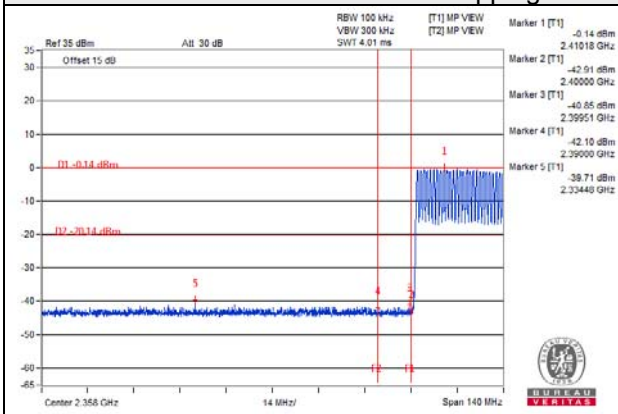


Hopping enabled High Channel

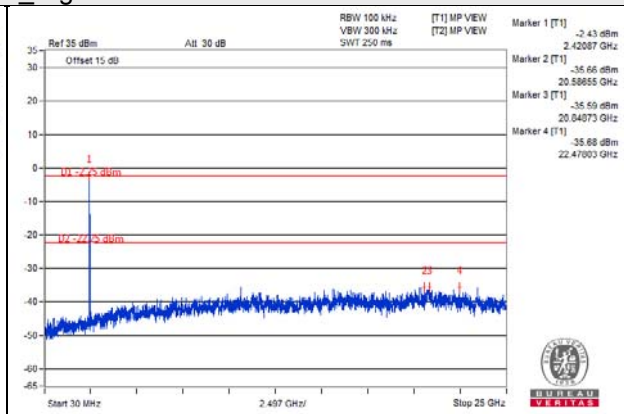
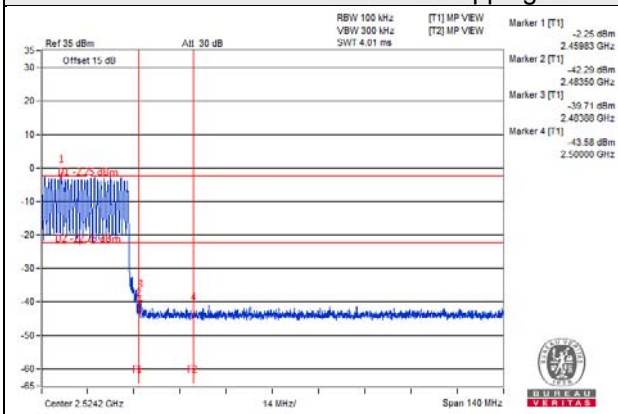


8DPSK



Hopping disabled Low Channel

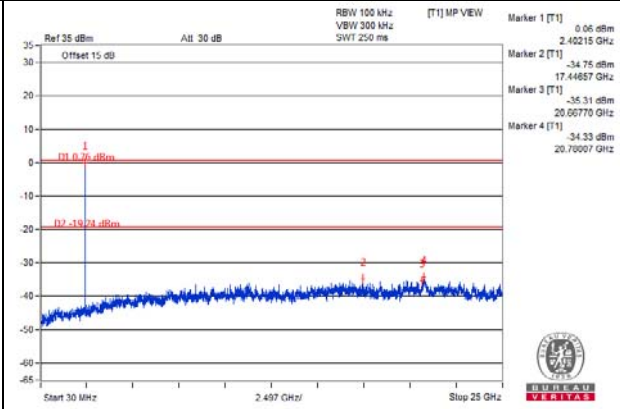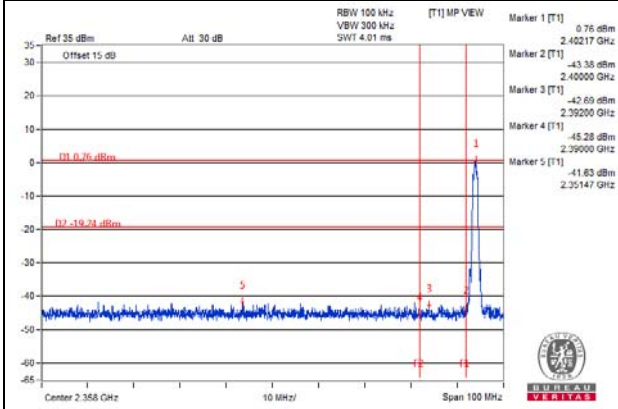



Hopping disabled High Channel

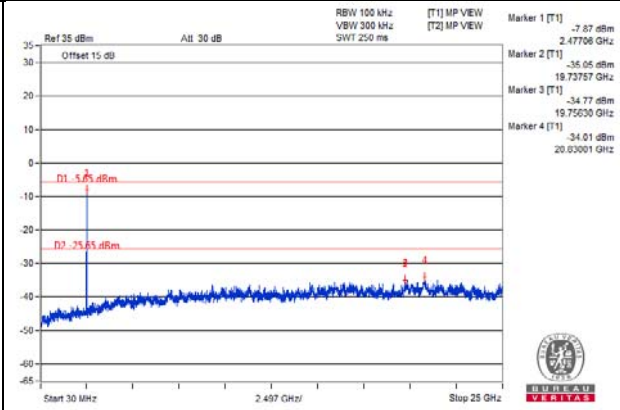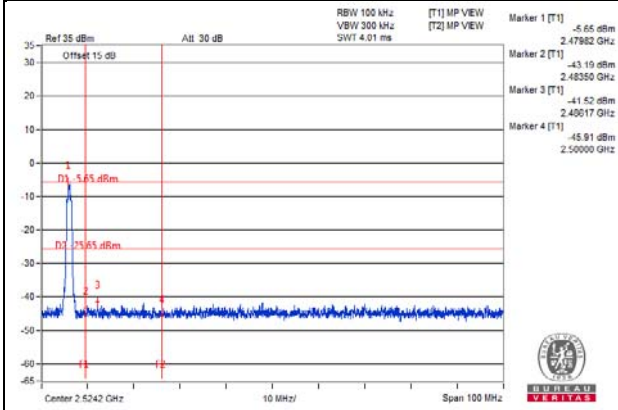

Hopping enabled Low Channel

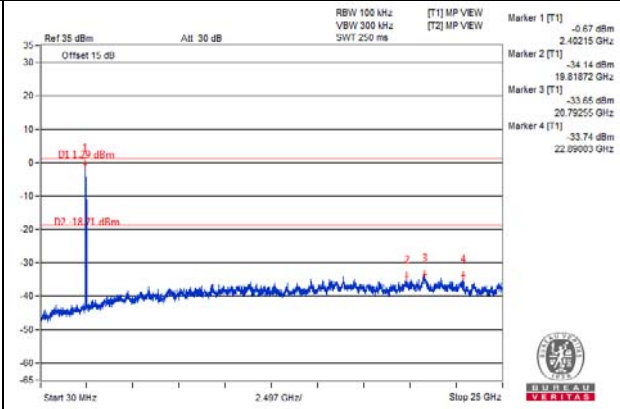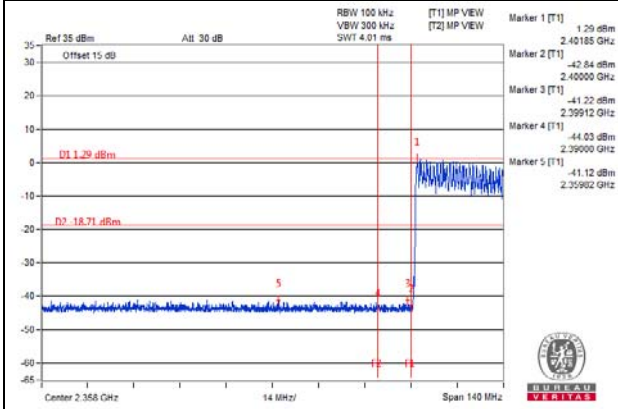

Hopping enabled High Channel

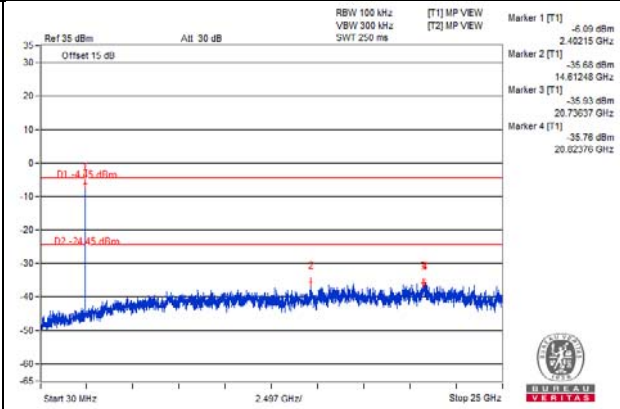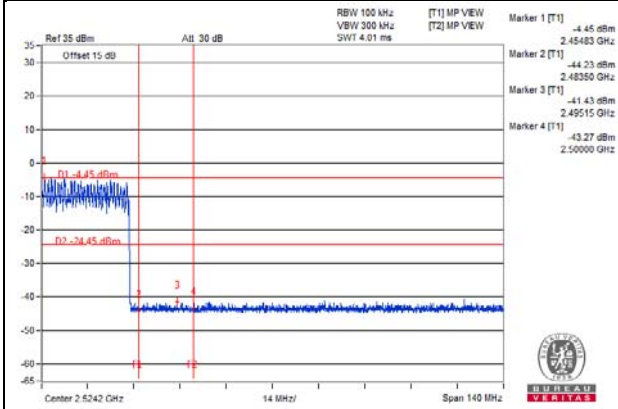

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---