

Test Report

Applicant : Labpano Technology (Changzhou) Co., Ltd.
Building 4D, No.160 Xihu West Road, Wujin

Address : National Hi-tech Industrial Zone, Changzhou,
Jiangsu, China.

Product Name : PanoX V3

Brand Mark : PanoX

Model : PIP225

Extension model : PIP225+

FCC ID : 2ARZ2-PIP225

Report Number : BLA-EMC-202407-A10402

Date of Receipt : 2024.07.25

Date of Test : 2024.07.25 to 2024.08.14

Test Standard : 47 CFR Part 15, Subpart C 15.247

Test Result : Pass

Compiled by: *Hugh* Review by: *Sueels* Approved by: *Blue Zheng*
Issued Date: 2024.08.14

BlueAsia of Technical Services(Shenzhen) Co.,Ltd

Address: Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China



The test report is effective only with both signature and specialized stamp and The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full. The results described in this report do not represent the quality or characteristics of the sampled batch, nor do they represent any similar or identical products that are not explicitly stated.

Table of Contents

1 General information	5
1.1 General information	5
1.2 General description of EUT	5
2 Test summary	6
3 Test Configuration	7
3.1 Test mode	7
3.2 Operation Frequency each of channel	8
3.3 Test channel	9
3.4 Auxiliary equipment	9
3.5 Test environment	9
4 Laboratory information	10
4.1 Laboratory and accreditations	10
4.2 Measurement uncertainty	10
5 Test equipment	11
6 Test result	12
6.1 Antenna requirement	12
6.2 Conducted emissions at AC power line (150 kHz-30 MHz)	13
6.3 Conducted peak output Power	17
6.4 20dB Bandwidth	18
6.5 Conducted Band Edges Measurement	19
6.6 Conducted spurious emissions	20
6.7 Carrier Frequencies Separation	21
6.8 Hopping Channel Number	22
6.9 Dwell Time	23
6.10 Radiated spurious emissions	24
6.11 Radiated emissions which fall in the restricted bands	35
7 Appendix A	42
7.1 Maximum Conducted Output Power	42
7.2 -20dB Bandwidth	47
7.3 Occupied Channel Bandwidth	52

7.4 Band Edge	57
7.5 Band Edge(Hopping)	64
7.6 Conducted RF Spurious Emission	71
7.7 Carrier Frequencies Separation	81
7.8 Number of Hopping Channel	83
7.9 Dwell Time	85
Appendix B: photographs of test setup	91
Appendix C: photographs of EUT	93

BlueAsia

Revise Record

Version No.	Date	Description
01	2024.0814	Original

BlueAsia

1 General information

1.1 General information

Applicant	Labpano Technology (Changzhou) Co., Ltd.
Address	Building 4D, No.160 Xihu West Road, Wujin National Hi-tech Industrial Zone, Changzhou, Jiangsu, China.
Manufacturer	Labpano Technology (Changzhou) Co., Ltd.
Address	Building 4D, No.160 Xihu West Road, Wujin National Hi-tech Industrial Zone, Changzhou, Jiangsu, China.
Factory	Labpano Technology (Changzhou) Co., Ltd.
Address	Building 4D, No.160 Xihu West Road, Wujin National Hi-tech Industrial Zone, Changzhou, Jiangsu, China.

1.2 General description of EUT

Product name	PanoX V3
Model no.	PIP225
Series model	PIP225+
Note	PIP225 and PiP225+ have the same circuit design, layout, used components and internal wiring, only the model and color are different because of the different sales channels
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK, pi/4DQPSK, 8DPSK
Channel Spacing:	1MHz
Number of Channels:	79
Antenna Type:	Internal antenna
Antenna Gain:	0.52 dBi (Provided by customer)
Battery information	DC3.85V
Hardware version	FM05_MB_PCB_V1.0
Software version	Pano2_QCS605_P225_Develop-#23-beta
Engineer sample no	BLA-EMC-202407-A104
Note: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.	

2 Test summary

No.	Test item	Result	Remark
1	Antenna Requirement	Pass	
2	Conducted Emissions at AC Power Line (150kHz-30MHz)	Pass	
3	Conducted Peak Output Power	Pass	
4	20dB Bandwidth	Pass	
5	Conducted Band Edges Measurement	Pass	
6	Conducted Spurious Emissions	Pass	
7	Carrier Frequencies Separation	Pass	
8	Hopping Channel Number	Pass	
9	Dwell Time	Pass	
10	Radiated Spurious Emissions	Pass	
11	Radiated Emissions which fall in the restricted bands	Pass	

N/A: Not Applicable

3 Test Configuration

3.1 Test mode

Test Mode ^{Note 1}	Description
TX	Keep the EUT in continuously transmitting mode with modulation. (hopping and non-hopping mode all have been tested)
RX	Keep the EUT in receiving mode
TX Low channel	Keep the EUT in continuously transmitting mode in low channel
TX middle channel	Keep the EUT in continuously transmitting mode in middle channel
TX high channel	Keep the EUT in continuously transmitting mode in high channel

Note 1: The EUT was configured to measure its highest possible emission and/or immunity level. The test modes were adapted according to the operation manual for use.

3.2 Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		--

3.3 Test channel

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

3.4 Auxiliary equipment

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	Lenovo	E460C	N/A	From lab (No.BLA-ZC-BS-2022005)

Note:

“--” mean no any auxiliary device during testing.

3.5 Test environment

Environment	Temperature	Voltage
Normal	25°C	DC 3.85V

4 Laboratory information

4.1 Laboratory and accreditations

The test facility is recognized, certified, or accredited by the following organizations:

Company name:	BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Address:	Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
CNAS accredited No.:	L9788
A2LA Cert. No.:	5071.01
FCC Designation No.:	CN1252
ISED CAB identifier No.:	CN0028
Telephone:	+86-755-28682673
FAX:	+86-755-28682673

4.2 Measurement uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

Parameter	Expanded Uncertainty
Radiated Emission(9kHz-30MHz)	± 4.34 dB
Radiated Emission(30Mz-1000MHz)	± 4.24 dB
Radiated Emission(1GHz-18GHz)	± 4.68 dB
AC Power Line Conducted Emission(150kHz-30MHz)	± 3.45 dB
Occupied Channel Bandwidth	± 5 %
RF output power, conducted	± 1.5 dB
Power Spectral Density, conducted	± 3.0 dB
Unwanted Emissions, conducted	± 3.0 dB
Temperature	± 3 °C
Supply voltages	± 3 %
Time	± 5 %

5 Test equipment

Equipment No.	Equipment Name	Model No.	Manufacture	S/N	Cal. Date	Next Cal. Date
BLA-EMC-008	Spectrum	FSP40	R&S	100817	2023/08/30	2024/08/29
BLA-EMC-009	EMI Receiver	ESR7	R&S	101199	2023/08/30	2024/08/29
BLA-EMC-012	broad band Antenna	VULB9168	Schwarz beck	00836 P:00227	2022/10/12	2025/10/11
BLA-EMC-013	Horn Antenna	BBHA9120D	Schwarz beck	01892	2022/09/13	2025/09/12
BLA-EMC-014	Amplifier	PA_000318G-45	SKET	PA2018043003	2023/08/30	2024/08/29
BLA-EMC-016	Signal Generator	N5182A	Agilent	MY52420567	2023/11/16	2024/11/15
BLA-EMC-028	Spectrum	N9020A	Agilent	MY53420839	2023/11/16	2024/11/15
BLA-EMC-038	Spectrum	N9020A	Agilent	MY49100060	2023/08/30	2024/08/29
BLA-EMC-042	Power sensor	RPR3006W	DARE	14I00889SN042	2023/09/01	2024/08/31
BLA-EMC-043	Loop antenna	FMZB1519B	SCHNARZBECK	00102	2022/09/14	2025/09/13
BLA-EMC-044	Wideband radio communication tester	CMW500	R&S	132429	2023/08/30	2024/08/29
BLA-EMC-046	Filter bank	2.4G/5G Filter bank	SKET	N/A	2024/07/07	2025/07/06
BLA-EMC-061	Receiver	ESPI7	R&S	101477	2024/07/07	2025/07/06
BLA-EMC-062	Signal Generator	N5181A	Agilent	MY46240904	2024/07/07	2025/07/06
BLA-EMC-064	Signal Generator	N5182B	KEYSIGHT	MY58108892	2024/07/07	2025/07/06
BLA-EMC-065	broadband Antenna	VULB9168	Schwarz beck	01065P	2022/12/12	2025/12/11
BLA-EMC-066	Amplifier	LNPA_30M01G-30	SKET	SK2021060801	2024/07/07	2025/07/06
BLA-EMC-079	Spectrum	N9020A	Agilent	MY54420161	2023/08/30	2024/08/29
BLA-EMC-080	Signal Generator	N5182A	Agilent	MY47420955	2023/08/30	2024/08/29
BLA-EMC-086	Amplifier	LNPA_18G40G-50dB	SKET	SK2022071301	2023/08/14	2024/08/13

6 Test result

6.1 Antenna requirement

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A

6.1.1 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of a so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.52 dBi.

6.2 Conducted emissions at AC power line (150 kHz-30 MHz)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.2.1 Limit

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

6.2.2 Test setup

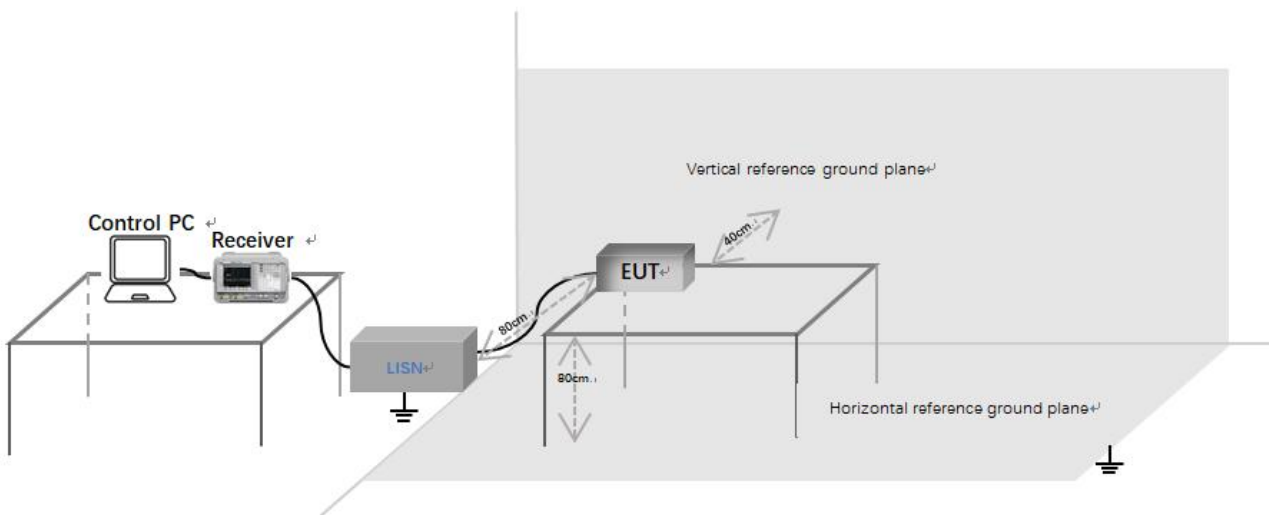

Description of test setup connection:

- Connect the control PC to the receiver through a USB to GPIB cable;
- The receiver is connected to the LISN through a coaxial line;
- Connect the power port of LISN to the EUT.


6.2.3 Procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

LISN=Read Level+ Cable Loss+ LISN Factor

6.2.4 Test data

[TestMode: TM1]; [Line: Line];[Voltage:120V/60Hz]

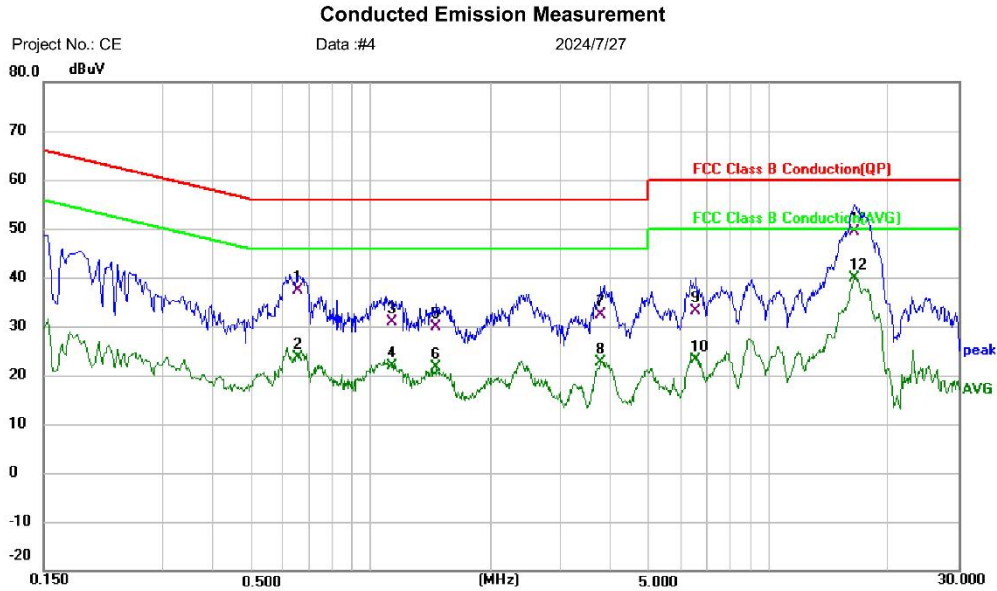


Site	Phase: L1	Temperature: (C)
Limit: FCC Class B Conduction(QP)	Power:	Humidity: %RH
EUT: PanoX V3	Distance:	RBW: 9 KHz
M/N: PIP225		VBW: 30 KHz
Mode: BT TX		Sweep Time: 10 ms
Note:		

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	0.6540	27.28	9.98	37.26	56.00	-18.74	QP			
2	0.6540	13.65	9.98	23.63	46.00	-22.37	AVG			
3	1.1260	21.00	9.84	30.84	56.00	-25.16	QP			
4	1.1260	12.11	9.84	21.95	46.00	-24.05	AVG			
5	1.4580	19.85	9.95	29.80	56.00	-26.20	QP			
6	1.4580	11.66	9.95	21.61	46.00	-24.39	AVG			
7	3.7980	22.39	9.97	32.36	56.00	-23.64	QP			
8	3.7980	12.56	9.97	22.53	46.00	-23.47	AVG			
9	6.5820	22.38	10.77	33.15	60.00	-26.85	QP			
10	6.5820	12.24	10.77	23.01	50.00	-26.99	AVG			
11	16.4180	35.78	13.58	49.36	60.00	-10.64	QP			
12 *	16.4180	26.34	13.58	39.92	50.00	-10.08	AVG			

*:Maximum data x:Over limit !:over margin (Reference Only)

Receiver: ESPL_1 Spectrum Analyzer: ESPI

Test Result: Pass

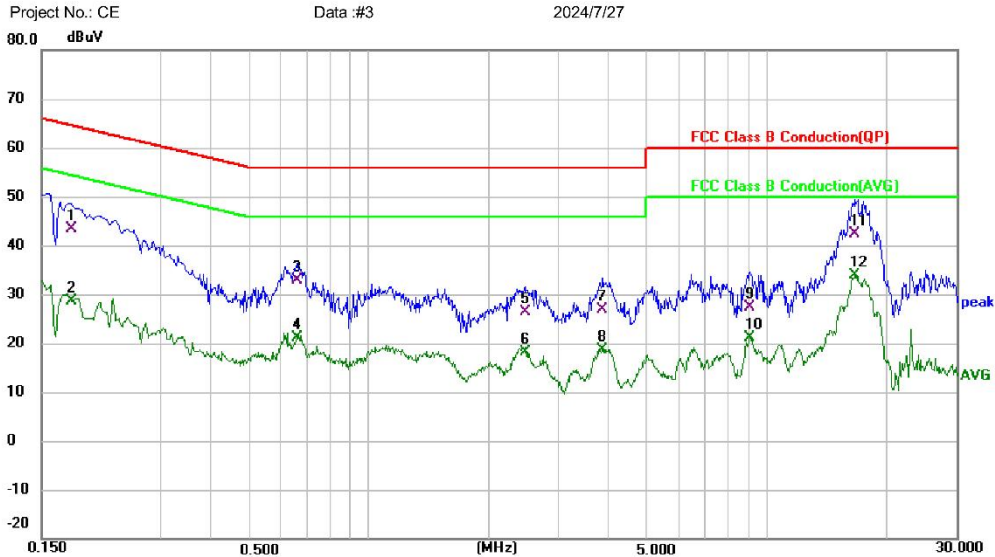[TestMode: TM1]; [Line: Neutral] ;[Voltage:120V/60Hz]
Conducted Emission Measurement


Site	Phase: N	Temperature: (C)
Limit: FCC Class B Conduction(QP)	Power:	Humidity: %RH
EUT: PanoX V3	Distance:	RBW: 9 KHz
M/N: PIP225		VBW: 30 KHz
Mode: BT TX		Sweep Time: 10 ms
Note:		

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	0.1780	33.23	10.18	43.41	64.58	-21.17			QP	
2	0.1780	18.52	10.18	28.70	54.58	-25.88			AVG	
3	0.6580	22.83	9.93	32.76	56.00	-23.24			QP	
4	0.6580	11.11	9.93	21.04	46.00	-24.96			AVG	
5	2.4700	16.34	10.03	26.37	56.00	-29.63			QP	
6	2.4700	8.06	10.03	18.09	46.00	-27.91			AVG	
7	3.8780	16.71	10.05	26.76	56.00	-29.24			QP	
8	3.8780	8.57	10.05	18.62	46.00	-27.38			AVG	
9	9.0740	16.09	11.32	27.41	60.00	-32.59			QP	
10	9.0740	9.77	11.32	21.09	50.00	-28.91			AVG	
11	16.7180	28.77	13.59	42.36	60.00	-17.64			QP	
12 *	16.7180	20.19	13.59	33.78	50.00	-16.22			AVG	

*:Maximum data x:Over limit !:over margin <Reference Only

Receiver: ESPI_1 Spectrum Analyzer: ESPI

Test Result: Pass


6.3 Conducted peak output Power

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.3.1 Limit

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

6.3.2 Test setup

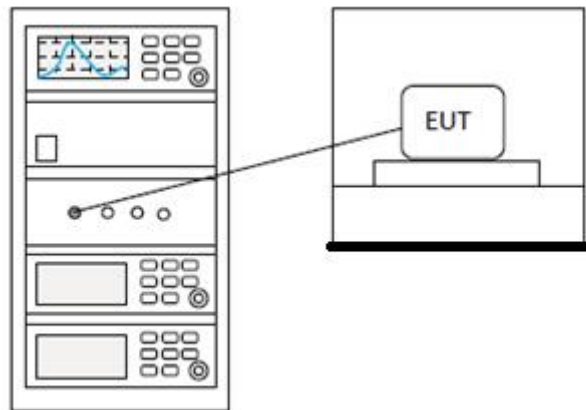


6.3.3 Test data

Pass: Please refer to appendix A for details

6.4 20dB Bandwidth

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.7
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

6.4.1 Test setup

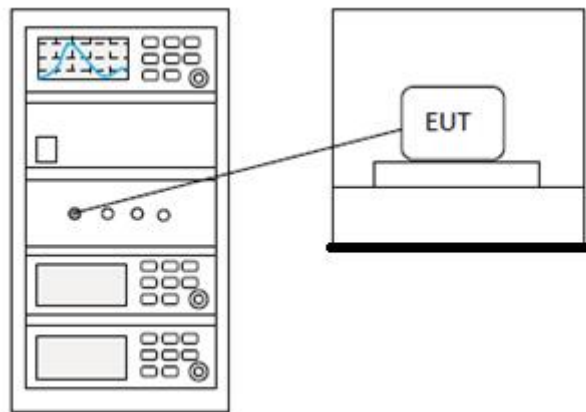

6.4.2 Test data

Pass: Please refer to appendix A for details

6.5 Conducted Band Edges Measurement

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.5.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.5.2 Test setup

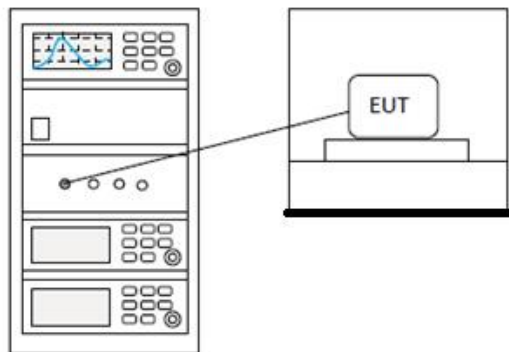

6.5.3 Test data

Pass: Please refer to appendix A for details.

6.6 Conducted spurious emissions

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.6.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.6.2 Test setup

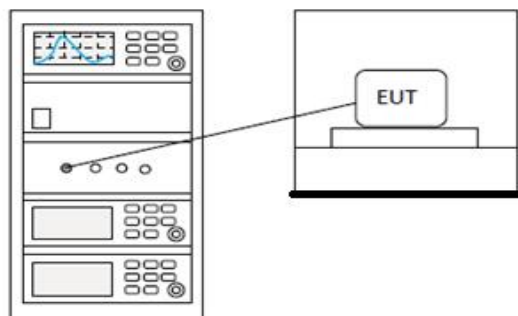

6.6.3 Test data

Pass: Please refer to appendix A for details


6.7 Carrier Frequencies Separation

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.7.1 Limit

2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

6.7.2 Test setup

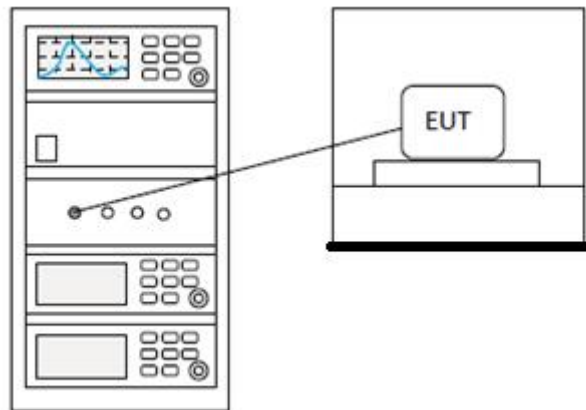

6.7.3 Test data

Pass: Please refer to appendix A for details


6.8 Hopping Channel Number

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.8.1 Limit

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

6.8.2 Test setup

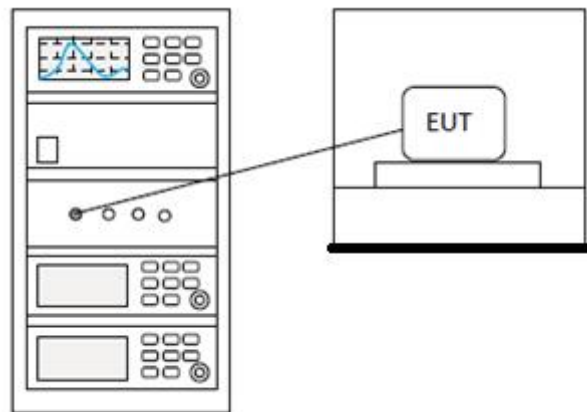

6.8.3 Test data

Pass: Please refer to appendix A for details


6.9 Dwell Time

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.9.1 Limit

Frequency(MHz)	Limit
902-928	0.4s within a 20s period(20dB bandwidth<250kHz)
	0.4s within a 10s period(20dB bandwidth≥250kHz)
2400-2483.5	0.4s within a period of 0.4s multiplied by the number of hopping channels
5725-5850	0.4s within a 30s period

6.9.2 Test setup

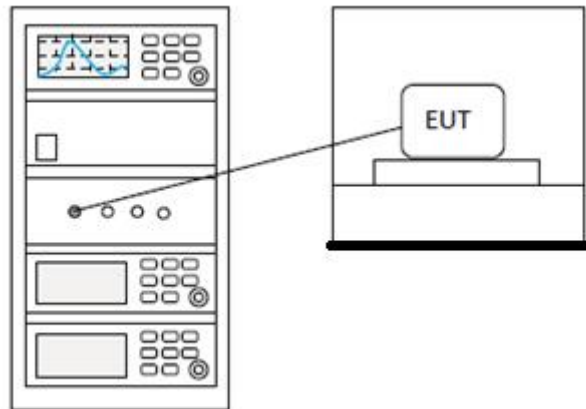

6.9.3 Test data

Pass: Please refer to appendix A for details

6.10 Radiated spurious emissions

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.10.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.10.2 Test setup


Below 1GHz:

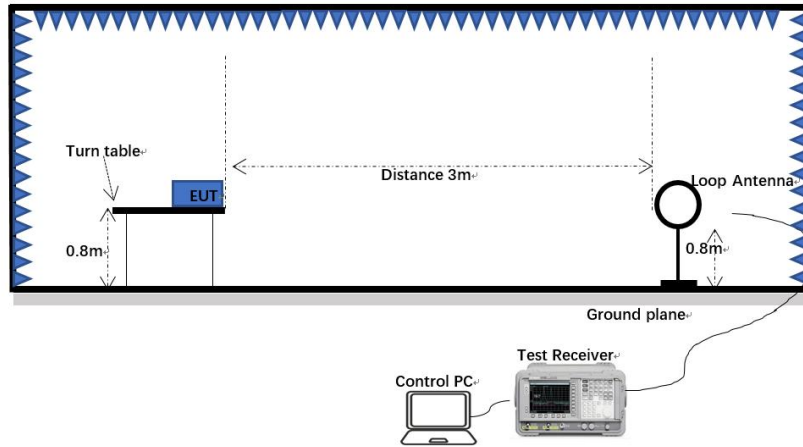

30MHz-1GHz:

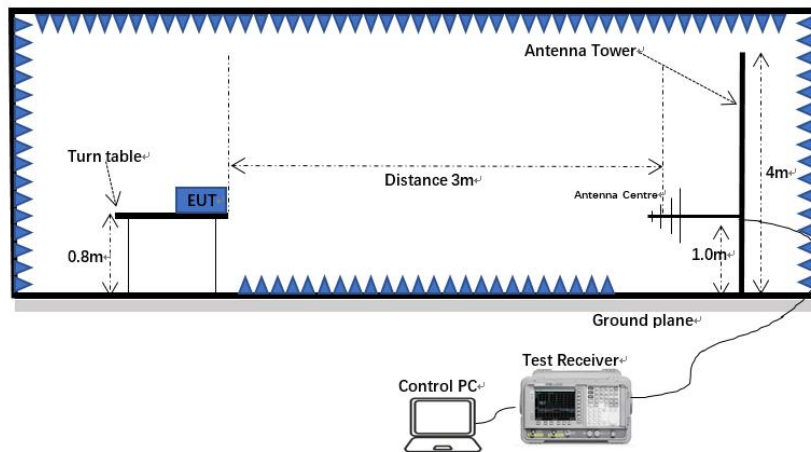

Above 1GHz:

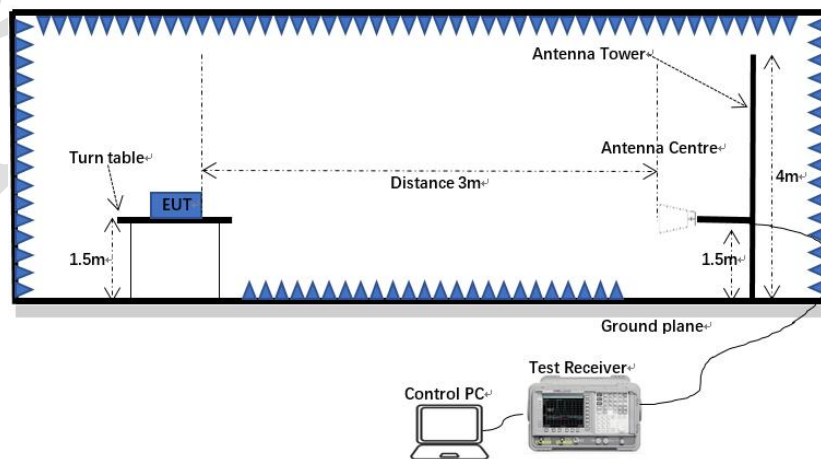

6.10.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1: Scan from 9 kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Note 3: The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


$$\text{Level (dBuV)} = \text{Reading (dBuV)} + \text{Factor (dB/m)}$$

6.10.4 Test data

Below 1GHz

[Test mode: TX]; [Polarity: Horizontal]

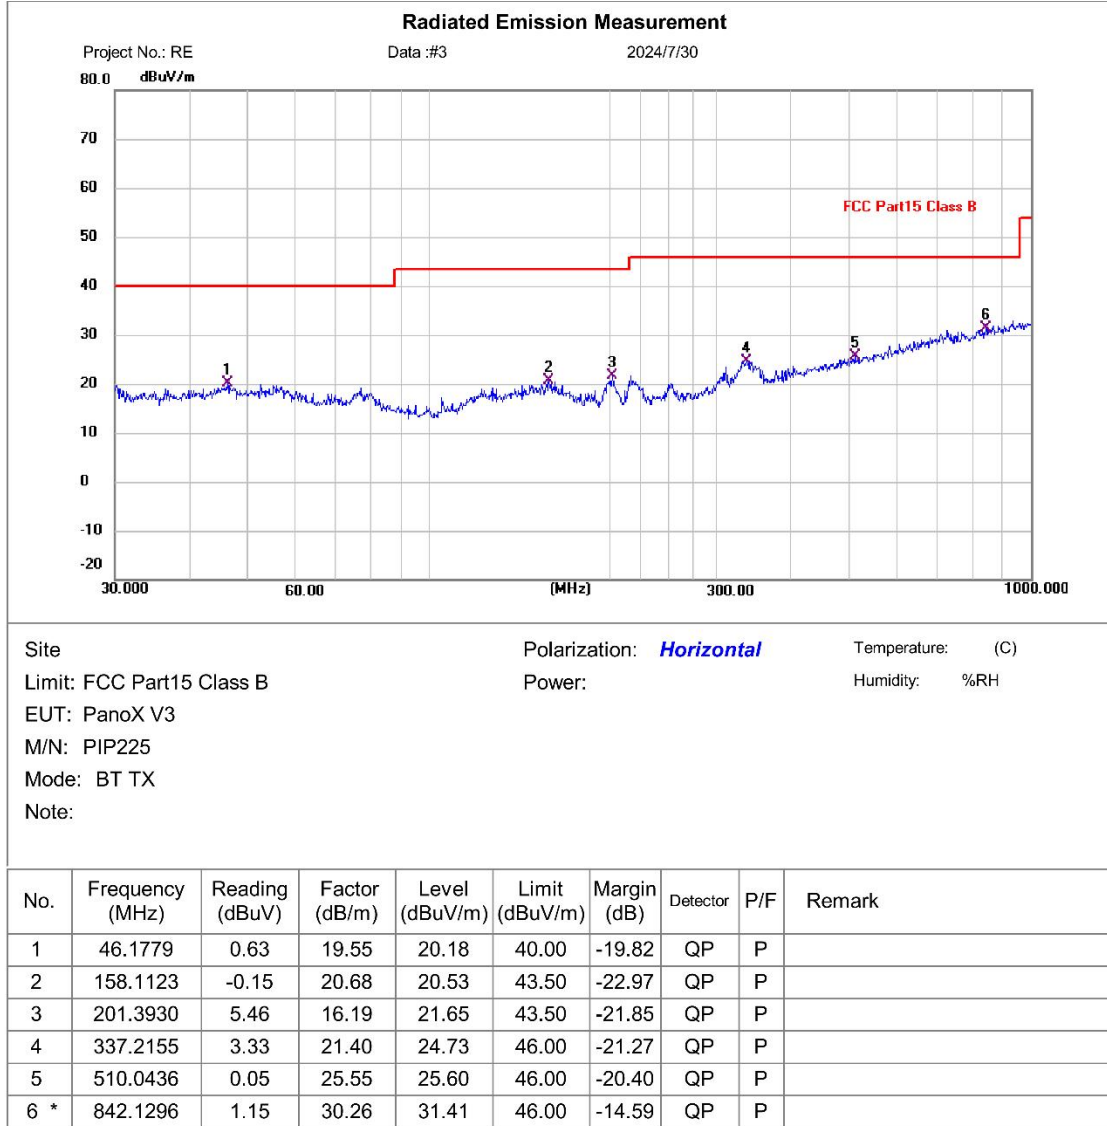

Test Result: Pass

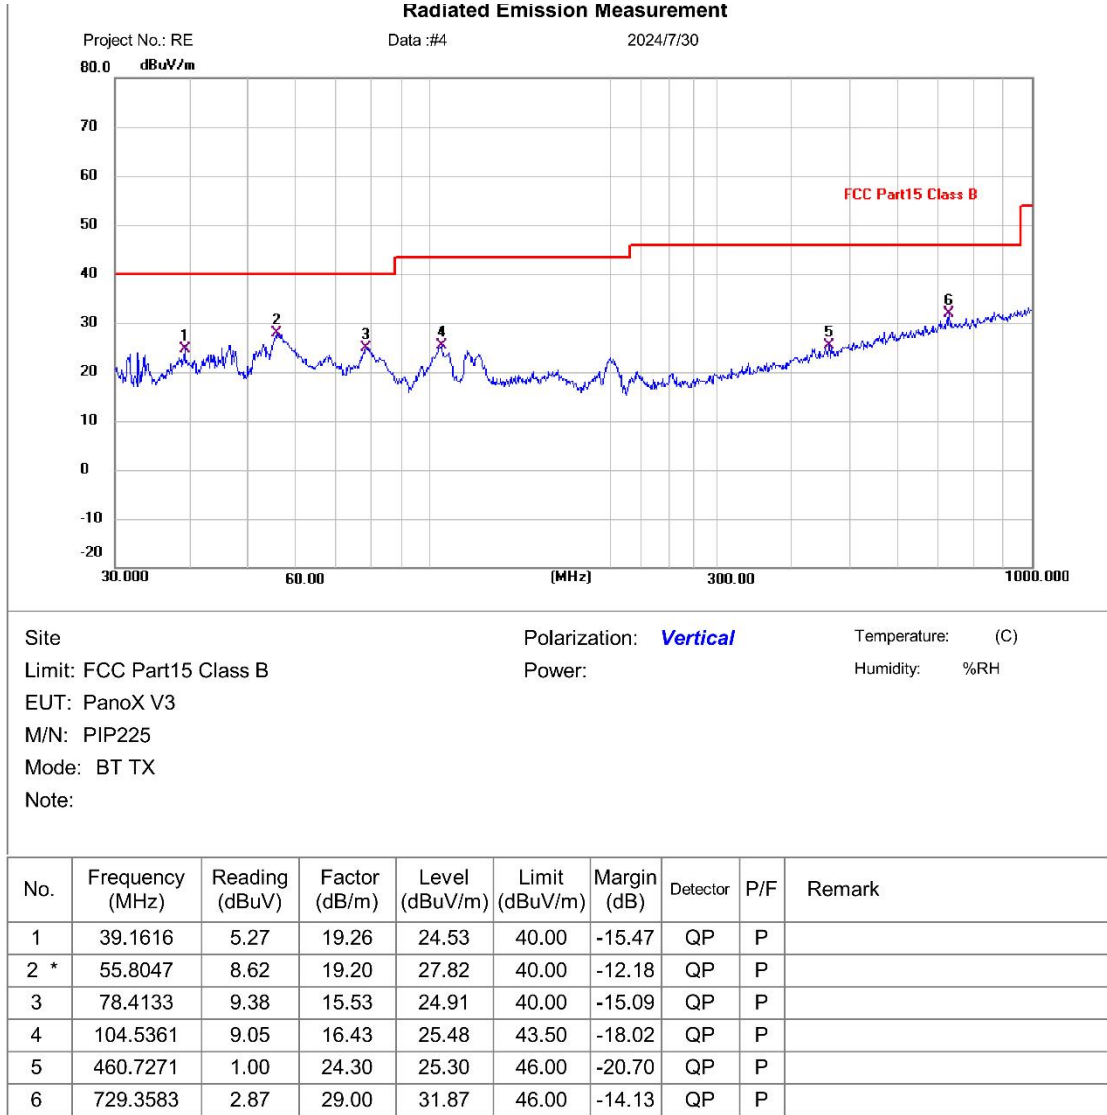[Test mode: TX]; [Polarity: Vertical]

Test Result: Pass

Above 1GHz:

Remark: During the test, pre-scan the GFSK, pi/4DQPSK, 8DPSK mode, and found the GFSK mode which it is worse case.

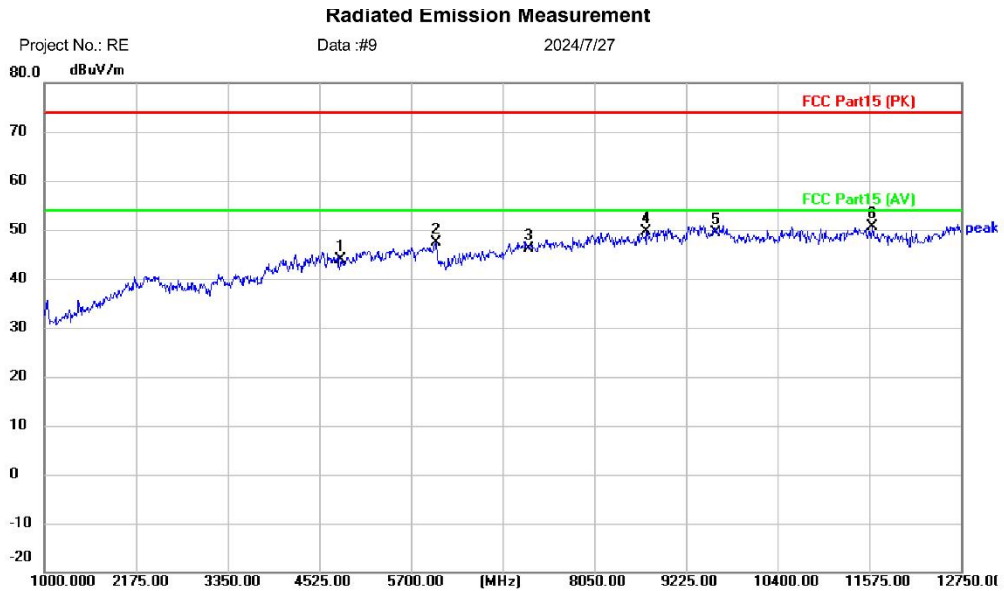[Test mode: TX low channel]; [Polarity: Horizontal]



Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: PanoX V3		
M/N: PIP225		
Mode: BT TX 2402		
Note:		

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	4804.000	37.82	6.03	43.85	74.00	-30.15	peak	
2	6017.250	41.48	5.94	47.42	74.00	-26.58	peak	
3	7206.000	36.68	9.45	46.13	74.00	-27.87	peak	
4	8719.750	37.61	12.03	49.64	74.00	-24.36	peak	
5	9608.000	36.09	13.21	49.30	74.00	-24.70	peak	
6 *	11610.25	36.99	13.67	50.66	74.00	-23.34	peak	

*:Maximum data x:Over limit !:over margin (Reference Only)

Receiver: Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX low channel]; [Polarity: Vertical]

Radiated Emission Measurement



Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: PanoX V3
 M/N: PIP225
 Mode: BT TX 2402
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.000	37.62	6.03	43.65	74.00	-30.35	peak	
2		5876.250	38.36	8.94	47.30	74.00	-26.70	peak	
3		7206.000	37.88	9.45	47.33	74.00	-26.67	peak	
4		8249.750	39.54	10.56	50.10	74.00	-23.90	peak	
5		9608.000	35.97	13.21	49.18	74.00	-24.82	peak	
6	*	11457.50	37.23	13.95	51.18	74.00	-22.82	peak	

*:Maximum data x:Over limit !:over margin (Reference Only)
 Receiver: Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX middle channel]; [Polarity: Horizontal]

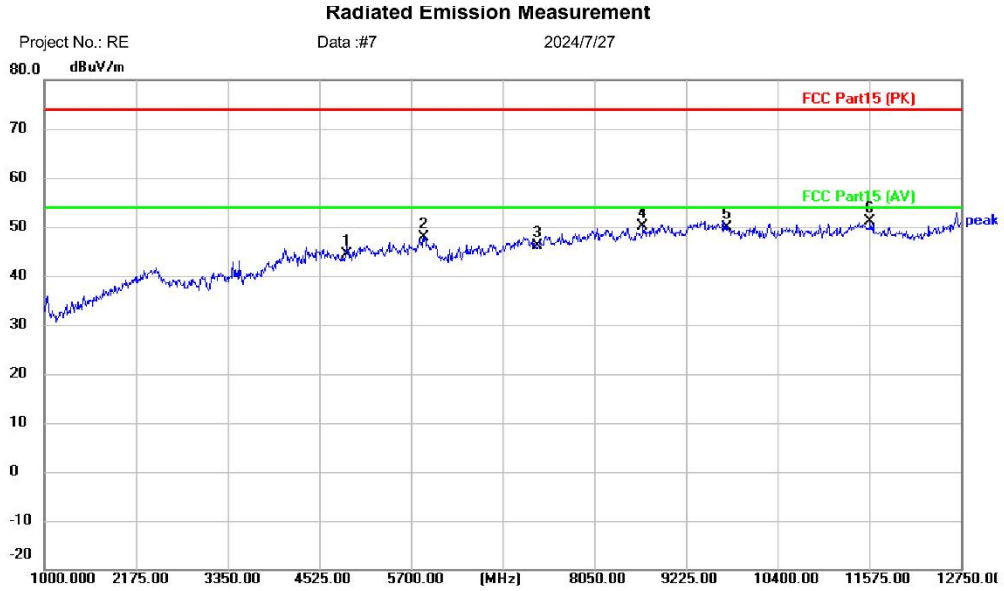


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: PanoX V3		
M/N: PIP225		
Mode: BT TX 2441		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4882.000	38.26	6.10	44.36	74.00	-29.64	peak	
2		5864.500	39.11	8.88	47.99	74.00	-26.01	peak	
3		7323.000	36.94	9.20	46.14	74.00	-27.86	peak	
4		8672.750	38.14	11.95	50.09	74.00	-23.91	peak	
5		9764.000	36.13	13.82	49.95	74.00	-24.05	peak	
6	*	11586.75	37.22	13.87	51.09	74.00	-22.91	peak	

*:Maximum data x:Over limit !:over margin (Reference Only)

Receiver: Spectrum Analyzer: FSP40

Test Result: Pass

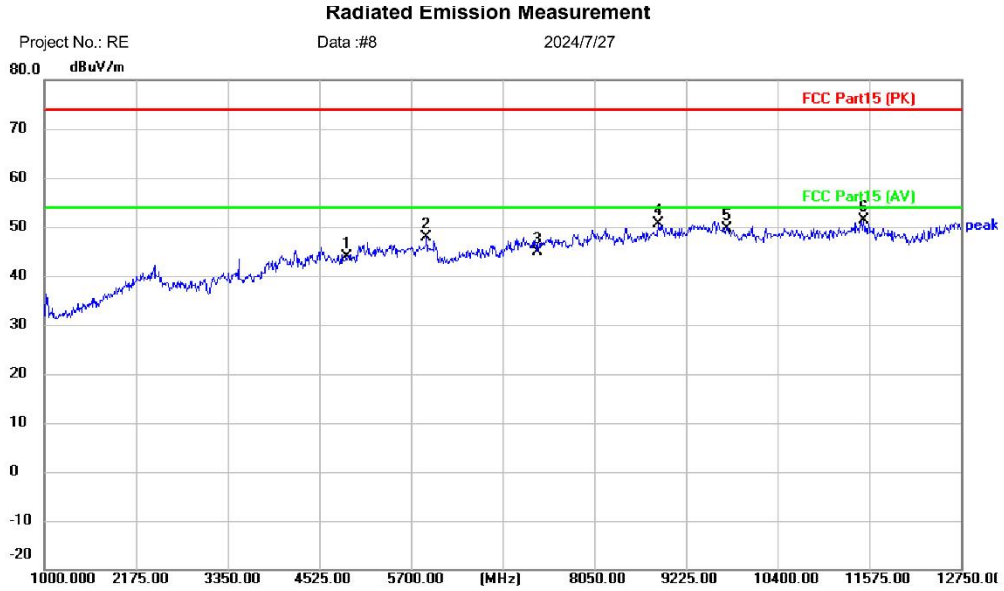[Test mode: TX middle channel]; [Polarity: Vertical]


Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: PanoX V3		
M/N: PIP225		
Mode: BT TX 2441		
Note:		


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4882.000	37.78	6.10	43.88	74.00	-30.12	peak	
2		5899.750	38.70	9.06	47.76	74.00	-26.24	peak	
3		7323.000	35.72	9.20	44.92	74.00	-29.08	peak	
4		8872.500	37.89	12.72	50.61	74.00	-23.39	peak	
5		9764.000	35.90	13.82	49.72	74.00	-24.28	peak	
6	*	11504.50	37.17	14.11	51.28	74.00	-22.72	peak	

*:Maximum data x:Over limit !:over margin (Reference Only)

Receiver: Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Horizontal]

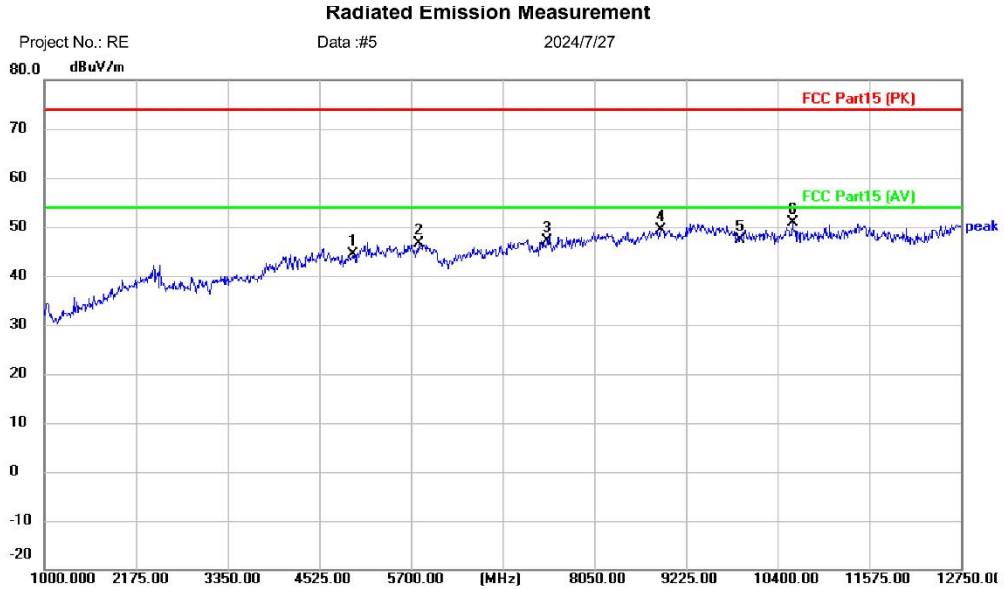

Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: PanoX V3		
M/N: PIP225		
Mode: BT TX 2480		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	37.34	7.04	44.38	74.00	-29.62	peak	
2		5794.000	37.89	8.83	46.72	74.00	-27.28	peak	
3		7440.000	37.06	10.04	47.10	74.00	-26.90	peak	
4		8896.000	36.29	13.18	49.47	74.00	-24.53	peak	
5		9920.000	34.32	13.08	47.40	74.00	-26.60	peak	
6	*	10588.00	37.16	13.67	50.83	74.00	-23.17	peak	


*:Maximum data x:Over limit !:over margin (Reference Only)

Receiver: Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Vertical]

Radiated Emission Measurement

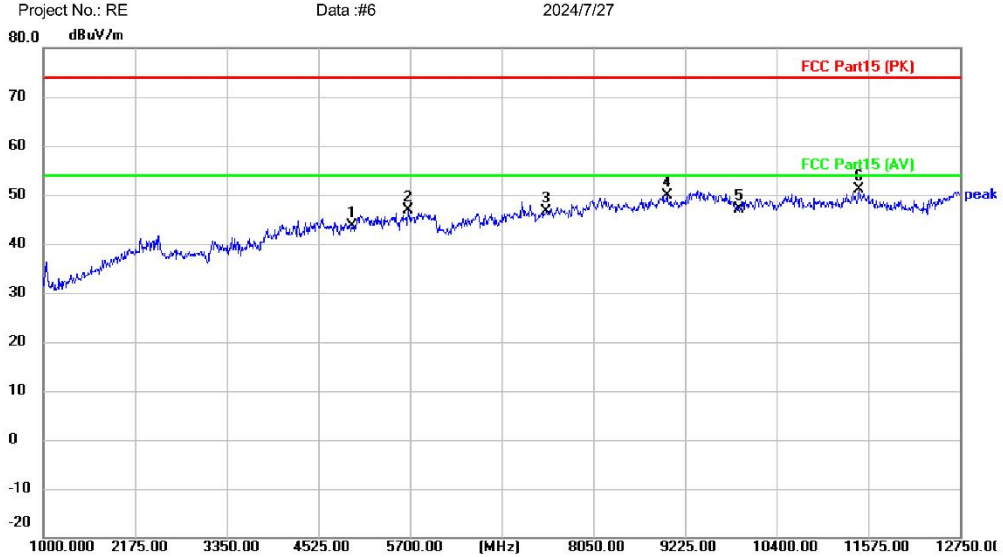

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: PanoX V3
 M/N: PIP225
 Mode: BT TX 2480
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	36.58	7.04	43.62	74.00	-30.38	peak	
2		5676.500	38.59	8.24	46.83	74.00	-27.17	peak	
3		7440.000	36.67	10.04	46.71	74.00	-27.29	peak	
4		8990.000	36.89	12.96	49.85	74.00	-24.15	peak	
5		9920.000	33.99	13.08	47.07	74.00	-26.93	peak	
6	*	11457.50	37.10	13.95	51.05	74.00	-22.95	peak	

*:Maximum data x:Over limit !:over margin (Reference Only)
 Receiver: Spectrum Analyzer: FSP40

Test Result: Pass

6.11 Radiated emissions which fall in the restricted bands

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.11.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.11.2 Test setup


Below 1GHz:

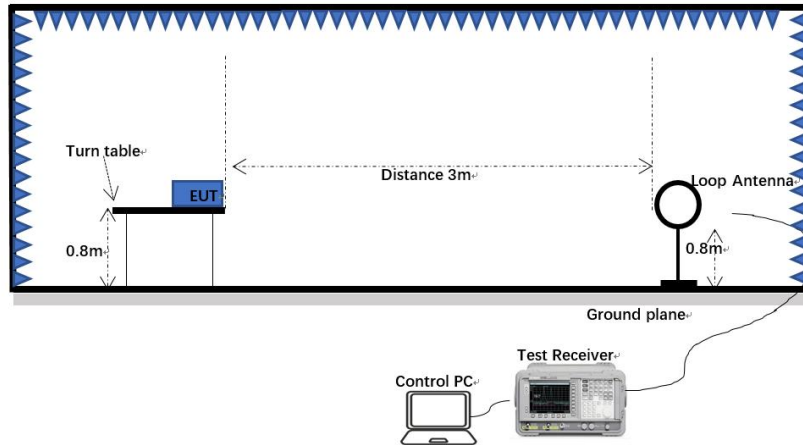

30MHz-1GHz:

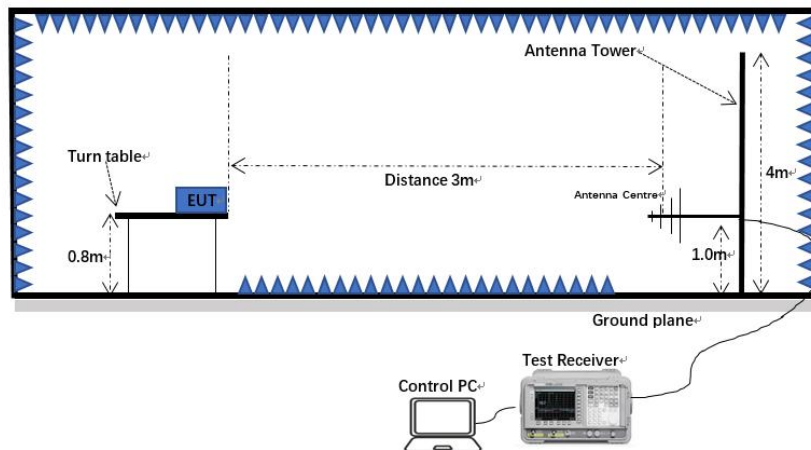

Above 1GHz:

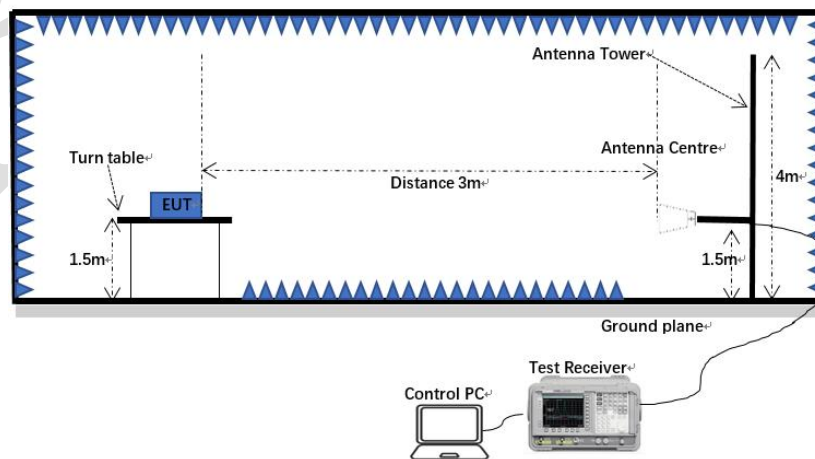

6.11.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.


Note 1: $Level (dBuV) = Reading (dBuV) + Factor (dB/m)$

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

6.11.4 Test data

Remark: During the test, pre-scan the GFSK, pi/4DQPSK, 8DPSK mode, and found the GFSK mode which it is worse case.

[Test mode: TX low channel]; [Polarity: Horizontal]

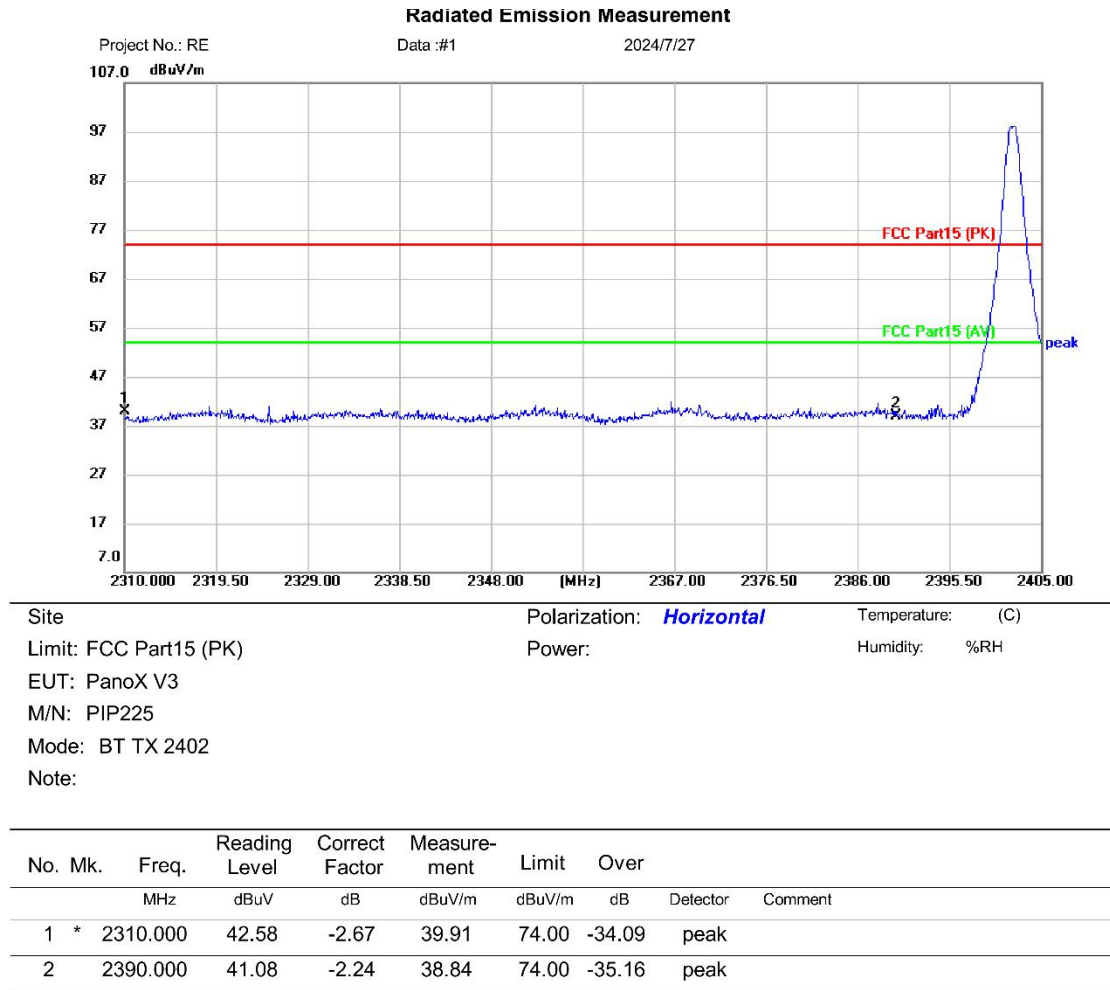

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver:

Spectrum Analyzer:

FSP40

Test Result: Pass


BlueAsia of Technical Services (Shenzhen) Co., Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

[Test mode:TX low channel]; [Polarity: Vertical]

Radiated Emission Measurement

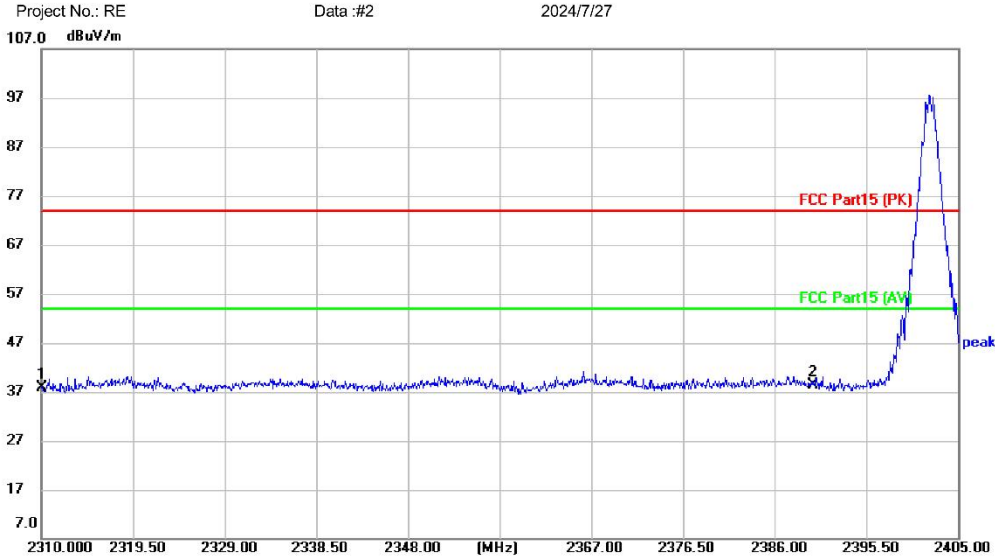

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: PanoX V3
 M/N: PIP225
 Mode: BT TX 2402
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	40.67	-2.67	38.00	74.00	-36.00	peak	
2	*	2390.000	40.64	-2.24	38.40	74.00	-35.60	peak	

*:Maximum data x:Over limit !:over margin (Reference Only)
 Receiver: Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Horizontal]

Radiated Emission Measurement

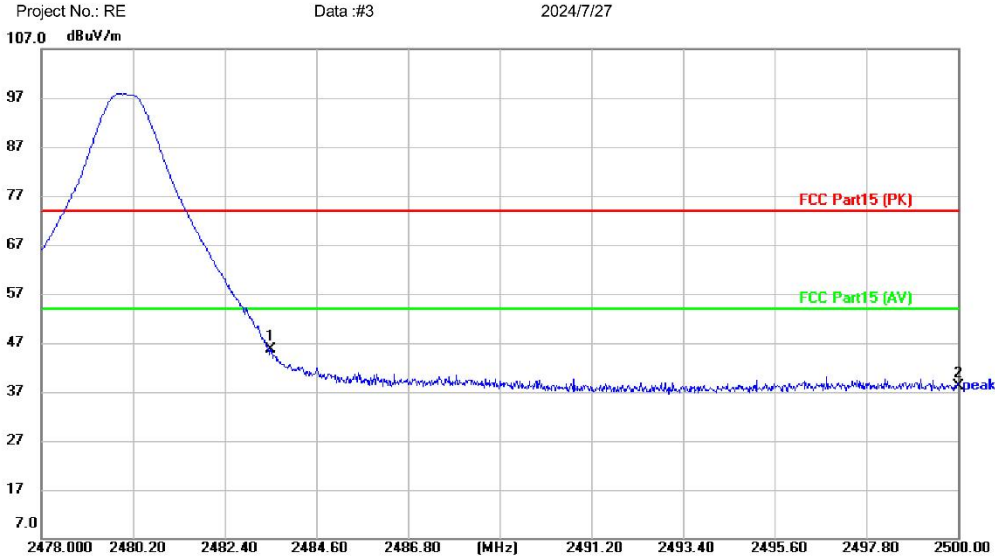

Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: PanoX V3		
M/N: PIP225		
Mode: BT TX 2480		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	48.39	-2.71	45.68	74.00	-28.32	peak	
2		2500.000	40.81	-2.80	38.01	74.00	-35.99	peak	


*:Maximum data x:Over limit !:over margin (Reference Only)

Receiver: Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode:TX High channel]; [Polarity: Vertical]

Radiated Emission Measurement

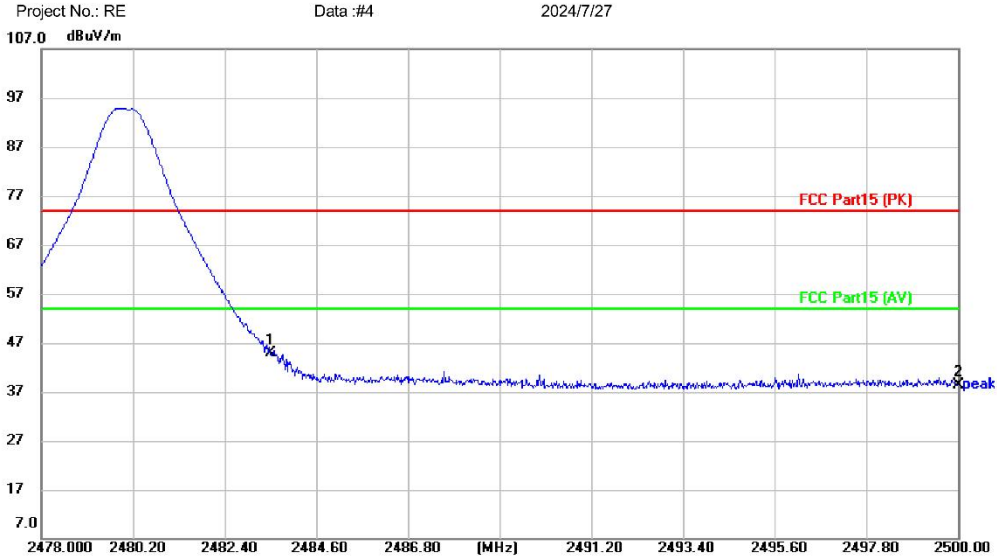

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: PanoX V3		
M/N: PIP225		
Mode: BT TX 2480		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	47.63	-2.71	44.92	74.00	-29.08	peak	
2		2500.000	41.30	-2.80	38.50	74.00	-35.50	peak	

*:Maximum data x:Over limit !:over margin (Reference Only)

Receiver: Spectrum Analyzer: FSP40


Test Result: Pass

7 Appendix A


7.1 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	0.307	21	Pass
NVNT	1-DH1	2441	Ant1	-3.031	21	Pass
NVNT	1-DH1	2480	Ant1	-0.041	21	Pass
NVNT	2-DH1	2402	Ant1	-0.641	21	Pass
NVNT	2-DH1	2441	Ant1	-4.248	21	Pass
NVNT	2-DH1	2480	Ant1	-1.06	21	Pass
NVNT	3-DH1	2402	Ant1	-0.274	21	Pass
NVNT	3-DH1	2441	Ant1	-3.972	21	Pass
NVNT	3-DH1	2480	Ant1	-0.538	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

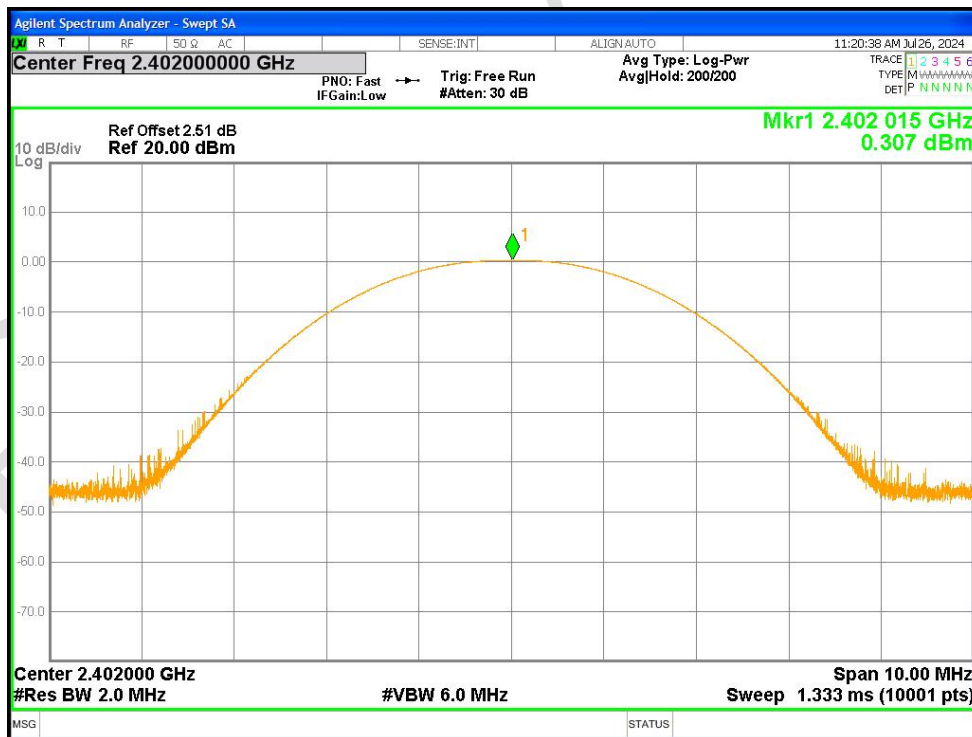


Power NVNT 1-DH1 2441MHz Ant1

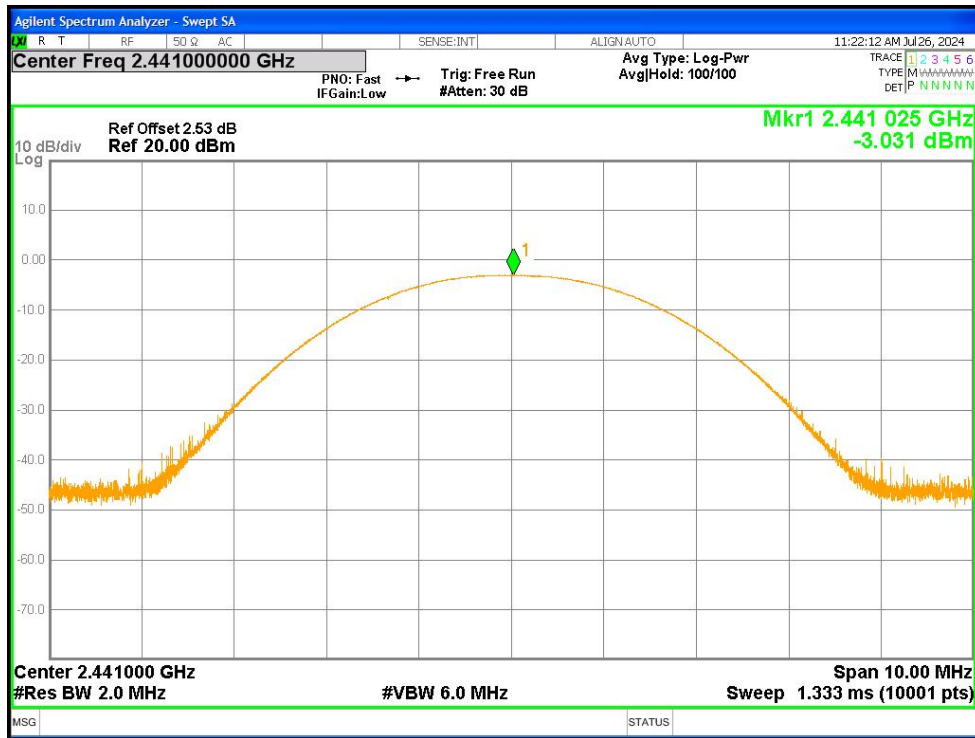


Power NVNT 1-DH1 2480MHz Ant1

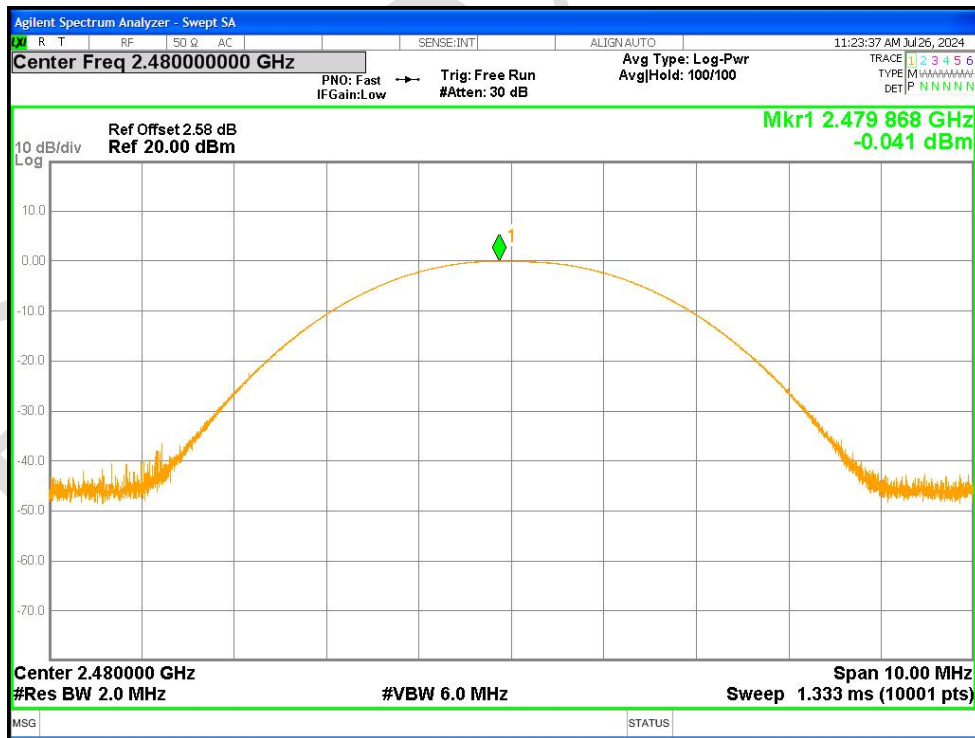


Power NVNT 2-DH1 2402MHz Ant1

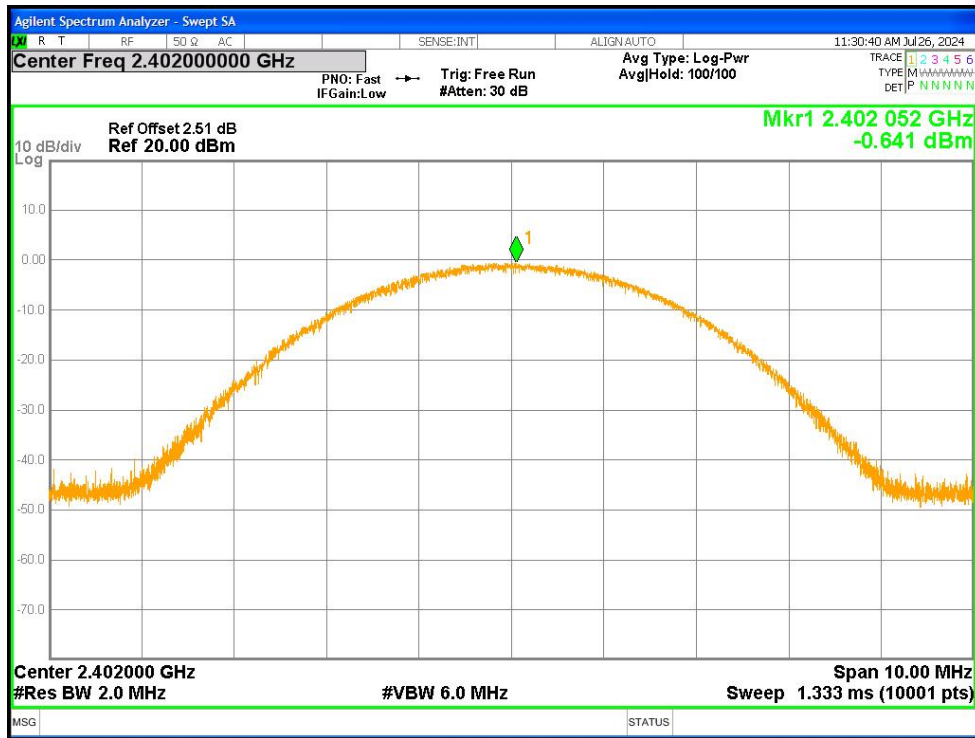


Power NVNT 2-DH1 2441MHz Ant1

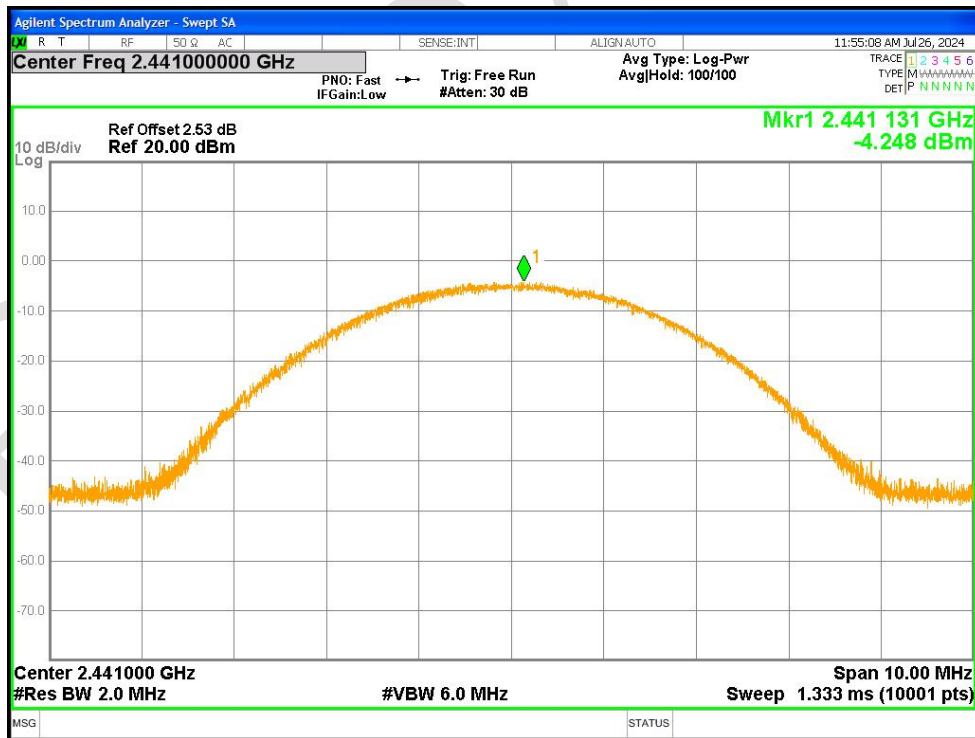


Power NVNT 2-DH1 2480MHz Ant1

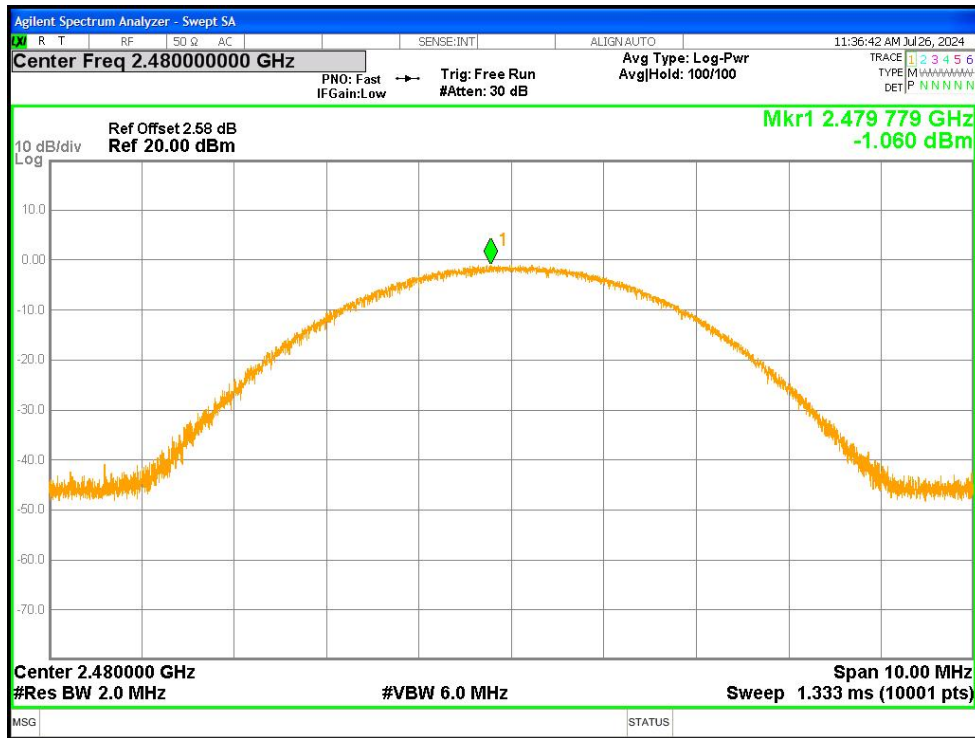


Power NVNT 3-DH1 2402MHz Ant1

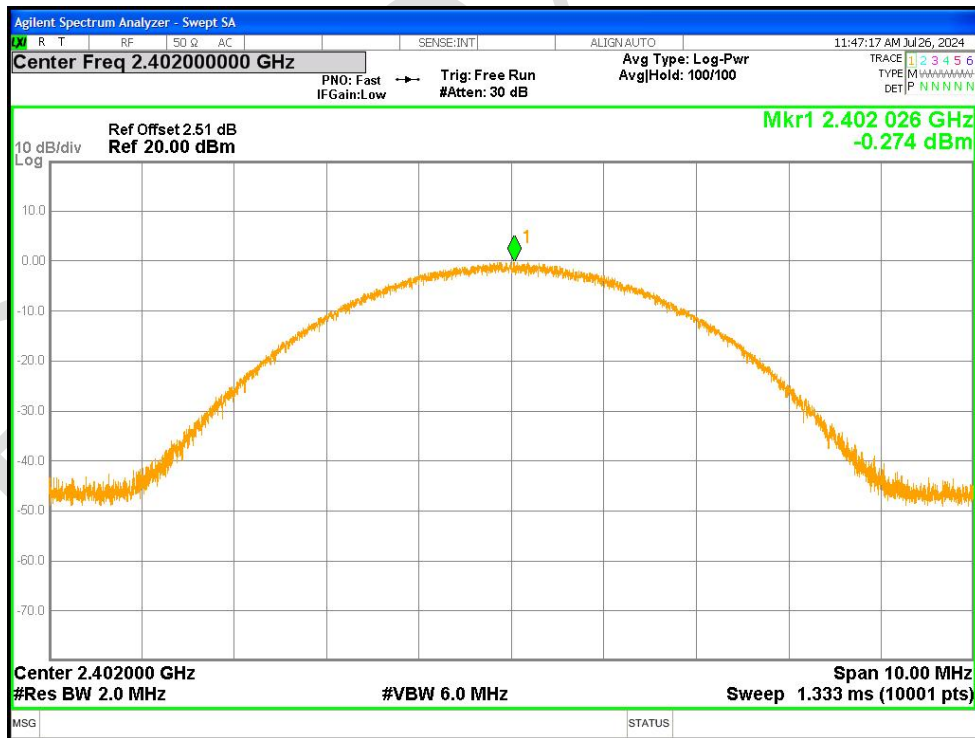

Power NVNT 3-DH1 2441MHz Ant1

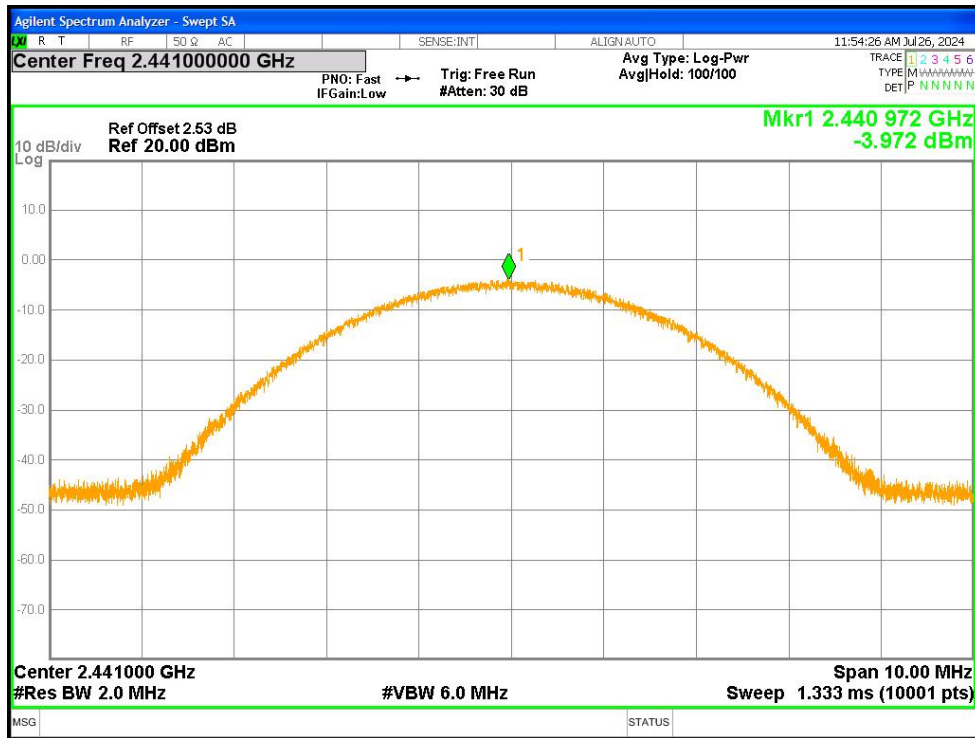


Power NVNT 3-DH1 2480MHz Ant1

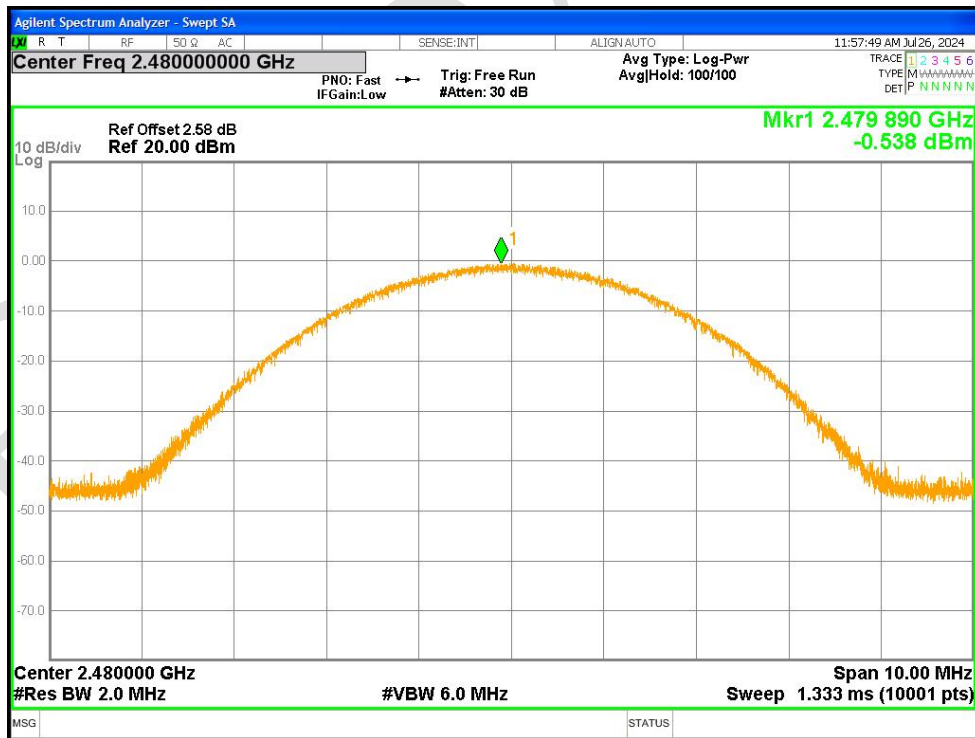


7.2-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	0.857	N/A	Pass
NVNT	1-DH1	2441	Ant1	0.867	N/A	Pass
NVNT	1-DH1	2480	Ant1	0.868	N/A	Pass
NVNT	2-DH1	2402	Ant1	1.257	N/A	Pass
NVNT	2-DH1	2441	Ant1	1.263	N/A	Pass
NVNT	2-DH1	2480	Ant1	1.26	N/A	Pass
NVNT	3-DH1	2402	Ant1	1.241	N/A	Pass
NVNT	3-DH1	2441	Ant1	1.24	N/A	Pass
NVNT	3-DH1	2480	Ant1	1.248	N/A	Pass


-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

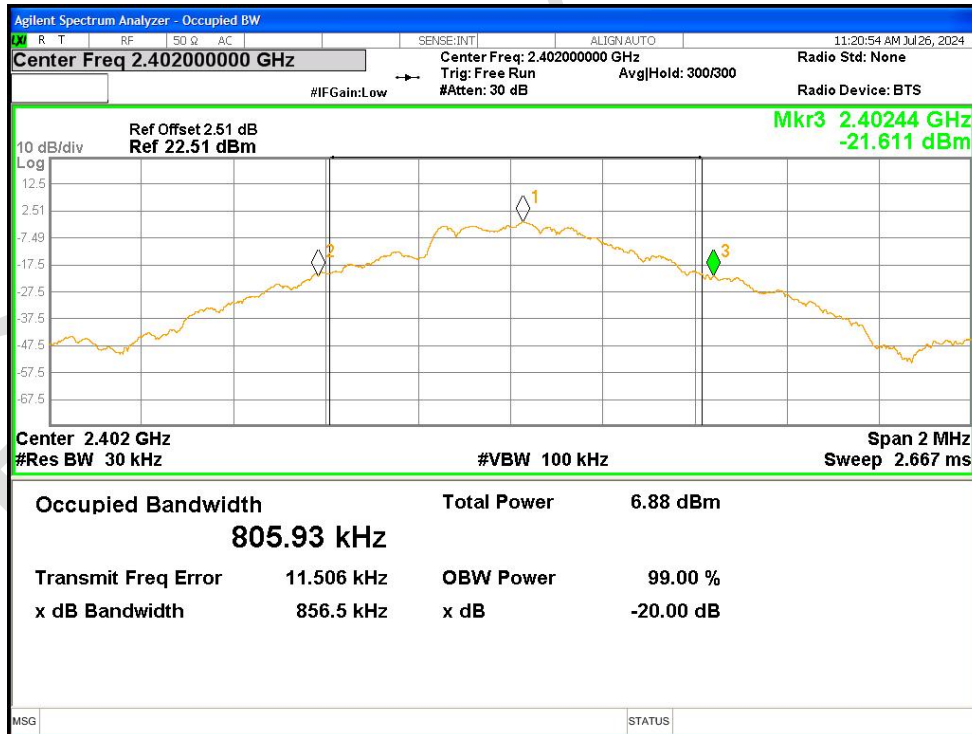


-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

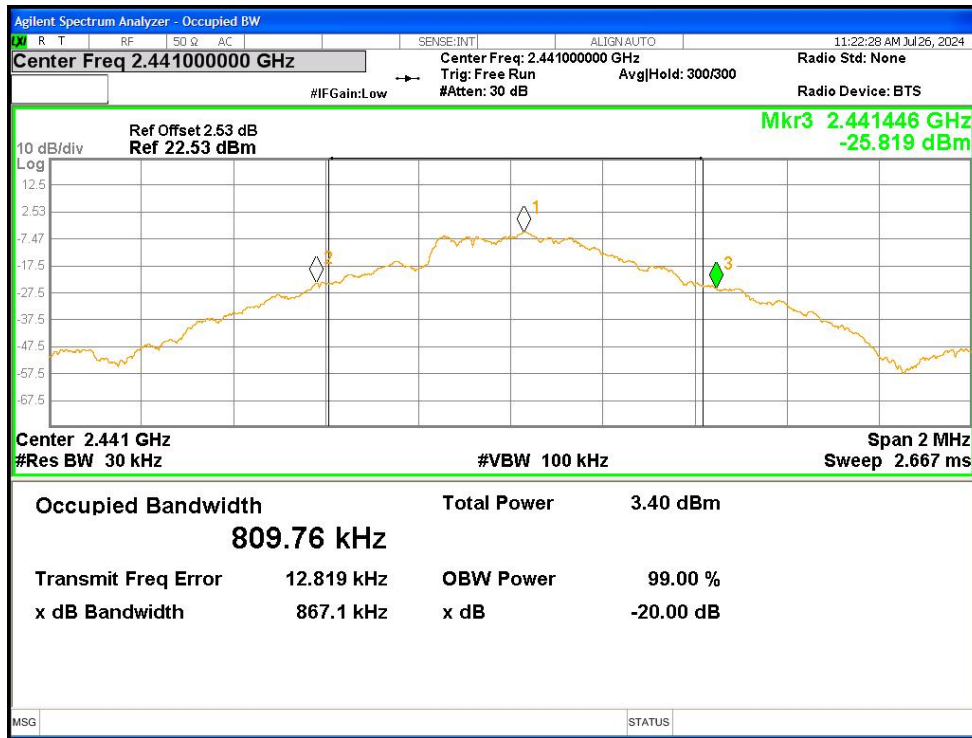


-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

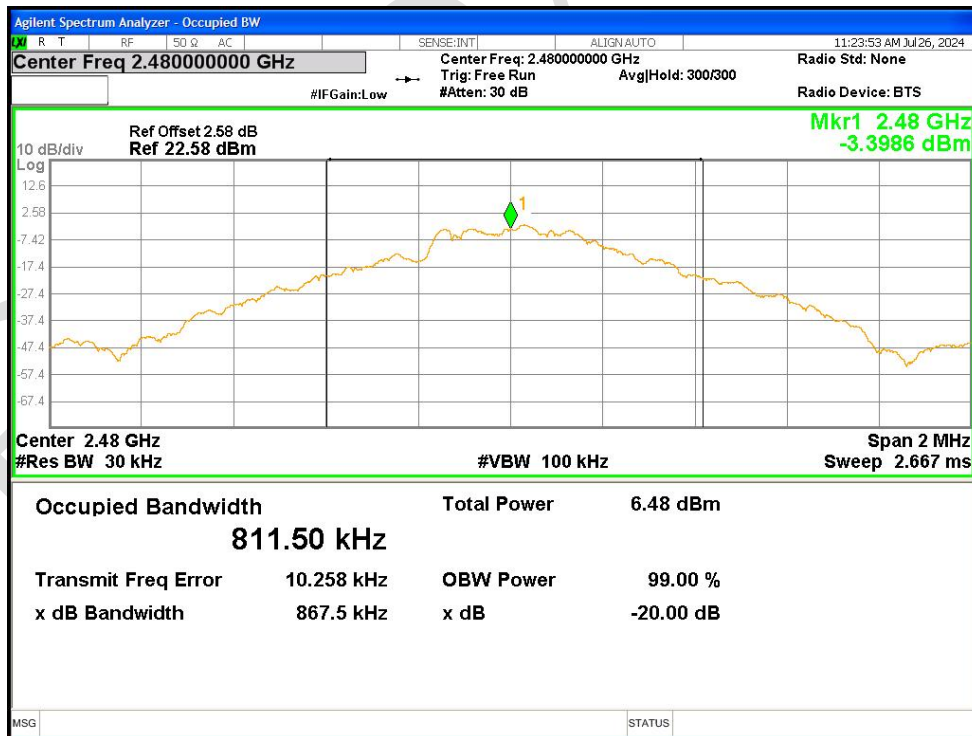


-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

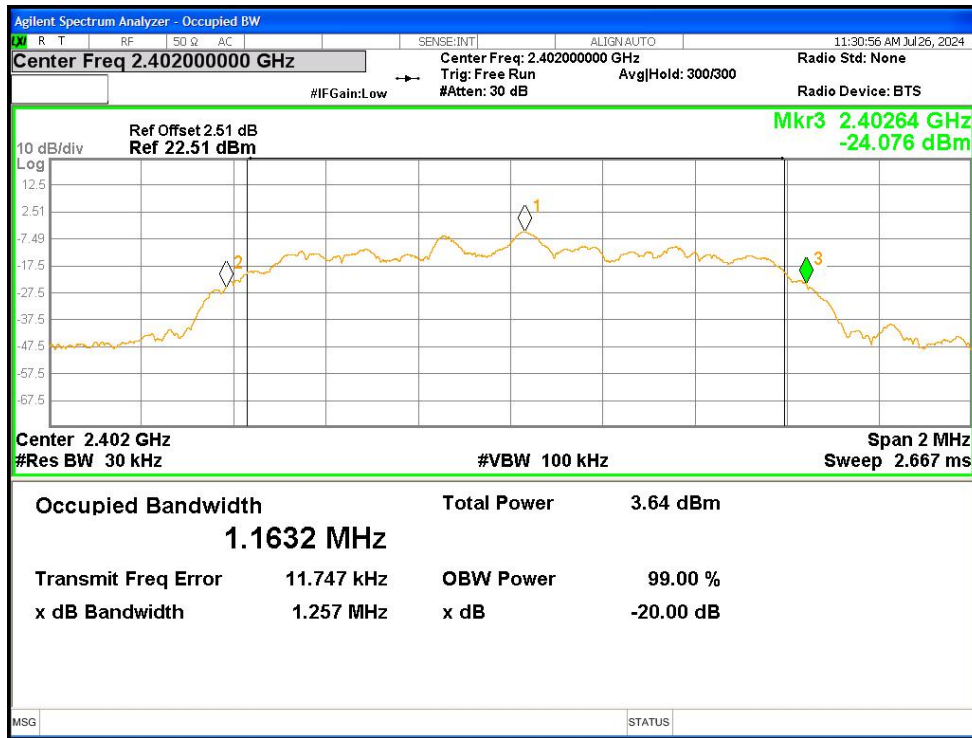


-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

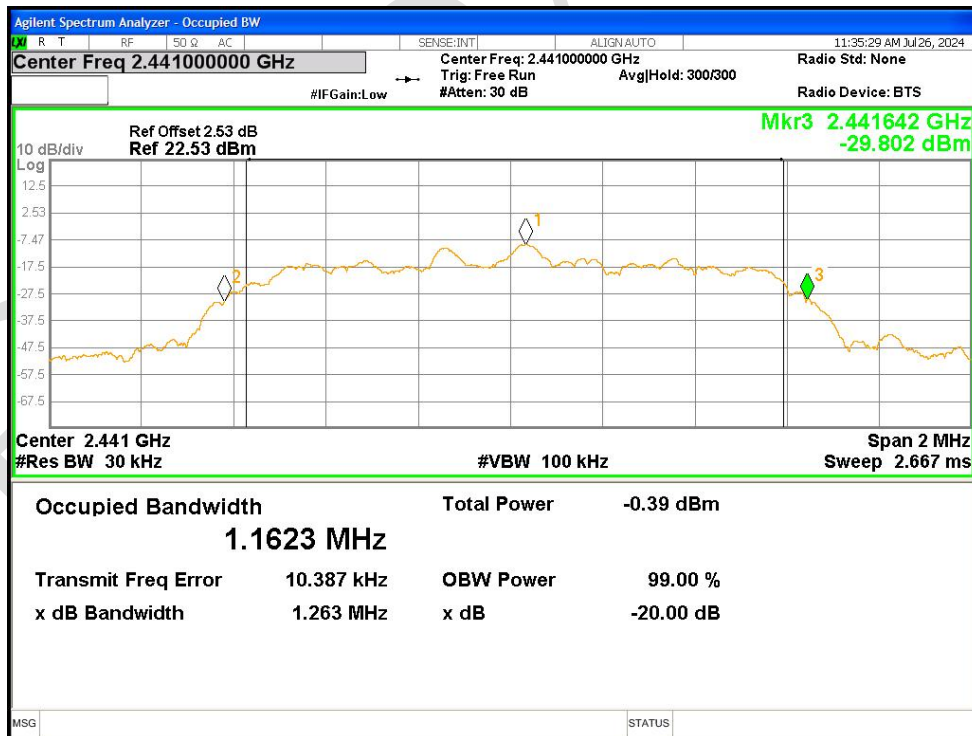


-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

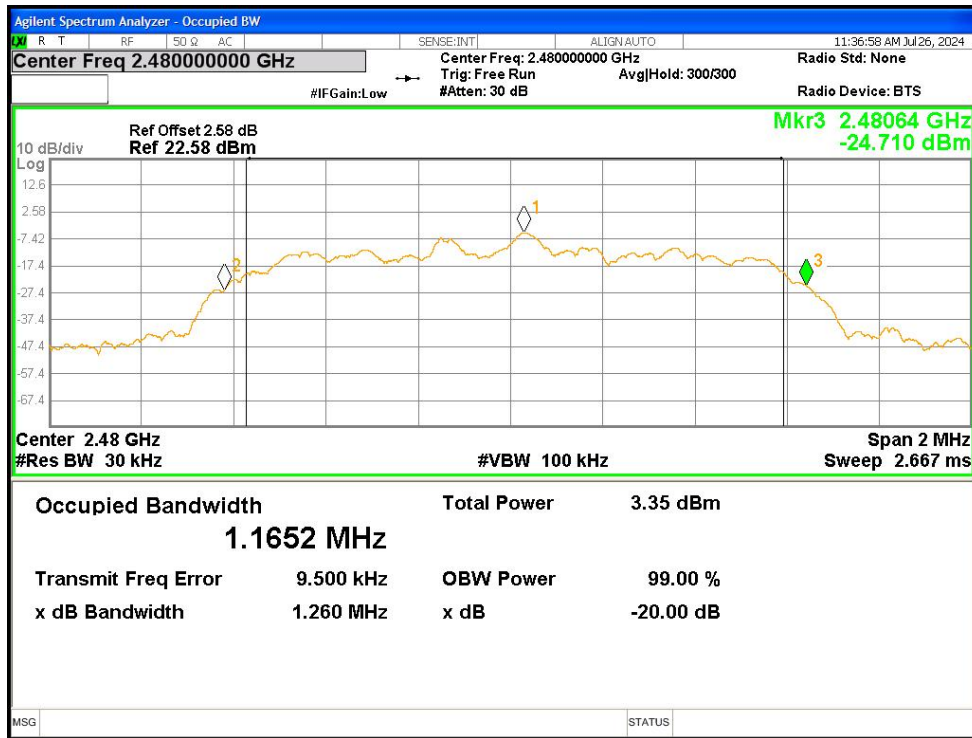


-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

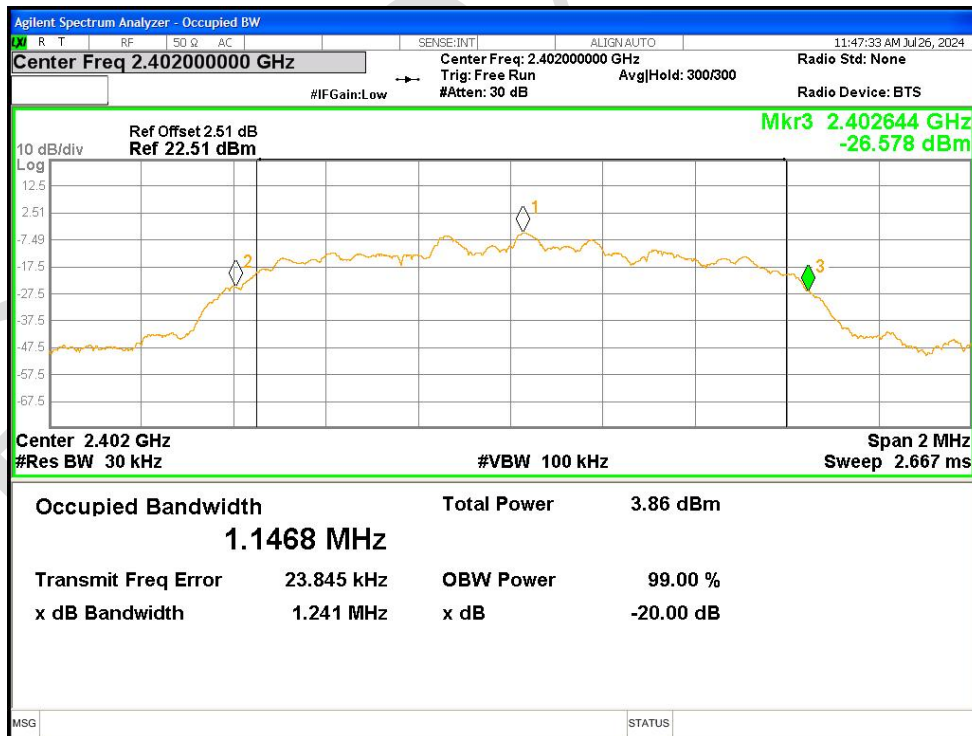

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

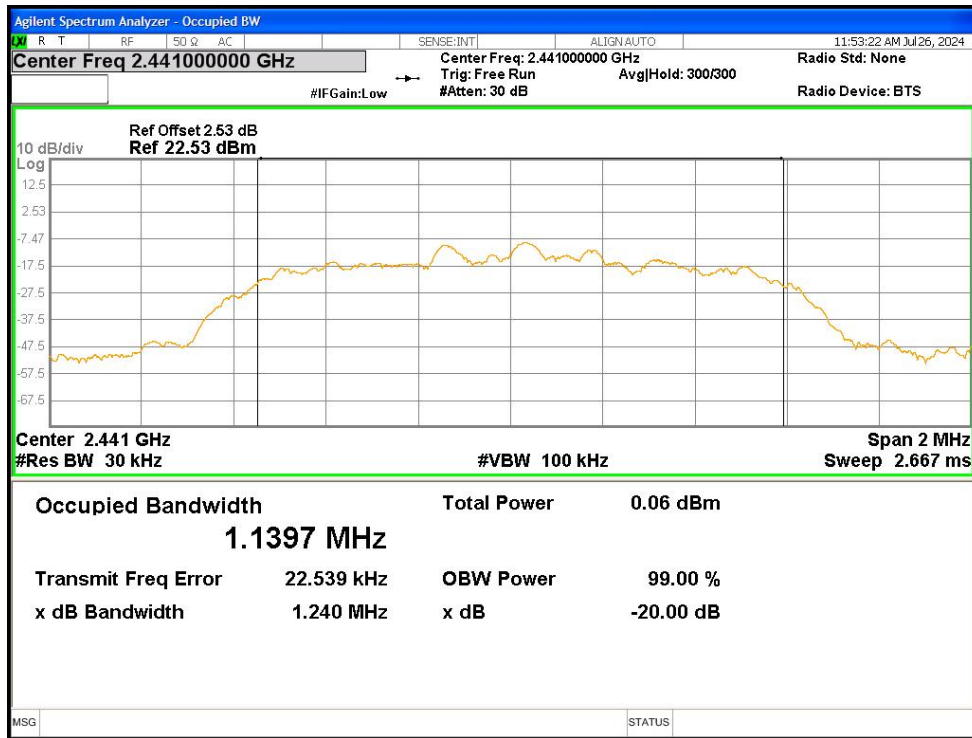


-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

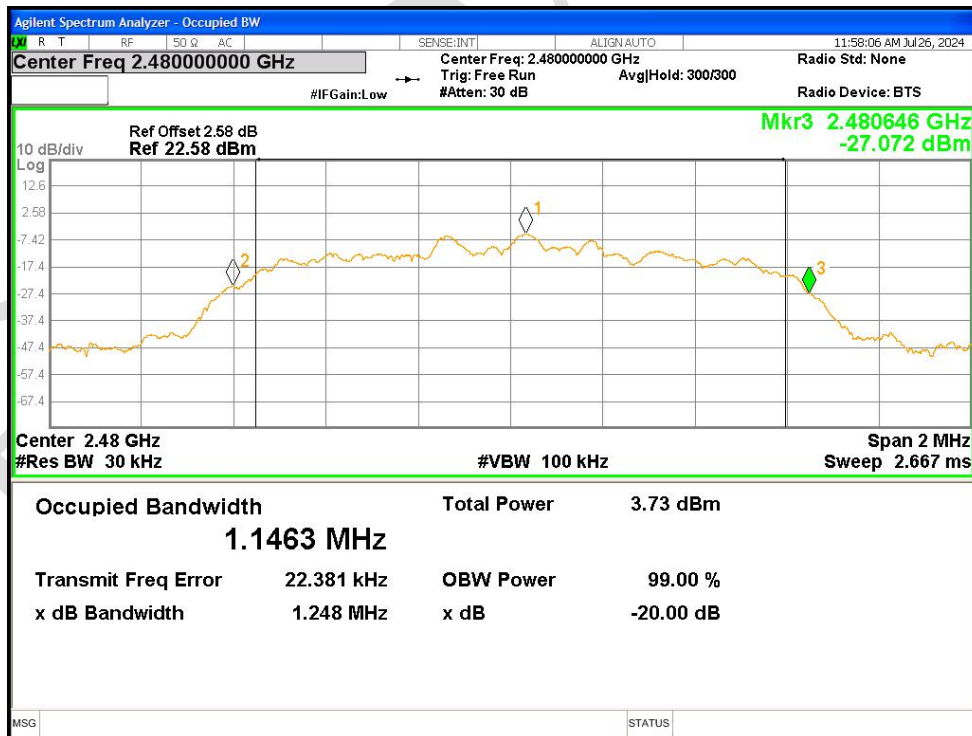


7.3 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.80761
NVNT	1-DH1	2441	Ant1	0.80612
NVNT	1-DH1	2480	Ant1	0.80987
NVNT	2-DH1	2402	Ant1	1.1666
NVNT	2-DH1	2441	Ant1	1.1667
NVNT	2-DH1	2480	Ant1	1.1672
NVNT	3-DH1	2402	Ant1	1.1464
NVNT	3-DH1	2441	Ant1	1.1462
NVNT	3-DH1	2480	Ant1	1.1489


OBW NVNT 1-DH1 2402MHz Ant1

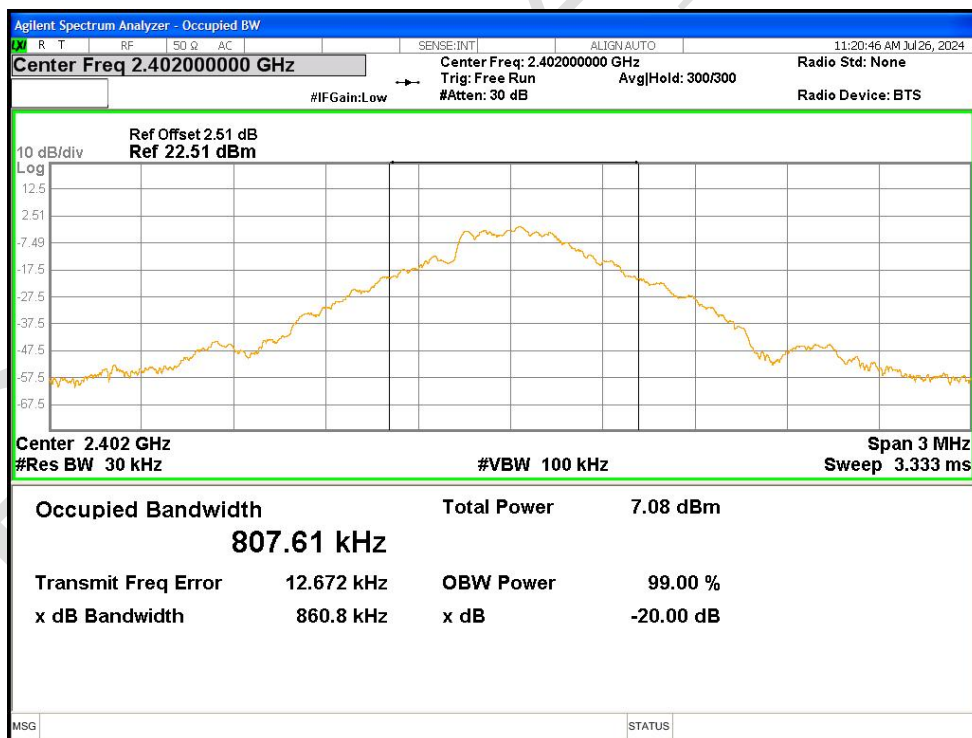

OBW NVNT 1-DH1 2441MHz Ant1

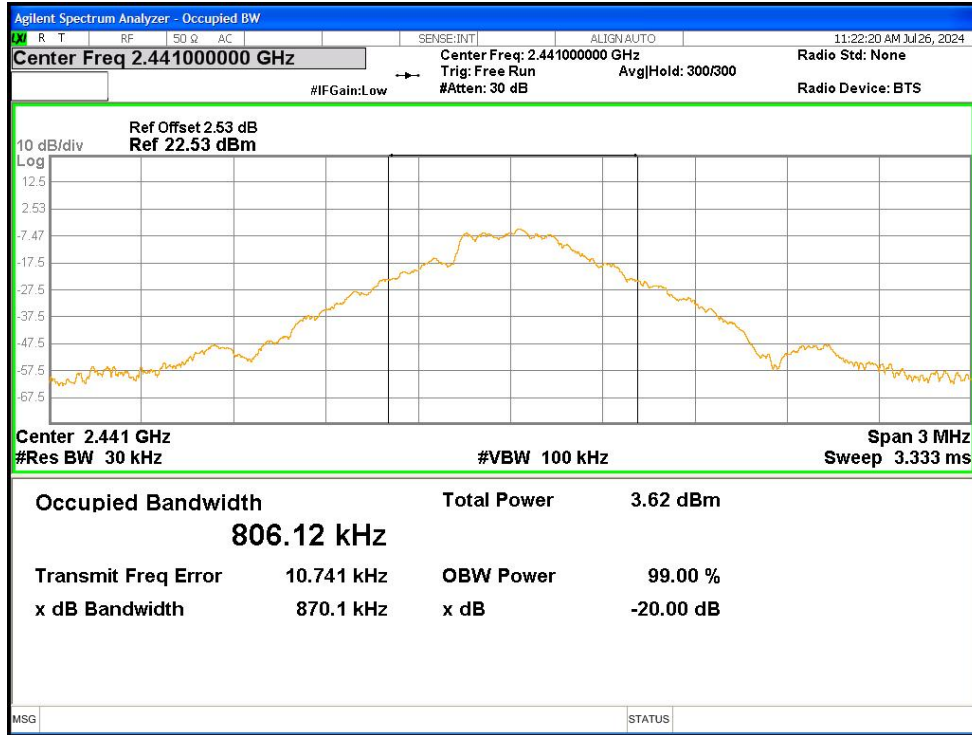

OBW NVNT 1-DH1 2480MHz Ant1

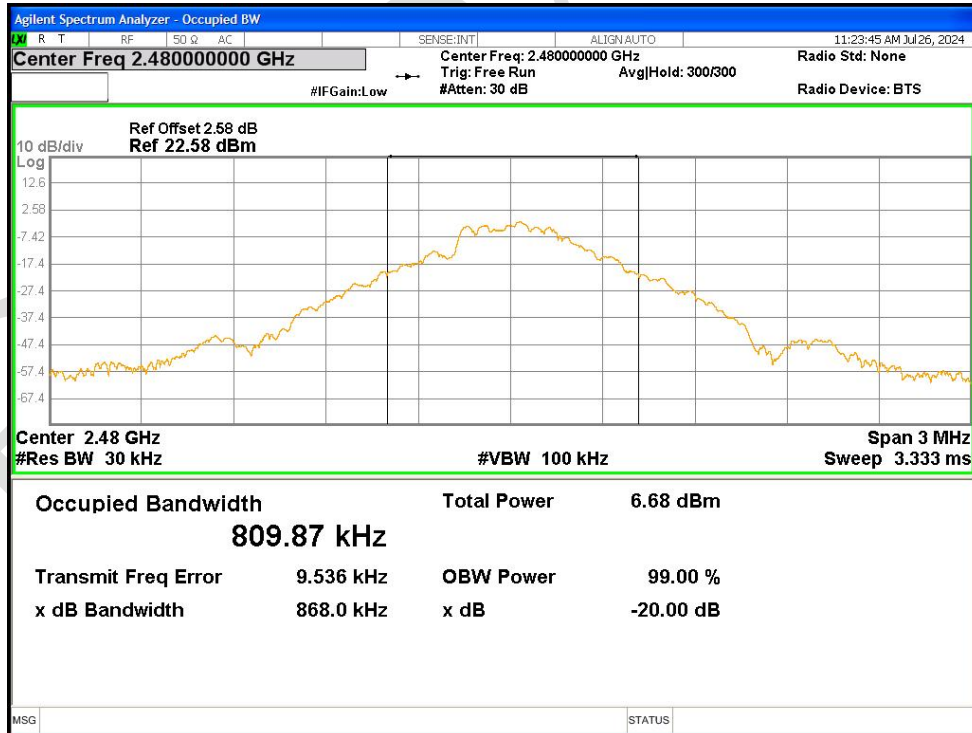

OBW NVNT 2-DH1 2402MHz Ant1