




**LCIE SUD EST**  
Laboratoire de Moirans  
Z.I. Centr'Alp  
170, Rue de Chatagnon  
38430 MOIRANS - FRANCE

## PRODUCT LABELING

FCCID: 2AS3B-TRIKLORAME

Emplacement on product: \_\_\_\_\_ Photo provided

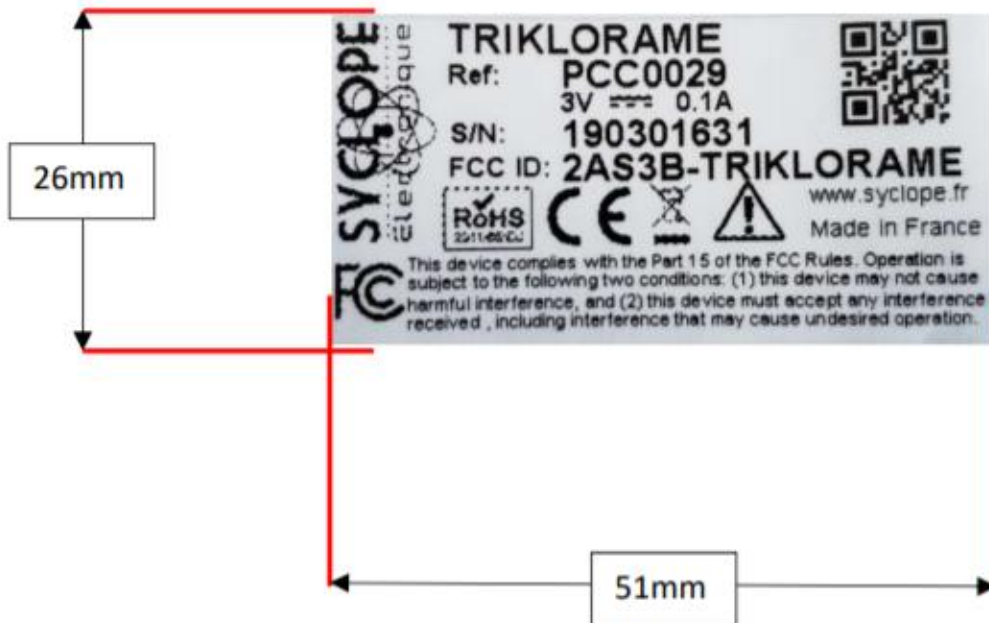

Type of support :

Label is glued



**LCIE SUD EST**  
Laboratoire de Moirans  
Z.I. Centr'Alp  
170, Rue de Chatagnon  
38430 MOIRANS - FRANCE



## Technical Data Sheet

### BRADY R7950 (=RGR) THERMAL TRANSFER RIBBON

TDS No. R7950  
Effective Date: 03/20/2019

**Description:**

Brady R7950 (=RGR) ribbon is based on a wax/resin formulation that gives a high performance image when used with Brady label materials. R7950 ribbon, when printed on the appropriate Brady label, gives a good smear and excellent chemical and environmental resistance. This ribbon is recommended for printing on paper and films that have a matte or rough surface. Please refer to the appropriate product Technical Data Sheet for specific ribbon and label performance characteristics.

Brady's R7950 ribbon is UL recognized and/or CSA accepted on various labelstocks. Refer to UL file MH 17154 & MH 17388 and CSA Acceptance Record LS 28736 & 41833 for specific Brady material and ribbon approvals. UL information can be accessed online at [UL.com](http://UL.com). Search in *certification area*. CSA information can be accessed online at [directories.csa-international.org](http://directories.csa-international.org)

This ribbon is available in various widths, core diameters 12.5 mm & 25 mm, inside & outside wound.

**Regulatory Approvals:**

For information on the Weee-RoHS compliance status for a Brady Product go to one of the following websites:

In Canada: [www.bradycanada.ca/weee-rohs](http://www.bradycanada.ca/weee-rohs)

In Europe: [www.bradyeurope.com/rohs](http://www.bradyeurope.com/rohs)

In Japan: [www.brady.co.jp/products/labelsuse/rohs](http://www.brady.co.jp/products/labelsuse/rohs)

All other regions: [www.bradyid.com/weee-rohs](http://www.bradyid.com/weee-rohs)

**Details:**

Type:	Wax/Resin
Ink Color:	Black
Base Film:	Polyester
Base Film Thickness:	4.5 micron ( $\pm 0.4 \mu\text{m}$ )
Ink Melting Temperature:	70° – 90°C
Usage Condition:	5° - 35°C, 30 – 80% Relative Humidity

Exposure to extreme high temperature, high humidity and direct sunlight should be avoided.

**Shelf Life:**

Shelf life is two years from the date of receipt for this product as long as this product is stored in its original packaging in an environment below 80° F (27° C) and 60% RH. It remains the responsibility of the user to assess the risk of using this product. We encourage customers to develop testing protocols that will qualify a product's fitness for use in their actual application.