


Product Label Content Requirements

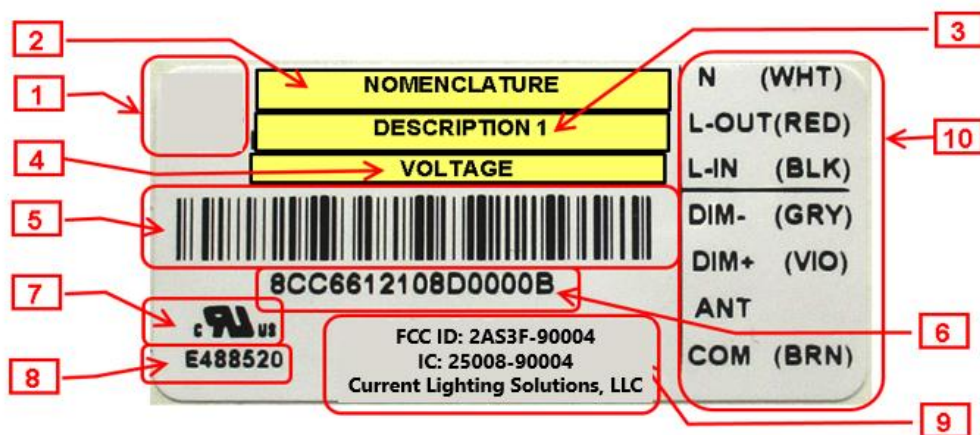

Label Contents:

1. Leave blank
2. Nomenclature: for value, see Level0 BOM
3. Description 1: for value, see Level0 BOM
Note: Description 1 indicates HVIN ("LIGHTGRID INTERNAL NODE")
4. Voltage: for value, see Level0 BOM
5. Barcode of MAC address: Code 128 format, max. density 27.3 char/in., min. height 4mm, min. clearance from left & right: 2mm
6. MAC address of node in plain text (MAC address information is specific to each node)
7. UL registered logo, C US
8. UL file number
9. FCC & IC updated IDs and "Current Lighting Solutions, LLC"
10. Wiring information

Product & Compliance Label:

- Label max size: 28 x 70mm [1-1/8" x 2-3/4"]
- Label min. size: 19 x 38mm [3/4" x 1-1/2"]
- Type: polyester thermal transfer label, suitable for outdoor use
- Adhesive type: permanent acrylic adhesive.
- Label thickness: max. 0.1mm
- Examples of MPN:
 - Zebra Z-Ultimate 4000T White, 2"x1"
 - Brady THT-17-423-...
- Printer resolution: 600 dpi.

Product Label Location Requirements

Location of label when affixed to node: top of housing,
inside the rectangular frame (see at right) >>>>>

