

FCC/ISED DTS RF TEST REPORT



Test Report Number.....	SUB-19042301-LC-15C-MOD
Applicant.....	Subeca, Inc.
Applicant Address.....	6769 Hollister Ave, Goleta, CA 93117
Product Name.....	LoRA module
Model Number.....	MOD01
Family Product/Model.....	N/A
FCC ID.....	2AS4H-MOD01
ISED ID.....	25019-MOD01
Host Product	HydraLink
Host Product Model.....	HL-01
Date of EUT received.....	06/13/2019
Date of Test.....	06/13/2019
Report Issue Date.....	06/21/2019
Test Standards.....	47CFR Part 15.247 RSS-247 Issue 2.0: Feb 2017 RSS-Gen Issue 5: Apr 2018
Test Result.....	Pass

Issued By:

Vista Laboratories

1261 Puerta Del Sol, San Clemente, CA 92673 USA

www.vista-compliance.com

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report. This report is not to be reproduced by any means except in full and in any case not without the written approval of Vista Laboratories.

Tested by:

David Zhang/Test Engineer

Approved By:

Sherwin Lee/Engineering Reviewer

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



Laboratory Introduction

Vista Labs is an A2LA accredited 17025 compliant regulatory compliance testing laboratories (Cert. number: 4848-01) strategically located in Orange County, providing services in the electrical and telecommunication industries. Vista labs is also recognized testing facility for Australia (ACMA), Chinese Taipei (BSMI), Chinese Taipei (NCC), Hong Kong (OFCA), Israel (MOC), Korea (RRA), Singapore (IMDA), Vietnam (MIC), etc.

Our comprehensive testing services include safety testing, EMC emission and susceptibility testing, RF and wireless testing (including DFS).

As your partner, Vista investigates appropriate test standards, develops test plans, performs troubleshooting & failure analysis, reviews documentation, and provides test reports for a complete compliance testing and certification package.



17025 Product Testing Accreditation Certificate



17065 Product Certification Accreditation Certificate

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	Applicant	5
1.2	Product information	5
1.3	Test standard and method	6
1.4	Test Purpose and statement	6
2	TEST SITE INFORMATION	7
3	MODIFICATION OF EUT	7
4	TEST CONFIGURATION AND OPERATION	7
4.1	EUT test configuration	7
4.2	EUT test mode	7
4.3	Supporting Equipment	8
4.4	EUT setup diagram	8
4.5	EUT operation	8
4.6	Test software	8
5	EUT AND TEST SETUP PICTURES	9
5.1	EUT pictures	9
5.2	EUT test setup pictures	11
6	TEST SUMMARY	14
7	UNCERTAINTY OF MEASUREMENT	15
8	TEST SUMMARY AND RESULT	16
8.1	Antenna Requirement	16
8.2	Radiated Band-Edge & Spurious Emissions into Restricted Frequency Bands	17
9	TEST INSTRUMENT LIST	28

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



REVISION HISTORY

Revision	Issue Date	Description	Note
Original	06/21/2019	Original release	N/A

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



1 General Information

1.1 Applicant

Applicant:	Subeca, Inc.
Applicant address:	4514 Cole Avenue, Suite 600 Dallas, TX 75205 USA
Manufacturer:	Subeca, Inc.
Manufacturer Address:	4514 Cole Avenue, Suite 600 Dallas, TX 75205 USA

1.2 Product information

Product Name	LoRA module
Model Number	MOD01
Family Model Number	N/A
Serial Number	N/A
Frequency Band	125KHz Channel: 902.3 – 914.9 MHz 500KHz Channel: 903 – 914.2 MHz
Type of modulation	LoRA
Equipment Class/ Category	DTS
Maximum output power	18.73 dBm (125KHz), 18.09 dBm (500KHz)
Antenna Information	PCB antenna: 1.9 dBi
Clock Frequencies	N/A
Port/Connectors	N/A
Input Power	DC 3.3 V
Power Adapter Manu/Model	N/A
Power Adapter SN	N/A
Hardware version	N/A
Software version	N/A
Simultaneous Transmission	N/A
Additional Info	No. of channels - 125KHz channel: 64 channels - 500KHz channel: 8 channels Channel spacing - 125KHz channel: 200KHz - 500KHz channel: 1.6MHz The host product, HydraLink contains a BT single module (FCC ID: S9NSPBTLERF, IC ID: 8976C-SPBTLERF), but LoRA module and BT module cannot transmit simultaneously.

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



1.3 Test standard and method

Test standard	47CFR Part 15.247
	RSS-247 Issue 2.0: Feb 2017
	RSS-Gen Issue 5: Apr 2018
Test method	RSS-Gen Issue 5: Apr 2018
	ANSI C63.10: 2013
	558074 D01 15.247 Meas Guidance v05r02

1.4 Test Purpose and statement

The purpose of this test report is intended to demonstrate the compliance of product listed in section 1.2, received from company listed in section 1.1, to the requirements of standard and method listed in section 1.3. Based on our test results, we conclude that the product tested complies with the requirements of the standards indicated.

2 Test site information

Lab performing tests	Vista Laboratories
Lab Address	1261 Puerta Del Sol, San Clemente, CA 92673 USA
Phone Number	+1 (949) 393-1123
Website	www.Vista-compliance.com

Test condition	Test Engineer	Test Environment	Test Date
Radiated	David Zhang	23.0°C / 58.2%/1006 mbar	06/13/2019

3 Modification of EUT

The EUT is an engineering test sample loaded with RF test firmware specifically designed to support the RF TX/RX measurement in different aspects. No modification on the hardware.

4 Test configuration and operation

4.1 EUT test configuration

EUT is mounted onto a development board to support testing. A laptop with test software is used to send command to EUT. The test command is used to set EUT to different transmission mode in terms of radio mode bandwidth, power level, test channel, etc.

4.2 EUT test mode

Radio	Channel	Frequency (MHz)	Bandwidth (KHz)
LoRA	Low	902.3	125
LoRA	Mid	908.5	125
LoRA	High	914.9	125
LoRA	Low	903.0	500
LoRA	Mid	907.8	500
LoRA	High	914.2	500

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



4.3 Supporting Equipment

Index	Description	Model	S/N	Brand	Remark
1	Laptop	G752V	F9N0CY758592398	ASUS	Sending command

4.4 EUT setup diagram



4.5 EUT operation


The control of EUT is test software on test laptop.

4.6 Test software


Index	Description	Remark
1	FSK-LoRA Module Test Tool V1.1.2	Sending command to EUT
2	EMISoft Vasona 6.0049	EMC/Spurious emission test software used during testing

5 EUT and test setup pictures


5.1 EUT pictures

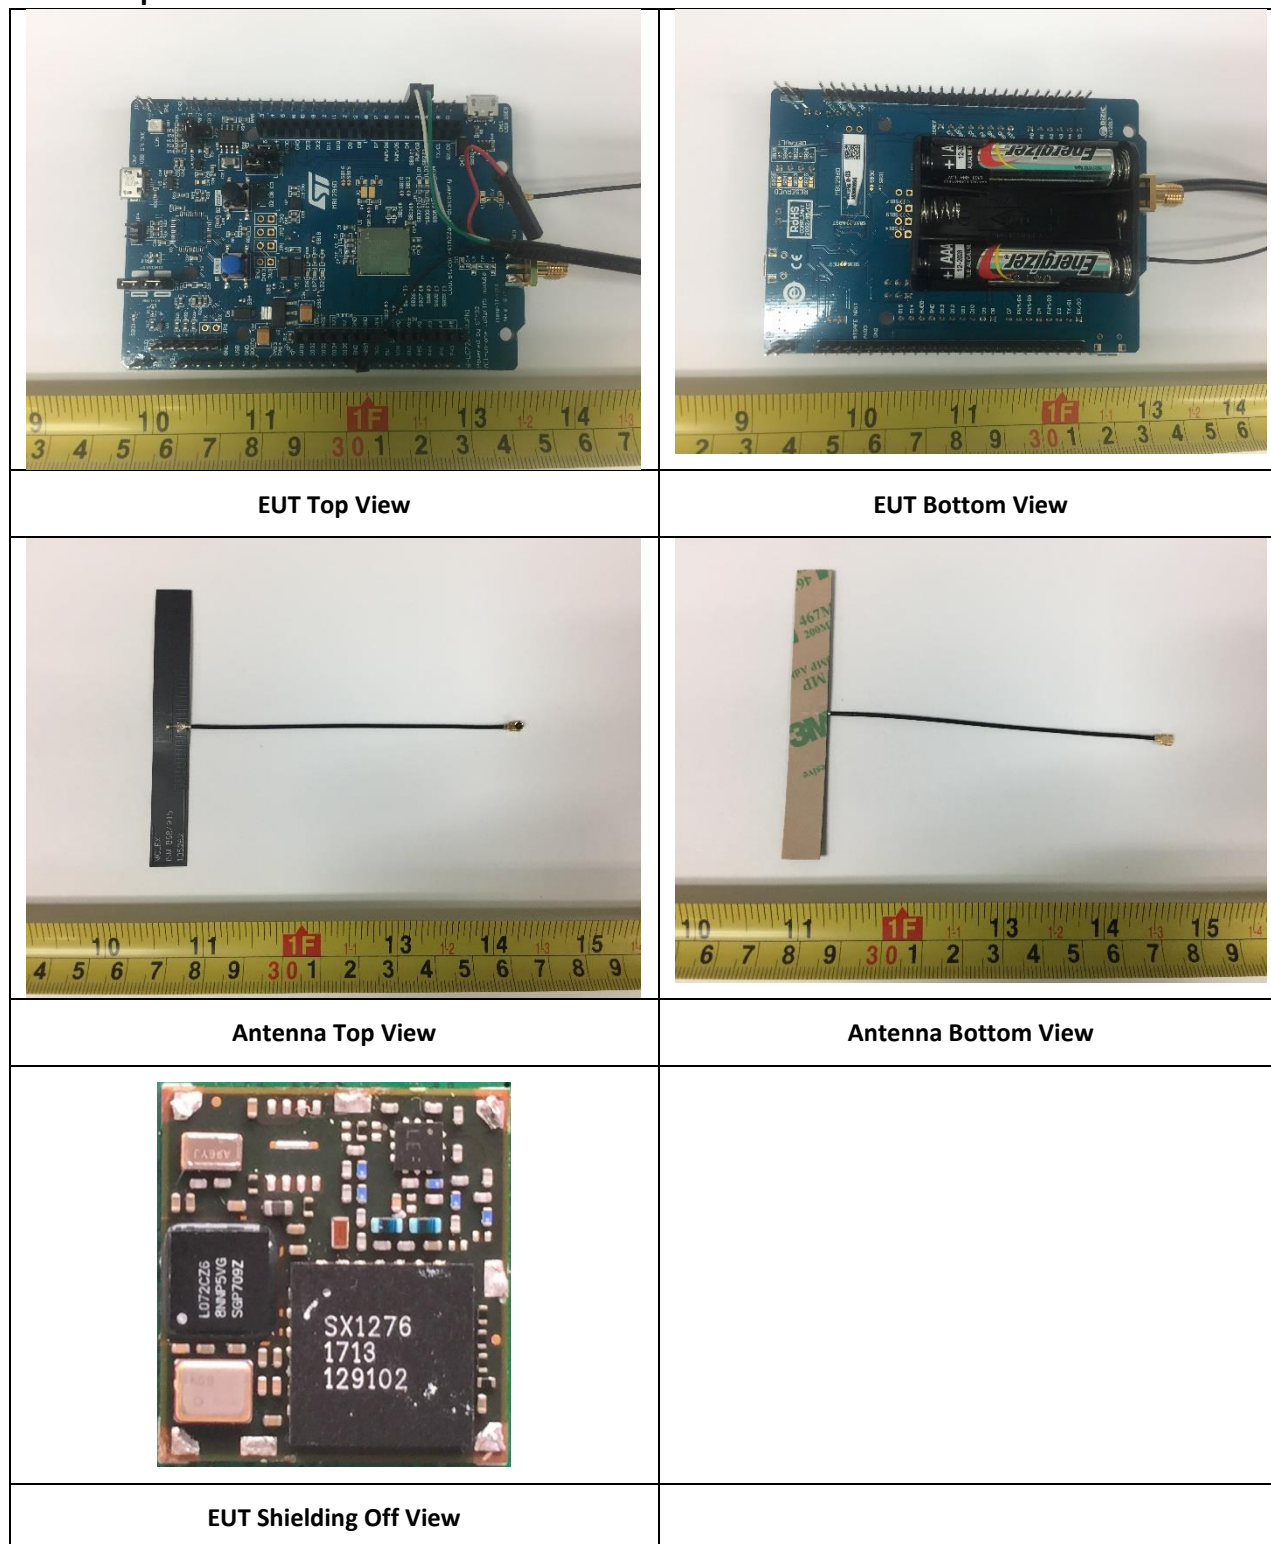

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01

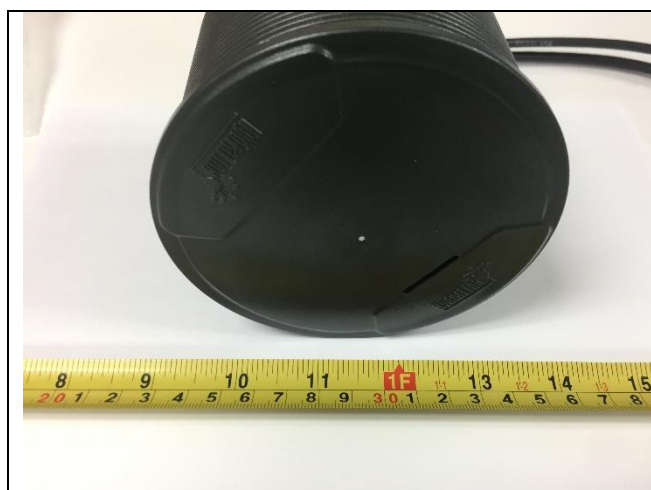

Host Product Front View

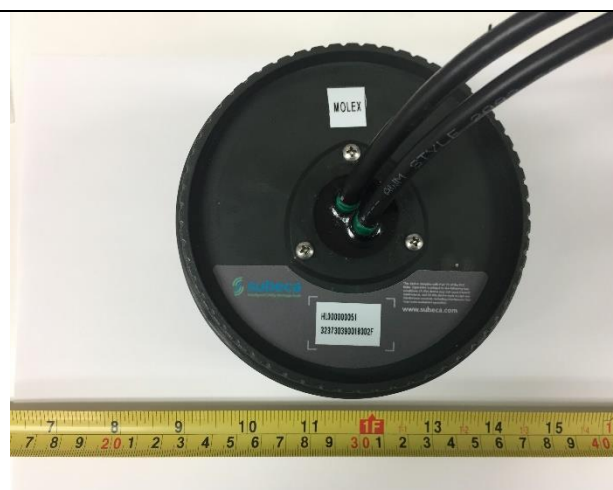

Host Product Rear View



Host Product Side View


Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



5.2 EUT test setup pictures




Radiated Emissions Below 1GHz setup – Front

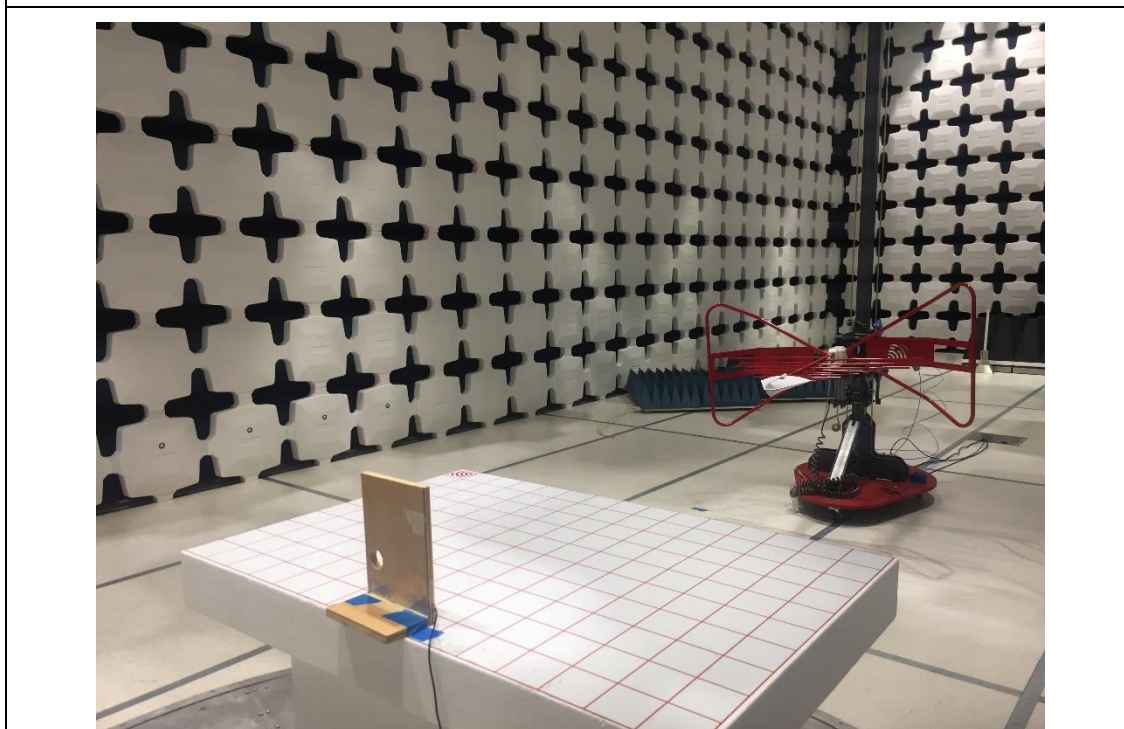


Radiated Emissions Below 1GHz setup – Rear

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01

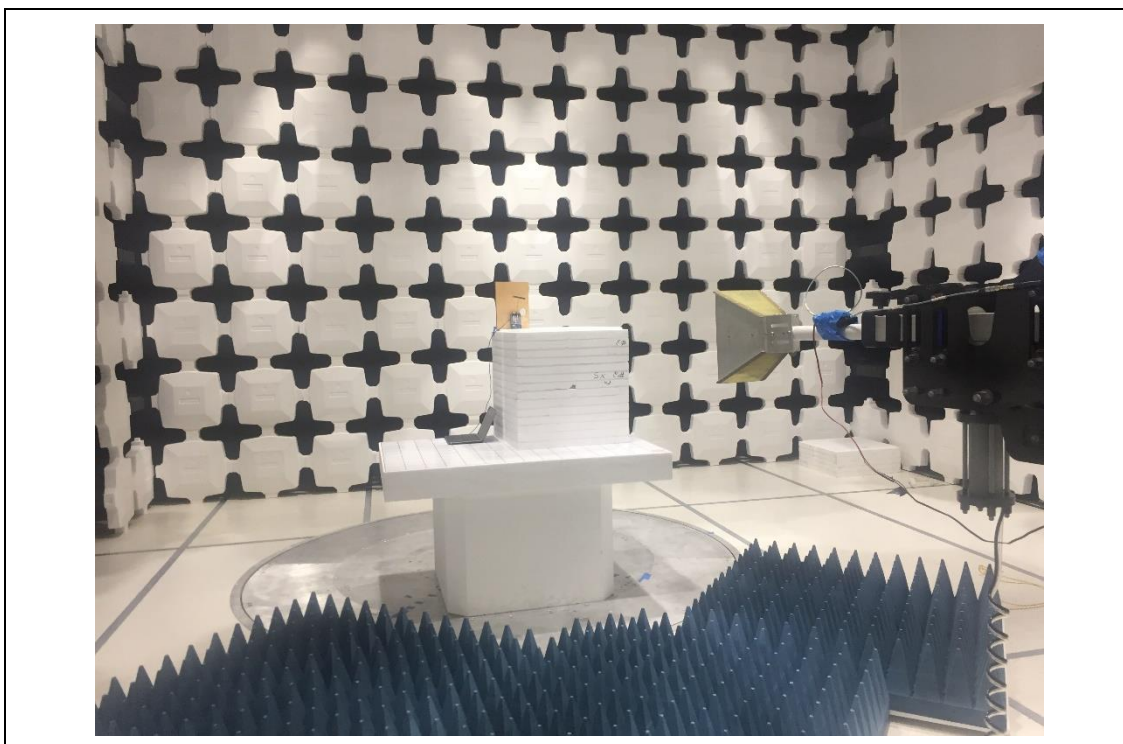


Radiated Emissions Above 1GHz setup – Front

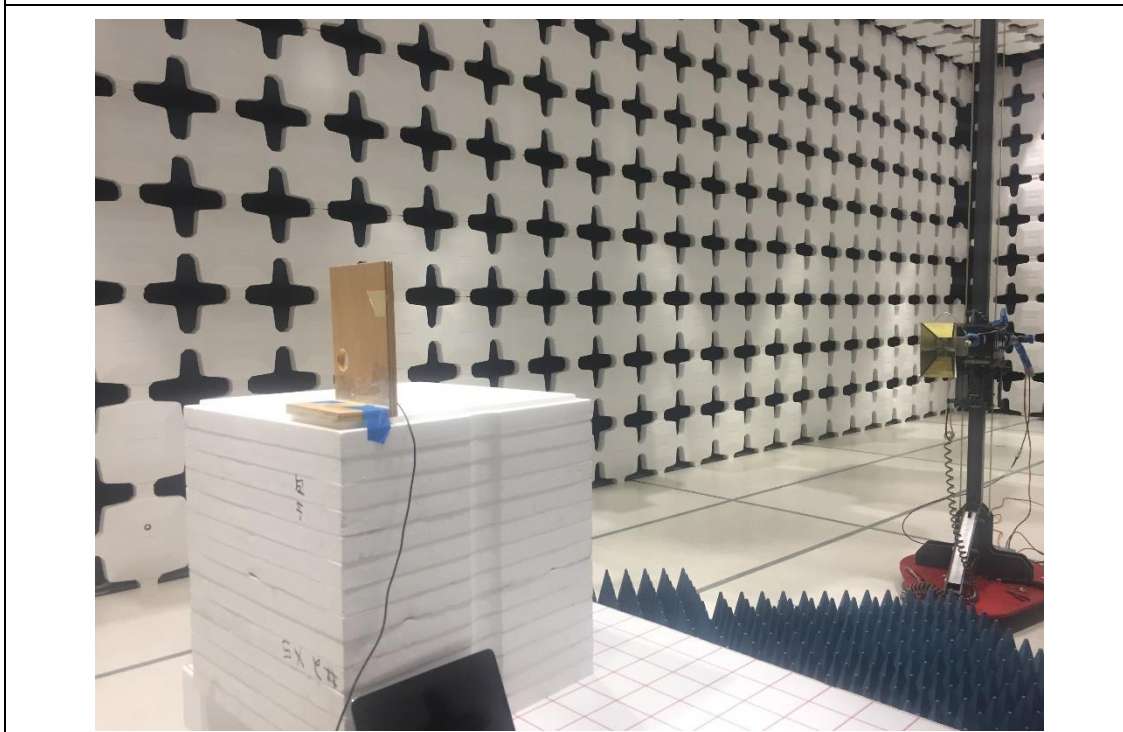


Radiated Emissions Above 1GHz setup – Rear

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01

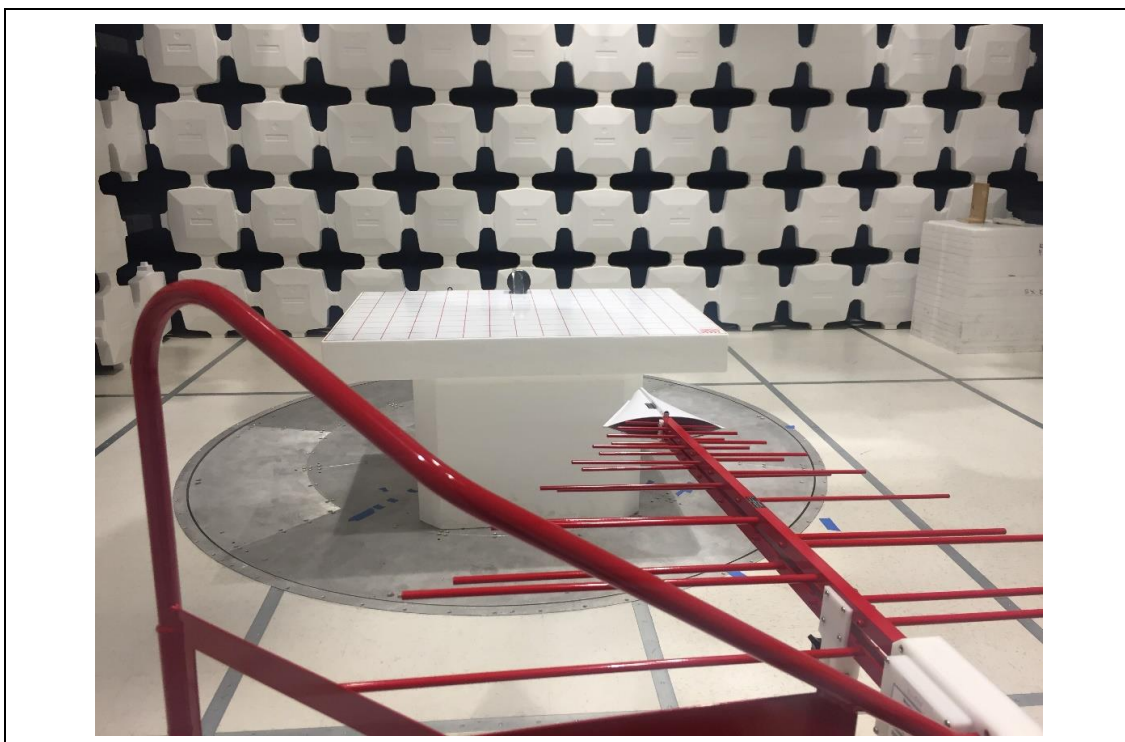

Test setup with Host – Front

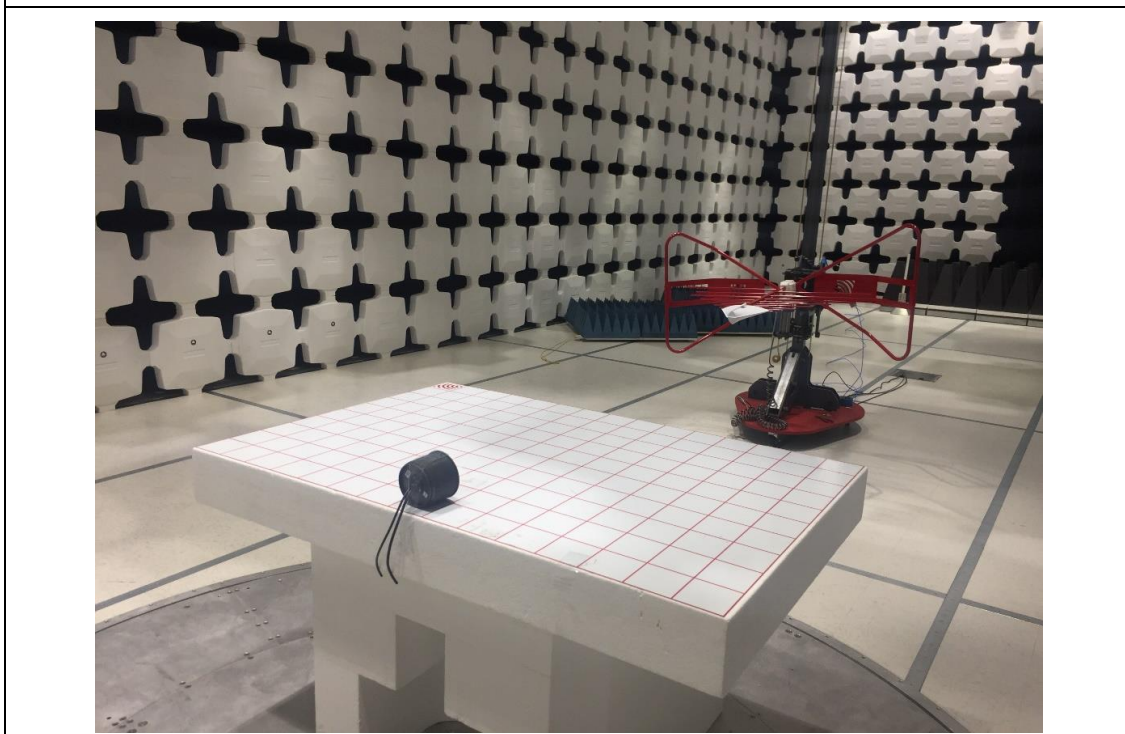

Test setup with Host – Rear

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



6 Test Summary

ISED Rules	ISED Rules	Test Item	Section	Verdict
§15.203	-	Antenna Requirement	8.1	Pass
§15.205, §15.209, §15.247(d)	RSS-247 §5.5	Radiated Emissions & Unwanted Emissions into Restricted Frequency Bands	8.2	Pass

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



7 Uncertainty of Measurement

Test item	Measurement Uncertainty (dB)
RF Output Power (Conducted)	±1.2 dB
Power Spectral Density	±0.9 dB
Unwanted Emission (conducted)	±2.6 dB
Occupied Channel Bandwidth	±5 %
Radiated Emission (9KHz-30MHz)	±3.5 dB
Radiated Emission (30MHz-1GHz)	±4.6 dB
Radiated Emission (1-18GHz)	±4.9 dB
Radiated Emission (18-40GHz)	±3.5 dB

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



8 Test summary and result

8.1 Antenna Requirement

8.1.1 Requirement

Per § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

8.1.2 Result

Analysis:

- EUT has one removable PCB trace antennas which connect to the main board through unique U.FL RF connectors.
- Both main board and antenna are equipped with U.FL connector. No standard RF connector is used.

Conclusion:

This requirement is FCC/ISED requirement.

8.2 Radiated Band-Edge & Spurious Emissions into Restricted Frequency Bands

8.2.1 Requirement


§ 15.247 (d), RSS-247 §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.



Attenuation below the general limits specified in §15.209(a) and RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Frequency range (MHz)	Field Strength ($\mu\text{V/m}$)
0.009~0.490	2400/F(KHz)
0.490~1.705	24000/F(KHz)
1.705~30.0	30
30 – 88	100
88 – 216	150
216 960	200
Above 960	500

8.2.2 Test setup

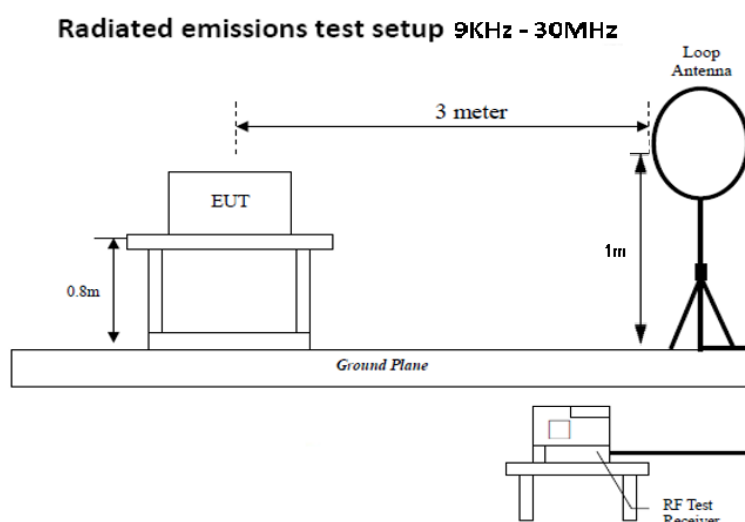

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01

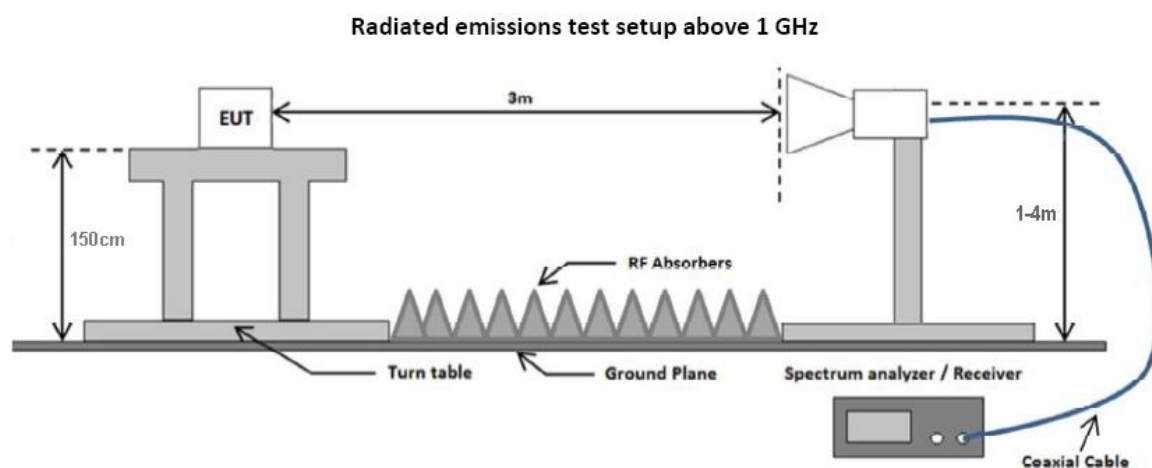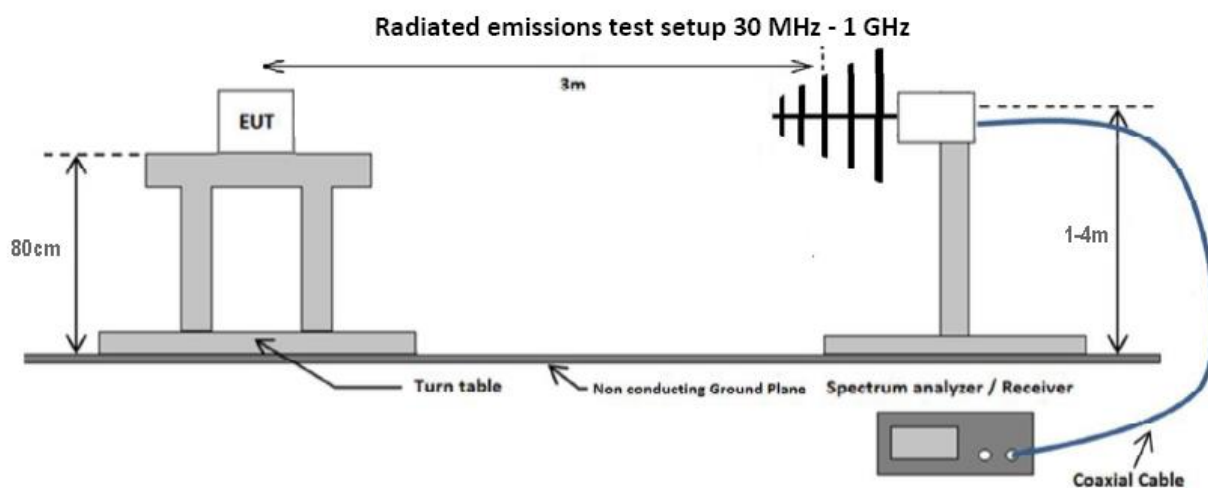

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01




8.2.3 Test Procedure

According to section 8.6 in KDB 558074 D01 DTS Meas Guidance v05r02 and subclause 11.12.2.7 Radiated spurious emission measurements in ANSI C62.10-2013 as well as the procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 was followed. Boresight antenna mast was used during the scanning to point to EUT to maximize the emission. The process will be repeated in 3 EUT orientations.

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 300 Hz for frequency below 150KHz.
4. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10 kHz for frequency between 150KHz – 30MHz.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-Peak detection at frequency between 30MHz - 1GHz.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak and average measurement at frequency above 1GHz.
7. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.

8.2.4 Test Result

Test Standard:	47CFR 15.209, RSS-Gen, RSS-247	Mode:	LoRA, 125KHz, high CH
Frequency Range:	30-1000MHz	Test Date:	06/13/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

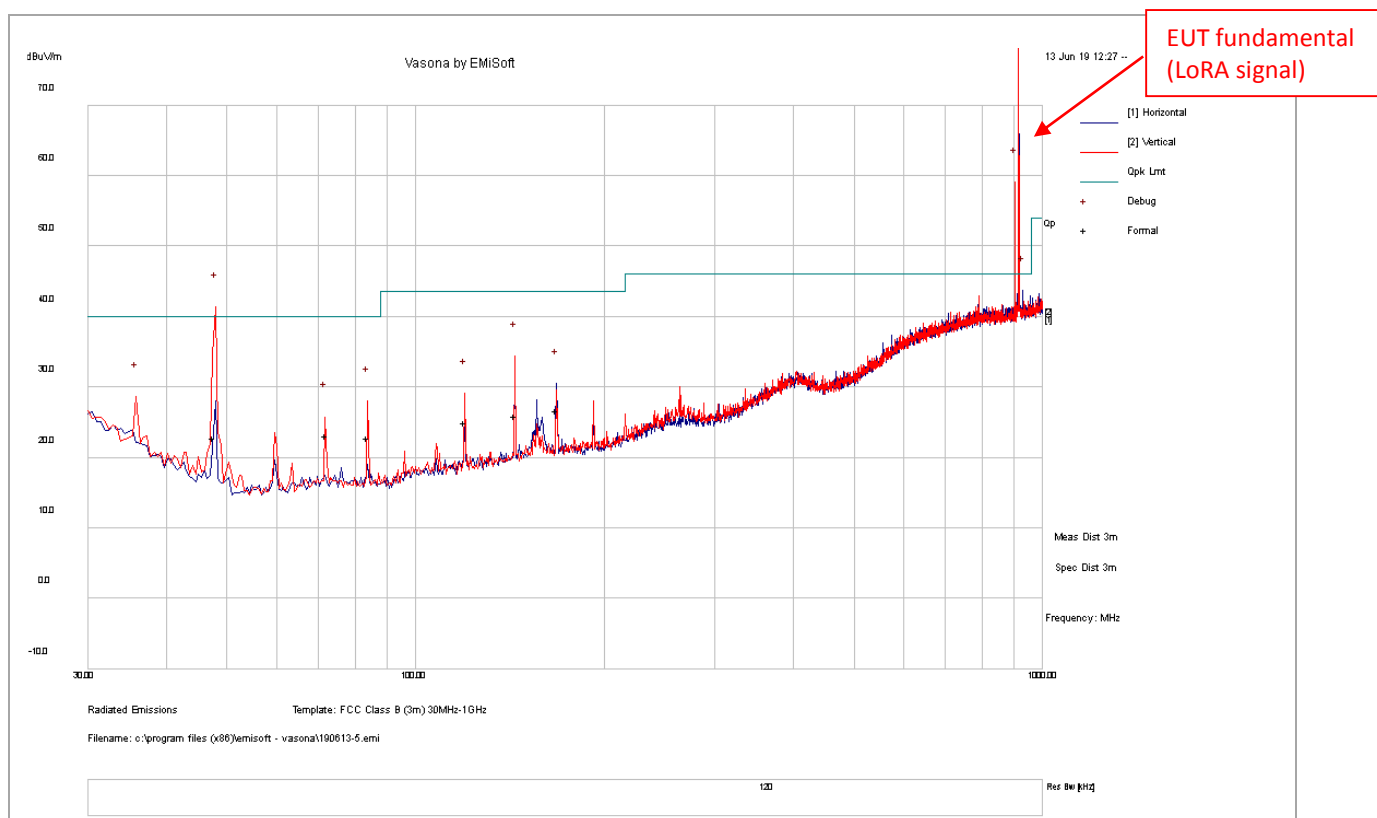

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
199.99	41.14	4.73	-21.81	24.06	QP	V	377	60	40.00	-17.10
225.01	50.17	5.01	-20.46	34.72	QP	V	167	292	40.00	-16.91
299.91	42.09	5.68	-18.73	29.04	QP	V	176	21	40.00	-17.11
350.00	53.96	6.05	-16.13	43.88	QP	V	221	34	43.50	-18.44
400.00	47.03	6.37	-13.43	39.97	QP	V	101	22	43.50	-17.52
403.19	37.81	6.36	-13.47	30.70	QP	H	198	326	43.50	-16.78

Note:


- For below 1GHz, all different channel and modes were verified but only the worst case result is shown here.

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



Page 21 of 28}

Test Standard:	47CFR 15.209, RSS-Gen, RSS-247	Mode:	LoRA, 500KHz, low CH
Frequency Range:	30-1000MHz	Test Date:	06/13/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

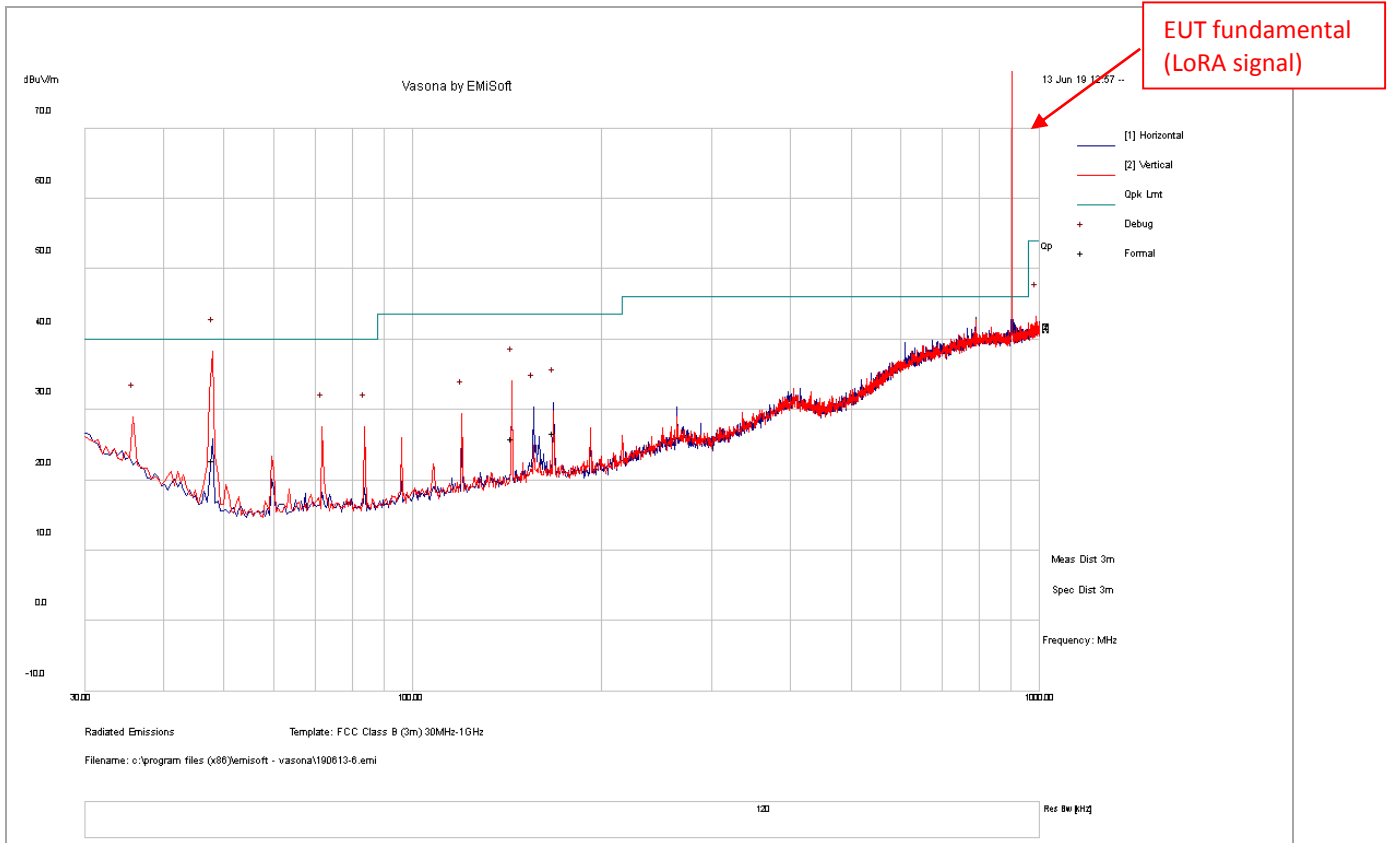

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
48.01	13.14	2.75	7.04	22.92	QP	V	100	60	40.00	-17.08
144.18	12.76	4.18	9.07	26.01	QP	H	246	74	43.50	-17.49
167.76	12.76	4.43	9.51	26.70	QP	H	324	240	43.50	-16.80

Note:

- 1) For below 1GHz, all different channel and modes were verified but only the worst case result is shown here.



Electromagnetic Compatibility
Radio Frequency
Product Certification
International Approval


1261 Puerta Del Sol
San Clemente, CA, 92673
+1 (949) 393-1123
www.vista-compliance.com

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



1GHz – 18GHz test result

Test Standard:	47CFR 15.209, RSS-Gen, RSS-247	Mode:	LoRA, 125KHz, Low CH
Frequency Range:	1GHz-18GHz	Test Date:	06/13/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

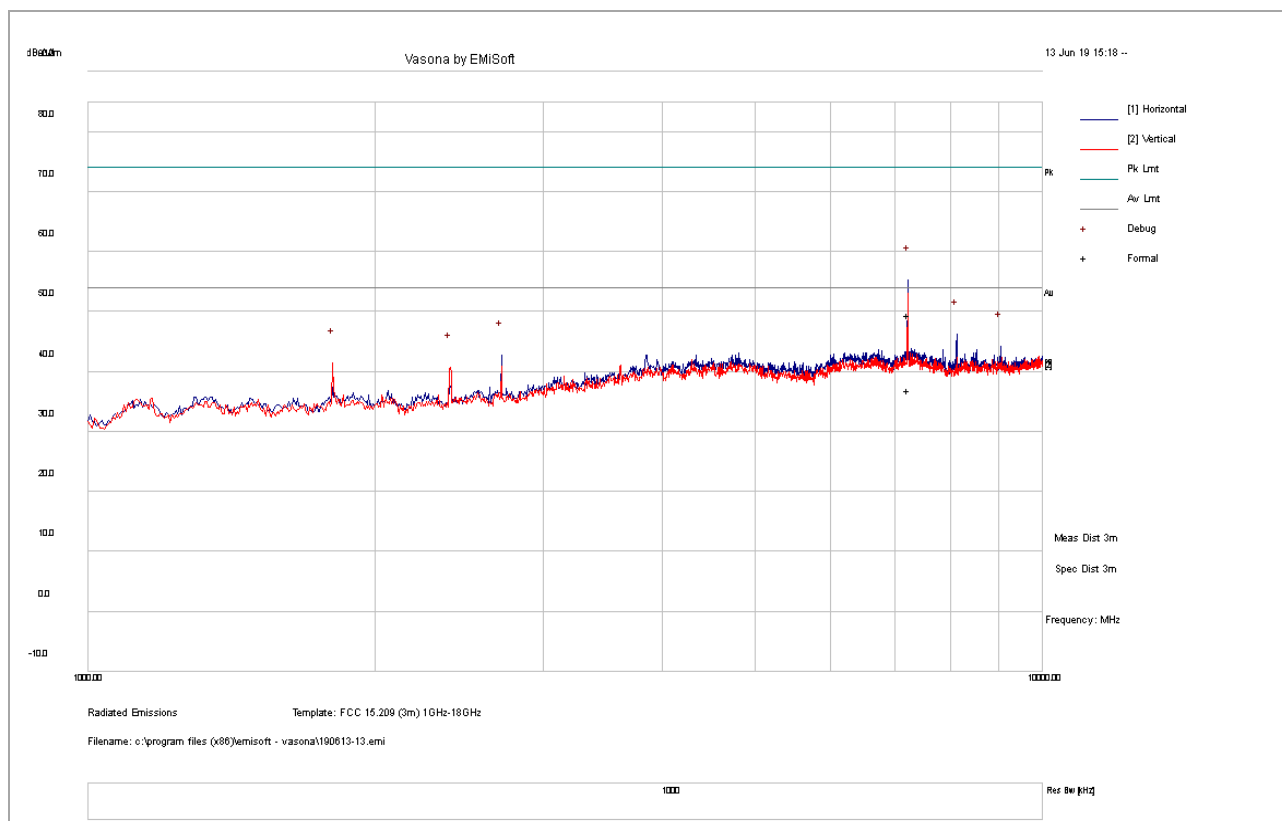


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
7219.33	24.82	16.48	11.68	52.99	PK	H	214	107	74	-21.01
7219.33	12.21	16.48	11.68	40.37	AV	H	214	107	54	-13.63

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



1GHz – 18GHz test result

Test Standard:	47CFR 15.209, RSS-Gen, RSS-247	Mode:	LoRA, 125KHz, Mid CH
Frequency Range:	1GHz-18GHz	Test Date:	06/13/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

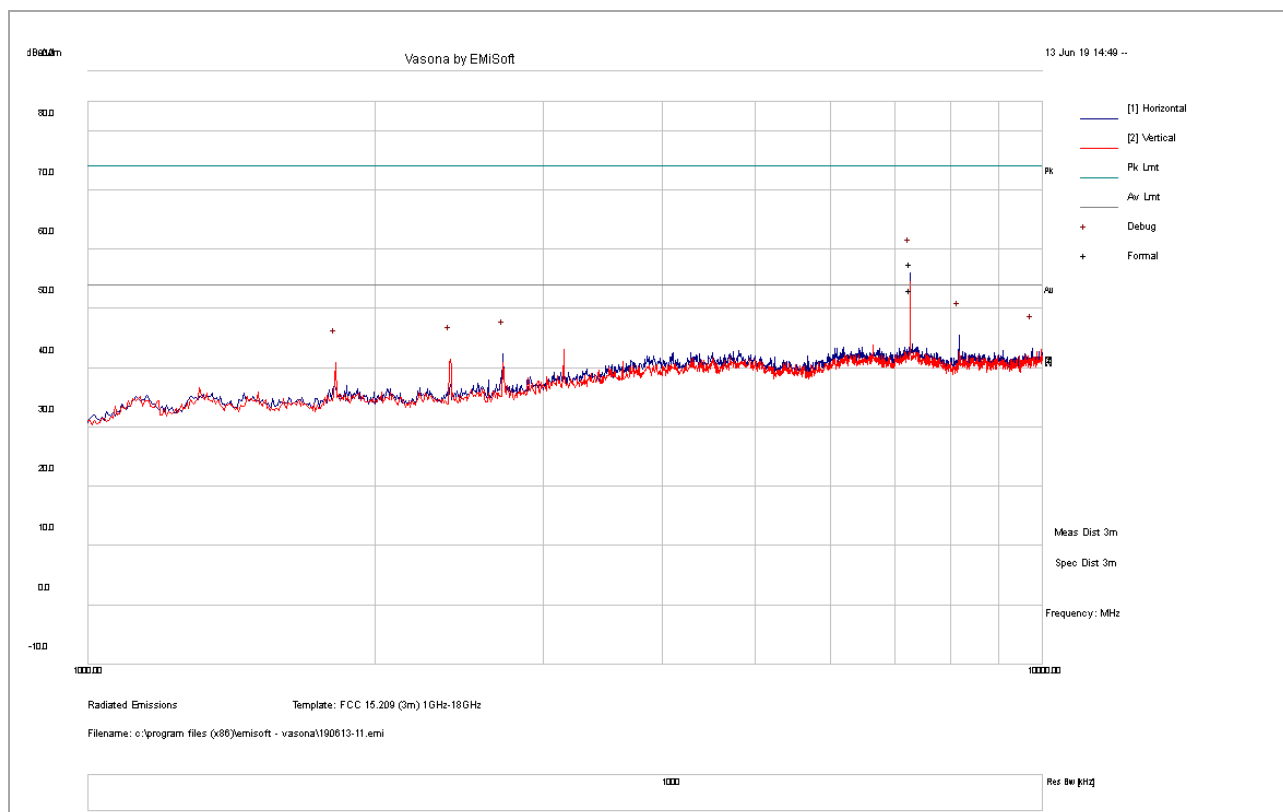


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
7262.41	29.31	16.56	11.70	57.58	PK	H	176	129	74	-16.43
7262.41	24.82	16.56	11.70	53.08	AV	H	176	129	54	-0.92

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



1GHz – 18GHz test result

Test Standard:	47CFR 15.209, RSS-Gen, RSS-247	Mode:	LoRA, 125KHz, High CH
Frequency Range:	1GHz-18GHz	Test Date:	06/13/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

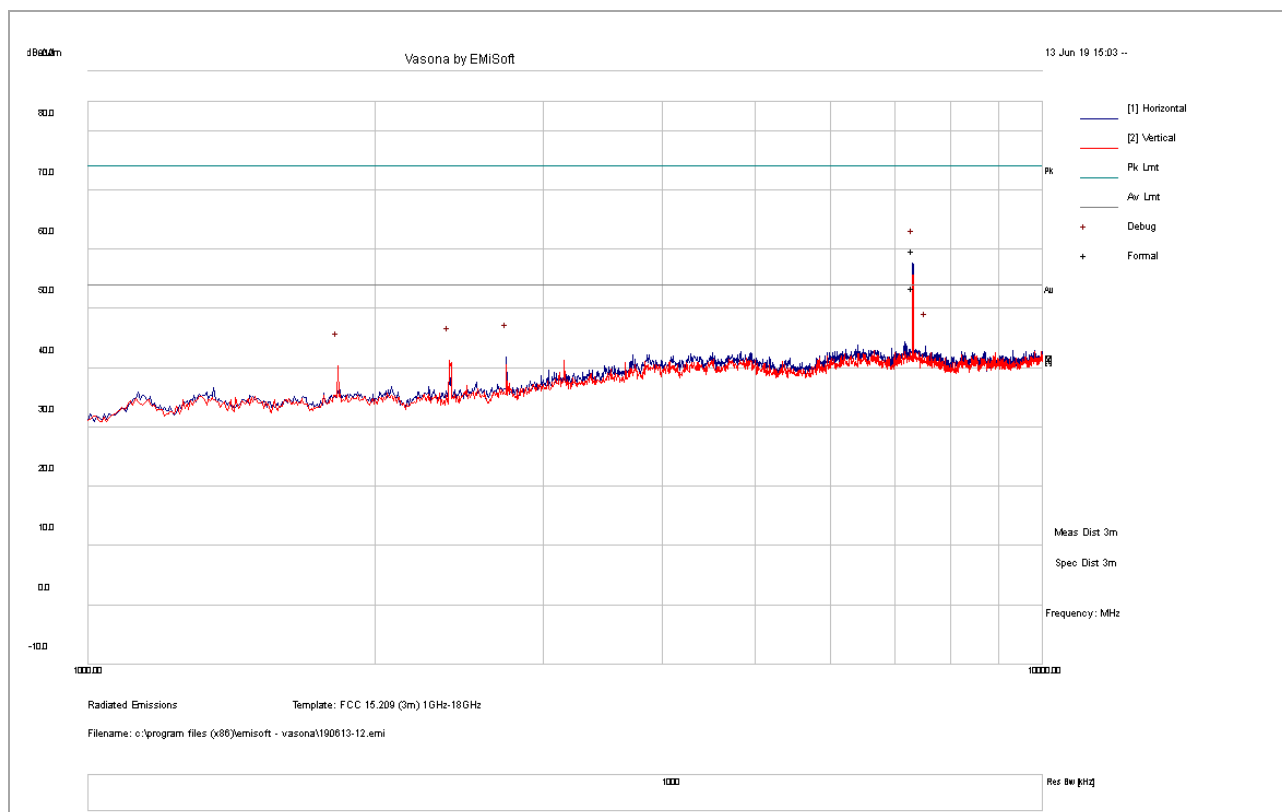


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
7313.22	31.37	16.66	11.69	59.72	PK	H	174	114	74	-14.28
7313.22	25.10	16.66	11.69	53.45	AV	H	174	114	54	-0.55

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



1GHz – 18GHz test result

Test Standard:	47CFR 15.209, RSS-Gen, RSS-247	Mode:	LoRA, 500KHz, Low CH
Frequency Range:	1GHz-18GHz	Test Date:	06/13/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

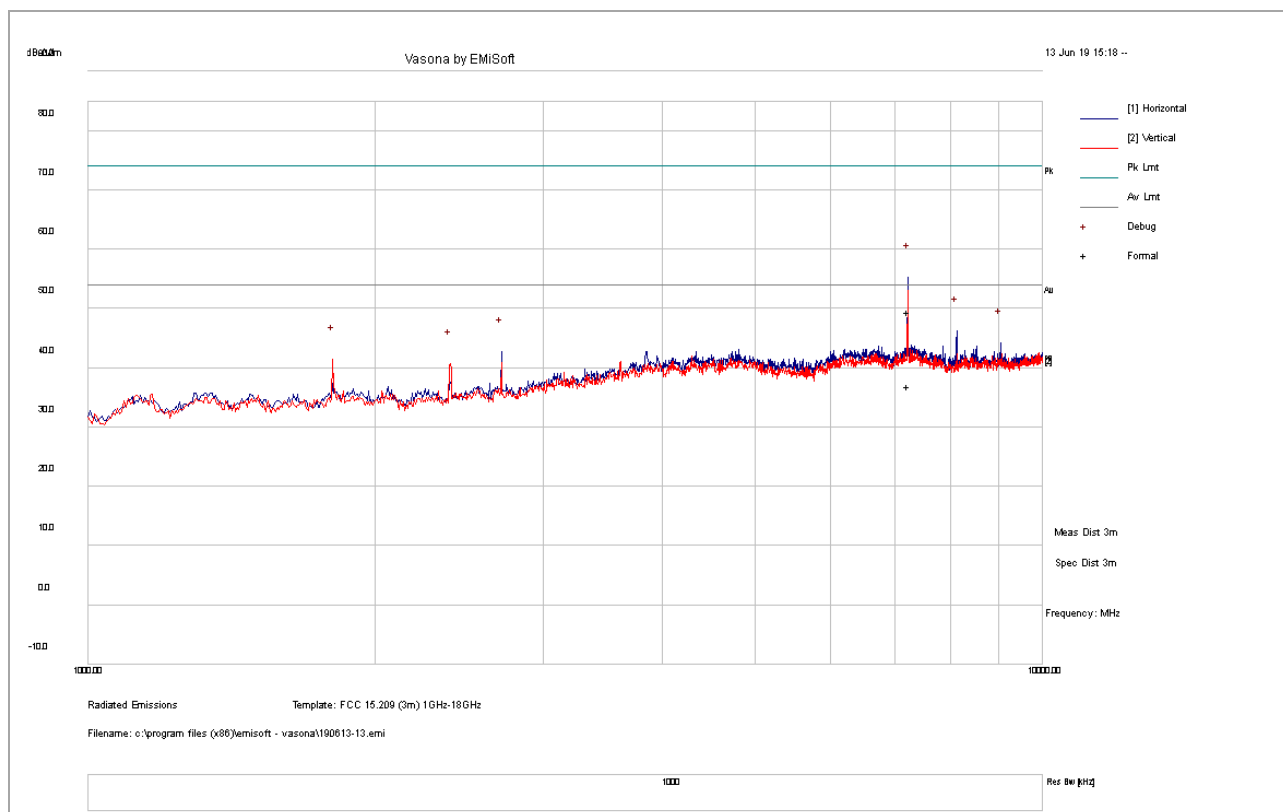


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
7225.71	21.33	16.49	11.69	49.50	PK	H	100	113	74	-24.50
7225.71	8.68	16.49	11.69	36.86	AV	H	100	113	54	-17.14

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



1GHz – 18GHz test result

Test Standard:	47CFR 15.209, RSS-Gen, RSS-247	Mode:	LoRA, 500KHz, Mid CH
Frequency Range:	1GHz-18GHz	Test Date:	06/13/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

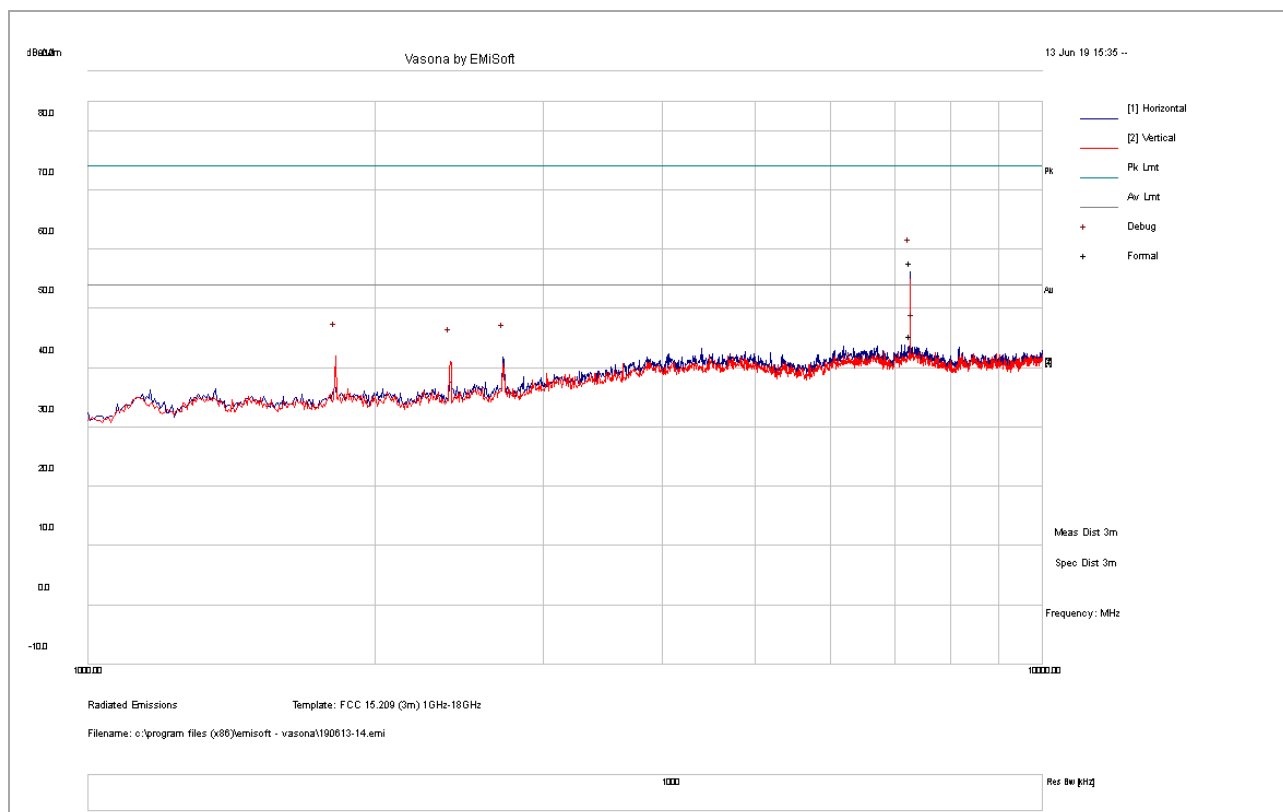


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
7262.02	29.46	16.56	11.70	57.72	PK	H	182	111	74	-16.28
7262.02	17.18	16.56	11.70	45.44	AV	H	182	111	54	-8.56

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



1GHz – 18GHz test result

Test Standard:	47CFR 15.209, RSS-Gen, RSS-247	Mode:	LoRA, 500KHz, High CH
Frequency Range:	1GHz-18GHz	Test Date:	06/13/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	David Zhang
Remark:	N/A	Test Result:	Pass

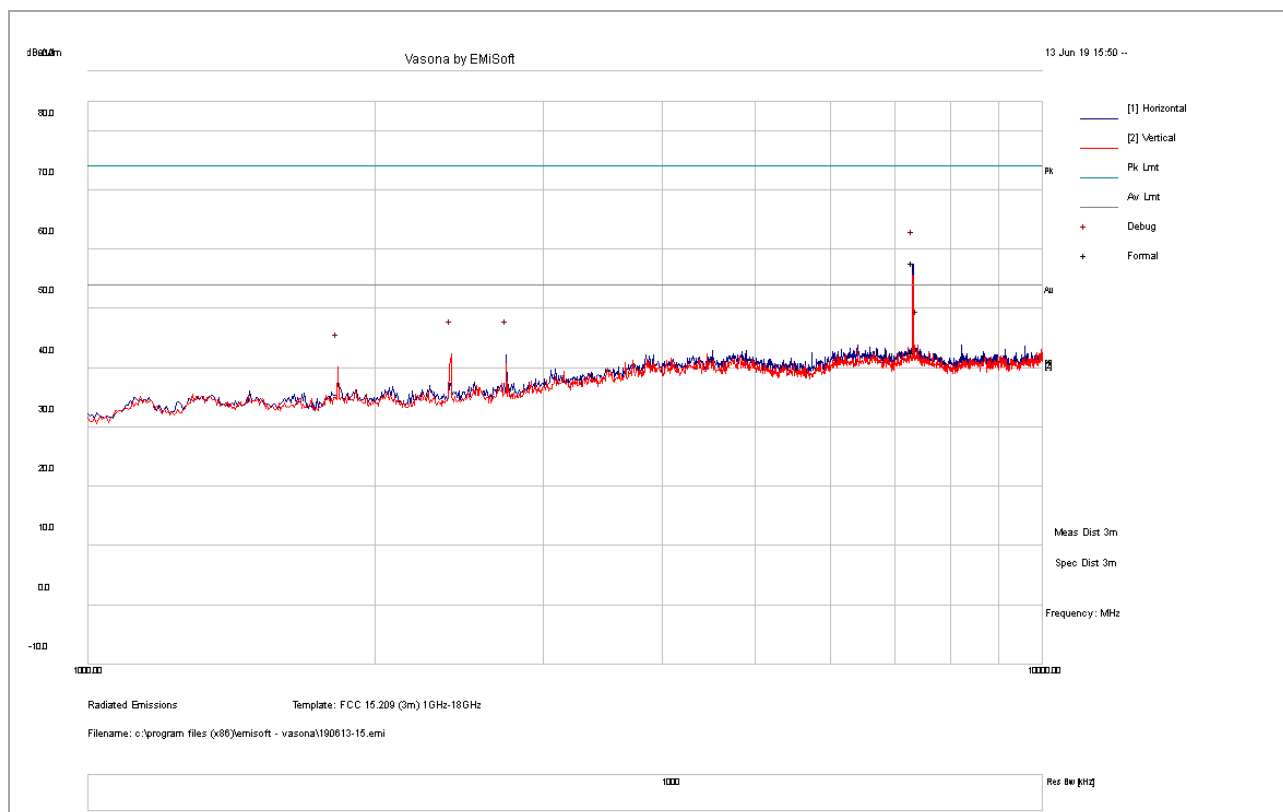

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
7311.80	29.48	16.66	11.69	57.83	PK	H	152	104	74	-16.17
7311.80	14.38	16.66	11.69	42.74	AV	H	152	104	54	-11.27

Report Number:	SUB-19042301-LC-15C-MOD
Product:	LoRA module
Model Number:	MOD01



9 Test instrument list

Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
Semi-Anechoic Chamber	ETS-Lindgren	10M	VL001	5/11/2019	5/11/2020
Shielding Control Room	ETS-Lindgren	Series 81	VL006	N/A	N/A
Spectrum Analyzer	Keysight	N9020A	MY50110074	5/4/2019	5/4/2020
EMC Test Receiver	R&S	ESL6	100230	5/7/2019	5/7/2020
LISN (9KHz – 30MHz)	EMCO	3816/2	9705-1066	5/4/2019	5/4/2020
Bi-Log Antenna	ETS-Lindgren	3142E	217921	11/15/2018	11/15/2019
Horn Antenna (1-18GHz)	Electro-Metrics	EM-6961	6292	5/2/2019	5/2/2020
Horn Antenna (18-40GHz)	Com-Power	AH-840	101109	5/2/2019	5/2/2020
Preamplifier	RF Bay, Inc.	LPA-10-20	11180621	5/10/2019	5/10/2020
True RMS Multi-meter	UNI-T	UT181A	C173014829	5/10/2019	5/10/2020
Temp / Humidity / Pressure Meter	PCE Instruments	PCE-THB 40	R062028	5/9/2019	5/9/2020
RF Attenuator	Pasternack	PE7005-3	VL061	5/10/2019	5/10/2020
Preamplifier 100KHz - 40GHz	Aeroflex	33711-392- 77150-11	064	5/10/2019	5/10/2020
EM Center Control	ETS-Lindgren	7006-001	160136	N/A	N/A
Turn Table	ETS-Lindgren	2181-3.03	VL002	N/A	N/A
Boresight Antenna Tower	ETS-Lindgren	2171B	VL003	N/A	N/A
Loop Antenna (9k-30MHz)	Com-Power	AL-130	121012	5/9/2019	5/9/2020
RE test cable(below 6GHz)	Vista	RE-6GHz-01	RE-6GHz-01	5/10/2019	5/10/2020
RE test cable (1-18GHz)	PhaseTrack	II-240	RE-18GHz-01	5/10/2019	5/10/2020
RE test cable (>18GHz)	Sucoflex	104	344903/4	5/10/2019	5/10/2020
Pulse limiter	Com-Power	LIT-930A	531727	5/15/2019	5/15/2020
CE test cable #1	FIRST RF	FRF-C-1002-001	CE-6GHz-01	5/10/2019	5/10/2020
CE test cable#2	FIRST RF	FRF-C-1002-001	CE-6GHz-02	5/9/2019	5/9/2020