


Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11g Mid CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

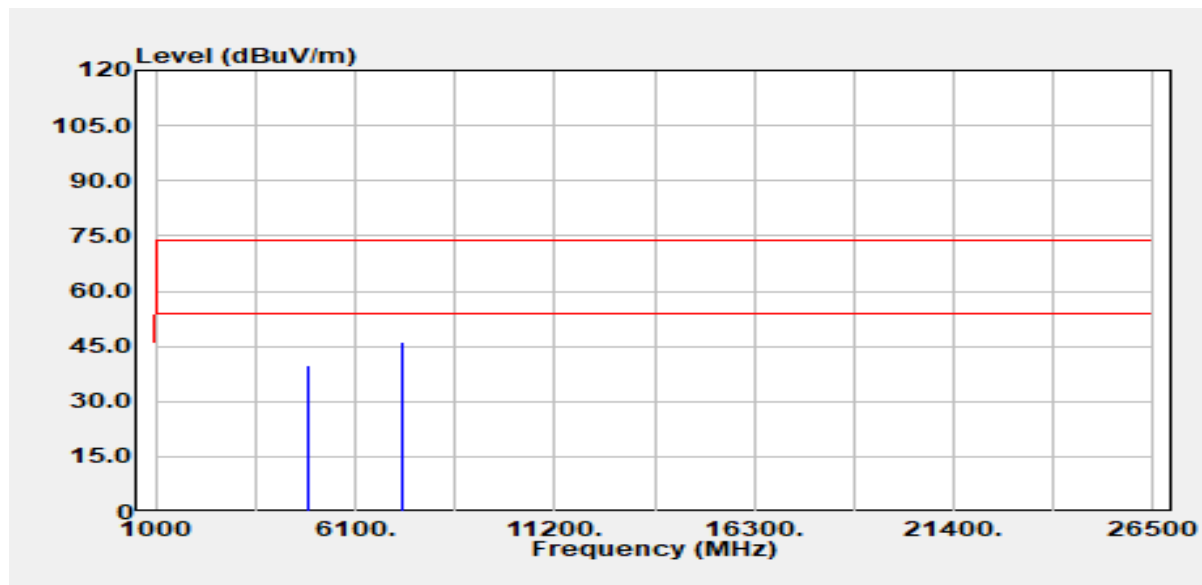


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.00	Peak	33.66	6.09	39.75	74.00	-34.25
4874.00	Average	28.82	6.09	34.91	54.00	-19.09
7311.00	Peak	32.77	13.33	46.10	74.00	-27.90
7311.00	Average	29.16	13.33	42.49	54.00	-11.51

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11g Mid CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

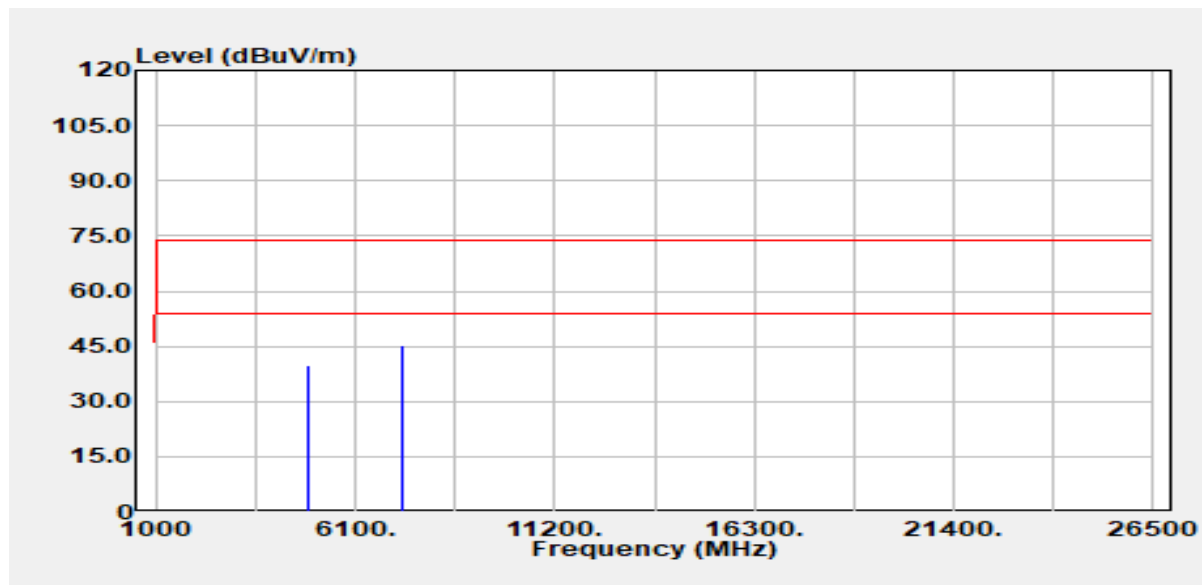


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.00	Peak	33.63	6.09	39.72	74.00	-34.28
4874.00	Average	25.28	6.09	31.36	54.00	-22.64
7311.00	Peak	31.88	13.33	45.21	74.00	-28.79
7311.00	Average	24.81	13.33	38.14	54.00	-15.86

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11g High CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

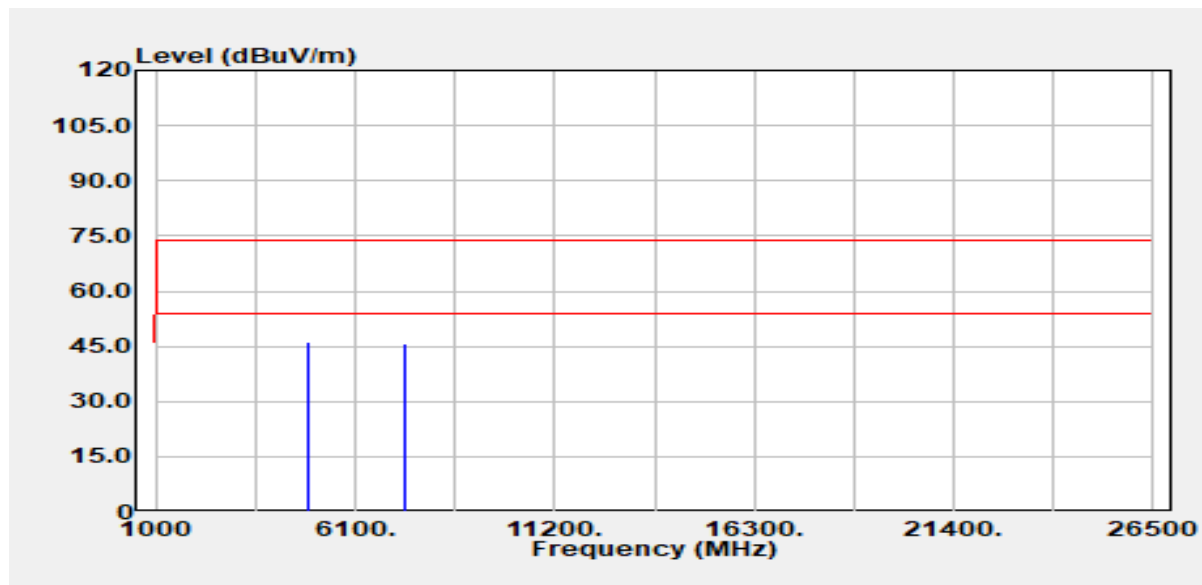


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4924.00	Peak	39.64	6.53	46.17	74.00	-27.83
4924.00	Average	29.89	6.53	36.41	54.00	-17.59
7386.00	Peak	32.32	13.33	45.65	74.00	-28.35
7386.00	Average	24.74	13.33	38.07	54.00	-15.93

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11g High CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

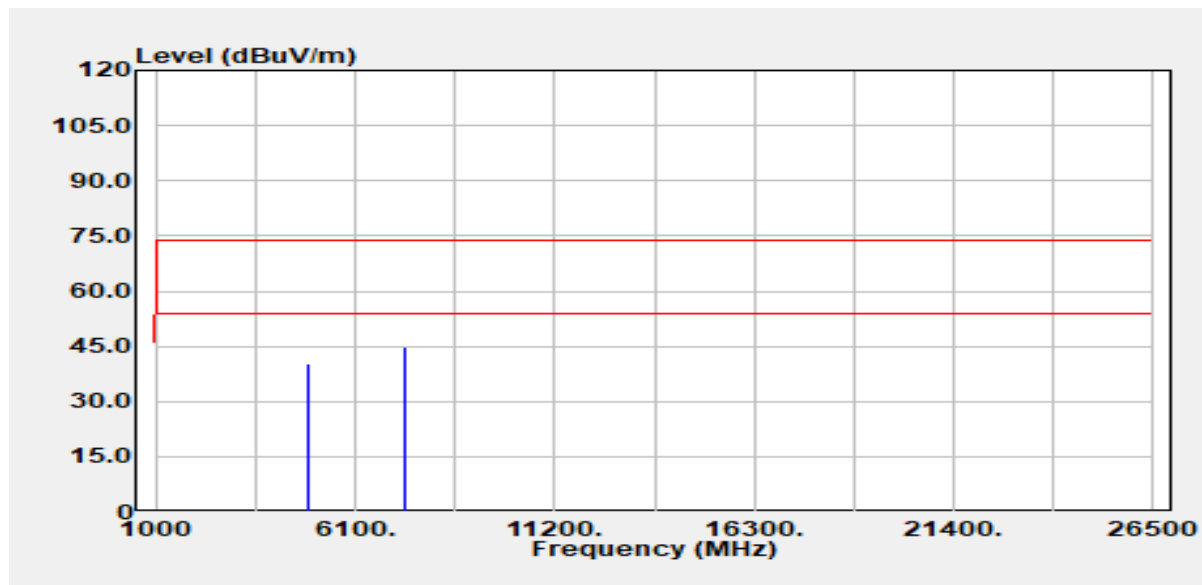


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4924.00	Peak	33.90	6.53	40.43	74.00	-33.57
4924.00	Average	25.85	6.53	32.38	54.00	-21.62
7386.00	Peak	31.61	13.33	44.94	74.00	-29.06
7386.00	Average	24.40	13.33	37.73	54.00	-16.27

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT20 Low CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

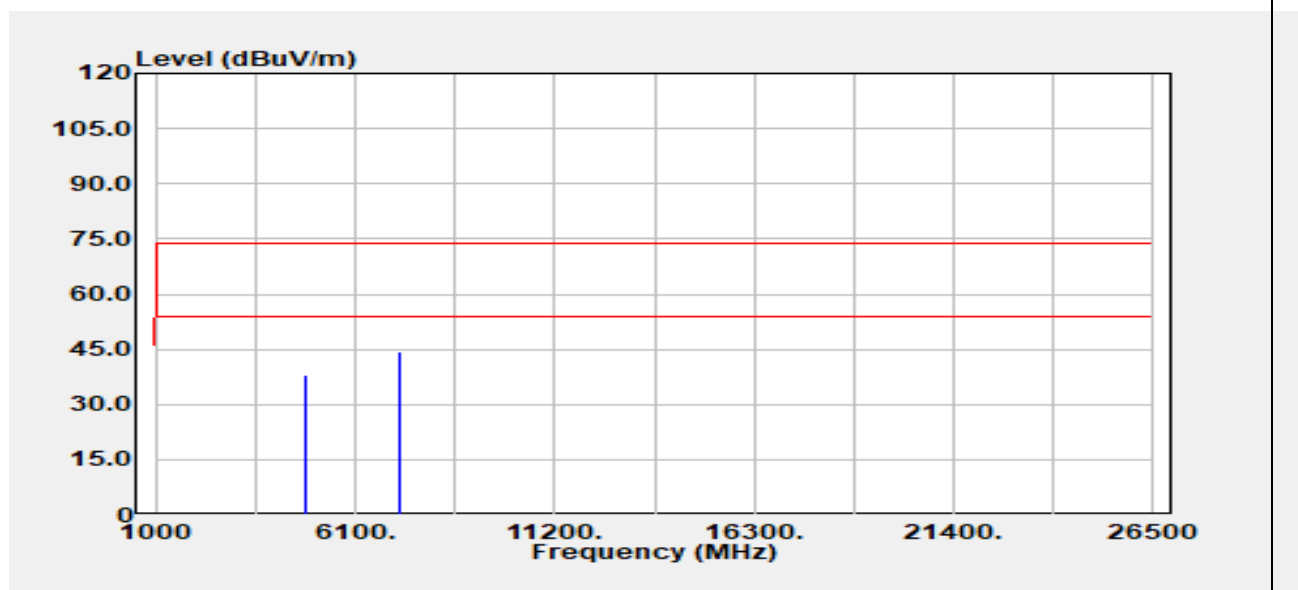


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4824.00	Peak	32.29	5.90	38.19	74.00	-35.81
4824.00	Average	26.90	5.90	32.80	54.00	-21.20
7236.00	Peak	31.18	13.31	44.49	74.00	-29.51
7236.00	Average	24.24	13.31	37.55	54.00	-16.45

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT20 Low CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

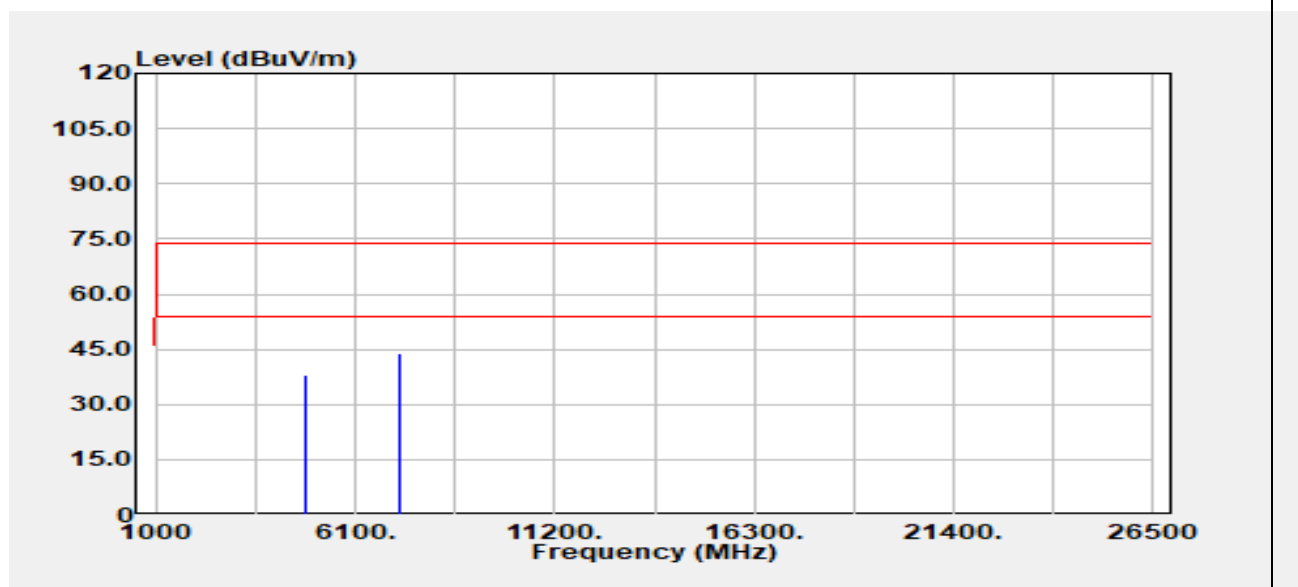


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4824.00	Peak	32.23	5.90	38.13	74.00	-35.87
4824.00	Average	25.40	5.90	31.30	54.00	-22.70
7236.00	Peak	30.70	13.31	44.01	74.00	-29.99
7236.00	Average	24.32	13.31	37.63	54.00	-16.37

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT20 Mid CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

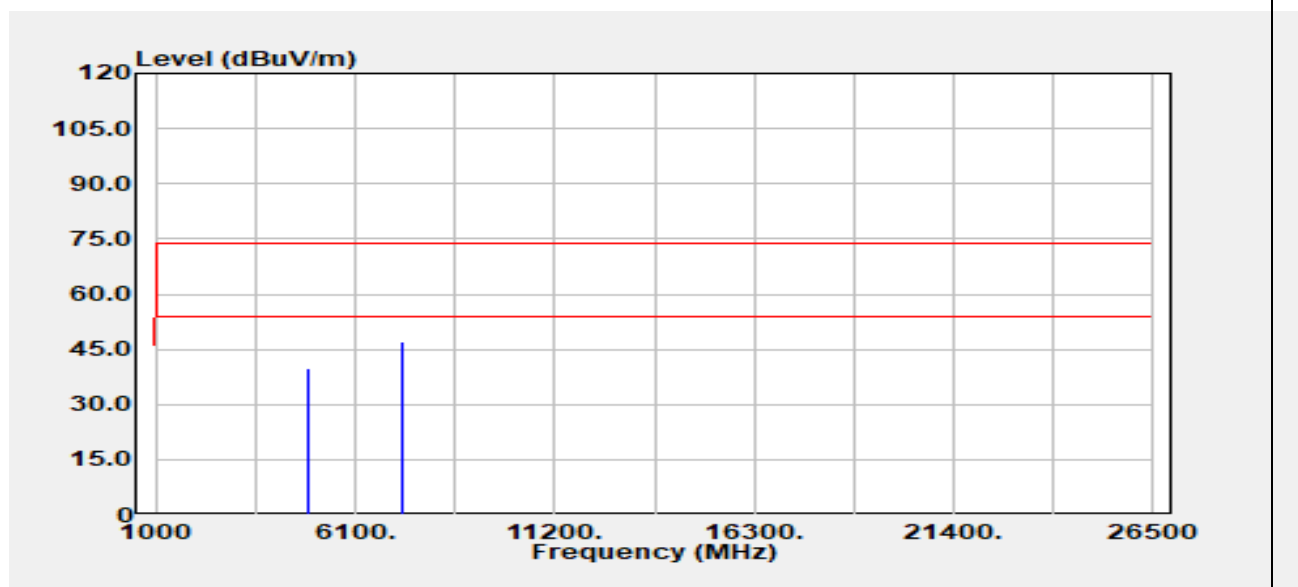


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.00	Peak	33.72	6.09	39.81	74.00	-34.19
4874.00	Average	28.99	6.09	35.08	54.00	-18.92
7311.00	Peak	33.56	13.33	46.89	74.00	-27.11
7311.00	Average	27.71	13.33	41.04	54.00	-12.96

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT20 Mid CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

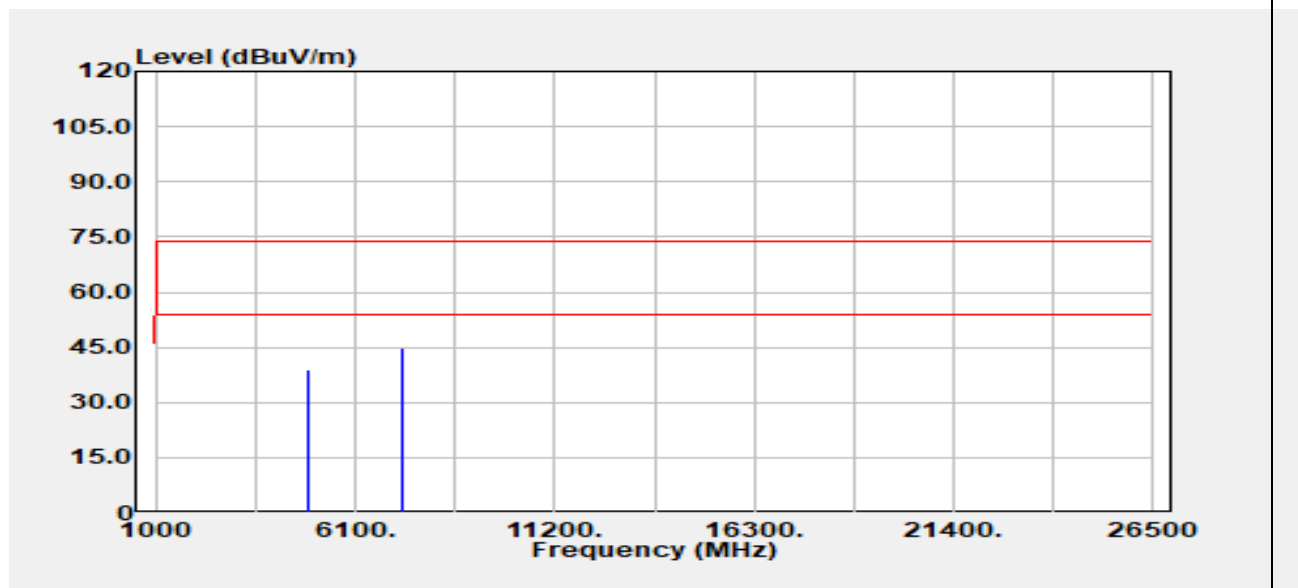


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.00	Peak	32.65	6.09	38.74	74.00	-35.26
4874.00	Average	25.21	6.09	31.30	54.00	-22.70
7311.00	Peak	31.28	13.33	44.62	74.00	-29.38
7311.00	Average	24.51	13.33	37.84	54.00	-16.16

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Test Mode	Mode 2 IEEE 802.11n HT20 High CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

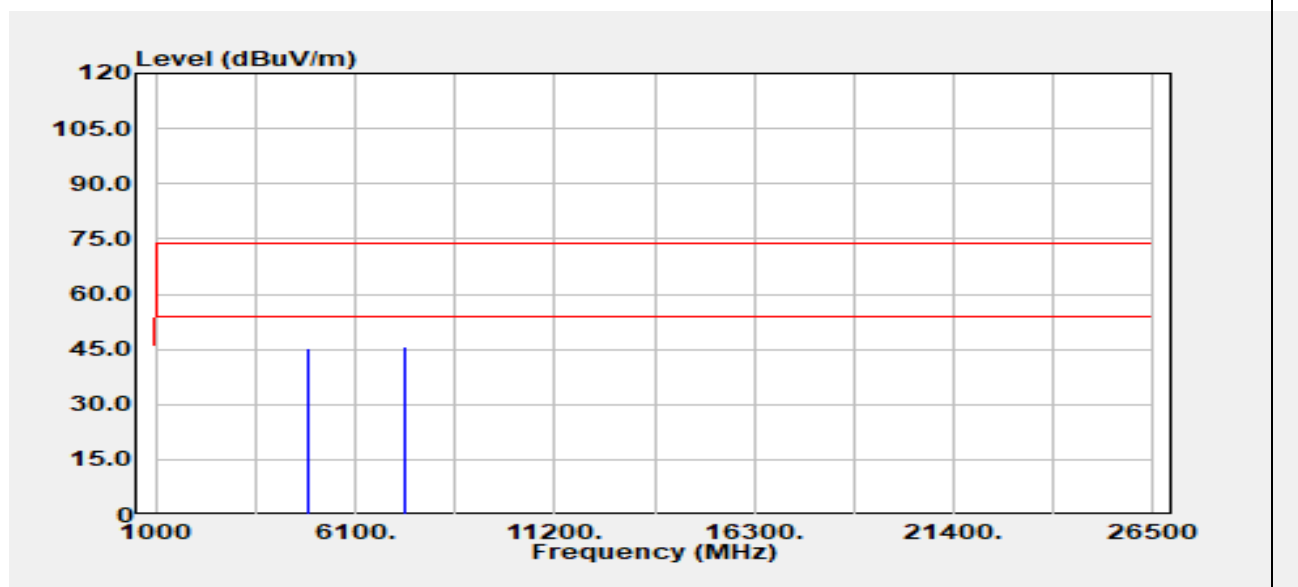


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4924.00	Peak	38.71	6.53	45.24	74.00	-28.76
4924.00	Average	28.57	6.53	35.10	54.00	-18.90
7386.00	Peak	32.49	13.33	45.82	74.00	-28.18
7386.00	Average	24.41	13.33	37.74	54.00	-16.26

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT20 High CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

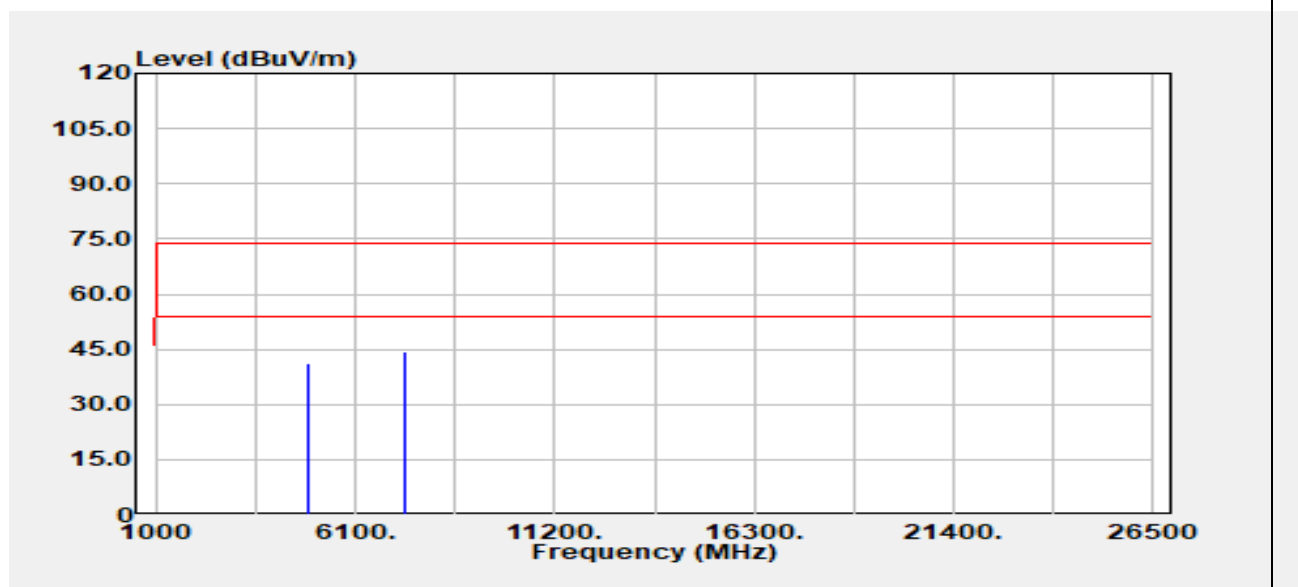


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4924.00	Peak	34.75	6.53	41.28	74.00	-32.72
4924.00	Average	25.82	6.53	32.35	54.00	-21.65
7386.00	Peak	31.24	13.33	44.57	74.00	-29.43
7386.00	Average	24.39	13.33	37.72	54.00	-16.28

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT40 Low CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

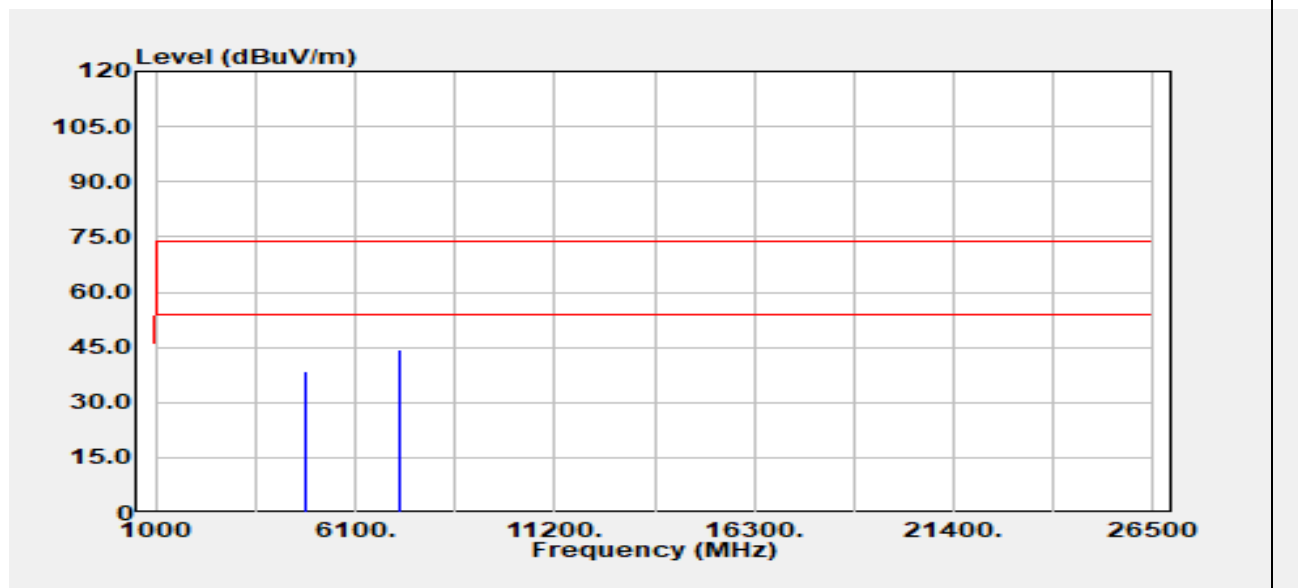


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4844.00	Peak	32.40	5.93	38.34	74.00	-35.66
4844.00	Average	25.75	5.93	31.68	54.00	-22.32
7266.00	Peak	31.18	13.33	44.51	74.00	-29.49
7266.00	Average	23.68	13.33	37.01	54.00	-16.99

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT40 Low CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

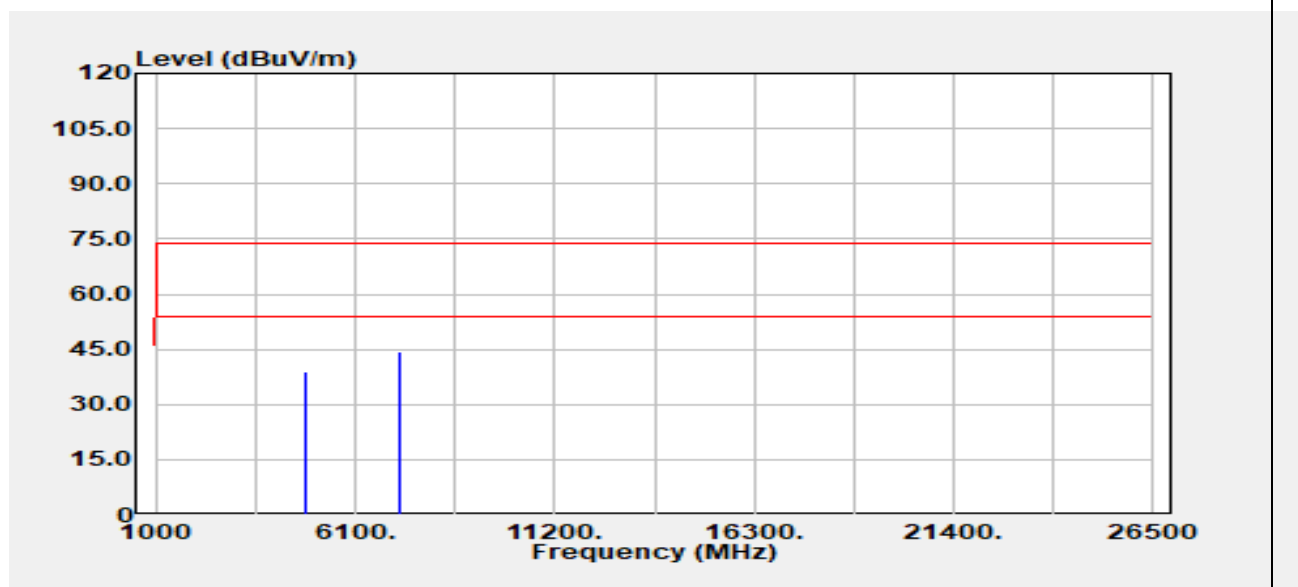


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4844.00	Peak	33.14	5.93	39.07	74.00	-34.93
4844.00	Average	25.10	5.93	31.03	54.00	-22.97
7266.00	Peak	31.03	13.33	44.36	74.00	-29.64
7266.00	Average	23.52	13.33	36.85	54.00	-17.15

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT40 Mid CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

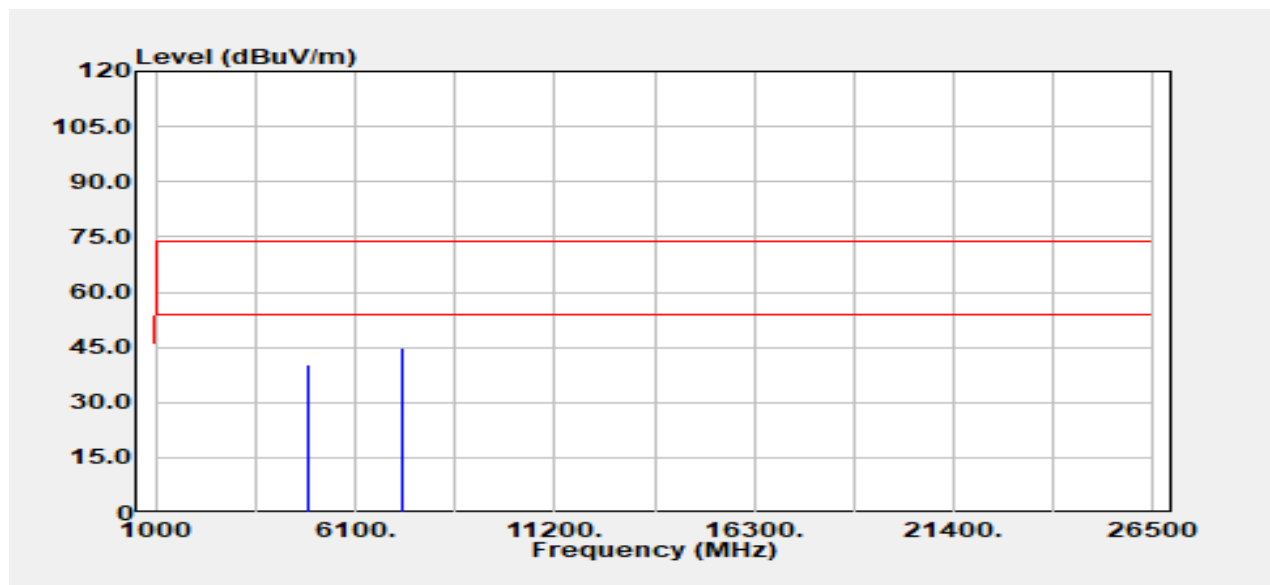


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.00	Peak	33.99	6.09	40.08	74.00	-33.92
4874.00	Average	25.74	6.09	31.83	54.00	-22.17
7311.00	Peak	31.46	13.33	44.79	74.00	-29.21
7311.00	Average	23.31	13.33	36.64	54.00	-17.36

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT40 Mid CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

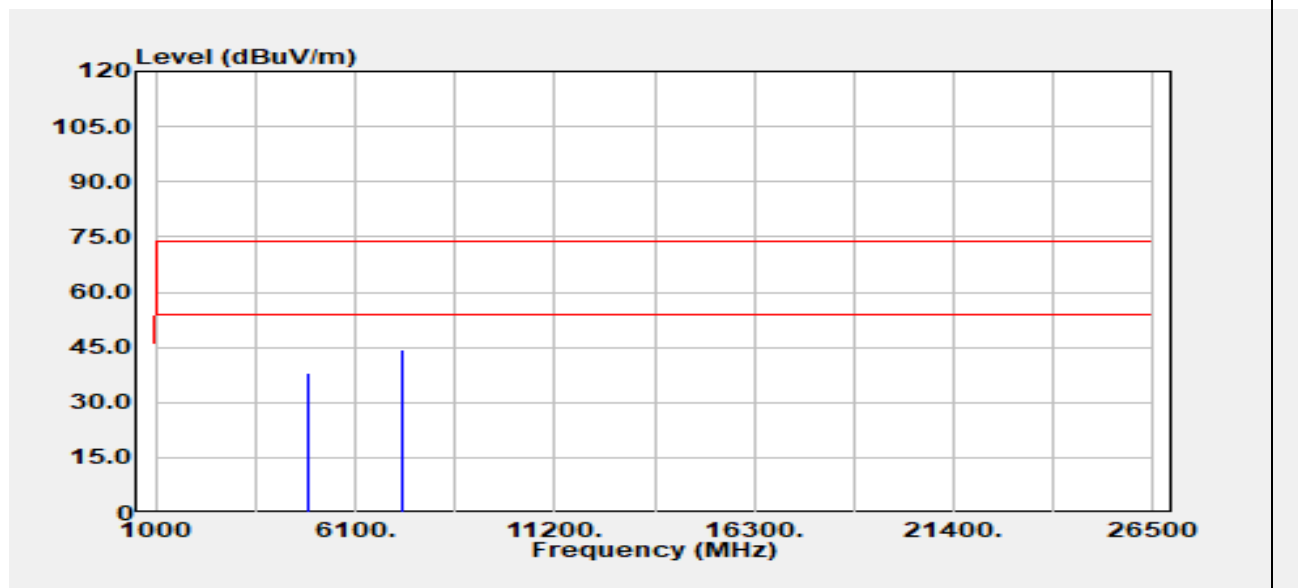


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.00	Peak	32.15	6.09	38.24	74.00	-35.76
4874.00	Average	24.67	6.09	30.76	54.00	-23.24
7311.00	Peak	31.06	13.33	44.39	74.00	-29.61
7311.00	Average	23.41	13.33	36.74	54.00	-17.26

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT40 High CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

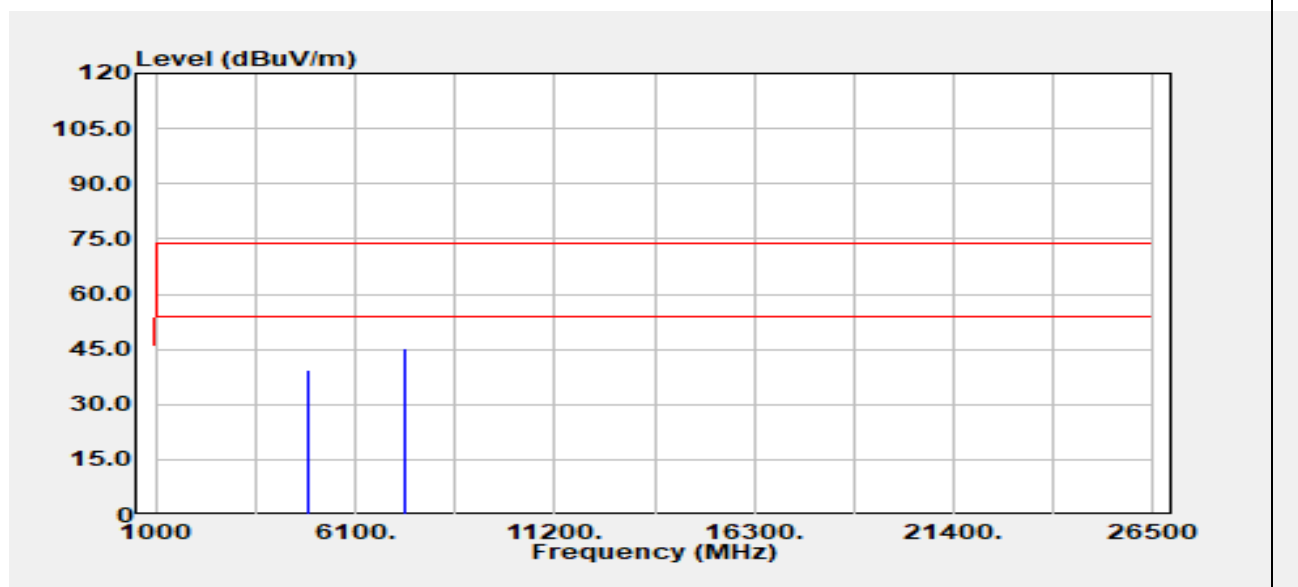


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4904.00	Peak	33.28	6.30	39.58	74.00	-34.42
4904.00	Average	25.07	6.30	31.37	54.00	-22.63
7356.00	Peak	31.92	13.40	45.32	74.00	-28.68
7356.00	Average	23.39	13.40	36.79	54.00	-17.21

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT40 High CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

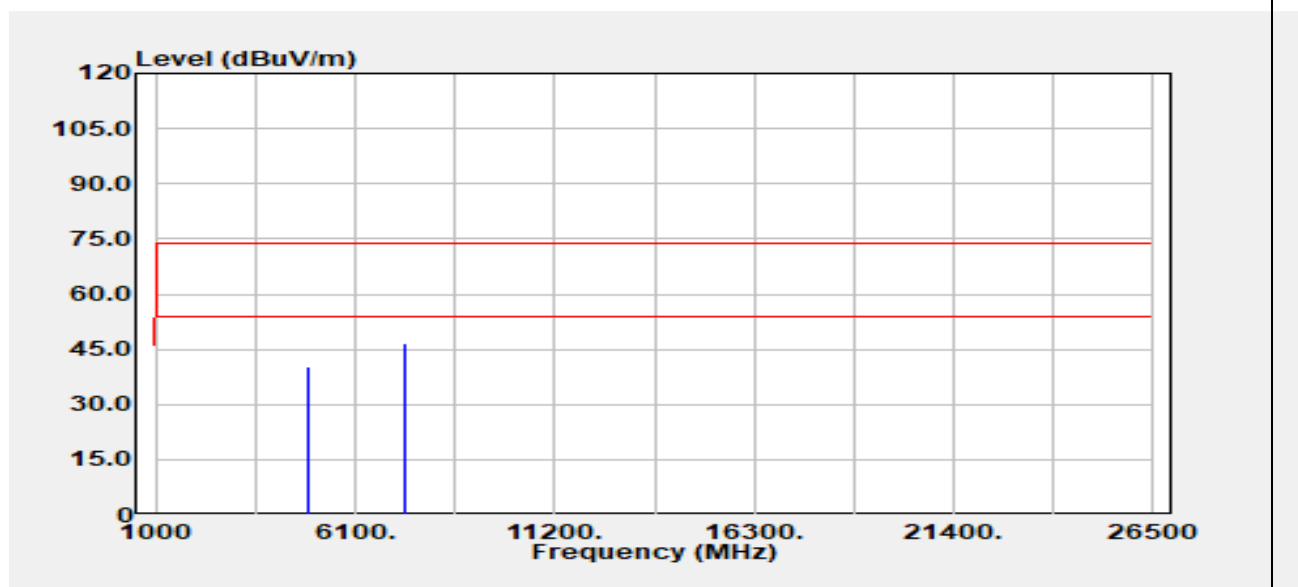


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4904.00	Peak	33.90	6.30	40.20	74.00	-33.80
4904.00	Average	24.61	6.30	30.91	54.00	-23.09
7356.00	Peak	33.38	13.40	46.78	74.00	-27.22
7356.00	Average	23.25	13.40	36.65	54.00	-17.35

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Test Mode	Mode 2 IEEE 802.11ax HE20 Low CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

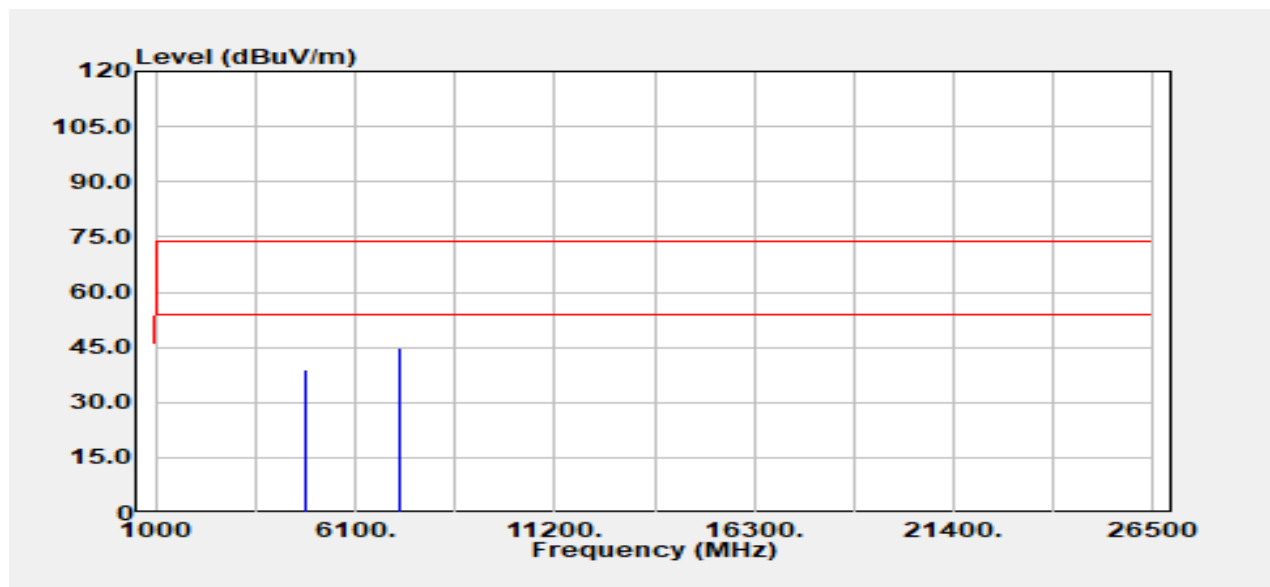


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	33.12	5.90	39.02	74.00	-34.98
4824.00	Average	26.42	5.90	32.32	54.00	-21.68
7236.00	Peak	31.50	13.31	44.81	74.00	-29.19
7236.00	Average	24.52	13.31	37.83	54.00	-16.17

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11ax HE20 Low CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

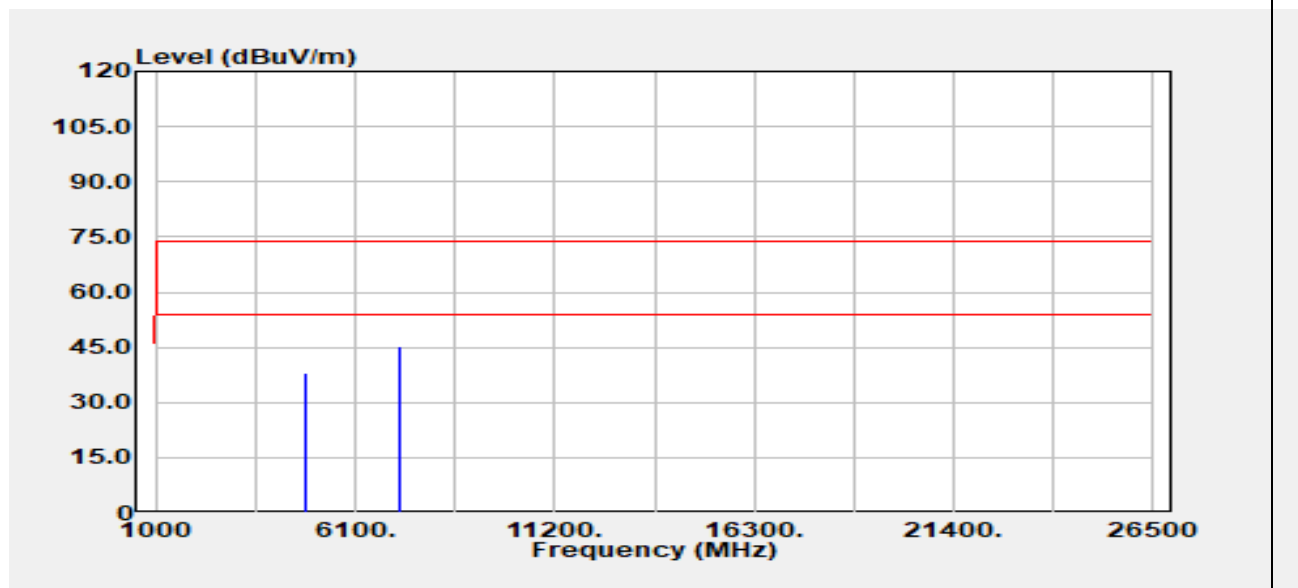


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4824.00	Peak	31.93	5.90	37.83	74.00	-36.17
4824.00	Average	25.39	5.90	31.29	54.00	-22.71
7236.00	Peak	32.01	13.31	45.32	74.00	-28.68
7236.00	Average	24.22	13.31	37.53	54.00	-16.47

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11ax HE20 Mid CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

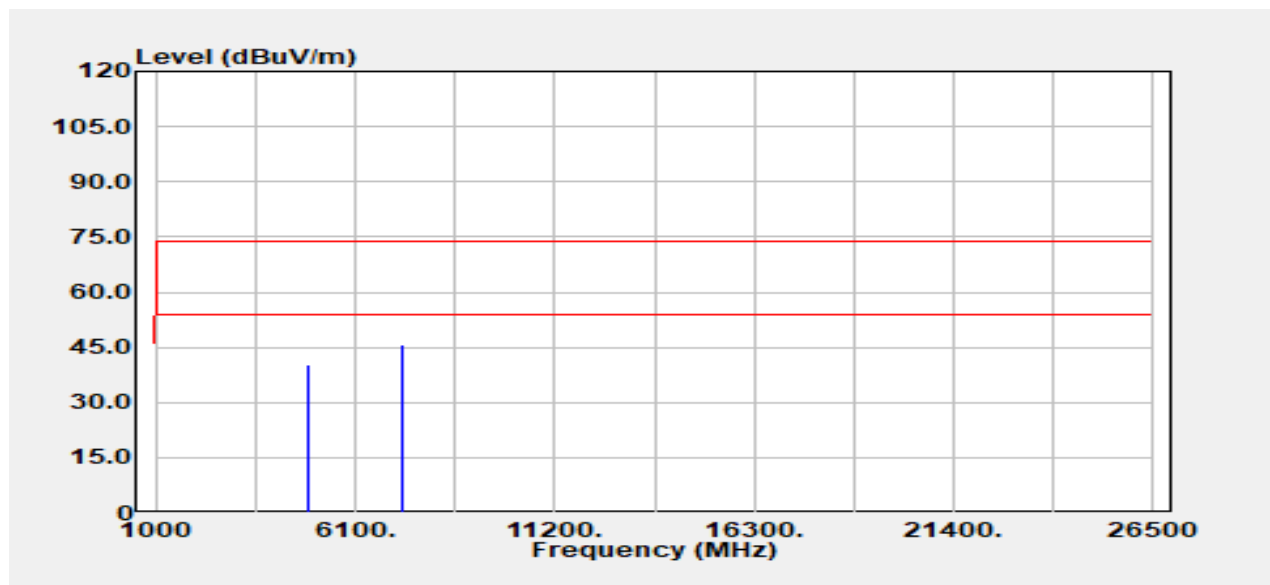


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.00	Peak	34.36	6.09	40.45	74.00	-33.55
4874.00	Average	28.40	6.09	34.49	54.00	-19.51
7311.00	Peak	32.21	13.33	45.54	74.00	-28.46
7311.00	Average	27.83	13.33	41.17	54.00	-12.83

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11ax HE20 Mid CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

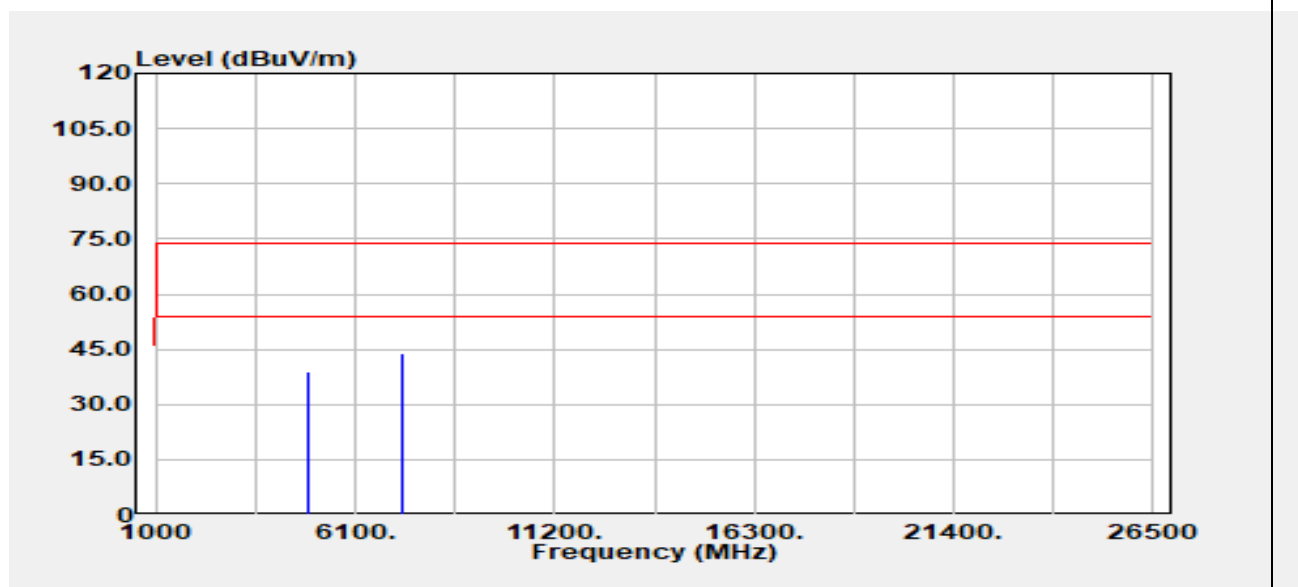


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.00	Peak	32.91	6.09	39.00	74.00	-35.00
4874.00	Average	25.40	6.09	31.49	54.00	-22.51
7311.00	Peak	30.75	13.33	44.08	74.00	-29.92
7311.00	Average	24.68	13.33	38.02	54.00	-15.98

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11ax HE20 High CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

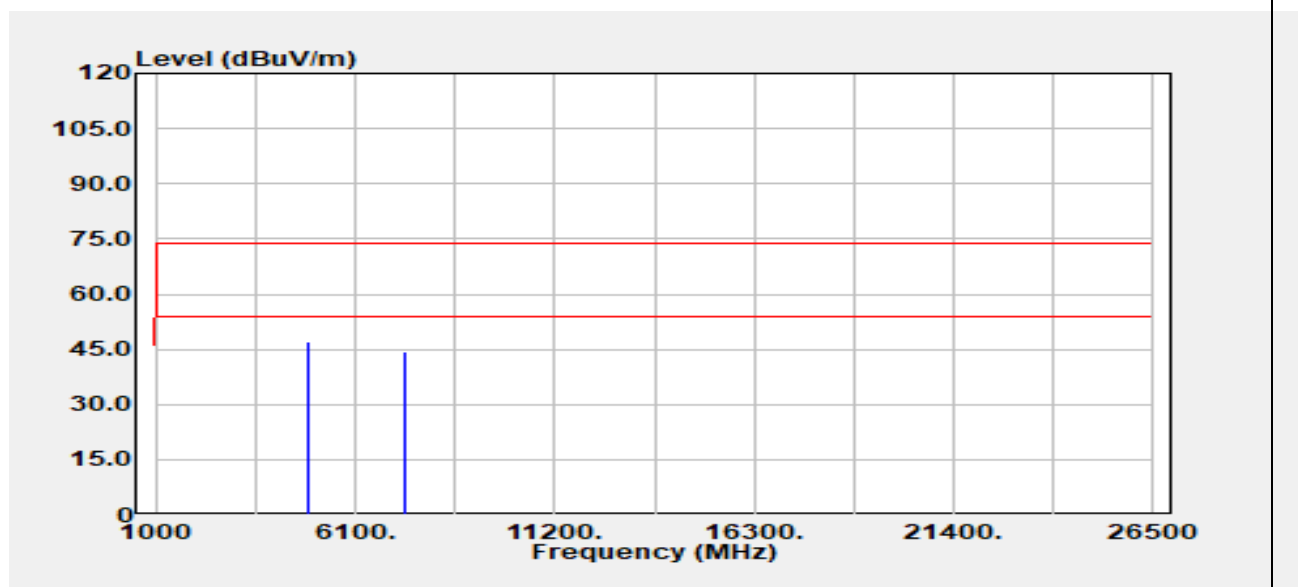


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4924.00	Peak	40.73	6.53	47.26	74.00	-26.74
4924.00	Average	29.66	6.53	36.19	54.00	-17.81
7386.00	Peak	31.25	13.33	44.58	74.00	-29.42
7386.00	Average	24.38	13.33	37.71	54.00	-16.29

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11ax HE20 High CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

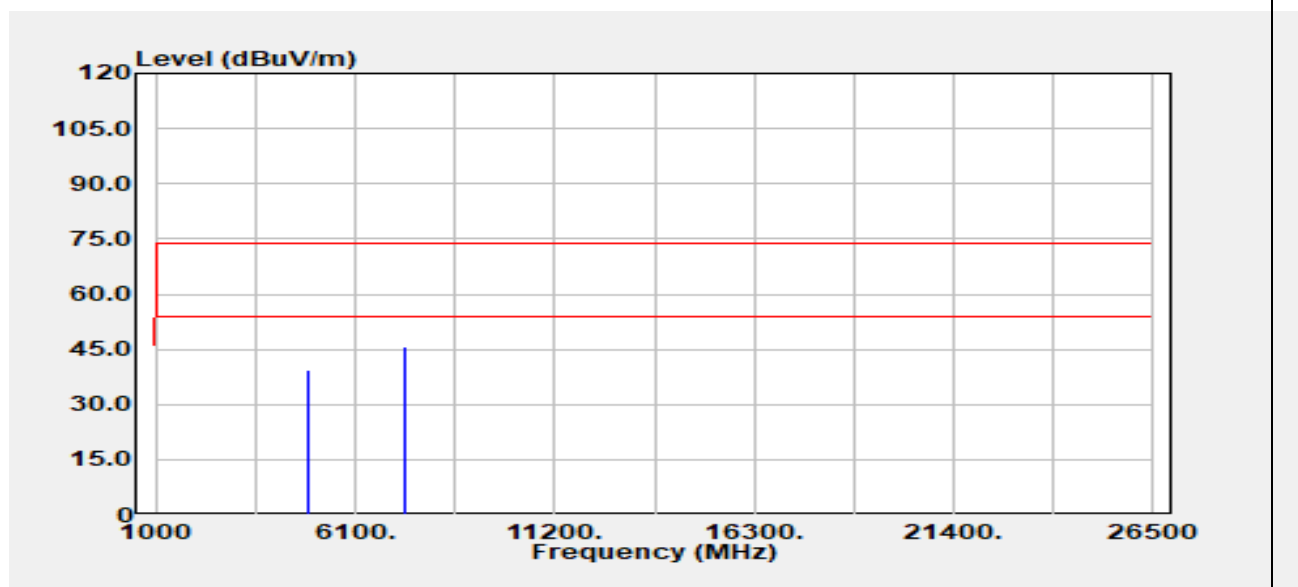


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4924.00	Peak	32.66	6.53	39.19	74.00	-34.81
4924.00	Average	25.50	6.53	32.03	54.00	-21.97
7386.00	Peak	32.62	13.33	45.95	74.00	-28.05
7386.00	Average	24.47	13.33	37.80	54.00	-16.20

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11ax HE40 Low CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

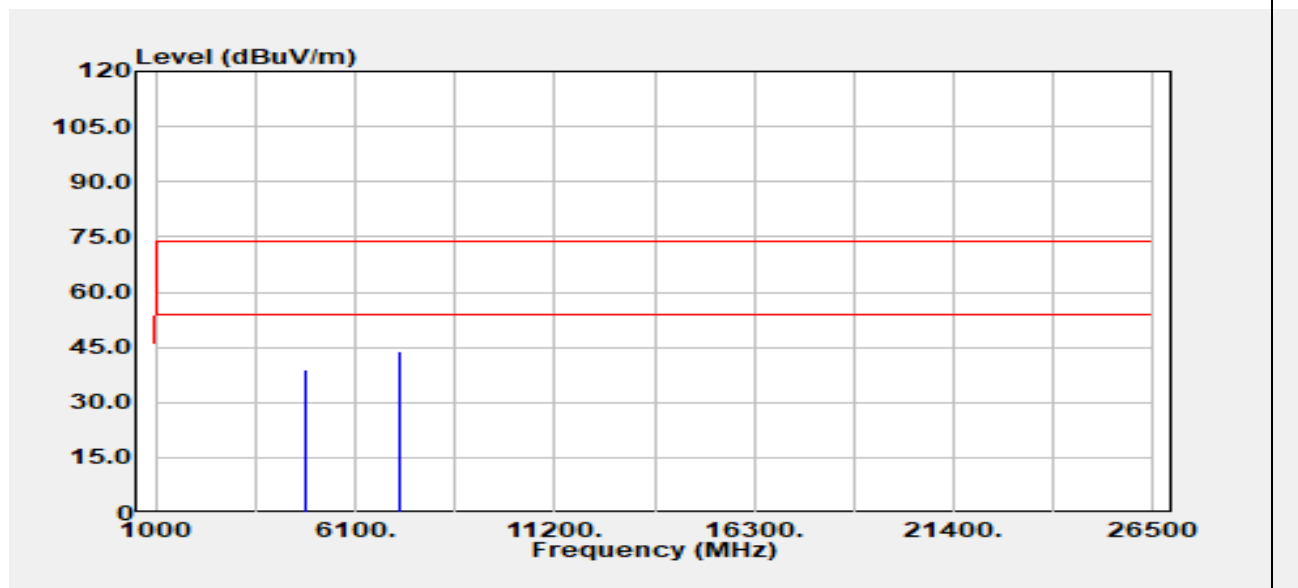


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4844.00	Peak	32.96	5.93	38.89	74.00	-35.11
4844.00	Average	26.79	5.93	32.72	54.00	-21.28
7266.00	Peak	30.75	13.33	44.08	74.00	-29.92
7266.00	Average	24.23	13.33	37.56	54.00	-16.44

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11ax HE40 Low CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

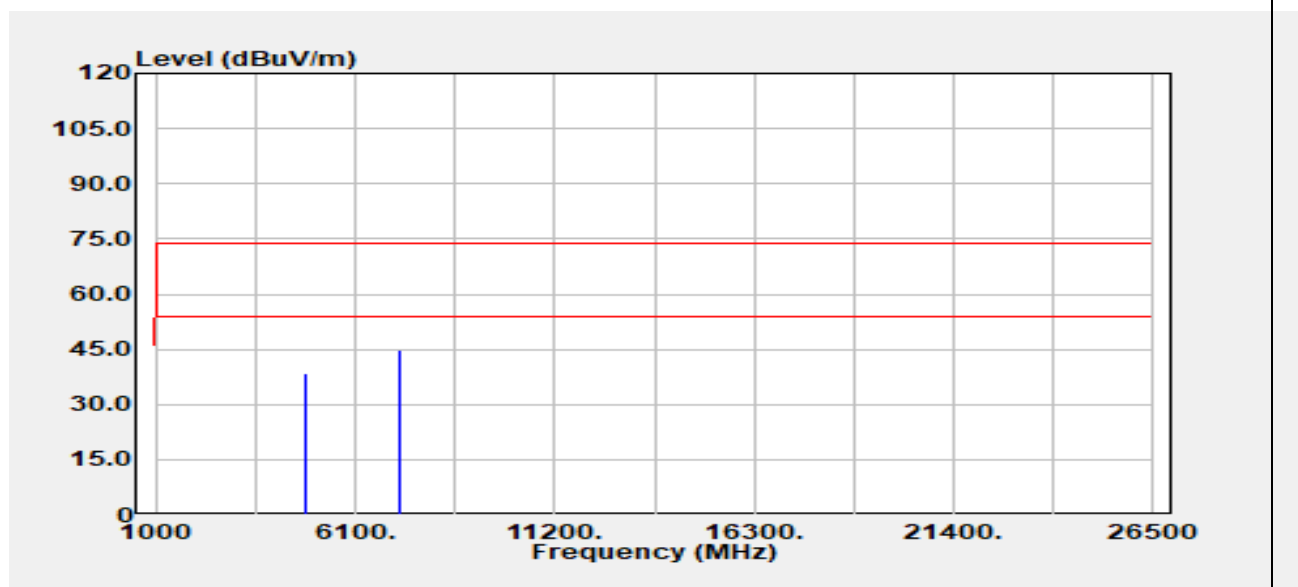

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4844.00	Peak	32.41	5.93	38.35	74.00	-35.65
4844.00	Average	25.41	5.93	31.34	54.00	-22.66
7266.00	Peak	31.71	13.33	45.04	74.00	-28.96
7266.00	Average	24.23	13.33	37.56	54.00	-16.44


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE40 Mid CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

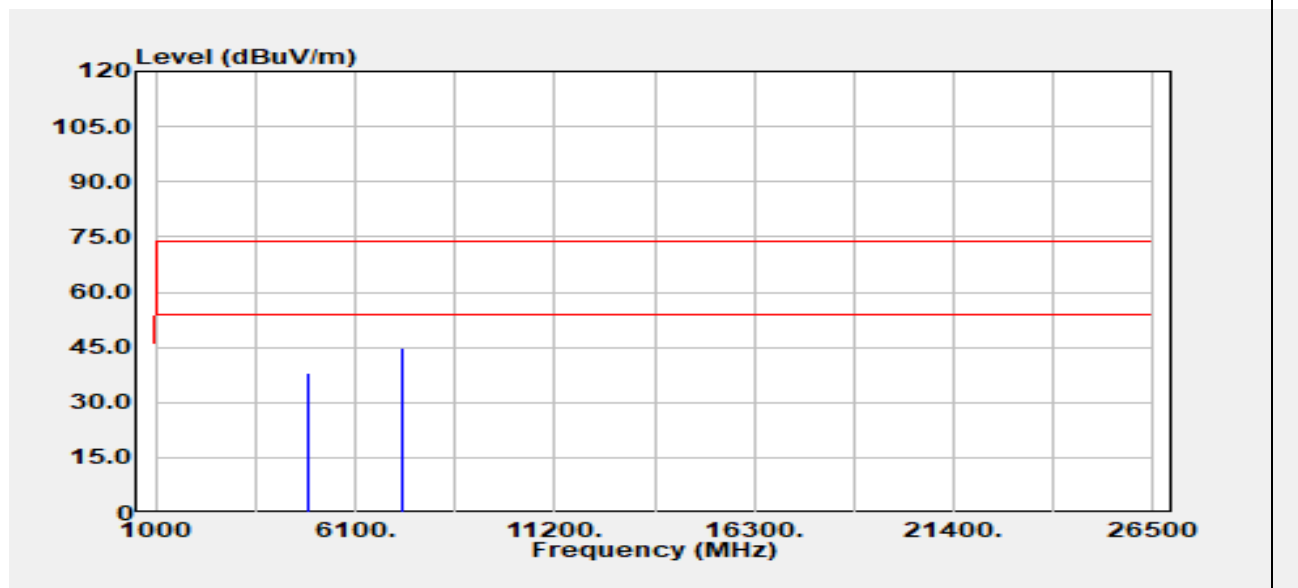


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.00	Peak	32.11	6.09	38.19	74.00	-35.81
4874.00	Average	26.17	6.09	32.25	54.00	-21.75
7311.00	Peak	31.30	13.33	44.63	74.00	-29.37
7311.00	Average	24.20	13.33	37.53	54.00	-16.47

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE40 Mid CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

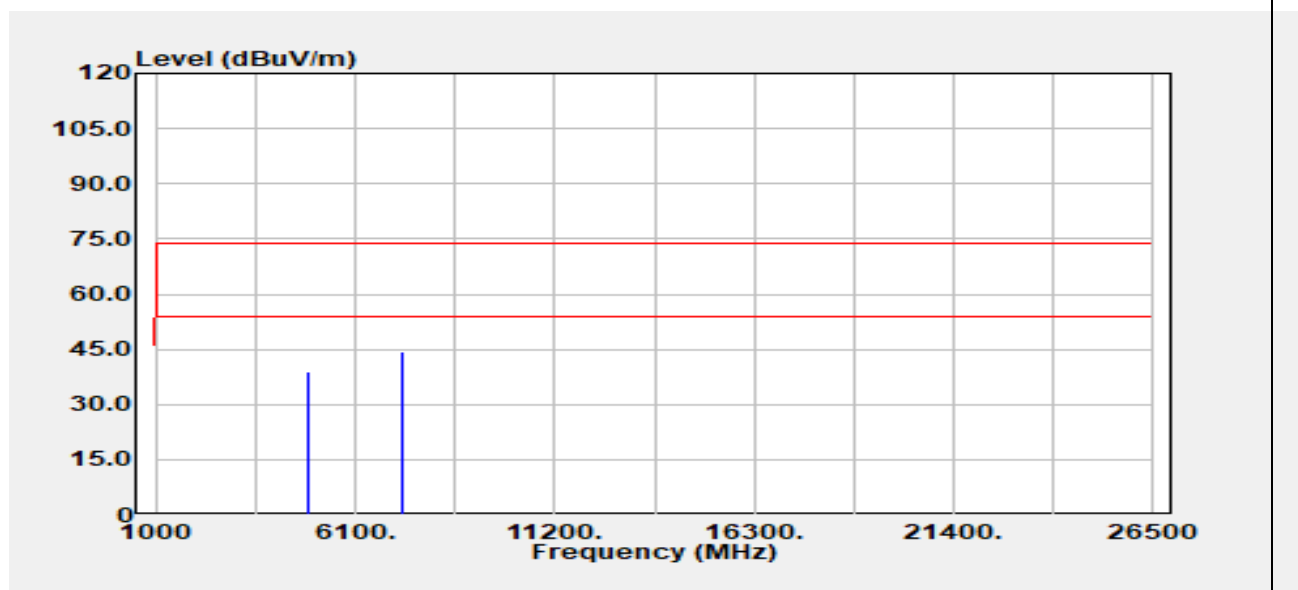


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.00	Peak	32.78	6.09	38.87	74.00	-35.13
4874.00	Average	25.27	6.09	31.35	54.00	-22.65
7311.00	Peak	31.11	13.33	44.44	74.00	-29.56
7311.00	Average	24.20	13.33	37.53	54.00	-16.47

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11ax HE40 High CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

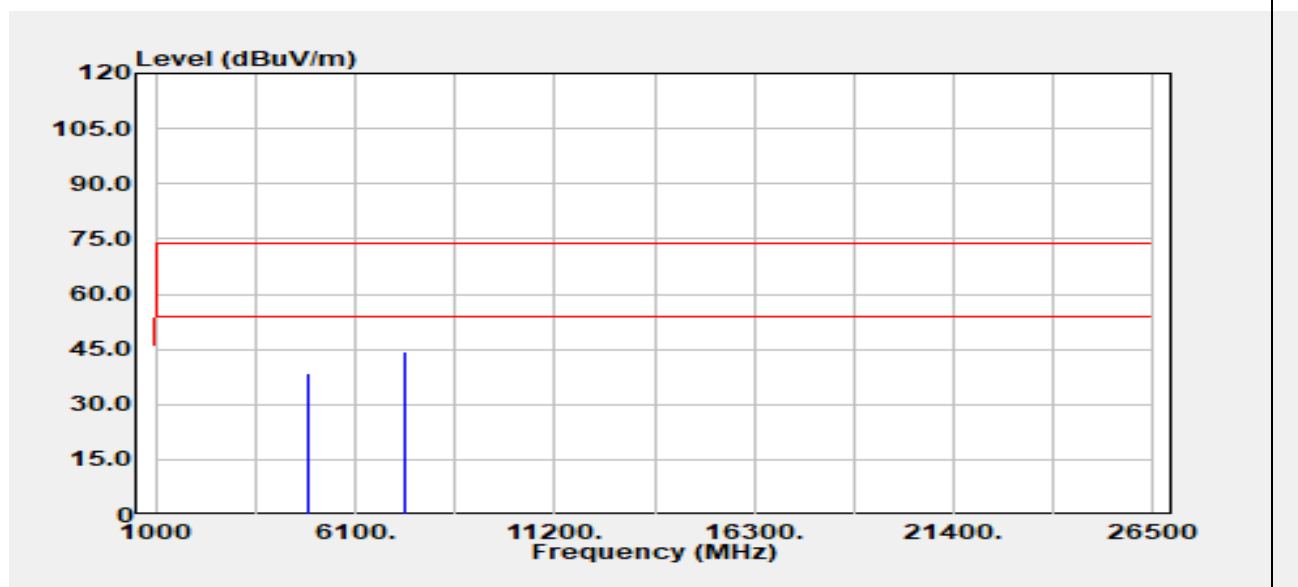


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4904.00	Peak	32.31	6.30	38.61	74.00	-35.39
4904.00	Average	25.70	6.30	31.99	54.00	-22.01
7356.00	Peak	31.14	13.40	44.53	74.00	-29.47
7356.00	Average	24.15	13.40	37.55	54.00	-16.45

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE40 High CH	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

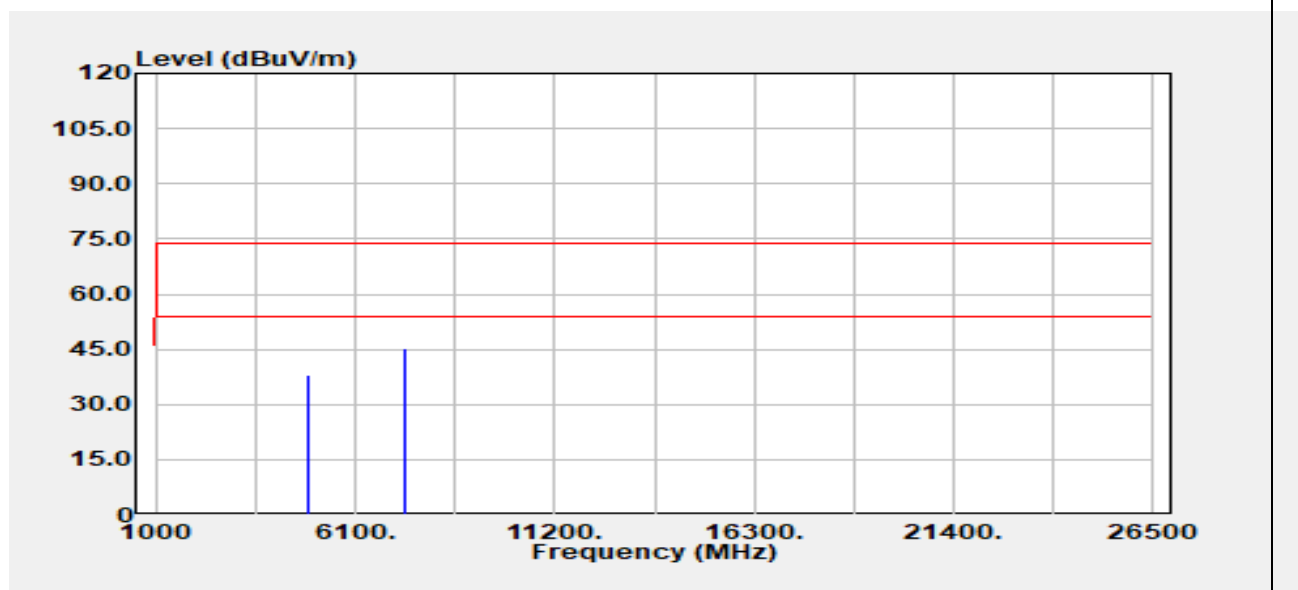

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4904.00	Peak	31.83	6.30	38.13	74.00	-35.87
4904.00	Average	25.62	6.30	31.92	54.00	-22.08
7356.00	Peak	32.10	13.40	45.50	74.00	-28.50
7356.00	Average	24.11	13.40	37.51	54.00	-16.49

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

- End of Test Report -