



4.5.3 Test Setup


9kHz ~ 30MHz

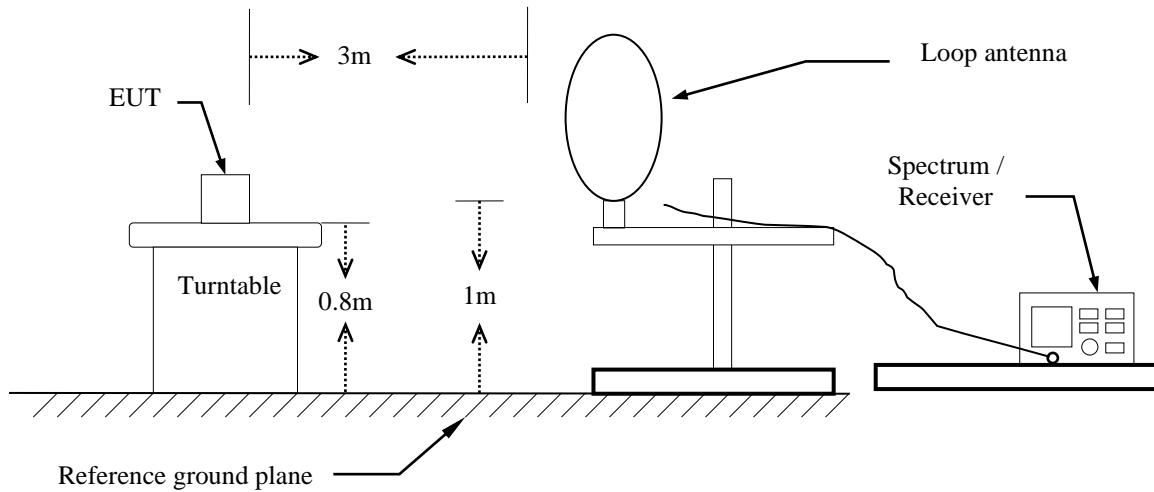

30MHz ~ 1GHz

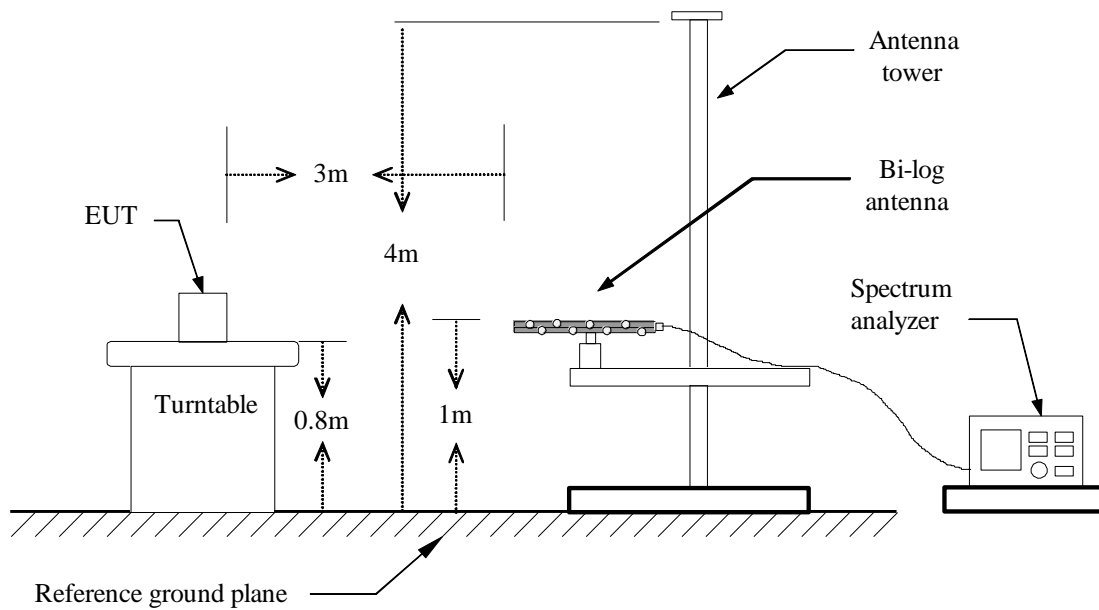

Above 1 GHz

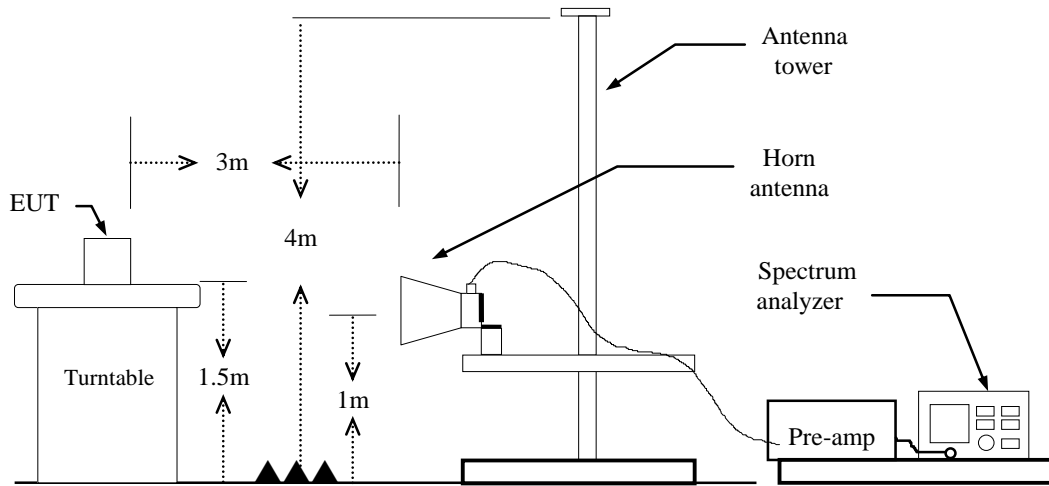


Report No.: TMWK2209003822KR

4.5.4 Test Result

Band Edge Test Data


Test Data for UNII-1

Test Mode	Mode 2 IEEE 802.11a / 5180 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

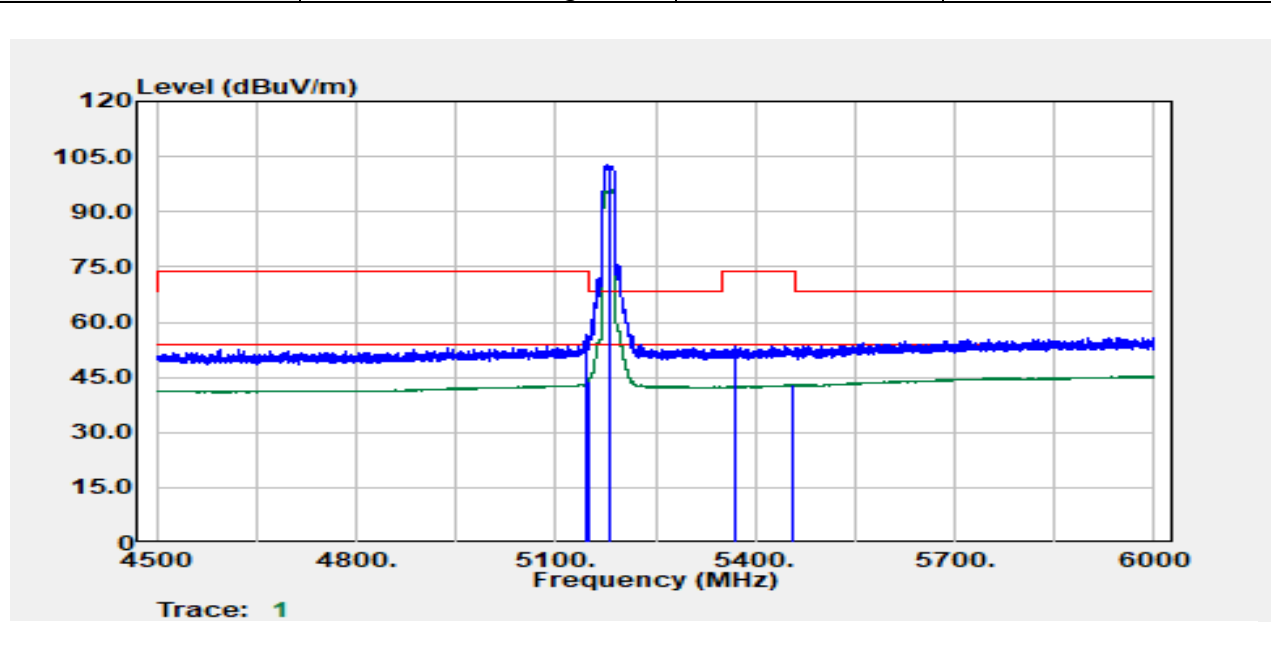


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5146.50	Peak	39.69	16.91	56.60	74.00	-17.40
5149.80	Average	27.00	16.91	43.91	54.00	-10.09
5180.00	Peak	85.78	17.00	102.78	--	--
5180.00	Average	79.25	17.00	96.25	--	--
5369.70	Peak	36.37	17.27	53.64	74.00	-20.36
5457.00	Average	25.46	17.48	42.95	54.00	-11.05

Test Mode	Mode 2 IEEE 802.11a / 5180 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

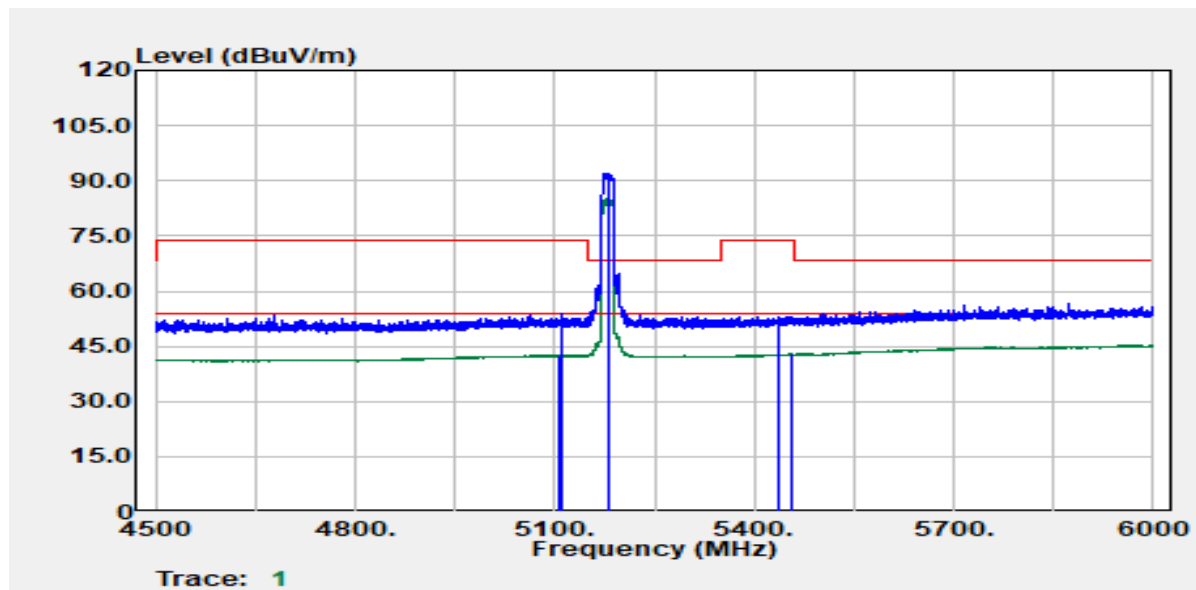


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5106.60	Average	25.65	16.88	42.53	54.00	-11.47
5112.00	Peak	37.04	16.89	53.93	74.00	-20.07
5180.00	Peak	74.91	17.00	91.91	--	--
5180.00	Average	68.17	17.00	85.17	--	--
5436.90	Peak	35.70	17.45	53.15	74.00	-20.85
5455.50	Average	25.33	17.49	42.82	54.00	-11.18

Test Mode	Mode 2 IEEE 802.11n HT20 / 5180 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

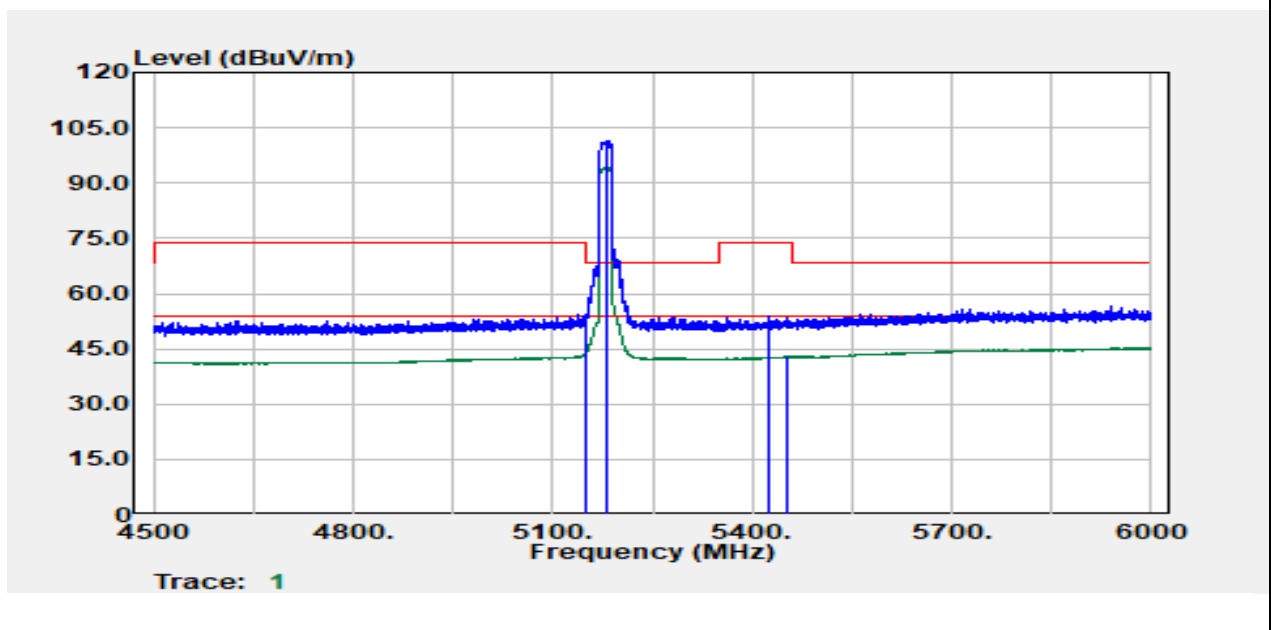

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5148.90	Peak	37.62	16.91	54.53	74.00	-19.47
5149.80	Average	26.89	16.91	43.80	54.00	-10.20
5180.00	Peak	84.38	17.00	101.38	--	--
5180.00	Average	77.29	17.00	94.29	--	--
5425.20	Peak	36.31	17.41	53.72	74.00	-20.28
5454.00	Average	25.37	17.49	42.86	54.00	-11.14


Test Mode	Mode 2 IEEE 802.11n HT20 / 5180 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

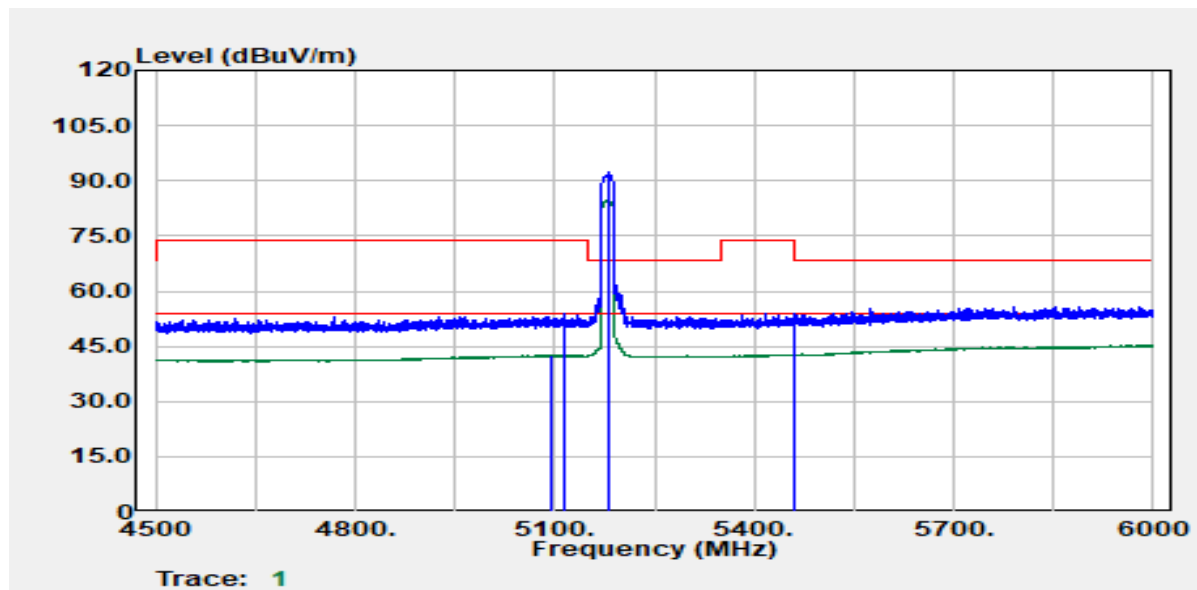

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5096.10	Average	25.63	16.86	42.49	54.00	-11.51
5113.80	Peak	36.95	16.89	53.84	74.00	-20.16
5180.00	Peak	75.24	17.00	92.24	--	--
5180.00	Average	67.48	17.00	84.48	--	--
5459.10	Peak	36.46	17.48	53.94	74.00	-20.06
5459.70	Average	25.36	17.48	42.84	54.00	-11.16


Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT40 / 5190 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

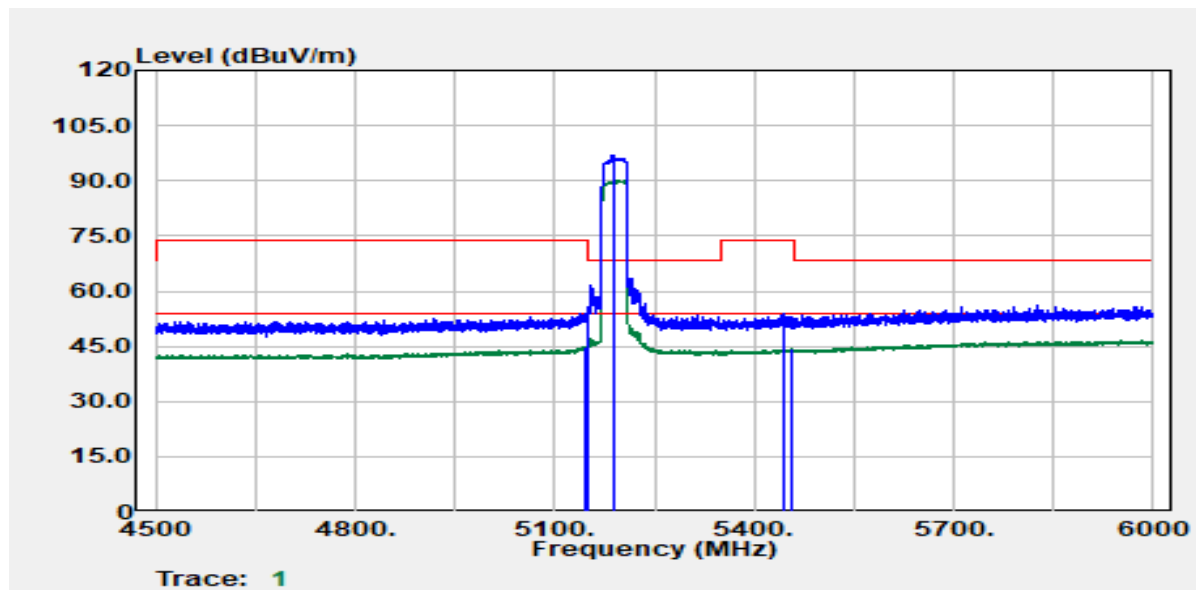

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5147.10	Average	27.94	16.91	44.84	54.00	-9.16
5148.30	Peak	37.56	16.91	54.47	74.00	-19.53
5190.00	Peak	79.97	17.03	97.00	--	--
5190.00	Average	73.00	17.03	90.03	--	--
5442.60	Peak	36.43	17.47	53.89	74.00	-20.11
5456.10	Average	26.98	17.49	44.47	54.00	-9.53


Test Mode	Mode 2 IEEE 802.11n HT40 / 5190 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

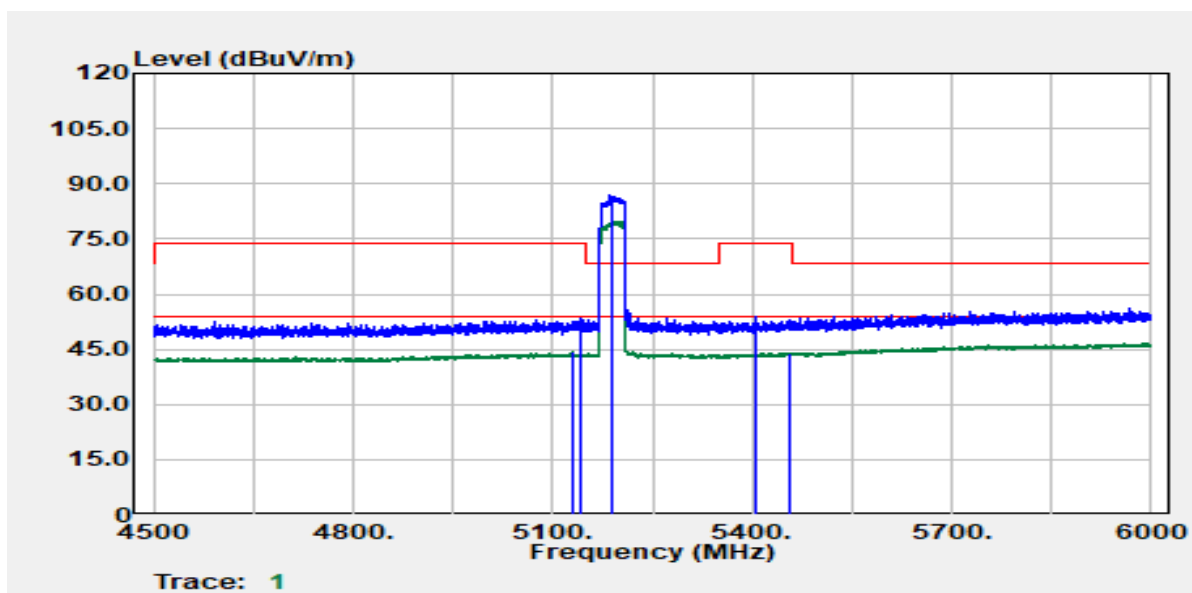

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5128.20	Average	27.50	16.90	44.40	54.00	-9.60
5140.80	Peak	36.48	16.90	53.38	74.00	-20.62
5190.00	Peak	69.72	17.03	86.75	--	--
5190.00	Average	62.88	17.03	79.91	--	--
5403.90	Peak	36.64	17.34	53.98	74.00	-20.02
5455.80	Average	26.47	17.49	43.96	54.00	-10.04

Report No.: TMWK2209003822KR


Test Mode	Mode 2 IEEE 802.11ac VHT80 / 5210 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

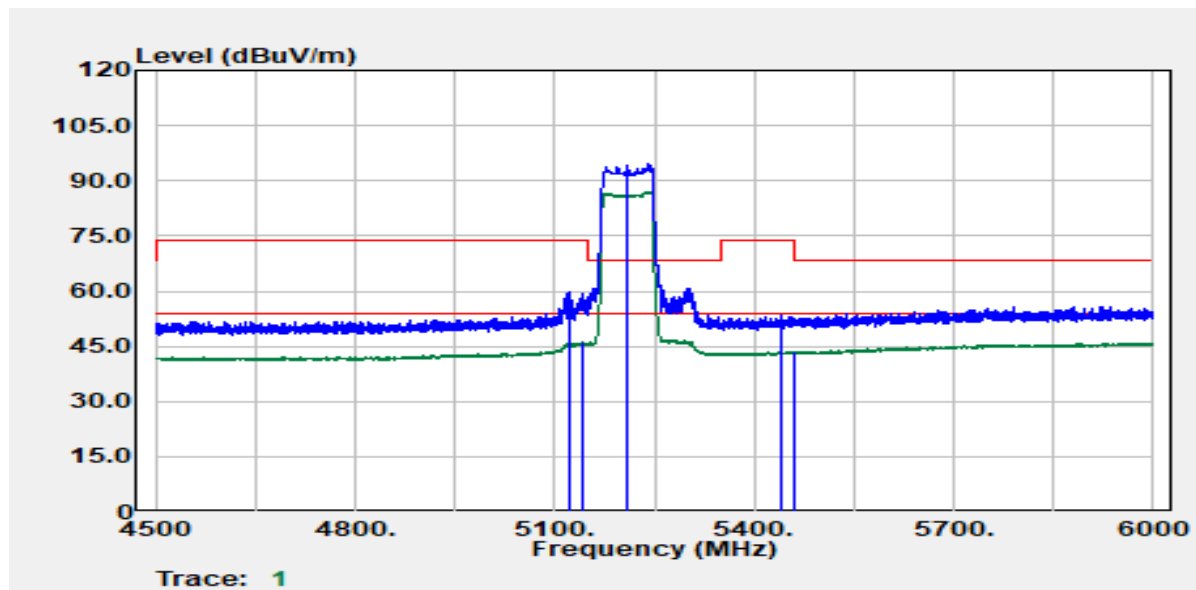

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5120.70	Peak	43.05	16.89	59.95	74.00	-14.05
5140.50	Average	29.12	16.90	46.03	54.00	-7.97
5210.00	Peak	77.41	17.07	94.48	--	--
5210.00	Average	70.07	17.07	87.13	--	--
5441.40	Peak	36.03	17.46	53.50	74.00	-20.50
5460.00	Average	25.97	17.48	43.45	54.00	-10.55


Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ac VHT80 / 5210 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

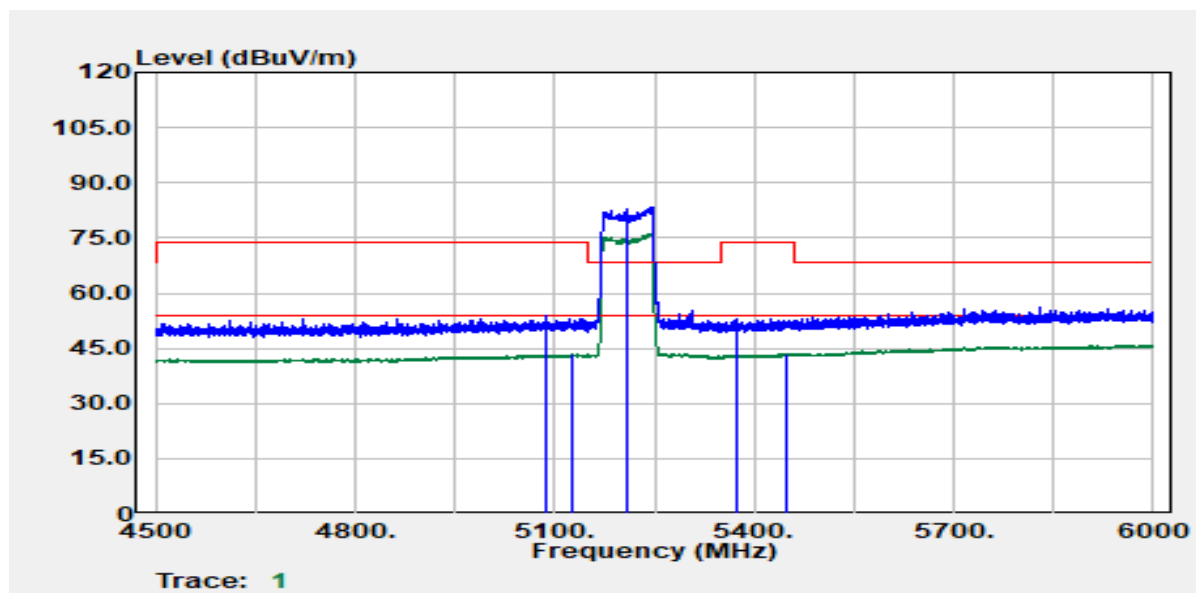


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5086.20	Peak	36.94	16.80	53.74	74.00	-20.26
5126.10	Average	26.51	16.90	43.40	54.00	-10.60
5210.00	Peak	66.29	17.07	83.36	--	--
5210.00	Average	59.19	17.07	76.26	--	--
5373.90	Peak	35.83	17.28	53.11	74.00	-20.89
5447.40	Average	25.94	17.48	43.42	54.00	-10.58

Test Mode	Mode 2 IEEE 802.11ax HE20 / 5180 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

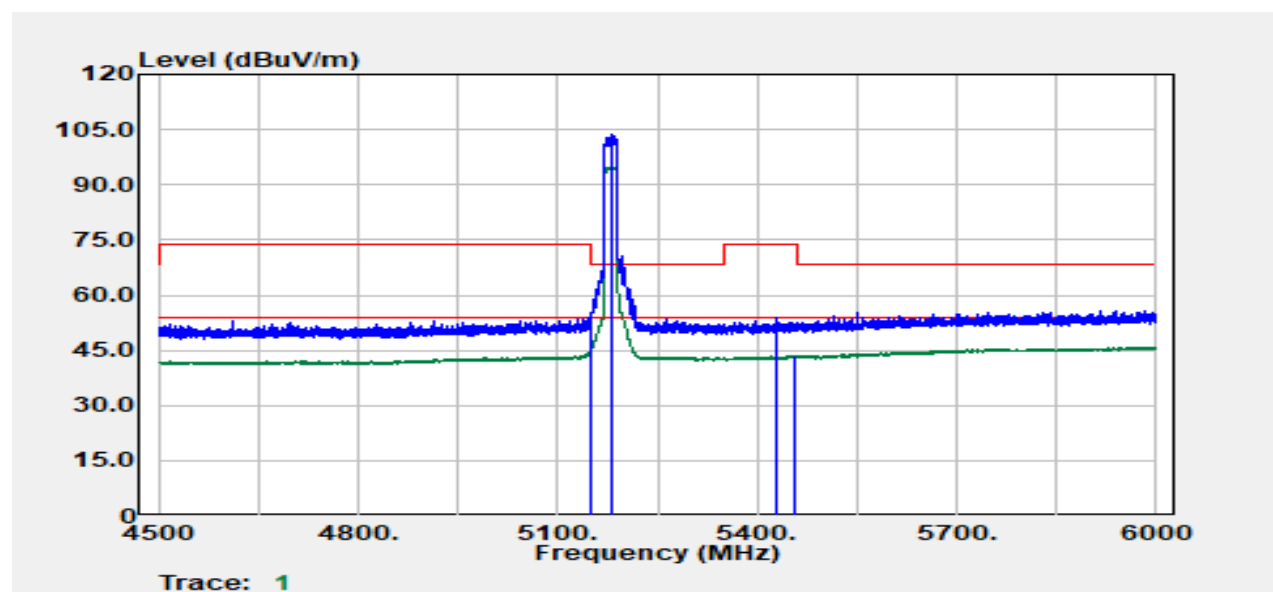


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5149.20	Peak	38.06	16.91	54.97	74.00	-19.03
5149.80	Average	28.14	16.91	45.05	54.00	-8.95
5180.00	Peak	86.56	17.00	103.56	--	--
5180.00	Average	77.95	17.00	94.95	--	--
5430.60	Peak	36.27	17.43	53.70	74.00	-20.30
5457.90	Average	25.92	17.48	43.40	54.00	-10.60

Test Mode	Mode 2 IEEE 802.11ax HE20 / 5180 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

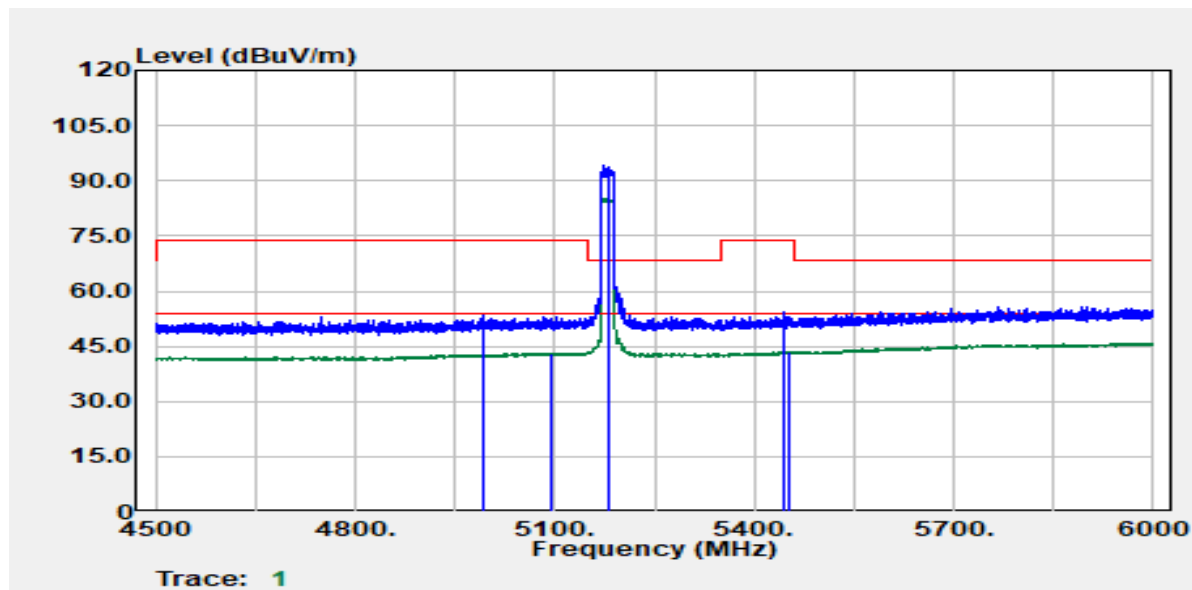


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4992.00	Peak	37.09	16.17	53.27	74.00	-20.73
5095.50	Average	26.30	16.85	43.16	54.00	-10.84
5180.00	Peak	77.16	17.00	94.16	--	--
5180.00	Average	68.35	17.00	85.35	--	--
5443.80	Peak	36.97	17.47	54.44	74.00	-19.56
5451.90	Average	26.04	17.49	43.53	54.00	-10.47

Test Mode	Mode 2 IEEE 802.11ax HE20 (26/0) / 5180 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

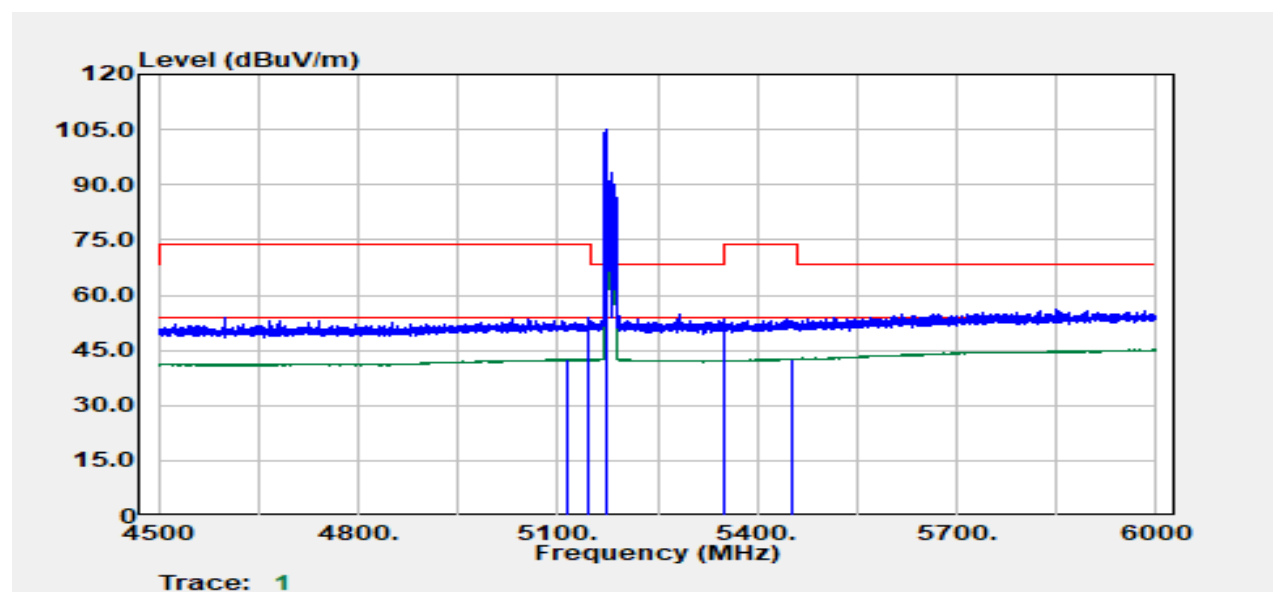


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5112.60	Average	25.62	16.89	42.51	54.00	-11.49
5144.40	Peak	37.15	16.91	54.06	74.00	-19.94
5171.70	Average	76.79	16.98	93.76	--	--
5172.00	Peak	88.21	16.98	105.19	--	--
5351.10	Peak	36.04	17.23	53.27	74.00	-20.73
5451.90	Average	25.25	17.49	42.74	54.00	-11.26

Test Mode	Mode 2 IEEE 802.11ax HE20 (26/0) / 5180 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

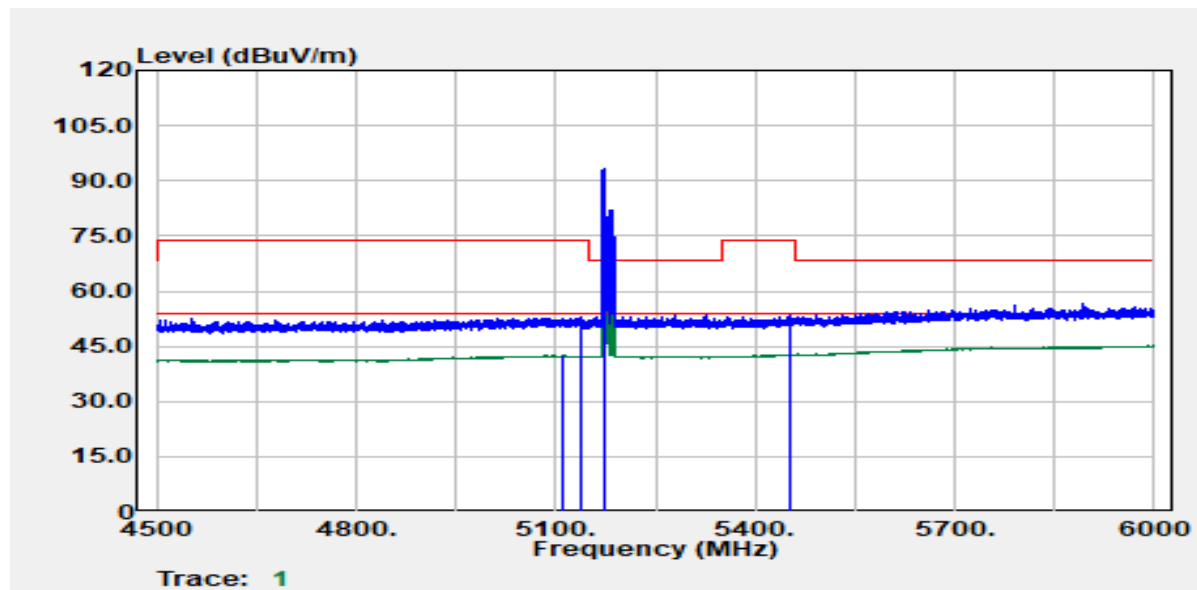


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5109.90	Average	25.54	16.89	42.42	54.00	-11.58
5139.30	Peak	36.00	16.90	52.90	74.00	-21.10
5171.70	Average	58.78	16.98	75.75	--	--
5172.30	Peak	76.50	16.98	93.48	--	--
5451.90	Peak	35.78	17.49	53.27	74.00	-20.73
5452.20	Average	25.29	17.49	42.78	54.00	-11.22

Test Mode	Mode 2 IEEE 802.11ax HE20 (52/37) / 5180 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

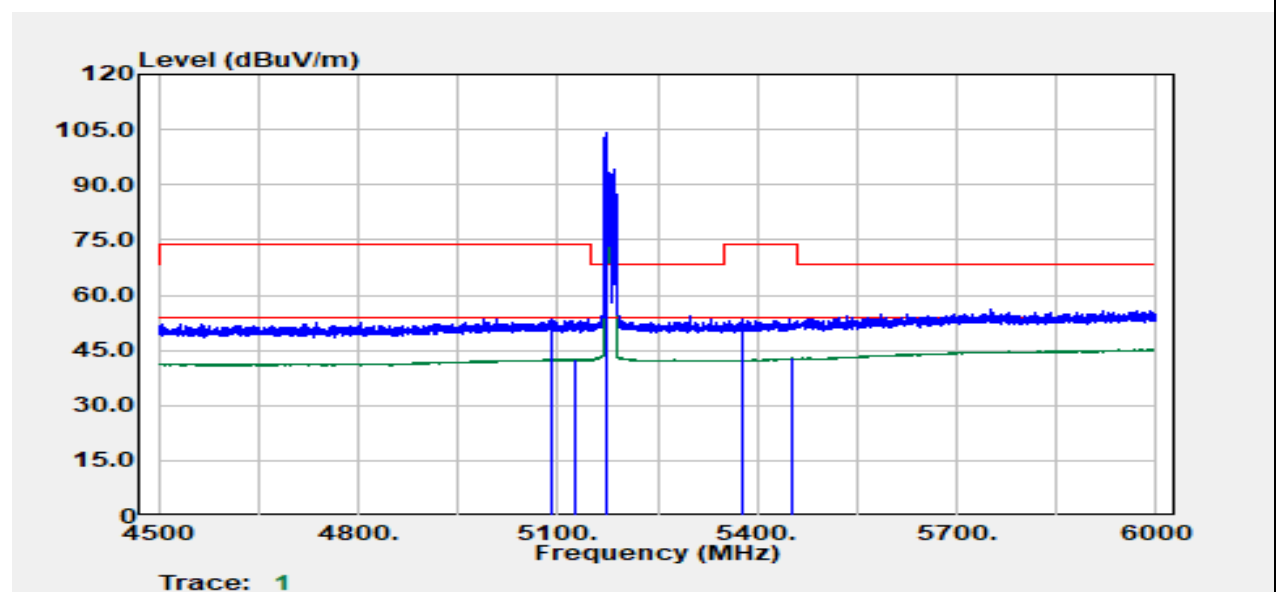


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5089.80	Peak	36.78	16.82	53.60	74.00	-20.40
5124.60	Average	25.67	16.89	42.56	54.00	-11.44
5173.50	Average	77.01	16.98	93.99	--	--
5173.80	Peak	86.96	16.98	103.94	--	--
5376.60	Peak	36.07	17.28	53.35	74.00	-20.65
5451.90	Average	25.33	17.49	42.81	54.00	-11.19

Test Mode	Mode 2 IEEE 802.11ax HE20 (52/37) / 5180 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

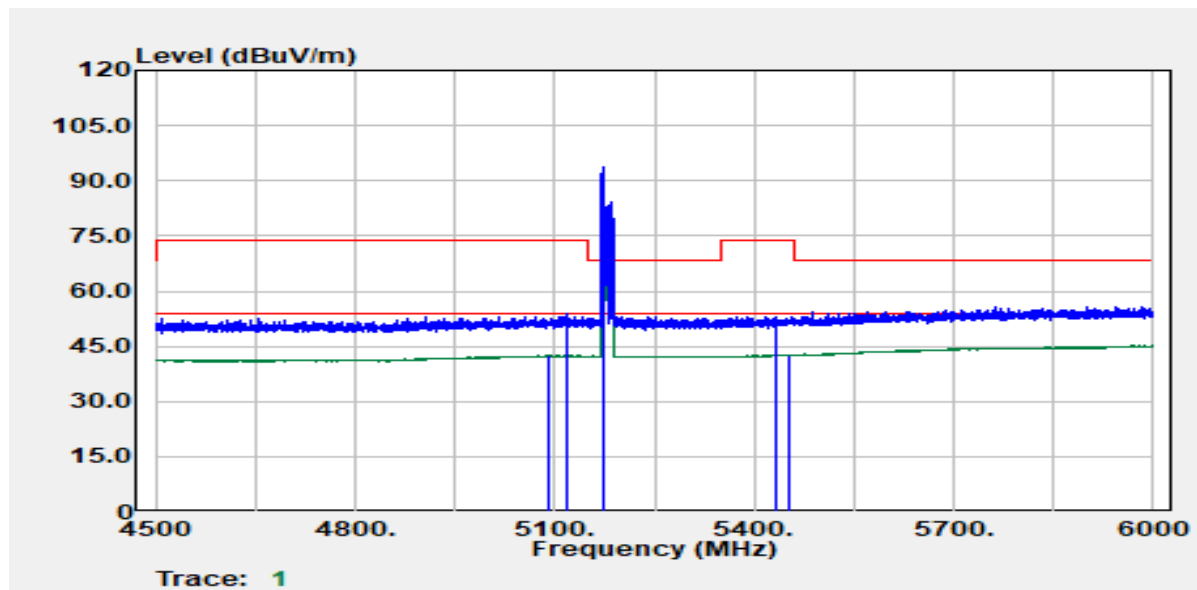


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5090.40	Average	25.60	16.83	42.42	54.00	-11.58
5120.10	Peak	36.78	16.89	53.67	74.00	-20.33
5173.20	Peak	76.80	16.98	93.78	--	--
5173.50	Average	66.67	16.98	83.65	--	--
5434.20	Peak	35.57	17.44	53.01	74.00	-20.99
5452.20	Average	25.25	17.49	42.74	54.00	-11.26

Test Mode	Mode 2 IEEE 802.11ax HE20 (106/53) / 5180 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

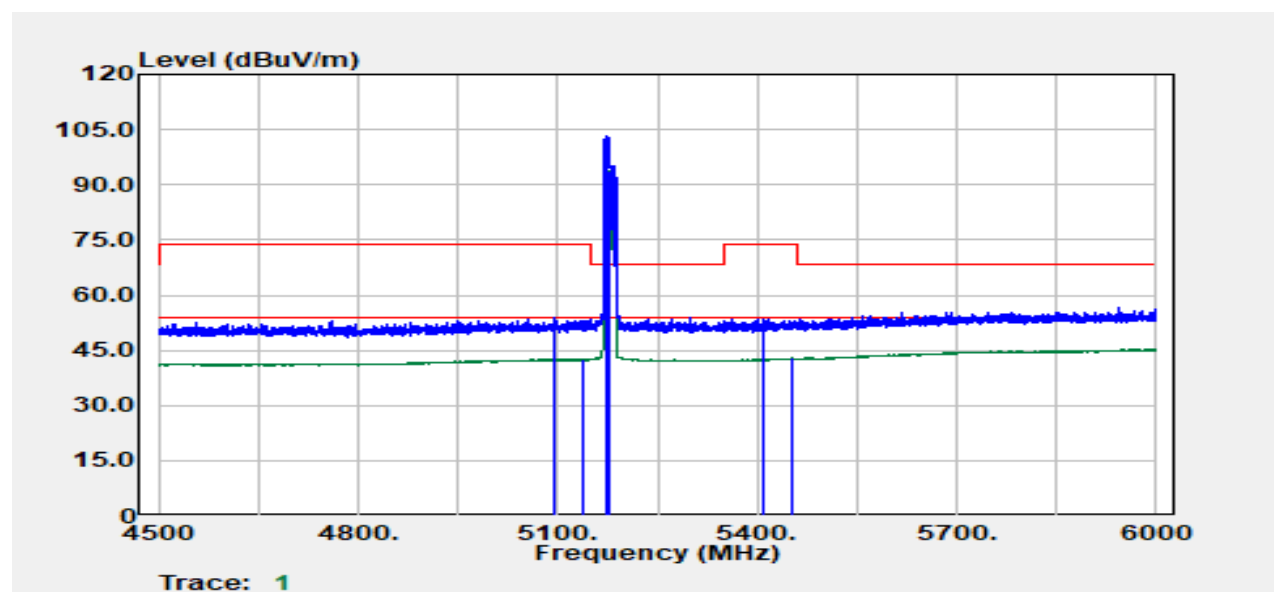


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5094.60	Peak	37.17	16.85	54.02	74.00	-19.98
5136.60	Average	25.68	16.90	42.58	54.00	-11.42
5172.60	Peak	86.48	16.98	103.45	--	--
5177.10	Average	76.63	16.99	93.63	--	--
5409.90	Peak	36.11	17.36	53.47	74.00	-20.53
5450.70	Average	25.38	17.49	42.87	54.00	-11.13

Test Mode	Mode 2 IEEE 802.11ax HE20 (106/53) / 5180 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

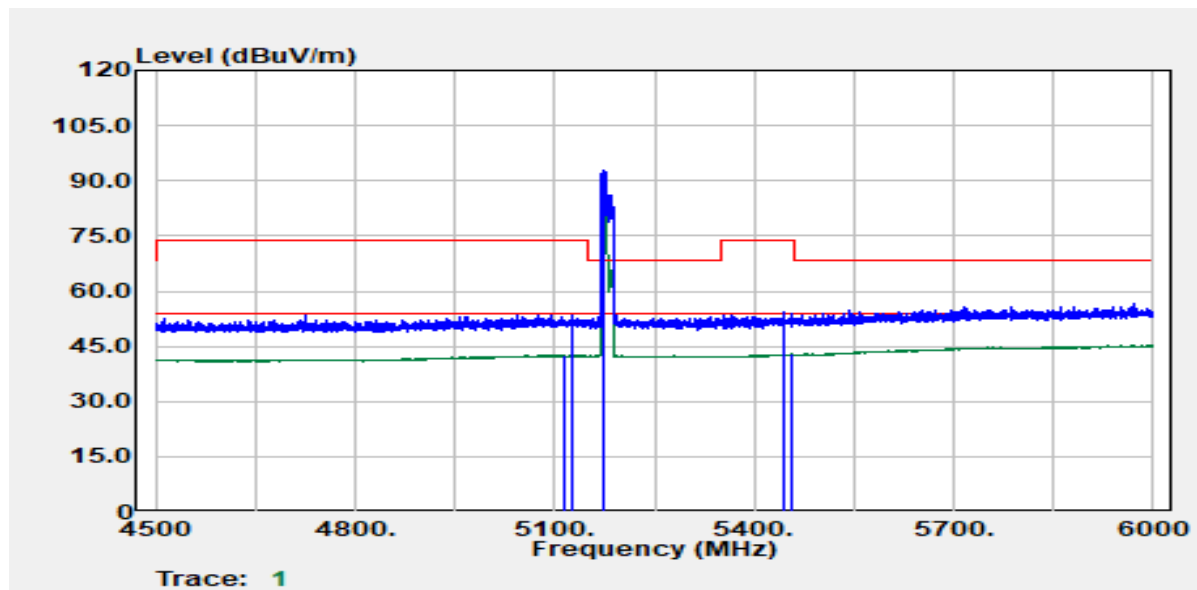


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5112.60	Average	25.57	16.89	42.46	54.00	-11.54
5127.30	Peak	36.75	16.90	53.65	74.00	-20.35
5174.70	Peak	75.88	16.98	92.86	--	--
5174.70	Average	65.81	16.98	82.79	--	--
5445.00	Peak	36.80	17.47	54.27	74.00	-19.73
5456.10	Average	25.31	17.49	42.80	54.00	-11.20

Test Mode	Mode 2 IEEE 802.11ax HE40 / 5190 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

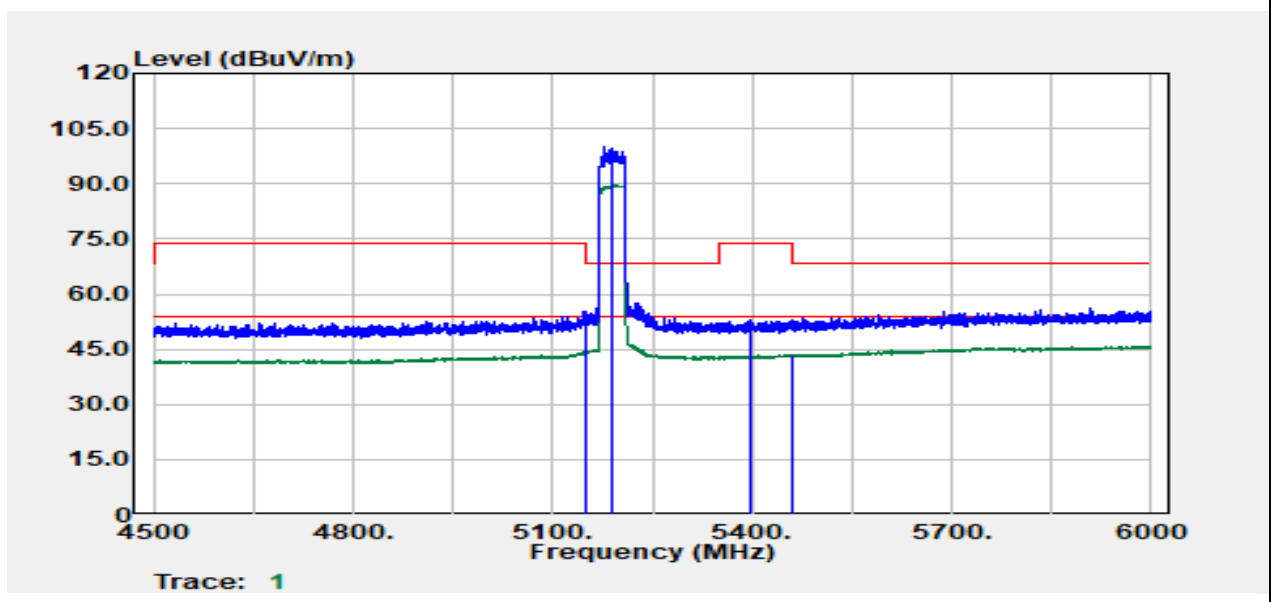

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5149.20	Peak	38.23	16.91	55.14	74.00	-18.86
5149.80	Average	27.57	16.91	44.48	54.00	-9.52
5190.00	Peak	83.03	17.03	100.06	--	--
5190.00	Average	72.56	17.03	89.59	--	--
5395.50	Peak	35.76	17.32	53.08	74.00	-20.92
5458.80	Average	25.88	17.48	43.37	54.00	-10.63


Test Mode	Mode 2 IEEE 802.11ax HE40 / 5190 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

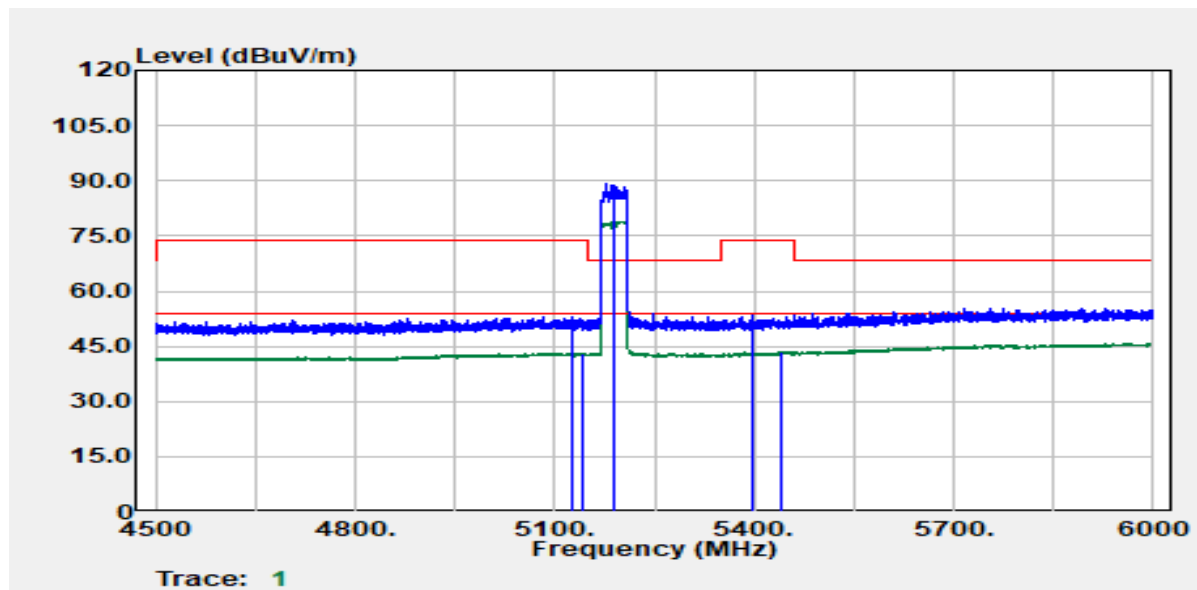

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5126.40	Peak	36.31	16.90	53.20	74.00	-20.80
5141.40	Average	26.33	16.90	43.24	54.00	-10.76
5190.00	Peak	72.24	17.03	89.27	--	--
5190.00	Average	61.95	17.03	78.98	--	--
5398.80	Peak	36.03	17.33	53.36	74.00	-20.64
5440.50	Average	25.90	17.46	43.36	54.00	-10.64

Report No.: TMWK2209003822KR


Test Mode	Mode 2 IEEE 802.11ax HE40 (242/61) / 5190 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

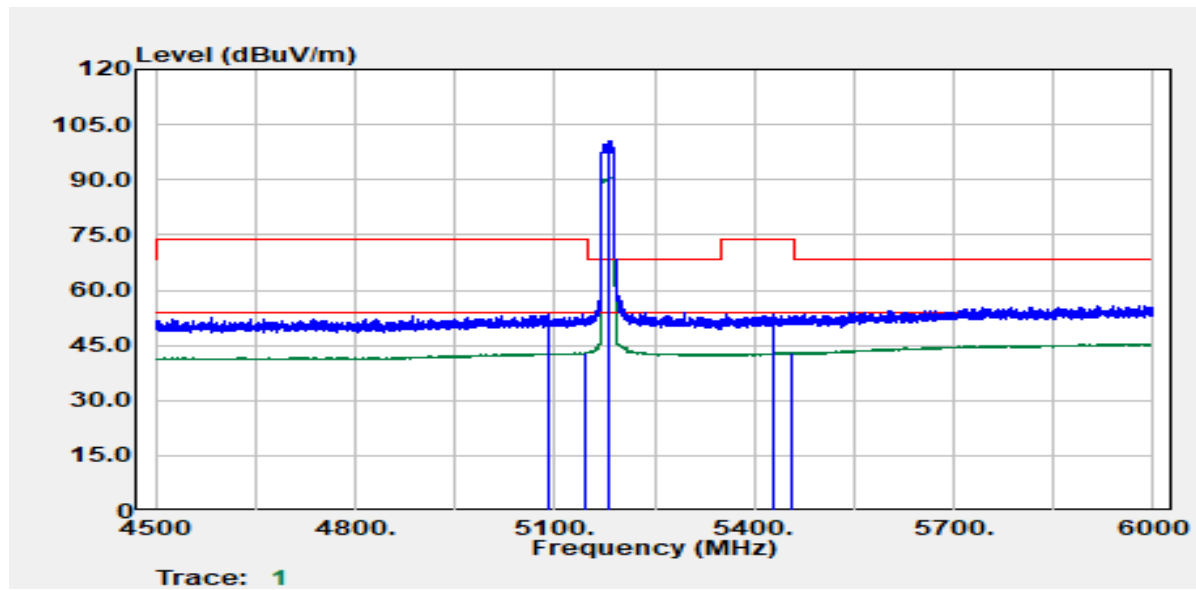

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5091.30	Peak	36.63	16.83	53.46	74.00	-20.54
5147.70	Average	26.16	16.91	43.07	54.00	-10.93
5183.10	Peak	83.53	17.01	100.54	--	--
5183.10	Average	73.59	17.01	90.60	--	--
5427.00	Peak	36.08	17.42	53.49	74.00	-20.51
5457.00	Average	25.59	17.48	43.07	54.00	-10.93

Report No.: TMWK2209003822KR


Test Mode	Mode 2 IEEE 802.11ax HE40 (242/61) / 5190 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

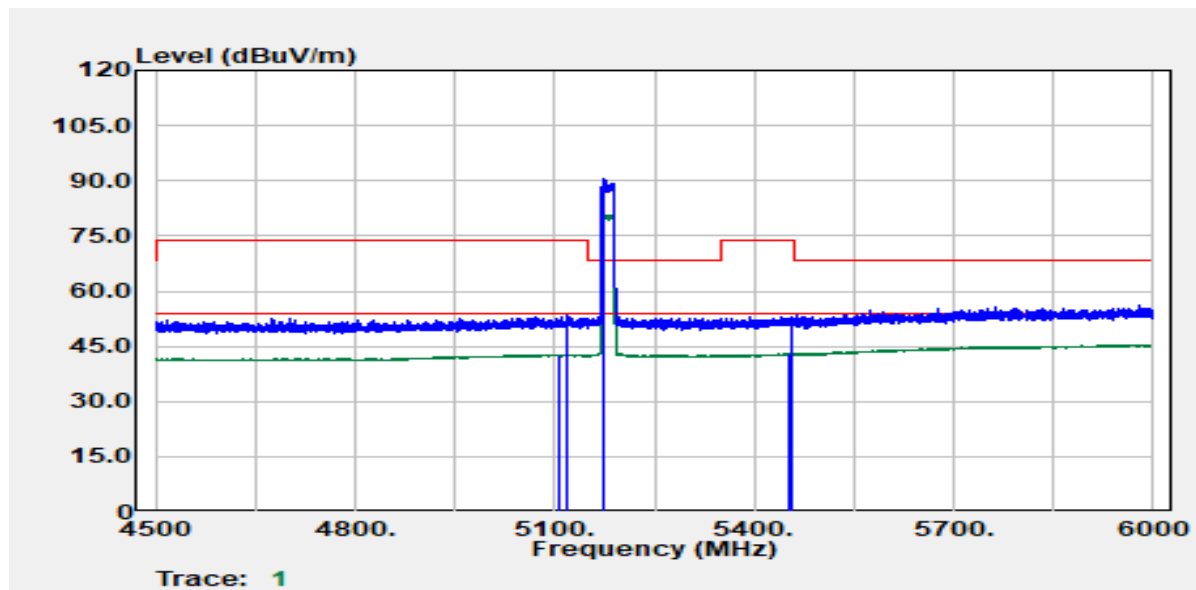

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5108.40	Average	25.85	16.89	42.73	54.00	-11.27
5118.90	Peak	36.44	16.89	53.33	74.00	-20.67
5175.30	Peak	73.46	16.99	90.44	--	--
5175.30	Average	63.72	16.99	80.70	--	--
5453.40	Average	25.54	17.49	43.03	54.00	-10.97
5454.60	Peak	35.36	17.49	52.85	74.00	-21.15

Report No.: TMWK2209003822KR


Test Mode	Mode 2 IEEE 802.11ax HE80 / 5210 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

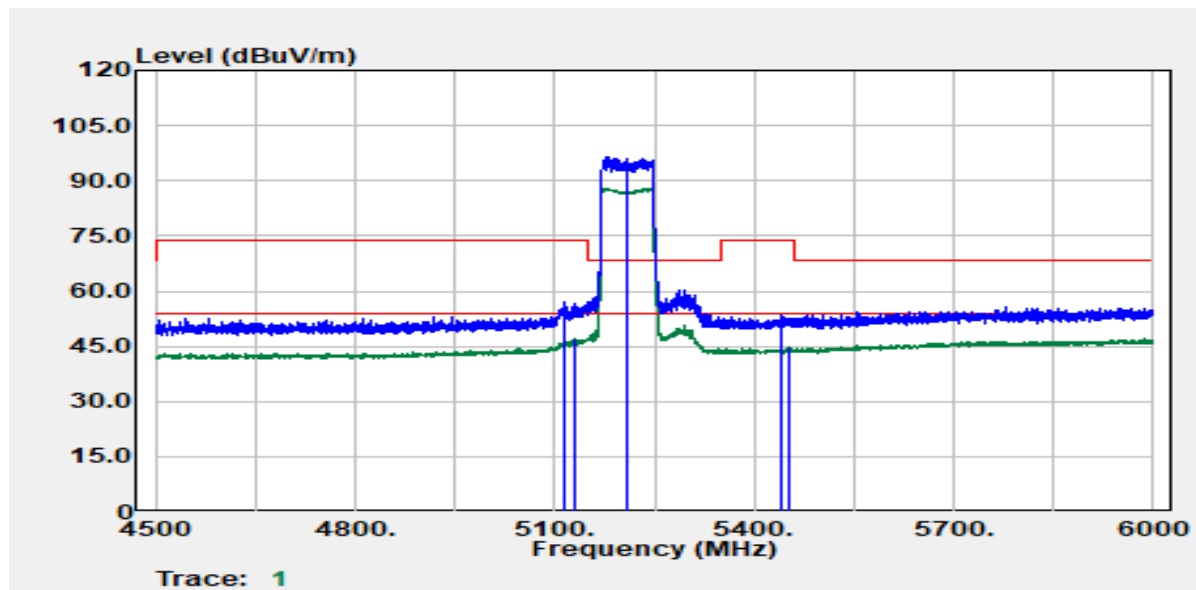

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5116.20	Peak	40.23	16.89	57.12	74.00	-16.88
5130.90	Average	30.32	16.90	47.22	54.00	-6.78
5210.00	Peak	79.41	17.07	96.47	--	--
5210.00	Average	70.90	17.07	87.96	--	--
5440.20	Peak	35.86	17.46	53.32	74.00	-20.68
5454.30	Average	27.15	17.49	44.63	54.00	-9.37


Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE80 / 5210 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

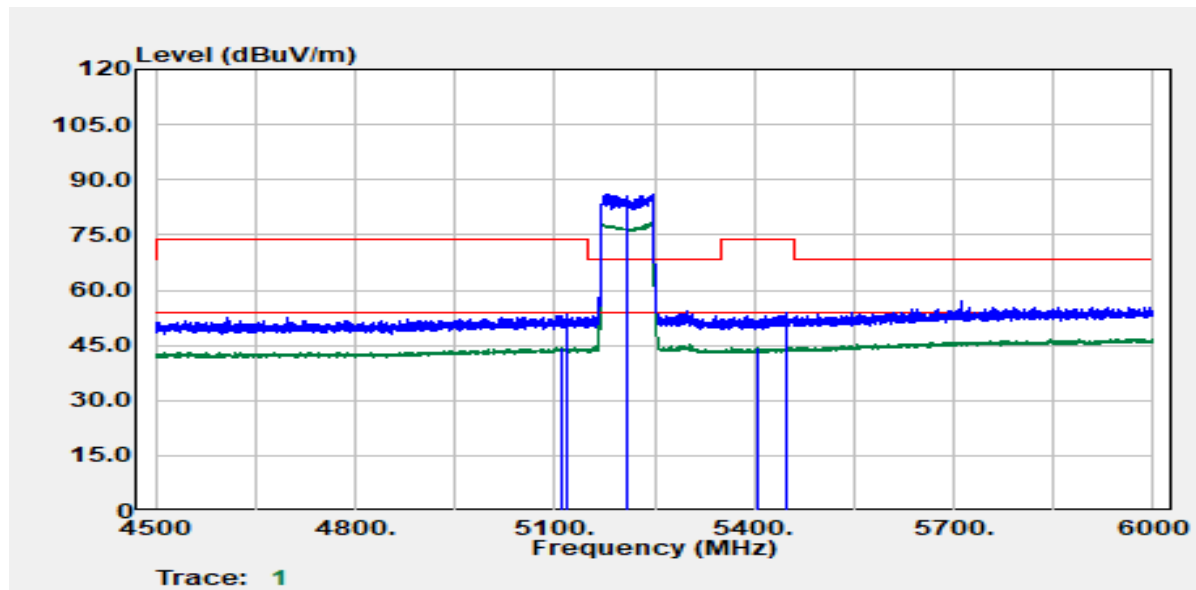

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5108.70	Average	27.46	16.89	44.34	54.00	-9.66
5117.10	Peak	36.36	16.89	53.25	74.00	-20.75
5210.00	Peak	69.08	17.07	86.15	--	--
5210.00	Average	61.30	17.07	78.37	--	--
5404.50	Average	27.02	17.34	44.36	54.00	-9.64
5446.50	Peak	36.56	17.48	54.04	74.00	-19.96


Test Mode	Mode 2 IEEE 802.11ax HE80 (484/65) / 5210 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

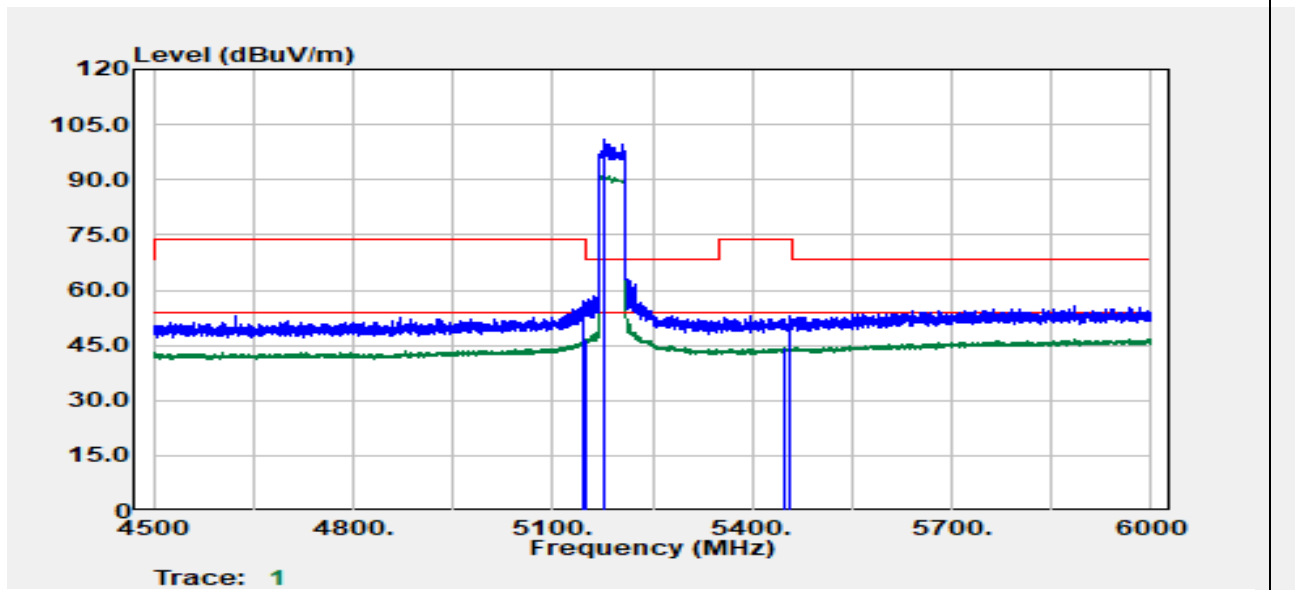

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5147.10	Peak	40.02	16.91	56.92	74.00	-17.08
5148.30	Average	29.63	16.91	46.54	54.00	-7.46
5178.90	Peak	84.15	17.00	101.15	--	--
5178.90	Average	73.97	17.00	90.97	--	--
5450.10	Average	26.79	17.49	44.28	54.00	-9.72
5455.20	Peak	35.49	17.49	52.97	74.00	-21.03

Report No.: TMWK2209003822KR


Test Mode	Mode 2 IEEE 802.11ax HE80 (484/65) / 5210 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

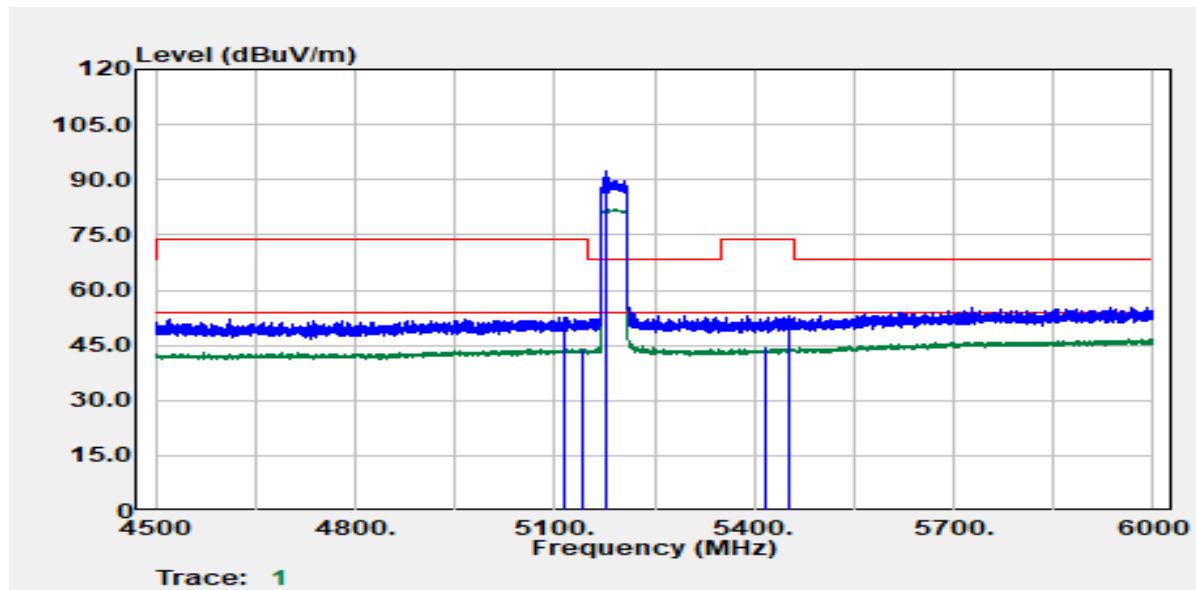

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5113.80	Peak	35.83	16.89	52.71	74.00	-21.29
5140.80	Average	27.18	16.90	44.09	54.00	-9.91
5178.60	Peak	75.16	17.00	92.16	--	--
5178.60	Average	64.99	17.00	81.98	--	--
5417.70	Average	26.77	17.39	44.16	54.00	-9.84
5452.50	Peak	35.47	17.49	52.96	74.00	-21.04


Test Data for UNII-3

Test Mode	Mode 2 IEEE 802.11a / 5745 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

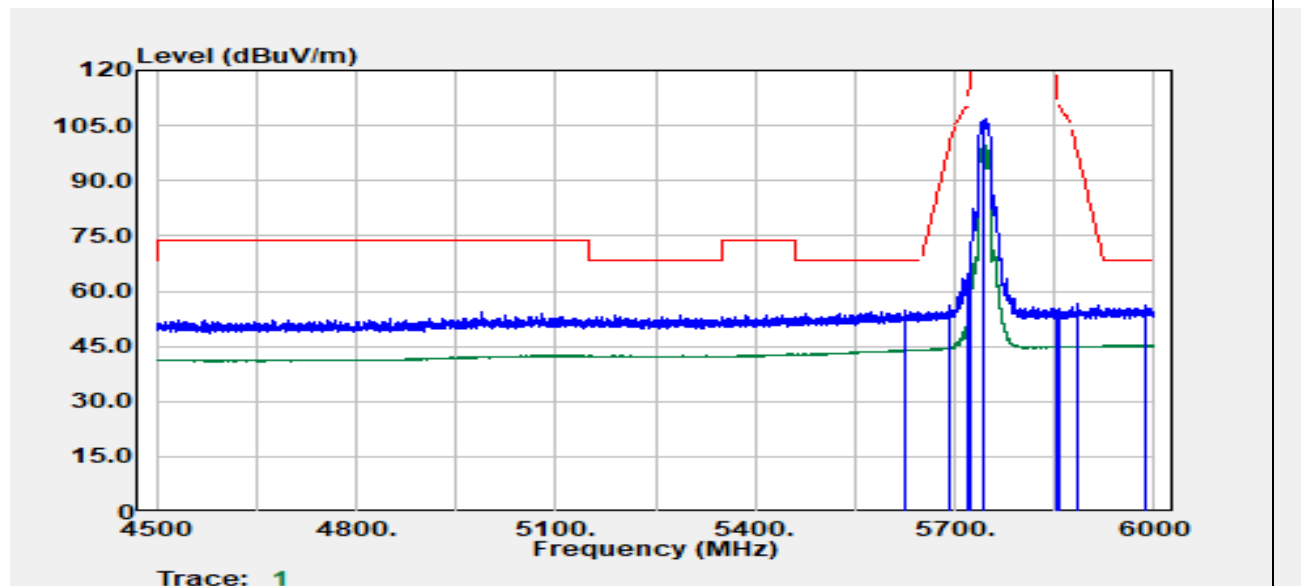

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5626.50	Peak	36.45	18.14	54.58	68.20	-13.62
5690.70	Peak	37.53	18.46	55.99	98.34	-42.35
5720.10	Peak	45.19	18.67	63.86	111.03	-47.17
5724.60	Peak	54.40	18.71	73.11	121.29	-48.18
5745.00	Peak	87.91	18.87	106.78	--	--
5745.00	Average	80.69	18.87	99.56	--	--
5851.80	Peak	35.94	18.91	54.85	118.09	-63.24
5858.10	Peak	36.19	18.91	55.11	109.93	-54.82
5886.00	Peak	37.50	18.93	56.43	97.03	-40.60
5985.30	Peak	36.88	19.06	55.94	68.20	-12.26


Test Mode	Mode 2 IEEE 802.11a / 5745 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

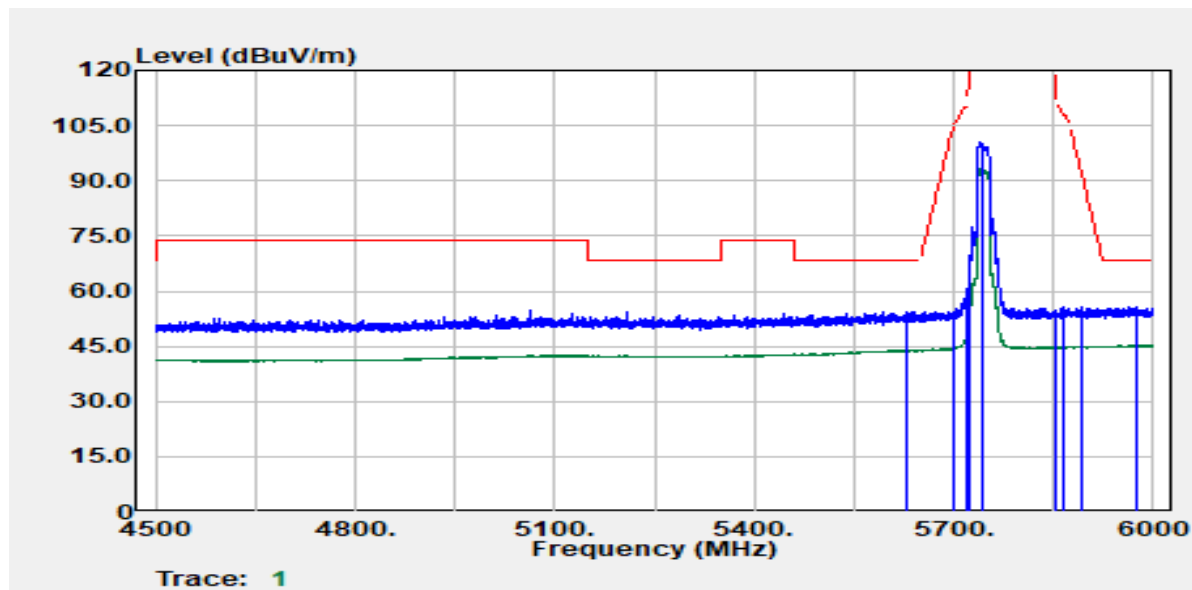

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5628.90	Peak	36.37	18.15	54.52	68.20	-13.68
5699.10	Peak	35.98	18.51	54.49	104.54	-50.05
5720.10	Peak	41.90	18.67	60.57	111.03	-50.46
5724.90	Peak	50.54	18.71	69.25	121.97	-52.72
5745.00	Peak	81.46	18.87	100.33	--	--
5745.00	Average	74.56	18.87	93.43	--	--
5855.10	Peak	35.73	18.91	54.65	110.77	-56.13
5864.40	Peak	36.87	18.92	55.79	108.17	-52.38
5893.20	Peak	36.98	18.94	55.91	91.70	-35.78
5975.40	Peak	36.87	19.05	55.92	68.20	-12.28

Report No.: TMWK2209003822KR


Test Mode	Mode 2 IEEE 802.11a / 5825 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

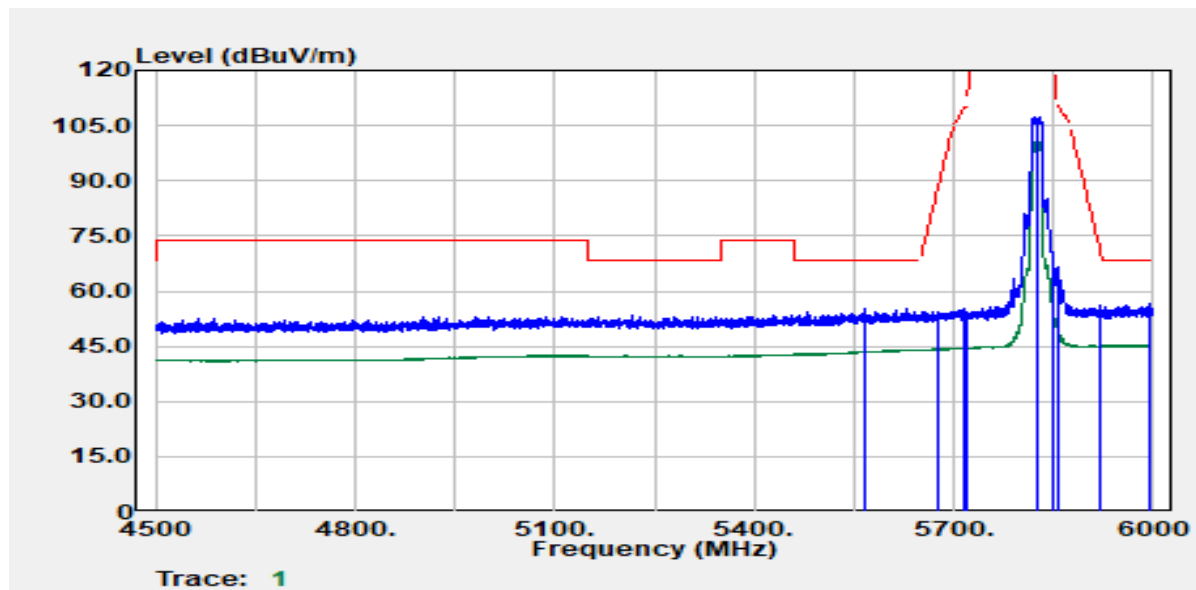

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5566.80	Peak	37.60	17.85	55.44	68.20	-12.76
5677.20	Peak	36.09	18.39	54.48	88.37	-33.89
5717.40	Peak	36.61	18.65	55.26	110.07	-54.81
5720.10	Peak	35.22	18.67	53.89	111.03	-57.13
5825.00	Peak	88.38	18.88	107.26	--	--
5825.00	Average	81.70	18.88	100.58	--	--
5850.30	Peak	49.70	18.91	68.61	121.52	-52.91
5857.50	Peak	47.59	18.91	66.50	110.10	-43.59
5919.60	Peak	37.06	18.97	56.03	72.18	-16.15
5996.10	Peak	37.71	19.08	56.78	68.20	-11.42


Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11a / 5825 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

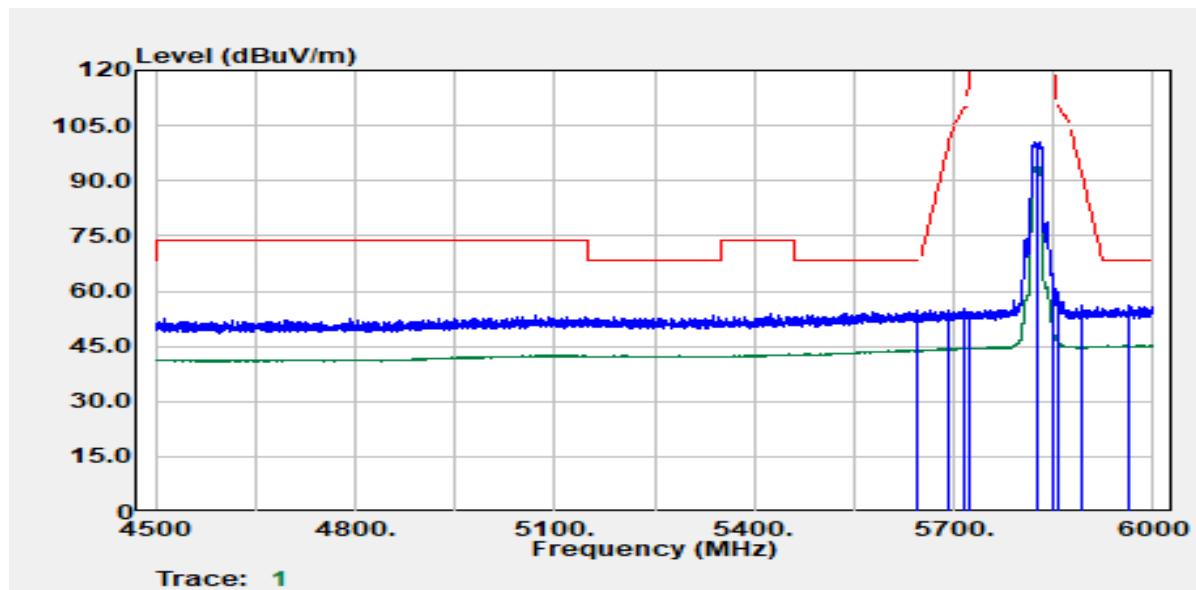


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5646.30	Peak	36.52	18.22	54.74	68.20	-13.46
5693.70	Peak	36.26	18.48	54.74	100.56	-45.82
5713.80	Peak	36.51	18.62	55.13	109.07	-53.93
5723.40	Peak	35.82	18.70	54.52	118.55	-64.03
5825.00	Peak	81.47	18.88	100.35	--	--
5825.00	Average	74.78	18.88	93.66	--	--
5850.30	Peak	43.49	18.91	62.40	121.52	-59.12
5855.40	Peak	40.82	18.91	59.73	110.69	-50.95
5894.10	Peak	37.00	18.94	55.93	91.03	-35.09
5963.70	Peak	36.92	19.04	55.96	68.20	-12.24

Test Mode	Mode 2 IEEE 802.11n HT20 / 5745 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

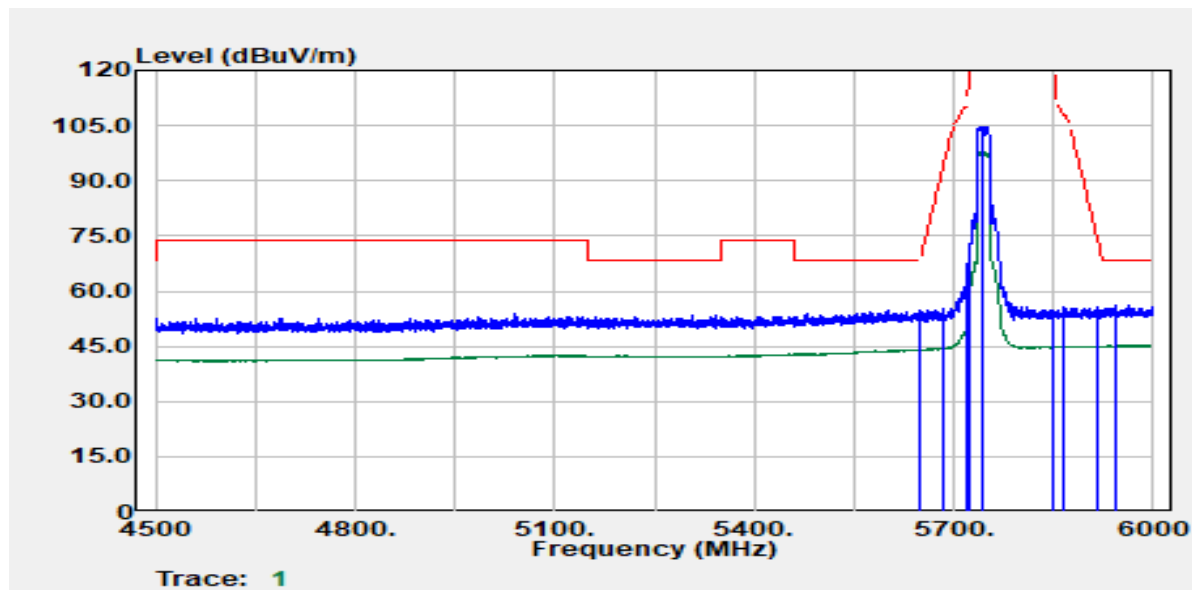

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5648.70	Peak	36.51	18.23	54.74	68.20	-13.46
5685.00	Peak	36.66	18.43	55.09	94.13	-39.04
5720.10	Peak	44.73	18.67	63.40	111.03	-47.63
5724.90	Peak	53.87	18.71	72.58	121.97	-49.39
5745.00	Peak	85.90	18.87	104.77	--	--
5745.00	Average	78.95	18.87	97.82	--	--
5850.00	Peak	35.50	18.91	54.41	122.20	-67.79
5865.30	Peak	36.64	18.92	55.55	107.91	-52.36
5915.70	Peak	36.59	18.97	55.55	75.06	-19.51
5944.50	Peak	37.15	19.01	56.16	68.20	-12.04


Test Mode	Mode 2 IEEE 802.11n HT20 / 5745 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

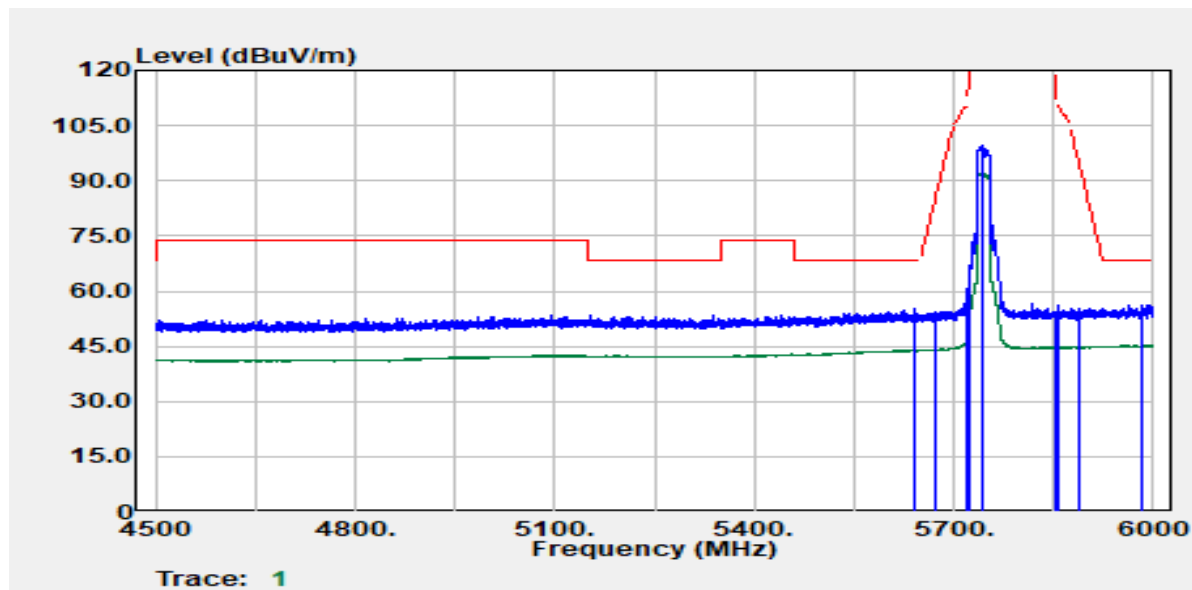

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5641.20	Peak	36.90	18.20	55.11	68.20	-13.09
5671.20	Peak	36.13	18.35	54.49	83.93	-29.44
5720.10	Peak	40.35	18.67	59.02	111.03	-52.01
5724.90	Peak	47.10	18.71	65.81	121.97	-56.16
5745.00	Peak	80.63	18.87	99.50	--	--
5745.00	Average	73.13	18.87	92.00	--	--
5854.50	Peak	35.24	18.91	54.15	111.94	-57.79
5857.20	Peak	37.07	18.91	55.98	110.18	-54.20
5890.20	Peak	36.47	18.93	55.41	93.92	-38.51
5981.10	Peak	37.26	19.06	56.31	68.20	-11.89


Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT20 / 5825 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

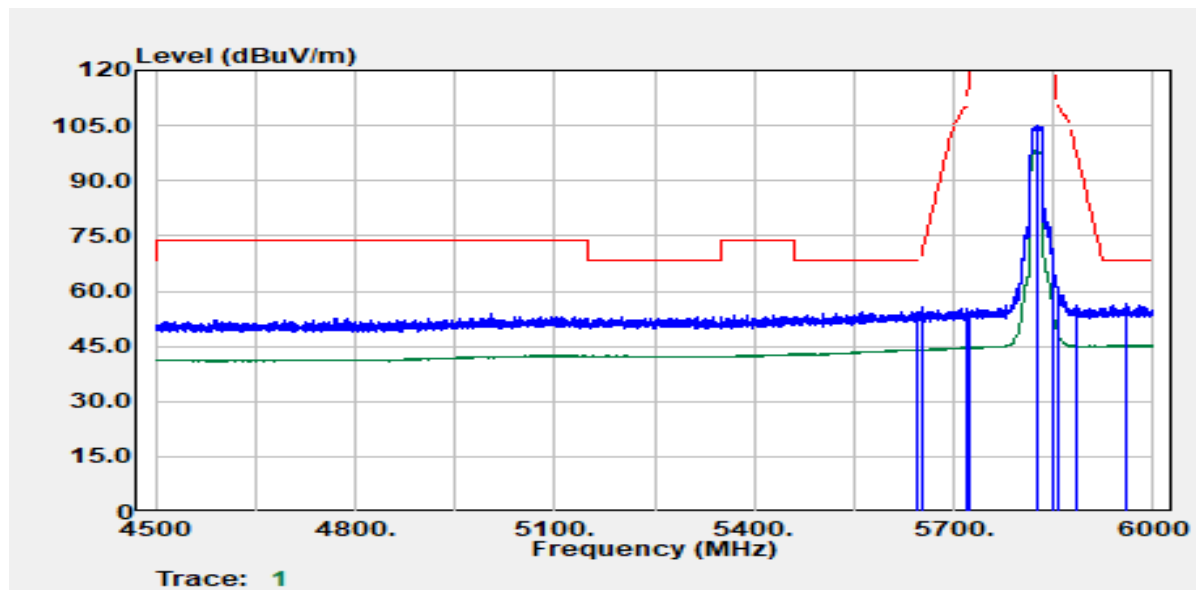


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5643.30	Peak	36.23	18.21	54.44	68.20	-13.76
5651.40	Peak	37.36	18.25	55.61	69.24	-13.63
5717.70	Peak	36.82	18.65	55.47	110.16	-54.69
5724.00	Peak	35.55	18.70	54.25	119.92	-65.67
5825.00	Peak	86.30	18.88	105.18	--	--
5825.00	Average	79.17	18.88	98.05	--	--
5850.00	Peak	50.33	18.91	69.24	122.20	-52.96
5855.40	Peak	42.39	18.91	61.31	110.69	-49.38
5883.30	Peak	37.20	18.93	56.13	99.04	-42.90
5961.00	Peak	37.46	19.03	56.50	68.20	-11.70

Test Mode	Mode 2 IEEE 802.11n HT20 / 5825 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

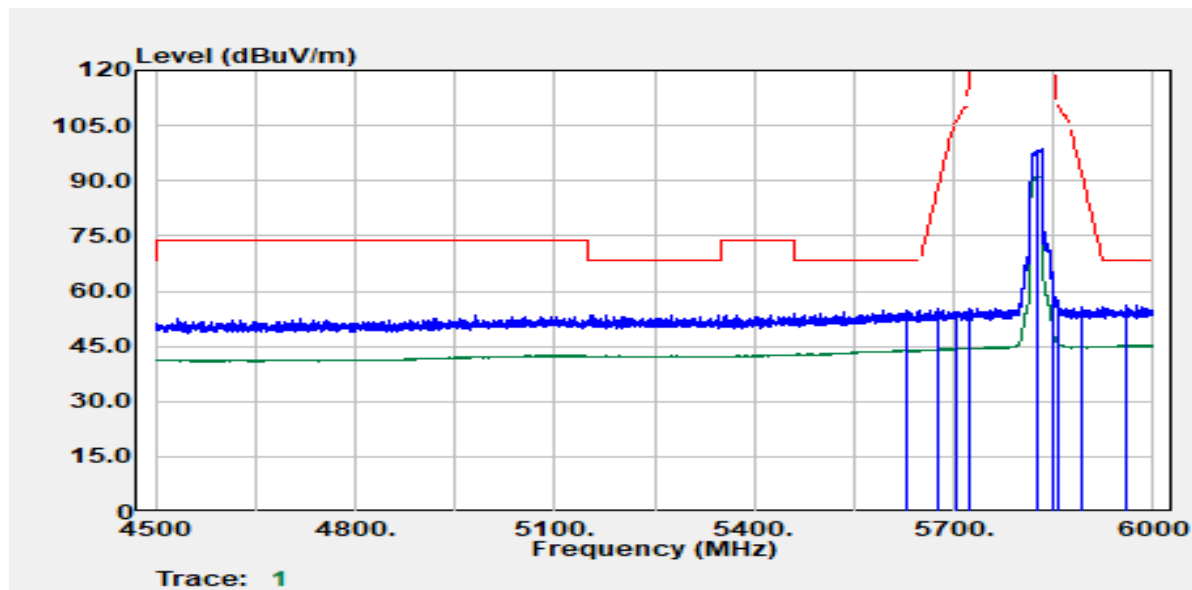


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5627.40	Peak	36.74	18.14	54.88	68.20	-13.32
5674.50	Peak	36.90	18.37	55.27	86.37	-31.10
5702.70	Peak	36.01	18.53	54.54	105.96	-51.41
5722.50	Peak	36.49	18.69	55.18	116.50	-61.32
5825.00	Peak	79.70	18.88	98.58	--	--
5825.00	Average	72.28	18.88	91.16	--	--
5850.00	Peak	43.60	18.91	62.51	122.20	-59.69
5855.40	Peak	38.47	18.91	57.39	110.69	-53.30
5892.90	Peak	36.68	18.94	55.61	91.92	-36.31
5959.20	Peak	37.21	19.03	56.24	68.20	-11.96

Test Mode	Mode 2 IEEE 802.11n HT40 / 5755 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

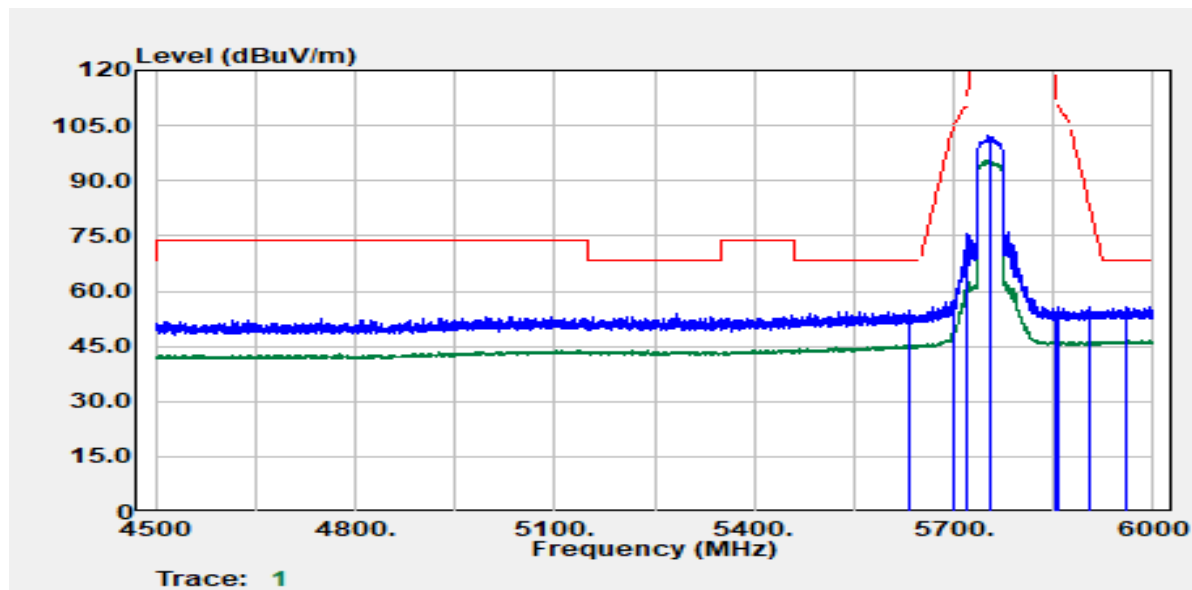


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5633.70	Peak	36.64	18.17	54.81	68.20	-13.39
5698.20	Peak	38.79	18.50	57.29	103.87	-46.58
5719.80	Peak	55.84	18.67	74.51	110.74	-36.24
5721.30	Peak	56.90	18.68	75.59	113.77	-38.18
5755.00	Peak	83.51	18.90	102.41	--	--
5755.00	Average	76.58	18.90	95.49	--	--
5852.40	Peak	35.56	18.91	54.48	116.73	-62.25
5857.50	Peak	36.73	18.91	55.64	110.10	-54.46
5905.50	Peak	36.65	18.95	55.60	82.59	-26.99
5961.00	Peak	36.79	19.03	55.82	68.20	-12.38

Test Mode	Mode 2 IEEE 802.11n HT40 / 5755 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

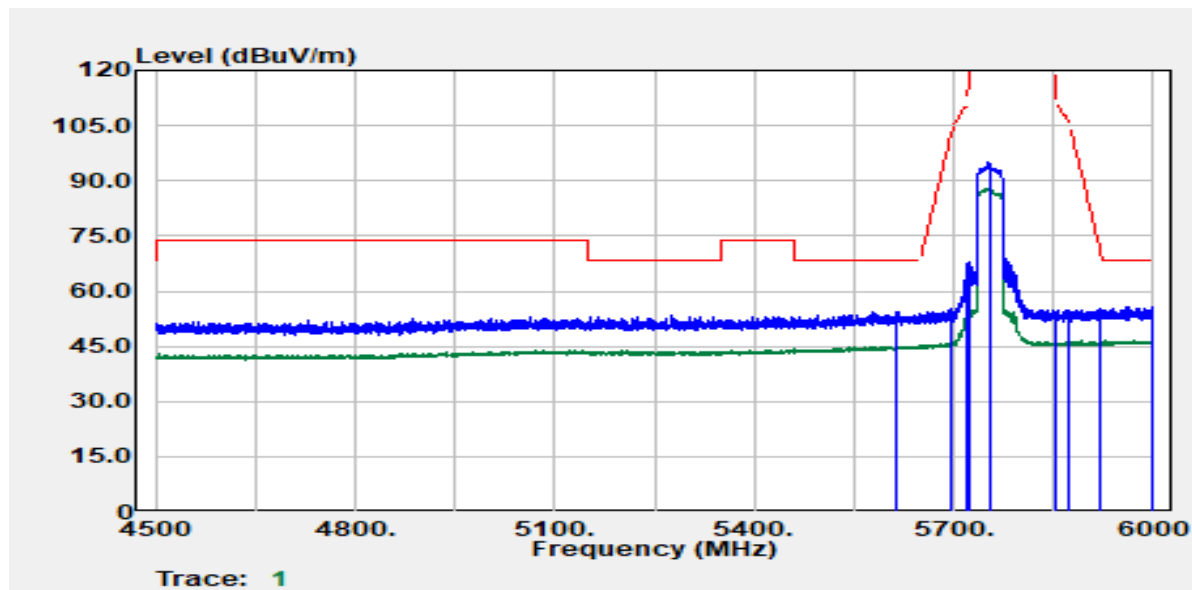

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5613.00	Peak	36.46	18.08	54.54	68.20	-13.66
5696.70	Peak	36.53	18.49	55.02	102.77	-47.75
5719.50	Peak	48.74	18.67	67.40	110.66	-43.26
5721.90	Peak	49.45	18.69	68.13	115.13	-47.00
5755.00	Peak	75.98	18.90	94.89	--	--
5755.00	Average	69.06	18.90	87.96	--	--
5854.80	Peak	35.53	18.91	54.45	111.26	-56.81
5871.00	Peak	35.92	18.92	54.84	106.32	-51.48
5920.80	Peak	36.26	18.97	55.23	71.30	-16.07
5996.70	Peak	36.75	19.08	55.83	68.20	-12.37


Test Mode	Mode 2 IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

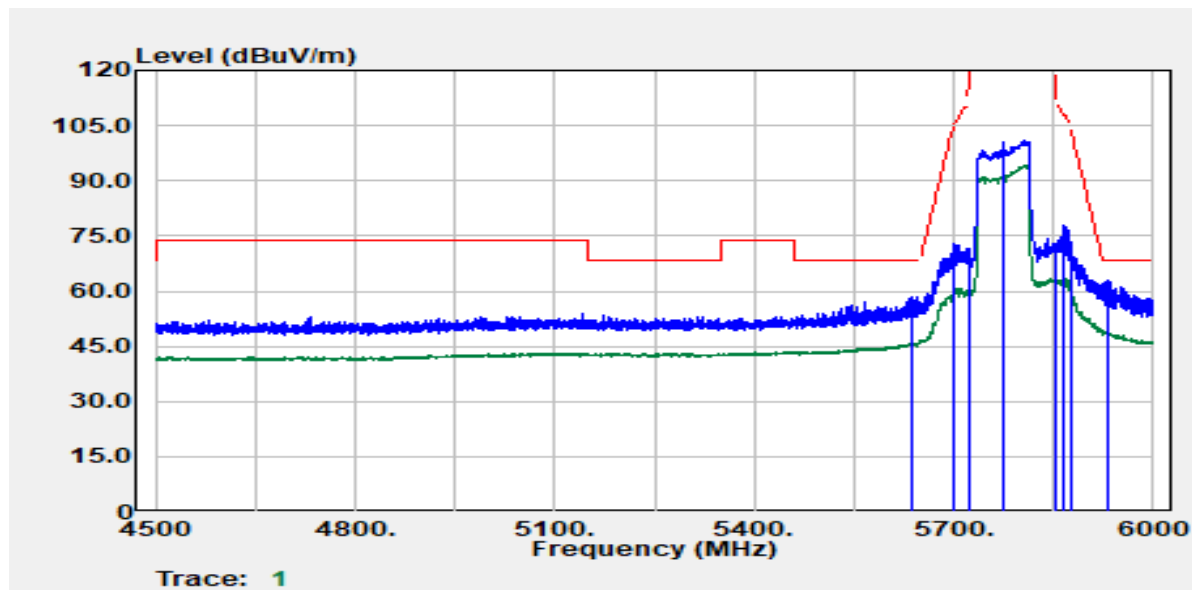

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5638.20	Peak	40.10	18.19	58.29	68.20	-9.91
5699.10	Peak	52.52	18.51	71.02	104.54	-33.52
5701.80	Peak	54.17	18.52	72.70	105.70	-33.01
5722.50	Peak	52.76	18.69	71.45	116.50	-45.05
5775.00	Peak	82.32	18.88	101.20	--	--
5775.00	Average	75.22	18.88	94.10	--	--
5855.10	Peak	54.11	18.91	73.02	110.77	-37.75
5865.60	Peak	58.95	18.92	77.87	107.83	-29.96
5875.50	Peak	54.38	18.93	73.30	104.83	-31.53
5930.40	Peak	43.90	18.99	62.89	68.20	-5.31

Report No.: TMWK2209003822KR


Test Mode	Mode 2 IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

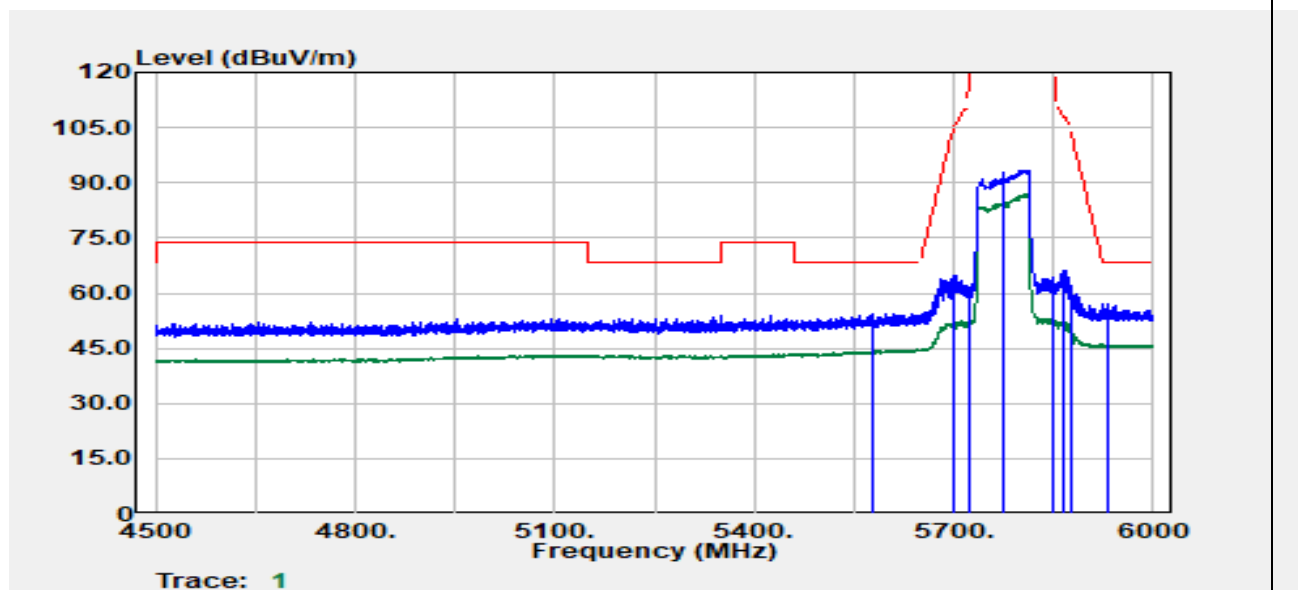

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5580.00	Peak	36.52	17.92	54.43	68.20	-13.77
5699.70	Peak	46.39	18.51	64.90	104.98	-40.08
5699.70	Peak	46.39	18.51	64.90	104.98	-40.08
5722.50	Peak	42.96	18.69	61.65	116.50	-54.85
5775.00	Peak	74.59	18.88	93.47	--	--
5775.00	Average	67.92	18.88	86.80	--	--
5850.90	Peak	45.41	18.91	64.32	120.15	-55.83
5864.70	Peak	47.19	18.92	66.11	108.08	-41.98
5875.50	Peak	43.26	18.93	62.19	104.83	-42.64
5932.50	Peak	38.23	18.99	57.22	68.20	-10.98

Report No.: TMWK2209003822KR


Test Mode	Mode 2 IEEE 802.11ax HE20 / 5745 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

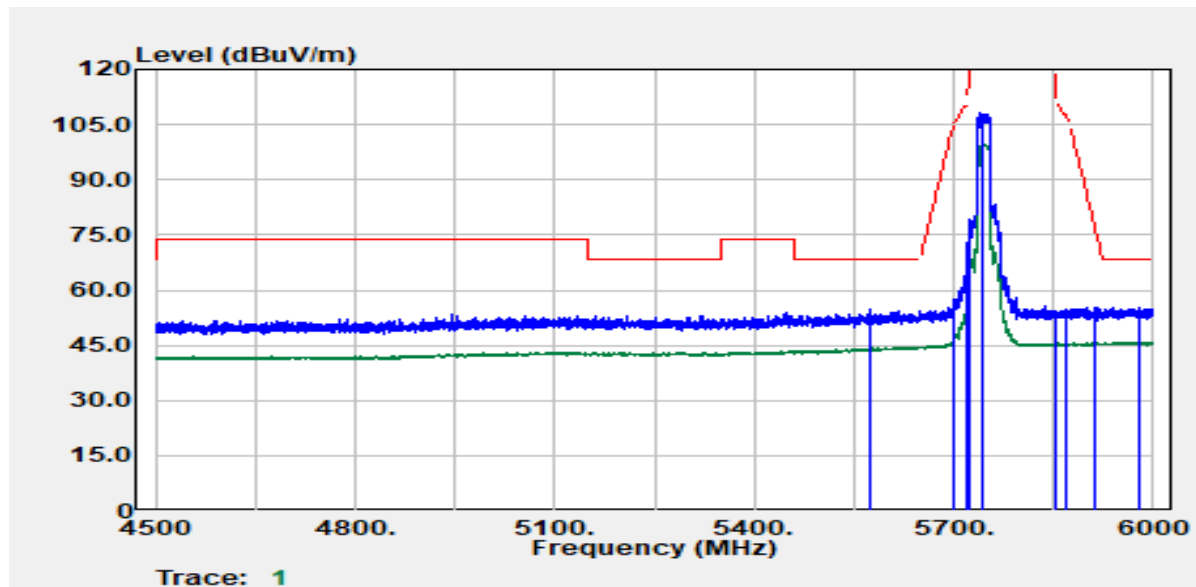

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5574.60	Peak	37.13	17.89	55.02	68.20	-13.18
5698.80	Peak	38.90	18.50	57.41	104.32	-46.91
5720.10	Peak	51.28	18.67	69.95	111.03	-41.08
5724.90	Peak	60.37	18.71	79.08	121.97	-42.89
5745.00	Peak	89.41	18.87	108.28	--	--
5745.00	Average	80.82	18.87	99.69	--	--
5851.80	Peak	35.38	18.91	54.29	118.09	-63.80
5867.70	Peak	35.85	18.92	54.77	107.24	-52.47
5911.50	Peak	36.33	18.96	55.29	78.16	-22.87
5980.50	Peak	36.32	19.06	55.38	68.20	-12.82


Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE20 / 5745 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

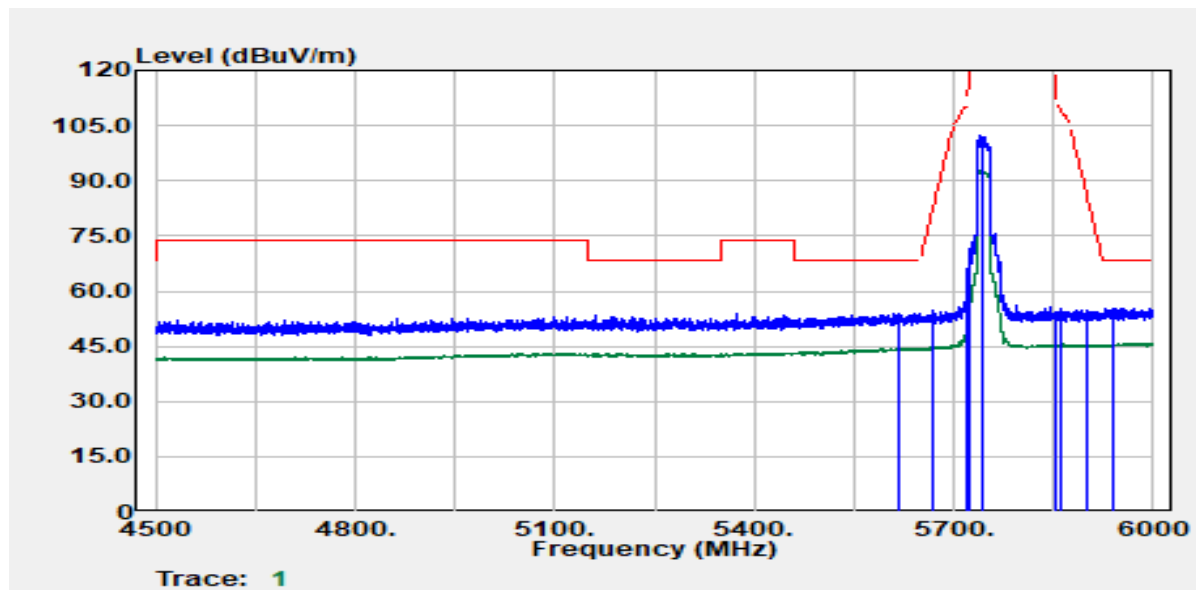


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5619.00	Peak	35.87	18.10	53.97	68.20	-14.23
5669.70	Peak	36.30	18.35	54.64	82.82	-28.18
5719.80	Peak	43.95	18.67	62.62	110.74	-48.13
5724.60	Peak	51.45	18.71	70.16	121.29	-51.13
5745.00	Peak	83.49	18.87	102.36	--	--
5745.00	Average	74.11	18.87	92.98	--	--
5852.40	Peak	35.56	18.91	54.47	116.73	-62.26
5860.20	Peak	36.12	18.92	55.03	109.34	-54.31
5901.00	Peak	36.00	18.94	54.94	85.92	-30.98
5941.20	Peak	36.46	19.01	55.46	68.20	-12.74

Test Mode	Mode 2 IEEE 802.11ax HE20 (26/0) /5745 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

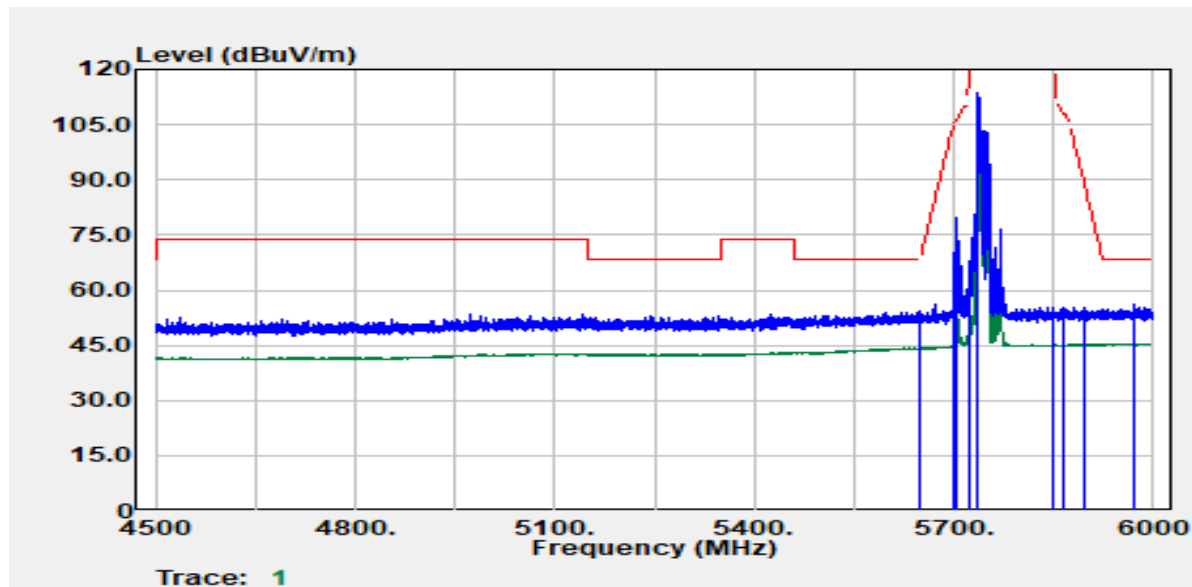


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5649.00	Peak	36.07	18.24	54.30	68.20	-13.90
5699.70	Peak	40.11	18.51	58.61	104.98	-46.37
5704.80	Peak	61.07	18.55	79.62	106.55	-26.92
5724.60	Peak	49.06	18.71	67.76	121.29	-53.52
5736.60	Peak	94.95	18.80	113.76	--	--
5736.90	Average	87.35	18.81	106.16	--	--
5850.60	Peak	34.96	18.91	53.88	120.83	-66.96
5863.20	Peak	36.21	18.92	55.13	108.50	-53.37
5896.50	Peak	36.25	18.94	55.19	89.25	-34.07
5972.70	Peak	36.94	19.05	55.99	68.20	-12.21

Test Mode	Mode 2 IEEE 802.11ax HE20 (26/0) /5745 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

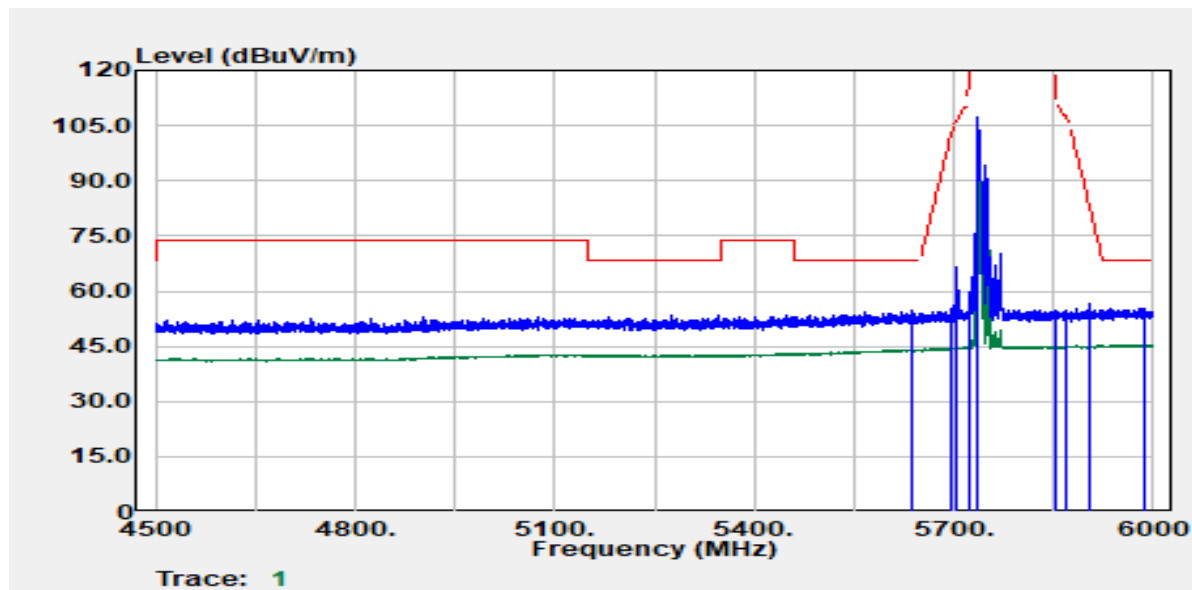

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5636.40	Peak	36.69	18.18	54.87	68.20	-13.33
5694.90	Peak	36.83	18.48	55.31	101.44	-46.13
5704.80	Peak	48.16	18.55	66.71	106.55	-39.84
5722.80	Peak	41.29	18.69	59.98	117.19	-57.20
5736.90	Peak	88.41	18.81	107.21	--	--
5736.90	Average	79.45	18.81	98.26	--	--
5852.40	Peak	35.76	18.91	54.68	116.73	-62.05
5868.60	Peak	35.86	18.92	54.78	106.99	-52.21
5905.20	Peak	37.44	18.95	56.39	82.81	-26.43
5988.30	Peak	36.31	19.07	55.38	68.20	-12.82


Test Mode	Mode 2 IEEE 802.11ax HE20 (52/37) /5745 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

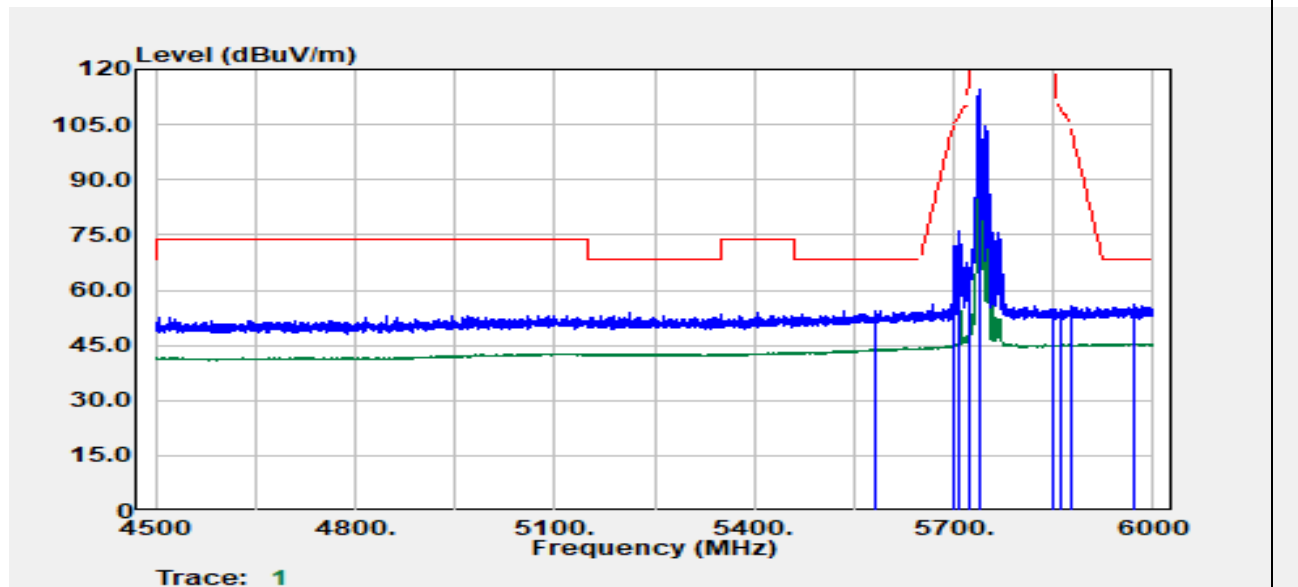

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5582.10	Peak	36.41	17.93	54.34	68.20	-13.86
5699.40	Peak	40.64	18.51	59.15	104.76	-45.61
5709.60	Peak	57.64	18.59	76.23	107.89	-31.66
5723.70	Peak	47.26	18.70	65.96	119.24	-53.28
5738.70	Peak	95.57	18.82	114.39	--	--
5738.70	Average	86.28	18.82	105.10	--	--
5850.30	Peak	35.89	18.91	54.80	121.52	-66.71
5861.70	Peak	35.72	18.92	54.64	108.92	-54.28
5877.00	Peak	36.63	18.93	55.56	103.71	-48.16
5970.90	Peak	36.89	19.05	55.93	68.20	-12.27


Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE20 (52/37) /5745 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

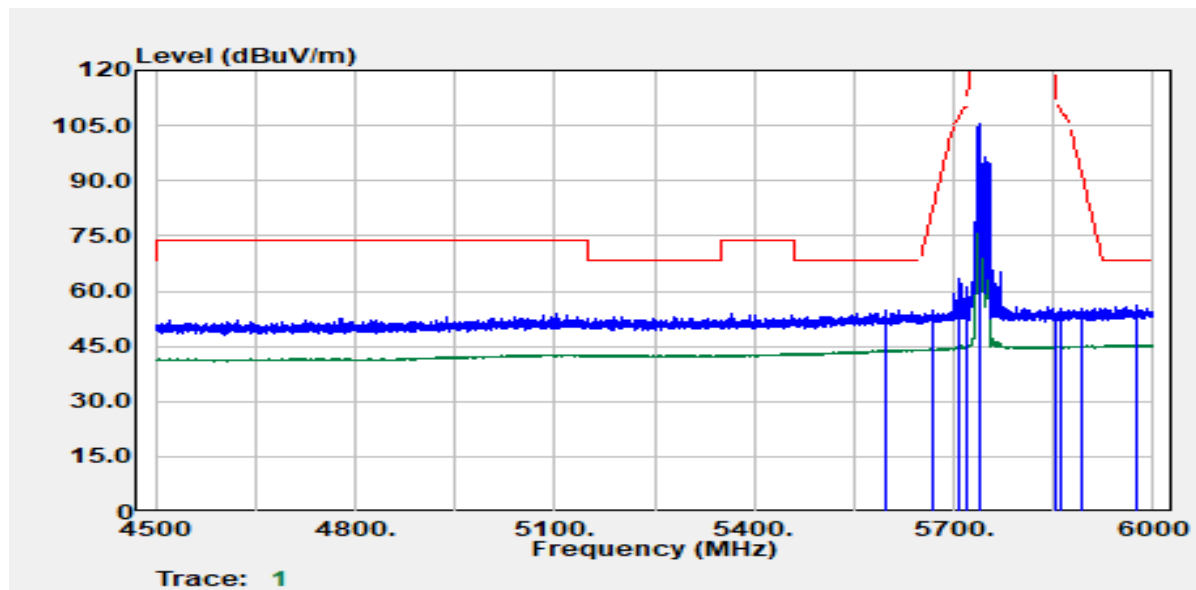

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5598.90	Peak	36.85	18.01	54.86	68.20	-13.34
5666.70	Peak	36.32	18.33	54.65	80.59	-25.94
5709.30	Peak	44.82	18.58	63.40	107.81	-44.41
5721.00	Peak	42.48	18.68	61.16	113.08	-51.93
5738.10	Peak	86.79	18.81	105.60	--	--
5738.10	Average	77.18	18.81	95.99	--	--
5853.60	Peak	35.15	18.91	54.06	113.99	-59.93
5860.20	Peak	36.19	18.92	55.11	109.34	-54.23
5892.90	Peak	36.36	18.94	55.29	91.92	-36.63
5974.50	Peak	36.92	19.05	55.97	68.20	-12.23


Test Mode	Mode 2 IEEE 802.11ax HE20 (106/53) /5745 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

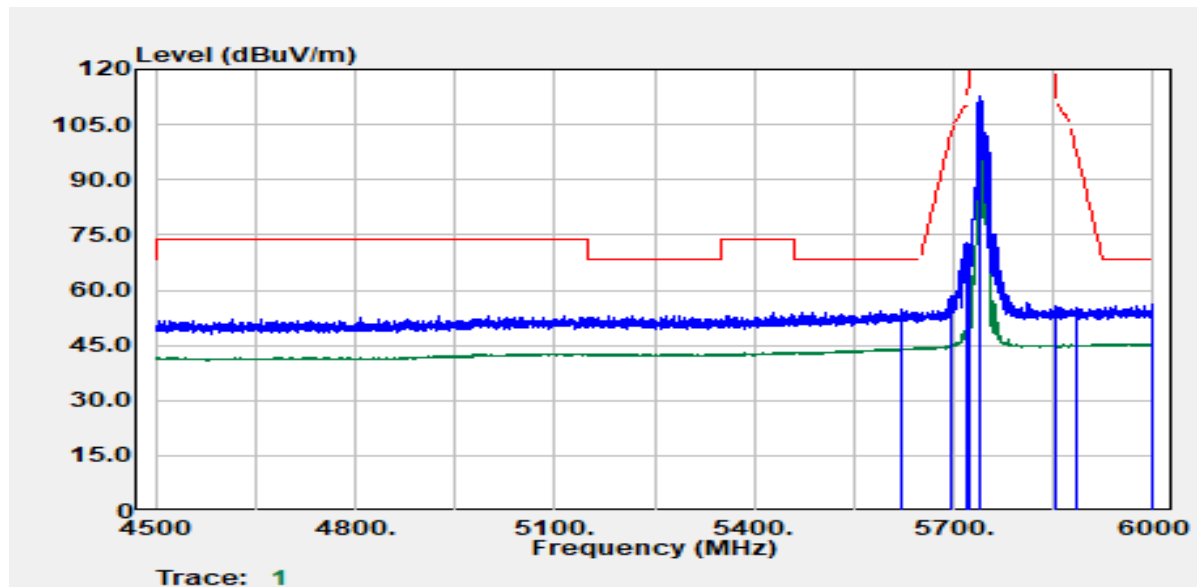

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5620.50	Peak	36.64	18.11	54.75	68.20	-13.45
5696.10	Peak	40.12	18.49	58.61	102.33	-43.71
5719.20	Peak	54.19	18.66	72.85	110.58	-37.72
5724.90	Peak	53.65	18.71	72.36	121.97	-49.62
5737.80	Peak	93.74	18.81	112.55	--	--
5737.80	Average	84.01	18.81	102.82	--	--
5851.80	Peak	35.13	18.91	54.04	118.09	-64.05
5855.10	Peak	36.76	18.91	55.67	110.77	-55.10
5886.00	Peak	36.23	18.93	55.16	97.03	-41.87
5999.70	Peak	37.03	19.08	56.11	68.20	-12.09


Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE20 (106/53) /5745 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

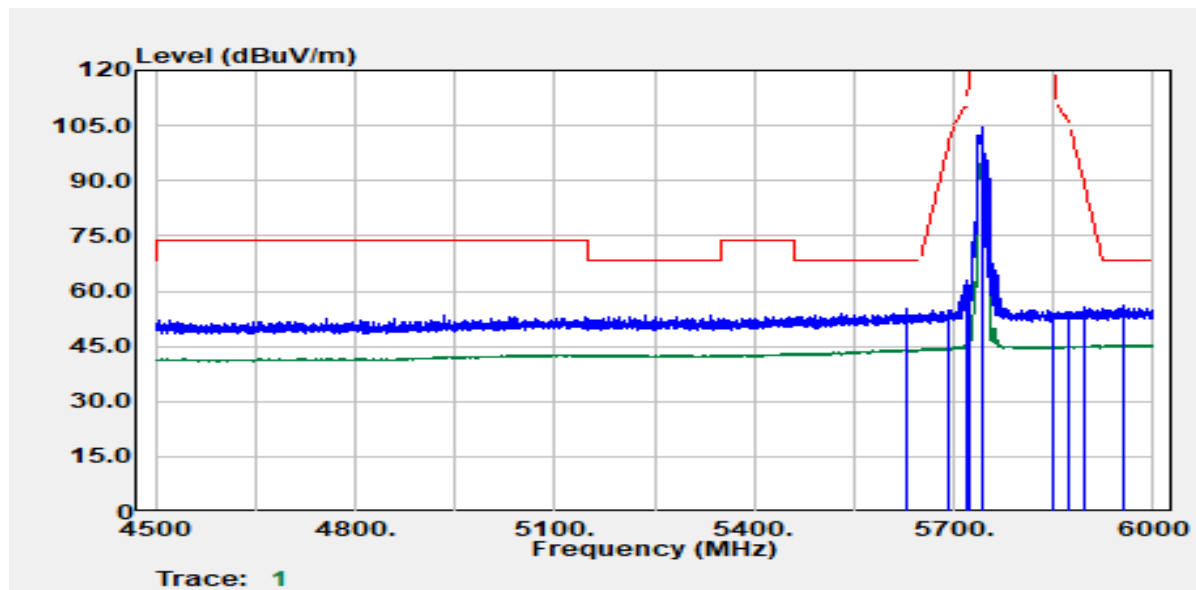


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5628.60	Peak	37.32	18.15	55.47	68.20	-12.73
5690.70	Peak	36.47	18.46	54.93	98.34	-43.41
5720.10	Peak	44.29	18.67	62.96	111.03	-48.07
5723.40	Peak	42.92	18.70	61.62	118.55	-56.93
5742.60	Peak	85.60	18.85	104.46	--	--
5742.60	Average	76.22	18.85	95.07	--	--
5850.30	Peak	35.02	18.91	53.93	121.52	-67.58
5873.40	Peak	35.53	18.92	54.45	105.65	-51.19
5897.40	Peak	36.98	18.94	55.92	88.59	-32.67
5956.20	Peak	37.16	19.03	56.19	68.20	-12.01

Test Mode	Mode 2 IEEE 802.11ax HE20 / 5825 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

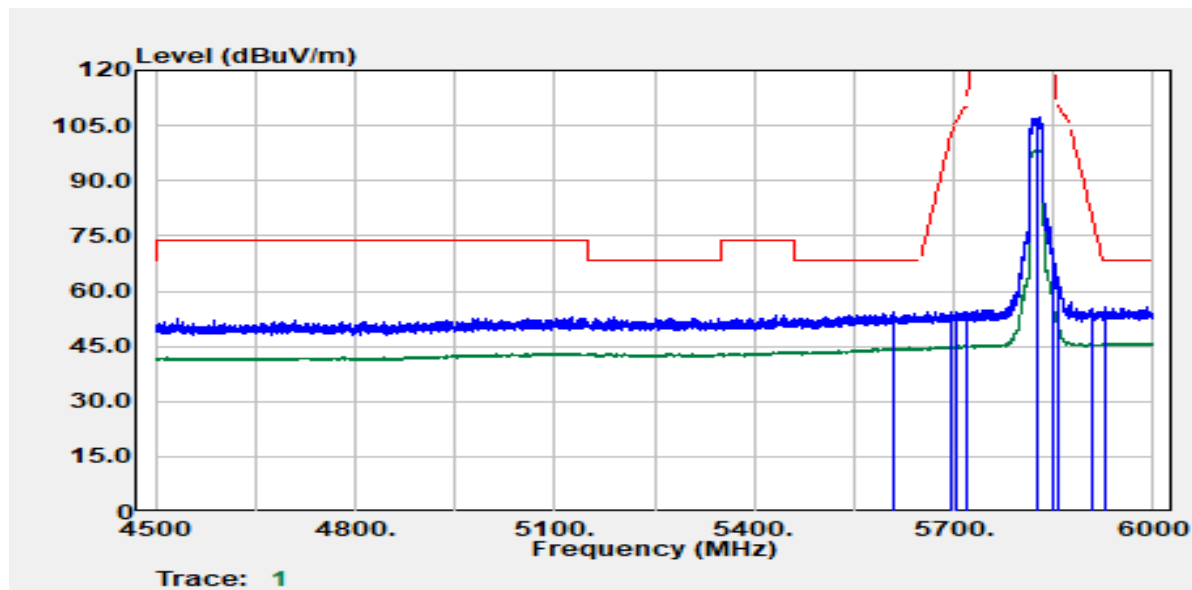

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5607.90	Peak	36.27	18.05	54.32	68.20	-13.88
5694.90	Peak	36.00	18.48	54.48	101.44	-46.96
5702.70	Peak	35.82	18.53	54.36	105.96	-51.60
5721.00	Peak	35.86	18.68	54.53	113.08	-58.55
5825.00	Peak	88.44	18.88	107.32	--	--
5825.00	Average	79.48	18.88	98.36	--	--
5850.00	Peak	50.51	18.91	69.42	122.20	-52.78
5858.70	Peak	45.01	18.92	63.93	109.76	-45.84
5907.60	Peak	36.40	18.95	55.35	81.04	-25.69
5926.50	Peak	36.79	18.98	55.77	68.20	-12.43


Test Mode	Mode 2 IEEE 802.11ax HE20 / 5825 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

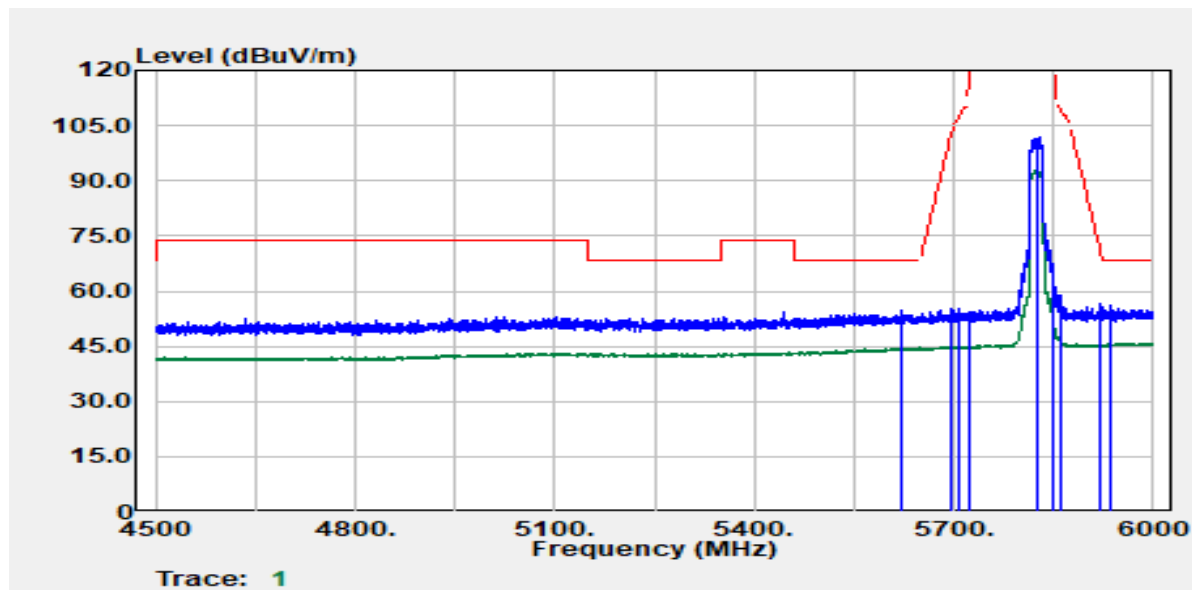

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5622.60	Peak	36.72	18.12	54.84	68.20	-13.36
5697.90	Peak	36.85	18.50	55.35	103.65	-48.30
5708.70	Peak	36.66	18.58	55.24	107.64	-52.40
5722.50	Peak	35.72	18.69	54.41	116.50	-62.09
5825.00	Peak	83.05	18.88	101.93	--	--
5825.00	Average	73.80	18.88	92.68	--	--
5850.00	Peak	43.42	18.91	62.33	122.20	-59.87
5859.30	Peak	39.80	18.92	58.72	109.59	-50.88
5920.50	Peak	37.41	18.97	56.38	71.52	-15.13
5937.00	Peak	37.21	19.00	56.21	68.20	-11.99


Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE20 (26/8) / 5825 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

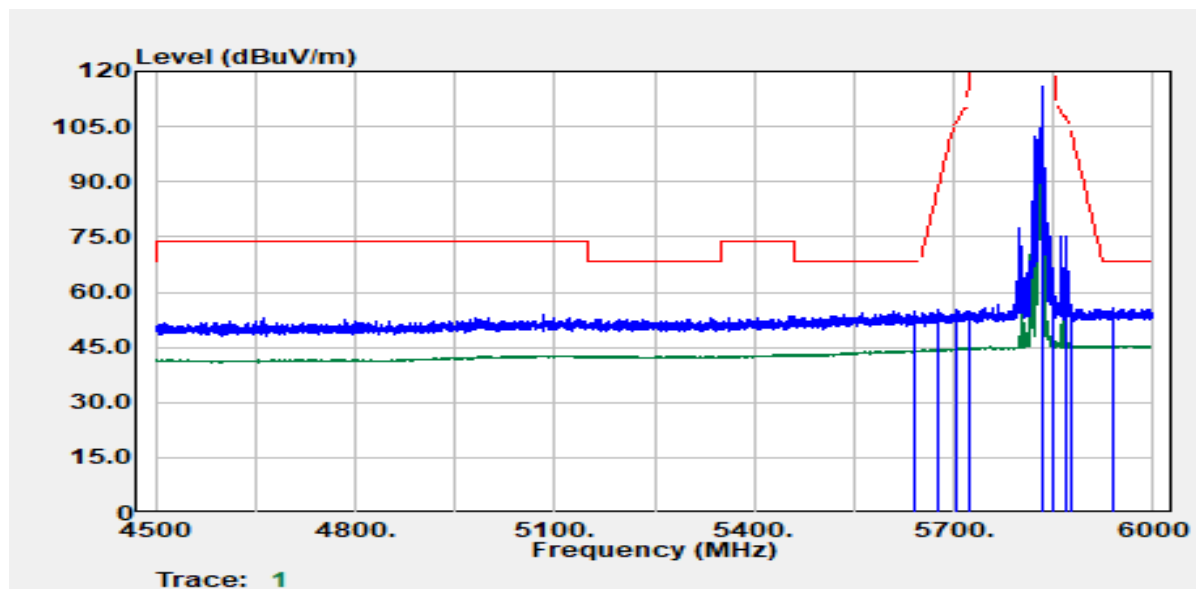


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5641.50	Peak	36.69	18.20	54.90	68.20	-13.30
5676.60	Peak	36.87	18.38	55.26	87.92	-32.67
5702.70	Peak	36.63	18.53	55.16	105.96	-50.80
5722.20	Peak	36.04	18.69	54.73	115.82	-61.09
5832.90	Peak	96.88	18.89	115.77	--	--
5832.90	Average	87.44	18.89	106.33	--	--
5850.90	Peak	45.42	18.91	64.33	120.15	-55.82
5868.00	Peak	56.41	18.92	75.33	107.16	-31.83
5875.80	Peak	37.76	18.93	56.68	104.61	-47.92
5941.20	Peak	36.55	19.01	55.56	68.20	-12.64

Test Mode	Mode 2 IEEE 802.11ax HE20 (26/8) / 5825 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

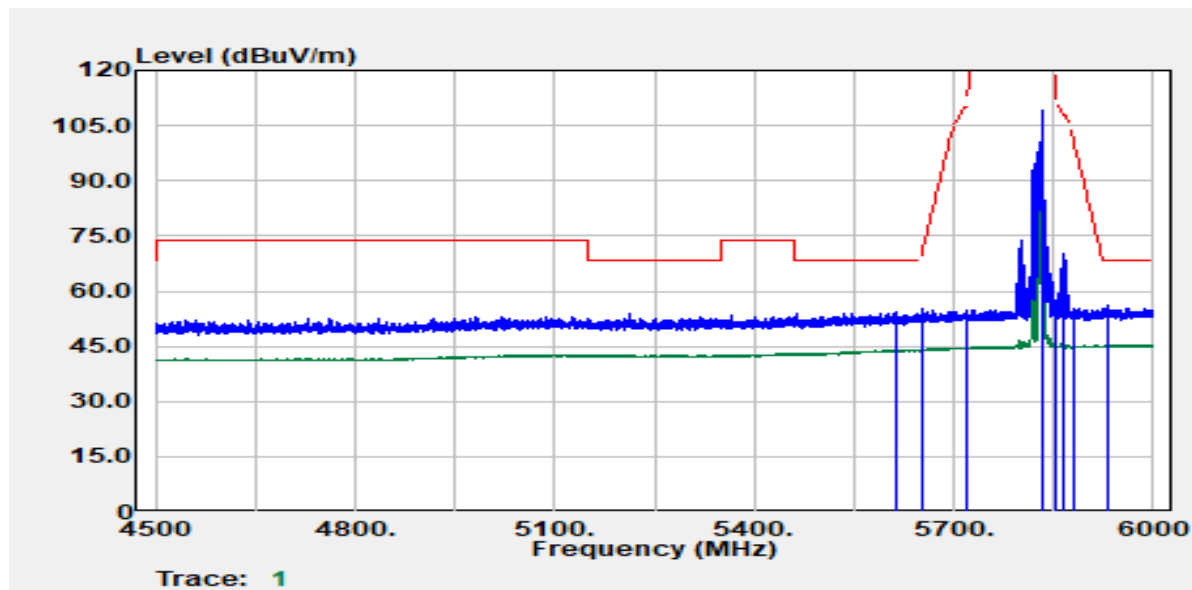


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5611.80	Peak	36.17	18.07	54.24	68.20	-13.96
5653.80	Peak	36.94	18.26	55.20	71.02	-15.82
5718.30	Peak	36.16	18.66	54.82	110.32	-55.51
5721.30	Peak	35.08	18.68	53.76	113.77	-60.00
5833.80	Peak	90.40	18.89	109.29	--	--
5833.80	Average	81.38	18.89	100.28	--	--
5852.10	Peak	38.65	18.91	57.56	117.41	-59.85
5865.60	Peak	51.31	18.92	70.23	107.83	-37.60
5881.50	Peak	36.35	18.93	55.28	100.37	-45.10
5933.10	Peak	37.02	18.99	56.02	68.20	-12.18

Test Mode	Mode 2 IEEE 802.11ax HE20 (52/40) / 5825 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

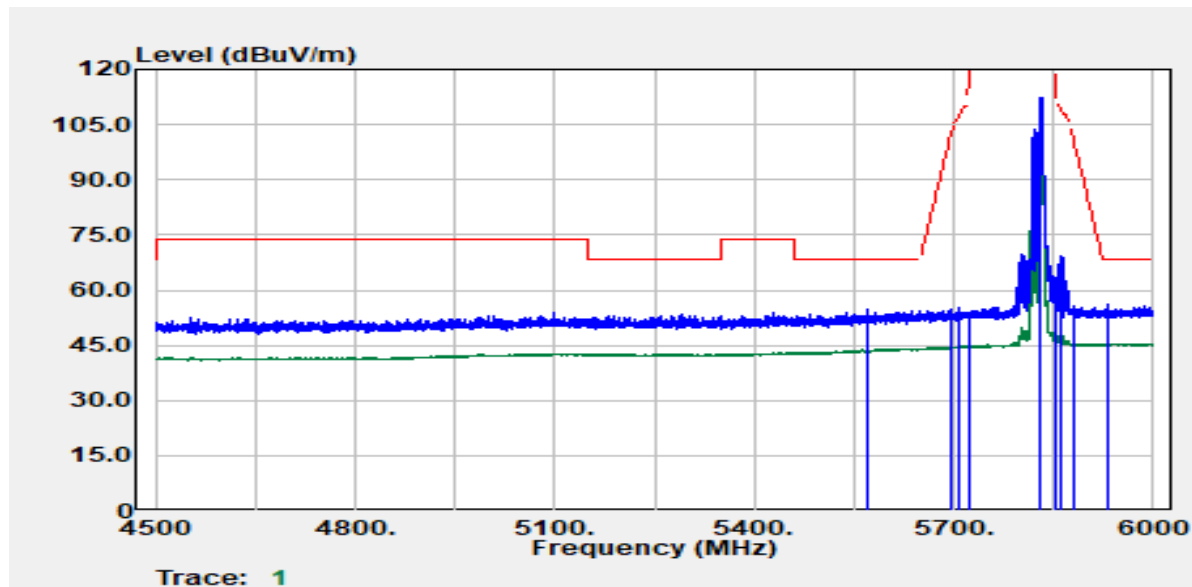

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5570.70	Peak	36.82	17.87	54.69	68.20	-13.51
5697.90	Peak	36.29	18.50	54.79	103.65	-48.86
5707.20	Peak	36.86	18.57	55.42	107.22	-51.80
5721.90	Peak	35.34	18.69	54.02	115.13	-61.11
5831.40	Peak	93.56	18.89	112.45	--	--
5831.40	Average	84.79	18.89	103.68	--	--
5853.90	Peak	42.74	18.91	61.65	113.31	-51.66
5862.90	Peak	50.59	18.92	69.51	108.59	-39.08
5882.10	Peak	36.55	18.93	55.48	99.93	-44.45
5933.10	Peak	36.96	18.99	55.95	68.20	-12.25


Test Mode	Mode 2 IEEE 802.11ax HE20 (52/40) / 5825 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

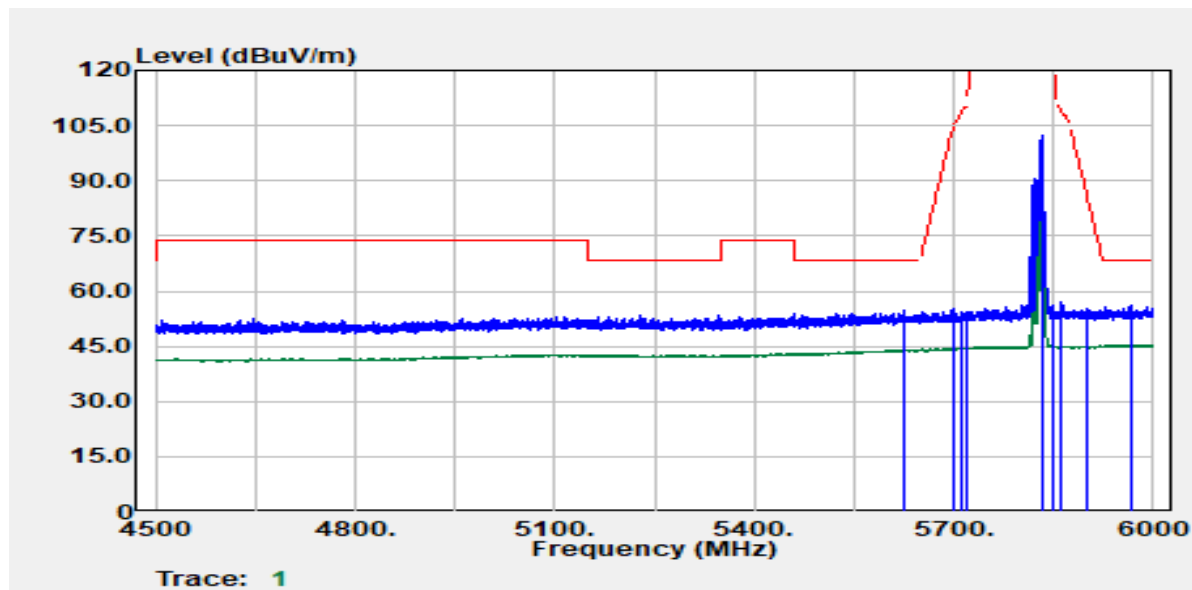

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5624.40	Peak	36.57	18.13	54.70	68.20	-13.50
5698.80	Peak	36.72	18.50	55.22	104.32	-49.09
5713.20	Peak	35.59	18.62	54.21	108.90	-54.69
5720.70	Peak	35.50	18.68	54.17	112.40	-58.22
5833.50	Peak	83.31	18.89	102.20	--	--
5833.50	Average	74.41	18.89	93.30	--	--
5850.60	Peak	36.14	18.91	55.05	120.83	-65.79
5860.50	Peak	38.19	18.92	57.11	109.26	-52.15
5900.10	Peak	36.12	18.94	55.06	86.59	-31.53
5967.00	Peak	37.28	19.04	56.32	68.20	-11.88


Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE20 (106/54) / 5825 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

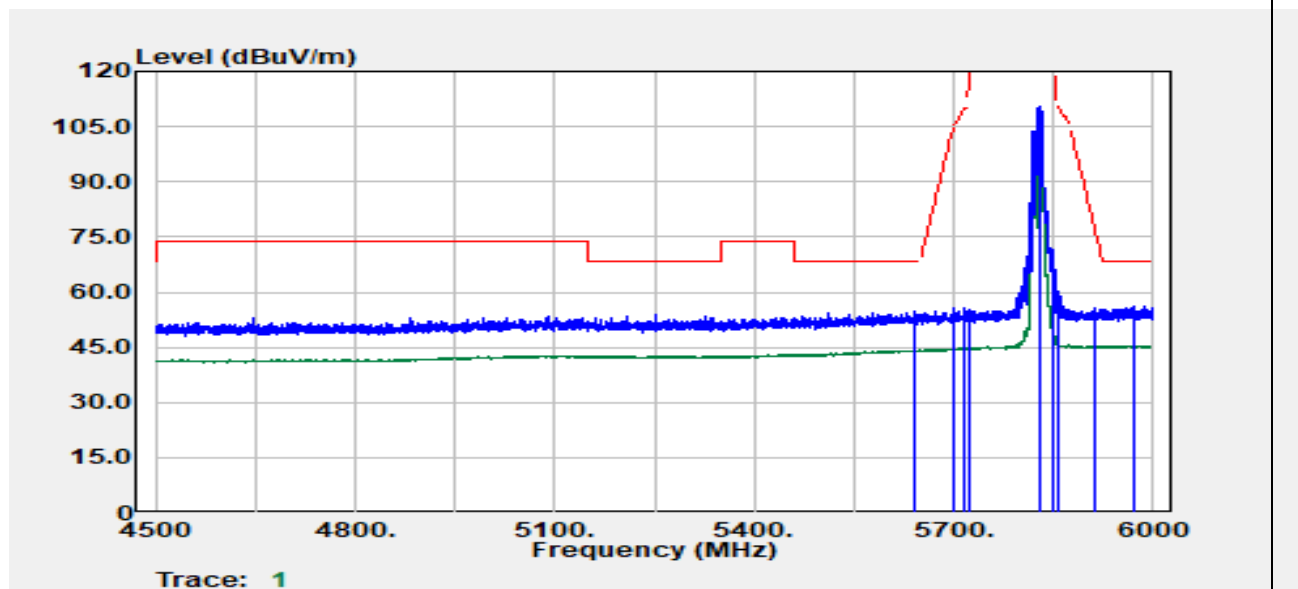


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5640.30	Peak	36.61	18.20	54.81	68.20	-13.39
5698.80	Peak	37.07	18.50	55.57	104.32	-48.74
5715.00	Peak	37.22	18.63	55.85	109.40	-53.55
5722.80	Peak	36.42	18.69	55.11	117.19	-62.08
5828.10	Peak	91.50	18.88	110.38	--	--
5828.10	Average	82.26	18.88	101.14	--	--
5851.20	Peak	48.58	18.91	67.49	119.46	-51.97
5855.40	Peak	41.18	18.91	60.09	110.69	-50.60
5913.60	Peak	36.62	18.96	55.58	76.61	-21.03
5972.40	Peak	37.01	19.05	56.06	68.20	-12.14

Test Mode	Mode 2 IEEE 802.11ax HE20 (106/54) / 5825 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

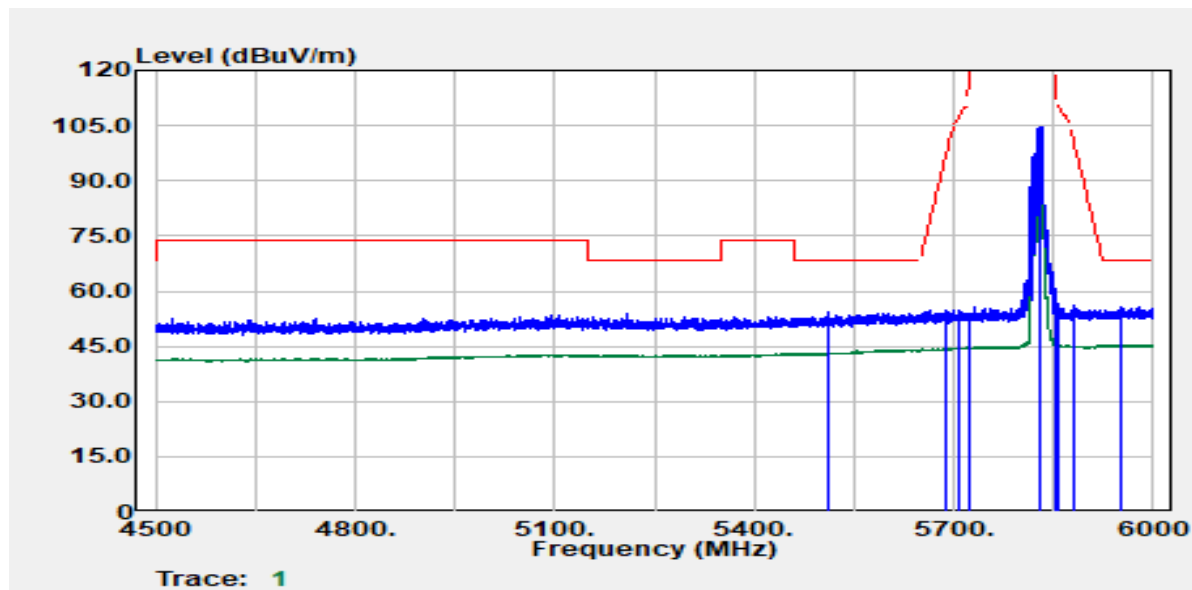

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5511.30	Peak	36.64	17.52	54.16	68.20	-14.04
5689.80	Peak	36.48	18.45	54.93	97.68	-42.75
5709.30	Peak	36.11	18.58	54.69	107.81	-53.11
5721.60	Peak	34.87	18.68	53.55	114.45	-60.90
5830.50	Peak	85.72	18.89	104.61	--	--
5830.50	Average	76.32	18.89	95.21	--	--
5853.60	Peak	40.68	18.91	59.59	113.99	-54.40
5855.70	Peak	37.59	18.91	56.51	110.60	-54.10
5881.80	Peak	37.07	18.93	56.00	100.15	-44.15
5949.90	Peak	36.81	19.02	55.83	68.20	-12.37


Test Mode	Mode 2 IEEE 802.11ax HE40 / 5755 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

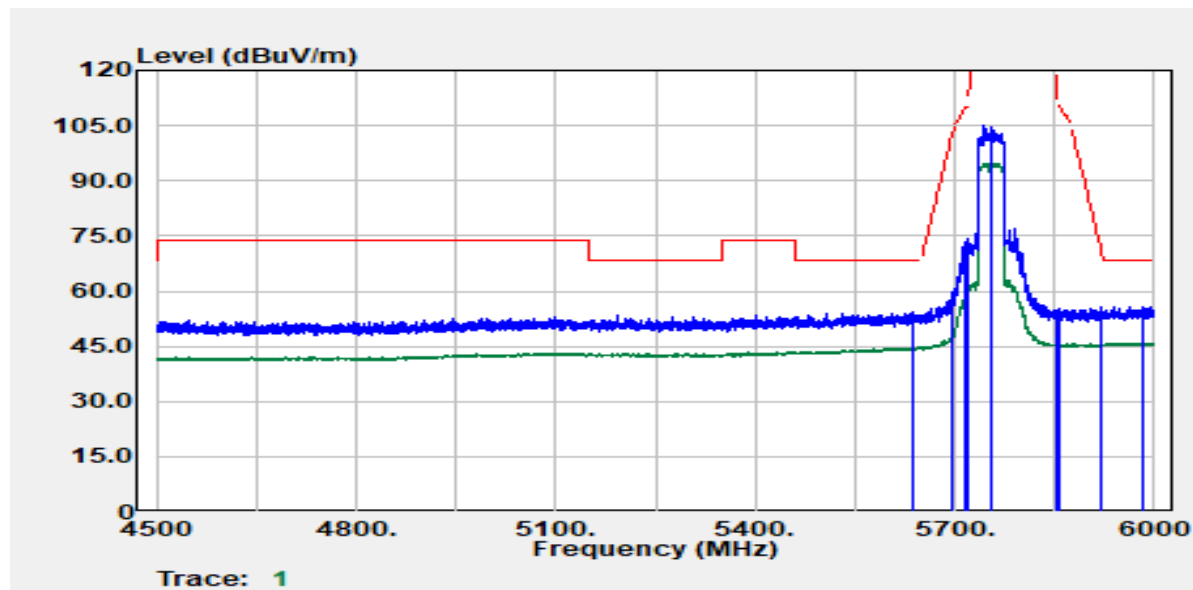

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5637.90	Peak	36.37	18.19	54.56	68.20	-13.64
5697.60	Peak	41.39	18.50	59.89	103.43	-43.54
5717.10	Peak	54.64	18.65	73.29	109.99	-36.70
5721.00	Peak	55.41	18.68	74.09	113.08	-38.99
5755.00	Peak	86.29	18.90	105.20	--	--
5755.00	Average	75.87	18.90	94.78	--	--
5853.30	Peak	36.06	18.91	54.97	114.67	-59.70
5857.20	Peak	36.23	18.91	55.15	110.18	-55.04
5919.00	Peak	36.51	18.97	55.48	72.62	-17.15
5982.30	Peak	36.75	19.06	55.81	68.20	-12.39


Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE40 / 5755 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

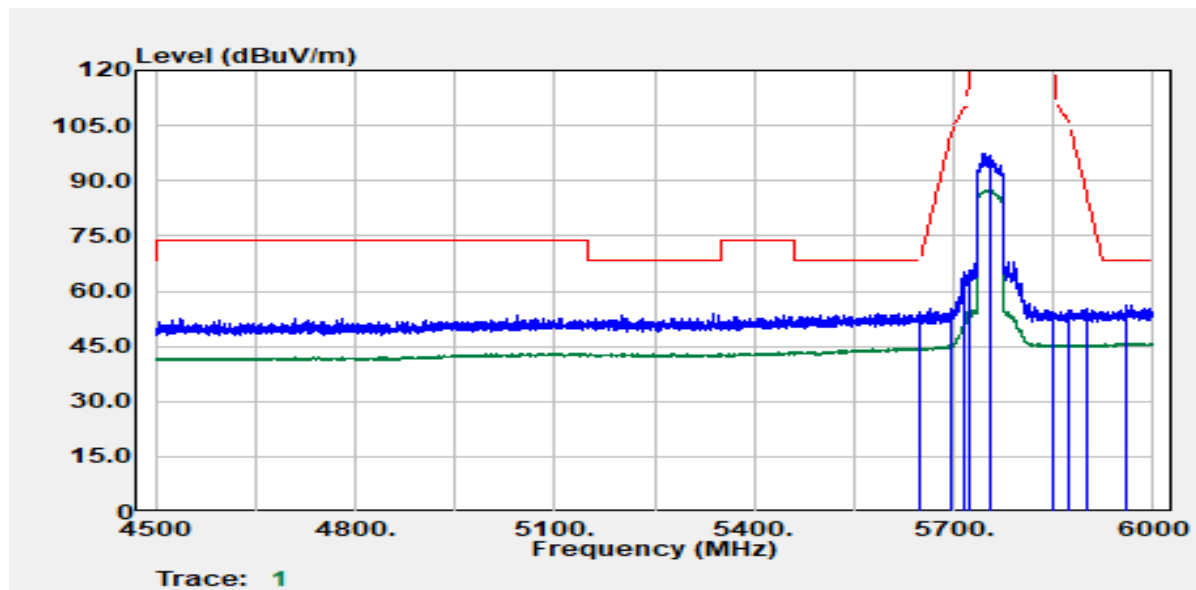


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5648.70	Peak	36.01	18.23	54.25	68.20	-13.95
5697.90	Peak	36.66	18.50	55.16	103.65	-48.49
5717.10	Peak	46.42	18.65	65.07	109.99	-44.92
5724.00	Peak	47.02	18.70	65.73	119.92	-54.19
5755.00	Peak	78.46	18.90	97.37	--	--
5755.00	Average	68.54	18.90	87.44	--	--
5851.20	Peak	35.49	18.91	54.40	119.46	-65.07
5871.30	Peak	35.89	18.92	54.81	106.23	-51.43
5898.90	Peak	36.12	18.94	55.06	87.47	-32.41
5958.60	Peak	37.11	19.03	56.14	68.20	-12.06

Test Mode	Mode 2 IEEE 802.11ax HE40 (242/61) / 5755 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

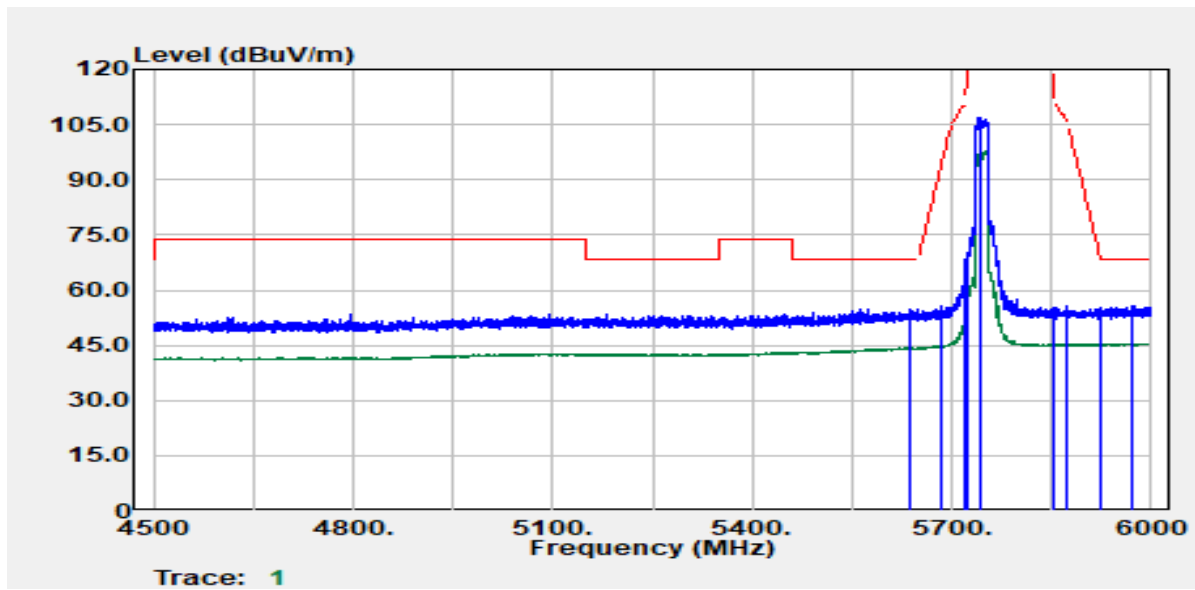


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5638.50	Peak	36.70	18.19	54.89	68.20	-13.31
5682.90	Peak	37.34	18.42	55.76	92.58	-36.82
5720.10	Peak	48.19	18.67	66.86	111.03	-44.17
5724.60	Peak	50.72	18.71	69.43	121.29	-51.86
5742.00	Peak	88.12	18.85	106.97	--	--
5742.00	Average	78.76	18.85	97.60	--	--
5852.40	Peak	36.14	18.91	55.05	116.73	-61.68
5872.20	Peak	36.66	18.92	55.58	105.98	-50.40
5923.80	Peak	36.46	18.98	55.44	69.08	-13.64
5969.70	Peak	36.65	19.04	55.70	68.20	-12.50

Test Mode	Mode 2 IEEE 802.11ax HE40 (242/61) / 5755 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

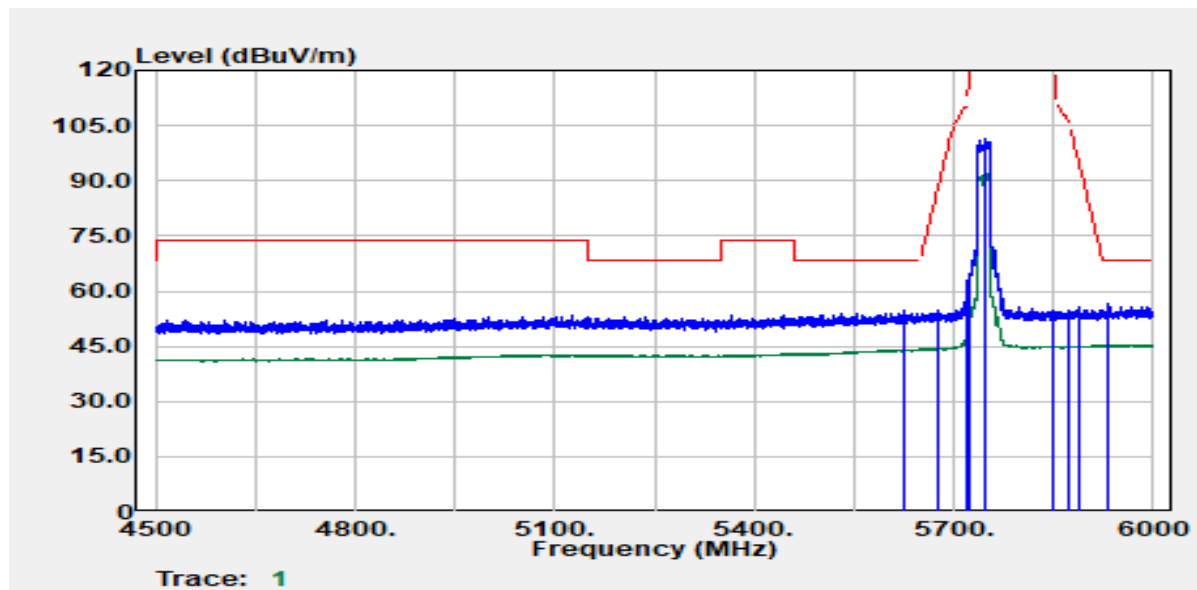


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5626.20	Peak	36.51	18.14	54.64	68.20	-13.56
5674.50	Peak	36.50	18.37	54.87	86.37	-31.50
5719.80	Peak	40.54	18.67	59.20	110.74	-51.54
5722.20	Peak	45.51	18.69	64.20	115.82	-51.62
5748.00	Peak	82.60	18.89	101.49	--	--
5748.00	Average	73.10	18.89	91.99	--	--
5850.90	Peak	35.85	18.91	54.77	120.15	-65.38
5871.30	Peak	36.04	18.92	54.96	106.23	-51.27
5887.80	Peak	36.82	18.93	55.76	95.70	-39.94
5930.40	Peak	37.62	18.99	56.61	68.20	-11.59

Test Mode	Mode 2 IEEE 802.11ax HE40 / 5795 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

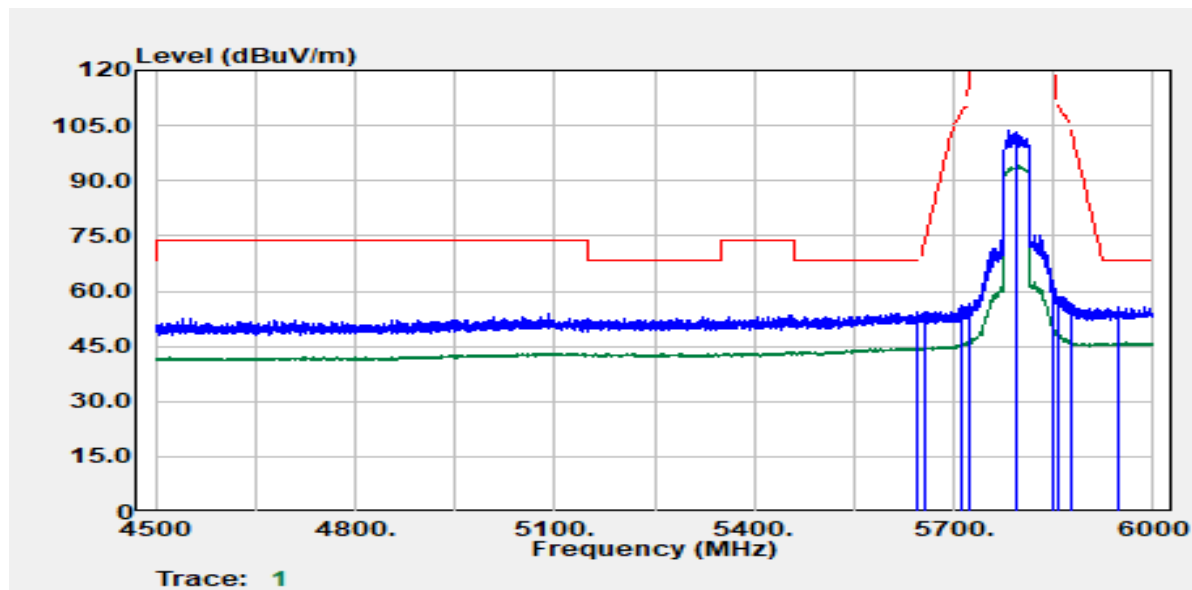


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5644.80	Peak	36.07	18.22	54.29	68.20	-13.91
5658.30	Peak	36.08	18.28	54.36	74.36	-20.00
5712.30	Peak	37.72	18.61	56.33	108.65	-52.31
5724.90	Peak	37.94	18.71	56.65	121.97	-65.32
5795.00	Peak	84.89	18.86	103.75	--	--
5795.00	Average	75.23	18.86	94.09	--	--
5850.90	Peak	44.13	18.91	63.04	120.15	-57.10
5856.60	Peak	39.70	18.91	58.62	110.35	-51.73
5875.50	Peak	37.63	18.93	56.55	104.83	-48.28
5948.70	Peak	36.67	19.02	55.68	68.20	-12.52

Test Mode	Mode 2 IEEE 802.11ax HE40 / 5795 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

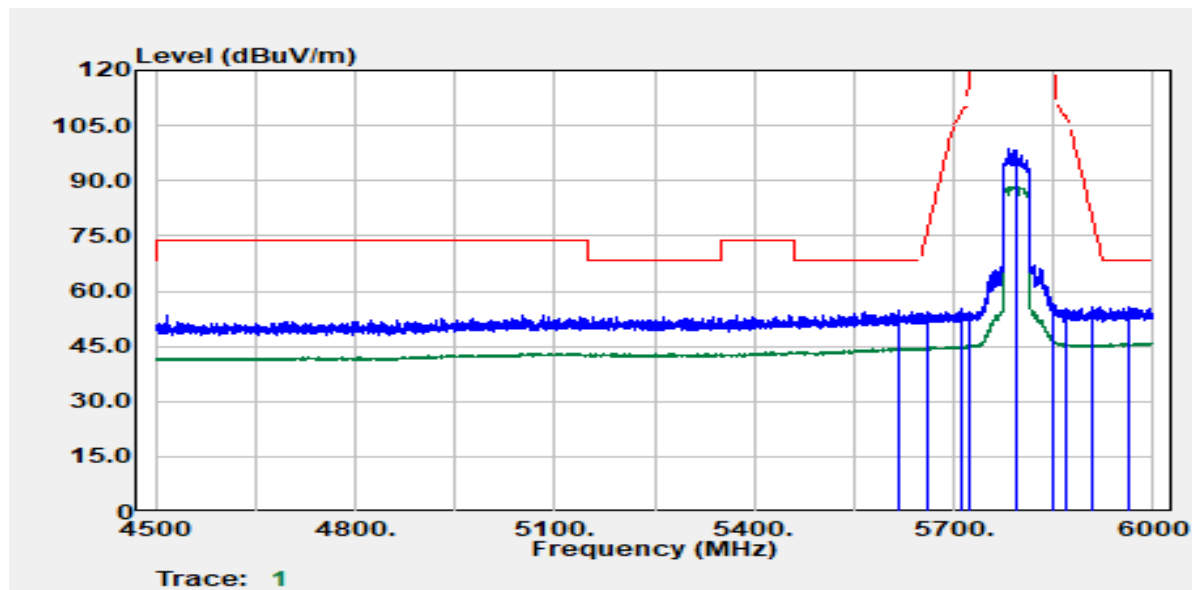


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5617.20	Peak	36.64	18.10	54.74	68.20	-13.46
5661.60	Peak	36.05	18.30	54.36	76.81	-22.46
5713.50	Peak	36.64	18.62	55.25	108.98	-53.73
5722.50	Peak	35.60	18.69	54.29	116.50	-62.21
5795.00	Peak	79.84	18.86	98.70	--	--
5795.00	Average	69.60	18.86	88.45	--	--
5850.00	Peak	37.64	18.91	56.55	122.20	-65.65
5867.10	Peak	36.52	18.92	55.44	107.41	-51.97
5907.00	Peak	36.64	18.95	55.59	81.48	-25.89
5961.30	Peak	36.84	19.03	55.87	68.20	-12.33

Test Mode	Mode 2 IEEE 802.11ax HE40 (242/62) / 5795 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

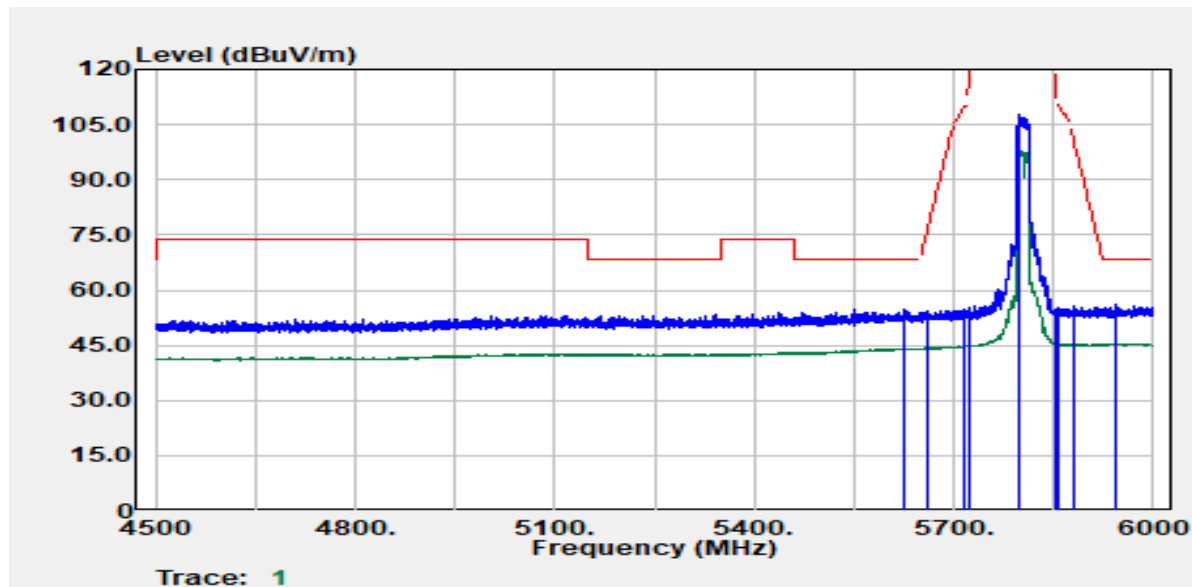


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5626.80	Peak	36.78	18.14	54.91	68.20	-13.29
5659.80	Peak	36.05	18.29	54.34	75.48	-21.13
5714.40	Peak	35.98	18.63	54.61	109.23	-54.62
5724.30	Peak	36.32	18.70	55.03	120.60	-65.58
5799.60	Peak	88.93	18.85	107.79	--	--
5799.60	Average	79.02	18.85	97.87	--	--
5851.80	Peak	35.89	18.91	54.80	118.09	-63.29
5856.90	Peak	36.34	18.91	55.25	110.27	-55.02
5880.30	Peak	36.65	18.93	55.58	101.26	-45.68
5945.40	Peak	37.08	19.01	56.09	68.20	-12.11

Test Mode	Mode 2 IEEE 802.11ax HE40 (242/62) / 5795 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

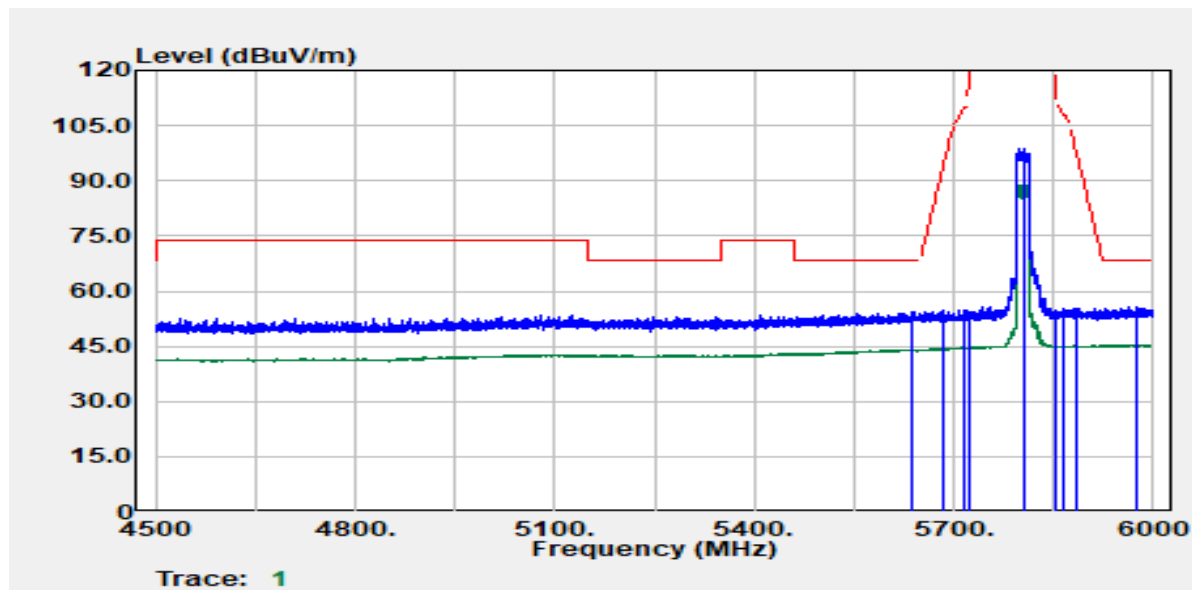

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5637.90	Peak	36.36	18.19	54.55	68.20	-13.65
5685.30	Peak	36.16	18.43	54.59	94.36	-39.76
5714.40	Peak	36.30	18.63	54.92	109.23	-54.31
5721.90	Peak	35.75	18.69	54.43	115.13	-60.70
5807.70	Peak	79.93	18.86	98.78	--	--
5807.70	Average	70.06	18.86	88.92	--	--
5852.10	Peak	35.18	18.91	54.09	117.41	-63.32
5864.40	Peak	36.17	18.92	55.08	108.17	-53.08
5883.30	Peak	36.37	18.93	55.30	99.04	-43.73
5976.00	Peak	36.59	19.05	55.64	68.20	-12.56


Test Mode	Mode 2 IEEE 802.11ax HE80 / 5775 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

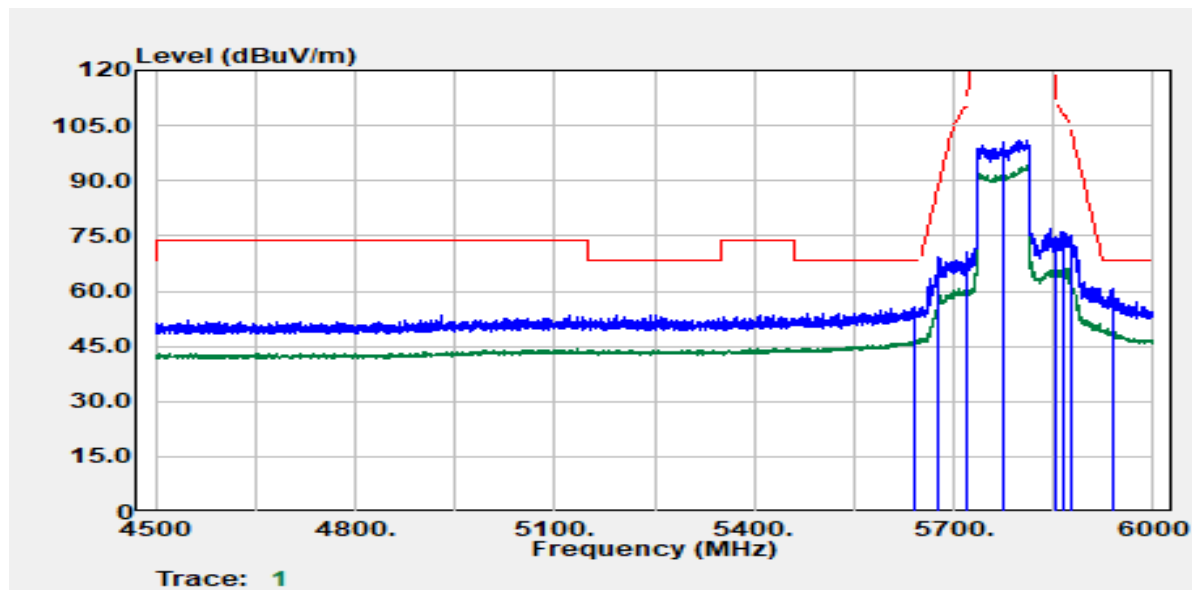

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5641.50	Peak	37.33	18.20	55.53	68.20	-12.67
5675.70	Peak	50.80	18.38	69.18	87.26	-18.08
5718.60	Peak	50.59	18.66	69.25	110.41	-41.16
5720.70	Peak	51.74	18.68	70.42	112.40	-41.98
5775.00	Peak	82.01	18.88	100.89	--	--
5775.00	Average	75.09	18.88	93.97	--	--
5852.70	Peak	56.01	18.91	74.92	116.04	-41.12
5863.80	Peak	57.29	18.92	76.20	108.33	-32.13
5875.20	Peak	56.21	18.93	75.14	105.05	-29.91
5939.70	Peak	41.61	19.00	60.61	68.20	-7.59


Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE80 / 5775 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

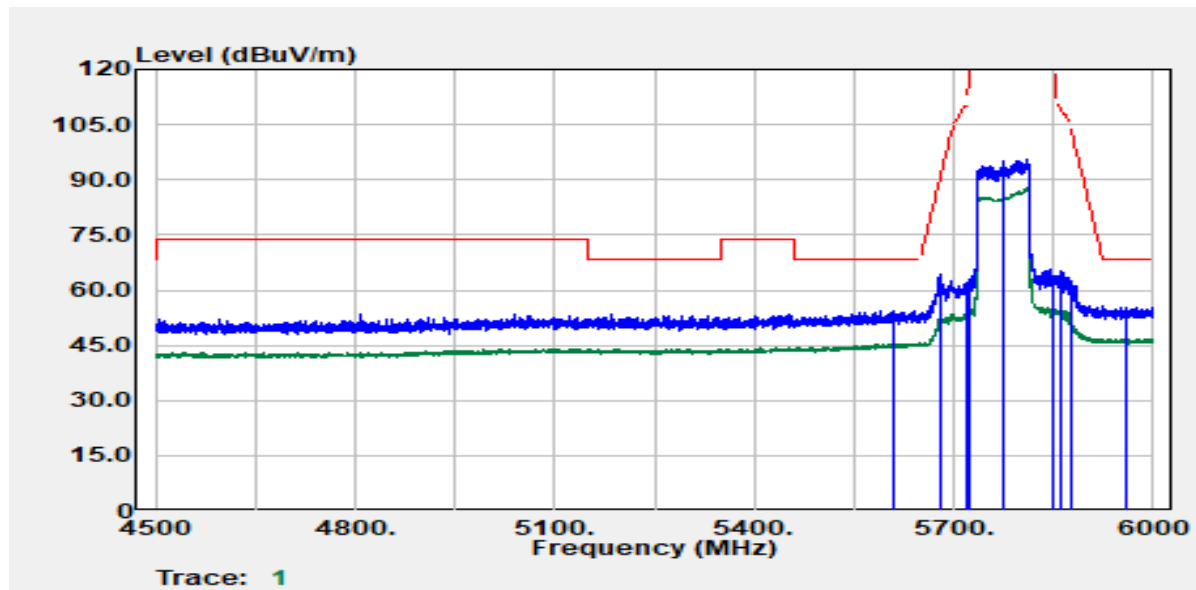

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5607.60	Peak	36.40	18.05	54.46	68.20	-13.74
5681.10	Peak	45.97	18.41	64.37	91.25	-26.88
5718.90	Peak	43.16	18.66	61.83	110.49	-48.67
5724.90	Peak	43.51	18.71	62.22	121.97	-59.75
5775.00	Peak	76.48	18.88	95.36	--	--
5775.00	Average	68.90	18.88	87.78	--	--
5850.00	Peak	45.12	18.91	64.03	122.20	-58.17
5860.80	Peak	46.13	18.92	65.05	109.17	-44.12
5875.80	Peak	43.74	18.93	62.67	104.61	-41.94
5959.20	Peak	36.33	19.03	55.36	68.20	-12.84


Test Mode	Mode 2 IEEE 802.11ax HE80 (484/65) / 5775 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

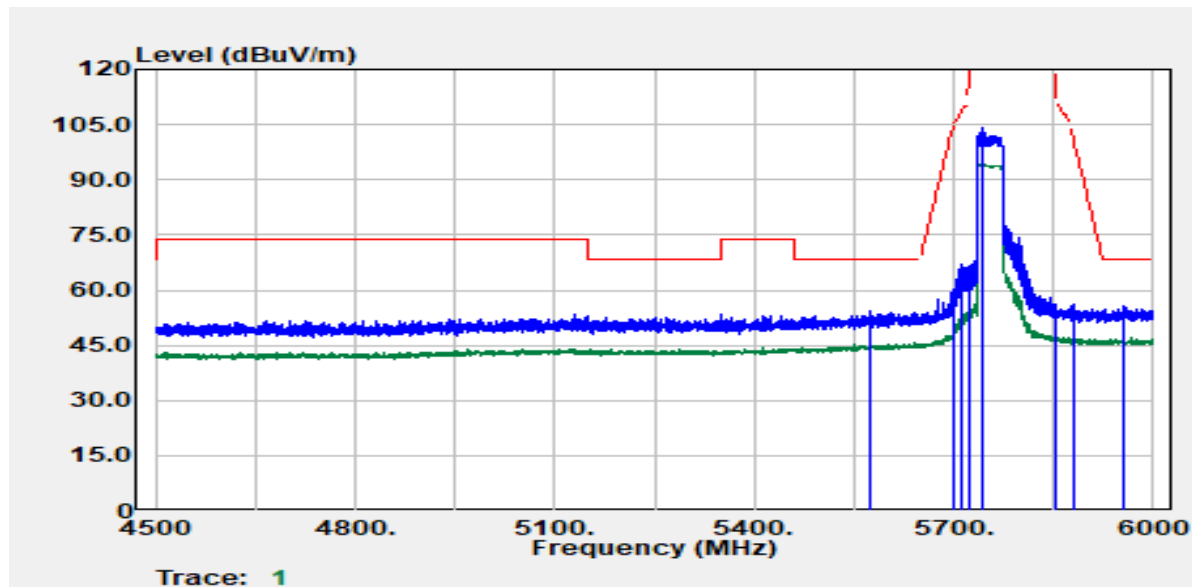

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5574.90	Peak	36.49	17.89	54.38	68.20	-13.82
5699.10	Peak	41.28	18.51	59.79	104.54	-44.75
5712.30	Peak	48.24	18.61	66.85	108.65	-41.80
5723.70	Peak	47.97	18.70	66.67	119.24	-52.57
5744.10	Peak	85.13	18.86	103.99	--	--
5744.10	Average	75.25	18.86	94.11	--	--
5853.00	Peak	37.09	18.91	56.00	115.36	-59.36
5855.10	Peak	35.90	18.91	54.81	110.77	-55.96
5880.00	Peak	37.01	18.93	55.94	101.49	-45.55
5957.10	Peak	36.59	19.03	55.62	68.20	-12.58

Report No.: TMWK2209003822KR


Test Mode	Mode 2 IEEE 802.11ax HE80 (484/65) / 5775 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

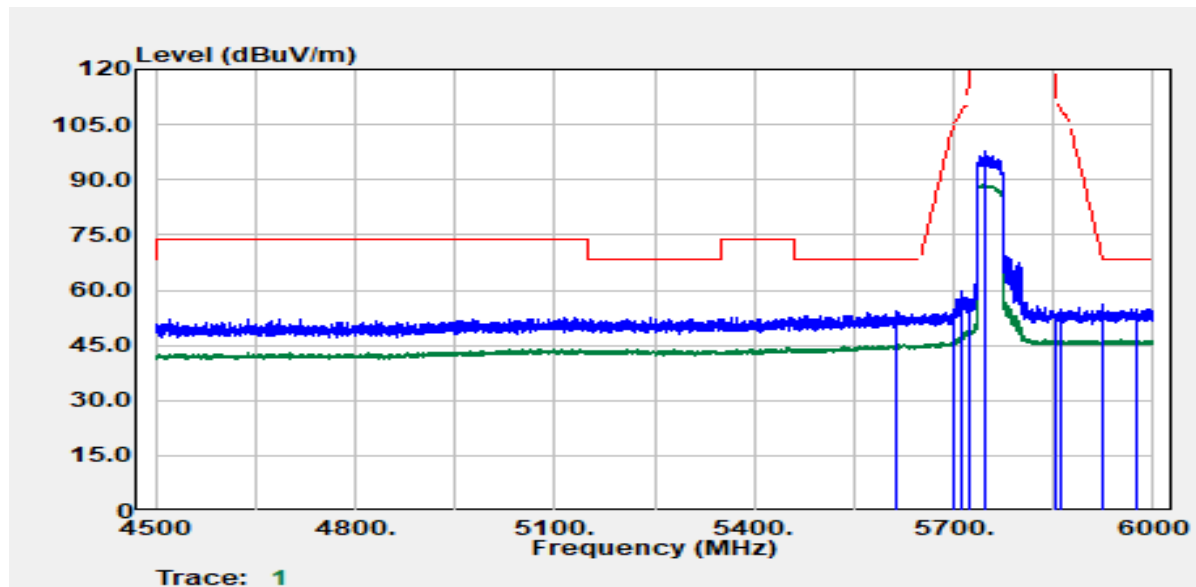

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5613.60	Peak	36.13	18.08	54.21	68.20	-13.99
5699.40	Peak	36.02	18.51	54.53	104.76	-50.23
5712.00	Peak	41.11	18.61	59.72	108.56	-48.85
5722.20	Peak	38.68	18.69	57.37	115.82	-58.45
5748.90	Peak	79.08	18.90	97.98	--	--
5748.90	Average	69.69	18.90	88.60	--	--
5851.50	Peak	34.52	18.91	53.44	118.78	-65.34
5862.90	Peak	35.93	18.92	54.85	108.59	-53.74
5922.90	Peak	37.21	18.98	56.19	69.75	-13.56
5973.30	Peak	35.85	19.05	54.90	68.20	-13.30


Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE80 (484/66) / 5775 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

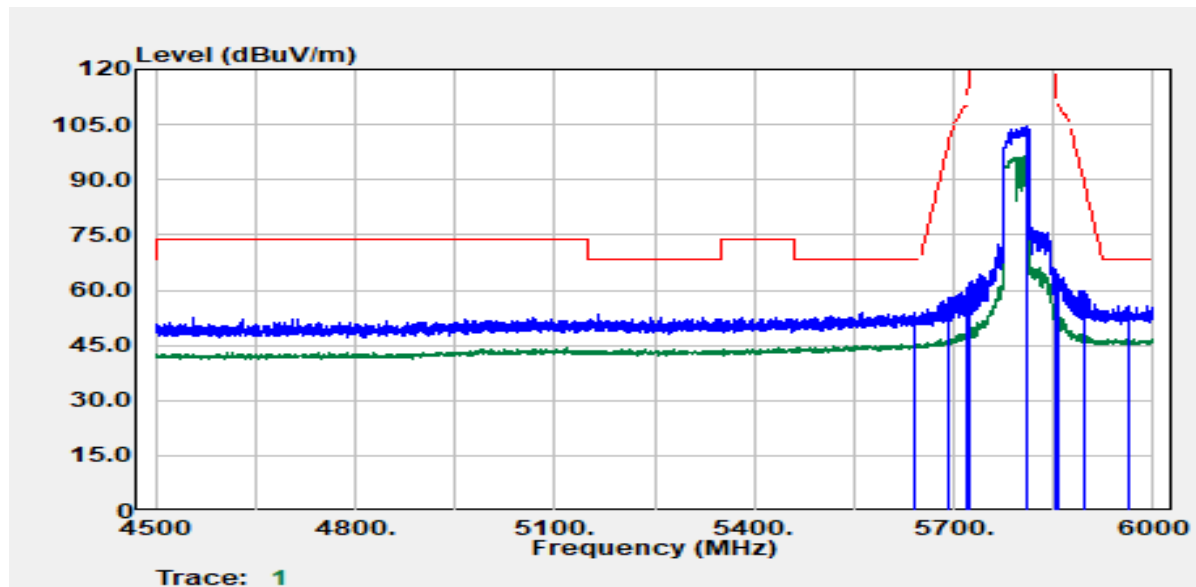

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5641.50	Peak	35.76	18.20	53.96	68.20	-14.24
5694.00	Peak	39.56	18.48	58.04	100.78	-42.73
5718.90	Peak	41.80	18.66	60.46	110.49	-50.03
5724.90	Peak	41.42	18.71	60.13	121.97	-61.84
5811.00	Peak	85.96	18.86	104.82	--	--
5811.00	Average	77.61	18.86	96.47	--	--
5853.90	Peak	46.62	18.91	65.53	113.31	-47.78
5858.70	Peak	45.35	18.92	64.27	109.76	-45.50
5896.50	Peak	40.87	18.94	59.81	89.25	-29.44
5962.20	Peak	36.89	19.03	55.92	68.20	-12.28

Test Mode	Mode 2 IEEE 802.11ax HE80 (484/66) / 5775 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Band Edge	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

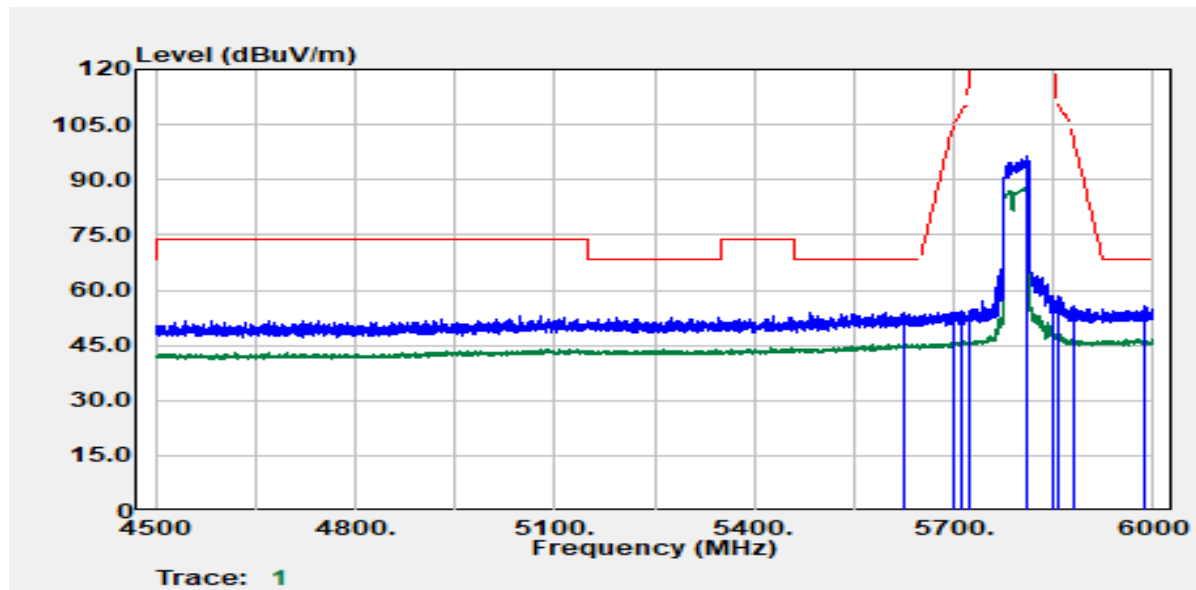


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5625.60	Peak	35.72	18.13	53.85	68.20	-14.35
5699.70	Peak	35.43	18.51	53.94	104.98	-51.04
5710.20	Peak	35.73	18.59	54.32	108.06	-53.74
5721.90	Peak	35.46	18.69	54.15	115.13	-60.99
5811.00	Peak	77.58	18.86	96.44	--	--
5811.00	Average	69.18	18.86	88.04	--	--
5850.60	Peak	38.83	18.91	57.74	120.83	-63.09
5856.90	Peak	39.55	18.91	58.47	110.27	-51.80
5879.70	Peak	36.65	18.93	55.58	101.71	-46.13
5985.00	Peak	36.44	19.06	55.50	68.20	-12.70

Report No.: TMWK2209003822KR

Below 1G Test Data

Test Data for UNII-1

Test Mode	Mode 2 IEEE 802.11a / 5220 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	30MHz-1GHz	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

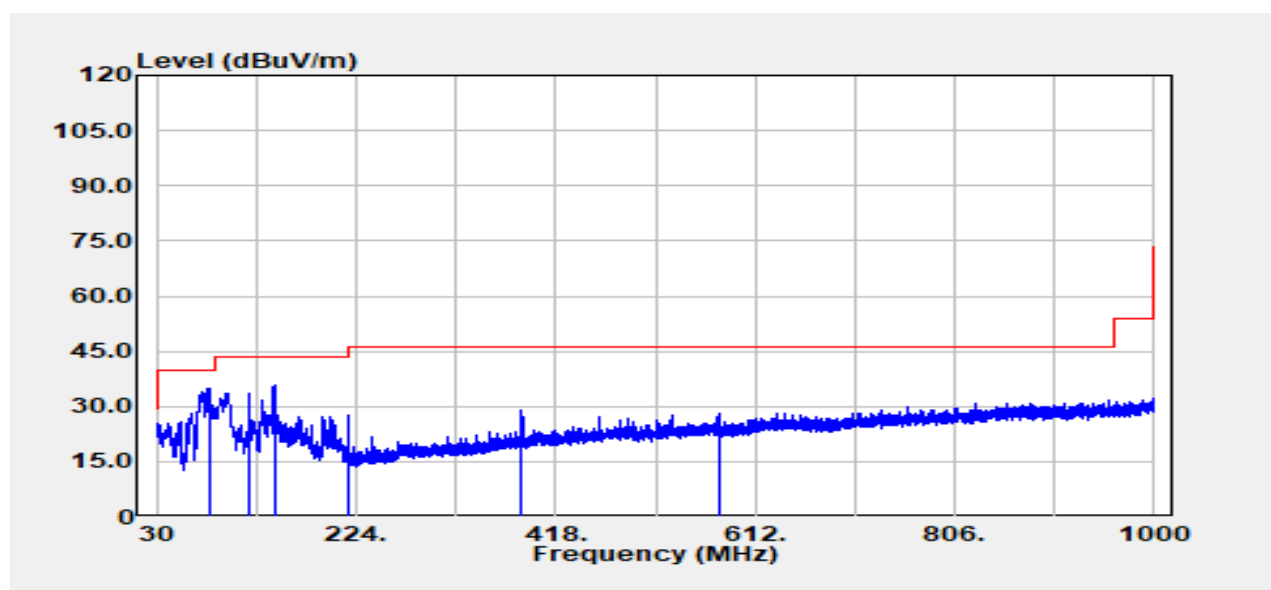


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
81.29	Peak	51.04	-16.18	34.86	40.00	-5.14
120.45	Peak	43.10	-9.41	33.69	43.50	-9.81
144.46	Peak	46.31	-10.41	35.91	43.50	-7.59
215.76	Peak	39.59	-12.03	27.56	43.50	-15.94
383.69	Peak	35.54	-6.69	28.86	46.00	-17.14
578.17	Peak	30.68	-2.45	28.24	46.00	-17.76

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11a / 5220 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	30MHz-1GHz	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

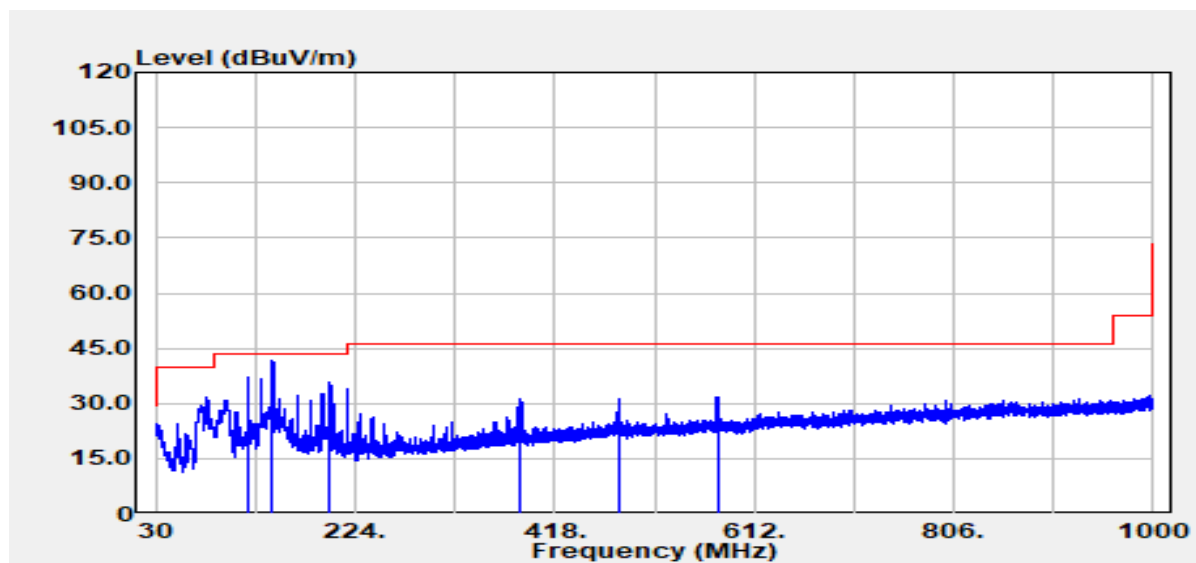


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
120.45	Peak	46.54	-9.41	37.13	43.50	-6.37
143.85	Peak	52.07	-10.37	41.70	43.50	-1.80
199.27	Peak	45.63	-9.91	35.72	43.50	-7.78
385.38	Peak	37.89	-6.61	31.28	46.00	-14.72
481.66	Peak	35.09	-3.82	31.27	46.00	-14.73
578.05	Peak	34.17	-2.45	31.73	46.00	-14.27

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2209003822KR

Test Data for UNII-3

Test Mode	Mode 2 IEEE 802.11ac80 / 5775 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	30MHz-1GHz	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

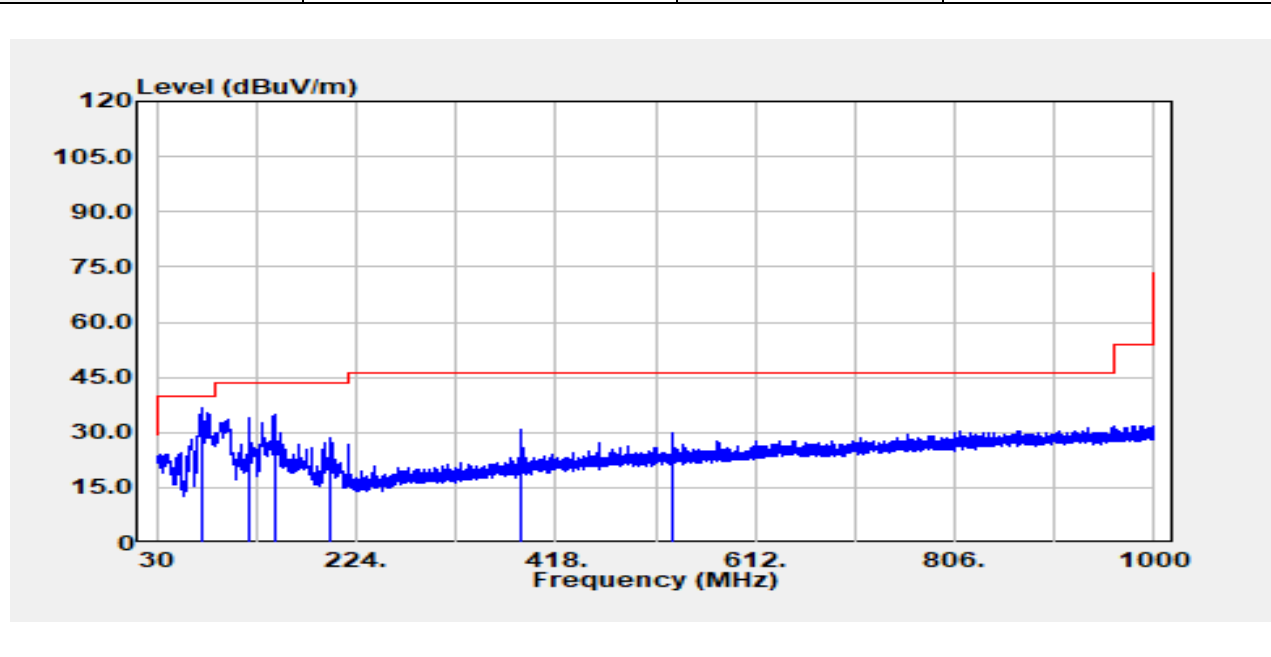


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
73.29	Peak	52.39	-15.73	36.66	40.00	-3.34
119.85	Peak	43.46	-9.37	34.09	43.50	-9.41
144.46	Peak	45.14	-10.41	34.73	43.50	-8.77
199.87	Peak	38.58	-9.90	28.68	43.50	-14.82
383.57	Peak	37.33	-6.69	30.64	46.00	-15.36
532.34	Peak	33.18	-3.33	29.85	46.00	-16.15

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ac80 / 5775 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	30MHz-1GHz	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

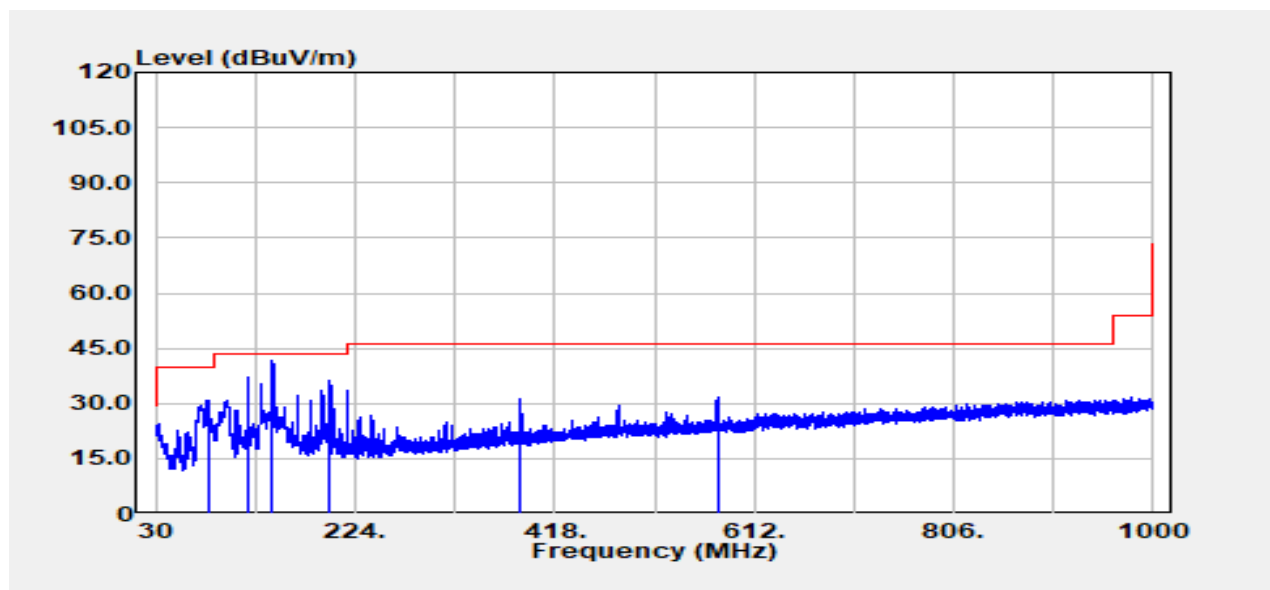

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
80.56	Peak	47.06	-16.08	30.98	40.00	-9.02
120.45	Peak	46.51	-9.41	37.10	43.50	-6.40
143.85	Peak	52.23	-10.37	41.86	43.50	-1.64
199.87	Peak	45.91	-9.90	36.00	43.50	-7.50
385.26	Peak	37.92	-6.62	31.30	46.00	-14.70
577.81	Peak	34.20	-2.45	31.75	46.00	-14.25


Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: TMWK2209003822KR

Above 1G

Test Data for UNII-1

Test Mode	Mode 2 IEEE 802.11a / 5180 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

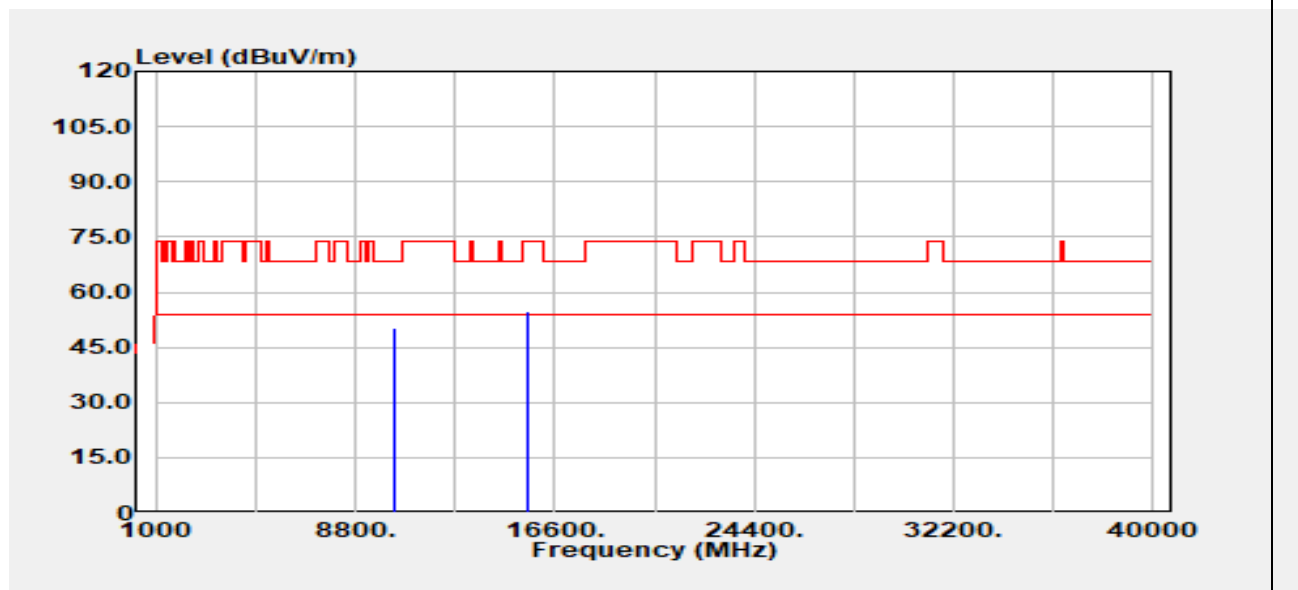


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10360.00	Peak	32.09	18.27	50.35	68.20	-17.85
15540.00	Peak	32.59	22.34	54.93	74.00	-19.07
15540.00	Average	25.06	22.34	47.39	54.00	-6.61
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11a / 5180 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

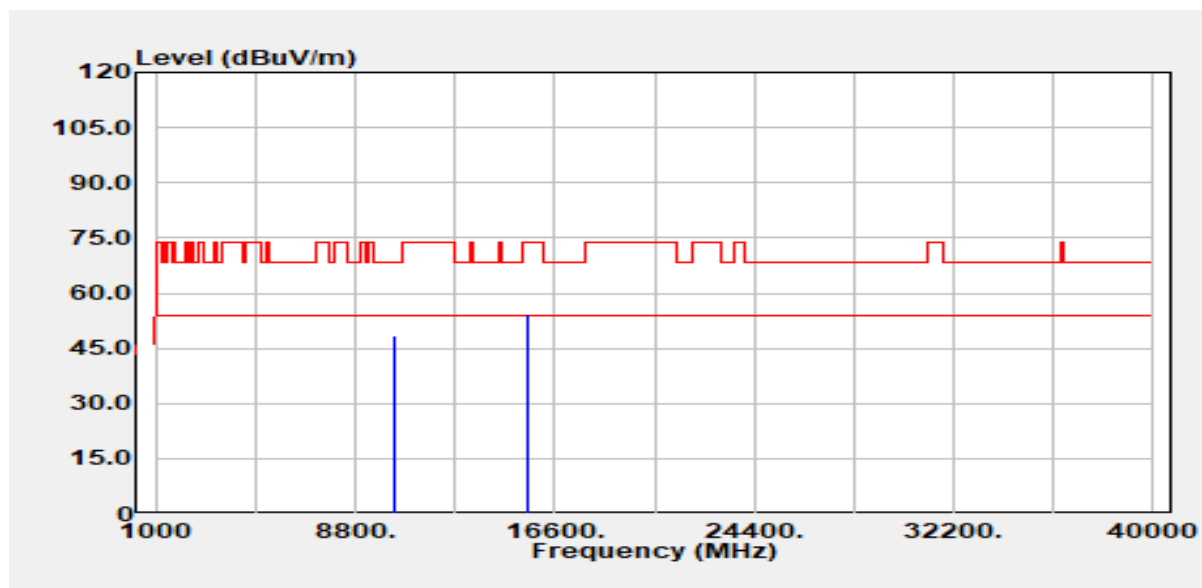


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10360.00	Peak	30.38	18.27	48.65	68.20	-19.55
15540.00	Peak	32.16	22.34	54.50	74.00	-19.50
15540.00	Average	24.90	22.34	47.24	54.00	-6.76
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11a / 5220 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Harmonics	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

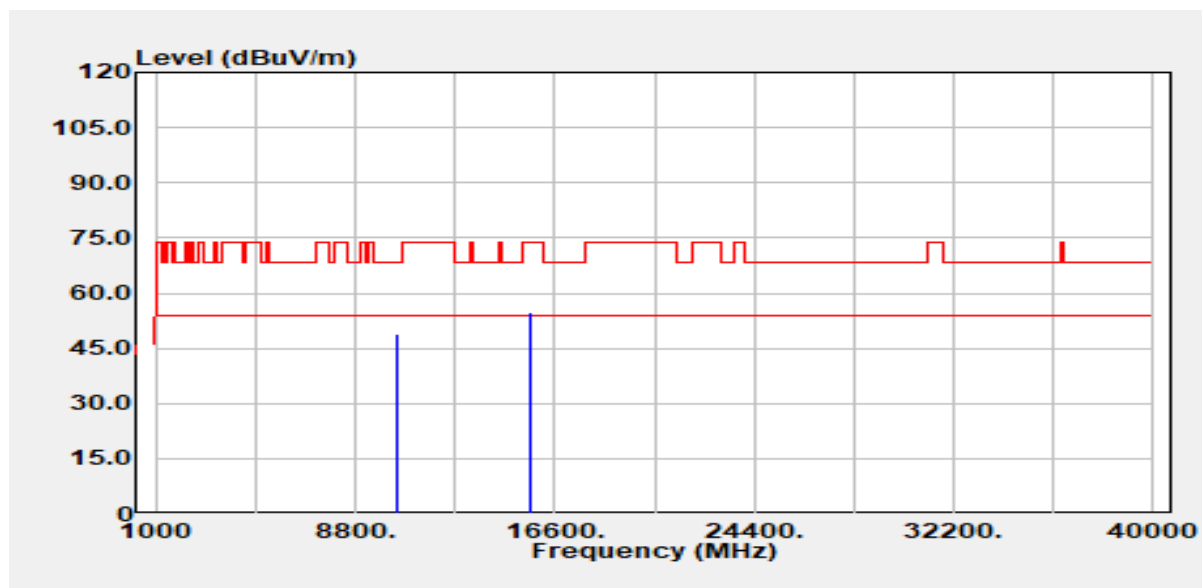


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10440.00	Peak	30.38	18.35	48.73	68.20	-19.47
15660.00	Peak	32.45	22.55	55.00	74.00	-19.00
15660.00	Average	24.88	22.55	47.43	54.00	-6.57
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11a / 5220 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

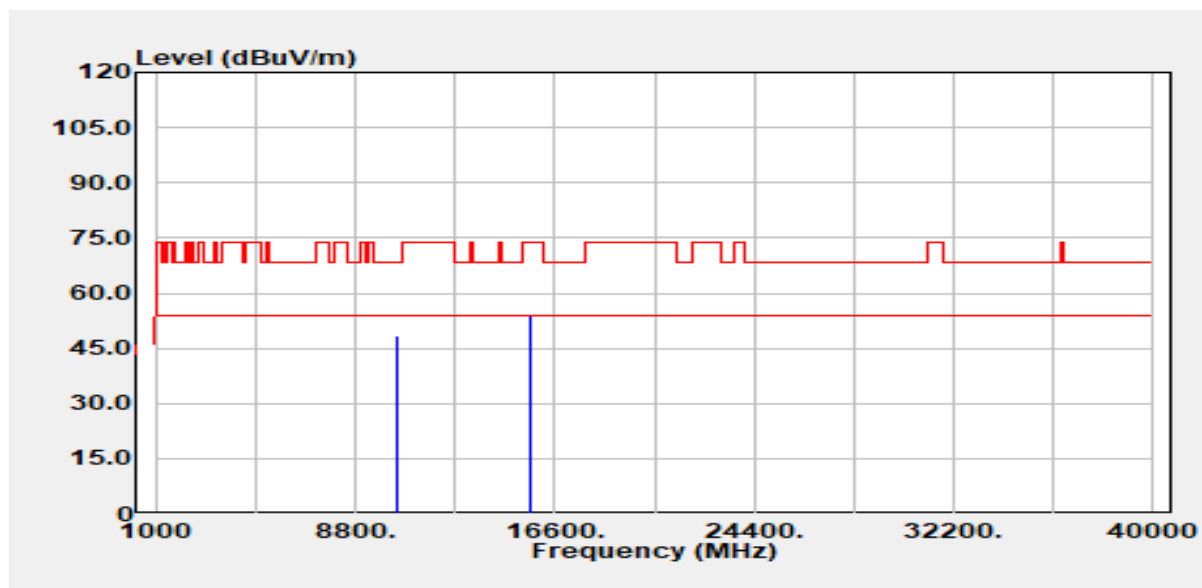


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10440.00	Peak	30.26	18.35	48.61	68.20	-19.59
15660.00	Peak	31.53	22.55	54.09	74.00	-19.91
15660.00	Average	24.31	22.55	46.86	54.00	-7.14
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11a / 5240 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

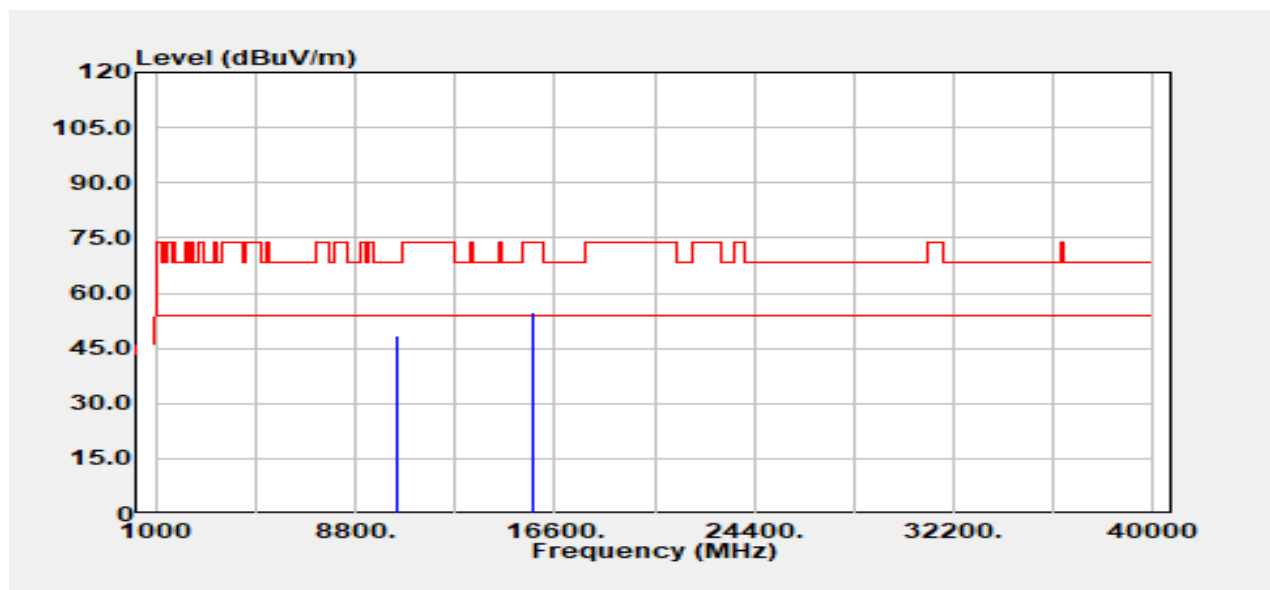


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.00	Peak	30.23	18.39	48.62	68.20	-19.58
15720.00	Peak	31.57	23.12	54.70	74.00	-19.30
15720.00	Average	24.14	23.12	47.27	54.00	-6.73
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11a / 5240 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

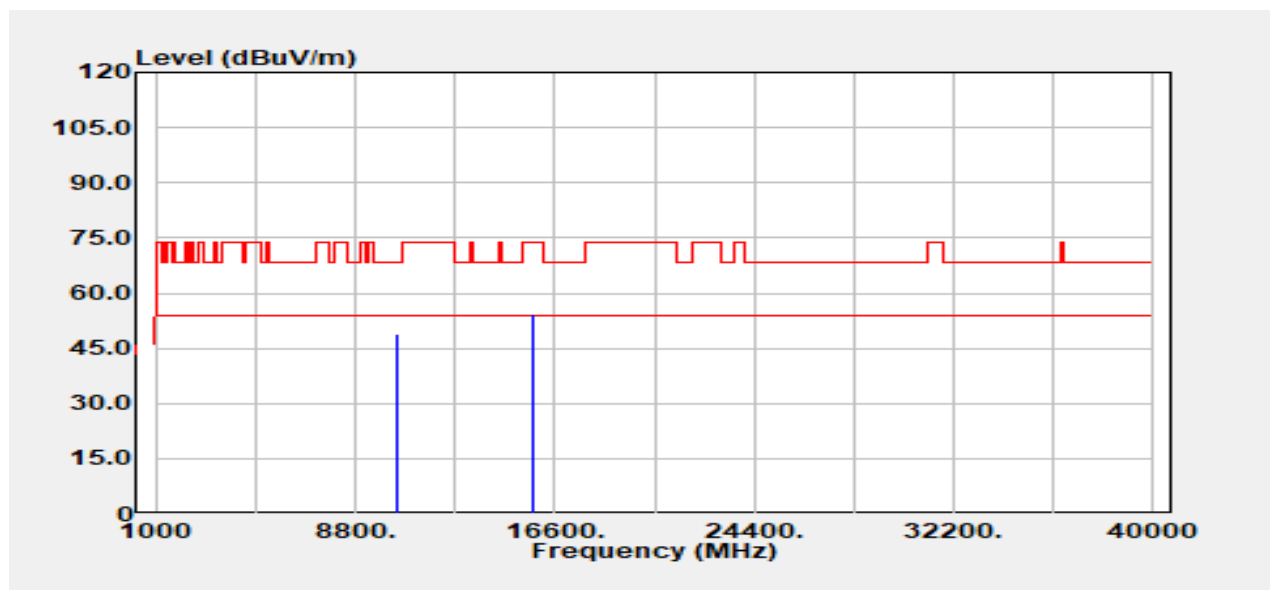


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10480.00	Peak	30.57	18.39	48.95	68.20	-19.25
15720.00	Peak	31.33	23.12	54.45	74.00	-19.55
15720.00	Average	23.96	23.12	47.08	54.00	-6.92
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT20 / 5180 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

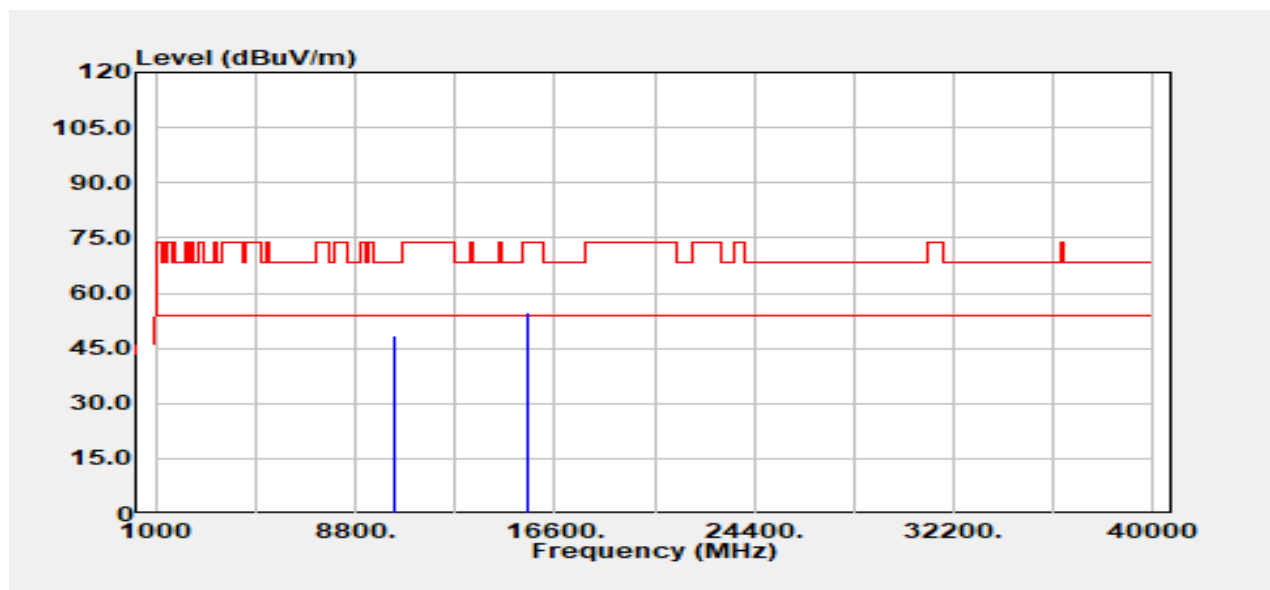


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10360.00	Peak	29.96	18.27	48.23	68.20	-19.97
15540.00	Peak	32.57	22.34	54.91	74.00	-19.09
15540.00	Average	24.90	22.34	47.23	54.00	-6.77
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT20/ 5180 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

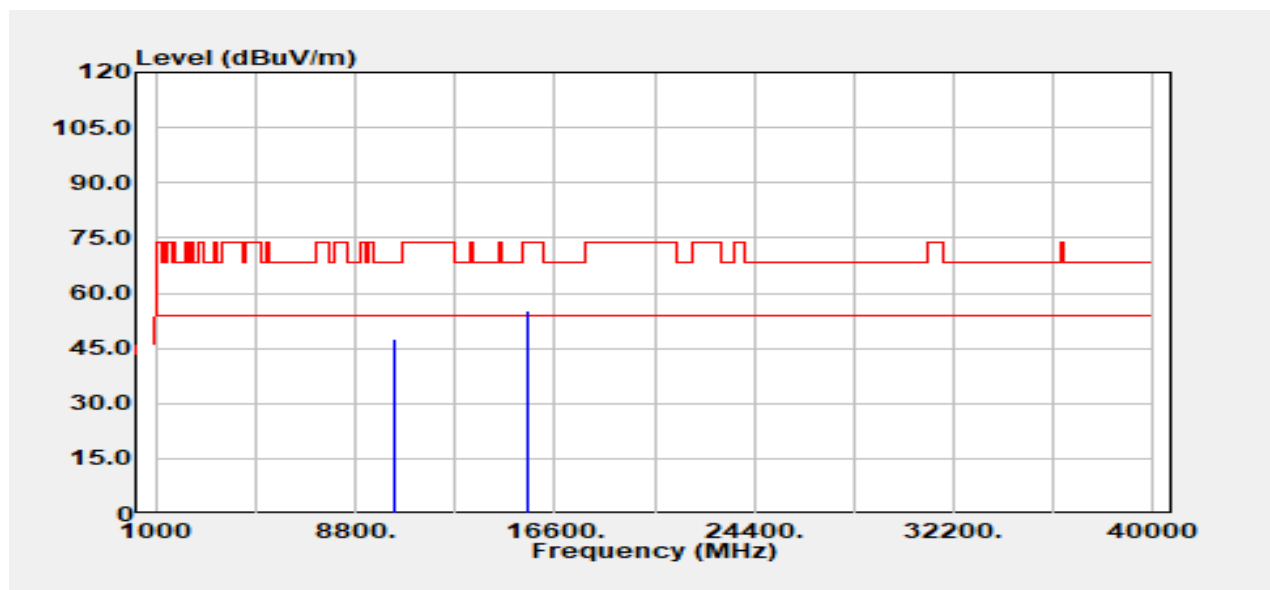


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10360.00	Peak	29.47	18.27	47.74	68.20	-20.46
15540.00	Peak	33.06	22.34	55.39	74.00	-18.61
15540.00	Average	25.07	22.34	47.40	54.00	-6.60
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT20 / 5220 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

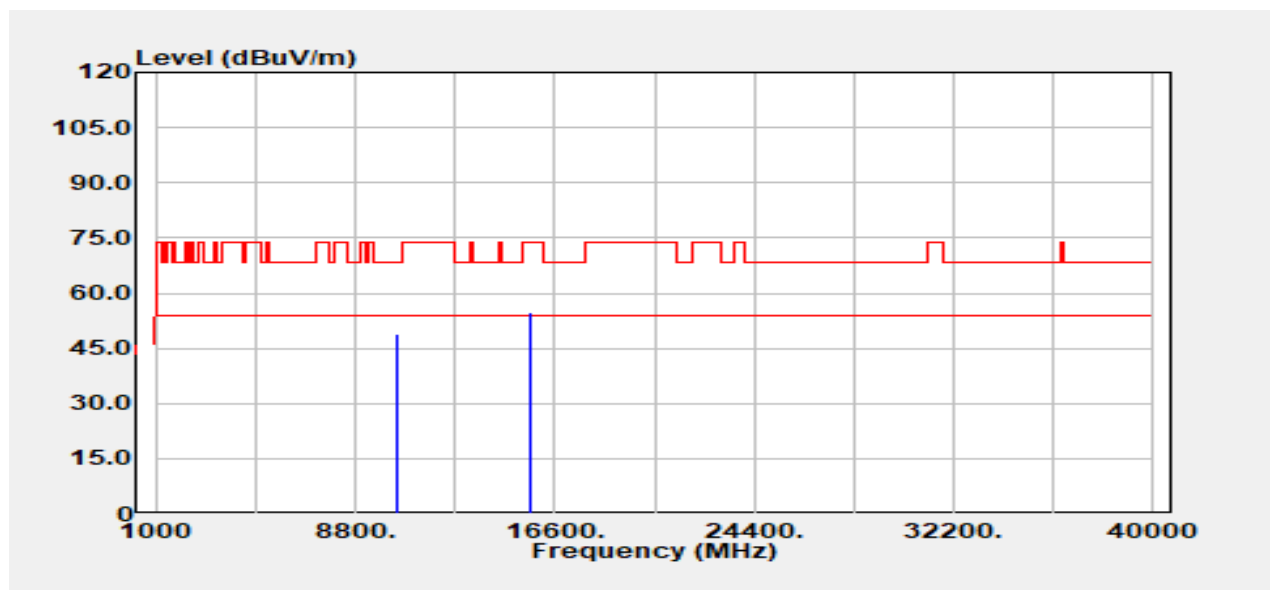


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10440.00	Peak	30.69	18.35	49.04	68.20	-19.16
15660.00	Peak	32.32	22.55	54.88	74.00	-19.12
15660.00	Average	24.36	22.55	46.91	54.00	-7.09
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT20 / 5220 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

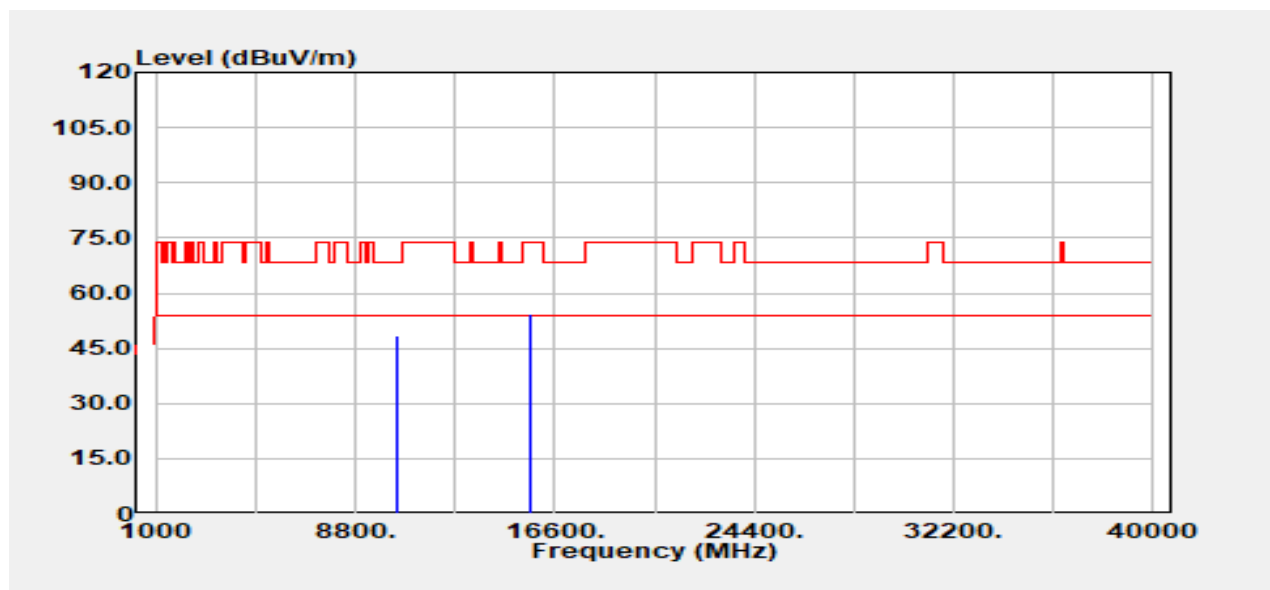


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10440.00	Peak	30.22	18.35	48.57	68.20	-19.63
15660.00	Peak	31.64	22.55	54.19	74.00	-19.81
15660.00	Average	24.36	22.55	46.91	54.00	-7.09
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT20 / 5240 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

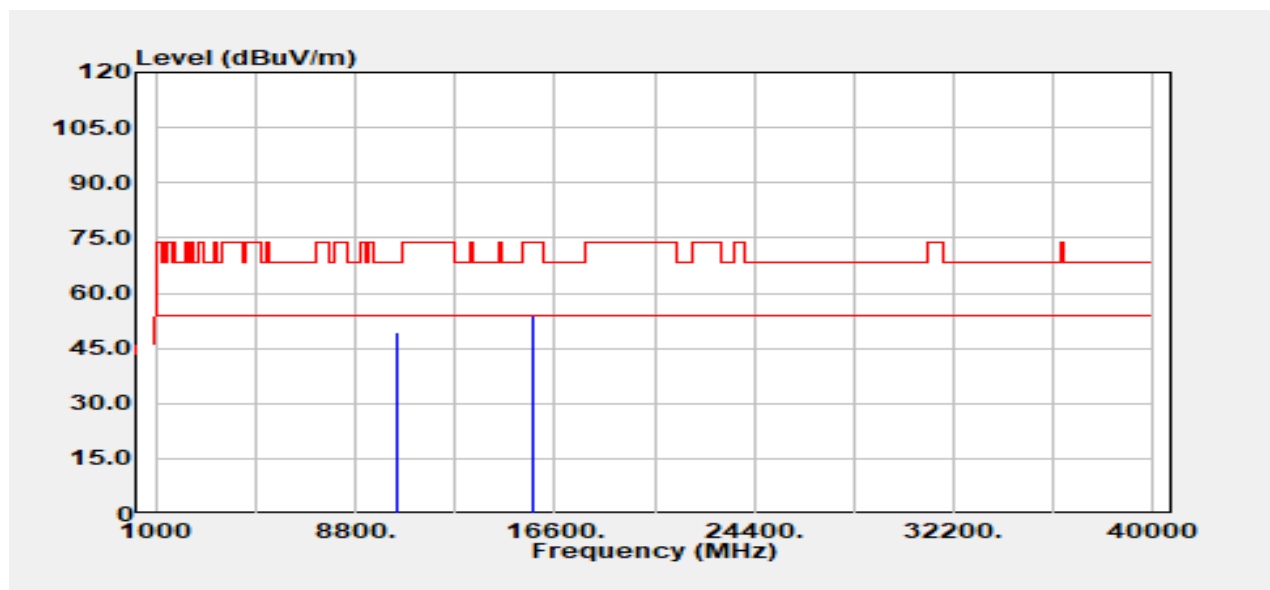


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10480.00	Peak	30.98	18.39	49.37	68.20	-18.83
15720.00	Peak	30.87	23.12	53.99	74.00	-20.01
15720.00	Average	24.19	23.12	47.31	54.00	-6.69
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT20 / 5240 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

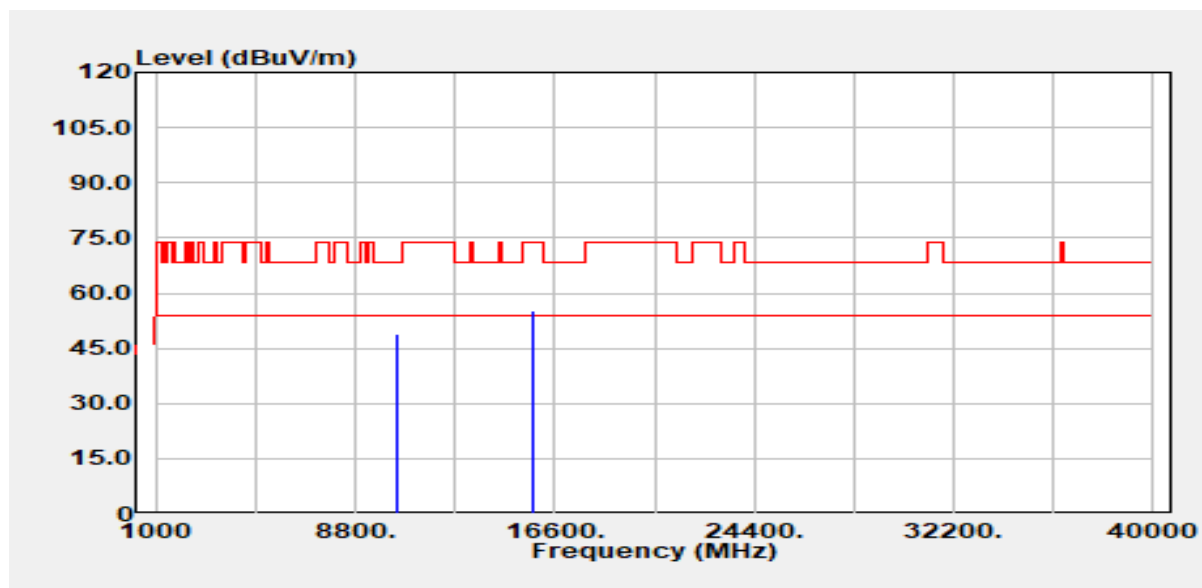


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10480.00	Peak	30.56	18.39	48.95	68.20	-19.25
15720.00	Peak	32.25	23.12	55.37	74.00	-18.63
15720.00	Average	24.01	23.12	47.13	54.00	-6.87
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT40 / 5190 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

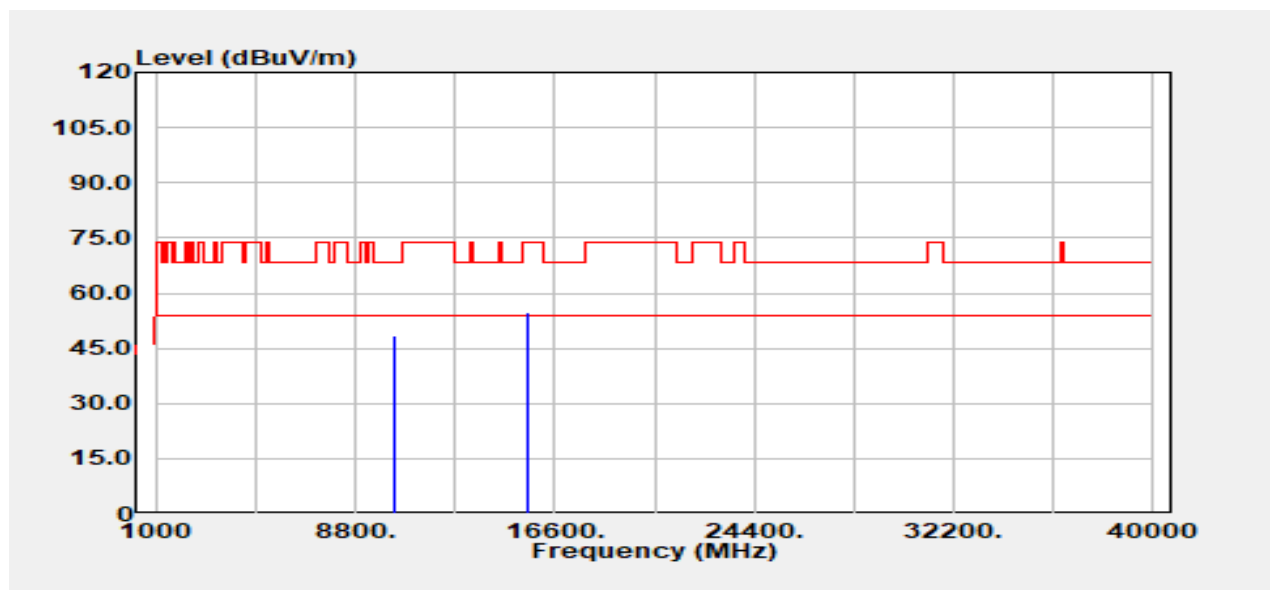


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10380.00	Peak	30.27	18.26	48.53	68.20	-19.67
15570.00	Peak	32.58	22.26	54.84	74.00	-19.16
15570.00	Average	23.48	22.26	45.74	54.00	-8.26
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT40 / 5190 MHz	Temp/Hum	23.4(°C) / 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

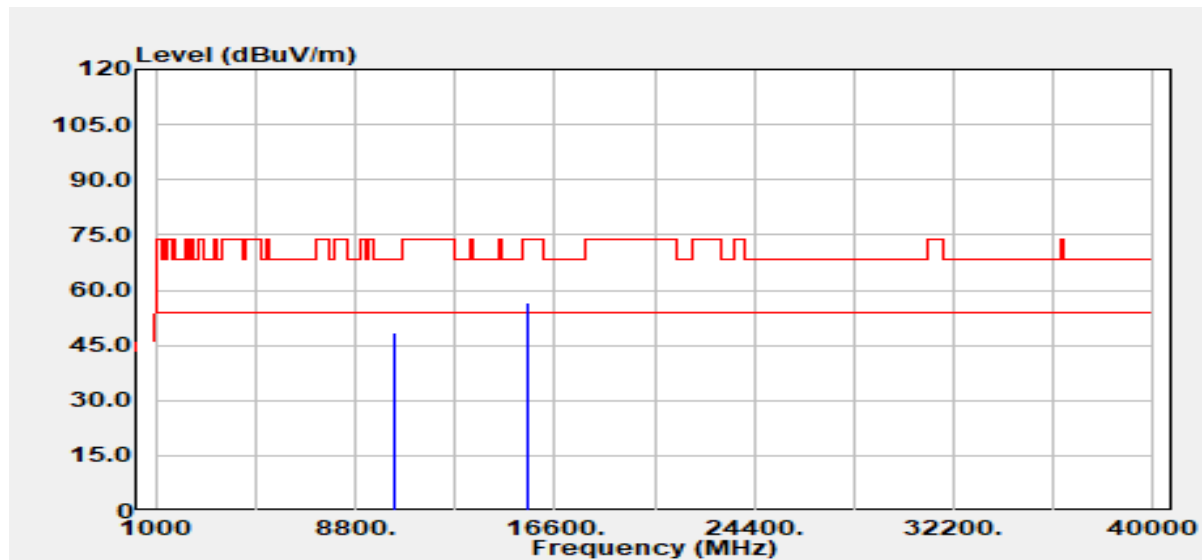


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10380.00	Peak	30.11	18.26	48.37	68.20	-19.83
15570.00	Peak	34.13	22.26	56.39	74.00	-17.61
15570.00	Average	23.37	22.26	45.63	54.00	-8.37
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT40 / 5230 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

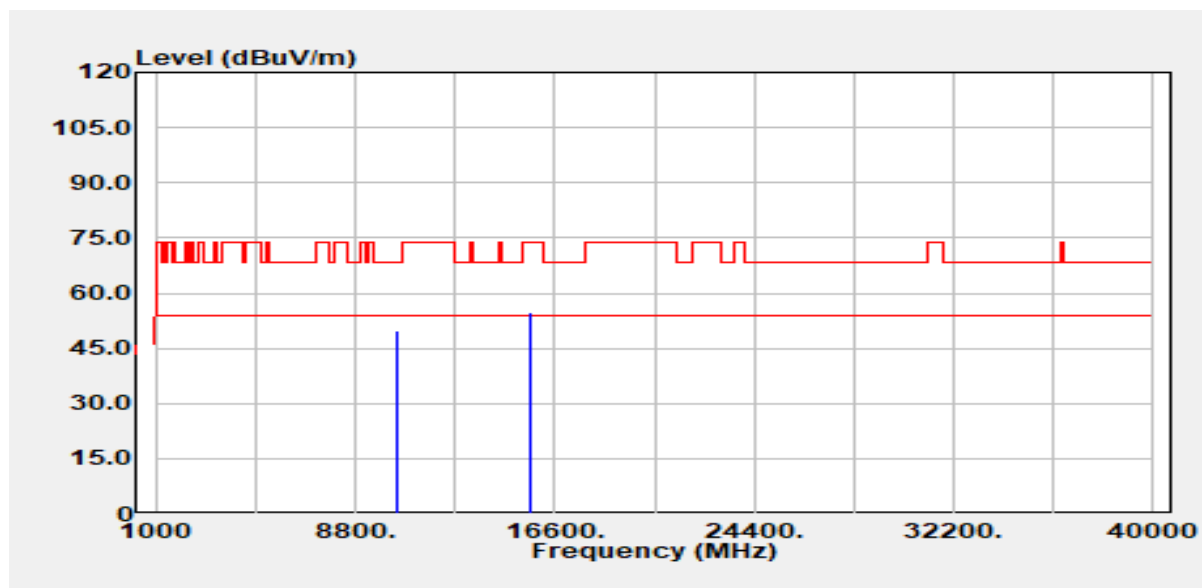


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10460.00	Peak	31.54	18.38	49.92	68.20	-18.28
15690.00	Peak	31.96	22.92	54.87	74.00	-19.13
15690.00	Average	22.93	22.92	45.85	54.00	-8.15
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT40 / 5230 MHz	Temp/Hum	23.4(°C) / 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

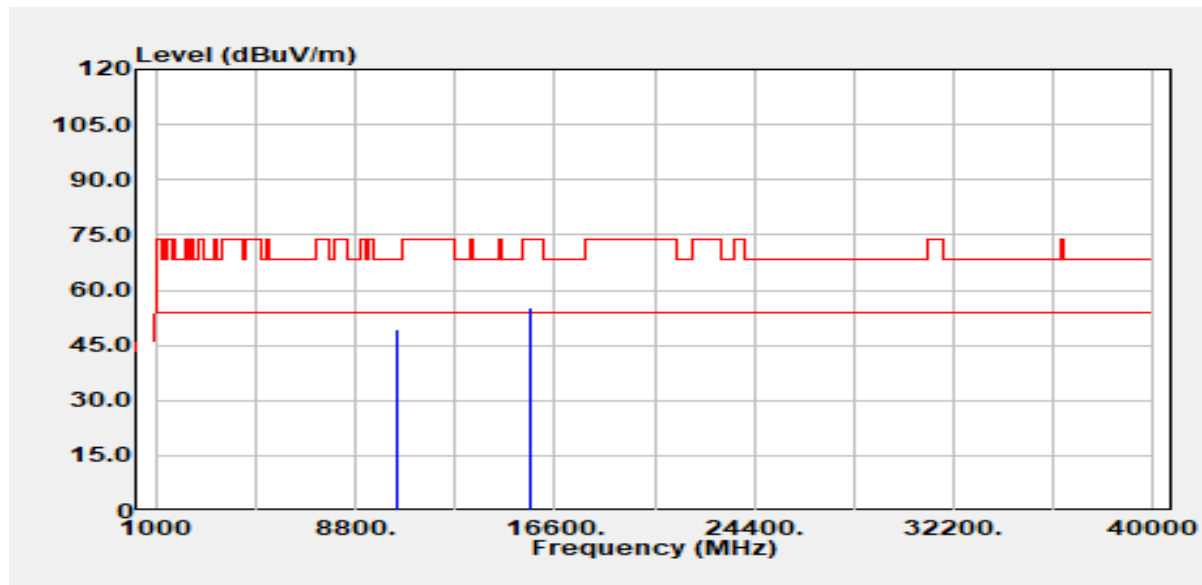


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10460.00	Peak	31.14	18.38	49.52	68.20	-18.68
15690.00	Peak	32.19	22.92	55.11	74.00	-18.89
15690.00	Average	23.05	22.92	45.97	54.00	-8.03
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ac VHT80 / 5210 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

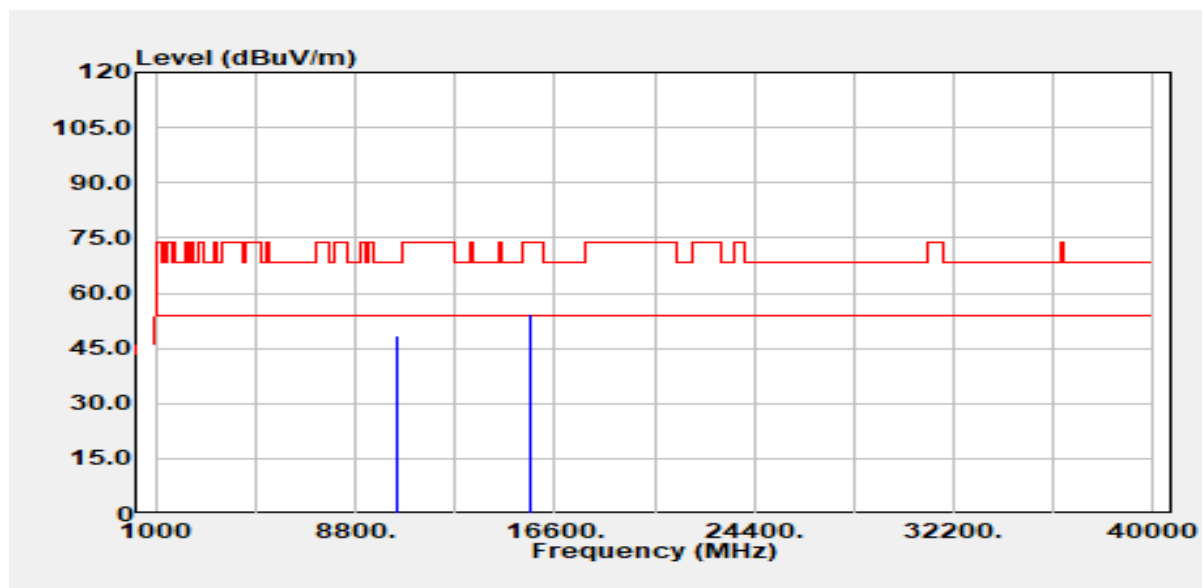


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10420.00	Peak	30.05	18.30	48.35	68.20	-19.85
15630.00	Peak	32.23	22.32	54.55	74.00	-19.45
15630.00	Average	22.75	22.32	45.07	54.00	-8.93
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ac VHT80 / 5210 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

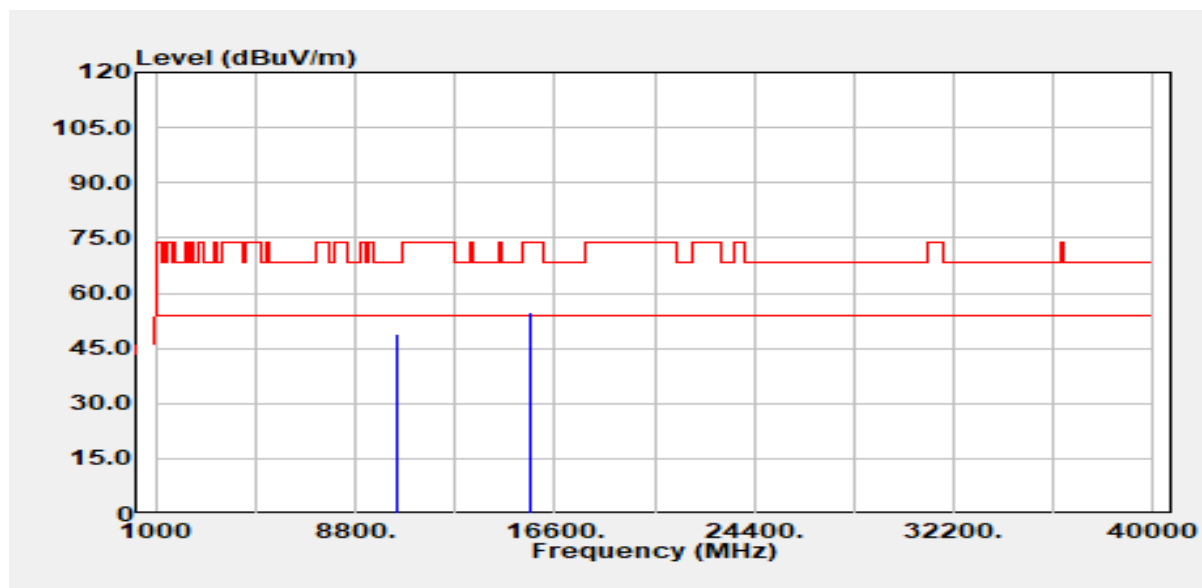


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10420.00	Peak	30.60	18.30	48.91	68.20	-19.29
15630.00	Peak	32.56	22.32	54.88	74.00	-19.12
15630.00	Average	22.92	22.32	45.24	54.00	-8.76
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE20 / 5180 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

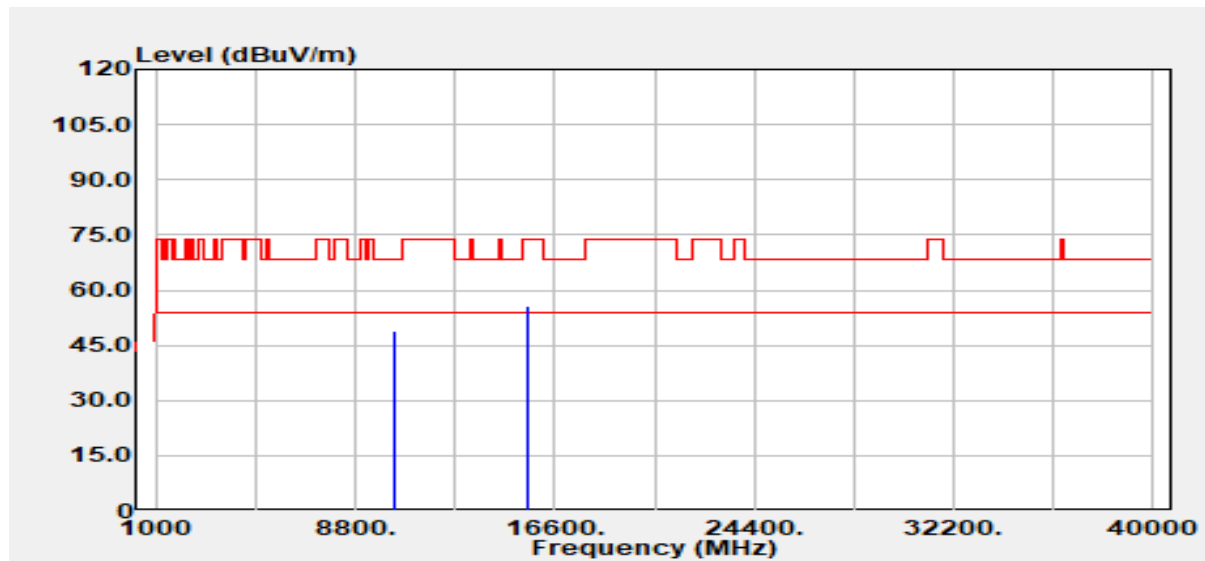


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10360.00	Peak	30.80	18.27	49.06	68.20	-19.14
15540.00	Peak	33.17	22.34	55.50	74.00	-18.50
15540.00	Average	23.52	22.34	45.86	54.00	-8.14
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE20/ 5180 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

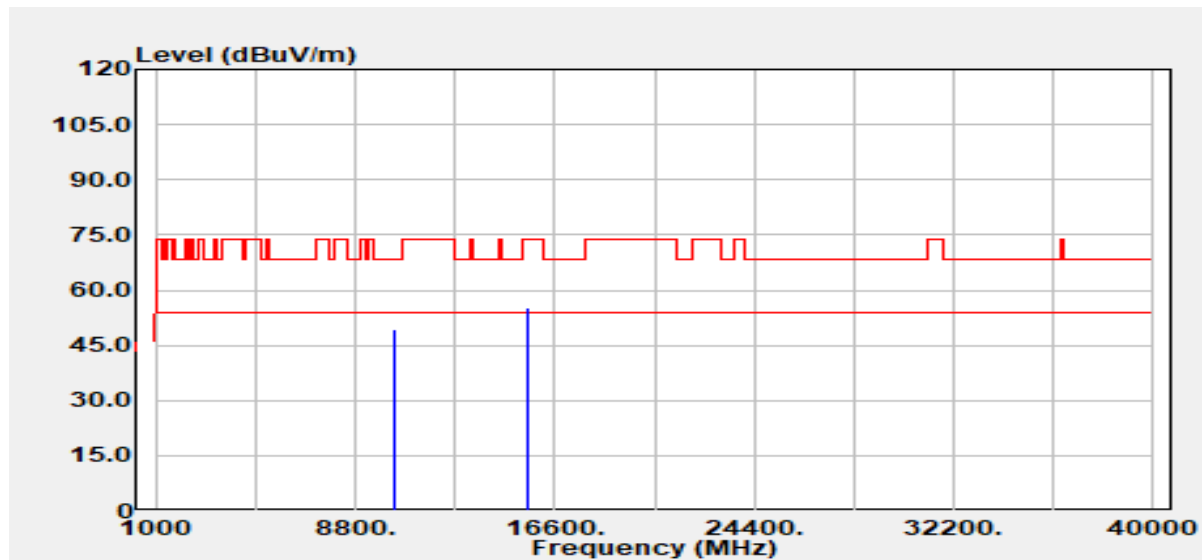


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10360.00	Peak	31.18	18.27	49.44	68.20	-18.76
15540.00	Peak	32.79	22.34	55.13	74.00	-18.87
15540.00	Average	23.44	22.34	45.78	54.00	-8.22
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE20 / 5220 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

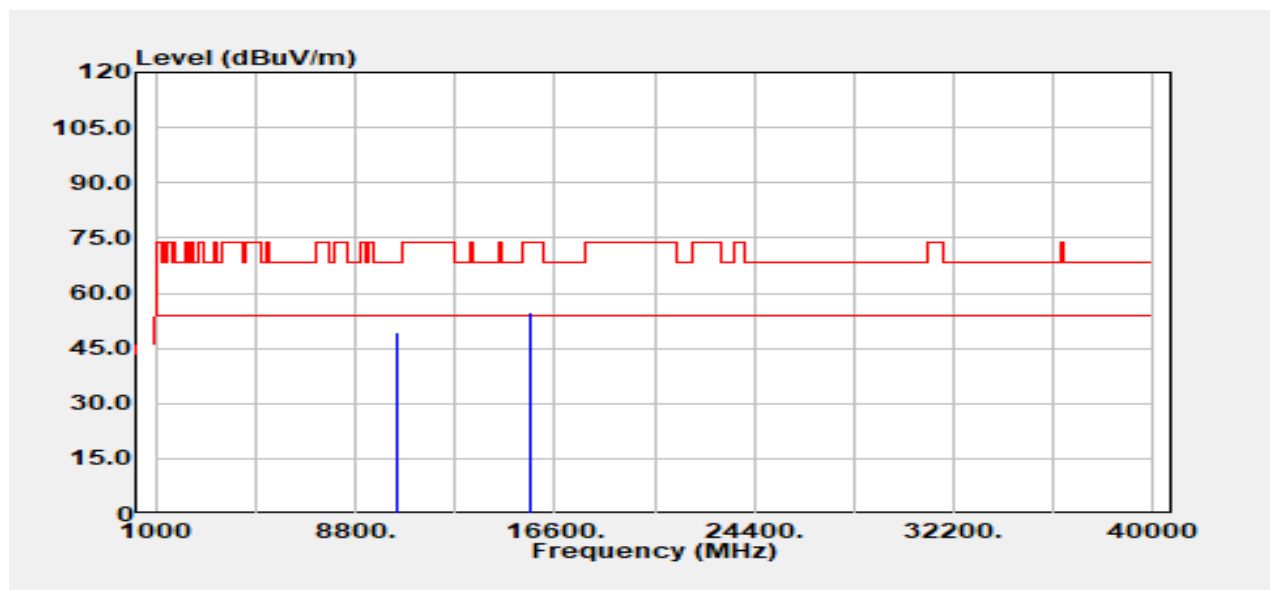


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10440.00	Peak	31.05	18.35	49.40	68.20	-18.80
15660.00	Peak	32.35	22.55	54.90	74.00	-19.10
15660.00	Average	23.14	22.55	45.69	54.00	-8.31
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE20 / 5220 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

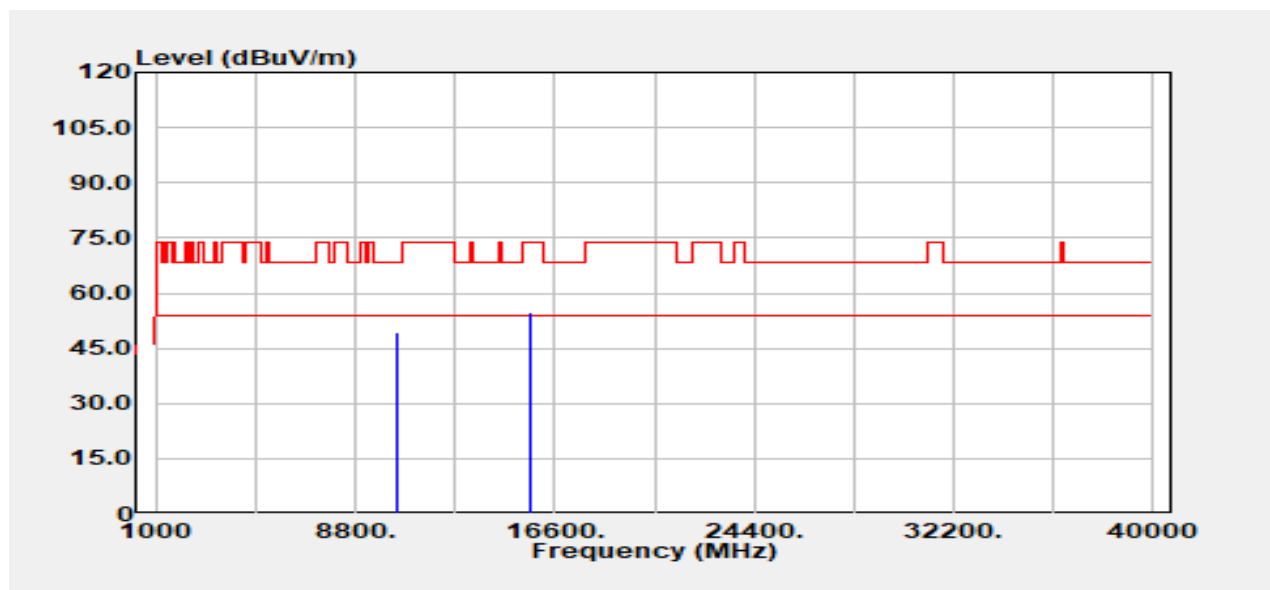


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10440.00	Peak	30.86	18.35	49.21	68.20	-18.99
15660.00	Peak	32.06	22.55	54.61	74.00	-19.39
15660.00	Average	23.22	22.55	45.77	54.00	-8.23
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE20 / 5240 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

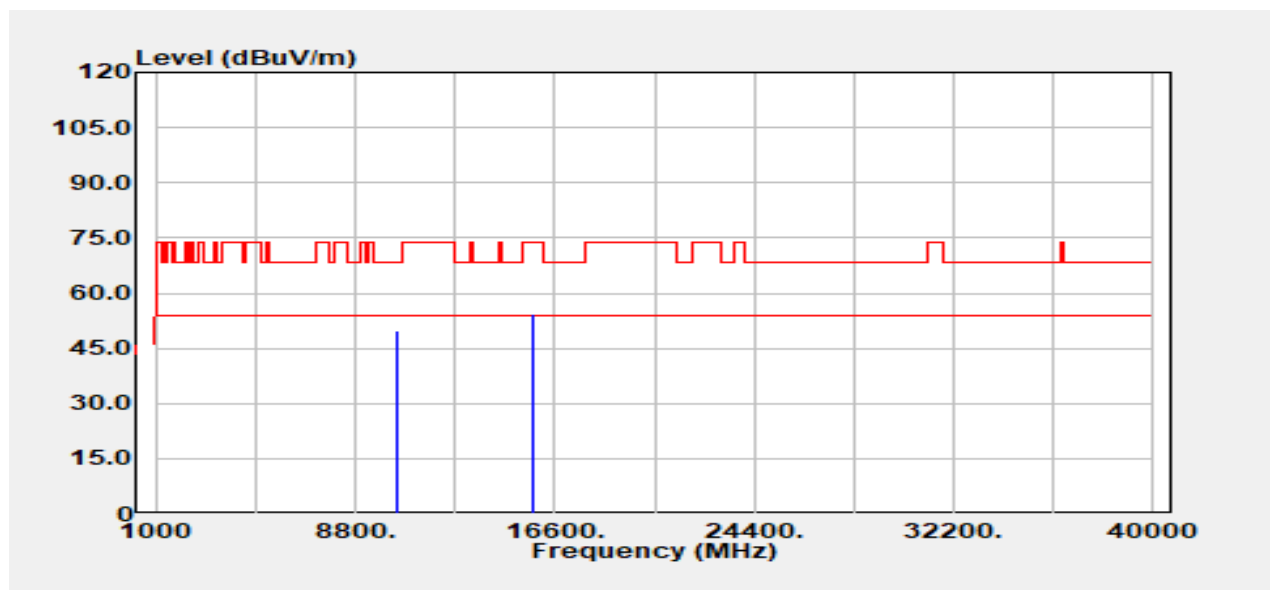


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.00	Peak	31.56	18.39	49.95	68.20	-18.25
15720.00	Peak	31.38	23.12	54.50	74.00	-19.50
15720.00	Average	22.04	23.12	45.16	54.00	-8.84
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE20 / 5240 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

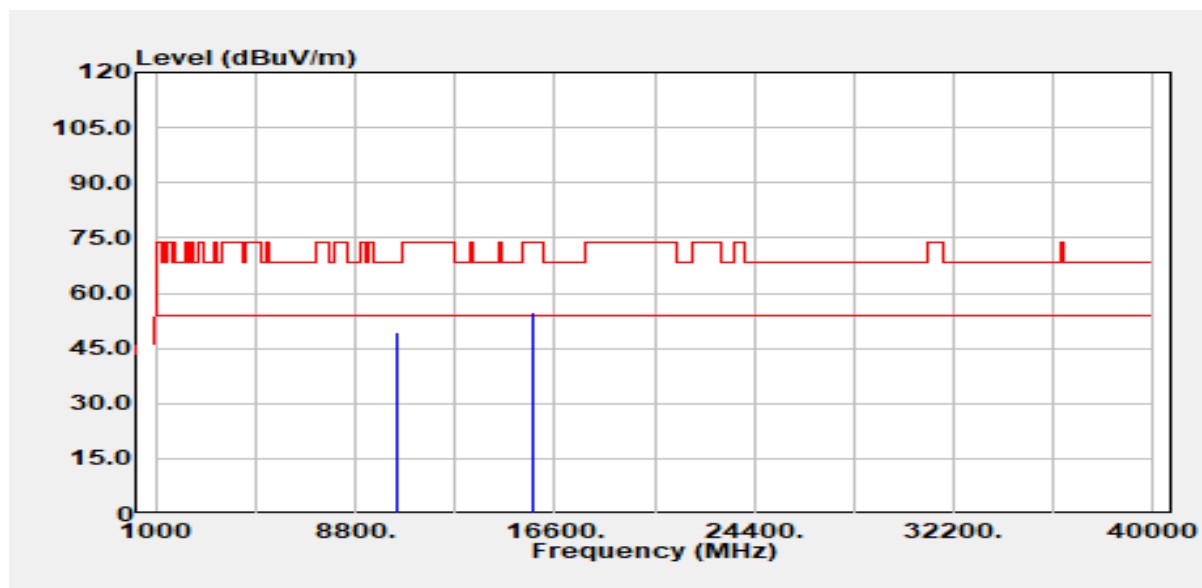


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10480.00	Peak	30.86	18.39	49.24	68.20	-18.96
15720.00	Peak	31.75	23.12	54.88	74.00	-19.12
15720.00	Average	22.41	23.12	45.53	54.00	-8.47
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE40 / 5190 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

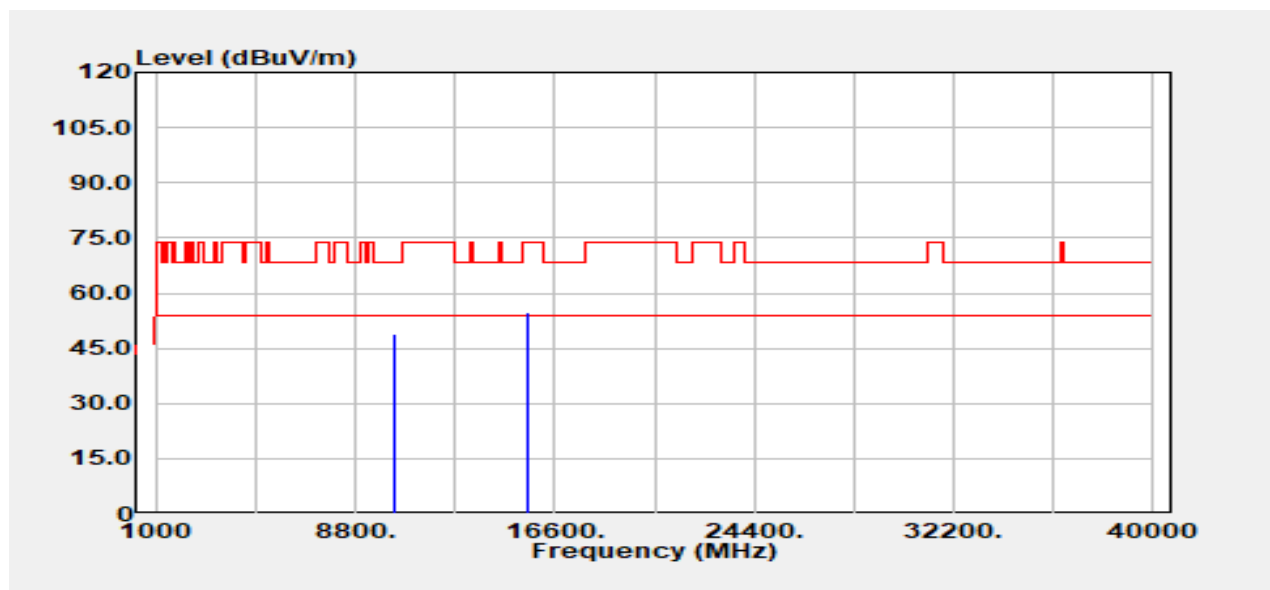


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.00	Peak	30.44	18.26	48.70	68.20	-19.50
15570.00	Peak	32.51	22.26	54.77	74.00	-19.23
15570.00	Average	23.43	22.26	45.69	54.00	-8.31
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE40 / 5190 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

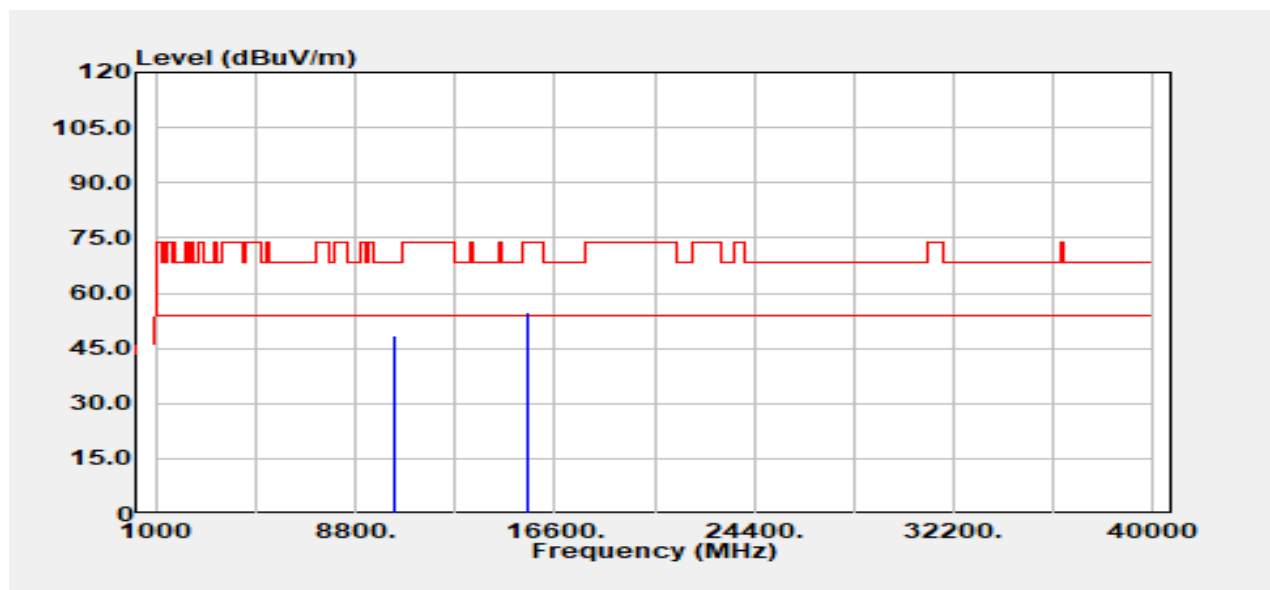


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10380.00	Peak	30.31	18.26	48.58	68.20	-19.62
15570.00	Peak	32.66	22.26	54.92	74.00	-19.08
15570.00	Average	23.58	22.26	45.84	54.00	-8.16
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE40 / 5230 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

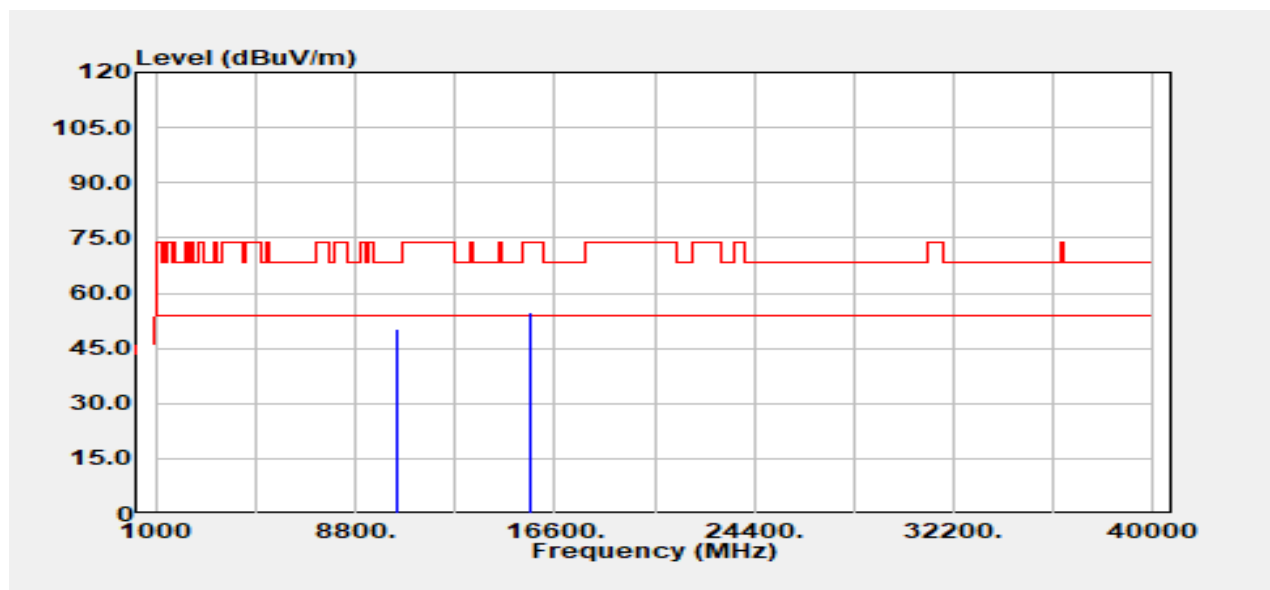


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10460.00	Peak	31.67	18.38	50.04	68.20	-18.16
15690.00	Peak	31.89	22.92	54.81	74.00	-19.19
15690.00	Average	23.02	22.92	45.94	54.00	-8.06
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE40 / 5230 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

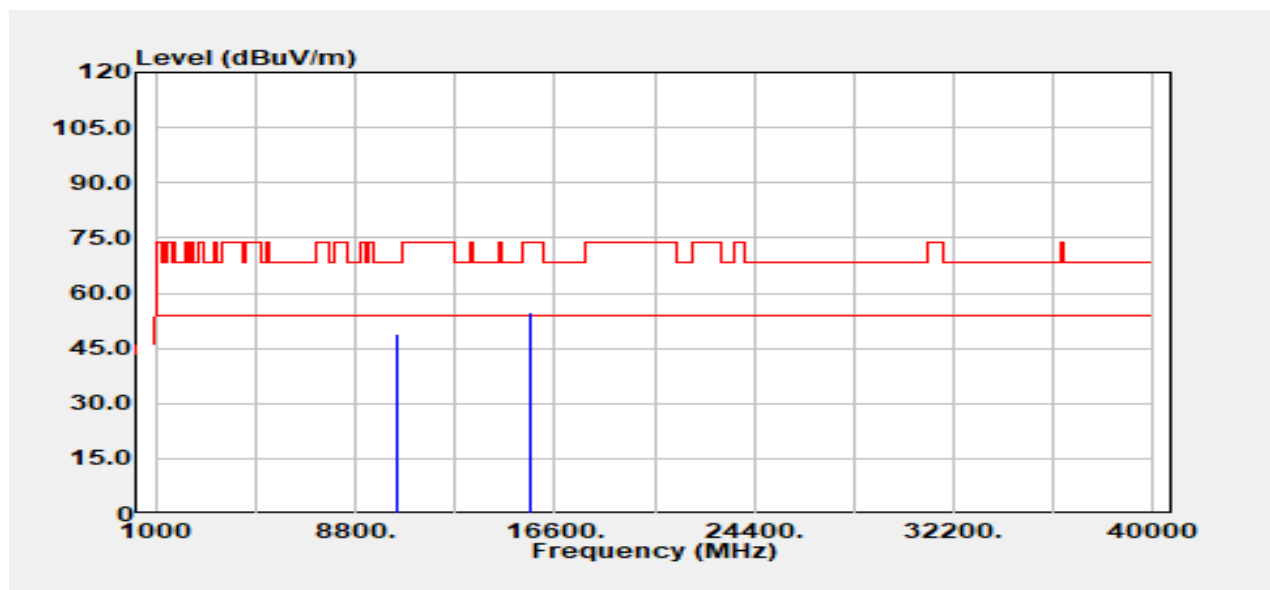


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10460.00	Peak	30.64	18.38	49.02	68.20	-19.18
15690.00	Peak	31.78	22.92	54.70	74.00	-19.30
15690.00	Average	22.95	22.92	45.87	54.00	-8.13
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE80 / 5210 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

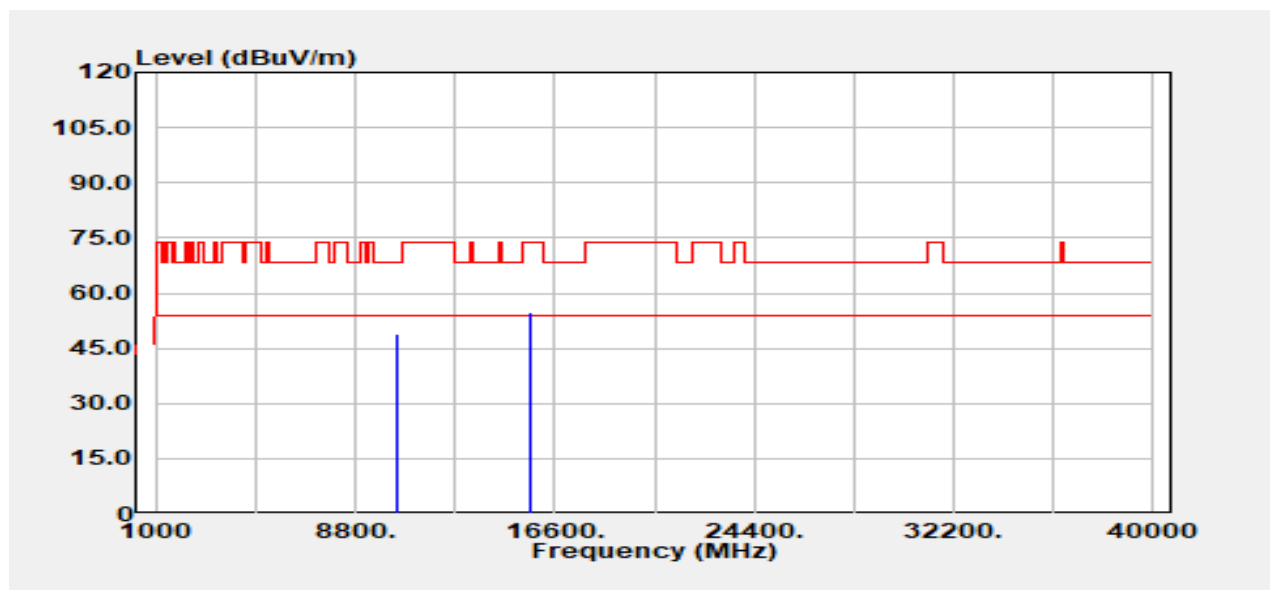


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10420.00	Peak	30.55	18.30	48.86	68.20	-19.34
15630.00	Peak	32.31	22.32	54.63	74.00	-19.37
15630.00	Average	23.35	22.32	45.67	54.00	-8.33
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE80 / 5210 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

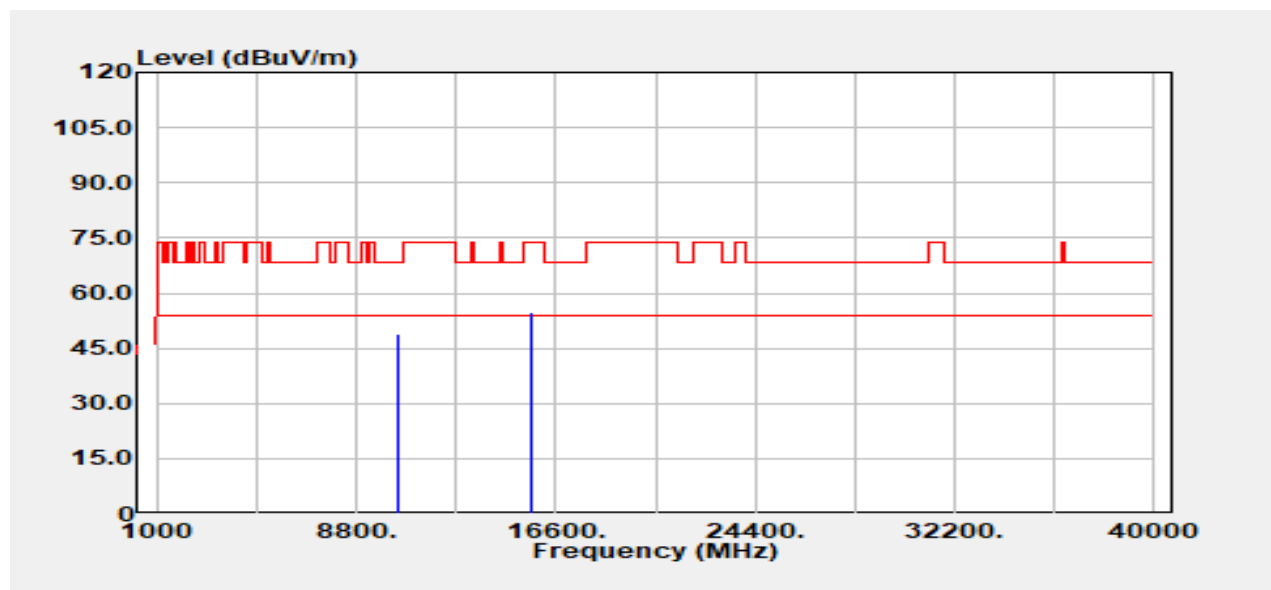

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10420.00	Peak	30.43	18.30	48.73	68.20	-19.47
15630.00	Peak	32.36	22.32	54.68	74.00	-19.32
15630.00	Average	23.42	22.32	45.74	54.00	-8.26
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Data for UNII-3

Test Mode	Mode 2 IEEE 802.11a / 5745 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

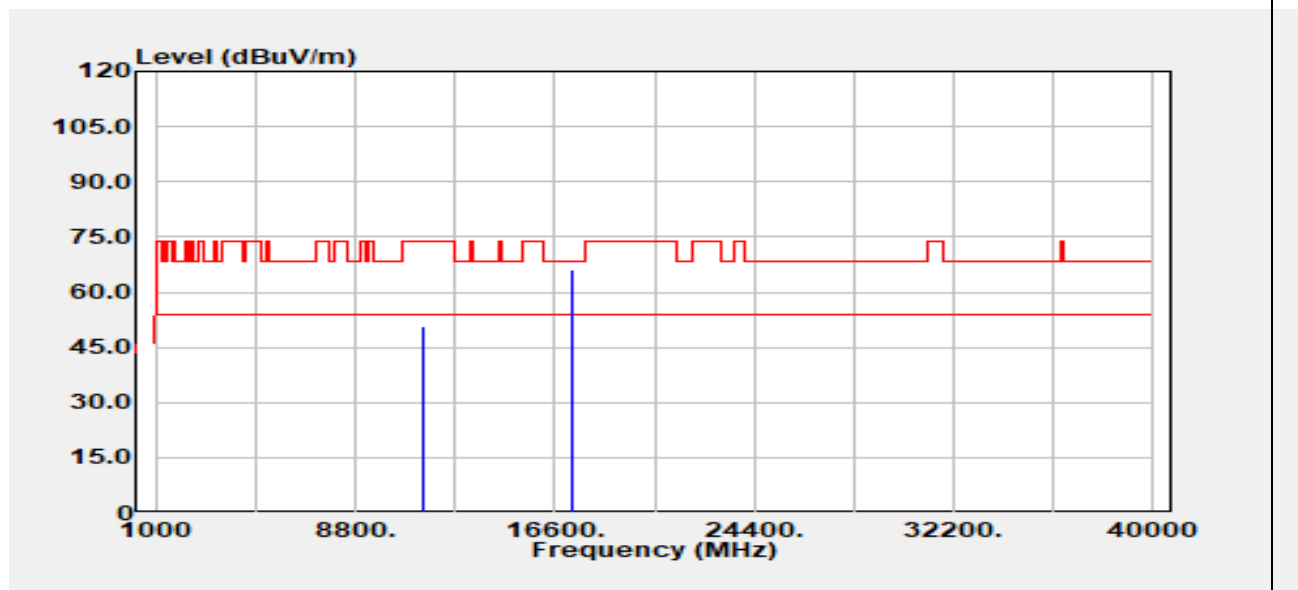


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.00	Peak	31.44	19.20	50.64	74.00	-23.36
11490.00	Average	26.50	19.20	45.70	54.00	-8.30
17235.00	Peak	30.61	35.48	66.09	68.20	-2.11
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11a / 5745 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

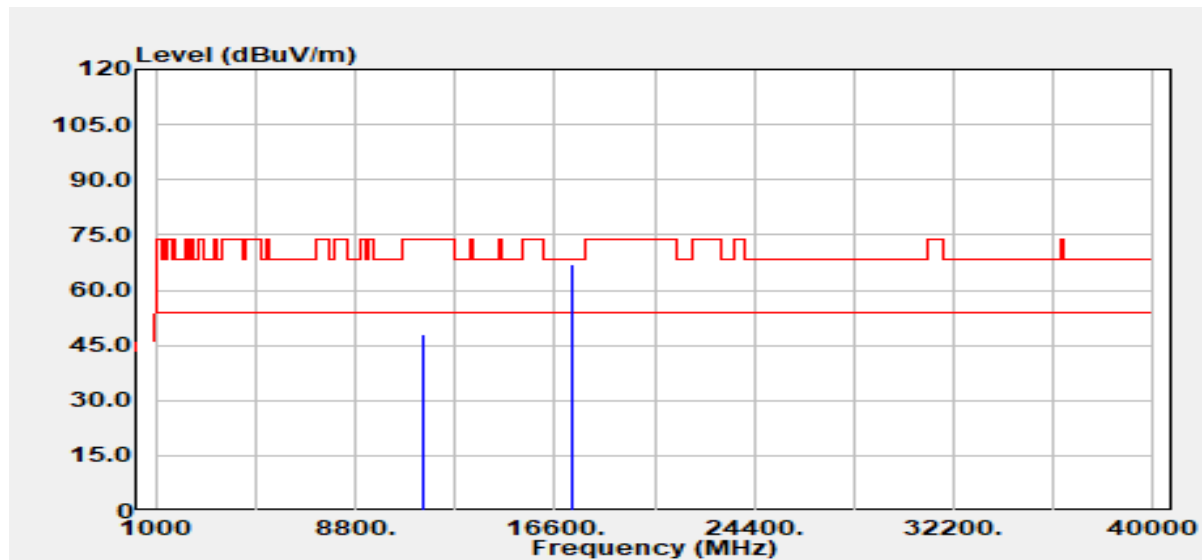


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11490.00	Peak	28.94	19.20	48.14	74.00	-25.86
11490.00	Average	21.92	19.20	41.12	54.00	-12.88
17235.00	Peak	31.57	35.48	67.05	68.20	-1.15
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11a / 5785 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

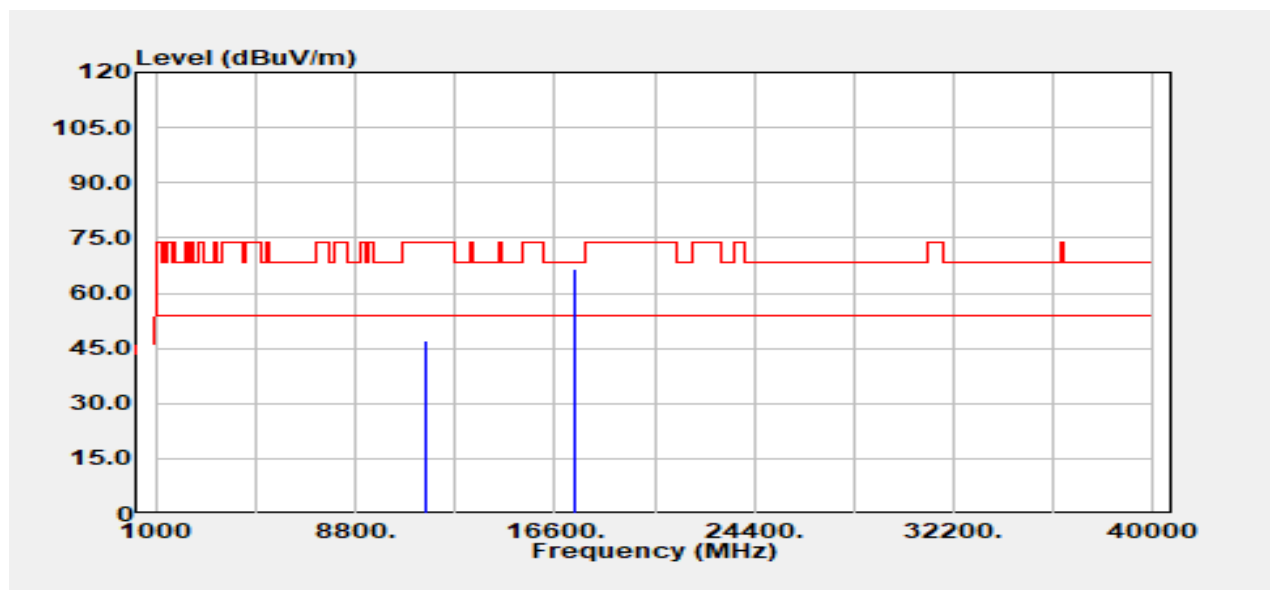


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11570.00	Peak	27.88	19.31	47.19	74.00	-26.81
11570.00	Average	24.41	19.31	43.72	54.00	-10.28
17355.00	Peak	30.85	35.52	66.37	68.20	-1.83
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11a / 5785 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

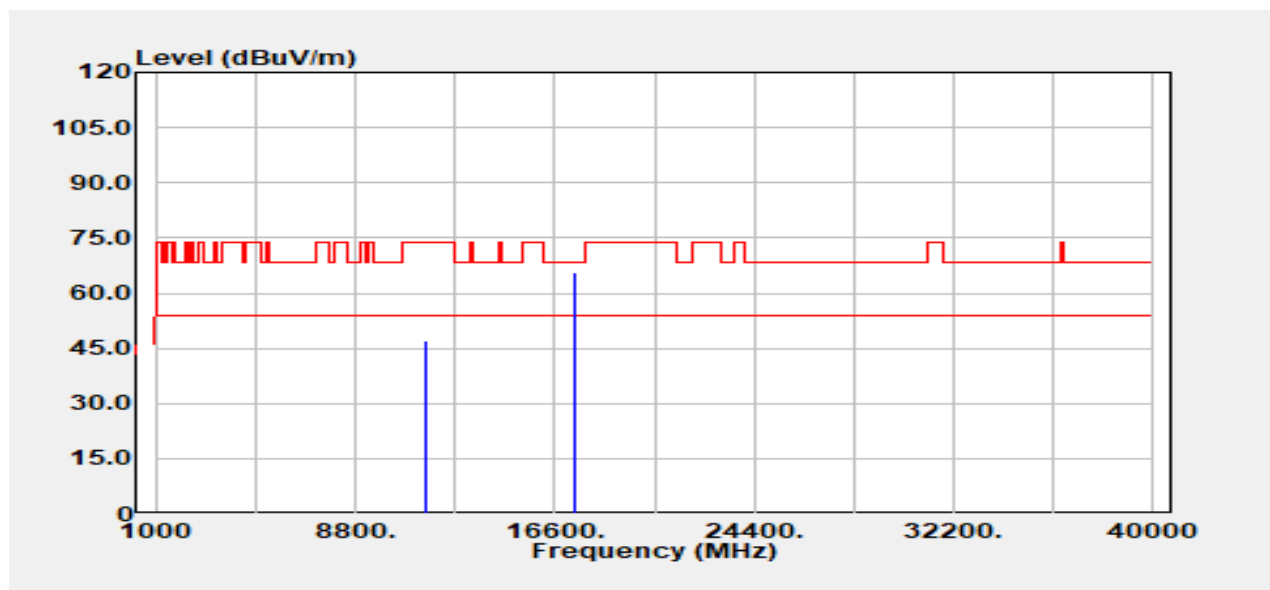


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11570.00	Peak	28.00	19.31	47.31	74.00	-26.69
11570.00	Average	21.43	19.31	40.74	54.00	-13.26
17355.00	Peak	30.29	35.52	65.80	68.20	-2.40
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11a / 5825 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

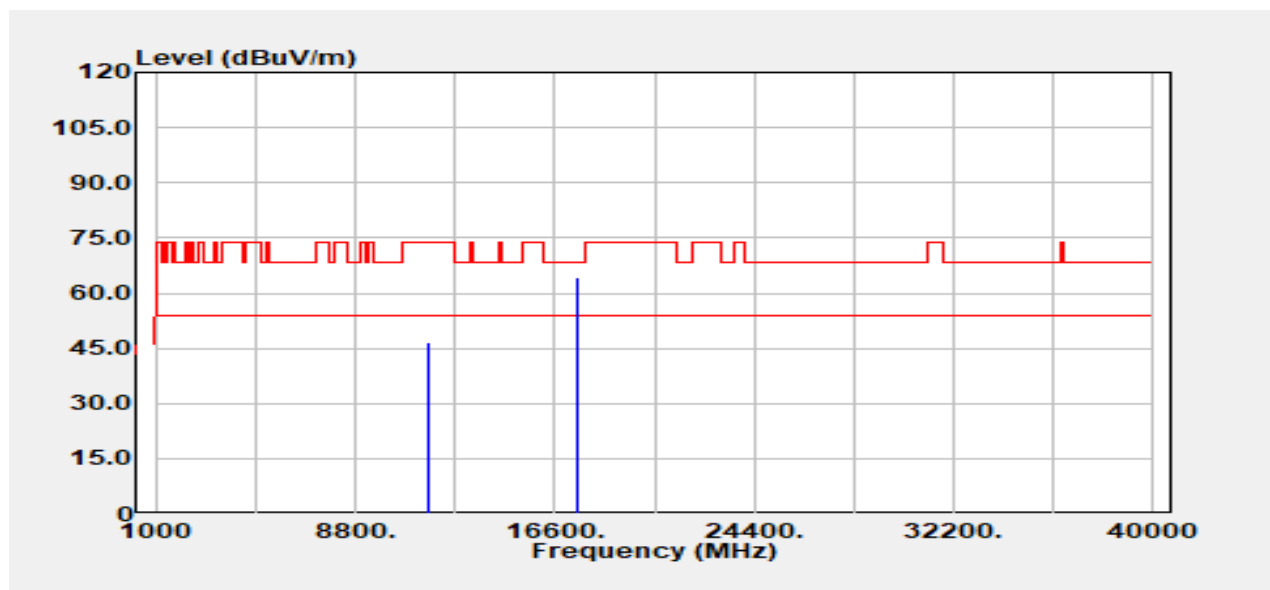


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	27.47	19.29	46.76	74.00	-27.24
11650.00	Average	23.06	19.29	42.35	54.00	-11.65
17475.00	Peak	29.54	34.91	64.45	68.20	-3.75
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11a / 5825 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

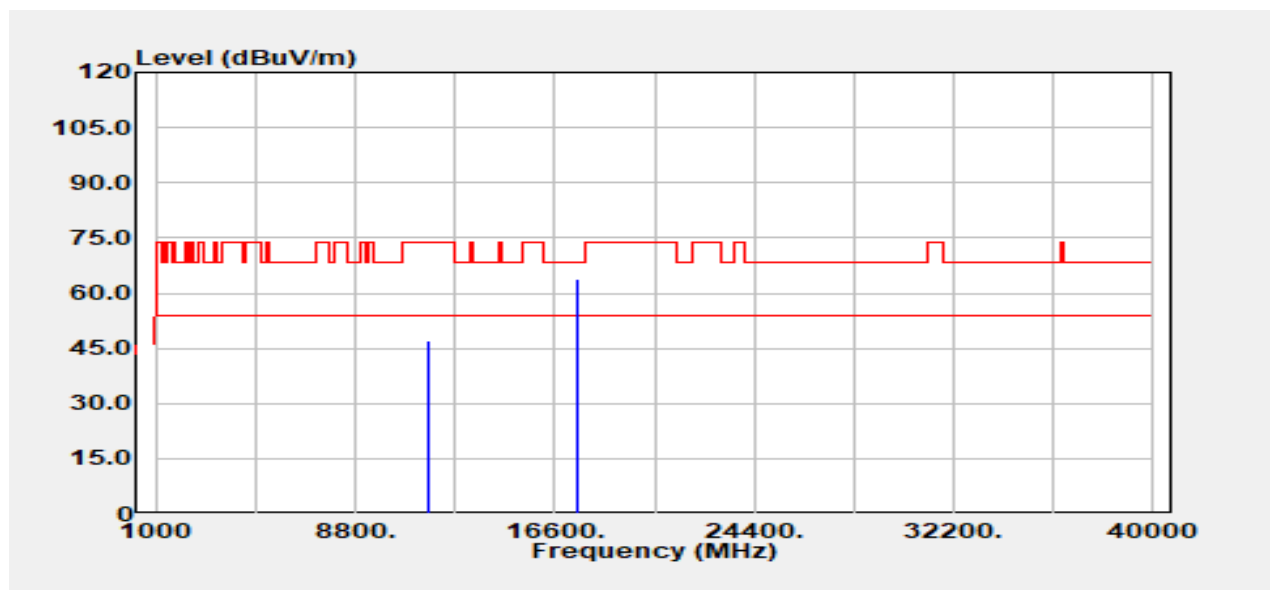


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	27.84	19.29	47.13	74.00	-26.87
11650.00	Average	21.38	19.29	40.67	54.00	-13.33
17475.00	Peak	28.90	34.91	63.80	68.20	-4.40
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT20 / 5745 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

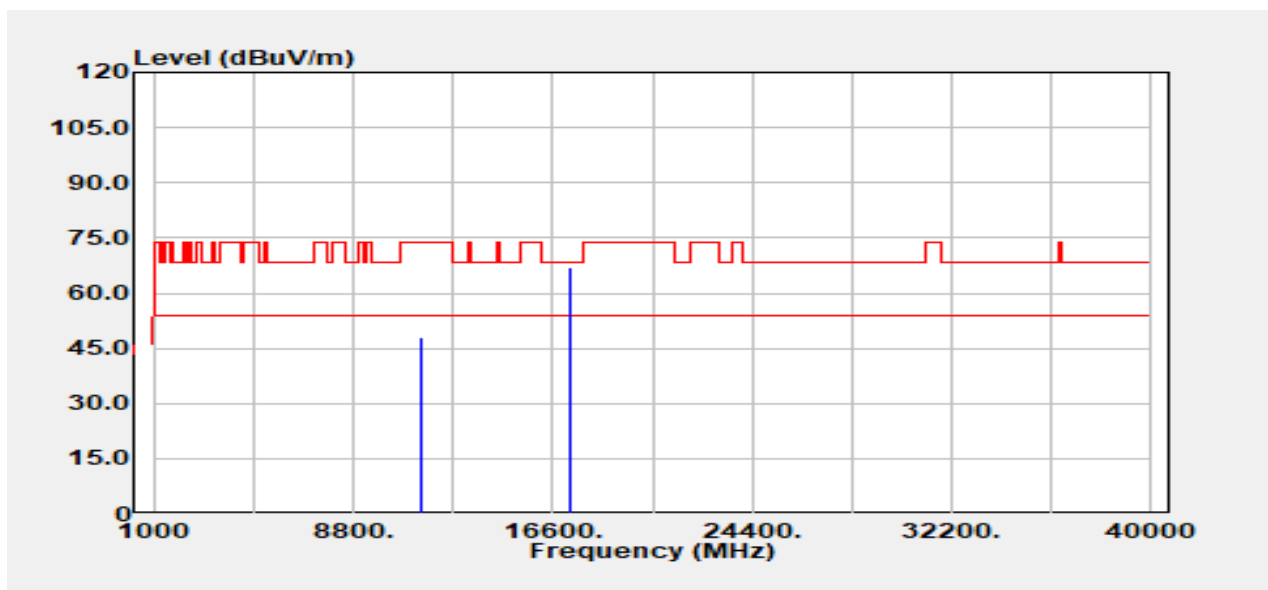


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	28.67	19.20	47.87	74.00	-26.13
11490.00	Average	23.87	19.20	43.07	54.00	-10.93
17235.00	Peak	31.48	35.48	66.96	68.20	-1.24
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT20 / 5745 MHz	Temp/Hum	24.3(°C) / 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

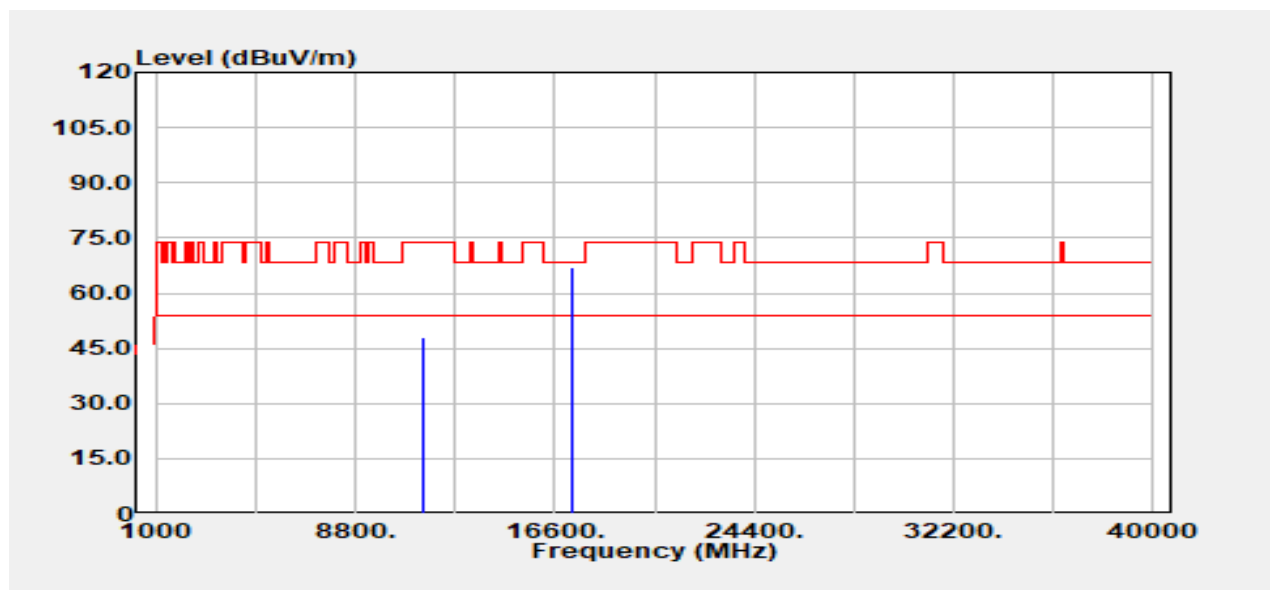


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	28.79	19.20	47.99	74.00	-26.01
11490.00	Average	21.66	19.20	40.86	54.00	-13.14
17235.00	Peak	31.50	35.48	66.99	68.20	-1.21
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT20/ 5785 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

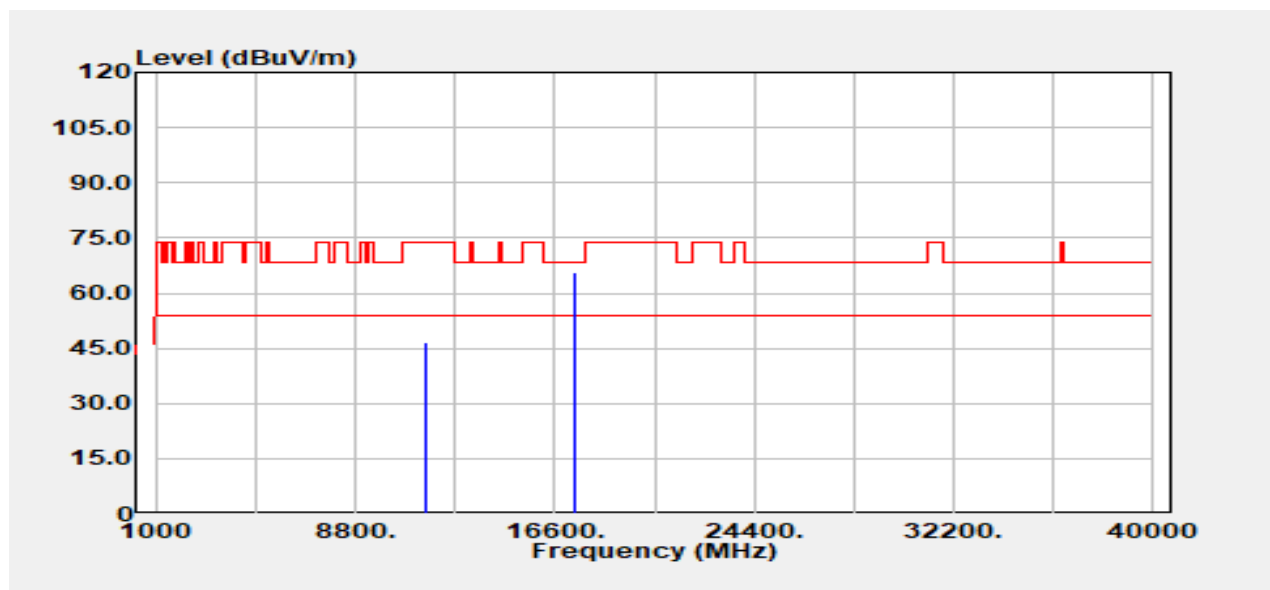


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11570.00	Peak	27.20	19.31	46.51	74.00	-27.49
11570.00	Average	23.04	19.31	42.35	54.00	-11.65
17355.00	Peak	30.28	35.52	65.79	68.20	-2.41
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT20/ 5785 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

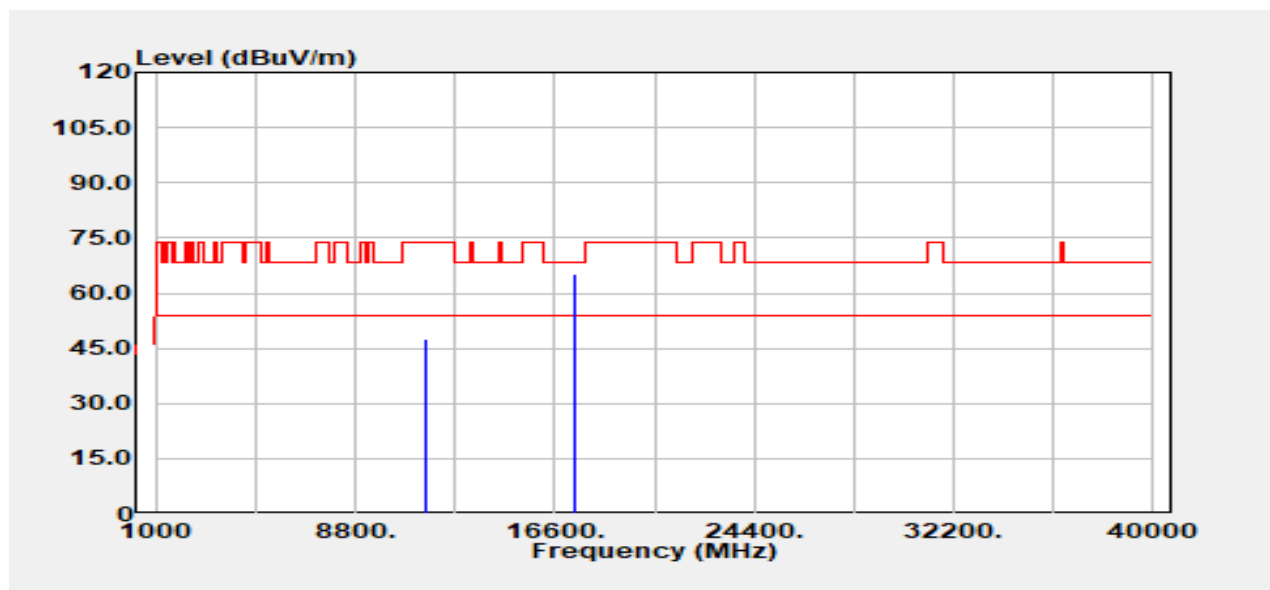


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11570.00	Peak	28.25	19.31	47.56	74.00	-26.44
11570.00	Average	21.36	19.31	40.67	54.00	-13.33
17355.00	Peak	29.65	35.52	65.17	68.20	-3.03
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT20/ 5825 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 8, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

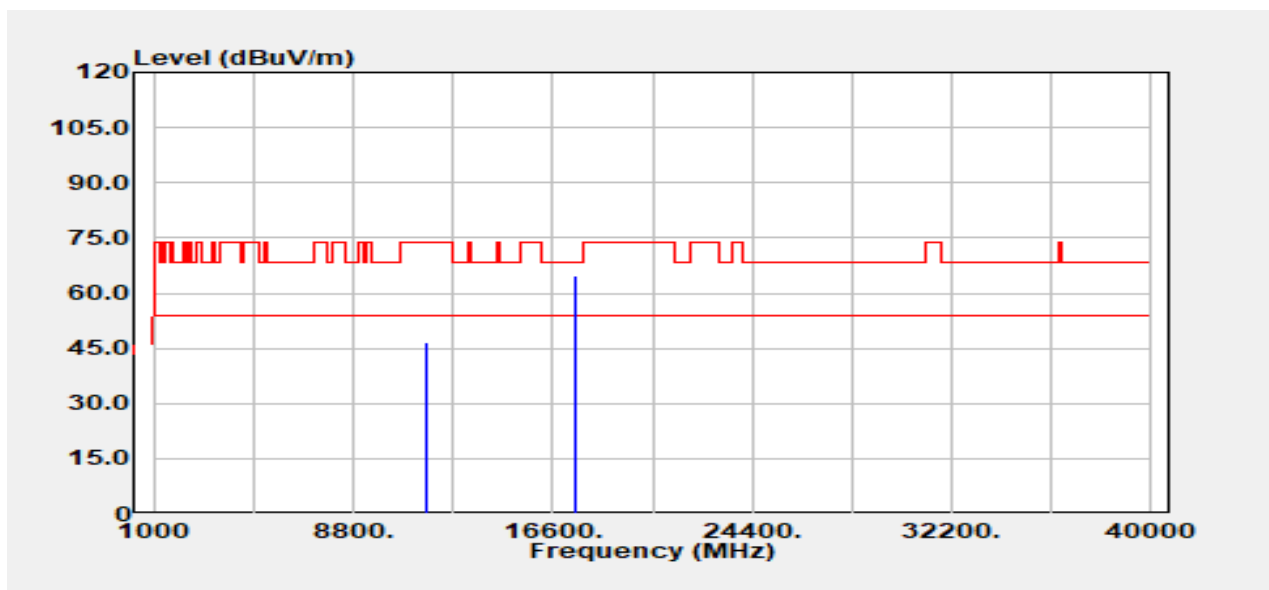


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	27.38	19.29	46.67	74.00	-27.33
11650.00	Average	21.87	19.29	41.16	54.00	-12.84
17475.00	Peak	29.86	34.91	64.76	68.20	-3.44
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT20 / 5825 MHz	Temp/Hum	24.3(°C)/ 64%RH
Test Item	Harmonic	Test Date	October 8, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

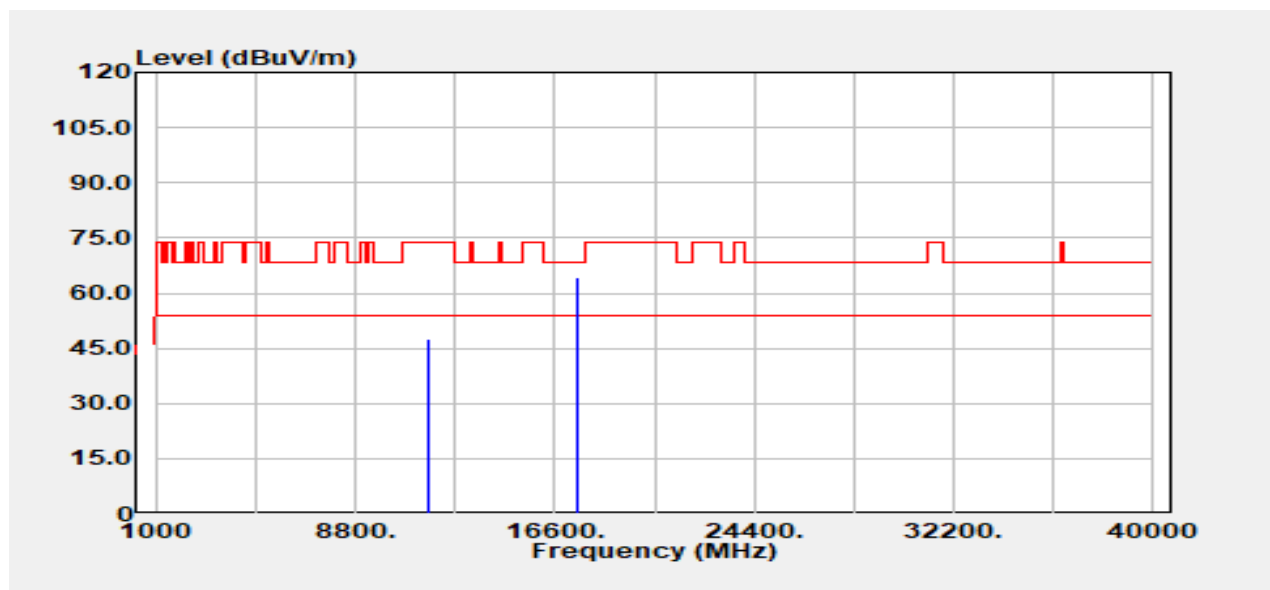


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	28.45	19.29	47.74	74.00	-26.26
11650.00	Average	21.33	19.29	40.62	54.00	-13.38
17475.00	Peak	29.43	34.91	64.33	68.20	-3.87
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT40 / 5755 MHz	Temp/Hum	23.4(°C) / 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

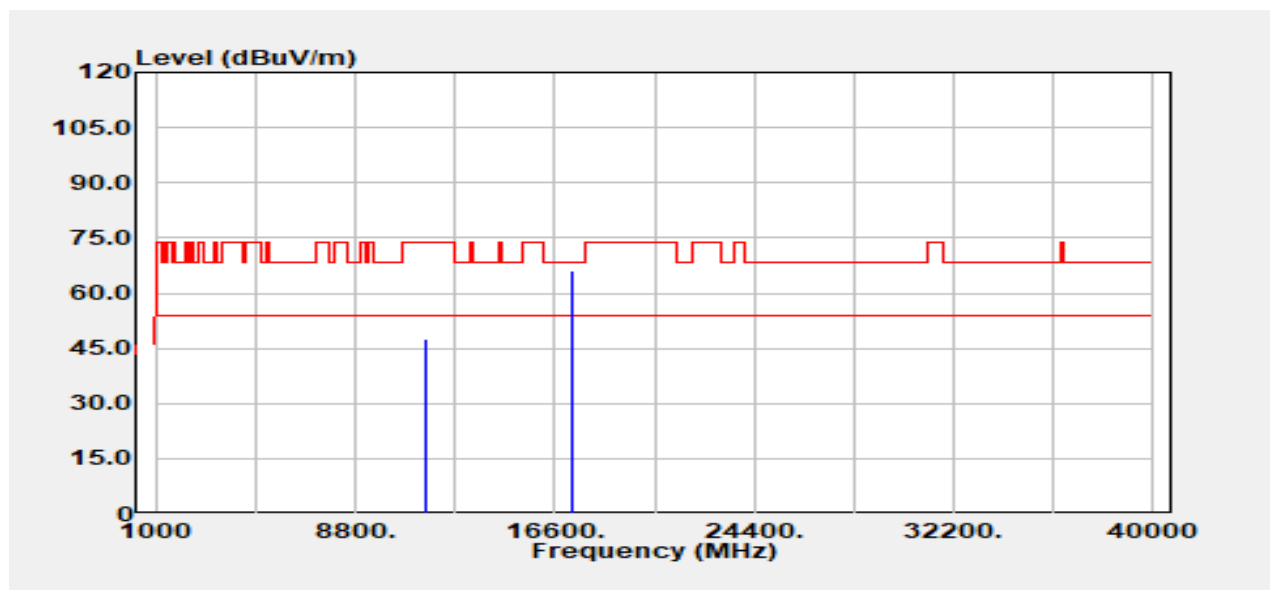


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11510.00	Peak	28.14	19.22	47.36	74.00	-26.64
11510.00	Average	20.42	19.22	39.64	54.00	-14.36
17265.00	Peak	30.72	35.57	66.29	68.20	-1.91
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT40 / 5755 MHz	Temp/Hum	23.4(°C) / 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

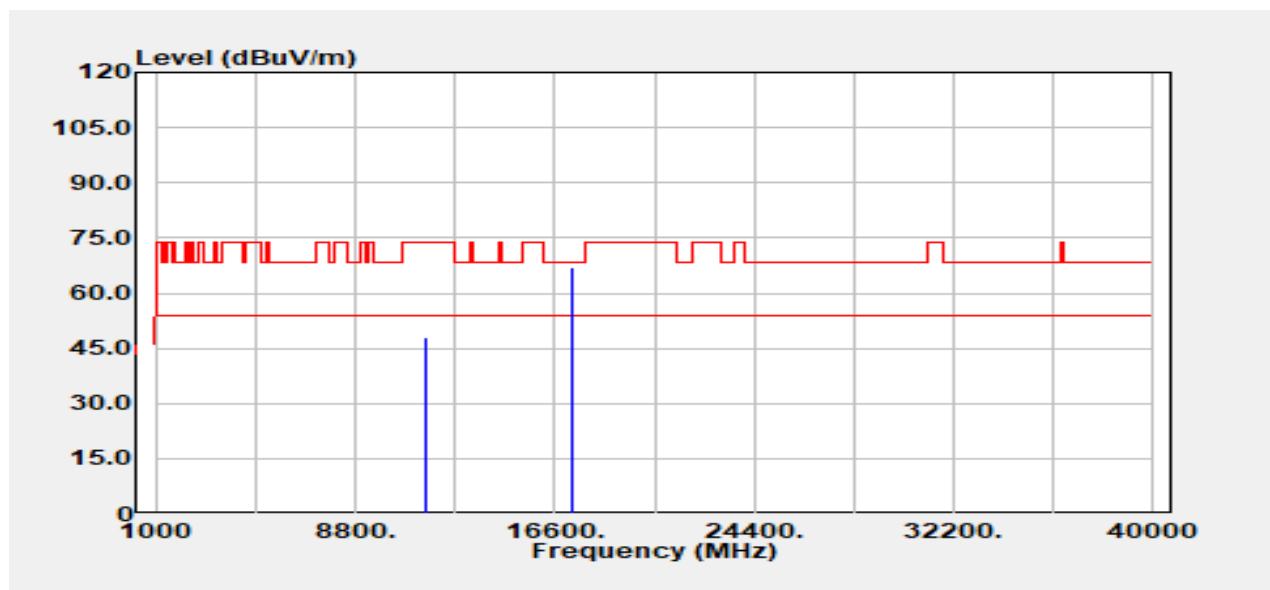


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11510.00	Peak	28.84	19.22	48.07	74.00	-25.93
11510.00	Average	20.38	19.22	39.60	54.00	-14.40
17265.00	Peak	31.35	35.57	66.92	68.20	-1.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT40 / 5795 MHz	Temp/Hum	23.4(°C) / 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

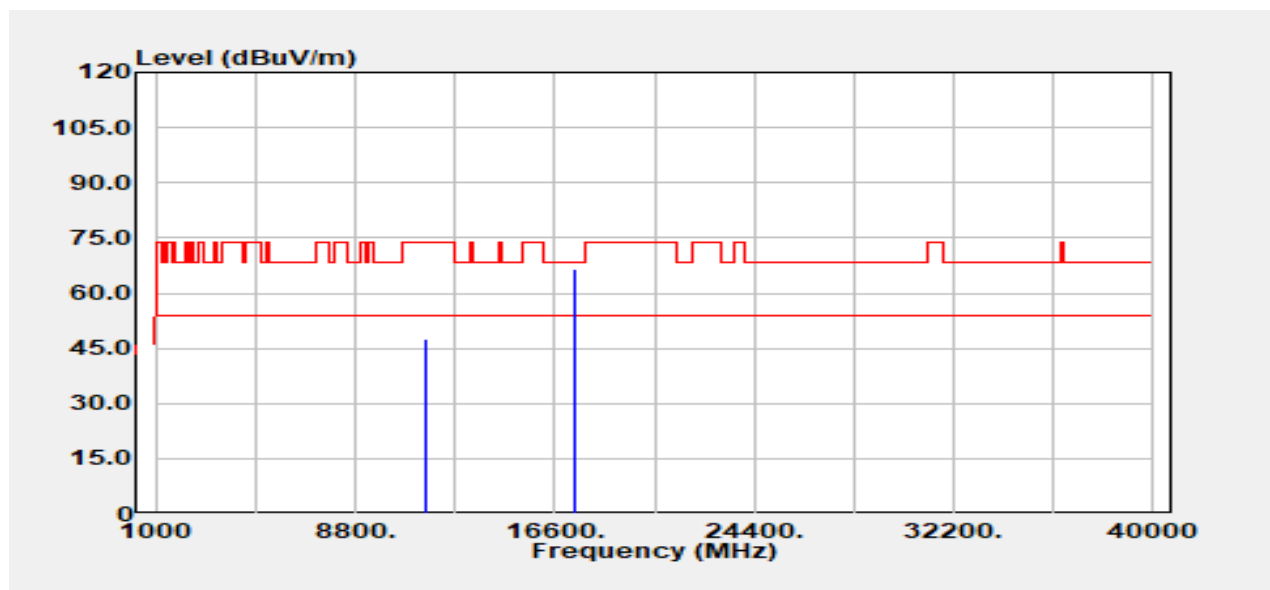


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11590.00	Peak	27.98	19.34	47.32	74.00	-26.68
11590.00	Average	20.18	19.34	39.52	54.00	-14.48
17385.00	Peak	31.02	35.37	66.38	68.20	-1.82
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11n HT40 / 5795 MHz	Temp/Hum	23.4(°C) / 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

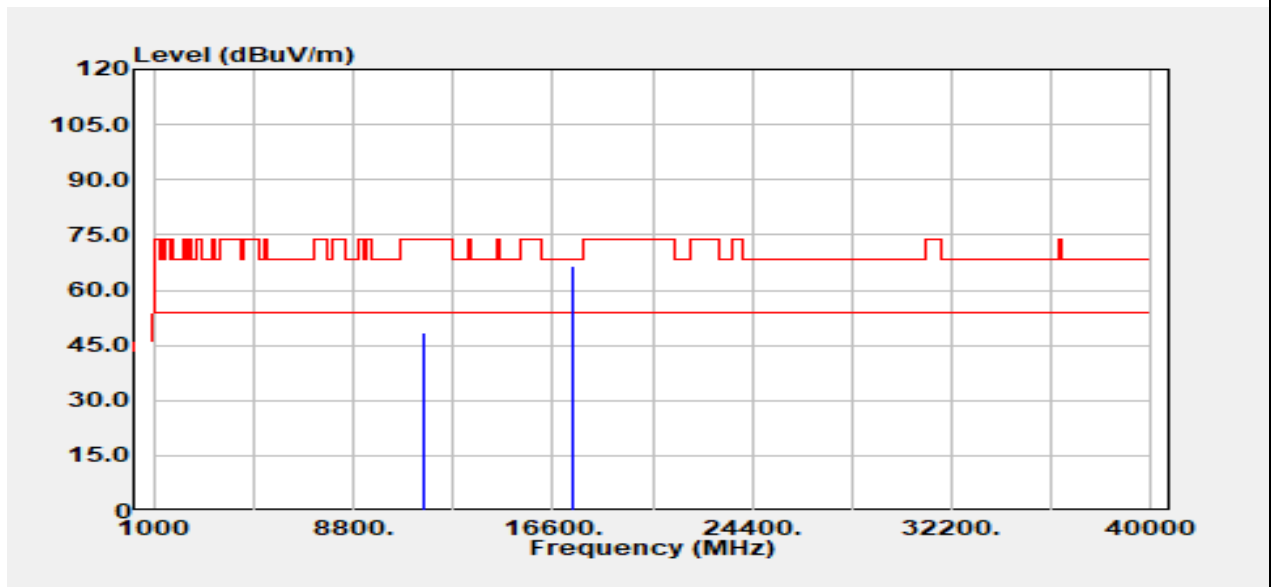


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11590.00	Peak	28.98	19.34	48.32	74.00	-25.68
11590.00	Average	20.14	19.34	39.48	54.00	-14.52
17385.00	Peak	31.31	35.37	66.67	68.20	-1.53
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	23.4(°C) / 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

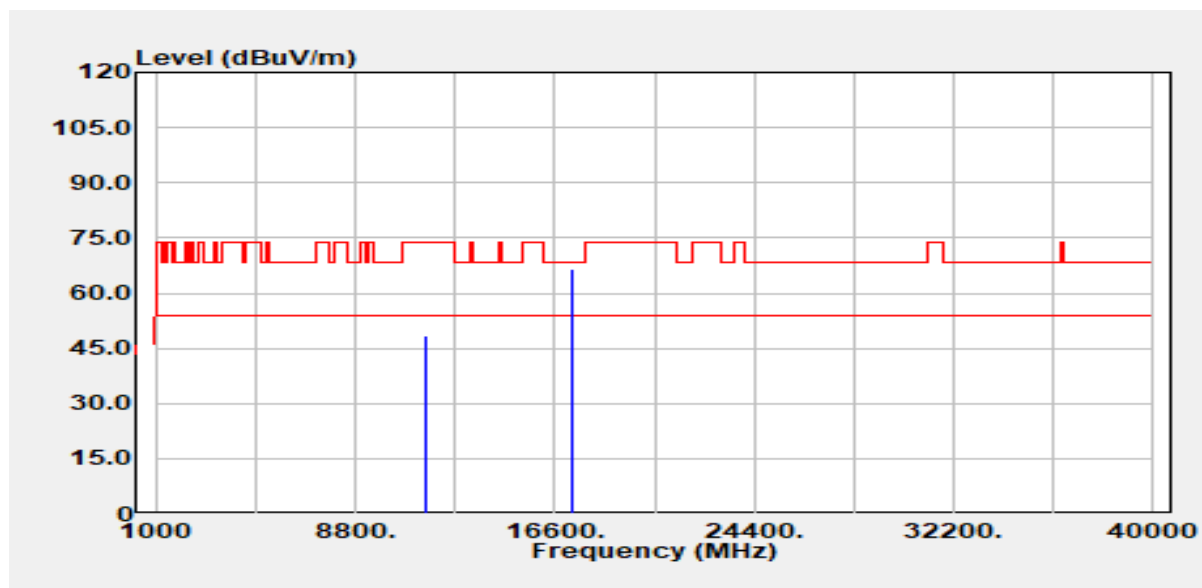


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11510.00	Peak	29.09	19.22	48.31	74.00	-25.69
11510.00	Average	19.70	19.22	38.92	54.00	-15.08
17265.00	Peak	31.16	35.57	66.73	68.20	-1.47
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ac VHT80/ 5775 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

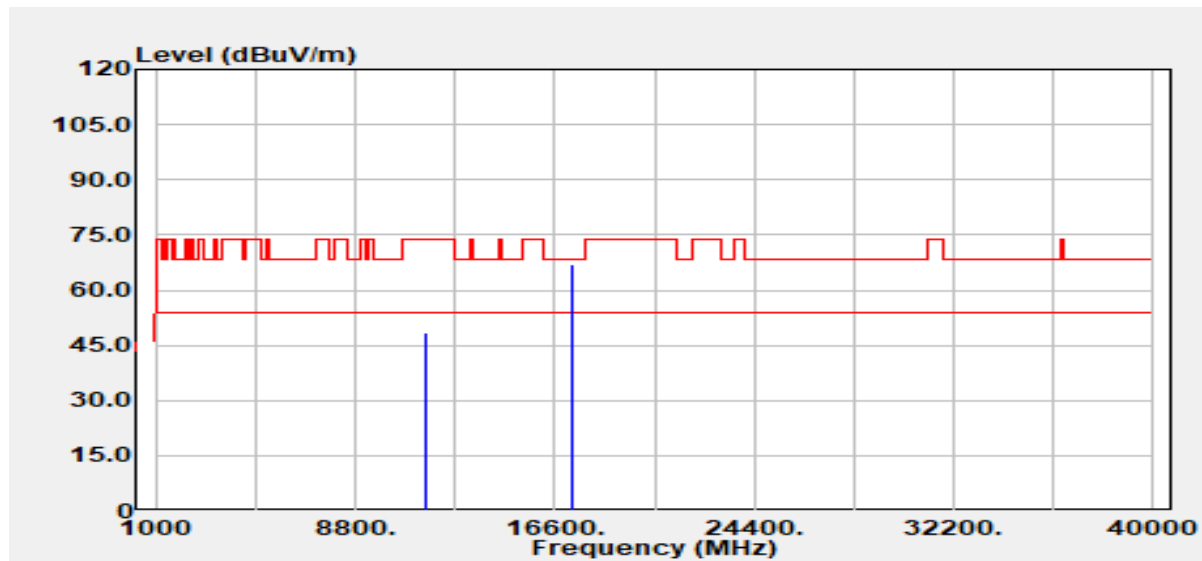


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11510.00	Peak	29.44	19.22	48.66	74.00	-25.34
11510.00	Average	20.28	19.22	39.50	54.00	-14.50
17265.00	Peak	31.59	35.57	67.16	68.20	-1.04
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE20 / 5745 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

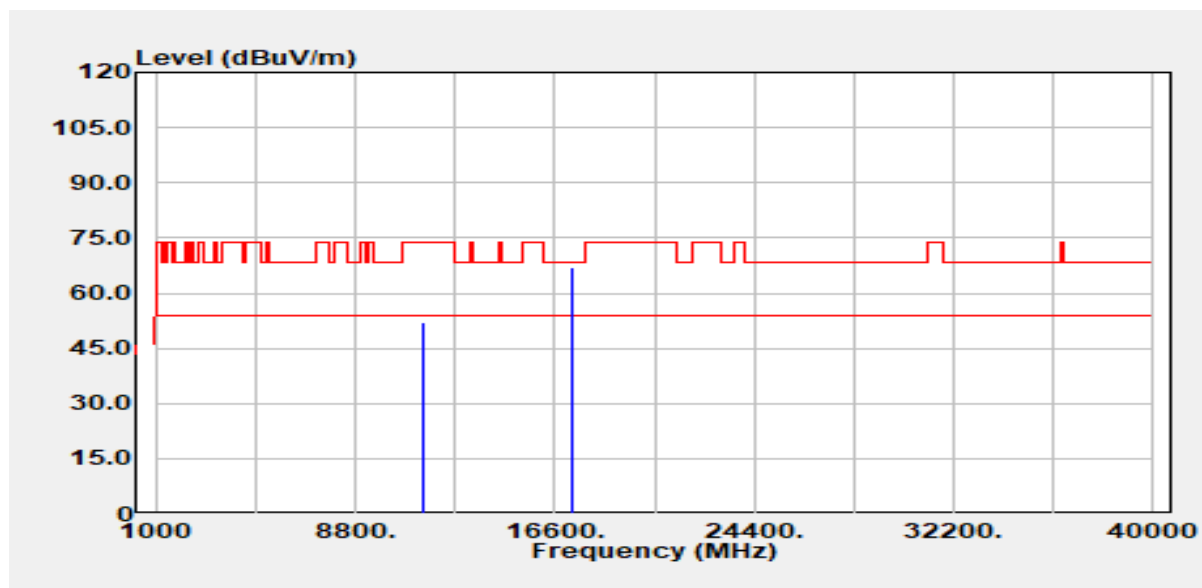


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	32.93	19.20	52.13	74.00	-21.87
11490.00	Average	24.71	19.20	43.91	54.00	-10.09
17235.00	Peak	31.63	35.48	67.12	68.20	-1.08
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE20 / 5745 MHz	Temp/Hum	23.4(°C) / 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

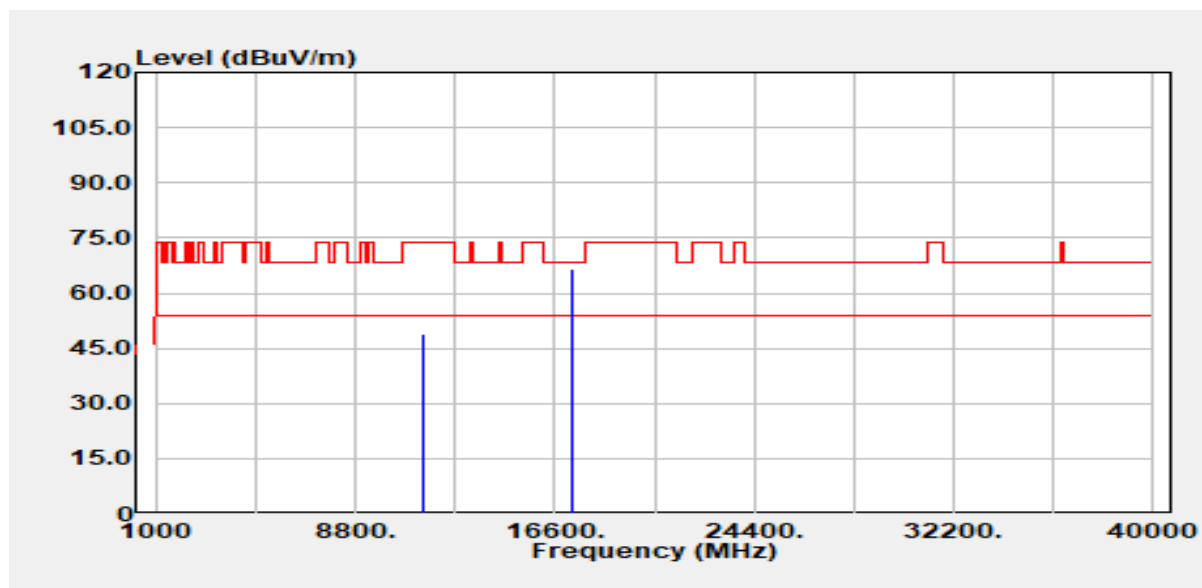


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	29.89	19.20	49.09	74.00	-24.91
11490.00	Average	20.38	19.20	39.58	54.00	-14.42
17235.00	Peak	31.06	35.48	66.54	68.20	-1.66
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE20/ 5785 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

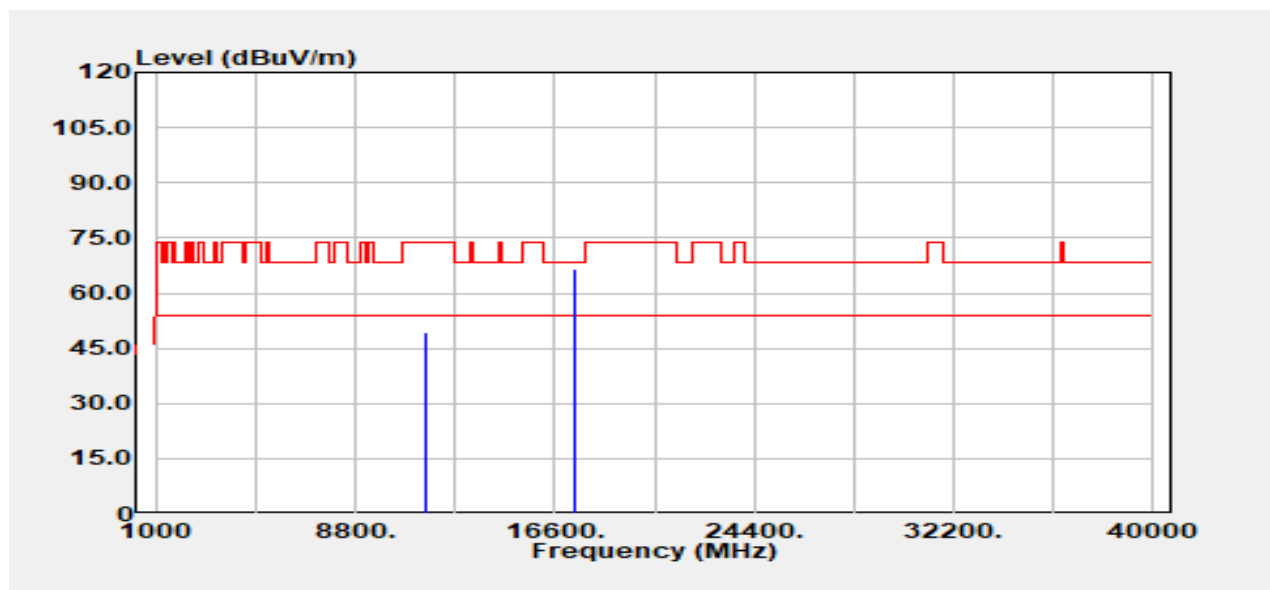


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11570.00	Peak	30.23	19.31	49.54	74.00	-24.46
11570.00	Average	22.73	19.31	42.04	54.00	-11.96
17355.00	Peak	30.93	35.52	66.45	68.20	-1.75
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11ax HE20/ 5785 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

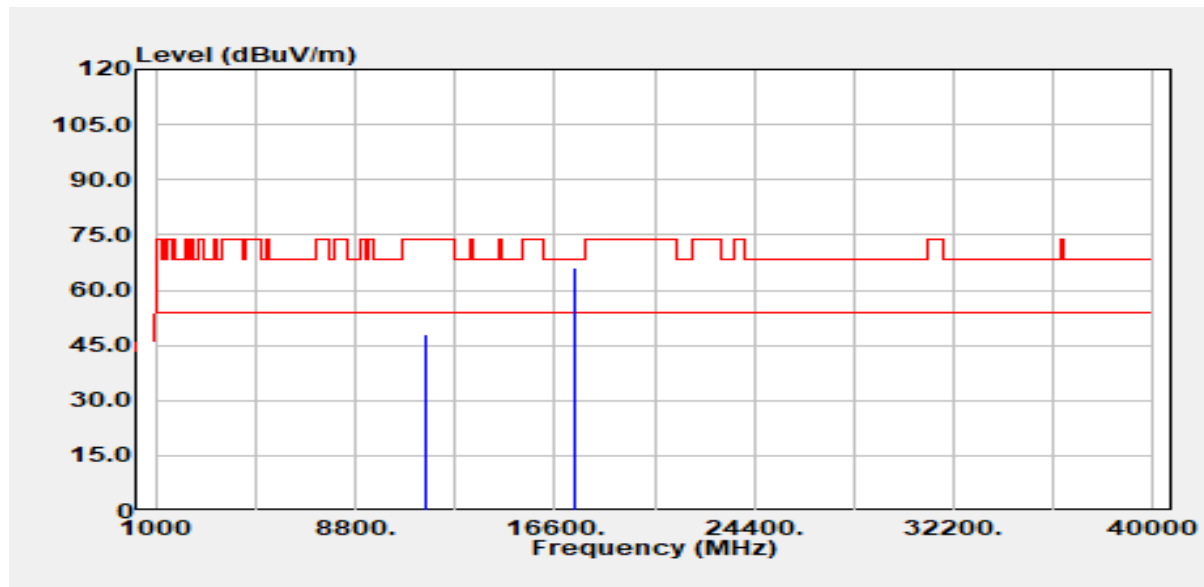


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.00	Peak	28.52	19.31	47.83	74.00	-26.17
11570.00	Average	20.16	19.31	39.47	54.00	-14.53
17355.00	Peak	30.66	35.52	66.18	68.20	-2.02
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE20/ 5825 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

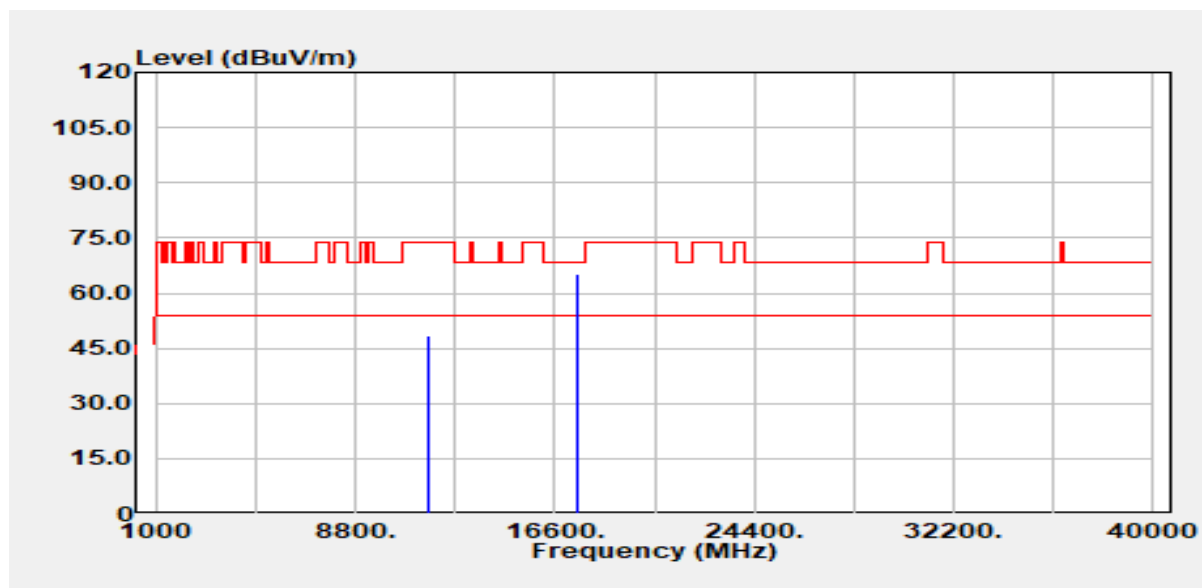


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11650.00	Peak	29.05	19.29	48.34	74.00	-25.66
11650.00	Average	20.82	19.29	40.11	54.00	-13.89
17475.00	Peak	30.45	34.91	65.36	68.20	-2.84
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE20 / 5825 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

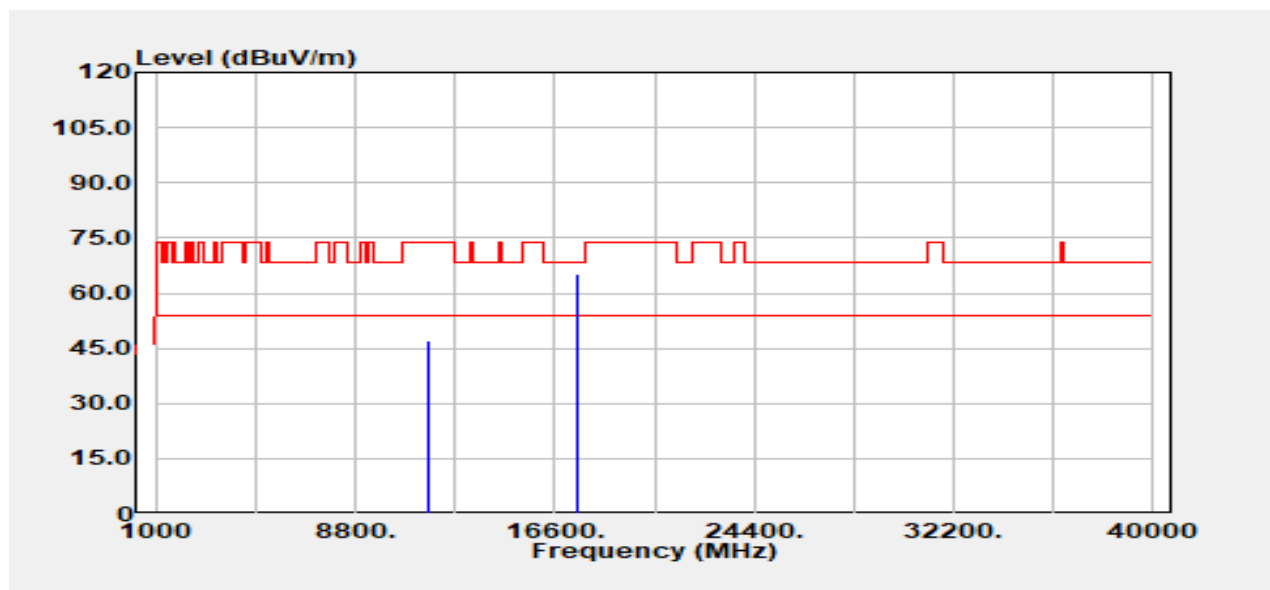


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	27.93	19.29	47.22	74.00	-26.78
11650.00	Average	20.10	19.29	39.39	54.00	-14.61
17475.00	Peak	30.34	34.91	65.25	68.20	-2.95
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE40 / 5755 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

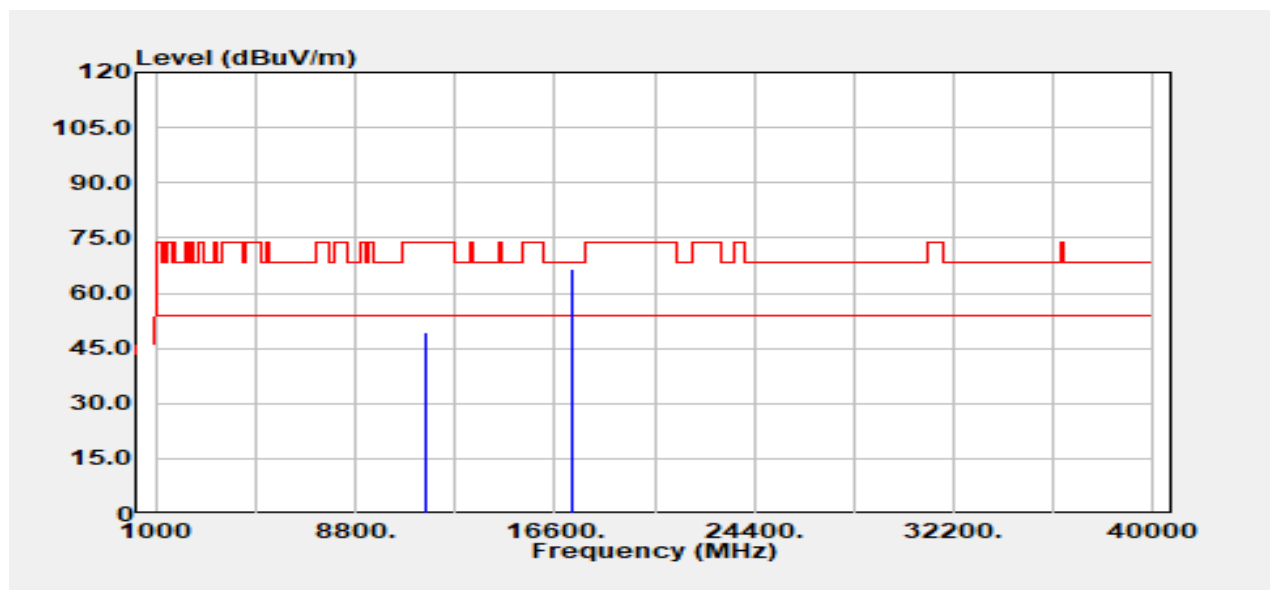


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11510.00	Peak	30.21	19.22	49.43	74.00	-24.57
11510.00	Average	22.46	19.22	41.68	54.00	-12.32
17265.00	Peak	31.15	35.57	66.72	68.20	-1.48
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE40 / 5755 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

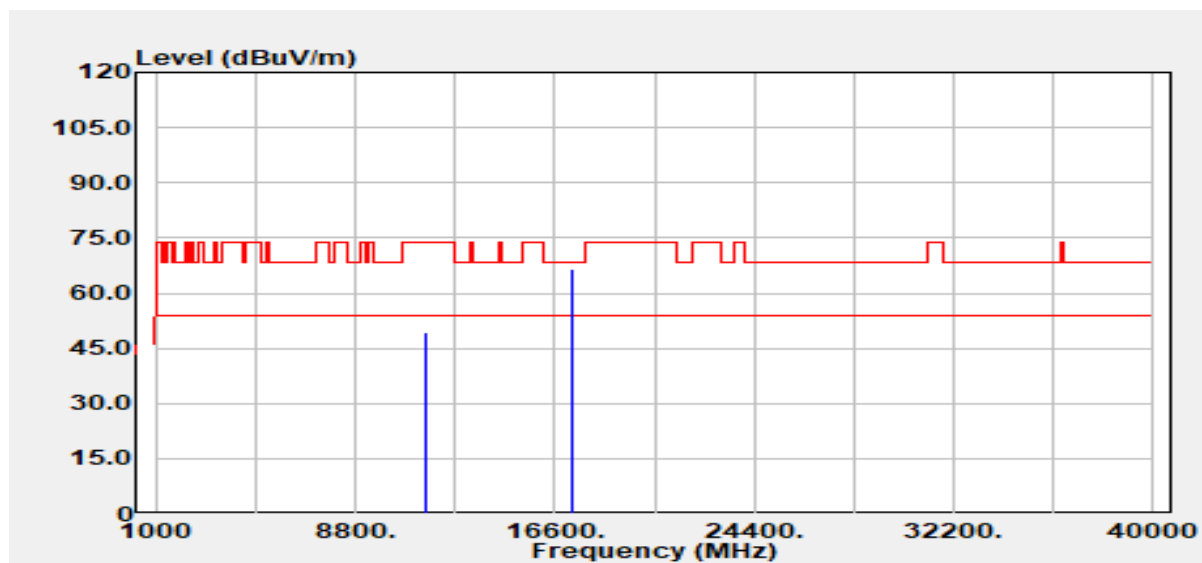


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11510.00	Peak	29.92	19.22	49.15	74.00	-24.85
11510.00	Average	20.36	19.22	39.58	54.00	-14.42
17265.00	Peak	30.93	35.57	66.50	68.20	-1.70
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE40 / 5795 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

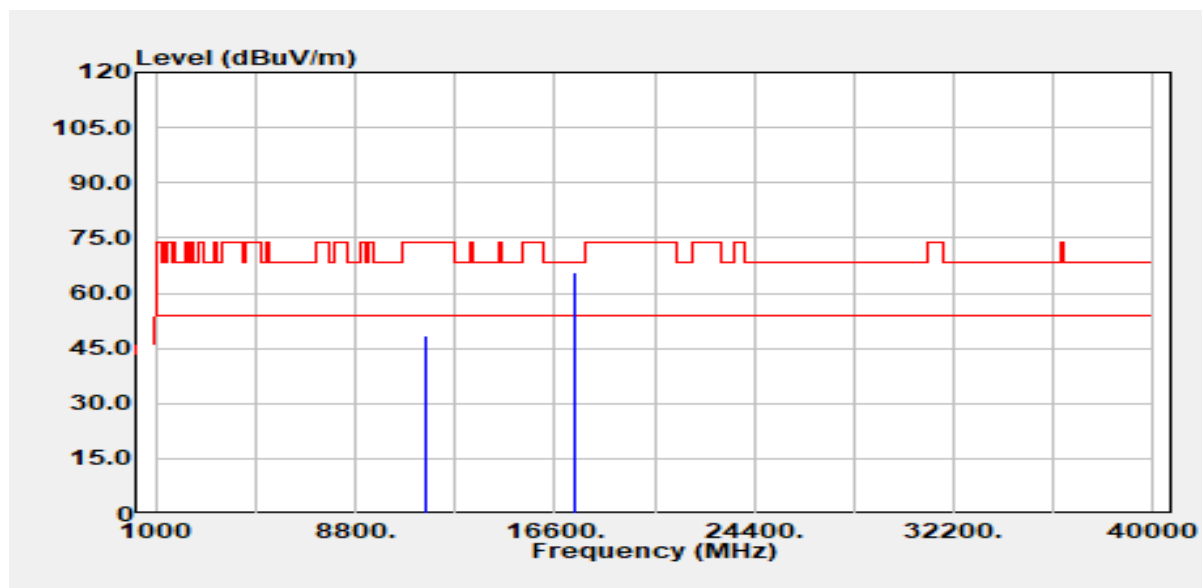


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11590.00	Peak	29.00	19.34	48.35	74.00	-25.65
11590.00	Average	20.91	19.34	40.25	54.00	-13.75
17385.00	Peak	30.52	35.37	65.88	68.20	-2.32
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE40 / 5795 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

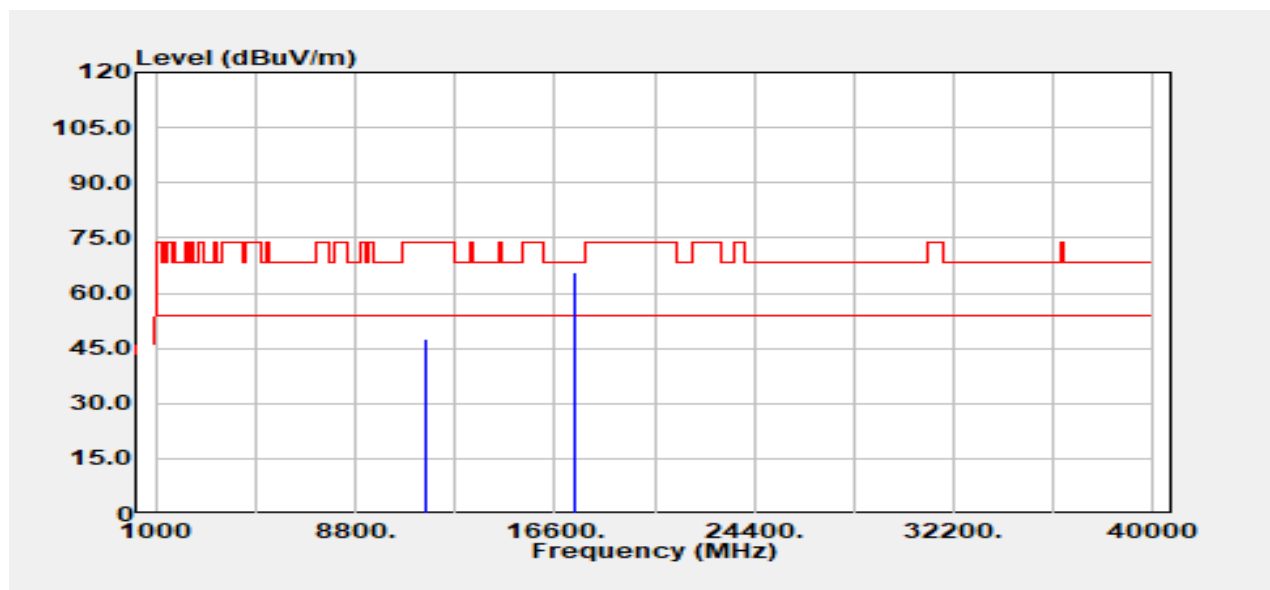


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11590.00	Peak	28.39	19.34	47.73	74.00	-26.27
11590.00	Average	22.08	19.34	41.42	54.00	-12.58
17385.00	Peak	30.10	35.37	65.47	68.20	-2.73
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE80 / 5775 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

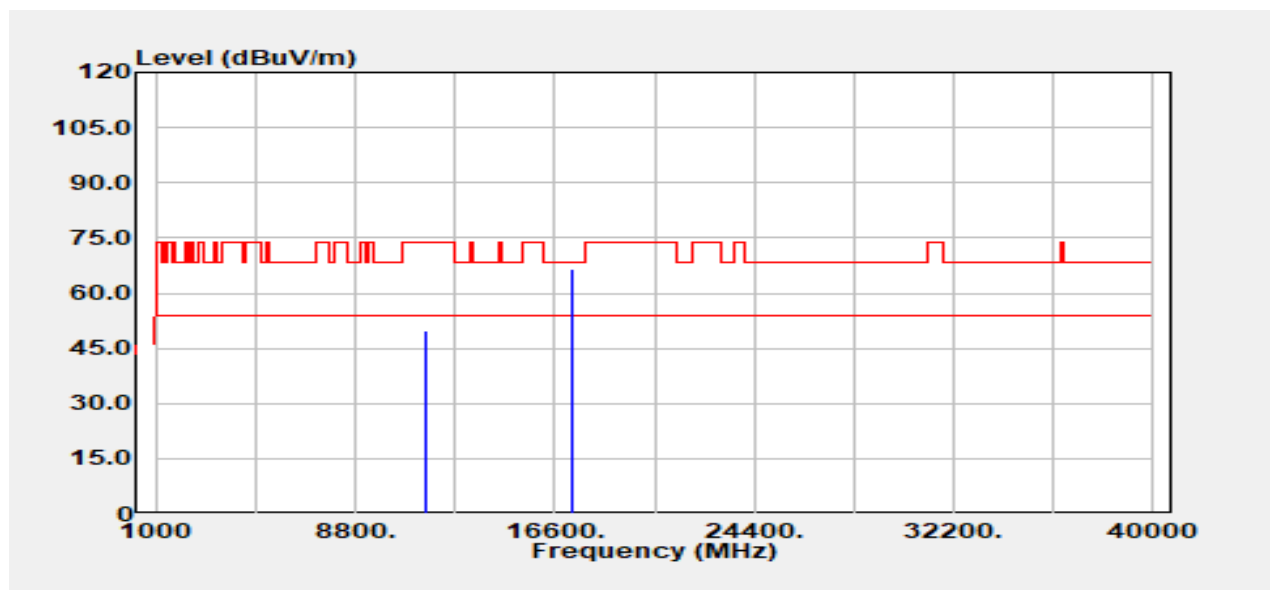


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11550.00	Peak	30.57	19.28	49.85	74.00	-24.15
11550.00	Average	21.00	19.28	40.28	54.00	-13.72
17325.00	Peak	31.00	35.59	66.59	68.20	-1.61
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2209003822KR

Test Mode	Mode 2 IEEE 802.11ax HE80/ 5775 MHz	Temp/Hum	23.4(°C)/ 63%RH
Test Item	Harmonic	Test Date	October 11, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

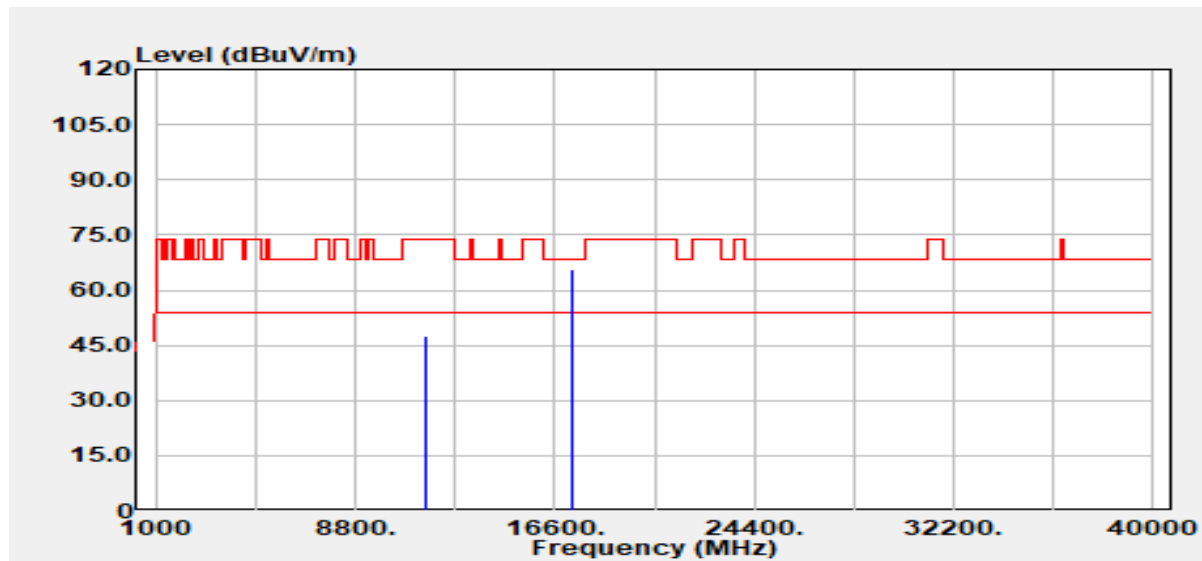

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11550.00	Peak	28.34	19.28	47.62	74.00	-26.38
11550.00	Average	20.13	19.28	39.41	54.00	-14.59
17325.00	Peak	30.27	35.59	65.86	68.20	-2.34
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

- End of Test Report -