

Ossia, Inc.

TEST REPORT FOR

**Cota WPT Client
Model: VenusRx**

Tested to The Following Standards:

FCC Part 15 Subpart C Section(s)

**15.247
(DTS 2400-2483.5 MHz)**

Report No.: 102446-1

Date of issue: April 24, 2019



Test Certificate # 803.05

This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

This report contains a total of 42 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc.



TABLE OF CONTENTS

Administrative Information 3

 Test Report Information 3

 Report Authorization 3

 Test Facility Information 4

 Software Versions 4

 Site Registration & Accreditation Information 4

 Summary of Results 5

 Modifications During Testing 5

 Conditions During Testing 5

 Equipment Under Test 6

 General Product Information 6

FCC Part 15 Subpart C 7

 15.247(a)(2) 6dB Bandwidth 7

 15.247(b)(3) Output Power 11

 15.247(e) Power Spectral Density 19

 15.247(d) Radiated Emissions & Band Edge 26

Supplemental Information 41

 Measurement Uncertainty 41

 Emissions Test Details 41

ADMINISTRATIVE INFORMATION

Test Report Information

REPORT PREPARED FOR:

Ossia, Inc.
11235 SE 6th St #200
Bellevue, WA 98004

Representative: Doug Williams
Customer Reference Number: 13041

DATE OF EQUIPMENT RECEIPT:

DATE(S) OF TESTING:

REPORT PREPARED BY:

Morgan Tramontin
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

Project Number: 102446

April 6, 2019

April 6-8, 2019

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the equipment provided by the client, tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):
CKC Laboratories, Inc.
22116 23rd Drive S.E., Suite A
Canyon Park, Bothell, WA 98021

Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.12

Site Registration & Accreditation Information

Location	*NIST CB #	FCC	JAPAN
Canyon Park, Bothell, WA	US0081	US1022	A-0148

*CKC's list of NIST designated countries can be found at: <https://standards.gov/cabs/designations.html>

SUMMARY OF RESULTS

Standard / Specification: FCC Part 15 Subpart C - 15.247 (DTS)

Test Procedure	Description	Modifications	Results
15.247(a)(2)	6dB Bandwidth	NA	Pass
15.247(b)(3)	Output Power	NA	Pass
15.247(e)	Power Spectral Density	NA	Pass
15.247(d)	RF Conducted Emissions & Band Edge	NA	NA1
15.247(d)	Radiated Emissions & Band Edge	NA	Pass
15.207	AC Conducted Emissions	NA	NA2

NA = Not Applicable

NA1 = Not applicable because EUT has integral antenna

NA2 = Not applicable because the EUT will not charge and transmit simultaneously.

ISO/IEC 17025 Decision Rule

The declaration of pass or fail herein is based upon assessment to the specification(s) listed above, including where applicable, assessment of measurement uncertainties. For performance related tests, equipment was monitored for specified criteria identified in that section of testing.

Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions

No modifications were made during testing.

Modifications listed above must be incorporated into all production units.

Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions

None

EQUIPMENT UNDER TEST (EUT)

During testing, numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

Configuration 1

Equipment Tested:

Device	Manufacturer	Model #	S/N
Cota WPT Client	Ossia, Inc.	VenusRx	126

Support Equipment:

Device	Manufacturer	Model #	S/N
Laptop (Programming)	Apple	MacBook Pro A1398	NA

General Product Information:

Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Type of Wideband System:	Zigbee 802.15.4
Operating Frequency Range:	2405-2480MHz
Modulation Type(s):	OQPSK
Maximum Duty Cycle:	100% tested as worst case
Number of TX Chains:	1
Antenna Type(s) and Gain:	Patch 6 dBi
Beamforming Type:	NA
Antenna Connection Type:	Integral
Nominal Input Voltage:	Battery Powered
Firmware / Software used for Test:	0x32B1CCD

FCC Part 15 Subpart C

15.247(a)(2) 6dB Bandwidth


Test Setup/Conditions			
Test Location:	Bothell Lab C3	Test Engineer:	M. Harrison
Test Method:	ANSI C63.10 (2013), KDB 558074 v05r02	Test Date(s):	4/8/2019
Configuration:	1		
Test Setup:	Test Mode: Continuously Modulated The EUT is operating with fresh battery installed. The EUT is set 1.5 meters high on a Styrofoam table. X, Y and Z axis are investigated with the worst case reported.		

Environmental Conditions			
Temperature (°C)	20	Relative Humidity (%):	35


Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
01467	Horn Antenna	EMCO	3115	7/21/2017	7/21/2019
02871	Spectrum Analyzer	Agilent	E4440A	1/9/2019	1/9/2021
P06503	Cable	Astrolab	32026-29801- 29801-36	3/13/2018	3/13/2020
P06515	Cable	Andrews	Heliac	6/29/2018	6/29/2020
P06540	Cable	Andrews	Heliac	10/30/2017	10/30/2019
03540	Preamp	HP	83017A	3/25/2019	3/25/2021

Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
2405	1	OQPSK	1615	≥500	Pass
2440	1	OQPSK	1511	≥500	Pass
2480	1	OQPSK	1617	≥500	Pass


Plot(s)

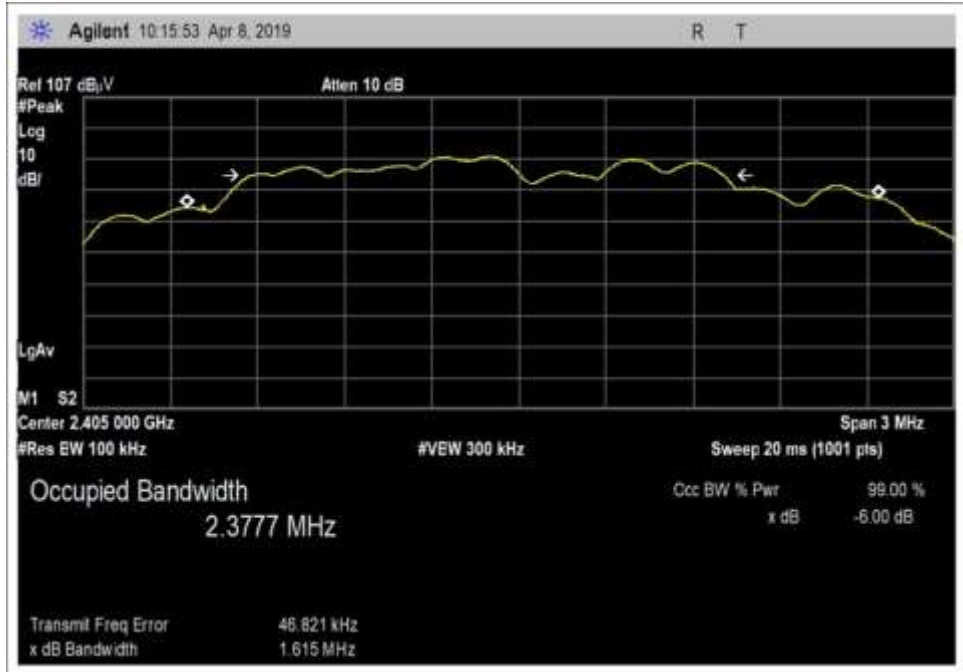

Low Channel

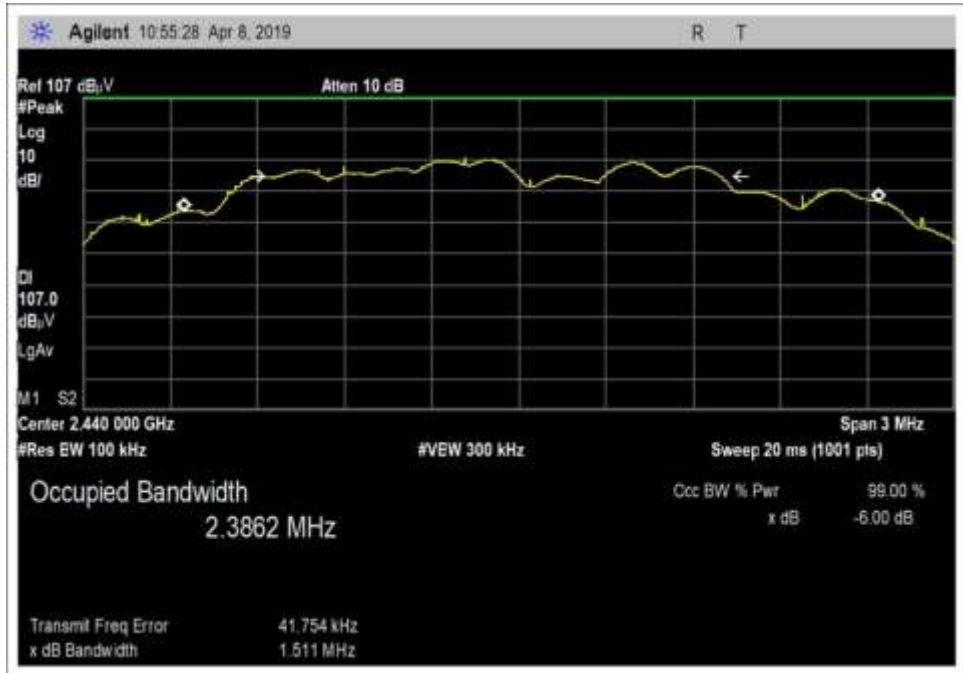


Middle Channel

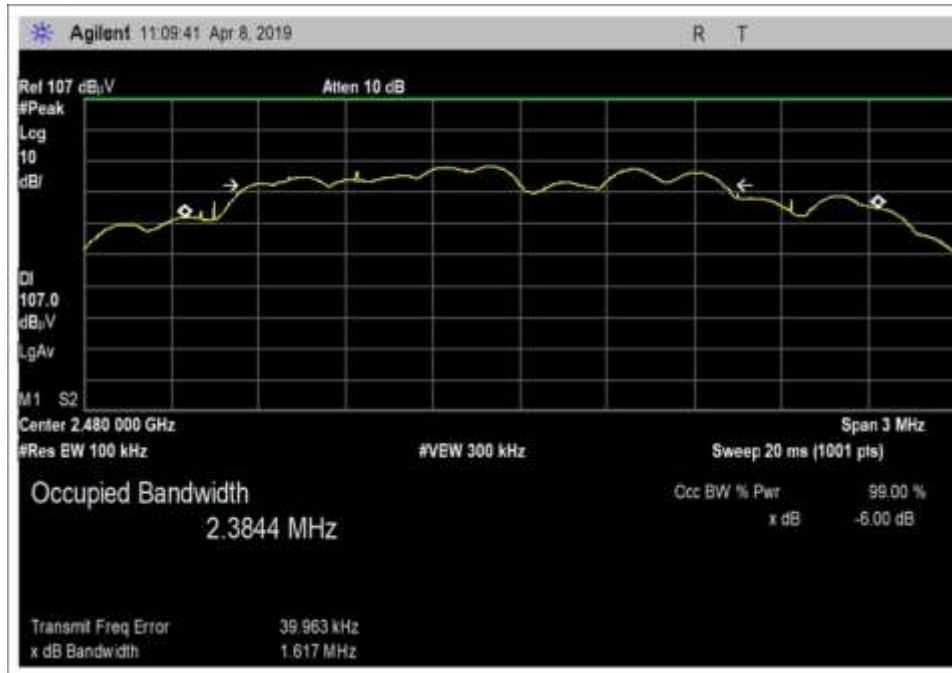

High Channel

Test Setup Photo(s)

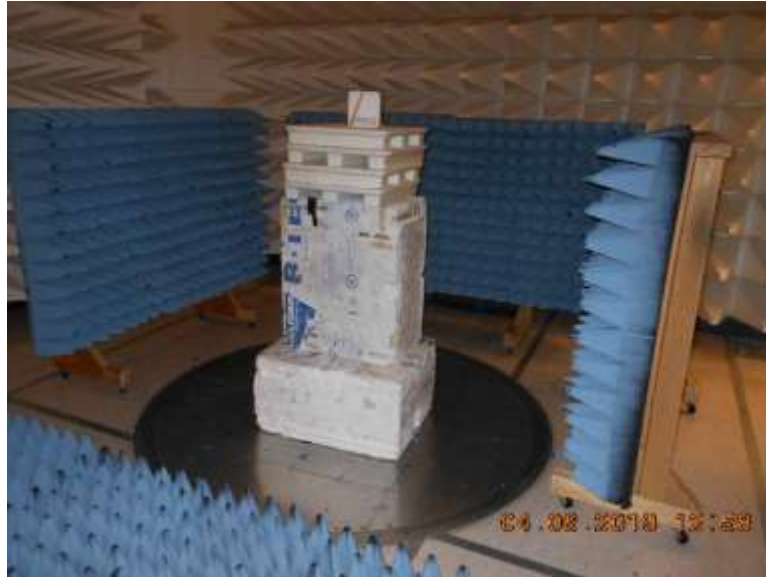

15.247(b)(3) Output Power

Test Data Summary - Voltage Variations

This equipment is battery powered and manufacturer declares the equipment cannot operate while charging. Power output tests were performed using a fresh battery.

Power Output Test Data Summary - Radiated Measurement

Measurement Option: RBW > DTS Bandwidth						
Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Field Strength (dBuV/m @3m)	Calculated (dBm)	Limit (dBm)	Results
2405	OQPSK	Patch / 6dBi	92.8	-2.42	≤30	Pass
2440	OQPSK	Patch / 6dBi	91.3	-3.92	≤30	Pass
2480	OQPSK	Patch / 6dBi	89.7	-5.52	≤30	Pass

For fixed point-to-point antennas, the limit is calculated in accordance with 15.247(c)(1): $Limit = 30 - Roundup\left(\frac{G-6}{3}\right)$

For directional beamforming antennas, the limit is calculated in accordance with 15.247(c)(2) and KDB 662911.


Conducted RF output power calculated in accordance with ANSI C63.10.

$$P(W) = \frac{(E \cdot d)^2}{30 G}$$


Or equivalently, in logarithmic form:

$$P(dBm) = E(dBuV/m) + 20LOG(d) - G - 104.77$$


Plots

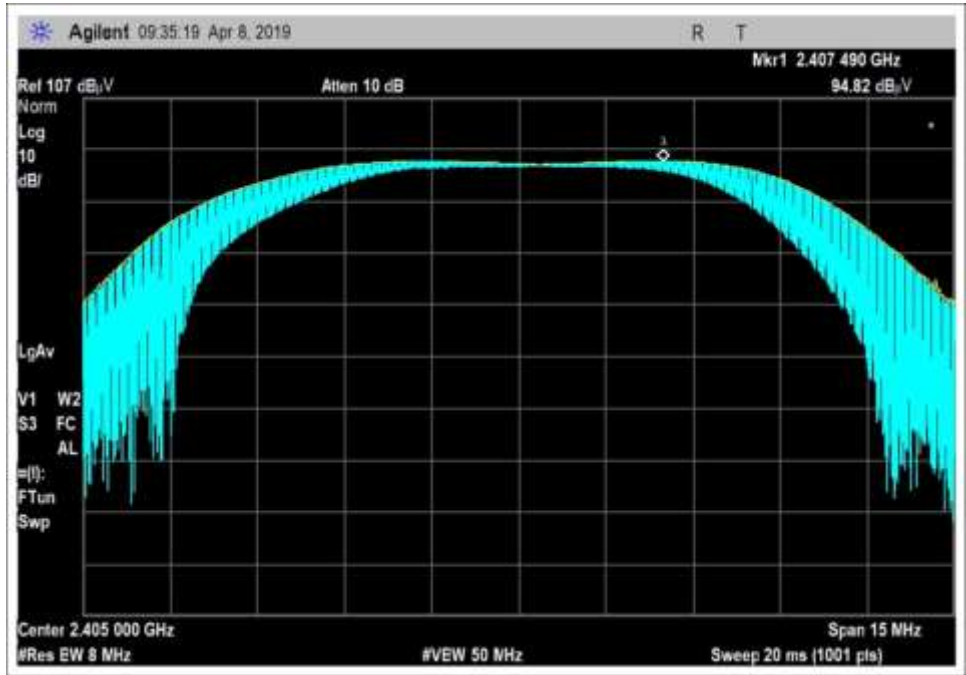

Low Channel

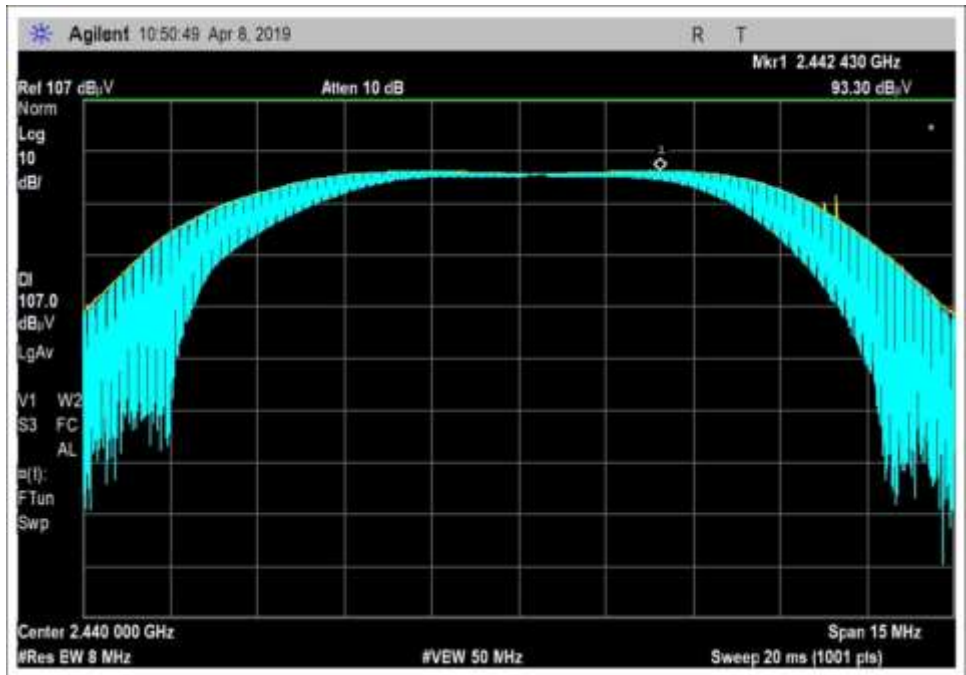

Middle Channel

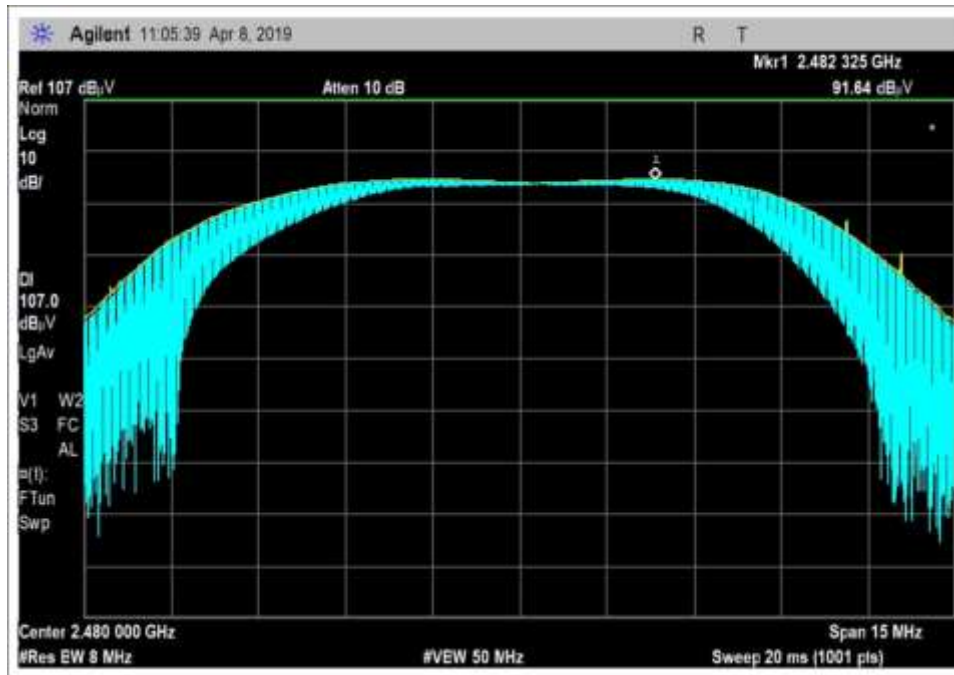

High Channel

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC
 Customer: **Ossia, Inc.**
 Specification: **15.247(b) Power Output (2400-2483.5 MHz DTS)**
 Work Order #: **102446** Date: 4/8/2019
 Test Type: **Radiated Scan** Time: 10:06:15
 Tested By: Matthew Harrison Sequence#: 14
 Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Pressure: 101.8kPa
 Frequency: 2405-2480MHz
 Temperature: 20°C
 Relative Humidity: 35%
 Test Method: ANSI 63.10 (2013), KDB 558074 v05r02

 Test Mode: Continuously Modulated


 The EUT is operating with fresh battery installed.

 The EUT is set 1.5 meters high on a Styrofoam table. X, Y and Z axis are investigated with the worst case reported.

 Plots show uncorrected data. See tabular data for corrected data.

 The EUT is investigated in Low, Middle, and High Channels, X, Y, & Z Axis with only the worst case reported.
 Vertical and Horizontal polarities investigated

Ossia, Inc. W/O#: 102446 Sequence#: 14 Date: 4/8/2019
 15.247(b) Power Output (2400-2483.5 MHz DTS) Test Distance: 3 Meters Vert

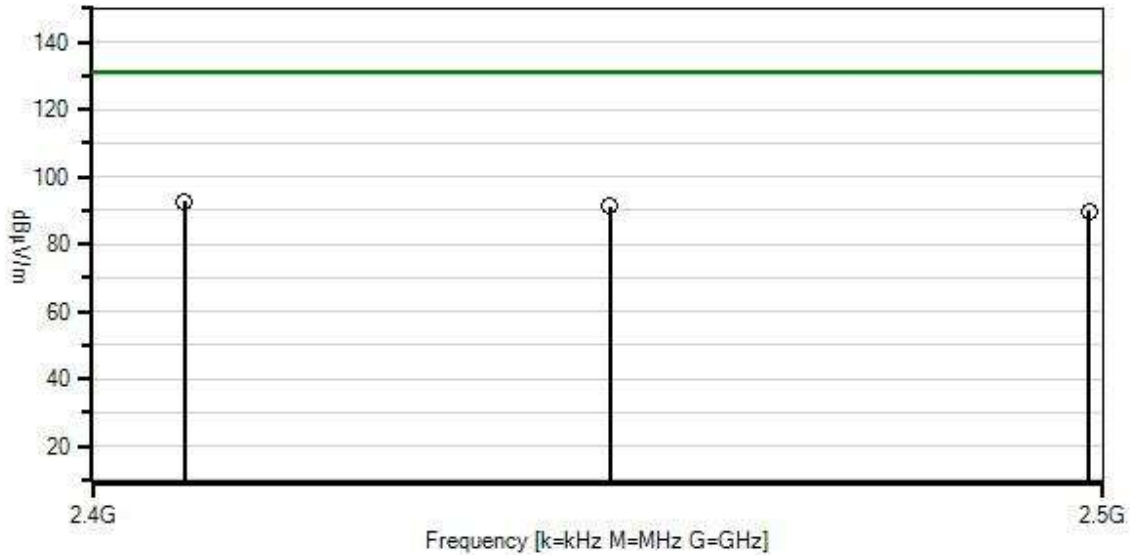

— Readings
 × QP Readings
 ▼ Ambient
 ○ Peak Readings
 * Average Readings
 Software Version: 5.03.12
 — 1 - 15.247(b) Power Output (2400-2483.5 MHz DTS)


Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06540	Cable	Heliacx	10/30/2017	10/30/2019
T2	AN02871	Spectrum Analyzer	E4440A	1/9/2019	1/9/2021
T3	ANP06515	Cable	Heliacx	6/29/2018	6/29/2020
T4	AN03540	Preamp	83017A	3/25/2019	3/25/2021
T5	AN01467	Horn Antenna-ANSI C63.5 Calibration	3115	7/21/2017	7/21/2019
T6	ANP06503	Cable	32026-29801- 29801-36	3/13/2018	3/13/2020

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	T1 T5 dB	T2 T6 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	2407.490M	94.8	+0.4 +28.1	+0.0 +1.0	+2.6	-34.1	+0.0	92.8	131.2 Y-Axis	-38.4	Vert 147
2	2442.430M	93.3	+0.4 +28.1	+0.0 +1.0	+2.6	-34.1	+0.0	91.3	131.2 Y-Axis	-39.9	Vert 135
3	2482.325M	91.6	+0.4 +28.1	+0.0 +1.0	+2.7	-34.1	+0.0	89.7	131.2 Y-Axis	-41.5	Vert 159

Test Setup Photo(s)

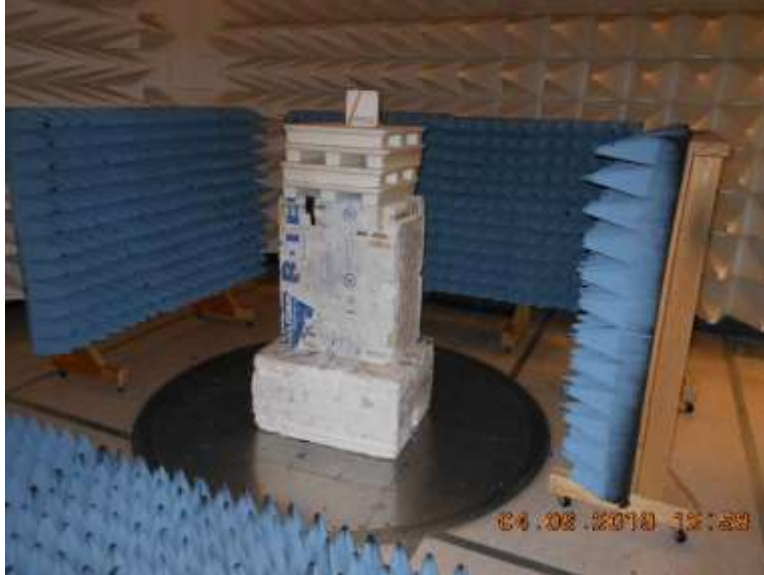



X-Axis



Y-Axis



Z-Axis

15.247(e) Power Spectral Density

PSD Test Data Summary - Radiated Measurement						
Measurement Method: PKPSD						
Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Field Strength (dBuV/m @3m)	Calculated (dBm/3kHz)	Limit (dBm/3kHz)	Results
2405	OQPSK	Patch / 6dBi	80.9	-14.32	≤8	Pass
2440	OQPSK	Patch / 6dBi	80.1	-15.12	≤8	Pass
2480	OQPSK	Patch / 6dBi	78.5	-16.72	≤8	Pass


Conducted RF output power calculated in accordance with ANSI C63.10.



$$P(W) = \frac{(E \cdot d)^2}{30 G}$$

Or equivalently, in logarithmic form:

$$P(dBm) = E(dBuV/m) + 20LOG(d) - G - 104.77$$

Plots

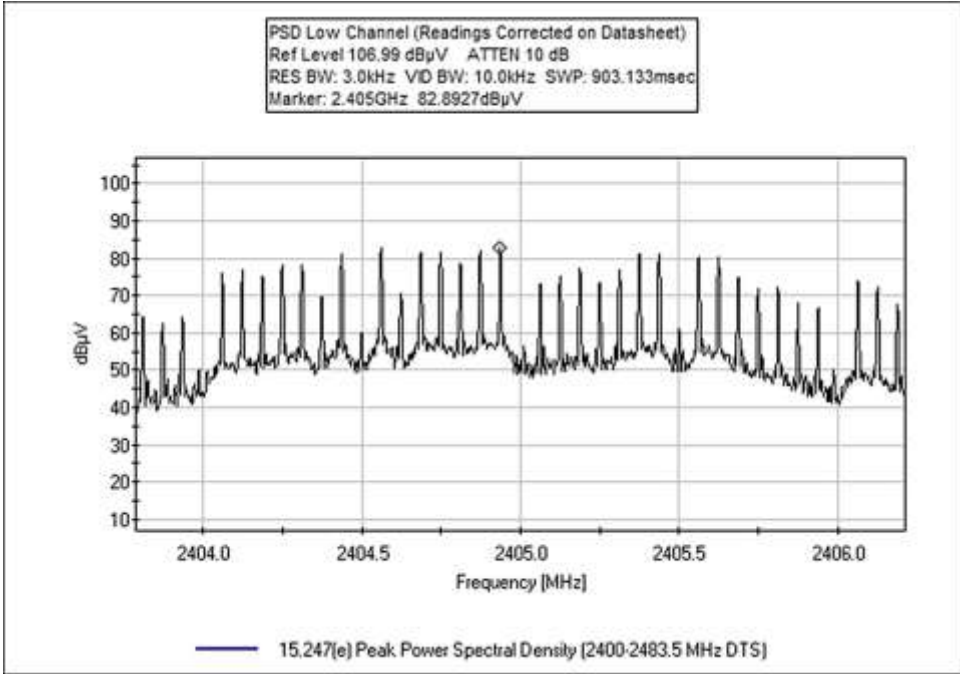

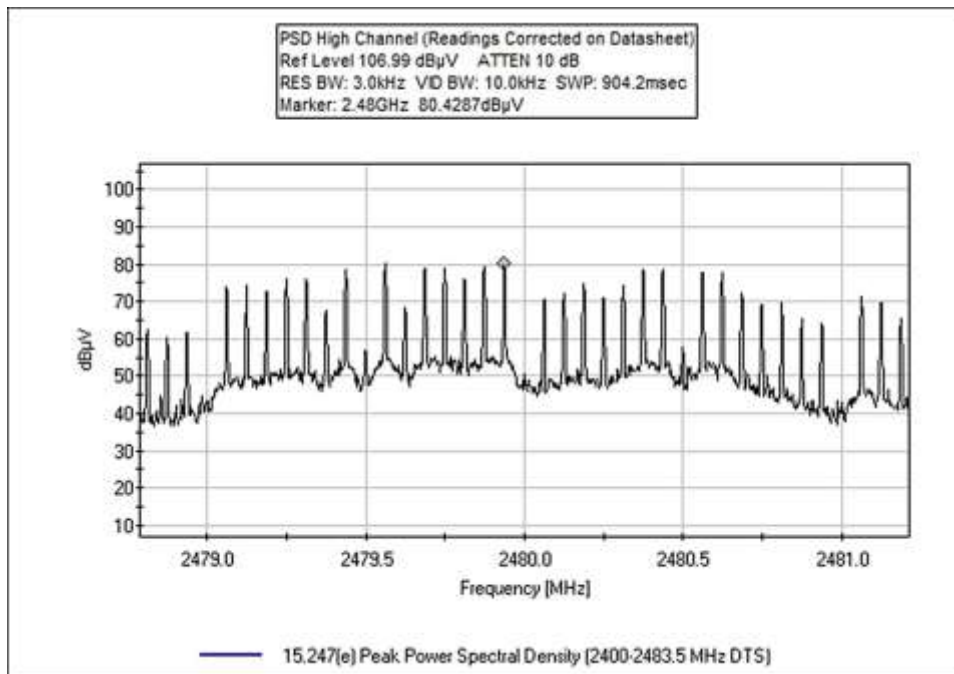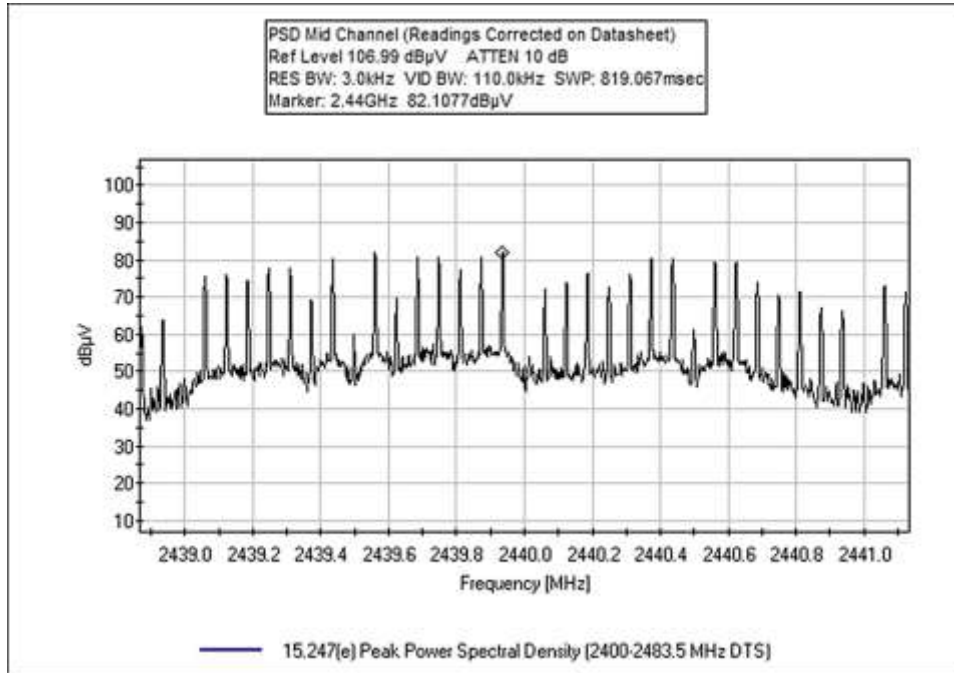

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC
 Customer: **Ossia, Inc.**
 Specification: **15.247(e) Peak Power Spectral Density (2400-2483.5 MHz DTS)**
 Work Order #: **102446** Date: 4/8/2019
 Test Type: **Radiated Scan** Time: 10:12:24
 Tested By: Matthew Harrison Sequence#: 15
 Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Temperature: 20-21°C
 Atmospheric Pressure: 101.8kPa
 Relative Humidity: 35%
 Frequency: 2405-2480MHz
 Test Method: ANSI 63.10 (2013), KDB 558074 v05r02

 Test Mode: Continuously Modulated


 The EUT is operating with fresh battery installed.

 The EUT is set 1.5 meters high on a Styrofoam table. X, Y and Z axis are investigated with the worst case reported.

 Plots show uncorrected data. See tabular data for corrected data.

 The EUT is investigated in Low, Middle, and High Channels, X, Y, & Z Axis with only the worst case reported.
 Vertical and Horizontal polarities investigated

Ossia, Inc. WO#: 102446 Sequence#: 15 Date: 4/8/2019
 15.247(e) Peak Power Spectral Density (2400-2483.5 MHz DTS) Test Distance: 3 Meters Vert

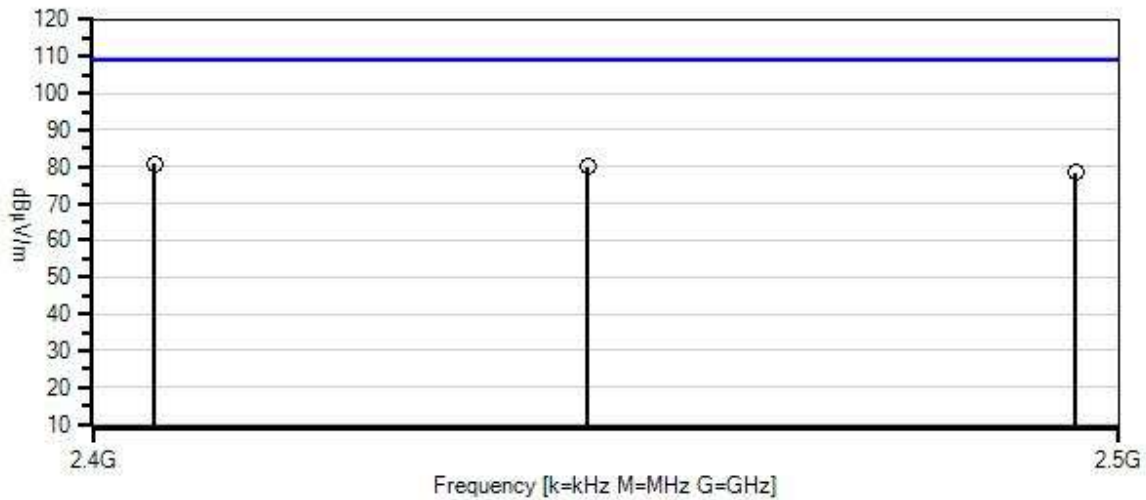

— Readings
 ○ Peak Readings
 × QP Readings
 * Average Readings
 ▼ Ambient
 Software Version: 5.03.12
 1 - 15.247(e) Peak Power Spectral Density (2400-2483.5 MHz DTS)

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06540	Cable	Heliacx	10/30/2017	10/30/2019
	AN02871	Spectrum Analyzer	E4440A	1/9/2019	1/9/2021
T2	ANP06515	Cable	Heliacx	6/29/2018	6/29/2020
T3	AN03540	Preamp	83017A	3/25/2019	3/25/2021
T4	AN01467	Horn Antenna-ANSI C63.5 Calibration	3115	7/21/2017	7/21/2019
T5	ANP06503	Cable	32026-29801- 29801-36	3/13/2018	3/13/2020


Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dBµV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBµV/m	Spec dBµV/m	Margin dB	Polar Ant
1	2404.937M	82.9	+0.4 +1.0	+2.6	-34.1	+28.1	+0.0	80.9	109.2	-28.3	Vert
2	2439.937M	82.1	+0.4 +1.0	+2.6	-34.1	+28.1	+0.0	80.1	109.2	-29.1	Vert
3	2479.937M	80.4	+0.4 +1.0	+2.7	-34.1	+28.1	+0.0	78.5	109.2	-30.7	Vert

Test Setup Photo(s)

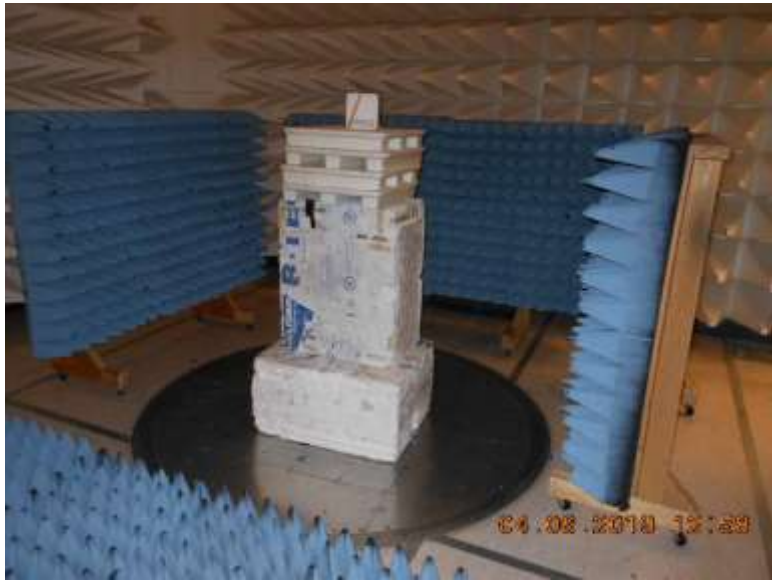



X-Axis



Y-Axis



Z-Axis

15.247(d) Radiated Emissions & Band Edge

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC
 Customer: **Ossia, Inc.**
 Specification: **15.209 Radiated Emissions**
 Work Order #: **102446** Date: 4/6/2019
 Test Type: **Radiated Scan** Time: 10:33:02
 Tested By: Matthew Harrison Sequence#: 1
 Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			


Test Conditions / Notes:

Temperature: 20°C
 Relative Humidity: 35%
 Atmospheric Pressure: 101.8kPa
 Frequency: 9kHz-25GHz

 Test Method: ANSI 63.10 (2013), KDB 558074 v05r02

 The EUT is investigated in Low, Middle, and High Channels, X, Y, & Z Axis with only the worst case reported.
 Vertical and Horizontal polarities investigated

Ossia, Inc. W/O#: 102446 Sequence#: 1 Date: 4/6/2019
 15.209 Radiated Emissions Test Distance: 3 Meters Vert

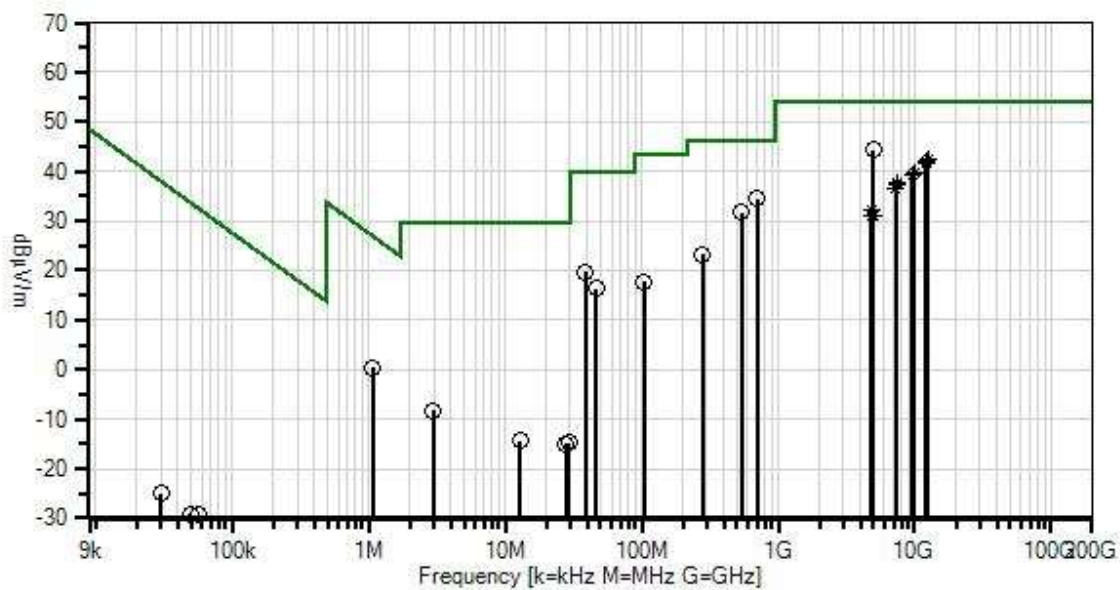

— Readings
 * Average Readings
 — 1 - 15.209 Radiated Emissions

○ Peak Readings
 ▼ Ambient

× QP Readings
 Software Version: 5.03.12

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02307	Preamp	8447D	1/15/2018	1/15/2020
T2	AN03628	Biconilog Antenna	3142E	6/7/2017	6/7/2019
T3	ANP06123	Attenuator	18N-6	5/5/2017	5/5/2019
T4	ANP05305	Cable	ETSI-50T	10/24/2017	10/24/2019
T5	ANP05360	Cable	RG214	1/31/2018	1/31/2020
T6	ANP06540	Cable	Heliac	10/30/2017	10/30/2019
T7	AN02871	Spectrum Analyzer	E4440A	1/9/2019	1/9/2021
T8	AN00052	Loop Antenna	6502	5/7/2018	5/7/2020
T9	ANP06515	Cable	Heliac	6/29/2018	6/29/2020
T10	AN03540	Preamp	83017A	3/25/2019	3/25/2021
T11	AN01467	Horn Antenna- ANSI C63.5 Calibration	3115	7/21/2017	7/21/2019
T12	ANP06503	Cable	32026-29801- 29801-36	3/13/2018	3/13/2020

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	T5	T6	T7	T8	Table	dBμV/m	dBμV/m	dB	Ant
			T9	T10	T11	T12					
			dB	dB	dB	dB					
1	4960.840M	39.0	+0.0	+0.0	+0.0	+0.0	+0.0	44.3	54.0	-9.7	Vert
			+0.0	+0.5	+0.0	+0.0					
			+4.2	-33.5	+32.5	+1.6					
2	12400.865 M	26.4	+0.0	+0.0	+0.0	+0.0	+0.0	42.5	54.0	-11.5	Vert
	Ave		+0.0	+1.1	+0.0	+0.0					
			+7.0	-34.6	+39.4	+3.2					
^	12400.865 M	38.2	+0.0	+0.0	+0.0	+0.0	+0.0	54.3	54.0	+0.3	Vert
			+0.0	+1.1	+0.0	+0.0					
			+7.0	-34.6	+39.4	+3.2					
4	703.200M	30.6	-28.0	+22.6	+5.9	+1.4	+0.0	34.4	46.0	-11.6	Vert
			+1.6	+0.3	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
5	12198.700 M	26.4	+0.0	+0.0	+0.0	+0.0	+0.0	42.1	54.0	-11.9	Vert
	Ave		+0.0	+1.0	+0.0	+0.0					
			+6.9	-34.6	+39.3	+3.1					
^	12198.700 M	35.6	+0.0	+0.0	+0.0	+0.0	+0.0	51.3	54.0	-2.7	Vert
			+0.0	+1.0	+0.0	+0.0					
			+6.9	-34.6	+39.3	+3.1					
7	12024.270 M	26.2	+0.0	+0.0	+0.0	+0.0	+0.0	41.7	54.0	-12.3	Vert
	Ave		+0.0	+1.0	+0.0	+0.0					
			+6.8	-34.5	+39.1	+3.1					
^	12024.270 M	33.7	+0.0	+0.0	+0.0	+0.0	+0.0	49.2	54.0	-4.8	Vert
			+0.0	+1.0	+0.0	+0.0					
			+6.8	-34.5	+39.1	+3.1					

9	540.200M	30.1	-28.2 +1.4 +0.0	+21.0 +0.3 +0.0	+5.9 +0.0 +0.0	+1.2 +0.0 +0.0	+0.0	31.7	46.0	-14.3	Vert
10	9920.250M Ave	26.7	+0.0 +0.0 +6.3	+0.0 +0.4 -34.2	+0.0 +0.0 +37.7	+0.0 +0.0 +2.6	+0.0	39.5	54.0	-14.5	Vert
^	9920.250M	38.8	+0.0 +0.0 +6.3	+0.0 +0.4 -34.2	+0.0 +0.0 +37.7	+0.0 +0.0 +2.6	+0.0	51.6	54.0	-2.4	Vert
12	9619.120M Ave	26.4	+0.0 +0.0 +6.2	+0.0 +0.7 -34.0	+0.0 +0.0 +37.5	+0.0 +0.0 +2.6	+0.0	39.4	54.0	-14.6	Vert
^	9619.120M	34.1	+0.0 +0.0 +6.2	+0.0 +0.7 -34.0	+0.0 +0.0 +37.5	+0.0 +0.0 +2.6	+0.0	47.1	54.0	-6.9	Vert
14	9761.200M Ave	26.4	+0.0 +0.0 +6.3	+0.0 +0.5 -34.1	+0.0 +0.0 +37.6	+0.0 +0.0 +2.6	+0.0	39.3	54.0	-14.7	Vert
^	9761.200M	34.1	+0.0 +0.0 +6.3	+0.0 +0.5 -34.1	+0.0 +0.0 +37.6	+0.0 +0.0 +2.6	+0.0	47.0	54.0	-7.0	Vert
16	7440.840M Ave	27.0	+0.0 +0.0 +5.5	+0.0 +1.1 -34.8	+0.0 +0.0 +36.8	+0.0 +0.0 +2.2	+0.0	37.8	54.0	-16.2	Vert
^	7440.840M	38.1	+0.0 +0.0 +5.5	+0.0 +1.1 -34.8	+0.0 +0.0 +36.8	+0.0 +0.0 +2.2	+0.0	48.9	54.0	-5.1	Vert
18	7321.200M Ave	26.9	+0.0 +0.0 +5.4	+0.0 +0.9 -34.6	+0.0 +0.0 +36.5	+0.0 +0.0 +2.1	+0.0	37.2	54.0	-16.8	Vert
^	7321.200M	36.3	+0.0 +0.0 +5.4	+0.0 +0.9 -34.6	+0.0 +0.0 +36.5	+0.0 +0.0 +2.1	+0.0	46.6	54.0	-7.4	Vert
20	7213.910M Ave	26.6	+0.0 +0.0 +5.3	+0.0 +0.8 -34.5	+0.0 +0.0 +36.2	+0.0 +0.0 +2.1	+0.0	36.5	54.0	-17.5	Vert
^	7213.910M	35.8	+0.0 +0.0 +5.3	+0.0 +0.8 -34.5	+0.0 +0.0 +36.2	+0.0 +0.0 +2.1	+0.0	45.7	54.0	-8.3	Vert
22	38.700M	30.0	-27.9 +0.3 +0.0	+11.1 +0.1 +0.0	+5.9 +0.0 +0.0	+0.3 +0.0 +0.0	+0.0	19.8	40.0	-20.2	Horiz
23	4808.740M Ave	27.2	+0.0 +0.0 +4.1	+0.0 +0.5 -33.3	+0.0 +0.0 +32.3	+0.0 +0.0 +1.5	+0.0	32.3	54.0	-21.7	Vert
^	4808.740M	39.9	+0.0 +0.0 +4.1	+0.0 +0.5 -33.3	+0.0 +0.0 +32.3	+0.0 +0.0 +1.5	+0.0	45.0	54.0	-9.0	Vert
25	280.300M	29.8	-27.0 +1.0 +0.0	+12.5 +0.2 +0.0	+5.9 +0.0 +0.0	+0.8 +0.0 +0.0	+0.0	23.2	46.0	-22.8	Horiz



26	4956.903M Ave	25.6	+0.0 +0.0 +4.2	+0.0 +0.5 -33.5	+0.0 +0.0 +32.5	+0.0 +0.0 +1.6	+0.0 +0.0	30.9	54.0	-23.1	Vert
27	4881.580M Ave	25.6	+0.0 +0.0 +4.2	+0.0 +0.5 -33.4	+0.0 +0.0 +32.4	+0.0 +0.0 +1.6	+0.0 +0.0	30.9	54.0	-23.1	Vert
^	4881.580M	36.3	+0.0 +0.0 +4.2	+0.0 +0.5 -33.4	+0.0 +0.0 +32.4	+0.0 +0.0 +1.6	+0.0 +0.0	41.6	54.0	-12.4	Vert
29	46.500M	29.8	-27.9 +0.4 +0.0	+7.6 +0.1 +0.0	+5.9 +0.0 +0.0	+0.4 +0.0 +0.0	+0.0	16.3	40.0	-23.7	Vert
30	103.700M	30.2	-27.7 +0.6 +0.0	+8.2 +0.1 +0.0	+5.9 +0.0 +0.0	+0.5 +0.0 +0.0	+0.0	17.8	43.5	-25.7	Vert
31	1.075M	30.5	+0.0 +0.0 +0.0	+0.0 +0.0 +0.0	+0.0 +0.0 +0.0	+0.0 +9.9 +0.0	-40.0	0.4	26.9	-26.5	Perp
32	2.986M	22.1	+0.0 +0.0 +0.1	+0.0 +0.0 +0.0	+0.0 +0.0 +0.0	+0.0 +9.6 +0.0	-40.0	-8.2	29.5	-37.7	Perp
33	12.956M	16.3	+0.0 +0.0 +0.2	+0.0 +0.0 +0.0	+0.0 +0.0 +0.0	+0.0 +9.1 +0.0	-40.0	-14.4	29.5	-43.9	Perp
34	29.104M	19.0	+0.0 +0.0 +0.3	+0.0 +0.1 +0.0	+0.0 +0.0 +0.0	+0.0 +5.8 +0.0	-40.0	-14.8	29.5	-44.3	Para
35	27.851M	18.5	+0.0 +0.0 +0.3	+0.0 +0.1 +0.0	+0.0 +0.0 +0.0	+0.0 +6.2 +0.0	-40.0	-14.9	29.5	-44.4	Para
36	98.958k	36.7	+0.0 +0.0 +0.0	+0.0 +0.0 +0.0	+0.0 +0.0 +0.0	+0.0 +9.7 +0.0	-80.0	-33.6	27.7	-61.3	Para
37	56.940k	40.8	+0.0 +0.0 +0.0	+0.0 +0.0 +0.0	+0.0 +0.0 +0.0	+0.0 +9.8 +0.0	-80.0	-29.4	32.5	-61.9	Para
38	49.326k	40.7	+0.0 +0.0 +0.0	+0.0 +0.0 +0.0	+0.0 +0.0 +0.0	+0.0 +10.2 +0.0	-80.0	-29.1	33.7	-62.8	Perp
39	30.291k	44.1	+0.0 +0.0 +0.0	+0.0 +0.0 +0.0	+0.0 +0.0 +0.0	+0.0 +11.0 +0.0	-80.0	-24.9	38.0	-62.9	Para



Band Edge

Band Edge Summary

Frequency (MHz)	Modulation	Ant. Type	Field Strength (dBuV/m @3m)	Limit (dBuV/m @3m)	Results
2390.0	OQPSK	Patch	27.3	<54	Pass
2400.0	OQPSK	Patch	37.7	<72.8	Pass
2483.5	OQPSK	Patch	46.1	<54	Pass

Band Edge Plots

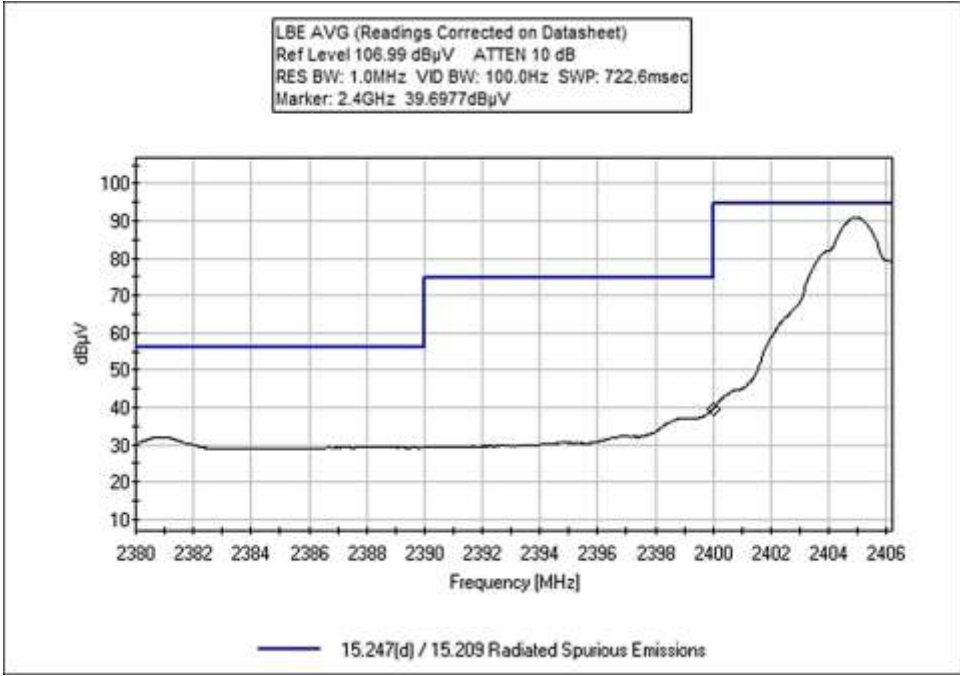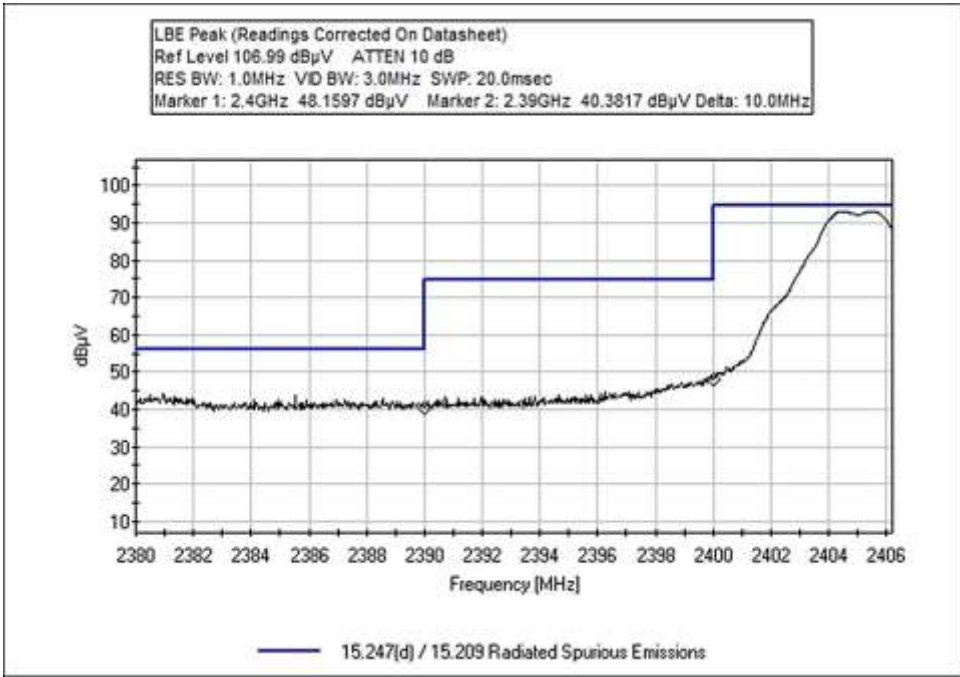

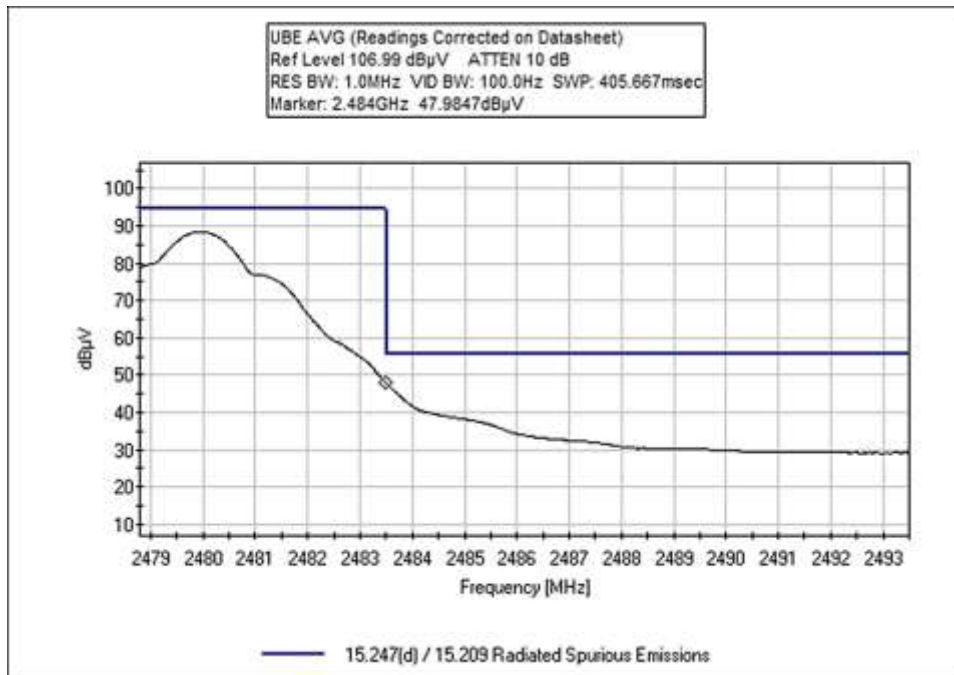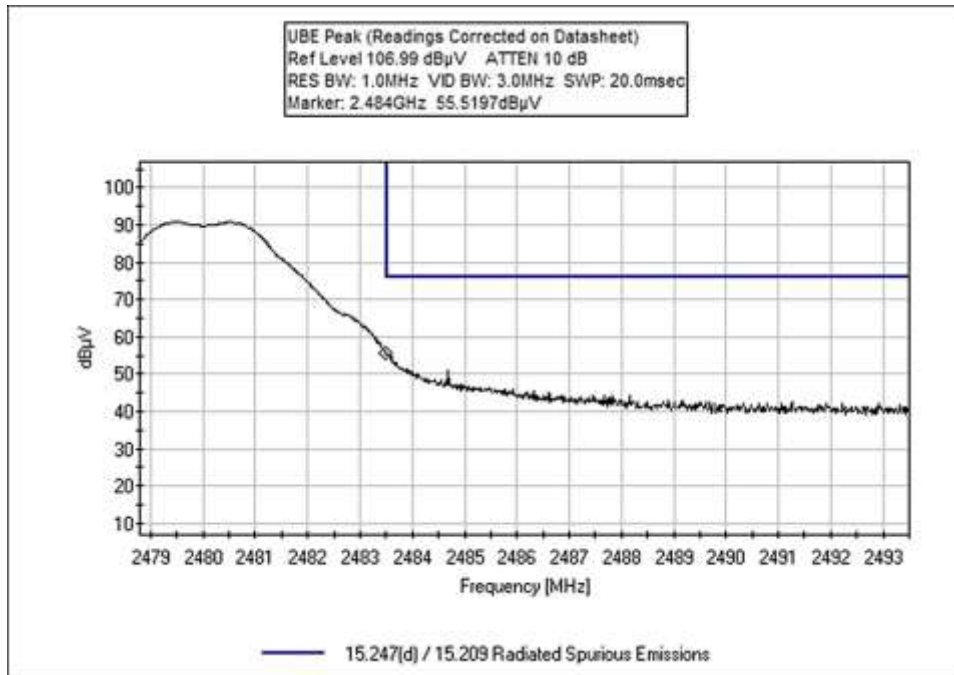

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC
 Customer: **Ossia, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **102446** Date: 4/8/2019
 Test Type: **Radiated Scan** Time: 10:16:52
 Tested By: Matthew Harrison Sequence#: 14
 Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Temperature: 20-21°C
 Atmospheric Pressure: 101.8kPa
 Relative Humidity: 35%
 Frequency: 2440-2460MHz

 Test Method: ANSI 63.10 (2013),), KDB 558074 v05r02

 The EUT is investigated in Low, Middle, and High Channels, X, Y, & Z Axis with only the worst case reported.
 Vertical and Horizontal polarities investigated

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06540	Cable	Heliac	10/30/2017	10/30/2019
T2	AN02871	Spectrum Analyzer	E4440A	1/9/2019	1/9/2021
T3	ANP06515	Cable	Heliac	6/29/2018	6/29/2020
T4	AN03540	Preamp	83017A	3/25/2019	3/25/2021
T5	AN01467	Horn Antenna- ANSI C63.5 Calibration	3115	7/21/2017	7/21/2019
T6	ANP06503	Cable	32026-29801- 29801-36	3/13/2018	3/13/2020

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 T5 dB	T2 T6 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	2483.500M Ave	48.0	+0.4 +28.1	+0.0 +1.0	+2.7	-34.1	+0.0	46.1	54.0	-7.9	Vert
^	2483.500M	55.5	+0.4 +28.1	+0.0 +1.0	+2.7	-34.1	+0.0	53.6	74.0	-20.4	Vert
3	2390.000M Ave	29.3	+0.4 +28.1	+0.0 +1.0	+2.6	-34.1	+0.0	27.3	54.0	-26.7	Vert
^	2390.000M	40.4	+0.4 +28.1	+0.0 +1.0	+2.6	-34.1	+0.0	38.4	74.0	-35.6	Vert
5	2400.000M Ave	39.7	+0.4 +28.1	+0.0 +1.0	+2.6	-34.1	+0.0	37.7	72.8	-35.1	Vert
^	2400.000M	48.2	+0.4 +28.1	+0.0 +1.0	+2.6	-34.1	+0.0	46.2	97.0	-50.8	Vert


Test Setup Photo(s)

Below 1GHz



Above 1GHz



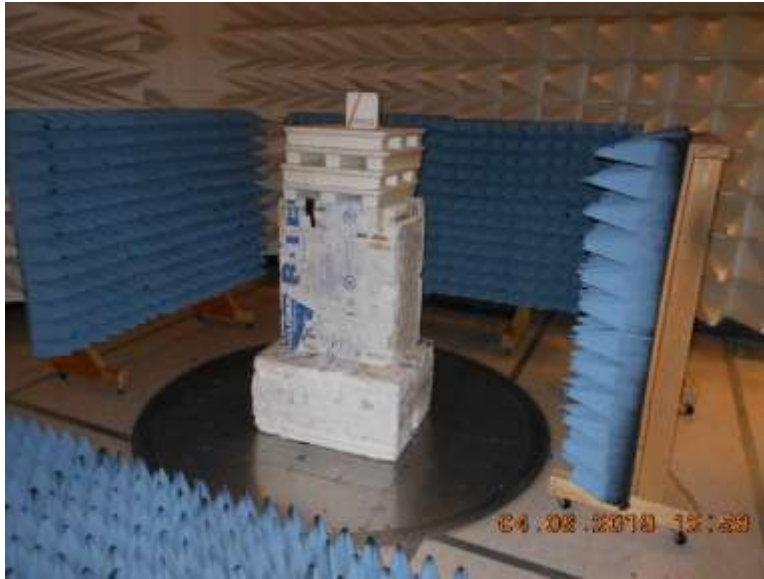



X-Axis



Y-Axis



Z-Axis

SUPPLEMENTAL INFORMATION

Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Uncertainties reported are worst case for all CKC Laboratories' sites and represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2. Compliance is deemed to occur provided measurements are below the specified limits.

Emissions Test Details

TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dBµV/m, the spectrum analyzer reading in dBµV was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

SAMPLE CALCULATIONS		
	Meter reading	(dBµV)
+	Antenna Factor	(dB/m)
+	Cable Loss	(dB)
-	Distance Correction	(dB)
-	Preamplifier Gain	(dB)
=	Corrected Reading	(dBµV/m)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point, the measuring device is set into the linear mode and the scan time is reduced.