

2450MHz CW

Frequency: 2450 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³


DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1547; Calibrated: 5/15/2020
- Probe: EF3DV3 - SN4028; ConvF(1, 1, 1) @ 2450 MHz; Calibrated: 7/12/2019
- Sensor-Surface: 0mm (Fix Surface)
- Phantom: Freespace RF; ;

E Field/2450MHz CW _1m distance/83.5cm height/5cm Transmitter Horizontal Plane

Boresight/Full (34x32x1): Measurement grid: dx=30mm, dy=30mm, dz=1mm

Maximum value of Total (measured) = 184.2 V/m

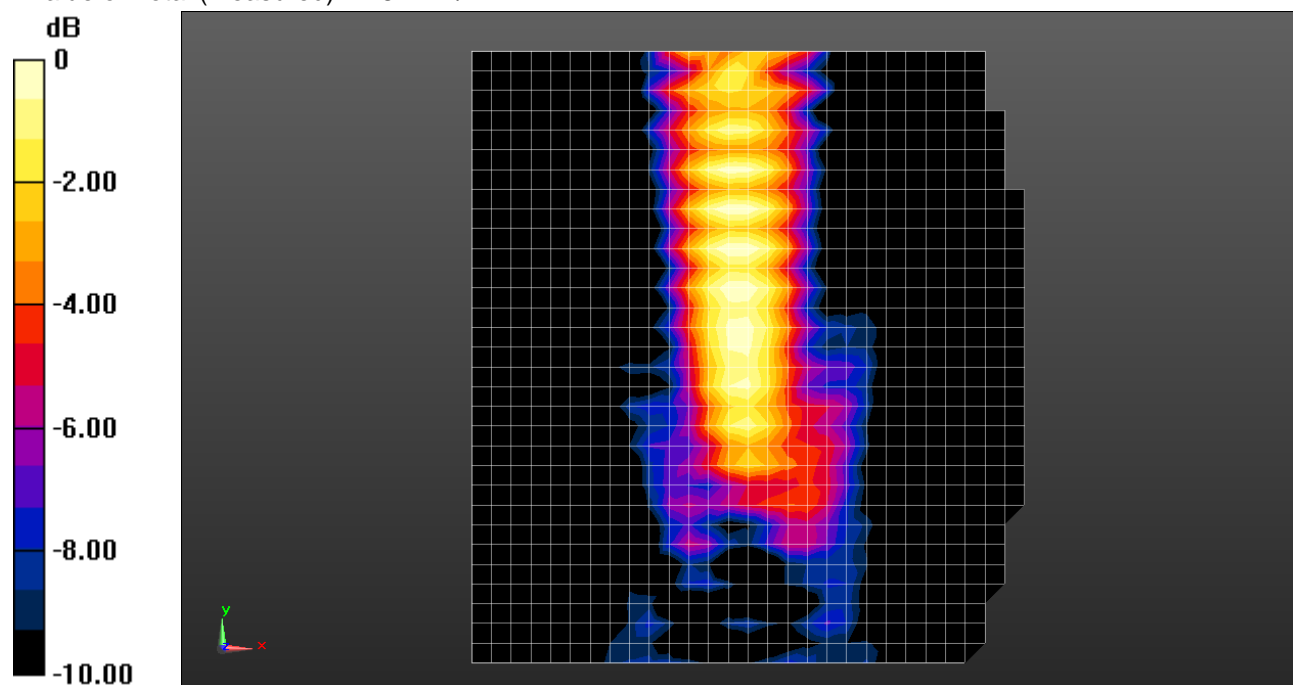

0 dB = 184.2 V/m = 45.31 dBV/m

2450MHz CW

Frequency: 2450 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³


DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1547; Calibrated: 5/15/2020
- Probe: EF3DV3 - SN4028; ConvF(1, 1, 1) @ 2450 MHz; Calibrated: 7/12/2019
- Sensor-Surface: 0mm (Fix Surface)
- Phantom: Freespace RF; ;

E Field/2450MHz CW _1m distance/83.5cm height/2.5cm Behind Client Horizontal Plane

Boresight/Full (34x17x1): Measurement grid: dx=30mm, dy=30mm, dz=1mm

Maximum value of Total (measured) = 71.09 V/m

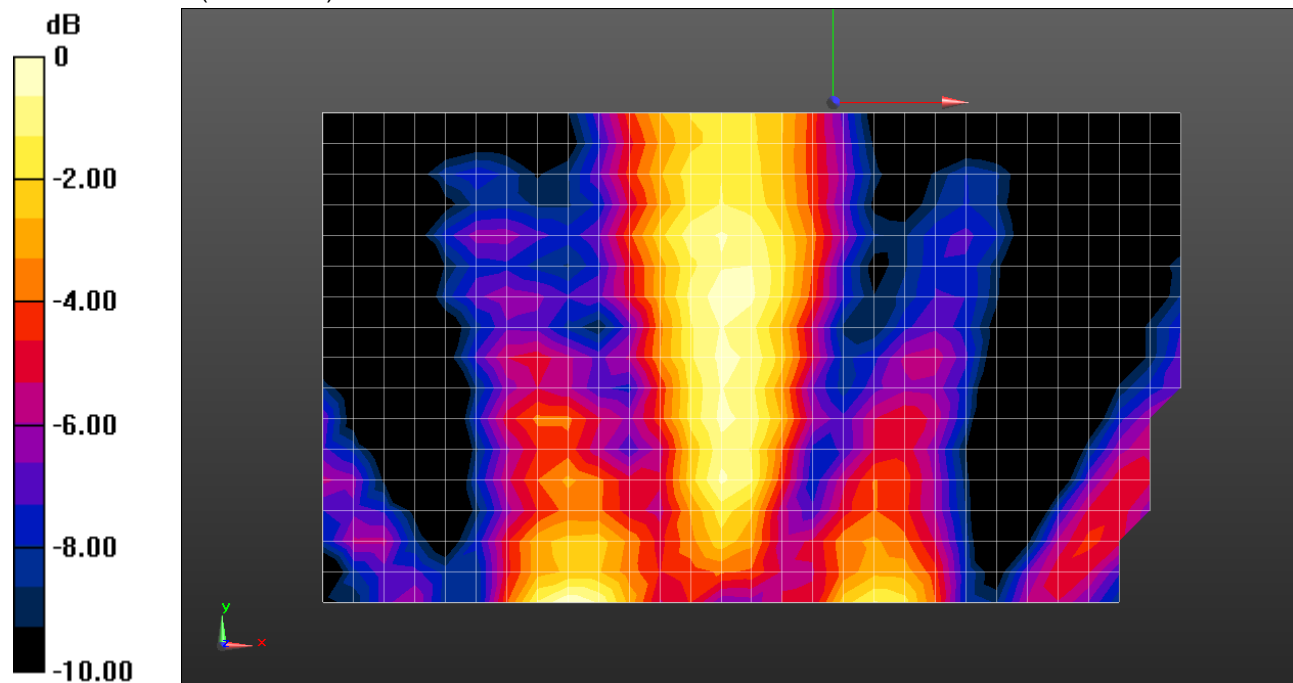

0 dB = 71.09 V/m = 37.04 dBV/m

2450MHz CW

Frequency: 2450 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³


DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1547; Calibrated: 5/15/2020
- Probe: EF3DV3 - SN4028; ConvF(1, 1, 1) @ 2450 MHz; Calibrated: 7/12/2019
- Sensor-Surface: 0mm (Fix Surface)
- Phantom: Freespace RF; ;

E Field/2450MHz CW _1m distance/83.5cm height/2.5cm Behind Client Horizontal Plane

Boresight/Full (34x17x1): Measurement grid: dx=30mm, dy=30mm, dz=1mm

Maximum value of Total (measured) = 71.09 V/m

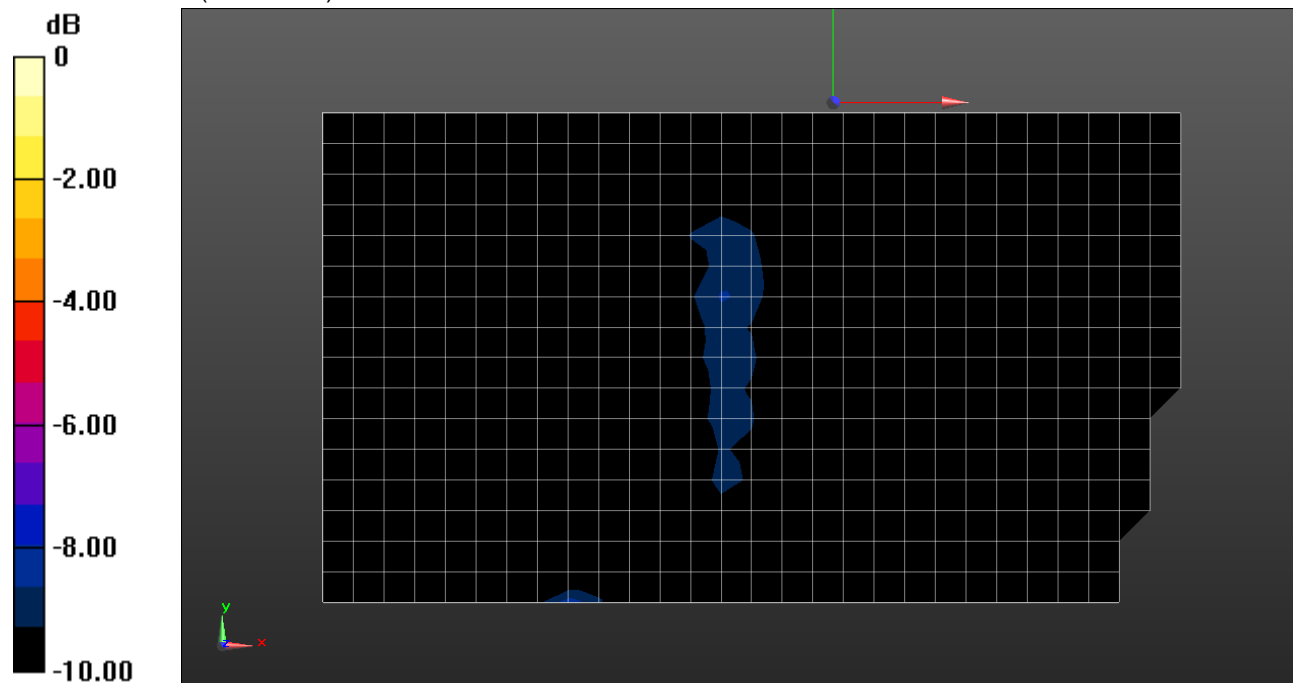

0 dB = 184.2 V/m = 45.31 dBV/m

2450MHz CW

Frequency: 2450 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³


DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1547; Calibrated: 5/15/2020
- Probe: EF3DV3 - SN4028; ConvF(1, 1, 1) @ 2450 MHz; Calibrated: 7/12/2019
- Sensor-Surface: 0mm (Fix Surface)
- Phantom: Freespace RF; ;

E Field/2450MHz CW _1m distance/83.5cm height/5cm Transmitter Vertical Plane

Boresight/Full (34x32x1): Measurement grid: dx=30mm, dy=30mm, dz=1mm

Maximum value of Total (measured) = 189.5 V/m

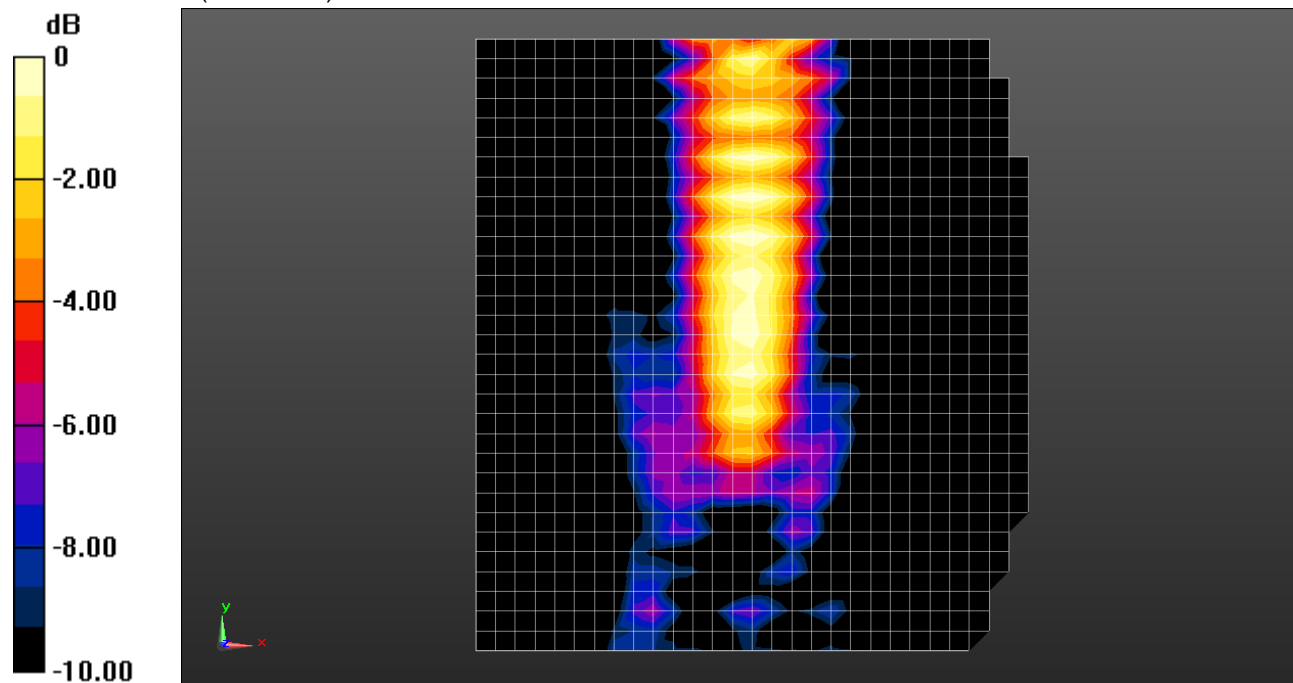

0 dB = 189.5 V/m = 45.55 dBV/m

2450MHz CW

Frequency: 2450 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³


DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1547; Calibrated: 5/15/2020
- Probe: EF3DV3 - SN4028; ConvF(1, 1, 1) @ 2450 MHz; Calibrated: 7/12/2019
- Sensor-Surface: 0mm (Fix Surface)
- Phantom: Freespace RF; ;

E Field/2450MHz CW _1m distance/83.5cm height/2.5cm Behind Client Vertical Plane

Boresight/Full (34x17x1): Measurement grid: dx=30mm, dy=30mm, dz=1mm

Maximum value of Total (measured) = 72.68 V/m

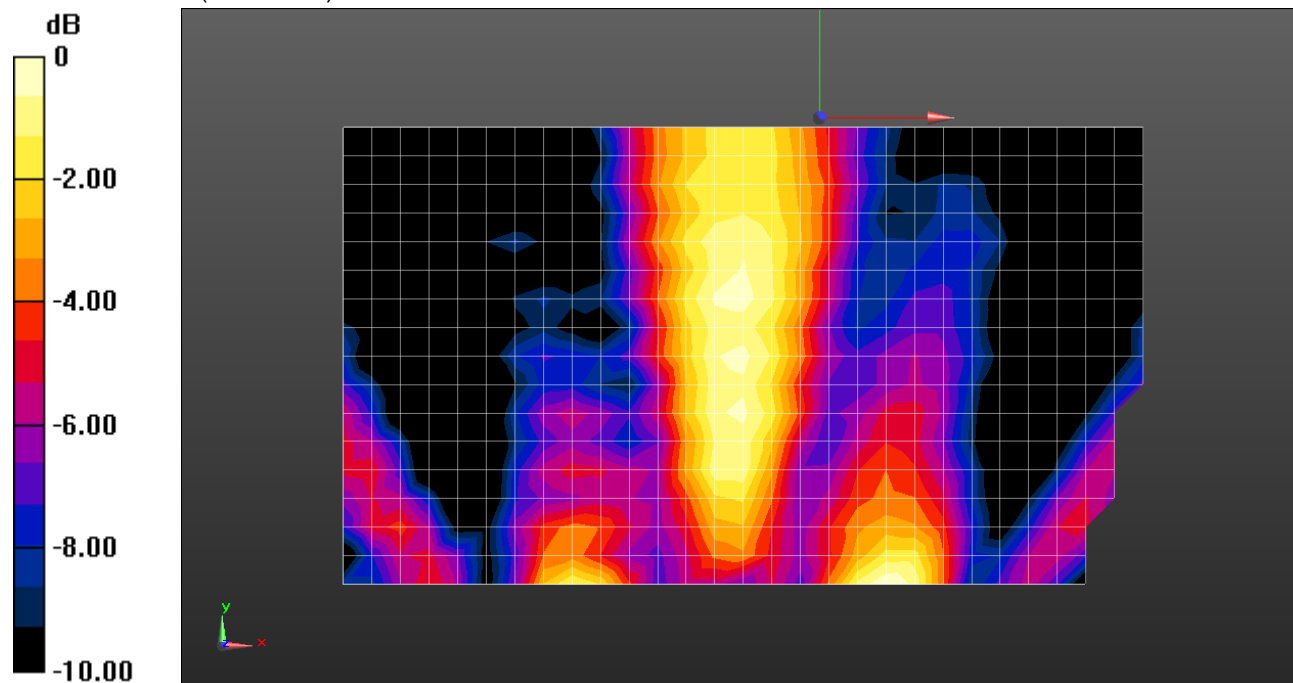

0 dB = 72.68 V/m = 37.23 dBV/m

2450MHz CW

Frequency: 2450 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³


DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1547; Calibrated: 5/15/2020
- Probe: EF3DV3 - SN4028; ConvF(1, 1, 1) @ 2450 MHz; Calibrated: 7/12/2019
- Sensor-Surface: 0mm (Fix Surface)
- Phantom: Freespace RF; ;

E Field/2450MHz CW _1m distance/83.5cm height/2.5cm Behind Client Vertical Plane

Boresight/Full (34x17x1): Measurement grid: dx=30mm, dy=30mm, dz=1mm

Maximum value of Total (measured) = 72.68 V/m

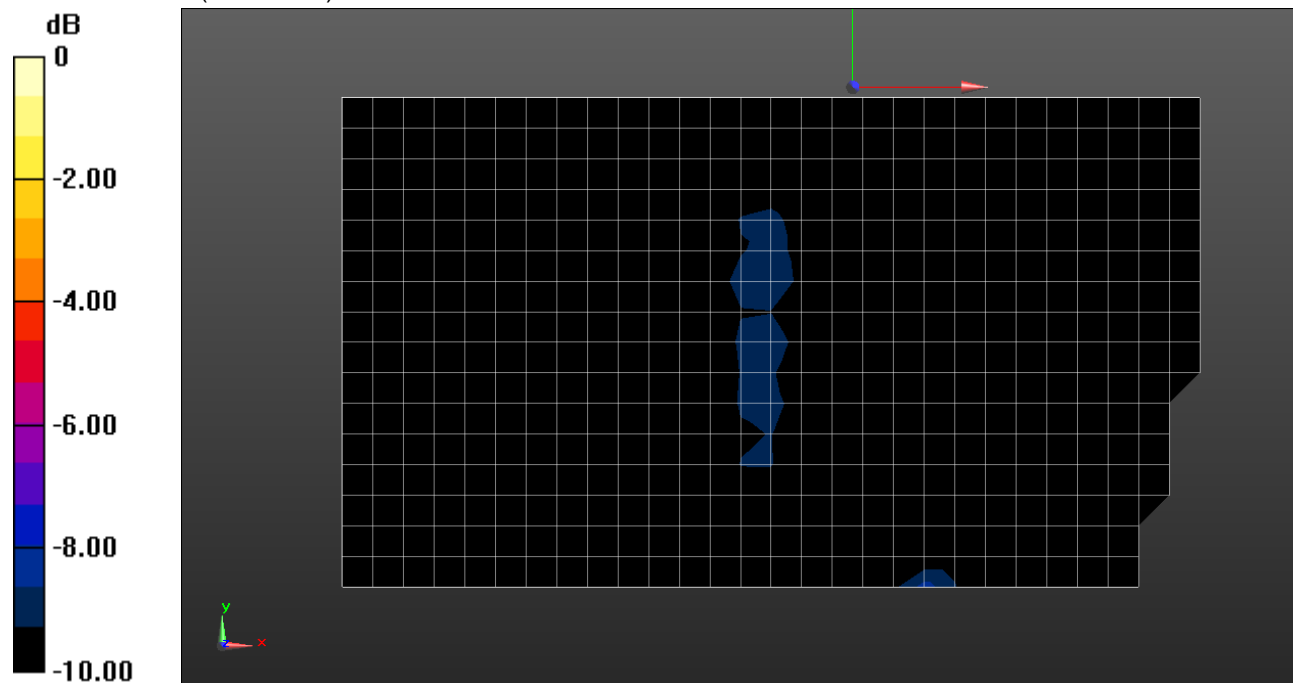

0 dB = 189.5 V/m = 45.55 dBV/m

2450MHz CW

Frequency: 2450 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

DASY5 Configuration:


- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1547; Calibrated: 5/15/2020
- Probe: EF3DV3 - SN4028; ConvF(1, 1, 1) @ 2450 MHz; Calibrated: 7/12/2019
- Sensor-Surface: 0mm (Fix Surface)
- Phantom: Freespace RF; ;

**E Field w_ Obstruction/2450MHz CW _0.5m distance/83.5cm height/20cm Transmitter
 0cm to Client/ Offset 22.5cm/Edge 1 (34x3x1):** Measurement grid: dx=30mm, dy=30mm, dz=1mm
 Maximum value of Total (measured) = 87.48 V/m

**E Field w_ Obstruction/2450MHz CW _0.5m distance/83.5cm height/20cm Transmitter
 0cm to Client/ Offset 22.5cm/Edge 2 (34x3x1):** Measurement grid: dx=30mm, dy=30mm, dz=1mm
 Maximum value of Total (measured) = 88.79 V/m

**E Field w_ Obstruction/2450MHz CW _0.5m distance/83.5cm height/20cm Transmitter
 0cm to Client/ Offset 22.5cm/Edge 3 (8x11x1):** Measurement grid: dx=30mm, dy=30mm, dz=1mm
 Maximum value of Total (measured) = 62.15 V/m

**E Field w_ Obstruction/2450MHz CW _0.5m distance/83.5cm height/20cm Transmitter
 0cm to Client/ Offset 22.5cm/Edge 4 (10x11x1):** Measurement grid: dx=30mm, dy=30mm, dz=1mm
 Maximum value of Total (measured) = 173.2 V/m

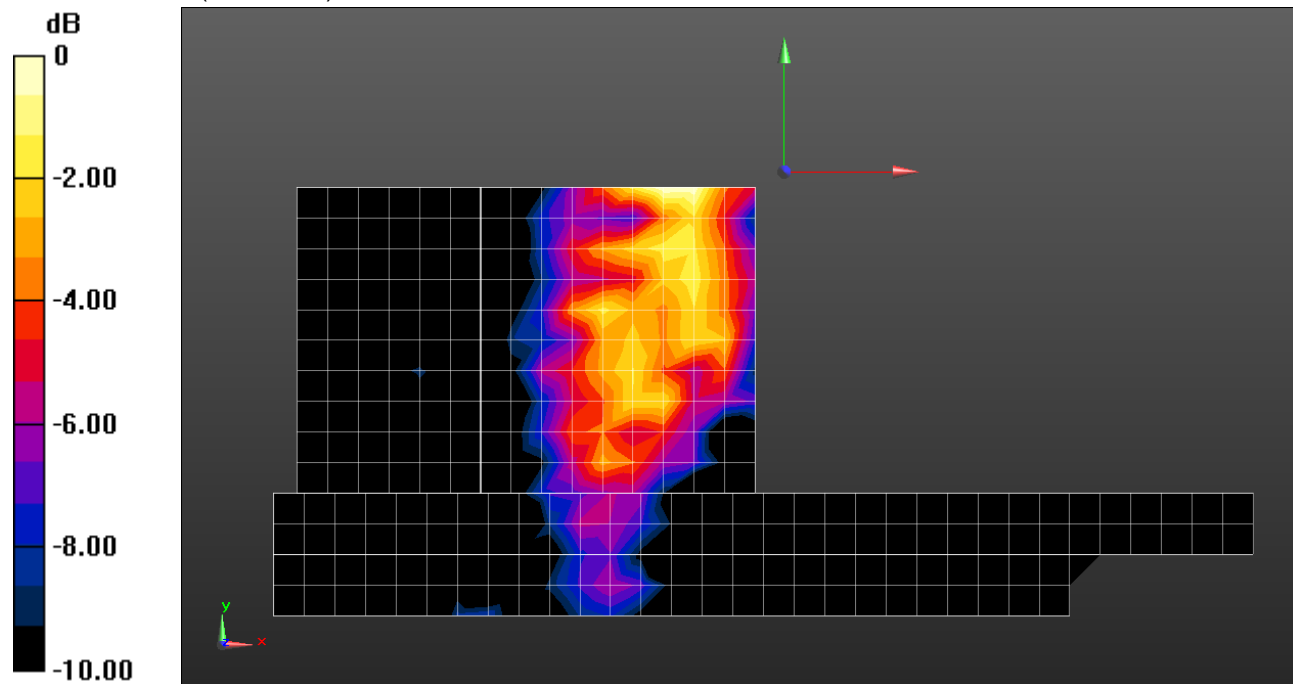

0 dB = 173.2 V/m = 44.77 dBV/m