

# FCC TEST REPORT

Client Name : China Etech Groups Ltd

Address : 16/F, Block C, 2nd Phase of Central Avenue, Haihong Industrial Area, Xixiang Road, Baoan, Shenzhen, China

Product Name : Wireless Charger

Date : Aug. 11, 2020



**Shenzhen Anbotek Compliance Laboratory Limited**

# Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. Description Of Test Setup.....	6
1.6. Test Equipment List.....	7
1.7. Measurement Uncertainty.....	8
1.8. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	17
5. Antenna Requirement.....	21
5.1. Test Standard and Requirement.....	21
5.2. Antenna Connected Construction.....	21
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	22
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	24
APPENDIX III -- INTERNAL PHOTOGRAPH.....	28



# TEST REPORT


Applicant : China Etech Groups Ltd  
Manufacturer : China Etech Groups Ltd  
Product Name : Wireless Charger  
Model No. : 035-7369-0, CTC-QIS05, E-QI-20630-A  
Trade Mark : N.A.  
Input: DC 5V/3A, 9V/2A  
Rating(s) : Wireless Output1: 5W, 7.5W, 10W  
Wireless Output2: 5W  
USB-A Output: DC 5V/1A  
**Test Standard(s) : FCC Part15 Subpart C 2019, Paragraph 15.209**  
**Test Method(s) : ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt Jul. 16, 2020  
Date of Test Jul. 16~27, 2020

Prepared By




(Engineer / Dolly Mo)

Reviewer



(Supervisor / Bibo Zhang)

Approved & Authorized Signer



(Manager / Tom Chen)

## 1. General Information

### 1.1. Client Information

Applicant	:	China Etech Groups Ltd
Address	:	16/F, Block C, 2nd Phase of Central Avenue, Haihong Industrial Area, Xixiang Road, Baoan, Shenzhen, China
Manufacturer	:	China Etech Groups Ltd
Address	:	16/F, Block C, 2nd Phase of Central Avenue, Haihong Industrial Area, Xixiang Road, Baoan, Shenzhen, China
Factory	:	China Etech Groups Ltd
Address	:	16/F, Block C, 2nd Phase of Central Avenue, Haihong Industrial Area, Xixiang Road, Baoan, Shenzhen, China

### 1.2. Description of Device (EUT)

Product Name	:	Wireless Charger	
Model No.	:	035-7369-0, CTC-QIS05, E-QI-20630-A (Note: All samples are the same except the model name, so we prepare "035-7369-0" for test only.)	
Trade Mark	:	N.A.	
Test Power Supply	:	AC 120V, 60Hz for adapter / AC 240V, 60Hz for adapter	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-1(Engineering Sample)	
Product Description	:	Operation Frequency:	110.1-205KHz
		Modulation Type:	FSK
		Antenna Type:	Inductive loop coil Antenna
		Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

### 1.3. Auxiliary Equipment Used During Test

Adapter	:	Manufacturer: Anker Innovations Limited
		M/N: A2013 Input: 100-240V~50-60Hz Output: 3.6-6.5V---3A/ 6.5-9V---2A/ 9-12V---1.5A
Apple AirPods	:	Manufacturer: Apple
Phone	:	Manufacturer:SAMSUNG M/N: Galaxy S10+(SM-G9750)

### 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Full load, wireless charger module

For Conducted Emission	
Final Test Mode	Description
Mode 1	Full load, wireless charger module



For Radiated Emission	
Final Test Mode	Description
Mode 1	Full load, wireless charger module

Note: (1)Test channel is 0.1150MHz.

(2)All the situation(full load, half load and empty load) has been tested,only the worst situation (full load) was recorded in the report.

(3)All the conditions have been tested. It is found that Wireless Output1(10W) and Wireless Output2(5W) work simultaneously is the worst mode, and the data in the report only reflects the worst mode.

## 1.5. Description Of Test Setup

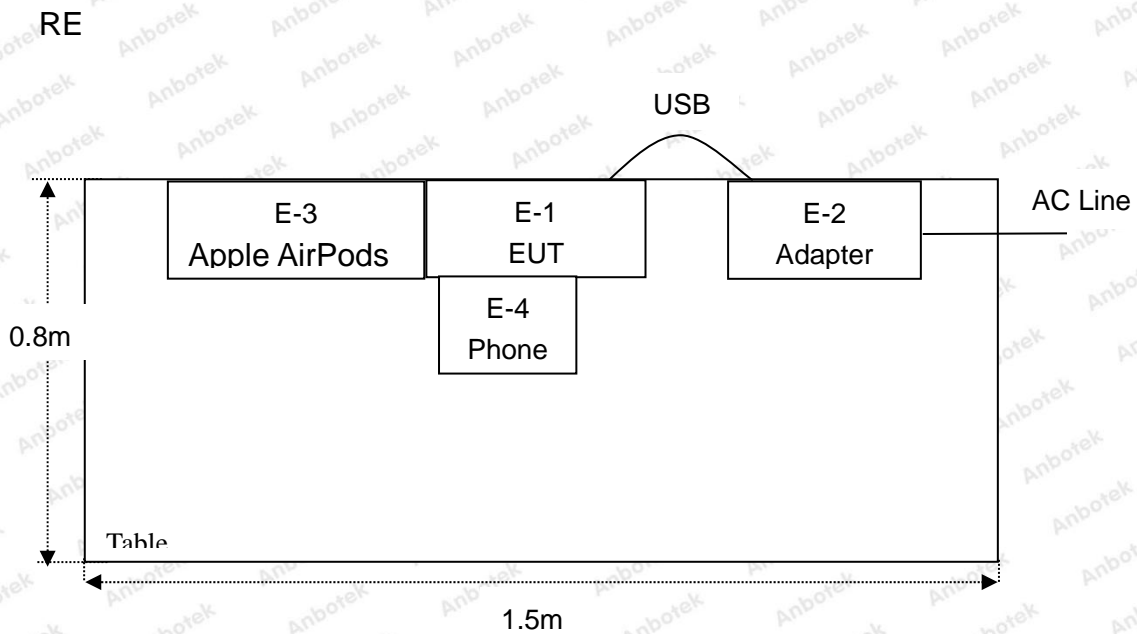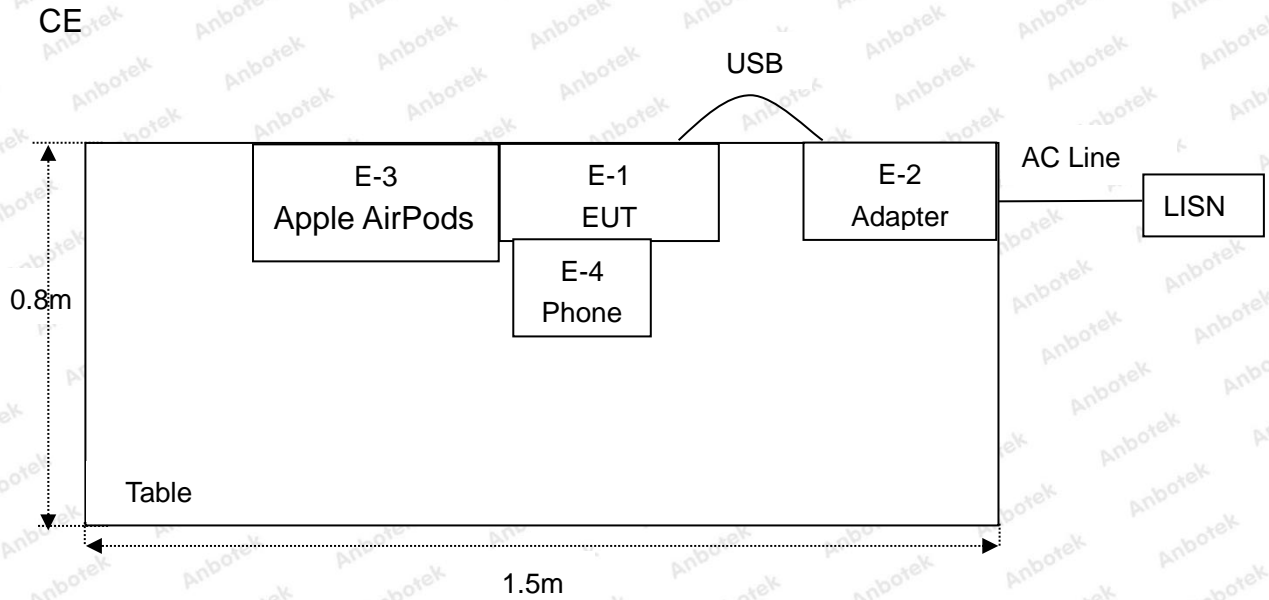

## 1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 04, 2019	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Nov. 04, 2019	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 04, 2019	1 Year
4.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 04, 2019	1 Year
5.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Nov. 04, 2019	1 Year
6.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 01, 2019	1 Year
7.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 01, 2019	1 Year
8.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 01, 2019	1 Year
9.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Nov. 01, 2019	1 Year
10.	Pre-amplifier	SONOMA	310N	186860	Nov. 04, 2019	1 Year
11.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 04, 2019	1 Year
13.	Power Sensor	DAER	RPR3006W	15100041SN045	Nov. 04, 2019	1 Year
14.	Power Sensor	DAER	RPR3006W	15100041SN046	Nov. 04, 2019	1 Year
15.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 04, 2019	1 Year
16.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 04, 2019	1 Year
17.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 04, 2019	1 Year
18.	DC Power Supply	LW	TPR-6420D	374470	Nov. 04, 2019	1 Year
19.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Nov. 04, 2019	1 Year

### 1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

### 1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 27, 2019.

#### ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, March 07, 2019.

#### Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



## 2. Summary of Test Results

Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS
Part 15.203	Antenna Requirement	PASS


## 3. Conducted Emission Test

### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

**Remark:** (1) \*Decreasing linearly with logarithm of the frequency.  
 (2) The lower limit shall apply at the transition frequency.

### 3.2. Test Setup

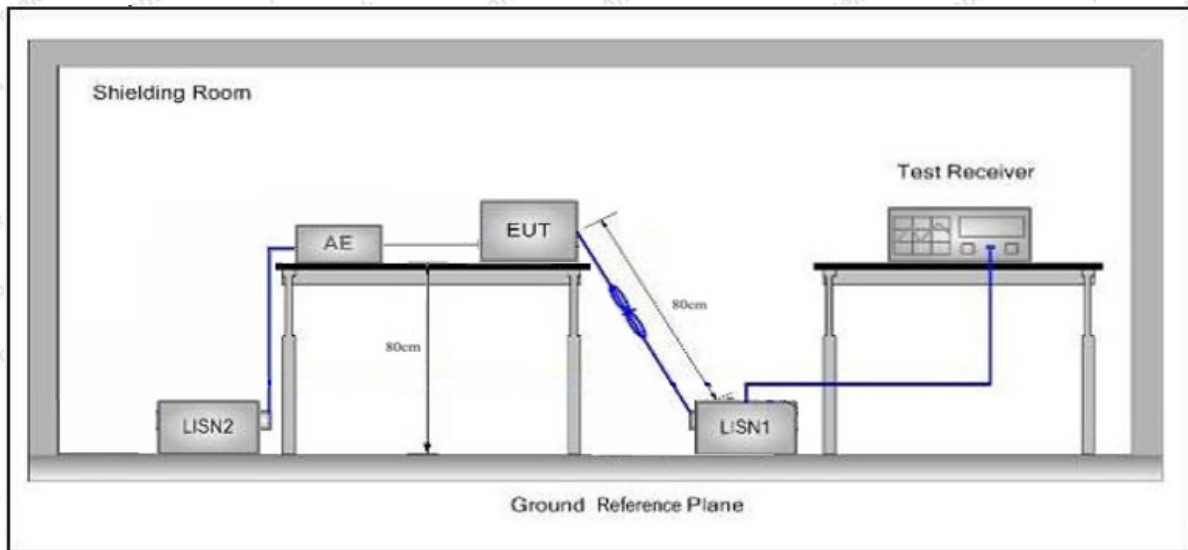

### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

### 3.4. Test Data

Please to see the following pages

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 23.5°C Hum.: 55%

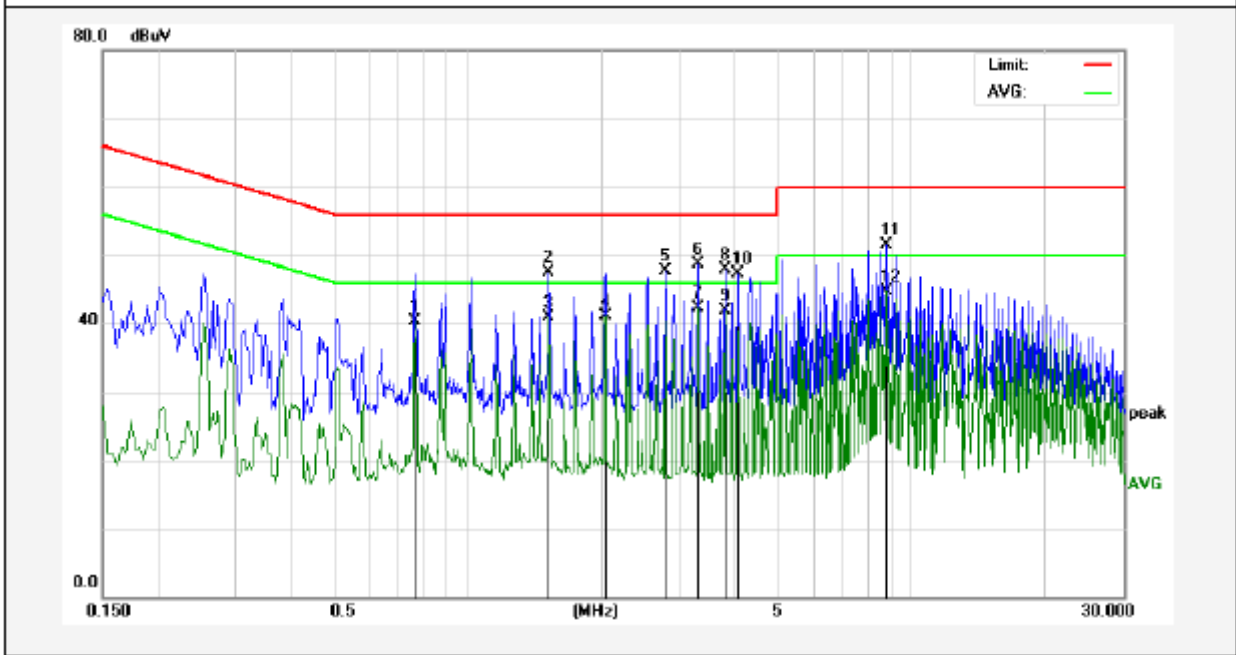

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.7620	20.21	20.06	40.27	46.00	-5.73	AVG	
2	1.5260	27.28	20.13	47.41	56.00	-8.59	QP	
3	1.5260	20.72	20.13	40.85	46.00	-5.15	AVG	
4	2.0340	20.99	20.14	41.13	46.00	-4.87	AVG	
5	2.7940	27.49	20.16	47.65	56.00	-8.35	QP	
6	3.3020	28.56	20.17	48.73	56.00	-7.27	QP	
7	3.3020	22.14	20.17	42.31	46.00	-3.69	AVG	
8	3.8100	27.76	20.18	47.94	56.00	-8.06	QP	
9	3.8100	21.71	20.18	41.89	46.00	-4.11	AVG	
10	4.0660	27.11	20.18	47.29	56.00	-8.71	QP	
11	8.7660	31.18	20.31	51.49	60.00	-8.51	QP	
12	8.7660	24.46	20.31	44.77	50.00	-5.23	AVG	

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 23.5°C Hum.: 55%

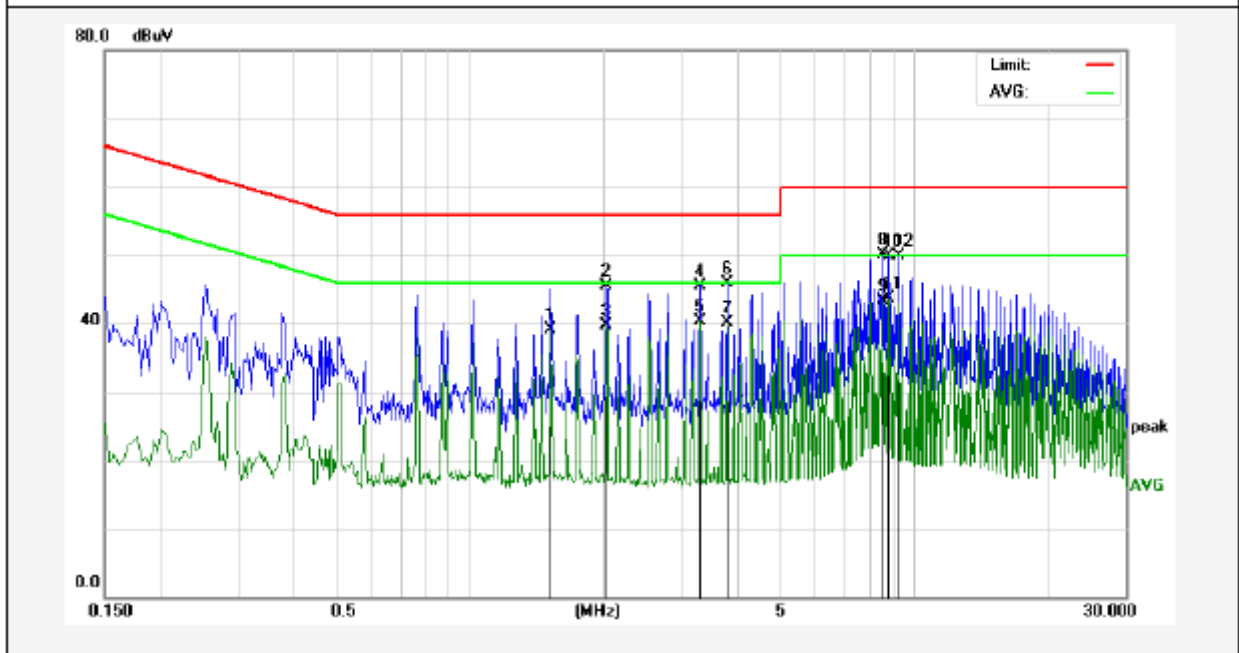

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	1.5220	18.99	20.13	39.12	46.00	-6.88	AVG	
2	2.0300	25.33	20.14	45.47	56.00	-10.53	QP	
3	2.0300	19.57	20.14	39.71	46.00	-6.29	AVG	
4	3.3020	25.43	20.17	45.60	56.00	-10.40	QP	
5	3.3020	20.08	20.17	40.25	46.00	-5.75	AVG	
6	3.8100	25.68	20.18	45.86	56.00	-10.14	QP	
7	3.8100	20.01	20.18	40.19	46.00	-5.81	AVG	
8	8.5060	29.78	20.30	50.08	60.00	-9.92	QP	
9	8.5060	23.10	20.30	43.40	50.00	-6.60	AVG	
10	8.7620	29.52	20.31	49.83	60.00	-10.17	QP	
11	8.7620	23.40	20.31	43.71	50.00	-6.29	AVG	
12	9.2700	29.65	20.32	49.97	60.00	-10.03	QP	

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 23.5°C Hum.: 55%

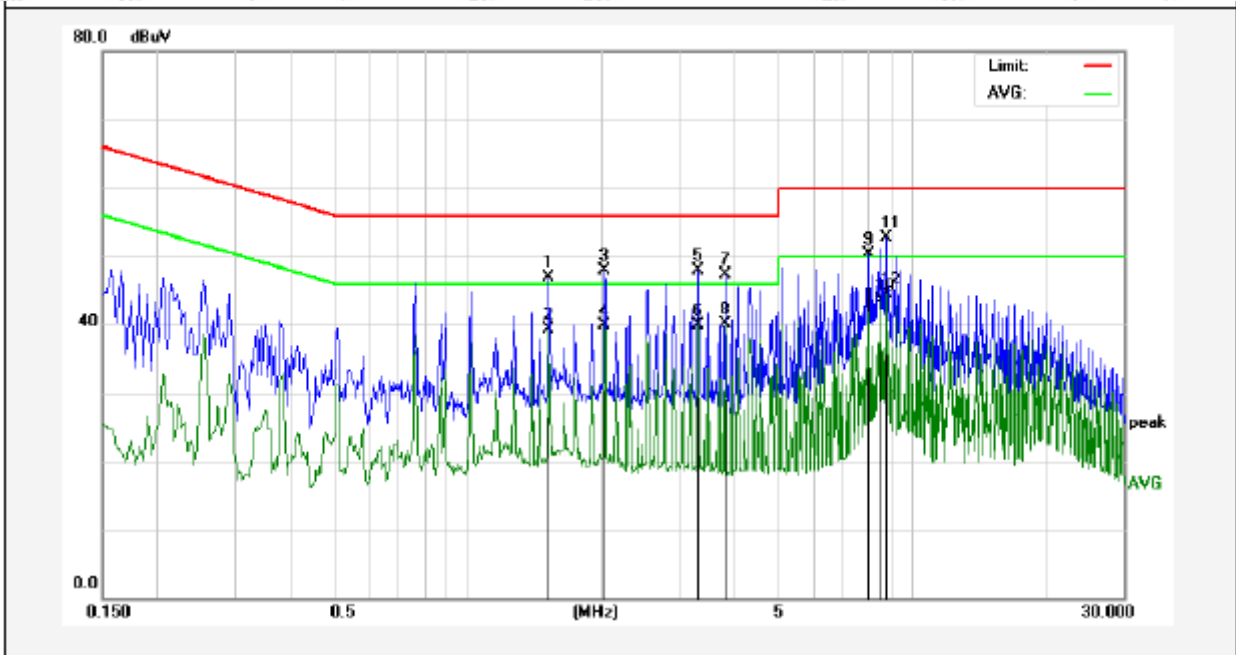

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	1.5220	26.81	20.13	46.94	56.00	-9.06	QP	
2	1.5220	19.23	20.13	39.36	46.00	-6.64	AVG	
3	2.0300	27.76	20.14	47.90	56.00	-8.10	QP	
4	2.0300	19.75	20.14	39.89	46.00	-6.11	AVG	
5	3.3020	27.66	20.17	47.83	56.00	-8.17	QP	
6	3.3020	19.72	20.17	39.89	46.00	-6.11	AVG	
7	3.8100	27.10	20.18	47.28	56.00	-8.72	QP	
8	3.8100	19.97	20.18	40.15	46.00	-5.85	AVG	
9	7.9980	30.08	20.29	50.37	60.00	-9.63	QP	
10	8.5060	23.23	20.30	43.53	50.00	-6.47	AVG	
11	8.7580	32.48	20.31	52.79	60.00	-7.21	QP	
12	8.7580	24.15	20.31	44.46	50.00	-5.54	AVG	

### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 23.5°C Hum.: 55%

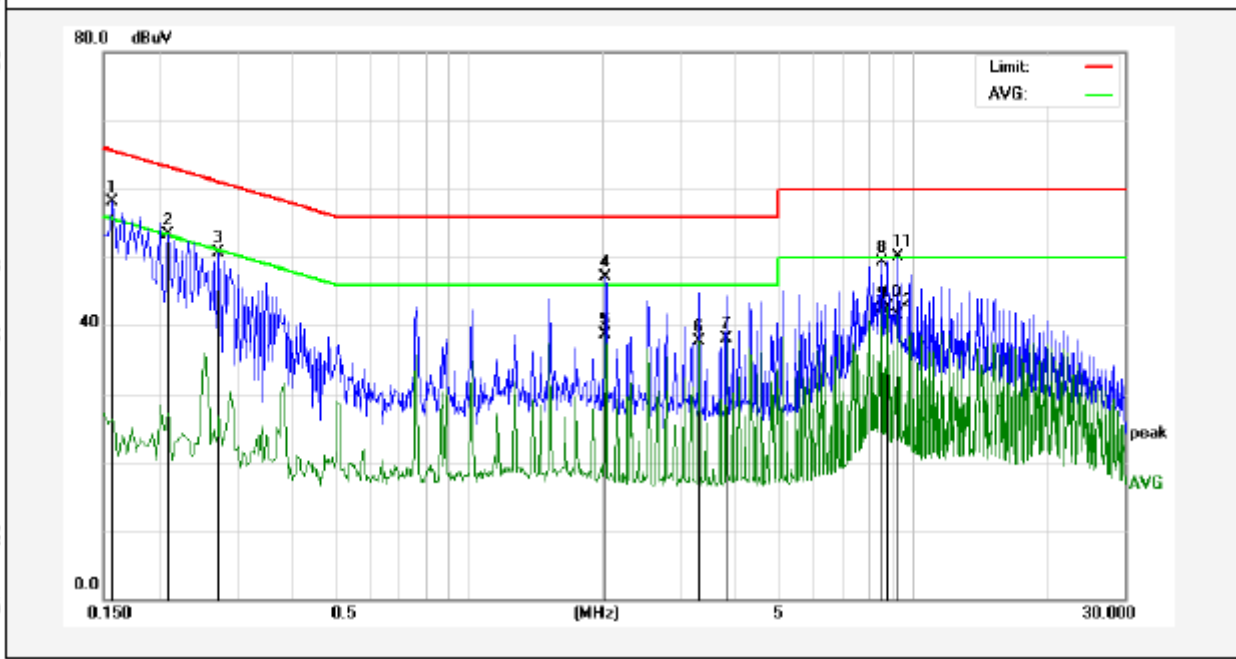

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1580	38.24	19.90	58.14	65.56	-7.42	QP	
2	0.2100	33.40	19.90	53.30	63.20	-9.90	QP	
3	0.2740	30.89	19.89	50.78	60.99	-10.21	QP	
4	2.0300	26.95	20.14	47.09	56.00	-8.91	QP	
5	2.0300	18.48	20.14	38.62	46.00	-7.38	AVG	
6	3.2980	17.48	20.17	37.65	46.00	-8.35	AVG	
7	3.8060	17.83	20.18	38.01	46.00	-7.99	AVG	
8	8.5020	29.01	20.30	49.31	60.00	-10.69	QP	
9	8.5020	22.28	20.30	42.58	50.00	-7.42	AVG	
10	8.7580	22.31	20.31	42.62	50.00	-7.38	AVG	
11	9.2660	29.74	20.32	50.06	60.00	-9.94	QP	
12	9.2660	21.22	20.32	41.54	50.00	-8.46	AVG	

## 4. Radiation Spurious Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 4.2. Test Setup

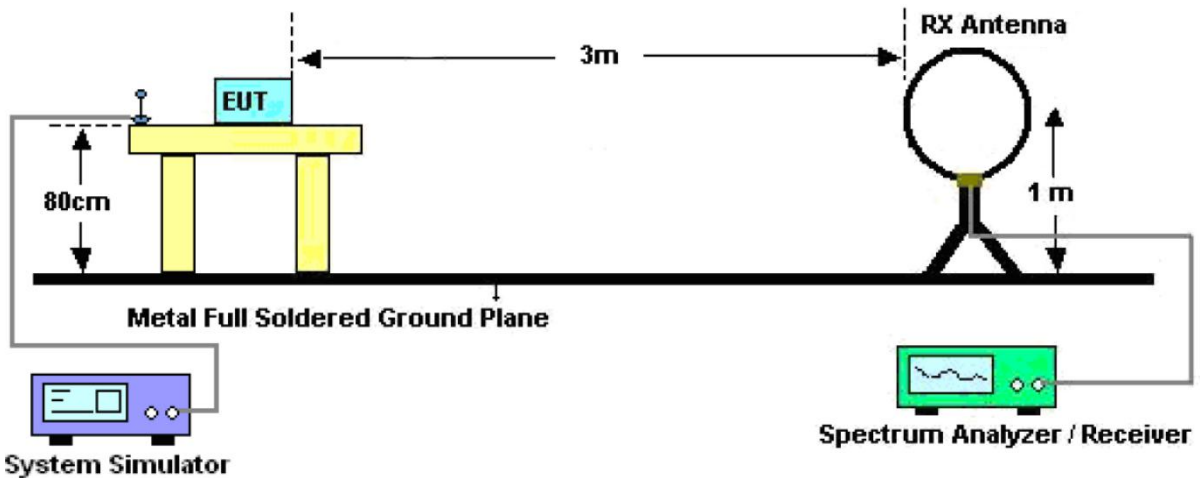


Figure 1. Below 30MHz

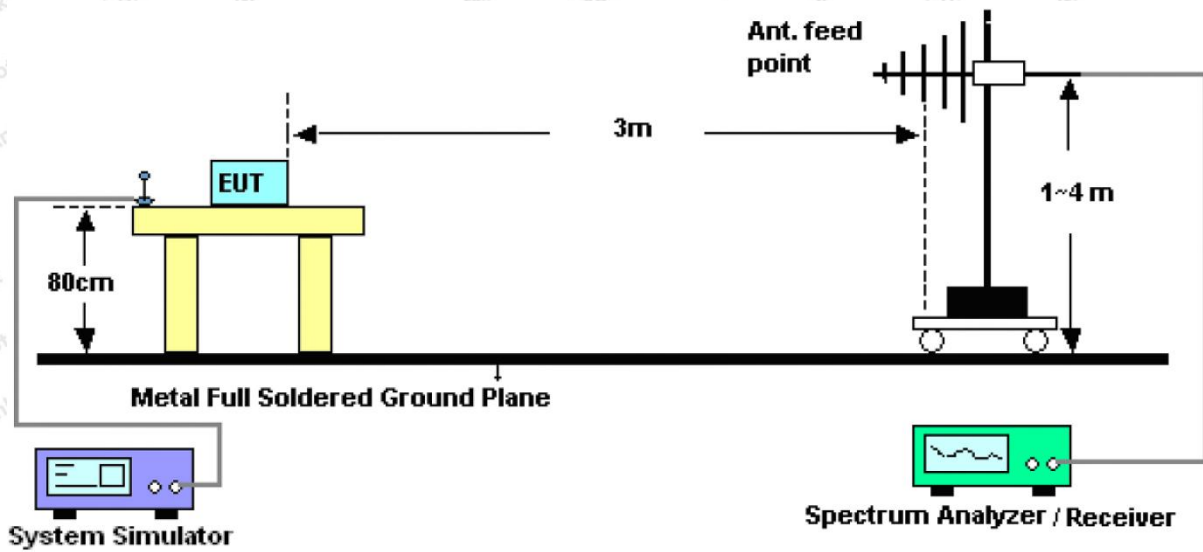


Figure 2. 30MHz to 1GHz

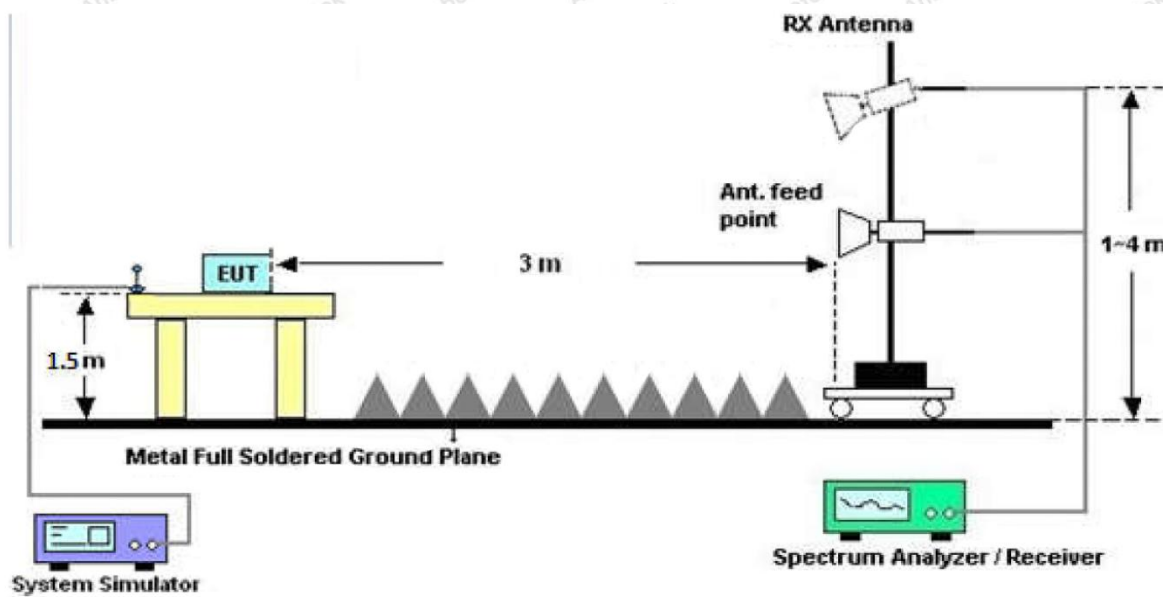


Figure 3. Above 1 GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.



For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW = 30kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.


#### 4.4. Test Data

**PASS**

Note: The data is in TX mode, and this is the worst mode.

**Test Results (9K~30MHz)**

Test Mode: Mode 1  
 Power Source: AC 120V, 60Hz for adapter  
 Temp.(°C)/Hum.(%RH): 23.2°C/50%RH  
 Distance: 3m

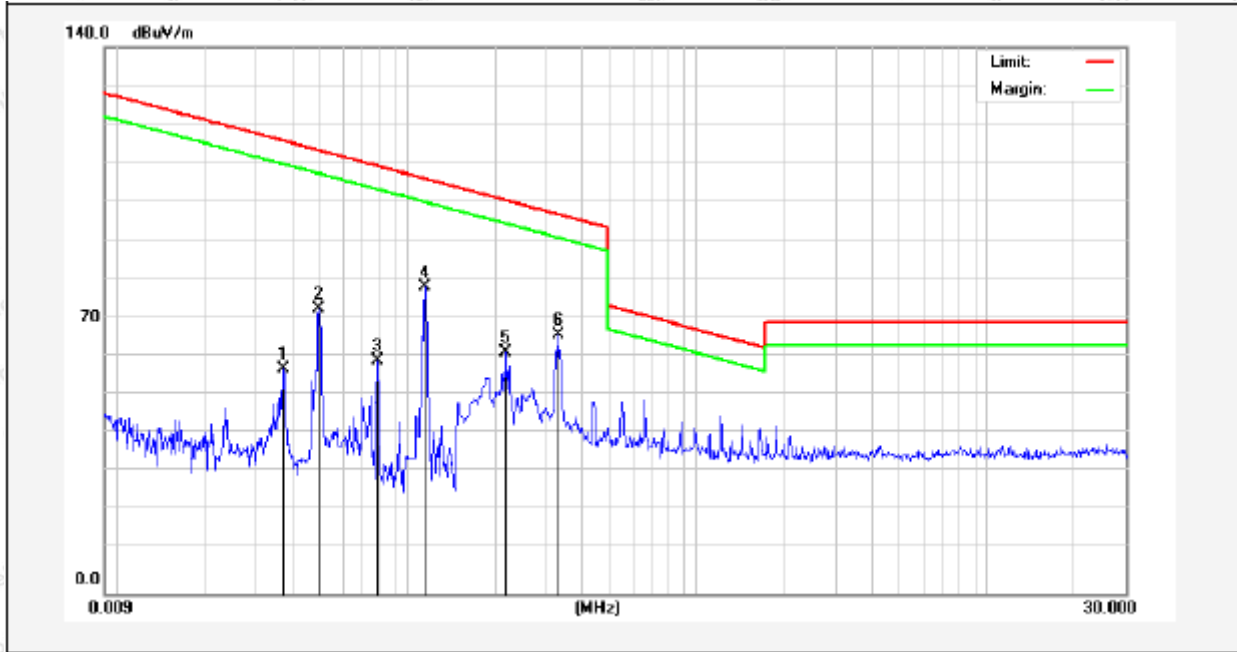


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	degree
				Factor (dB)					(dge)
0.0374	44.78	19.28	2.53	0	66.59	136.02	-69.43	Peak	257
0.0374	35.93	19.28	2.53	0	57.74	116.02	-58.28	AV	257
0.0495	59.40	19.38	2.55	0	81.33	133.60	-52.27	Peak	163
0.0495	50.97	19.38	2.55	0	72.90	113.60	-40.70	AV	163
0.0786	48.42	19.38	2.55	0	70.35	129.61	-59.26	Peak	49
0.0786	37.88	19.38	2.55	0	59.81	109.61	-49.80	AV	49
0.1150	67.71	19.38	2.55	0	89.64	126.32	-36.68	Peak	347
0.1150	56.57	19.38	2.55	0	78.50	106.32	-27.82	AV	347
0.2179	49.45	19.50	2.64	0	71.59	120.80	-49.21	Peak	189
0.2179	39.55	19.50	2.64	0	61.69	100.80	-39.11	AV	189
0.3300	54.19	19.50	2.64	0	76.33	117.21	-40.88	Peak	291
0.3300	44.08	19.50	2.64	0	66.22	97.21	-30.99	AV	291

**Remark:** According to FCC PART 15.209 (d), the emission limits for the frequency bands 9~90 kHz, 110~490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.

### Test Results (30~1000MHz)


Test Mode: Mode 1  
 Power Source: AC 120V, 60Hz for adapter  
 Polarization: Vertical  
 Temp.(°C)/Hum.(%RH): 23.2°C/50%RH  
 Distance: 3m

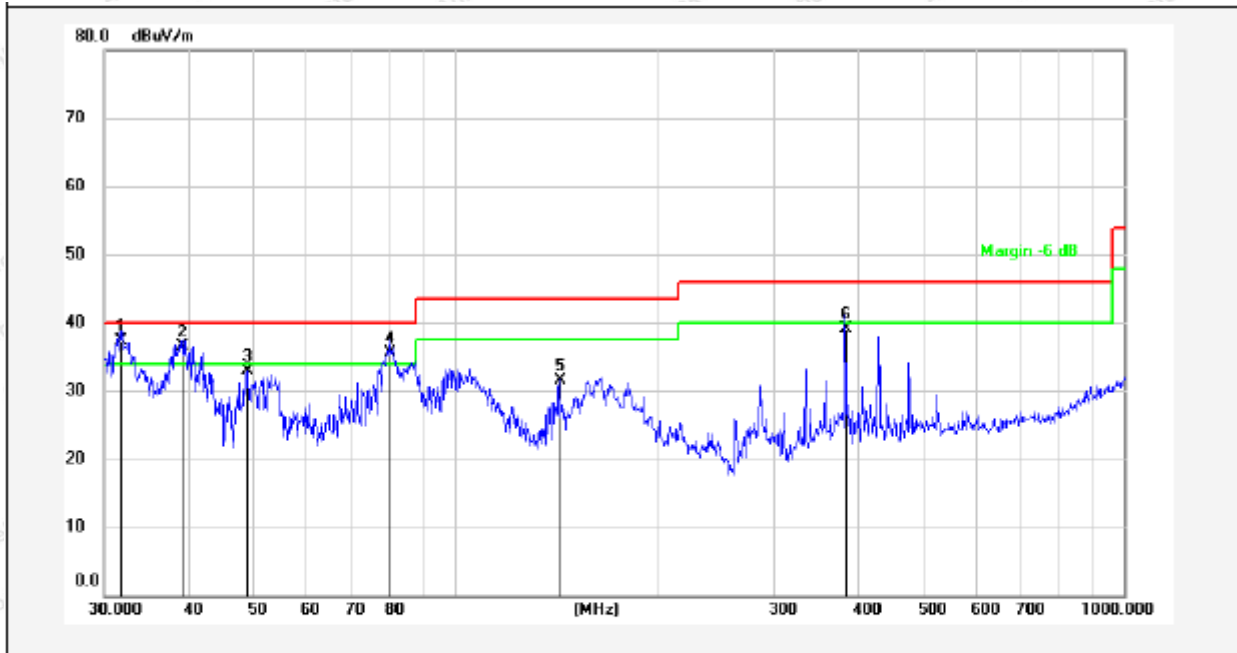

No.	Freq. (MHz)	Reading (dBuV)	Factor ( )	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	31.6327	54.12	-16.90	37.22	40.00	-2.78	QP	100	0	
2	39.2991	50.52	-13.96	36.56	40.00	-3.44	QP	100	360	
3	49.0145	47.67	-14.70	32.97	40.00	-7.03	QP	100	0	
4	80.0806	53.25	-17.68	35.57	40.00	-4.43	QP	100	360	
5	143.3261	51.62	-20.02	31.60	43.50	-11.90	QP	100	0	
6	382.5879	50.67	-11.52	39.15	46.00	-6.85	QP	100	360	

### Test Results (30~1000MHz)

Test Mode: Mode 1  
 Power Source: AC 120V, 60Hz for adapter  
 Polarization: Horizontal  
 Temp.(°C)/Hum.(%RH): 23.2°C/50%RH  
 Distance: 3m

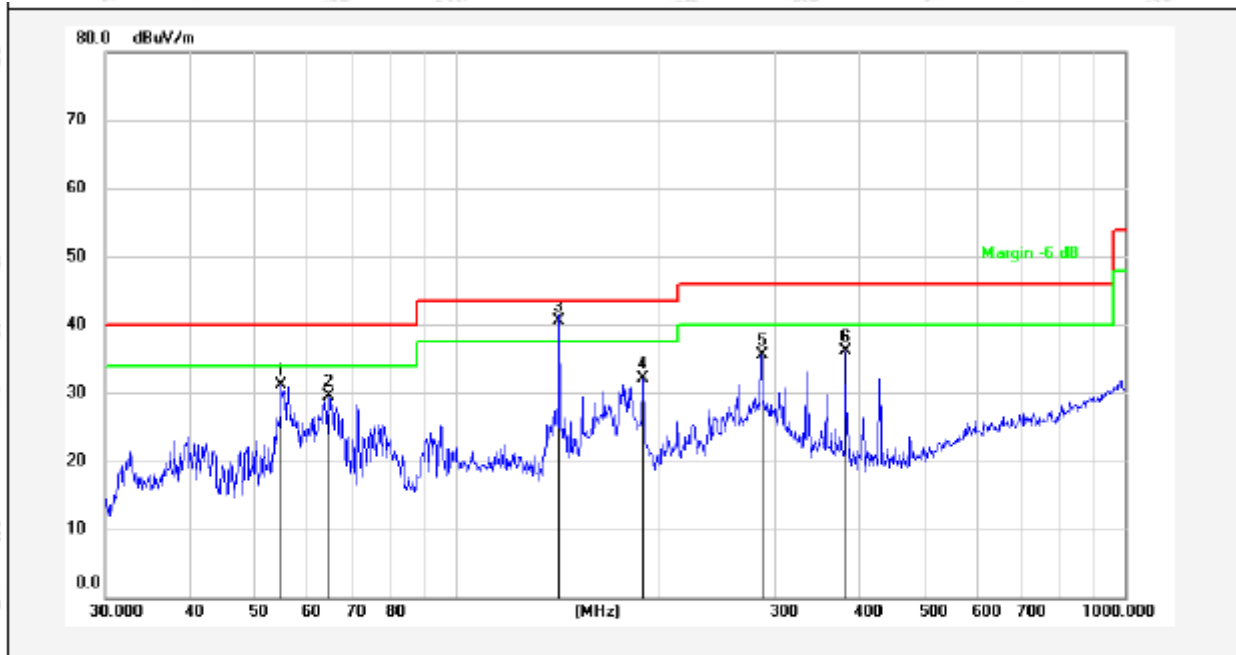

No.	Freq. (MHz)	Reading (dBuV)	Factor ( )	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	55.0274	47.62	-16.53	31.09	40.00	-8.91	QP	100	360	
2	64.6594	47.28	-17.85	29.43	40.00	-10.57	QP	100	0	
3	142.8243	61.31	-20.87	40.44	43.50	-3.06	QP	100	360	
4	190.4050	52.43	-20.33	32.10	43.50	-11.40	QP	100	0	
5	285.9778	51.02	-15.57	35.45	46.00	-10.55	QP	100	360	
6	381.2487	49.04	-12.99	36.05	46.00	-9.95	QP	100	0	

## 5. Antenna Requirement

### 5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 5.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.





**APPENDIX I -- TEST SETUP PHOTOGRAPH**

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test

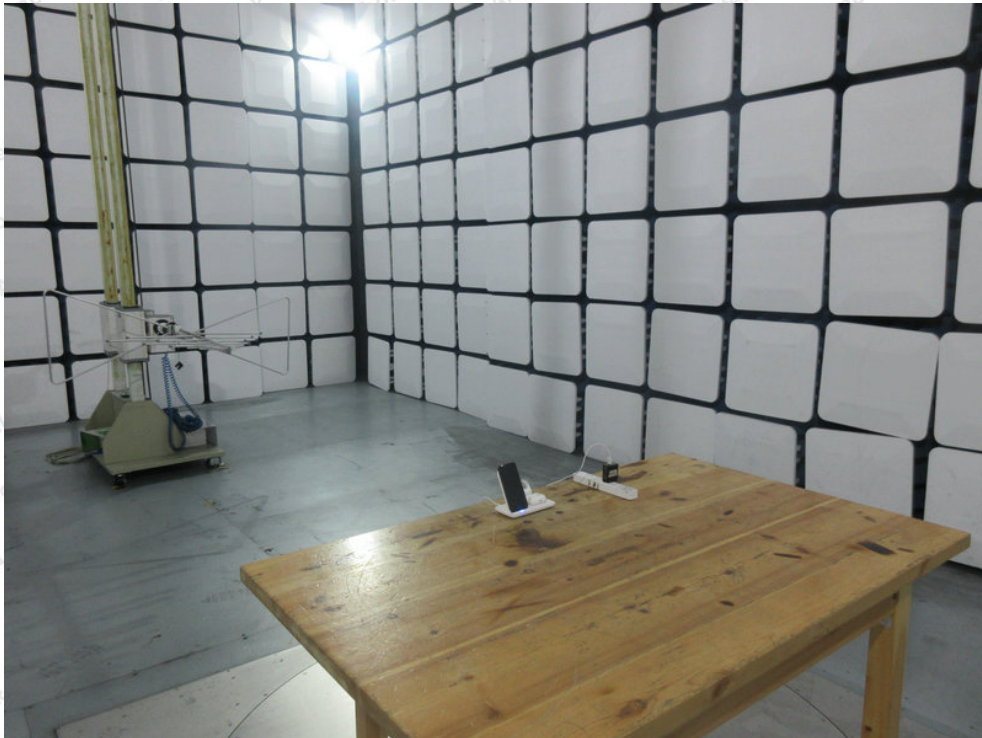

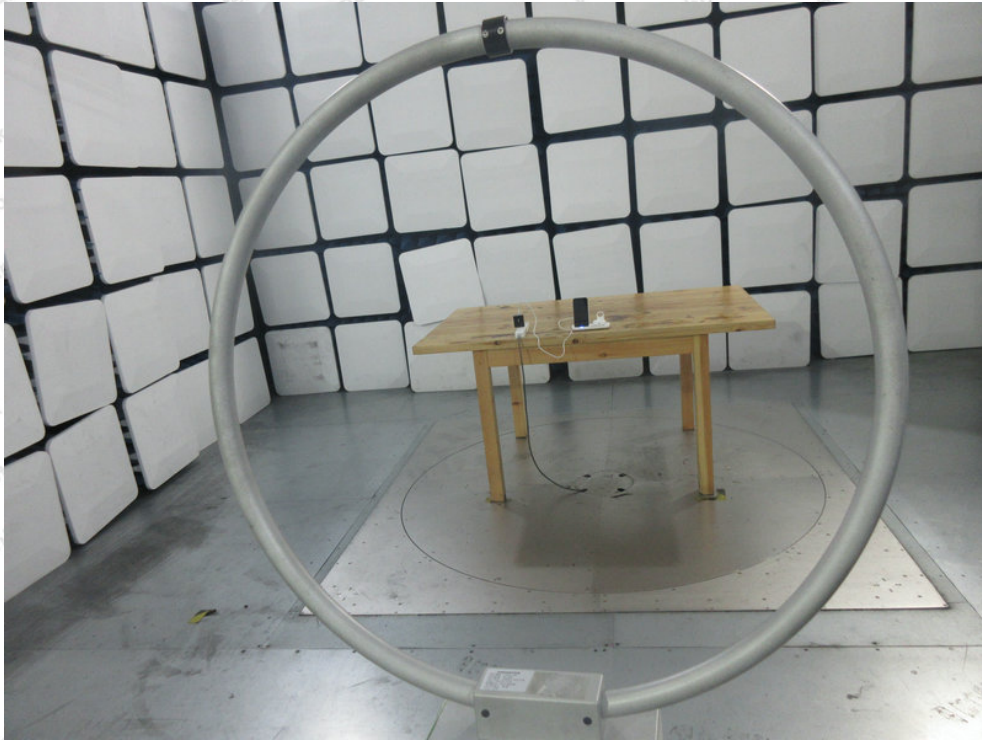


## APPENDIX II -- EXTERNAL PHOTOGRAPH










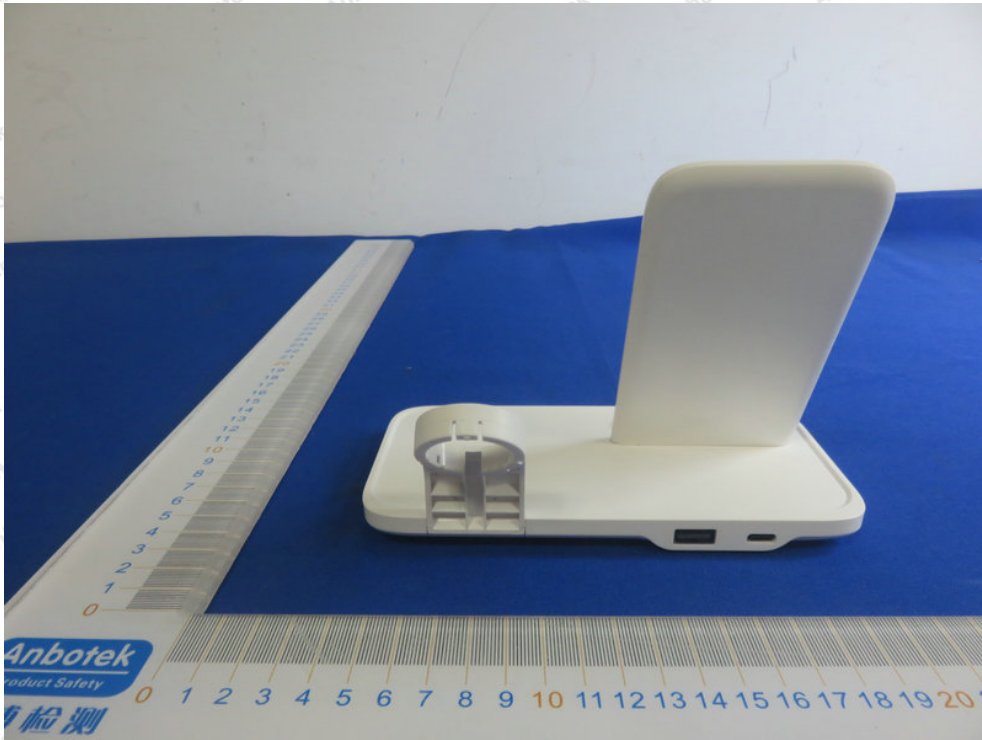




**APPENDIX III -- INTERNAL PHOTOGRAPH**

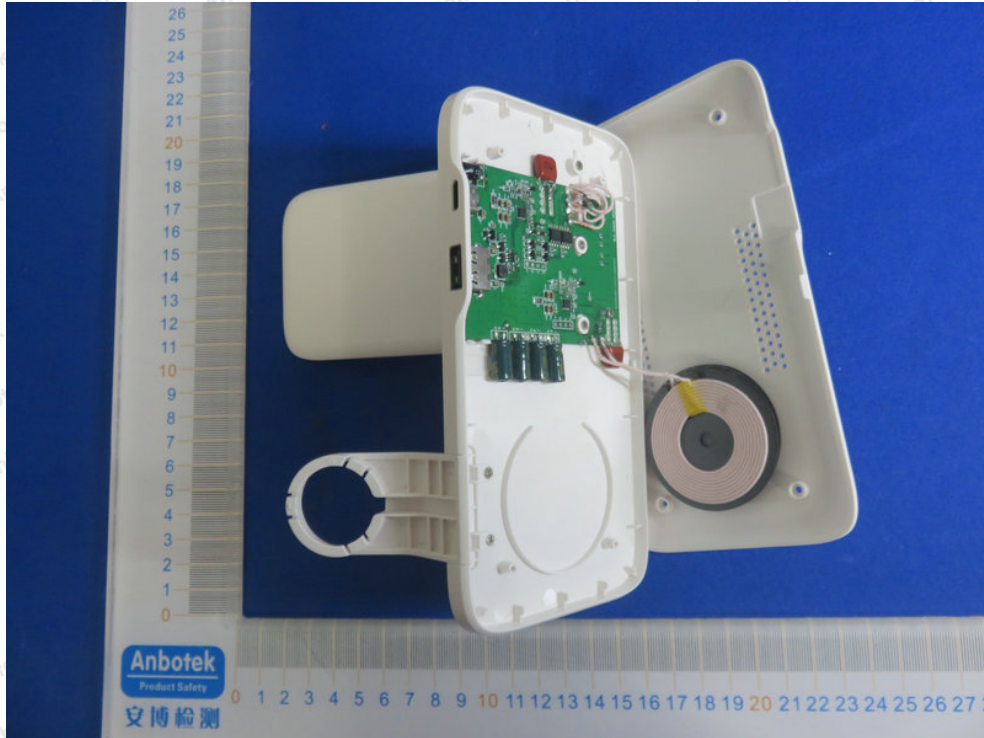

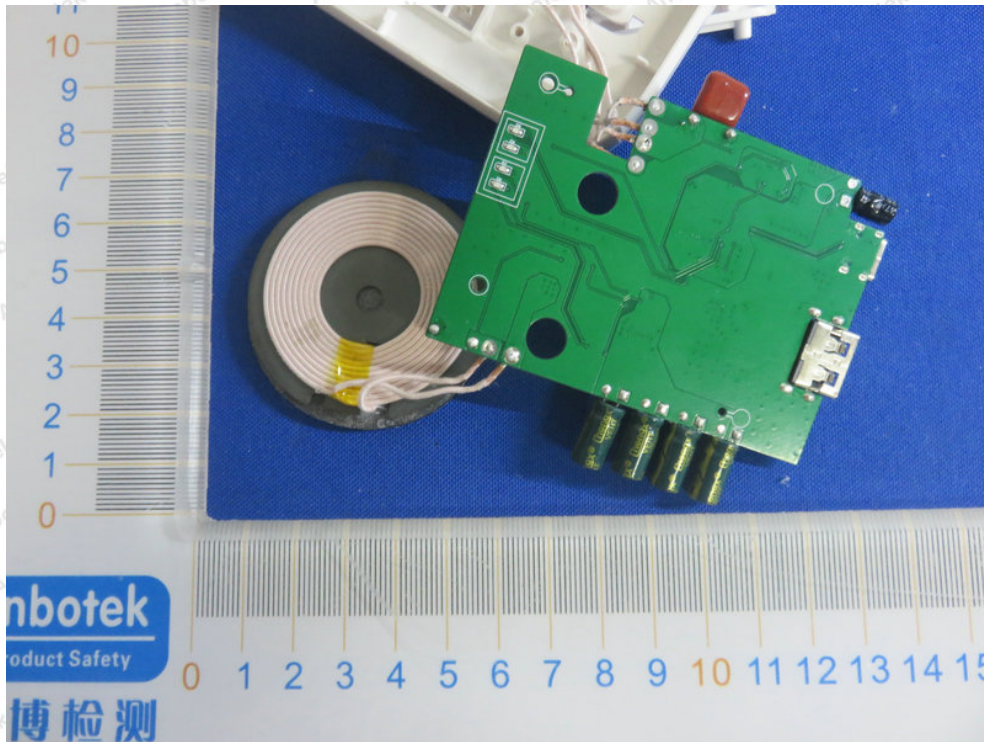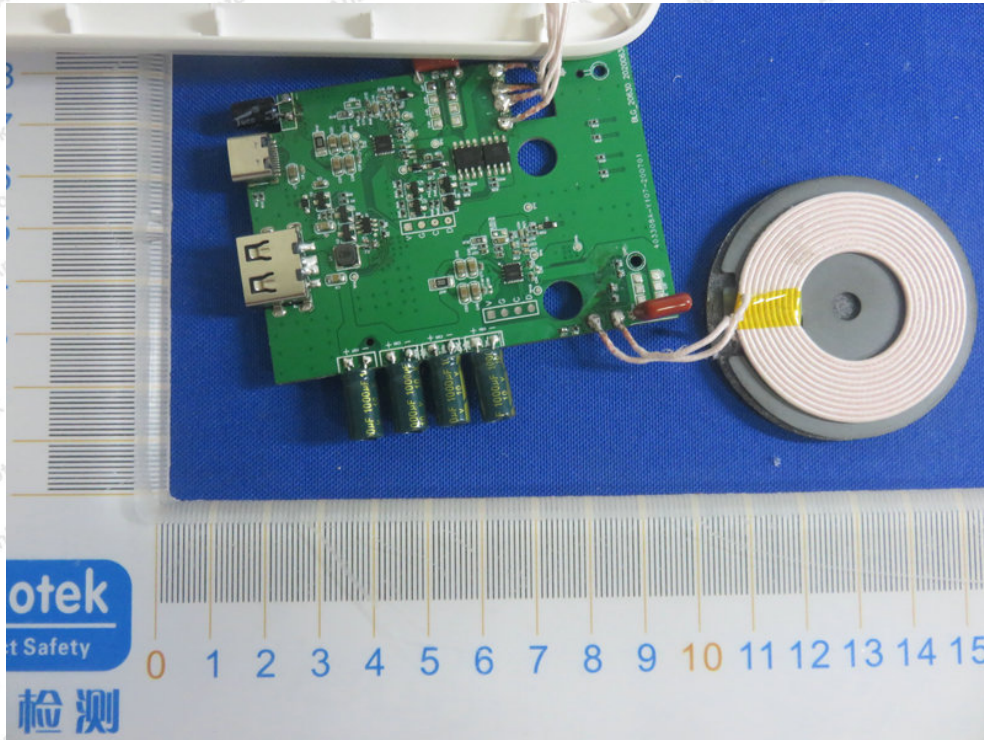

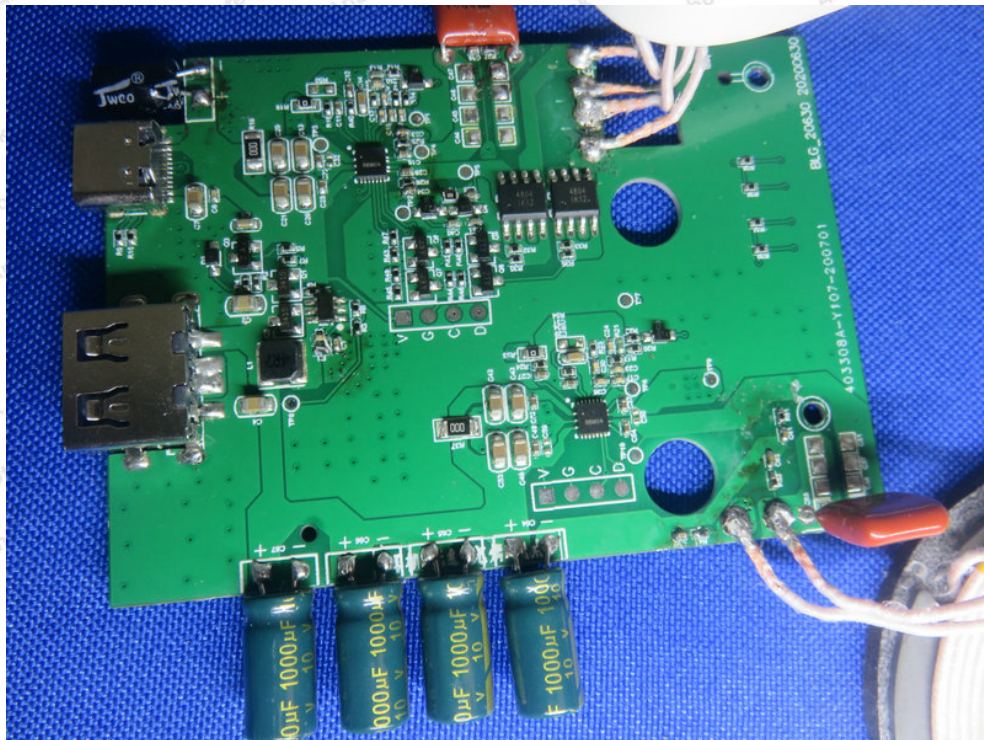

----- End of Report -----