



Report No.: TW2103270E

File Reference No.: 2021-04-07

Applicant: Shenzhen Zhongnuoneng Technology Co., Ltd

Product: intercom

Brand Name: SANZUCO

Model No.: ZNNF60, F60, ZNN-F60B, F60B, ZNNF60C, F60C

Test Standards: FCC Part 15 Subpart B

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 regulations

for the evaluation of electromagnetic compatibility

Approved By

lang lang

Terry Tong

Manager

Dated: April 07, 2021

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES.

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688 Fax (755) 83442996 Email: <u>info@timeway-lab.com</u>

Report No.: TW2103270E Page 2 of 39

Date: 2021-04-07



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

adopt any other remedies which may be appropriate."

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Report No.: TW2103270E

Date: 2021-04-07



Content

1.0 General Details	4
1.1 Test Lab Details	4
1.2 Applicant Details	4
1.4 Submitted Sample: 2 Sample	4
1.5 Test Duration	4
1.6 Test Uncertainty	4
1.7 Test Engineer	5
2.0 List of Measurement Equipment	6
2.1 Conducted Emission Test	6
2.2 Radiated electromagnetic disturbance test	6
2.4 Auxiliary Equipment	6
3.0 Technical Details	7
3.1 Investigations Requested	7
3.2 Test Standards	7
4.0 Conducted Power line Test	8
4.1 Schematics of the test	8
4.2 Test Method and test Procedure	8
4.3 Power line conducted Emission Limit	8
4.4 Test Results	8
5.0 Radiated Disturbance Test	
5.1 Schematics of the test	15
5.2 Test Method and test Procedure:	15
6.0 Scanning Receivers and Frequency Converters used with Scanning Receivers	29
7.0 FCC Label	31
8 A Photo of testing	32

Report No.: TW2103270E Page 4 of 39

Date: 2021-04-07



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: Shenzhen Zhongnuoneng Technology Co., Ltd

Address: Room 1618 Luqiao Building, 1122 Nigang East Road, Luohu District, Shenzhen, China

Telephone: 0755-36958701

Fax:

1.3 Description of EUT

Product: intercom

Manufacturer: Shenzhen Zhongnuoneng Technology Co., Ltd

Address: Room 1618 Luqiao Building, 1122 Nigang East Road, Luohu District, Shenzhen, China

Brand Name: SANZUCO

Model Number: ZNNF60, F60, ZNN-F60B, F60B, ZNNF60C, F60C

Rating: Input: 5V, 1A,

Tx Frequency Range: 421-422.9875MHz and 445-446.9875MHz Rx Frequency: Range: 421-422.9875MHz and 445-446.9875MHz

1.4 Submitted Sample: 2 Sample

1.5 Test Duration

Date of Receipt of Application: March 18, 2021 Date of Receipt of Test Item: March 18, 2021 Date of Test: March 18, 2021 ~ April 07, 2021

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB Radiated Emissions above 1GHz Uncertainty =6.0dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

"The report refers only to the sample tested and does not apply to the bulk production.

This report is issued in confidential to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for illegal purpose. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate."

Page 5 of 39

Report No.: TW2103270E Date: 2021-04-07

1.7 Test Engineer

The sample tested by

Print Name: Leo Lau

Report No.: TW2103270E

Date: 2021-04-07



2.0 List of Measurement Equipment

2.1 Conducted Emission Test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESH3	860905/006	RS	2020.06.23	1Year
Spectrum Analyzer	ESA-L1500A	US37451154	HP	2020.06.23	1Year
PULSE LIMITER	ESH3-Z2	100281	RS	2020.06.23	1Year
LISN	NNB42	00012	SCHAFFNER	2021.01.06	1Year

2.2 Radiated electromagnetic disturbance test

				Calibration	Calibration
Name	Model No	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESPI 3	100379	RS	2020.06.23	1Year
Spectrum Analyzer	E4407B	MY50441392	HP/Agilent	2020.06.23	1Year
Amplifier	BBV9743	#218	HP/Agilent	2020.06.23	1Year
Bilog Antenna	VULB9163	9163/340	Schwarebeck	2018.07.04	3Year
Horn Antenna	BBHA 9120D	9120D-631	RS	2018.07.09	3Year
Amplifier	8449B	3008A00160	HP/Agilent	2020.06.23	1Year

2.3 Scanning Receivers and Frequency Converters used with Scanning Receivers

				Calibration	Calibration
Name	Model No	Serial No.	Manufacturer	Date	Cycle
Attenuator	30dB		Narda	2020.06.23	1Year
RF Communication	9020D	116		2020.06.23	
test set	8920B	116	HP/Agilent		1Year

2.4 Auxiliary Equipment

Device	Manufacturer	Model	Rating
N/A			

Report No.: TW2103270E Page 7 of 39

Date: 2021-04-07



3.0 Technical Details

3.1 Investigations Requested

Perform Electromagnetic Interference [EMI] tests for FCC Requirement.

3.2 Test Standards

FCC Part 15 Subpart B


Report No.: TW2103270E

Date: 2021-04-07



4.0 Conducted Power line Test

4.1 Schematics of the test

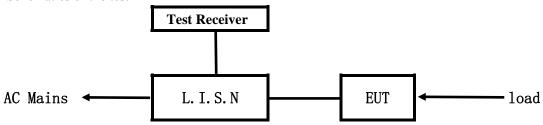


EUT: Equipment Under Test

4.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2014. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2014. Cables and peripherals were moved to find the maximum emission levels for each frequency.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

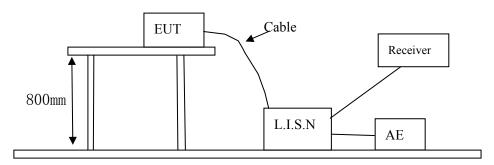

4.3 Power line conducted Emission Limit

Frequency	Class A Lin	nits dB(µV)	Class B Limits $dB(\mu V)$	
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	79.00	66.00	66.00~56.00*	56.00~46.00*
$0.50 \sim 5.0$	73.00	60.00	56.00	46.00
5.00 ~ 30.00	73.00	60.00	60.00	50.00

Notes:

- 1. *decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

4.4 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Note: for this report, only receiving mode was tested.

This report is issued in confidential to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for illegal purpose. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate."

[&]quot;The report refers only to the sample tested and does not apply to the bulk production.



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity:65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Scanning Receiving Mode

Results: Pass

Equipment Level: Class B

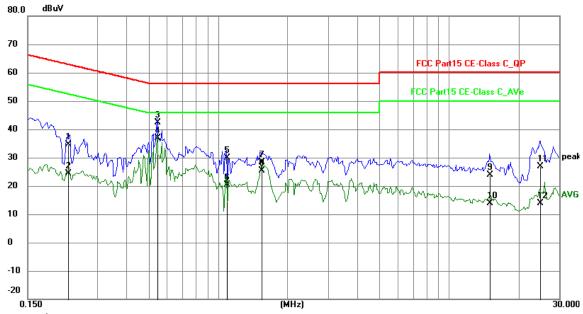

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2241	24.82	9.75	34.57	62.67	-28.10	QP	Р
2	0.2241	14.52	9.75	24.27	52.67	-28.40	AVG	Р
3	0.5439	32.54	9.77	42.31	56.00	-13.69	QP	Р
4	0.5439	27.04	9.77	36.81	46.00	-9.19	AVG	Р
5	1.0899	20.01	9.79	29.80	56.00	-26.20	QP	Р
6	1.0899	10.51	9.79	20.30	46.00	-25.70	AVG	Р
7	1.5518	18.59	9.80	28.39	56.00	-27.61	QP	Р
8	1.5518	15.58	9.80	25.38	46.00	-20.62	AVG	Р
9	15.0003	13.50	10.38	23.88	60.00	-36.12	QP	Р
10	15.0003	3.42	10.38	13.80	50.00	-36.20	AVG	Р
11	24.7620	15.80	10.98	26.78	60.00	-33.22	QP	Р
12	24.7620	2.95	10.98	13.93	50.00	-36.07	AVG	Р

[&]quot;The report refers only to the sample tested and does not apply to the bulk production.



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity:65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Scanning Receiving Mode

Results: Pass

Equipment Level: Class B

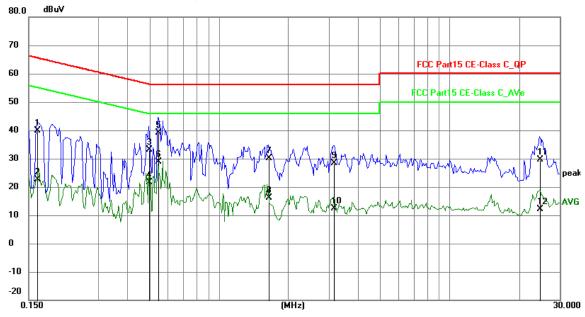

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1641	30.11	9.78	39.89	65.25	-25.36	QP	Р
2	0.1641	12.73	9.78	22.51	55.25	-32.74	AVG	Р
3	0.4971	23.27	9.77	33.04	56.05	-23.01	QP	Р
4	0.4971	11.83	9.77	21.60	46.05	-24.45	AVG	Р
5	0.5439	29.28	9.77	39.05	56.00	-16.95	QP	Р
6	0.5439	19.18	9.77	28.95	46.00	-17.05	AVG	Р
7	1.6437	20.22	9.80	30.02	56.00	-25.98	QP	Р
8	1.6437	6.42	9.80	16.22	46.00	-29.78	AVG	Р
9	3.1521	18.64	9.85	28.49	56.00	-27.51	QP	Р
10	3.1521	2.64	9.85	12.49	46.00	-33.51	AVG	Р
11	24.6021	18.61	10.97	29.58	60.00	-30.42	QP	Р
12	24.6021	1.28	10.97	12.25	50.00	-37.75	AVG	Р

[&]quot;The report refers only to the sample tested and does not apply to the bulk production.



C: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity:65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Receiving Mode at 422.9875MHz

Results: Pass

Equipment Level: Class B

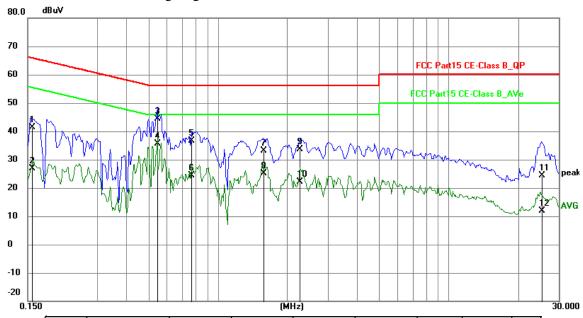

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1565	31.68	9.78	41.46	65.65	-24.19	QP	Р
2	0.1565	17.04	9.78	26.82	55.65	-28.83	AVG	Р
3	0.5478	34.50	9.77	44.27	56.00	-11.73	QP	Р
4	0.5478	25.85	9.77	35.62	46.00	-10.38	AVG	Р
5	0.7700	26.94	9.78	36.72	56.00	-19.28	QP	Р
6	0.7700	14.54	9.78	24.32	46.00	-21.68	AVG	Р
7	1.5696	23.29	9.80	33.09	56.00	-22.91	QP	Р
8	1.5696	15.25	9.80	25.05	46.00	-20.95	AVG	Р
9	2.2716	23.87	9.81	33.68	56.00	-22.32	QP	Р
10	2.2716	12.38	9.81	22.19	46.00	-23.81	AVG	Р
11	25.3002	13.30	11.01	24.31	60.00	-35.69	QP	Р
12	25.3002	0.86	11.01	11.87	50.00	-38.13	AVG	Р

[&]quot;The report refers only to the sample tested and does not apply to the bulk production.



D: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity:65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Receiving Mode at 422.9875MHz

Results: Pass

Equipment Level: Class B

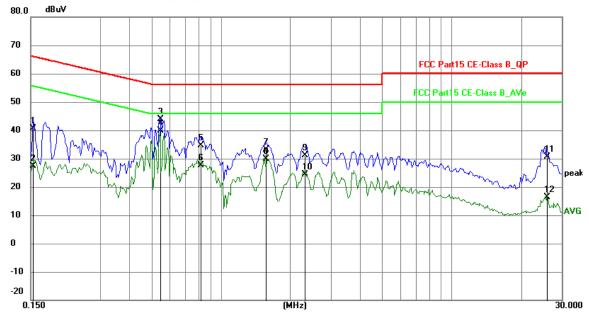

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1539	30.97	9.78	40.75	65.79	-25.04	QP	Р
2	0.1539	17.51	9.78	27.29	55.79	-28.50	AVG	Р
3	0.5439	34.00	9.77	43.77	56.00	-12.23	QP	Р
4	0.5439	30.23	9.77	40.00	46.00	-6.00	AVG	Р
5	0.8169	24.95	9.78	34.73	56.00	-21.27	QP	Р
6	0.8169	17.93	9.78	27.71	46.00	-18.29	AVG	Р
7	1.5657	23.35	9.80	33.15	56.00	-22.85	QP	Р
8	1.5657	20.12	9.80	29.92	46.00	-16.08	AVG	Р
9	2.2968	21.35	9.81	31.16	56.00	-24.84	QP	Р
10	2.2968	14.45	9.81	24.26	46.00	-21.74	AVG	Р
11	25.9983	19.59	11.05	30.64	60.00	-29.36	QP	Р
12	25.9983	5.31	11.05	16.36	50.00	-33.64	AVG	Р

[&]quot;The report refers only to the sample tested and does not apply to the bulk production.



E: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity:65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Receiving Mode at 446.9875MHz

Results: Pass

Equipment Level: Class B

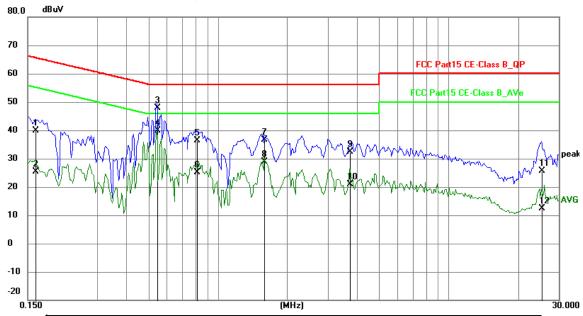

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1617	30.20	9.78	39.98	65.38	-25.40	QP	Р
2	0.1617	15.67	9.78	25.45	55.38	-29.93	AVG	Р
3	0.5439	38.17	9.77	47.94	56.00	-8.06	QP	Р
4	0.5439	30.16	9.77	39.93	46.00	-6.07	AVG	Р
5	0.8130	26.62	9.78	36.40	56.00	-19.60	QP	Р
6	0.8130	15.34	9.78	25.12	46.00	-20.88	AVG	Р
7	1.5852	26.71	9.80	36.51	56.00	-19.49	QP	Р
8	1.5852	19.07	9.80	28.87	46.00	-17.13	AVG	Р
9	3.7395	22.56	9.88	32.44	56.00	-23.56	QP	Р
10	3.7395	11.05	9.88	20.93	46.00	-25.07	AVG	Р
11	25.2534	14.69	11.01	25.70	60.00	-34.30	QP	Р
12	25.2534	1.35	11.01	12.36	50.00	-37.64	AVG	Р

[&]quot;The report refers only to the sample tested and does not apply to the bulk production.



F: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity:65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Receiving Mode at 446.9875MHz

Results: Pass

Equipment Level: Class B

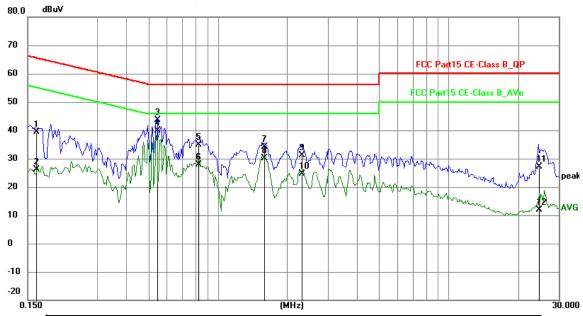

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1641	29.63	9.78	39.41	65.25	-25.84	QP	Р
2	0.1641	16.26	9.78	26.04	55.25	-29.21	AVG	Р
3	0.5439	33.94	9.77	43.71	56.00	-12.29	QP	Р
4	0.5439	30.23	9.77	40.00	46.00	-6.00	AVG	Р
5	0.8247	24.99	9.78	34.77	56.00	-21.23	QP	Р
6	0.8247	18.18	9.78	27.96	46.00	-18.04	AVG	Р
7	1.5852	24.26	9.80	34.06	56.00	-21.94	QP	Р
8	1.5852	20.34	9.80	30.14	46.00	-15.86	AVG	Р
9	2.3184	21.33	9.81	31.14	56.00	-24.86	QP	Р
10	2.3184	14.81	9.81	24.62	46.00	-21.38	AVG	Р
11	24.5631	16.26	10.96	27.22	60.00	-32.78	QP	Р
12	24.5631	0.87	10.96	11.83	50.00	-38.17	AVG	Р

[&]quot;The report refers only to the sample tested and does not apply to the bulk production.


Report No.: TW2103270E Page 15 of 39

Date: 2021-04-07



5.0 Radiated Disturbance Test

5.1 Schematics of the test




5.2 Test Method and test Procedure:

The EUT was tested according to ANSI C63.4 –2014; The frequency spectrum from 30MHz to 5GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. For measurement above 1GHz, peak values with RBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK

Actual Working Voltage and Frequency: 120V~, 60Hz

Block diagram of Test setup

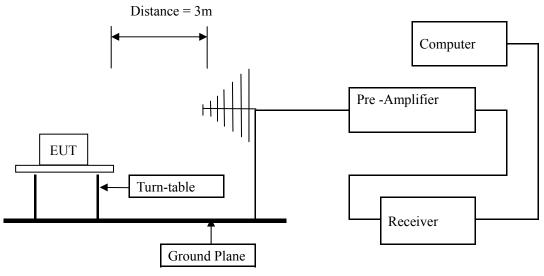


[&]quot;The report refers only to the sample tested and does not apply to the bulk production.

Report No.: TW2103270E

Date: 2021-04-07



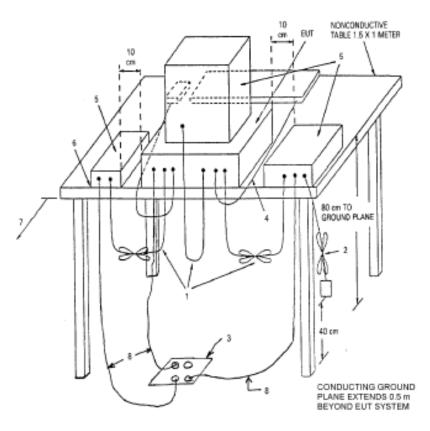

5.3 Radiated Emission Limit

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.00
88-216	3	43.50
216-960	3	46.00
Above 960	3	54.00

Note: The lower limit shall apply at the transition frequencies

5.4 Test result

The frequency spectrum from 30MHz to 5GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK. Measurements were made at 3 meters.

[&]quot;The report refers only to the sample tested and does not apply to the bulk production. This report is issued in confidential to the client and it will be strictly treated as such by

Report No.: TW2103270E Page 17 of 39

Date: 2021-04-07



A: Radiated Disturbance (30MHz----1000MHz)

Project Number: CASE1 2021-04-06 09.01.02 Test Time:


EUT Name: Test Engineer: **HAVEN** intercom

Manufacturer: Shenzhen Zhongnuoneng Test Standard: FCC Part 15C

Technology Co., Ltd

Model: ZNNF60 Work Addition: Scanning Receiving Mode

Temp.(°C): 25 Load: Remark: Hum.: 65%

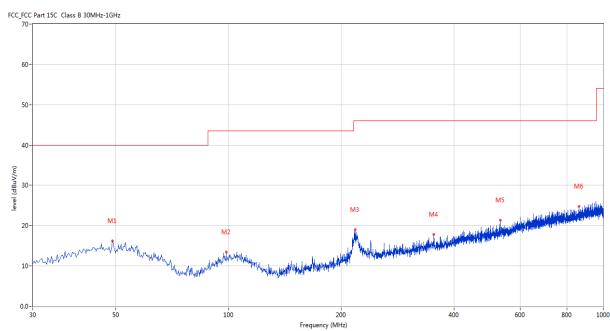

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	48.910	16.26	-11.21	40.0	-23.74	Peak	37.00	100	Horizontal	Pass
2	98.610	13.46	-13.70	43.5	-30.04	Peak	355.00	100	Horizontal	Pass
3	217.648	19.00	-13.45	46.0	-27.00	Peak	283.00	100	Horizontal	Pass
4	353.414	17.82	-9.48	46.0	-28.18	Peak	338.00	100	Horizontal	Pass
5	531.122	21.34	-6.46	46.0	-24.66	Peak	228.00	100	Horizontal	Pass
6	861.810	24.75	-2.28	46.0	-21.25	Peak	360.00	100	Horizontal	Pass

[&]quot;The report refers only to the sample tested and does not apply to the bulk production.

Report No.: TW2103270E Page 18 of 39

Date: 2021-04-07



B: Radiated Disturbance (30MHz----1000MHz)

Project Number: CASE1 Test Time: 2021-04-06_09.02.22


EUT Name: Intercom Test Engineer: HAVEN

Manufacturer: Shenzhen Zhongnuoneng Test Standard: FCC Part 15C

Technology Co., Ltd

Model: ZNNF60 Work Addition: Scanning Receiving Mode

Temp.(°C): 25 Load: Hum.: 65% Remark:

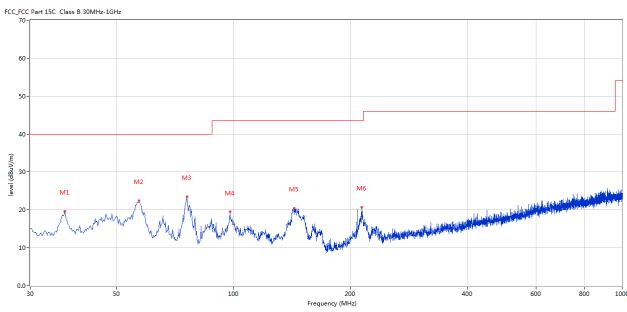

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	36.788	19.71	-13.31	40.0	-20.29	Peak	287.00	100	Vertical	Pass
2	57.153	22.47	-12.37	40.0	-17.53	Peak	274.00	100	Vertical	Pass
3	75.821	23.48	-17.51	40.0	-16.52	Peak	115.00	100	Vertical	Pass
4	97.883	19.45	-13.75	43.5	-24.05	Peak	58.00	100	Vertical	Pass
5	143.219	20.40	-17.22	43.5	-23.10	Peak	353.00	100	Vertical	Pass
6	213.527	20.73	-13.63	43.5	-22.77	Peak	316.00	100	Vertical	Pass

[&]quot;The report refers only to the sample tested and does not apply to the bulk production.

Report No.: TW2103270E

Date: 2021-04-07



C: Radiated Disturbance (30MHz----1000MHz)

Project Number: CASE1 2021-04-06_19.58.03 Test Time:

EUT Name: Test Engineer: **HAVEN** intercom

Manufacturer: Shenzhen Zhongnuoneng Test Standard: FCC Part 15C


Technology Co., Ltd

ZNNF60 Model: Work Addition: Receiving Mode

Temp.(°C): 25 Load:

Remark: Hum.: 65% Rx 422.9875MHz

FCC_FCC Part 15B Class B 30MHz-1GHz

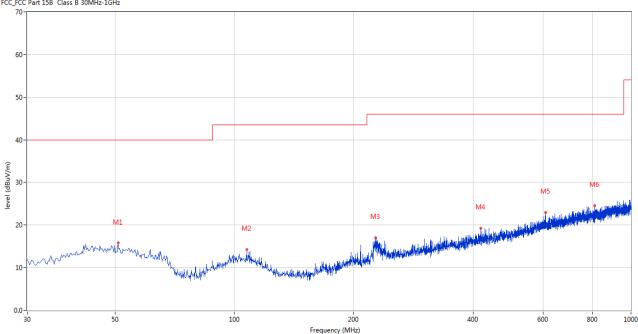

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	50.850	15.76	-11.40	40.0	-24.24	Peak	305.00	100	Horizontal	Pass
2	107.338	14.19	-13.39	43.5	-29.31	Peak	357.00	100	Horizontal	Pass
3	227.103	17.05	-12.80	46.0	-28.95	Peak	79.00	100	Horizontal	Pass
4	417.661	19.20	-8.08	46.0	-26.80	Peak	79.00	100	Horizontal	Pass
5	608.460	22.95	-5.02	46.0	-23.05	Peak	73.00	100	Horizontal	Pass
6	808.958	24.56	-3.00	46.0	-21.44	Peak	273.00	100	Horizontal	Pass

[&]quot;The report refers only to the sample tested and does not apply to the bulk production.

Report No.: TW2103270E Page 20 of 39

Date: 2021-04-07



D: Radiated Disturbance (30MHz----1000MHz)

Project Number: CASE1 Test Time: 2021-04-06_20.01.08

EUT Name: intercom Test Engineer: HAVEN


Manufacturer: Shenzhen Zhongnuoneng Test Standard: FCC Part 15C

Technology Co., Ltd

Model: ZNNF60 Work Addition: Receiving Mode

Temp.($^{\circ}$): 25 Load:

Hum.: 65% Remark: Rx 422.9875MHz

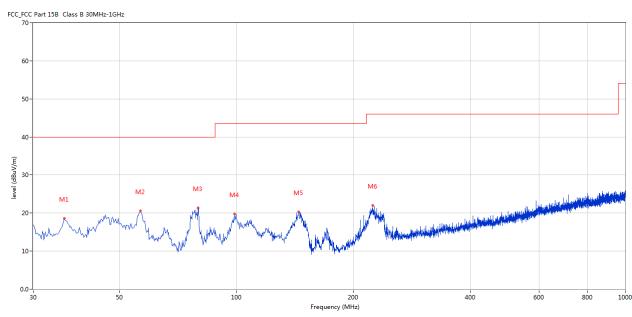

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	36.061	18.63	-13.68	40.0	-21.37	Peak	9.00	100	Vertical	Pass
2	56.668	20.58	-12.22	40.0	-19.42	Peak	227.00	100	Vertical	Pass
3	79.700	21.32	-17.45	40.0	-18.68	Peak	109.00	200	Vertical	Pass
4	98.853	19.79	-13.68	43.5	-23.71	Peak	318.00	100	Vertical	Pass
5	144.674	20.30	-17.18	43.5	-23.20	Peak	0.00	100	Vertical	Pass
6	224.436	22.08	-13.00	46.0	-23.92	Peak	0.00	200	Vertical	Pass

[&]quot;The report refers only to the sample tested and does not apply to the bulk production.

Report No.: TW2103270E Page 21 of 39

Date: 2021-04-07



Radiated Disturbance (30MHz----1000MHz)

CASE1 2021-04-06 20.02.44 Project Number: Test Time:

EUT Name: Test Engineer: **HAVEN** intercom


Manufacturer: Shenzhen Zhongnuoneng Test Standard: FCC Part 15C

Technology Co., Ltd

Model: ZNNF60 Work Addition: Receiving Mode

Temp.(°C): 25 Load:

Remark: Hum.: 65% Rx 446.9875MHz

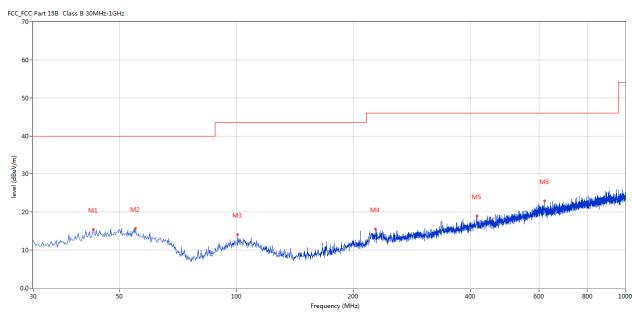

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	42.849	15.40	-11.52	40.0	-24.60	Peak	251.00	100	Horizontal	Pass
2	54.971	15.74	-11.77	40.0	-24.26	Peak	111.00	100	Horizontal	Pass
3	100.792	14.11	-13.46	43.5	-29.39	Peak	39.00	100	Horizontal	Pass
4	227.831	15.52	-12.78	46.0	-30.48	Peak	33.00	100	Horizontal	Pass
5	415.964	19.00	-8.34	46.0	-27.00	Peak	1.00	100	Horizontal	Pass
6	620.097	22.97	-4.86	46.0	-23.03	Peak	303.00	100	Horizontal	Pass

[&]quot;The report refers only to the sample tested and does not apply to the bulk production.

Report No.: TW2103270E Page 22 of 39

Date: 2021-04-07



F: Radiated Disturbance (30MHz----1000MHz)

Project Number: CASE1 Test Time: 2021-04-06_20.04.15

EUT Name: intercom Test Engineer: HAVEN


Manufacturer: Shenzhen Zhongnuoneng Test Standard: FCC Part 15C

Technology Co.,Ltd

Model: ZNNF60 Work Addition: Receiving Mode

Temp.($^{\circ}$): 25 Load:

Hum.: 65% Remark: Rx 446.9875MHz

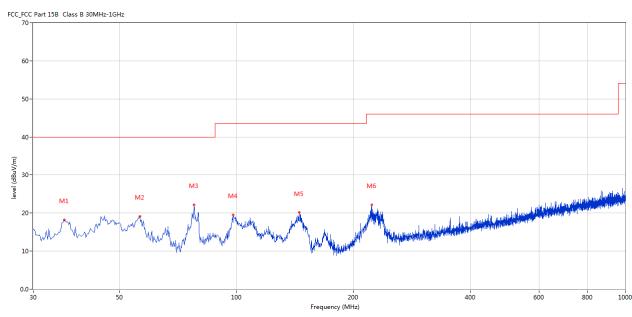

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	36.061	18.14	-13.68	40.0	-21.86	Peak	147.00	100	Vertical	Pass
2	56.426	19.16	-12.15	40.0	-20.84	Peak	213.00	100	Vertical	Pass
3	77.761	22.09	-17.54	40.0	-17.91	Peak	108.00	100	Vertical	Pass
4	98.125	19.54	-13.73	43.5	-23.96	Peak	356.00	100	Vertical	Pass
5	145.159	20.10	-17.26	43.5	-23.40	Peak	8.00	100	Vertical	Pass
6	222.739	22.18	-13.19	46.0	-23.82	Peak	8.00	100	Vertical	Pass

[&]quot;The report refers only to the sample tested and does not apply to the bulk production.

Report No.: TW2103270E Page 23 of 39

Date: 2021-04-07



G: Radiated Disturbance (1000MHz----5000MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Receiving Mode at 421MHz

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

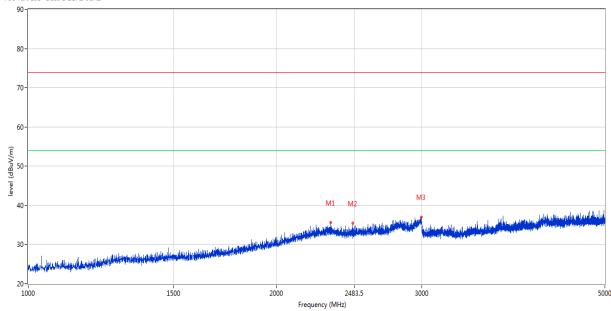

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	2326.668	35.61	-3.29	74.0	-38.39	Peak	99.00	100	Н	Pass
2	2473.132	35.42	-3.57	74.0	-38.58	Peak	62.00	100	Н	Pass
3	2995.001	37.05	-2.64	74.0	-36.95	Peak	153.00	100	Н	Pass

Report No.: TW2103270E Page 24 of 39

Date: 2021-04-07



H: Radiated Disturbance (1000MHz----5000MHz)

EUT Operating Environment


Temperature:25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Receiving Mode at 421MHz

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

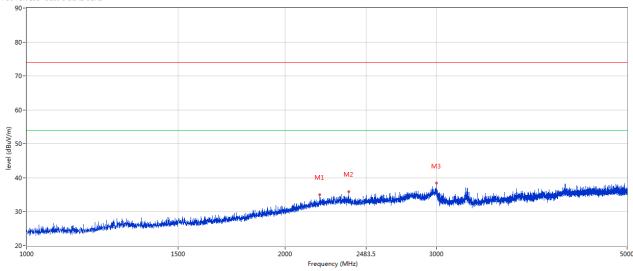

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2195.201	35.09	-3.29	74.0	-38.91	Peak	342.00	100	V	Pass
2	2372.157	35.96	-3.46	74.0	-38.04	Peak	273.00	100	V	Pass
3	3000.000	38.44	-2.64	74.0	-35.56	Peak	30.00	100	V	Pass

Report No.: TW2103270E Page 25 of 39

Date: 2021-04-07



I: Radiated Disturbance (1000MHz----5000MHz)

EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa


EUT set Condition: Receiving Mode at 422.9875MHz

Model: Mode 2

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

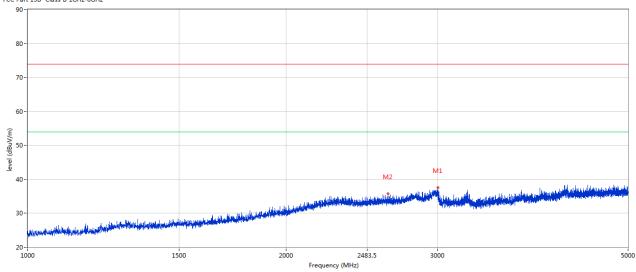

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	3002.999	37.52	-2.63	74.0	-36.48	Peak	22.00	100	Н	Pass
2	2625.594	35.76	-3.23	74.0	-38.24	Peak	360.00	100	Н	Pass

Report No.: TW2103270E Page 26 of 39

Date: 2021-04-07



J: Radiated Disturbance (1000MHz----5000MHz)

EUT Operating Environment


Temperature:25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Receiving Mode at 422.9875MHz

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

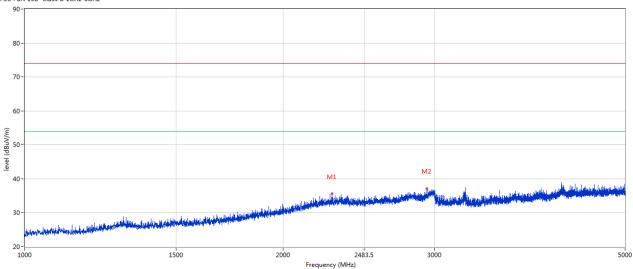

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2280.180	35.57	-3.20	74.0	-38.43	Peak	49.00	100	V	Pass
2	2937.516	37.20	-2.66	74.0	-36.80	Peak	86.00	100	V	Pass

Report No.: TW2103270E Page 27 of 39

Date: 2021-04-07



Radiated Disturbance (1000MHz----5000MHz) K:

EUT Operating Environment


Humidity: 65%RH Atmospheric Pressure: 101 kPa Temperature: 25 °C

EUT set Condition: Receiving Mode at 446.9875MHz

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

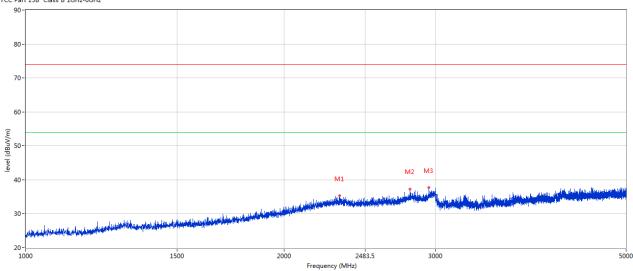

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	2319.170	35.30	-3.26	74.0	-38.70	Peak	297.00	100	Н	Pass
2	2803.049	37.33	-2.70	74.0	-36.67	Peak	360.00	100	Н	Pass
3	2946.013	37.68	-2.66	74.0	-36.32	Peak	360.00	100	Н	Pass

Report No.: TW2103270E Page 28 of 39

Date: 2021-04-07



L: Radiated Disturbance (1000MHz----5000MHz)

EUT Operating Environment


Temperature:25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Receiving Mode at 446.9875MHz

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

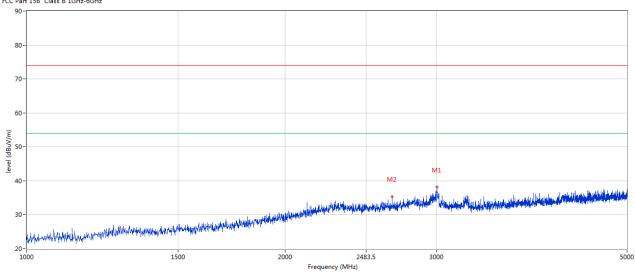

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	3003.249	38.14	-2.63	74.0	-35.86	Peak	27.00	100	V	Pass
2	2663.334	35.39	-3.09	74.0	-38.61	Peak	0.00	100	V	Pass

Report No.: TW2103270E Page 29 of 39

Date: 2021-04-07



6.0 Scanning Receivers and Frequency Converters used with Scanning Receivers


Applicable Standard

FCC Part15.121(b)

Limit

Except as provided in paragraph (c) of this section, scanning receivers shall reject any signals from the Cellular Radiotelephone Service frequency bands that are 38 dB or lower based upon a 12 dB SINAD measurement, which is considered the threshold where a signal can be clearly discerned from any interference that may be present.

EUT Setup

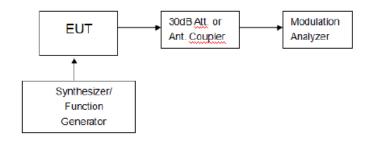

Test Procedure

- 1) Connected the EUT as shown in the above block diagram.
- 2) Apply a RF signal to the receiver input port at lowest, middle and highest channel frequencies of receiver operation band.
- 3) Adjust the audio output level of the receiver to it's rated value with the distortion less than 10%.
- 4) Adjust the RF Signal Generator Output Power to produce 12 dB SINAD without the audio output power dropping by more than 3 db. This output level of the RF SG at each channel frequency is the sensitivity of the receiver.
- 5) Select the lowest or worse-case sensitivity level for all of the bands as the reference sensitivity.
- 6) Adjust the RF Signal Generator output to a level of +60 dB above the reference sensitivity obtained in step 5) and its frequency to the frequency points in the cellular band.
- 7) Set the receiver in a scanning mode and allow it to scan through it's pre-set frequencies.
- 8) If the receiver unquenched or stopped on any frequency, receiving at this frequency, then adjust the signal generator output level until 12 dB SINAD is produced, this level is the spurious value and the difference between the reference sensitivity and the spurious value is the rejection ratio and must be at least 38dB

Report No.: TW2103270E

Date: 2021-04-07



Page 30 of 39

Test Data:

Frequency Range (MHz)	Channel	Measurement Result (dB)	Limit (dB)
421-422.9875	Low	49	>38
421-422.9875	High	50	>38
445-446.9875	Low	51	>38
445-446.9875	High	50	>38

Note: 1. This device meets the requirements of FCC Part 15.121(b)

2. The test report only shows the worst test results

Report No.: TW2103270E Page 31 of 39

Date: 2021-04-07




7.0 FCC Label

FCC ID: 2AS5R-ZNNF60

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

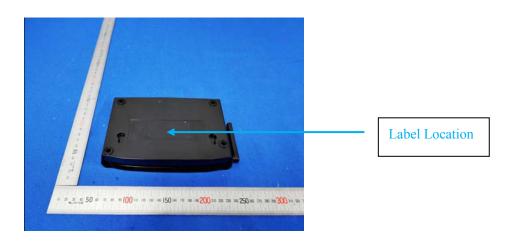


Page 32 of 39 Report No.: TW2103270E

Date: 2021-04-07



8.0 Photo of testing

Conducted Emissions

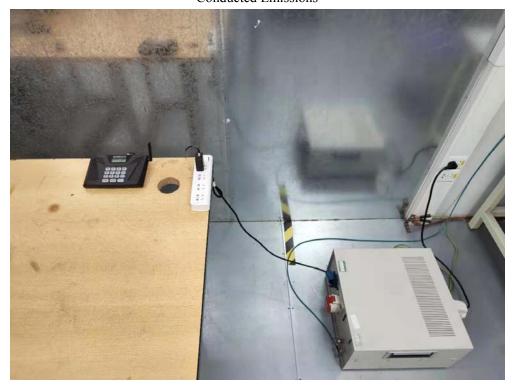


Report No.: TW2103270E Page 33 of 39

Date: 2021-04-07



Radiated Emissions

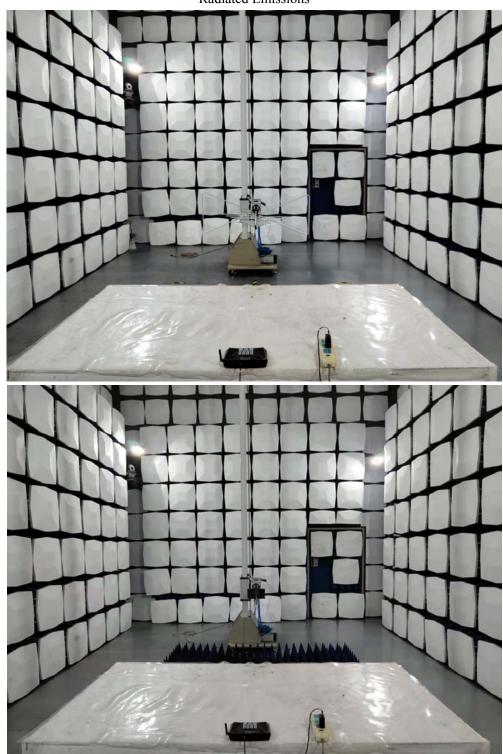

"The report refers only to the sample tested and does not apply to the bulk production.

This report is issued in confidential to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for illegal purpose. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate."

Page 34 of 39

Report No.: TW2103270E

Date: 2021-04-07



Photographs – EUT



"The report refers only to the sample tested and does not apply to the bulk production.

This report is issued in confidential to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for illegal purpose. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer.

Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with a party to proportion the consent of the report. into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate."

Page 35 of 39

Report No.: TW2103270E

Date: 2021-04-07



Photographs – EUT



"The report refers only to the sample tested and does not apply to the bulk production.

This report is issued in confidential to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for illegal purpose. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate."

Report No.: TW2103270E Page 36 of 39

Date: 2021-04-07



Photographs – EUT



Page 37 of 39

Report No.: TW2103270E

Date: 2021-04-07



Photographs – EUT



"The report refers only to the sample tested and does not apply to the bulk production.

This report is issued in confidential to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for illegal purpose. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate."


Page 38 of 39

Report No.: TW2103270E

Date: 2021-04-07



Photographs – EUT

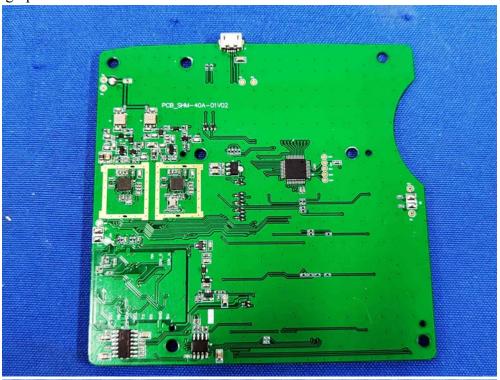



"The report refers only to the sample tested and does not apply to the bulk production.

This report is issued in confidential to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for illegal purpose. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate."


Page 39 of 39

Report No.: TW2103270E

Date: 2021-04-07



Photographs – EUT

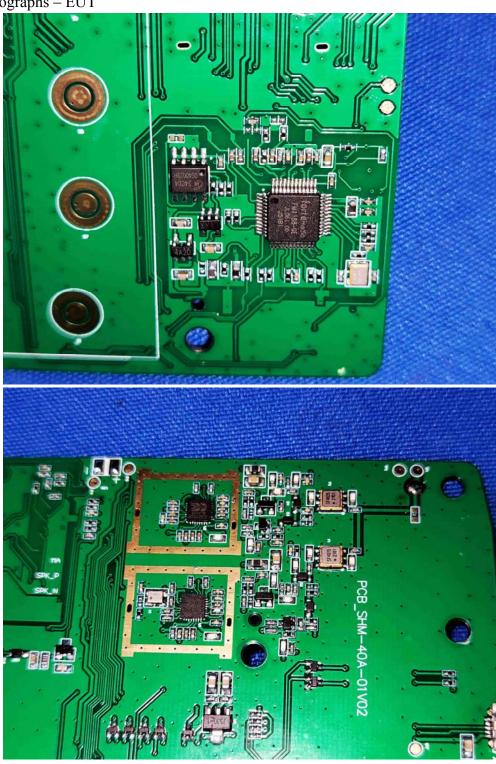

End of The Report

"The report refers only to the sample tested and does not apply to the bulk production.

This report is issued in confidential to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for illegal purpose. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate."