

# TEST REPORT

Report No.: BCTC2212689738-2E

---

Applicant: BEZALEL INC.

---

Product Name: Prelude XR Wireless Power Bank

---

Model/Type Ref.: BZ1PXR20

---

Tested Date: 2022-12-06 to 2023-03-27

---

Issued Date: 2023-03-27

---

**Shenzhen BCTC Testing Co., Ltd.**



# FCC ID: 2AS7K-BZ1PXR20

Product Name: Prelude XR Wireless Power Bank  
Trademark: BEZALEL  
Model/Type Ref.: BZ1PXR20  
Prepared For: BEZALEL INC.  
Address: 3528 Torrance Blvd., Ste. 215, Torrance, CA 90503, United States  
Manufacturer: BEZALEL INC.  
Address: 3528 Torrance Blvd., Ste. 215, Torrance, CA 90503, United States  
Prepared By: Shenzhen BCTC Testing Co., Ltd.  
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: 2022-12-06  
Sample tested Date: 2022-12-06 to 2023-03-27  
Issue Date: 2023-03-27  
Report No.: BCTC2212689738-2E  
Test Standards: FCC CFR 47 part1, 1.1307(b), 1.1310  
Test Results: PASS

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.



## Table Of Content

Test Report Declaration	Page
1. Version .....	4
2. Product Information .....	5
2.1 Product Information .....	5
2.2 Support Equipment .....	5
2.3 Test Mode .....	5
3. Test Facility And Test Instrument Used .....	6
3.1 Test Facility .....	6
3.2 Test Instrument Used .....	6
4. Method Of Measurement .....	7
4.1 Applicable Standard .....	7
4.2 Block Diagram Of Test Setup .....	7
4.3 Limit .....	8
4.4 Test Procedure .....	8
4.5 Equipment Approval Considerations .....	9
4.6 E And H Field Strength .....	10
5. Photographs Of Test Set-Up .....	22


(Note: N/A Means Not Applicable)

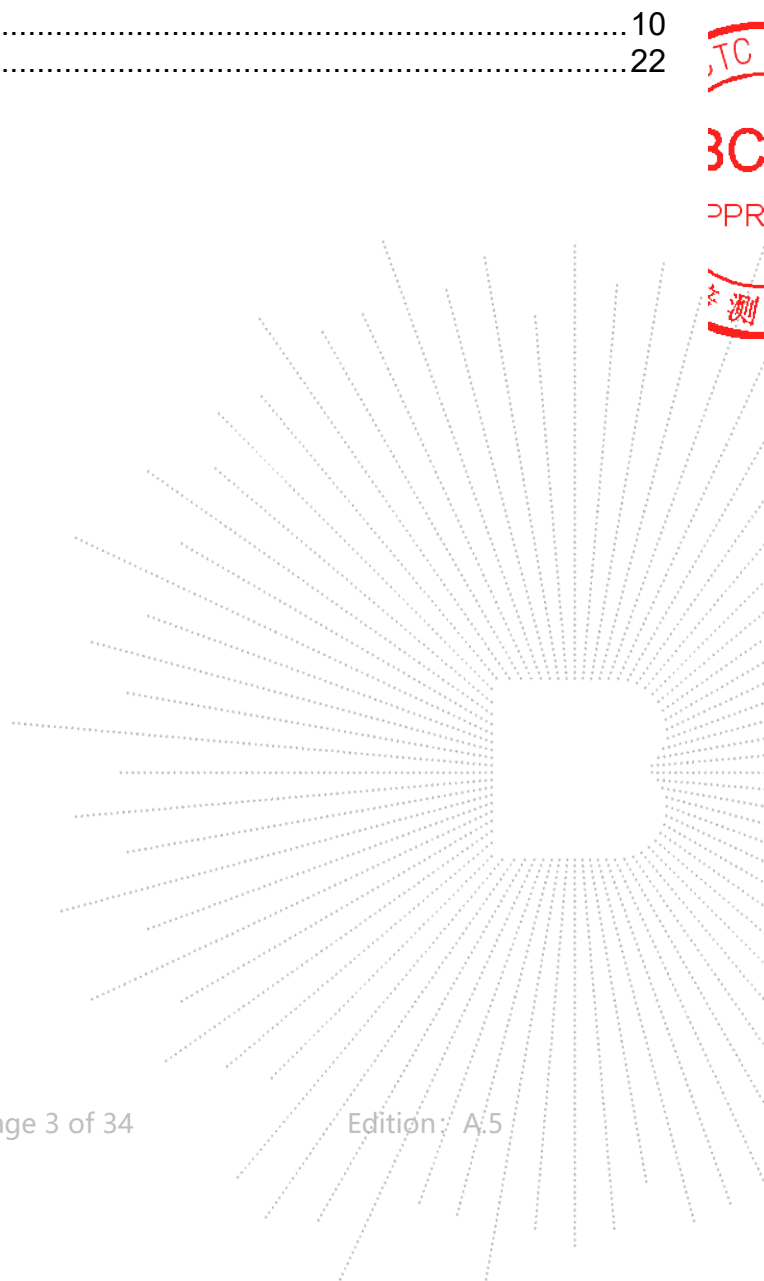

**1. Version**

Report No.	Issue Date	Description	Approved
BCTC2212689738-2E	2023-03-27	Original	Valid

TEC  
TC  
OVER  
檢

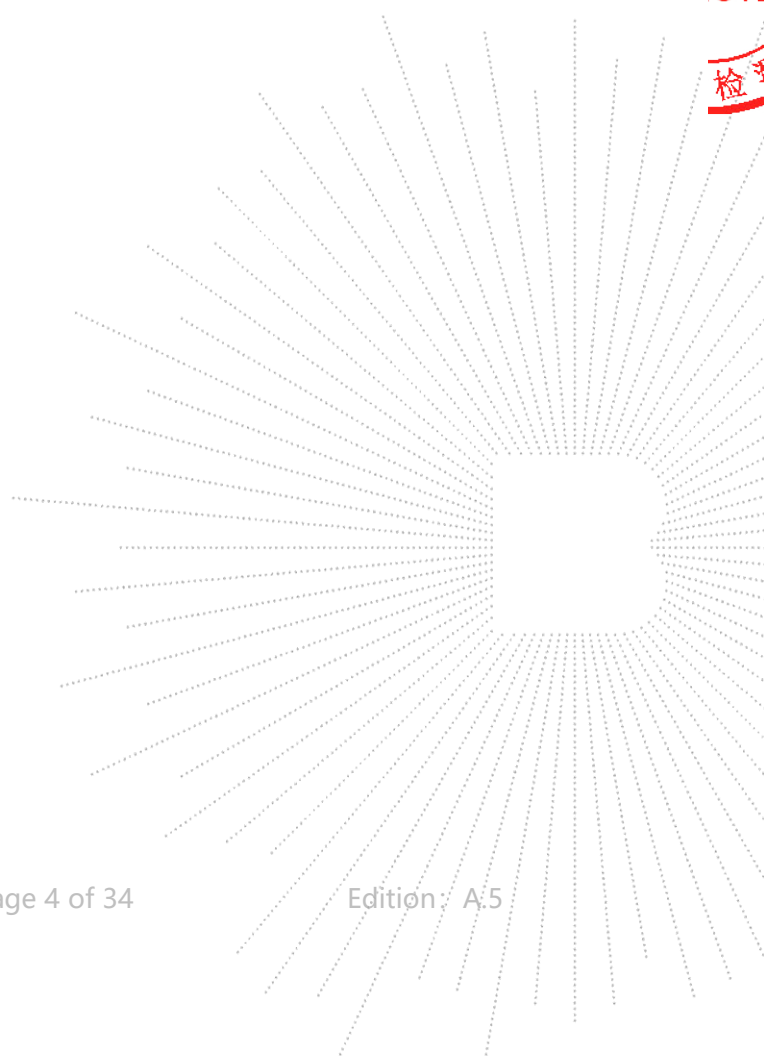

## 2. Product Information

### 2.1 Product Information

Model/Type Ref.:	BZ1PXR20
Model differences:	N/A
Product Description:	Prelude XR Wireless Power Bank
Operation Frequency:	115kHz-205kHz
Antenna installation:	loop coil antenna
Ratings:	USB-C Input: 5V3A;9V2.2A Input:Wireless:5V/1A,9V1.2A USB-C Output:5V/3A;9V/2.2A Wireless 1: Output:5W,7.5W,10W,15W Wireless 2:3W
Hardware Version:	N/A
Software Version:	N/A

#### Cable of Product

No.	Cable Type	Quantity	Provider	Length (m)	Shielded	Note
1	--	--	Applicant	---	Yes/No	With a ferrite ring in mid Detachable
2	--	--	BCTC	--	Yes/No	--

### 2.2 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
1.	Wireless load	---	---	---	auxiliary

#### Notes:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 2.3 Test Mode

Test Modes 1	Charging +Wireless (5W)
Test Modes 2	Wireless Charging 3W
Test Modes 3	Wireless Charging 5W
Test Modes 4	Wireless Charging 7.5W
Test Modes 5	Wireless Charging 10W
Test Modes 6	Wireless Charging 15W
Test Modes 7	Wireless Charging 5W+ Type-C Output 5V1.25A

### 3. Test Facility And Test Instrument Used


#### 3.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.  
 FCC Test Firm Registration Number: 712850  
 IC Registered No.: 23583

#### 3.2 Test Instrument Used

EMF Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Electromagnetic radiation tester	Wavecontrol	SMP160	19SN0980	May 26, 2022	May 25, 2023
Electromagnetic field probe	Wavecontrol	WP400-3	20WP120082	Sept. 08, 2022	Sept. 07, 2023

BCTC CO., LTD.

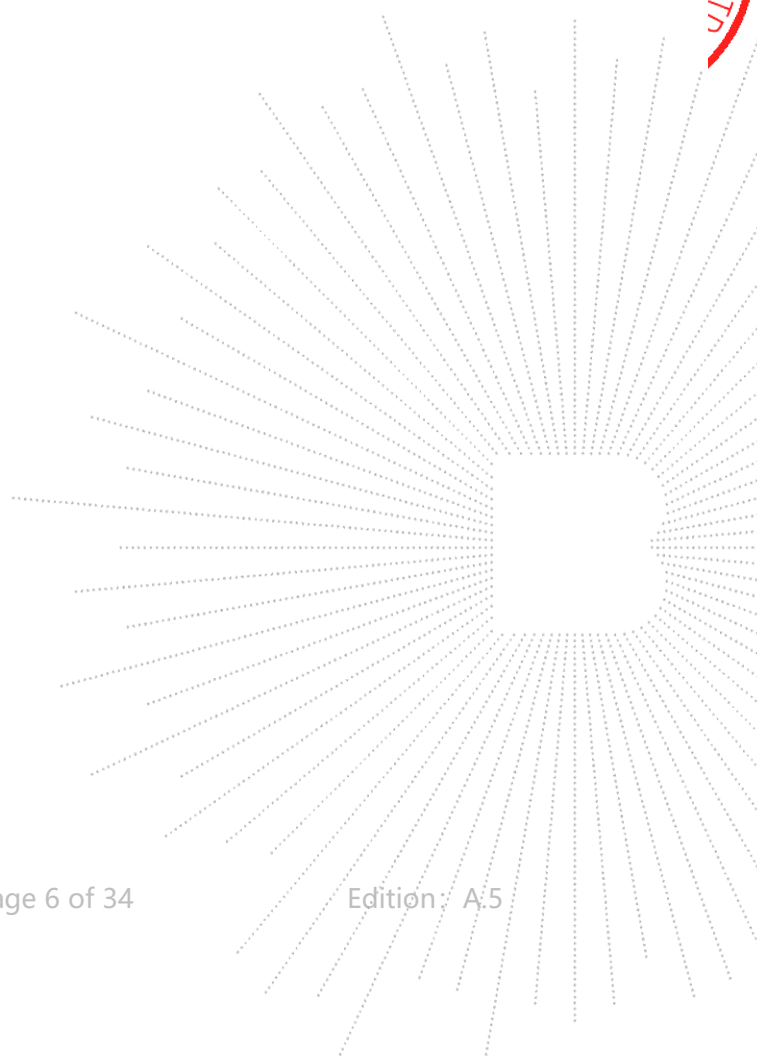


## 4. Method Of Measurement

### 4.1 Applicable Standard


According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01v03: RF Exposure Wireless Charging Apps v02.

### 4.2 Block Diagram Of Test Setup

A:

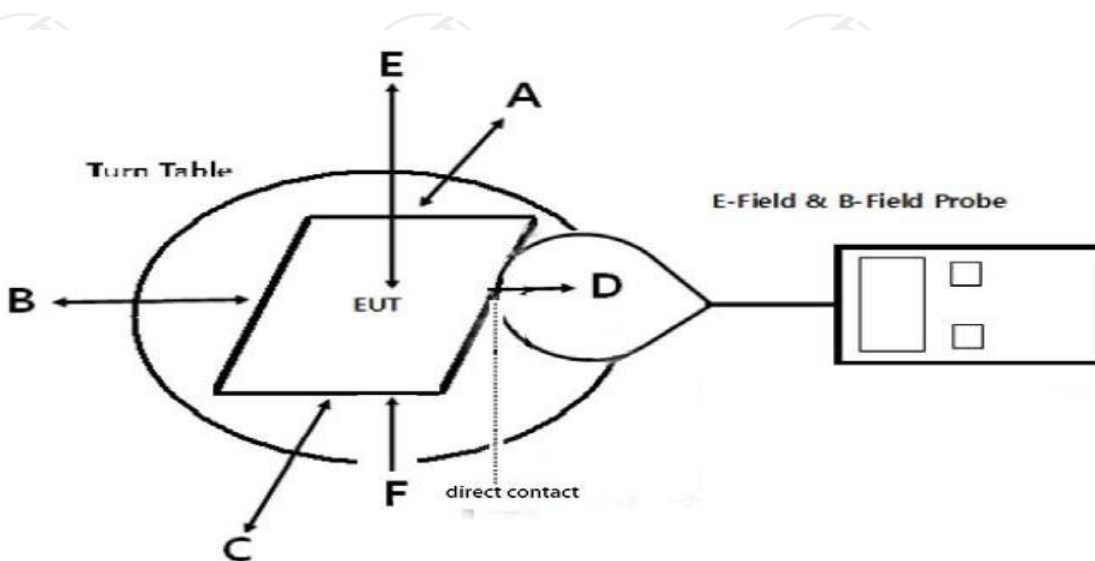

B:

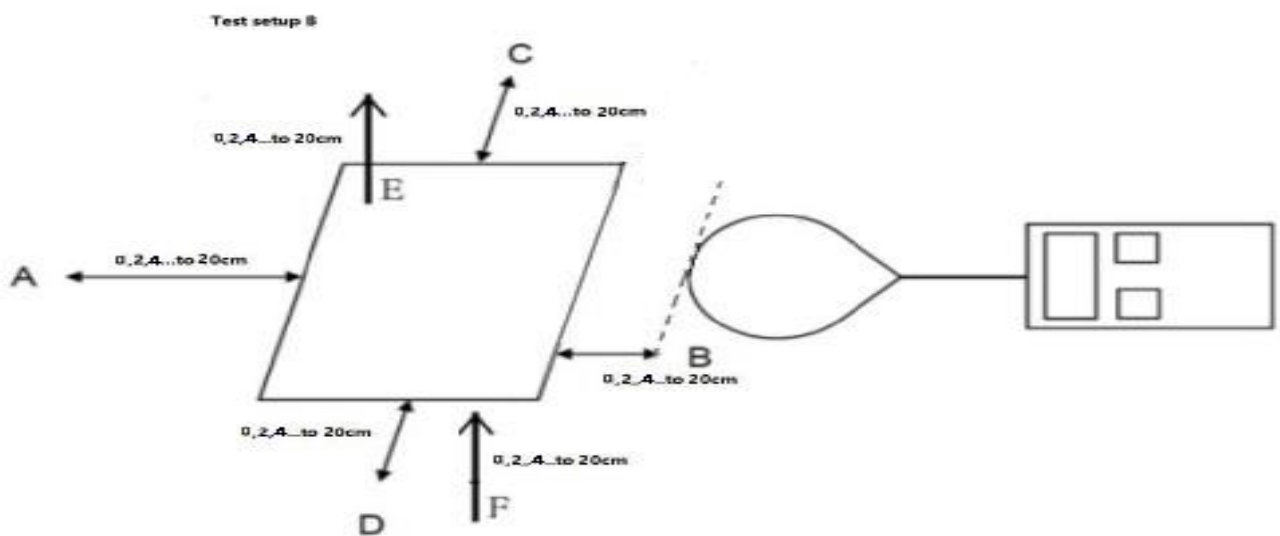

### 4.3 Limit

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

### 4.4 Test Procedure

- a) he RF exposure test was performed in anechoic chamber.
- b) The measurement probe was placed at 0 cm surrounding the device for test setup A; and the measurement Probe was placed from 0 cm to 20 cm, in 2 cm maximum increment measured from the edge of the device For the test setup B.
- c)The highest emission level was recorded and compared with limit as soon as measurement of eachd) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- d)The EUT was measured according to the dictates of KDB680106
- D01v03r01
- f)Remark:  
The EUT's test position A, B, C, D , E and F is valid for the E and H field measurements.



#### 4.5 Equipment Approval Considerations

The EUT does comply with item 5(b) of KDB 680106 D01v03

- 1) Power transfer frequency is less than 1MHz  
Yes, the device operate in the frequency range from 115-205KHz
- 2) Output power from each primary coil is less than or equal to 15 watts.  
Yes, the maximum output power of the primary coil is 15W.
- 3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that able to detect and allow coupling onlybetween individual pair of coils.  
No, the prototype has only a single coil.
- 4) Client device is inserted in or placed directly in contact with the transmitter.  
Yes, client device is placed directly in contact with the transmitter.
- 5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).  
No,The product is portable
- 6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.  
Yes, the EUT field strength levels are 10% x MPE limit.

#### 4.6 E And H Field Strength

Wireless Charging Area 1

For setup A:

Worst Case Operating Mode: Mode 6

H-Filed Strength at 0 cm from edges surrounding the EUT (A/m)

Frequency Range (KHz)	Operation condition	Test Position A (A/m)	Test Position B (A/m)	Test Position C (A/m)	Test Position D (A/m)	Test Position E (A/m)	Test Position F (A/m)	Limits (A/m)
115kHz-205kHz	1% battery	0.105	0.064	0.002	0.060	0.084	0.023	1.63
115kHz-205kHz	50% battery	0.079	0.115	0.090	0.091	0.004	0.104	1.63
115kHz-205kHz	99% battery	0.081	0.086	0.055	0.219	0.015	0.059	1.63

Frequency Range (KHz)	Operation condition	Test Position A (uT)	Test Position B (uT)	Test Position C (uT)	Test Position D (uT)	Test Position E (uT)	Test Position F (uT)	Limits (uT)
115kHz-205kHz	1% battery	0.132	0.080	0.002	0.075	0.105	0.029	2.038
115kHz-205kHz	50% battery	0.099	0.144	0.112	0.113	0.005	0.130	2.038
115kHz-205kHz	99% battery	0.101	0.107	0.069	0.274	0.019	0.074	2.038

Note:A/m=uT÷1.25

E-Filed Strength at 0 cm from edges surrounding the EUT (V/m)

Frequency Range (KHz)	Operation condition	Test Position A (V/m)	Test Position B (V/m)	Test Position C (V/m)	Test Position D (V/m)	Test Position E (V/m)	Test Position F (V/m)	Limits (V/m)
115kHz-205kHz	1% battery	0.022	0.118	0.031	0.013	0.062	0.089	614
115kHz-205kHz	50% battery	0.006	0.104	0.076	0.148	0.057	0.147	614
115kHz-205kHz	99% battery	0.050	0.067	0.008	0.004	0.045	0.017	614

TE  
TC  
OV  
檢

For setup B:  
Worst Case Operating Mode: Mode 6


1% battery

H-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0	0.028	0.102	0.078	0.179	0.004	0.031	1.63
2	0.061	0.019	0.020	0.135	0.048	0.030	1.63
4	0.011	0.013	0.035	0.136	0.009	0.011	1.63
6	0.054	0.074	0.038	0.069	0.008	0.066	1.63
8	0.091	0.032	0.085	0.210	0.055	0.097	1.63
10	0.057	0.013	0.092	0.029	0.038	0.034	1.63
12	0.017	0.032	0.015	0.193	0.055	0.059	1.63
14	0.072	0.114	0.001	0.101	0.033	0.089	1.63
16	0.028	0.114	0.056	0.021	0.022	0.008	1.63
18	0.048	0.045	0.014	0.072	0.038	0.095	1.63
20	0.009	0.052	0.016	0.091	0.087	0.147	1.63

Test distance (cm)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position F(uT)	Limits (uT)
0	0.035	0.128	0.097	0.224	0.006	0.039	2.038
2	0.077	0.024	0.025	0.168	0.060	0.038	2.038
4	0.013	0.016	0.044	0.169	0.011	0.014	2.038
6	0.068	0.093	0.048	0.086	0.011	0.082	2.038
8	0.114	0.040	0.107	0.262	0.069	0.121	2.038
10	0.071	0.016	0.115	0.037	0.048	0.043	2.038
12	0.021	0.040	0.019	0.242	0.068	0.073	2.038
14	0.090	0.142	0.002	0.126	0.042	0.112	2.038
16	0.035	0.142	0.070	0.026	0.028	0.010	2.038
18	0.061	0.056	0.017	0.090	0.047	0.118	2.038
20	0.012	0.064	0.020	0.114	0.109	0.183	2.038

Note: A/m = uT ÷ 1.25

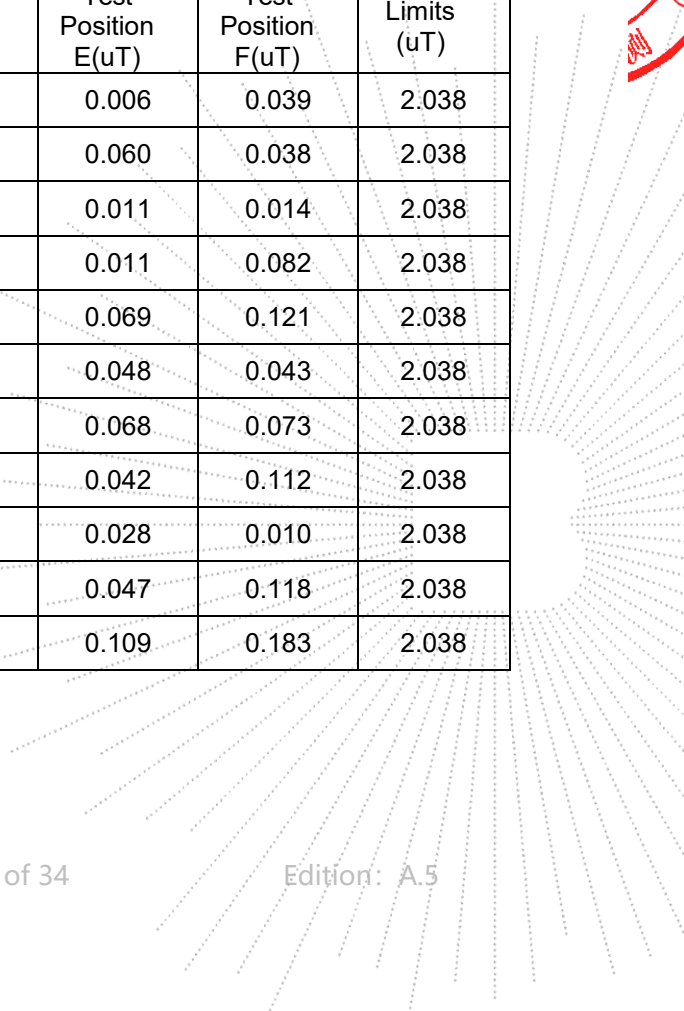

## E-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (V/m)

Test distance (cm)	Test Position A(V/m)	Test Position B(V/m)	Test Position C(V/m)	Test Position D(V/m)	Test Position E(V/m)	Test Position F(V/m)	Limits (V/m)
0	0.098	0.049	0.071	0.189	0.020	0.131	614
2	0.094	0.078	0.046	0.004	0.050	0.029	614
4	0.077	0.093	0.092	0.020	0.083	0.031	614
6	0.017	0.000	0.054	0.156	0.050	0.036	614
8	0.053	0.005	0.083	0.136	0.082	0.154	614
10	0.028	0.119	0.018	0.070	0.054	0.108	614
12	0.090	0.013	0.070	0.107	0.037	0.133	614
14	0.005	0.078	0.064	0.014	0.059	0.055	614
16	0.104	0.009	0.046	0.101	0.010	0.044	614
18	0.036	0.051	0.046	0.120	0.041	0.151	614
20	0.087	0.020	0.081	0.047	0.057	0.020	614

## 50% battery

## H-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0	0.057	0.112	0.030	0.189	0.030	0.046	1.63
2	0.077	0.116	0.020	0.113	0.015	0.067	1.63
4	0.095	0.054	0.040	0.079	0.077	0.009	1.63
6	0.022	0.070	0.086	0.189	0.078	0.043	1.63
8	0.080	0.059	0.047	0.212	0.010	0.026	1.63
10	0.044	0.030	0.064	0.191	0.027	0.040	1.63
12	0.094	0.029	0.075	0.053	0.045	0.043	1.63
14	0.012	0.087	0.070	0.164	0.072	0.140	1.63
16	0.022	0.055	0.075	0.178	0.031	0.110	1.63
18	0.022	0.016	0.063	0.166	0.061	0.142	1.63
20	0.089	0.043	0.048	0.065	0.061	0.116	1.63

Test distance (cm)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position F(uT)	Limits (uT)
0	0.071	0.140	0.037	0.236	0.037	0.057	2.038
2	0.097	0.145	0.025	0.141	0.019	0.084	2.038
4	0.119	0.067	0.051	0.099	0.096	0.011	2.038
6	0.027	0.087	0.107	0.236	0.098	0.054	2.038
8	0.100	0.073	0.059	0.265	0.013	0.032	2.038
10	0.055	0.038	0.080	0.239	0.034	0.050	2.038
12	0.117	0.036	0.093	0.066	0.056	0.054	2.038
14	0.016	0.109	0.088	0.205	0.090	0.175	2.038
16	0.027	0.069	0.094	0.222	0.039	0.137	2.038
18	0.028	0.020	0.079	0.208	0.076	0.177	2.038
20	0.111	0.054	0.061	0.081	0.076	0.145	2.038

Note: A/m = uT ÷ 1.25

## E-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (V/m)

Test distance (cm)	Test Position A(V/m)	Test Position B(V/m)	Test Position C(V/m)	Test Position D(V/m)	Test Position E(V/m)	Test Position F(V/m)	Limits (V/m)
0	0.025	0.091	0.083	0.156	0.059	0.002	614
2	0.084	0.108	0.052	0.085	0.064	0.063	614
4	0.072	0.082	0.056	0.038	0.010	0.015	614
6	0.033	0.102	0.011	0.058	0.021	0.143	614
8	0.058	0.048	0.010	0.082	0.024	0.081	614
10	0.005	0.068	0.033	0.021	0.079	0.054	614
12	0.104	0.075	0.017	0.141	0.011	0.042	614
14	0.092	0.073	0.059	0.099	0.065	0.088	614
16	0.027	0.038	0.074	0.133	0.069	0.093	614
18	0.019	0.077	0.048	0.071	0.034	0.120	614
20	0.069	0.116	0.084	0.216	0.078	0.129	614


99% battery

H-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0	0.037	0.044	0.033	0.113	0.051	0.091	1.63
2	0.055	0.019	0.001	0.203	0.088	0.093	1.63
4	0.039	0.101	0.077	0.008	0.040	0.107	1.63
6	0.020	0.021	0.054	0.054	0.060	0.073	1.63
8	0.023	0.029	0.059	0.140	0.046	0.118	1.63
10	0.101	0.054	0.065	0.210	0.082	0.140	1.63
12	0.075	0.032	0.001	0.069	0.038	0.114	1.63
14	0.070	0.053	0.092	0.009	0.057	0.022	1.63
16	0.105	0.060	0.046	0.096	0.014	0.142	1.63
18	0.107	0.076	0.082	0.136	0.067	0.094	1.63
20	0.008	0.086	0.054	0.070	0.027	0.145	1.63

Test distance (cm)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position F(uT)	Limits (uT)
0	0.046	0.055	0.041	0.141	0.063	0.113	2.038
2	0.068	0.024	0.002	0.254	0.110	0.116	2.038
4	0.049	0.126	0.096	0.010	0.050	0.134	2.038
6	0.024	0.026	0.067	0.068	0.075	0.091	2.038
8	0.028	0.036	0.073	0.175	0.057	0.148	2.038
10	0.126	0.067	0.081	0.262	0.103	0.175	2.038
12	0.094	0.039	0.001	0.087	0.047	0.143	2.038
14	0.088	0.066	0.115	0.011	0.072	0.027	2.038
16	0.131	0.075	0.057	0.120	0.018	0.177	2.038
18	0.134	0.095	0.102	0.170	0.083	0.117	2.038
20	0.010	0.108	0.068	0.088	0.033	0.181	2.038

Note:A/m=uT÷1.25

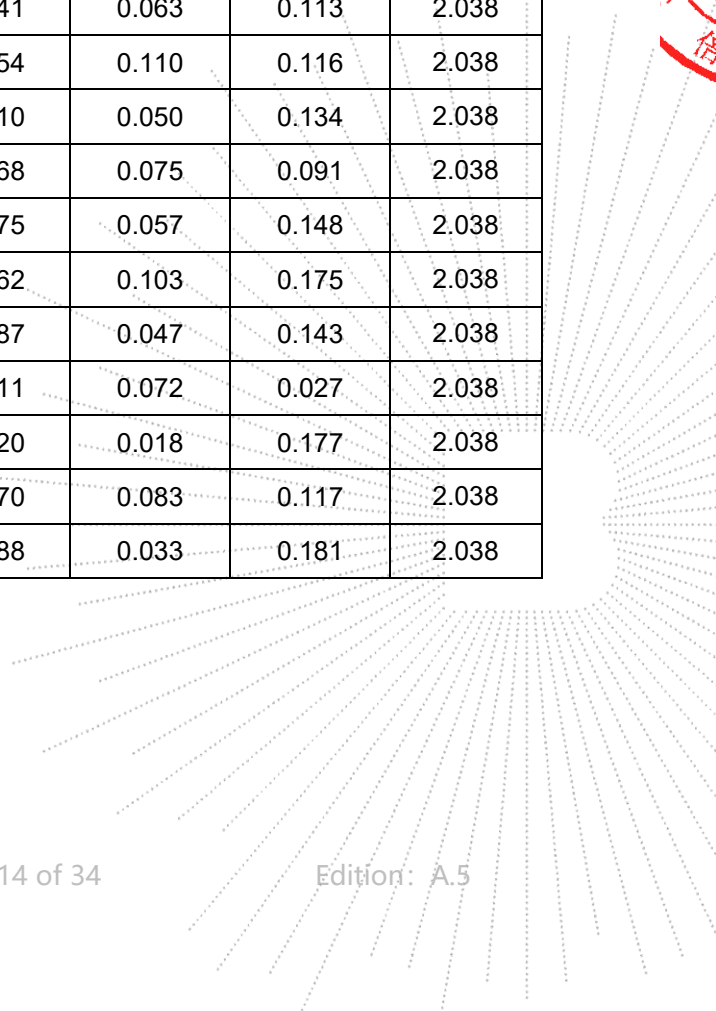


## E-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (V/m)

Test distance (cm)	Test Position A(V/m)	Test Position B(V/m)	Test Position C(V/m)	Test Position D(V/m)	Test Position E(V/m)	Test Position F(V/m)	Limits (V/m)
0	0.102	0.054	0.006	0.128	0.071	0.043	614
2	0.061	0.002	0.018	0.172	0.052	0.143	614
4	0.011	0.055	0.029	0.072	0.059	0.043	614
6	0.026	0.060	0.041	0.106	0.086	0.077	614
8	0.044	0.113	0.049	0.203	0.015	0.019	614
10	0.049	0.111	0.016	0.132	0.044	0.023	614
12	0.023	0.012	0.042	0.109	0.003	0.117	614
14	0.011	0.006	0.050	0.152	0.069	0.050	614
16	0.059	0.065	0.053	0.145	0.049	0.040	614
18	0.040	0.050	0.042	0.089	0.067	0.102	614
20	0.001	0.001	0.078	0.032	0.021	0.066	614

Note: In the frequency range of 1k-10M, except the fundamental frequency, other transmissions of the power transmission system are less than 20dB lower than the maximum fundamental transmission, so it is not necessary to evaluate.

TC  
3C  
PPR  
測

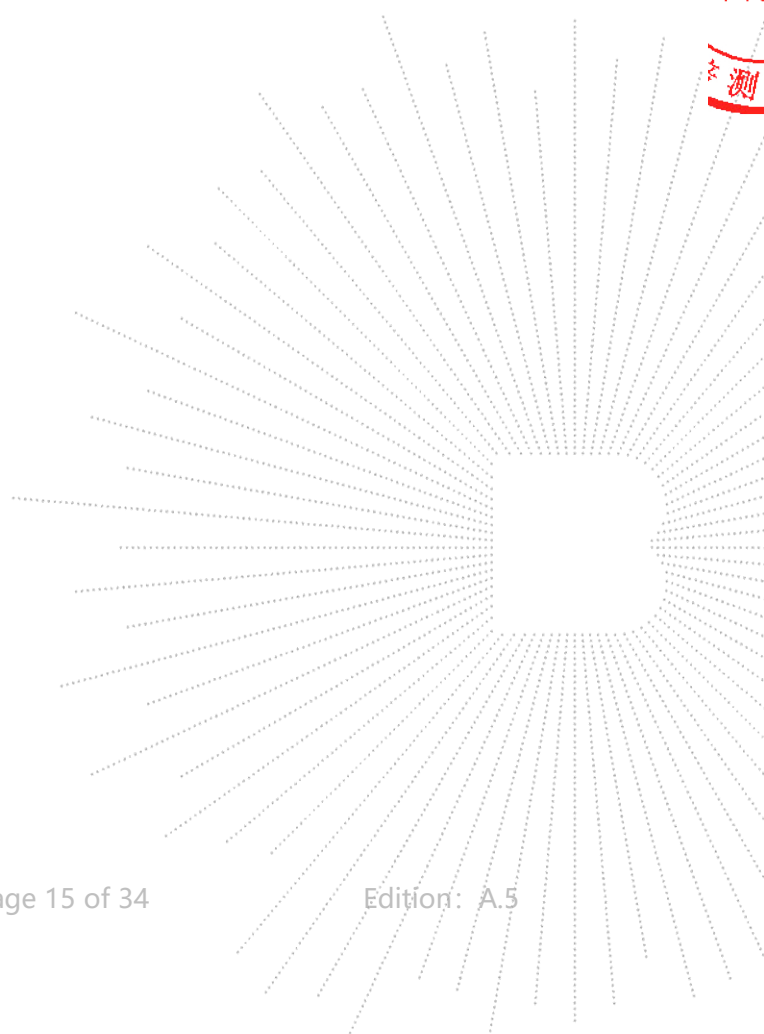

Wireless Charging Area 2  
 For setup A:  
 Worst Case Operating Mode: Mode 2

## H-Filed Strength at 0 cm from edges surrounding the EUT (A/m)

Frequency Range (KHz)	Operation condition	Test Position A (A/m)	Test Position B (A/m)	Test Position C (A/m)	Test Position D (A/m)	Test Position E (A/m)	Test Position F (A/m)	Limits (A/m)
115kHz-205kHz	1% battery	0.046	0.119	0.064	0.015	0.019	0.051	1.63
115kHz-205kHz	50% battery	0.000	0.122	0.013	0.052	0.037	0.077	1.63
115kHz-205kHz	99% battery	0.007	0.027	0.044	0.193	0.033	0.082	1.63


Frequency Range (KHz)	Operation condition	Test Position A (uT)	Test Position B (uT)	Test Position C (uT)	Test Position D (uT)	Test Position E (uT)	Test Position F (uT)	Limits (uT)
115kHz-205kHz	1% battery	0.058	0.149	0.080	0.018	0.024	0.064	2.038
115kHz-205kHz	50% battery	0.000	0.153	0.016	0.065	0.046	0.097	2.038
115kHz-205kHz	99% battery	0.008	0.033	0.055	0.241	0.041	0.103	2.038

Note: A/m = uT \* 1.25

## E-Filed Strength at 0 cm from edges surrounding the EUT (V/m)

Frequency Range (KHz)	Operation condition	Test Position A (V/m)	Test Position B (V/m)	Test Position C (V/m)	Test Position D (V/m)	Test Position E (V/m)	Test Position F (V/m)	Limits (V/m)
115kHz-205kHz	1% battery	0.037	0.047	0.033	0.194	0.067	0.028	614
115kHz-205kHz	50% battery	0.089	0.070	0.012	0.109	0.011	0.038	614
115kHz-205kHz	99% battery	0.109	0.024	0.037	0.049	0.076	0.043	614

TEC  
TC  
OVER  
検査

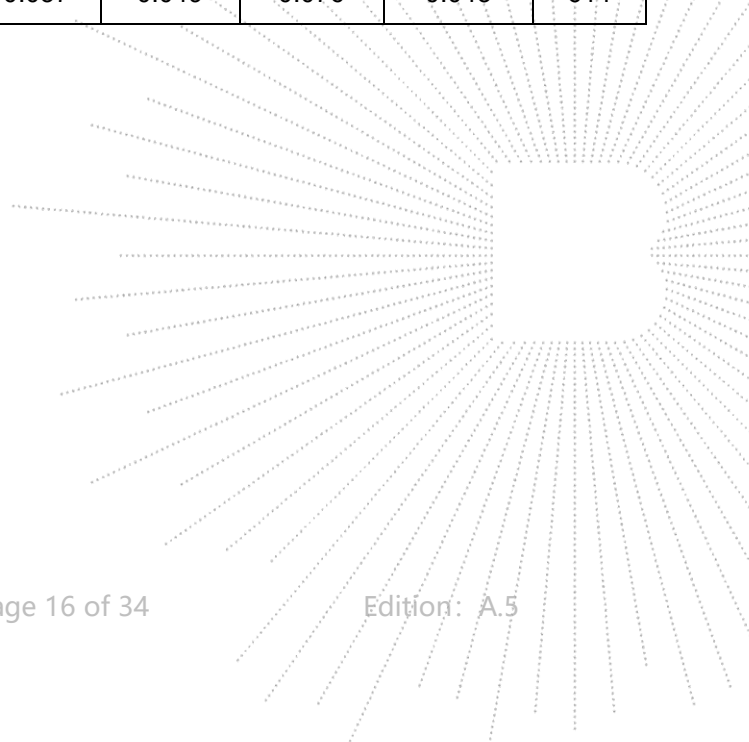



For setup B:  
Worst Case Operating Mode: Mode 2


1% battery

H-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0	0.021	0.047	0.082	0.130	0.002	0.046	1.63
2	0.010	0.101	0.014	0.217	0.044	0.078	1.63
4	0.040	0.090	0.089	0.036	0.023	0.118	1.63
6	0.048	0.029	0.082	0.097	0.086	0.146	1.63
8	0.102	0.110	0.056	0.180	0.009	0.121	1.63
10	0.081	0.069	0.016	0.138	0.022	0.118	1.63
12	0.062	0.030	0.074	0.082	0.078	0.116	1.63
14	0.080	0.063	0.010	0.112	0.011	0.099	1.63
16	0.025	0.065	0.047	0.134	0.010	0.080	1.63
18	0.088	0.035	0.040	0.220	0.070	0.050	1.63
20	0.003	0.009	0.021	0.171	0.061	0.149	1.63

Test distance (cm)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position F(uT)	Limits (uT)
0	0.027	0.059	0.103	0.163	0.002	0.058	2.038
2	0.012	0.126	0.017	0.271	0.055	0.097	2.038
4	0.050	0.112	0.111	0.046	0.029	0.148	2.038
6	0.060	0.036	0.102	0.121	0.108	0.182	2.038
8	0.127	0.137	0.070	0.225	0.011	0.151	2.038
10	0.101	0.086	0.020	0.173	0.027	0.147	2.038
12	0.078	0.037	0.093	0.103	0.098	0.145	2.038
14	0.100	0.079	0.013	0.140	0.014	0.124	2.038
16	0.031	0.081	0.059	0.167	0.013	0.100	2.038
18	0.110	0.043	0.050	0.275	0.088	0.062	2.038
20	0.003	0.011	0.026	0.214	0.076	0.186	2.038

Note: A/m = uT ÷ 1.25

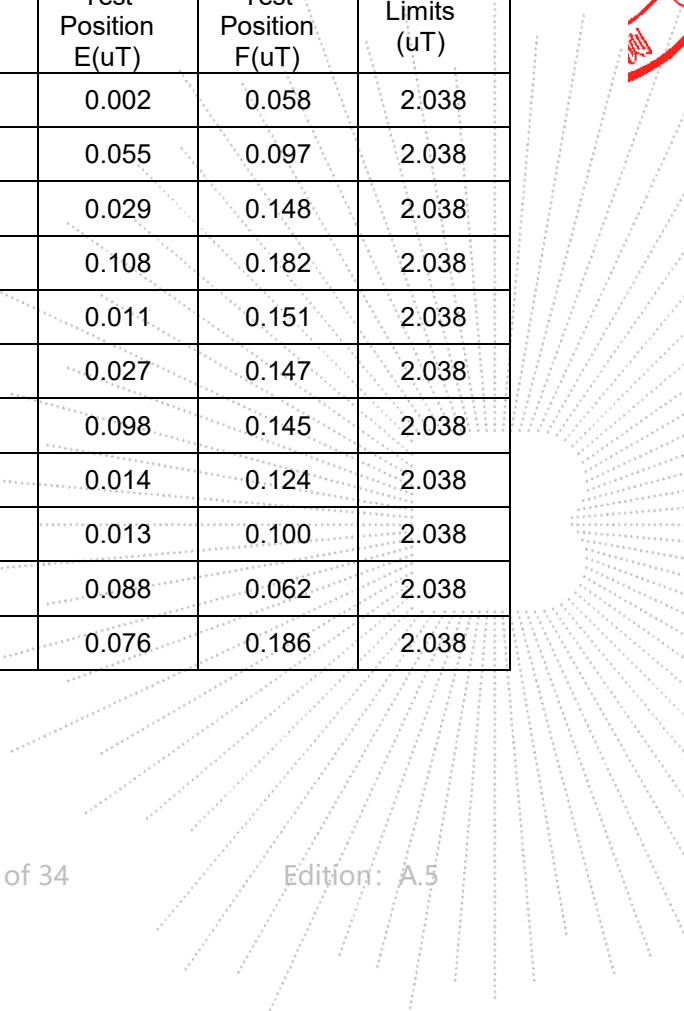

**E-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (V/m)**

Test distance (cm)	Test Position A(V/m)	Test Position B(V/m)	Test Position C(V/m)	Test Position D(V/m)	Test Position E(V/m)	Test Position F(V/m)	Limits (V/m)
0	0.014	0.114	0.089	0.110	0.071	0.100	614
2	0.110	0.067	0.023	0.083	0.075	0.138	614
4	0.061	0.014	0.093	0.170	0.059	0.024	614
6	0.109	0.074	0.034	0.156	0.068	0.056	614
8	0.001	0.109	0.083	0.193	0.020	0.128	614
10	0.087	0.095	0.028	0.176	0.072	0.065	614
12	0.054	0.055	0.071	0.087	0.042	0.072	614
14	0.085	0.069	0.010	0.099	0.042	0.109	614
16	0.006	0.013	0.086	0.115	0.010	0.129	614
18	0.095	0.067	0.058	0.100	0.039	0.065	614
20	0.014	0.070	0.076	0.066	0.010	0.023	614

**50% battery**
**H-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (A/m)**

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0	0.068	0.107	0.062	0.122	0.023	0.063	1.63
2	0.102	0.085	0.049	0.076	0.088	0.128	1.63
4	0.080	0.044	0.082	0.046	0.085	0.003	1.63
6	0.008	0.085	0.005	0.181	0.000	0.132	1.63
8	0.072	0.039	0.061	0.188	0.075	0.070	1.63
10	0.063	0.079	0.012	0.051	0.033	0.059	1.63
12	0.038	0.019	0.065	0.162	0.015	0.048	1.63
14	0.027	0.065	0.076	0.144	0.001	0.110	1.63
16	0.069	0.112	0.050	0.072	0.048	0.102	1.63
18	0.098	0.004	0.013	0.052	0.012	0.063	1.63
20	0.078	0.105	0.088	0.103	0.036	0.006	1.63

Test distance (cm)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position F(uT)	Limits (uT)
0	0.085	0.134	0.078	0.152	0.029	0.079	2.038
2	0.127	0.106	0.062	0.094	0.110	0.159	2.038
4	0.100	0.054	0.102	0.058	0.106	0.004	2.038
6	0.010	0.106	0.006	0.227	0.000	0.165	2.038
8	0.090	0.049	0.077	0.235	0.093	0.088	2.038
10	0.079	0.099	0.015	0.064	0.041	0.074	2.038
12	0.048	0.024	0.081	0.202	0.019	0.060	2.038
14	0.034	0.081	0.095	0.180	0.001	0.137	2.038
16	0.086	0.140	0.062	0.090	0.060	0.128	2.038
18	0.122	0.005	0.016	0.065	0.015	0.079	2.038
20	0.098	0.131	0.110	0.128	0.045	0.007	2.038

Note: A/m = uT ÷ 1.25

E-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (V/m)

Test distance (cm)	Test Position A(V/m)	Test Position B(V/m)	Test Position C(V/m)	Test Position D(V/m)	Test Position E(V/m)	Test Position F(V/m)	Limits (V/m)
0	0.052	0.111	0.027	0.044	0.000	0.152	614
2	0.099	0.114	0.026	0.145	0.066	0.093	614
4	0.048	0.051	0.062	0.020	0.038	0.034	614
6	0.073	0.039	0.076	0.170	0.083	0.067	614
8	0.034	0.104	0.029	0.219	0.073	0.113	614
10	0.049	0.010	0.079	0.032	0.018	0.054	614
12	0.102	0.041	0.083	0.104	0.067	0.136	614
14	0.027	0.007	0.067	0.167	0.082	0.078	614
16	0.066	0.052	0.024	0.121	0.012	0.106	614
18	0.026	0.050	0.027	0.109	0.075	0.035	614
20	0.006	0.072	0.002	0.133	0.030	0.116	614


99% battery

H-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0	0.039	0.110	0.090	0.103	0.026	0.075	1.63
2	0.057	0.071	0.078	0.188	0.044	0.115	1.63
4	0.033	0.111	0.041	0.159	0.014	0.009	1.63
6	0.092	0.019	0.082	0.129	0.032	0.025	1.63
8	0.078	0.095	0.021	0.072	0.048	0.129	1.63
10	0.023	0.065	0.057	0.219	0.020	0.043	1.63
12	0.038	0.073	0.014	0.209	0.075	0.117	1.63
14	0.046	0.037	0.050	0.128	0.013	0.147	1.63
16	0.003	0.015	0.061	0.194	0.044	0.060	1.63
18	0.084	0.119	0.044	0.204	0.074	0.023	1.63
20	0.058	0.065	0.041	0.195	0.067	0.015	1.63

Test distance (cm)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position F(uT)	Limits (uT)
0	0.049	0.137	0.112	0.129	0.033	0.093	2.038
2	0.071	0.089	0.098	0.235	0.055	0.143	2.038
4	0.042	0.139	0.051	0.198	0.018	0.011	2.038
6	0.115	0.024	0.102	0.162	0.040	0.031	2.038
8	0.098	0.119	0.026	0.090	0.060	0.162	2.038
10	0.029	0.081	0.071	0.274	0.025	0.053	2.038
12	0.048	0.091	0.017	0.262	0.094	0.146	2.038
14	0.058	0.047	0.062	0.160	0.016	0.184	2.038
16	0.004	0.019	0.076	0.243	0.055	0.075	2.038
18	0.105	0.149	0.055	0.256	0.093	0.028	2.038
20	0.072	0.082	0.051	0.244	0.084	0.019	2.038

Note:A/m=uT÷1.25

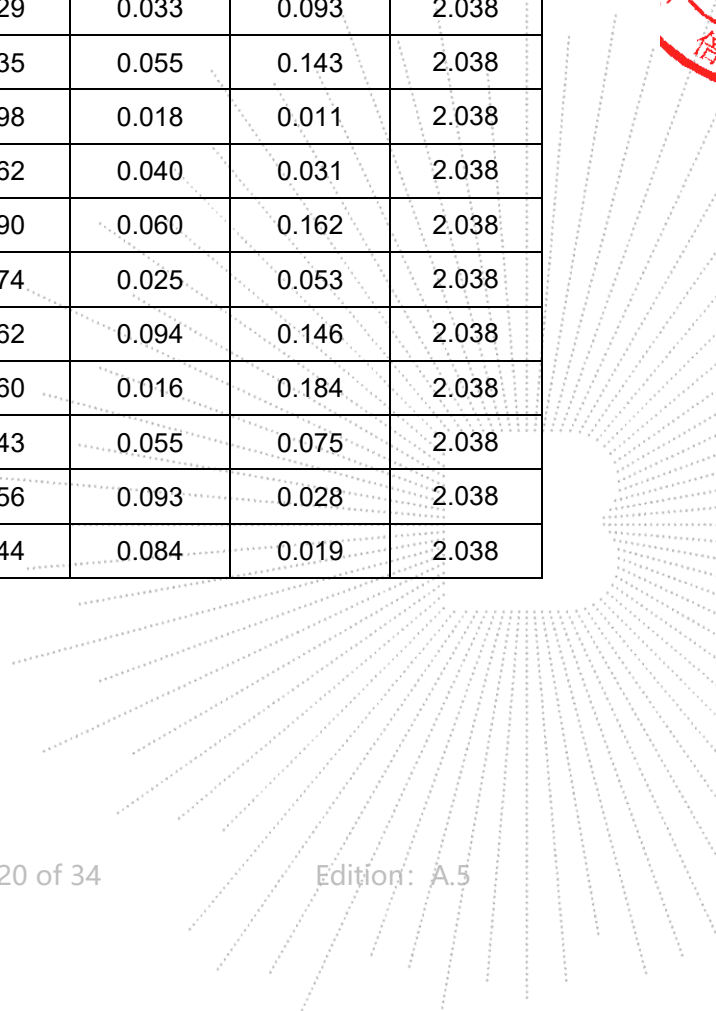


## E-Filed Strength at (distance from 0cm to 20cm at 2cm iteration) surrounding the EUT (V/m)

Test distance (cm)	Test Position A(V/m)	Test Position B(V/m)	Test Position C(V/m)	Test Position D(V/m)	Test Position E(V/m)	Test Position F(V/m)	Limits (V/m)
0	0.059	0.045	0.060	0.199	0.039	0.075	614
2	0.038	0.071	0.034	0.085	0.002	0.154	614
4	0.043	0.045	0.087	0.112	0.086	0.098	614
6	0.092	0.033	0.063	0.211	0.061	0.022	614
8	0.052	0.034	0.043	0.192	0.005	0.132	614
10	0.086	0.119	0.065	0.094	0.087	0.116	614
12	0.101	0.047	0.003	0.066	0.012	0.122	614
14	0.068	0.069	0.039	0.204	0.020	0.096	614
16	0.074	0.056	0.036	0.215	0.035	0.146	614
18	0.062	0.001	0.038	0.166	0.086	0.133	614
20	0.087	0.067	0.078	0.047	0.025	0.056	614

Note: In the frequency range of 1k-10M, except the fundamental frequency, other transmissions of the power transmission system are less than 20dB lower than the maximum fundamental transmission, so it is not necessary to evaluate.

TC  
3C  
PPR  
測

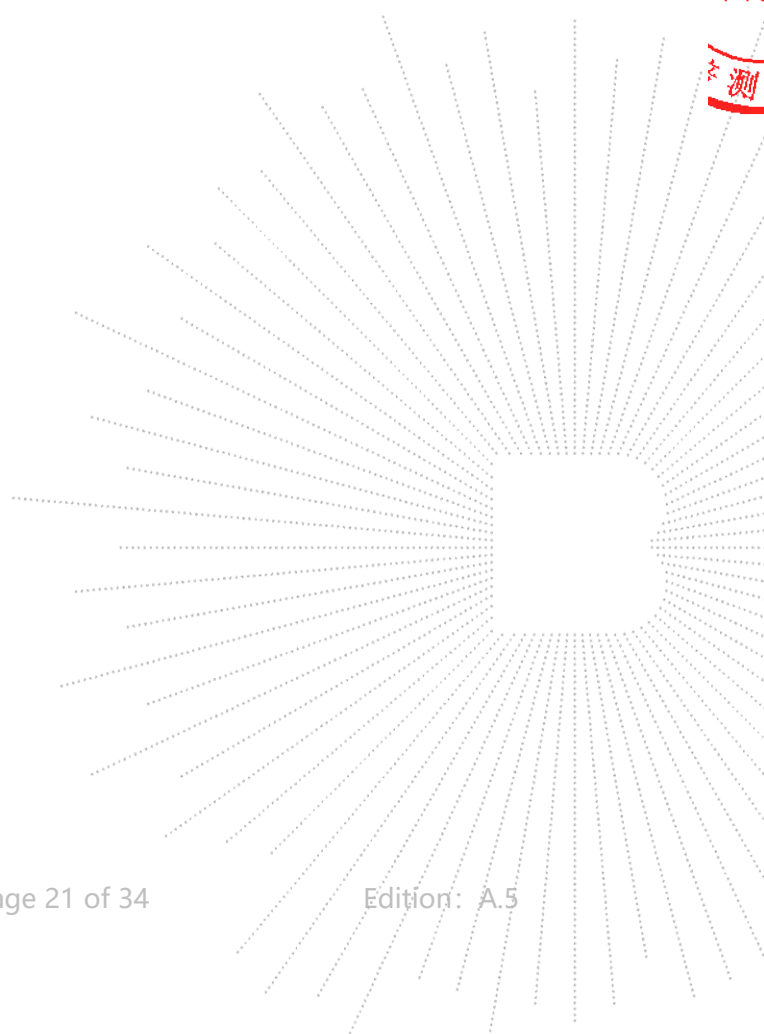



**5. Photographs Of Test Set-Up**

**0CM**



TEC  
TC  
OVB  
檢

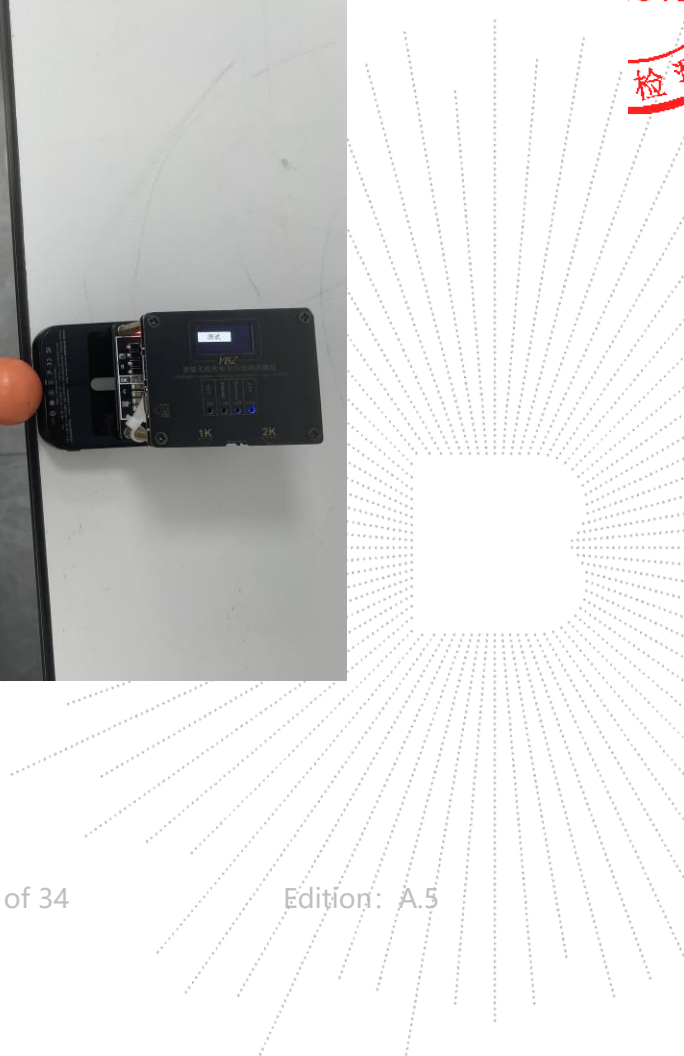

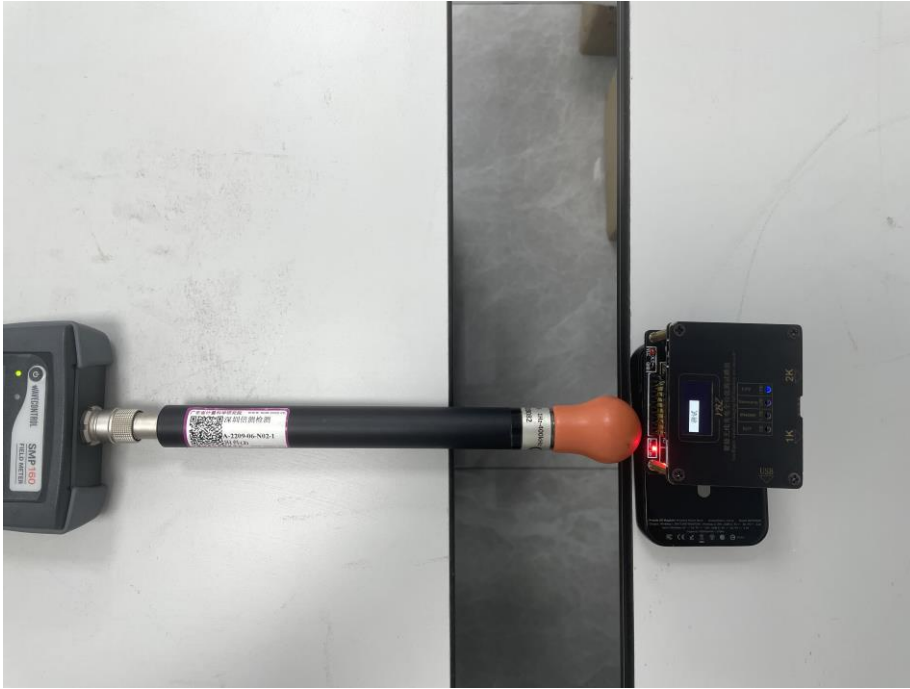




CO., LTD








**20CM**

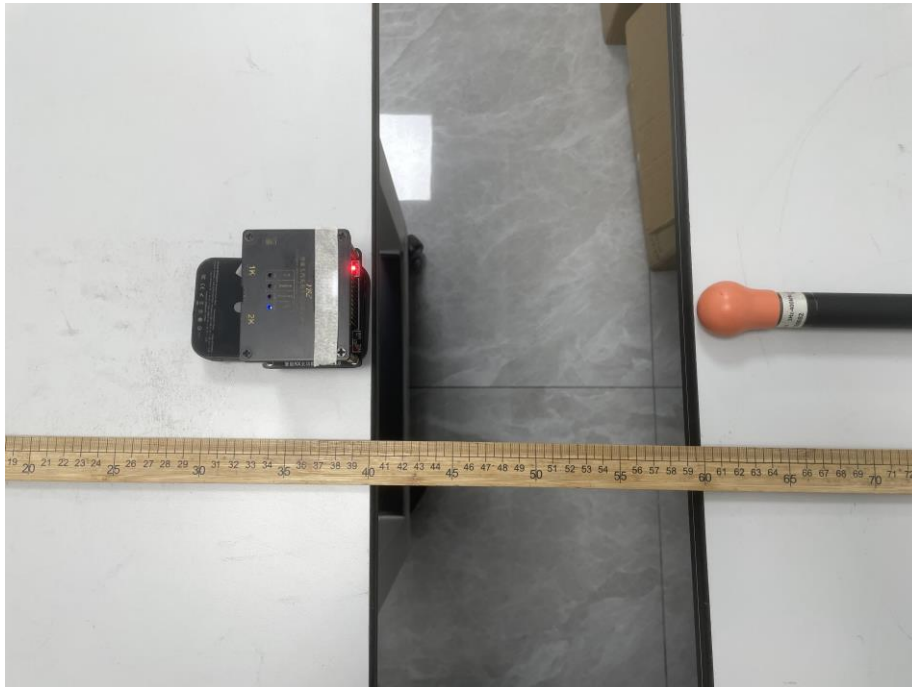

SHENZHEN

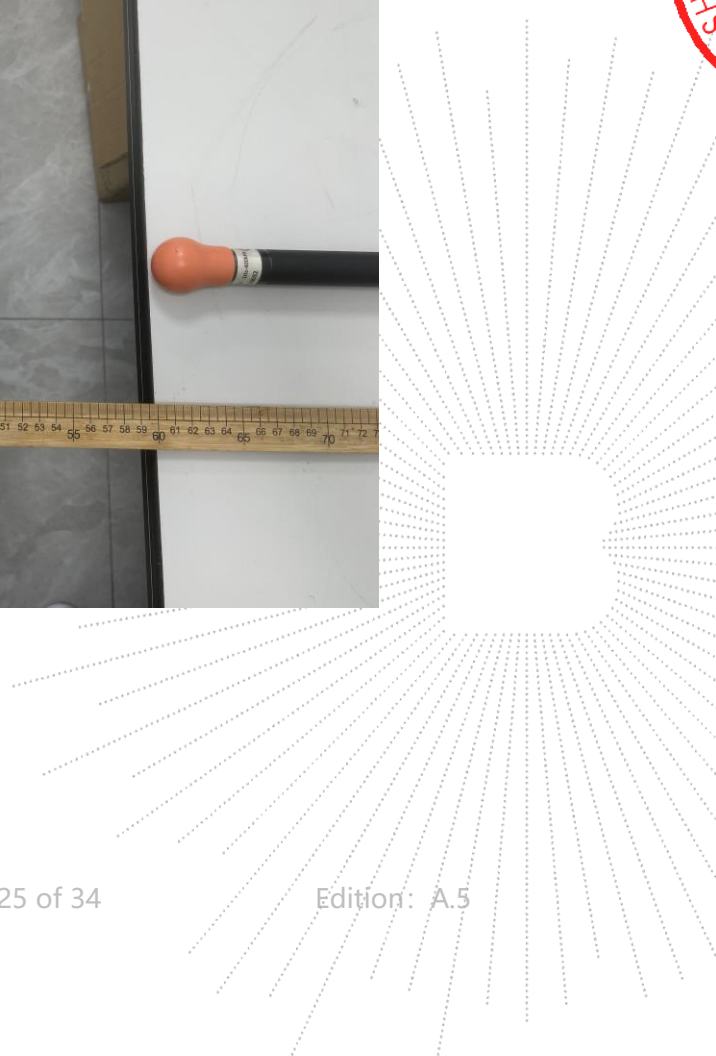

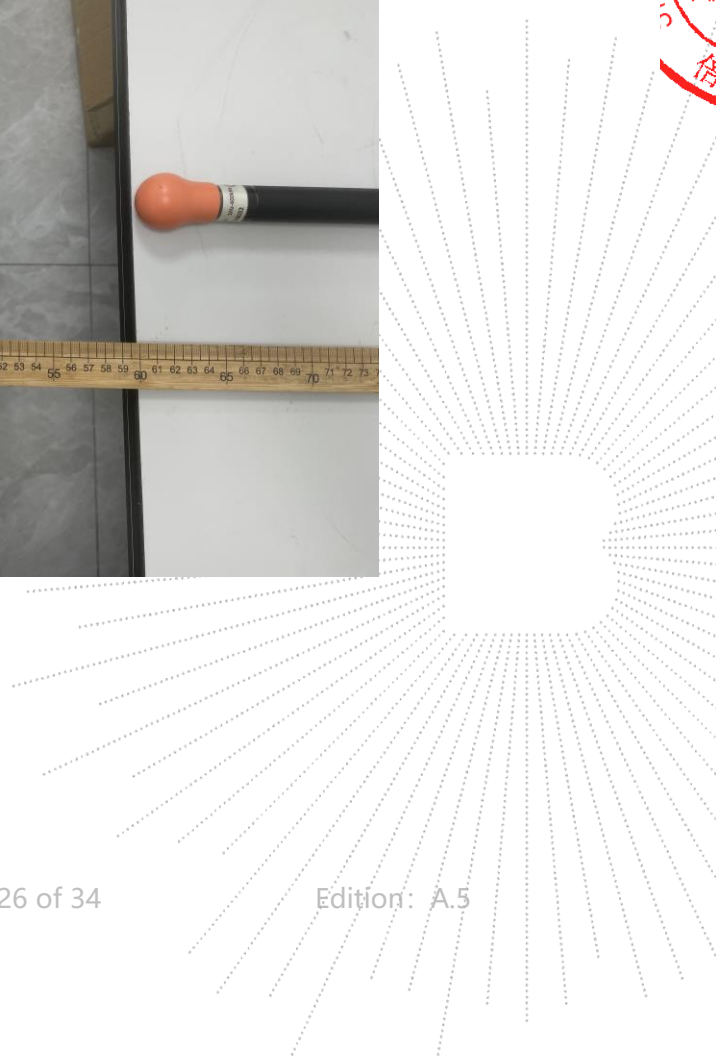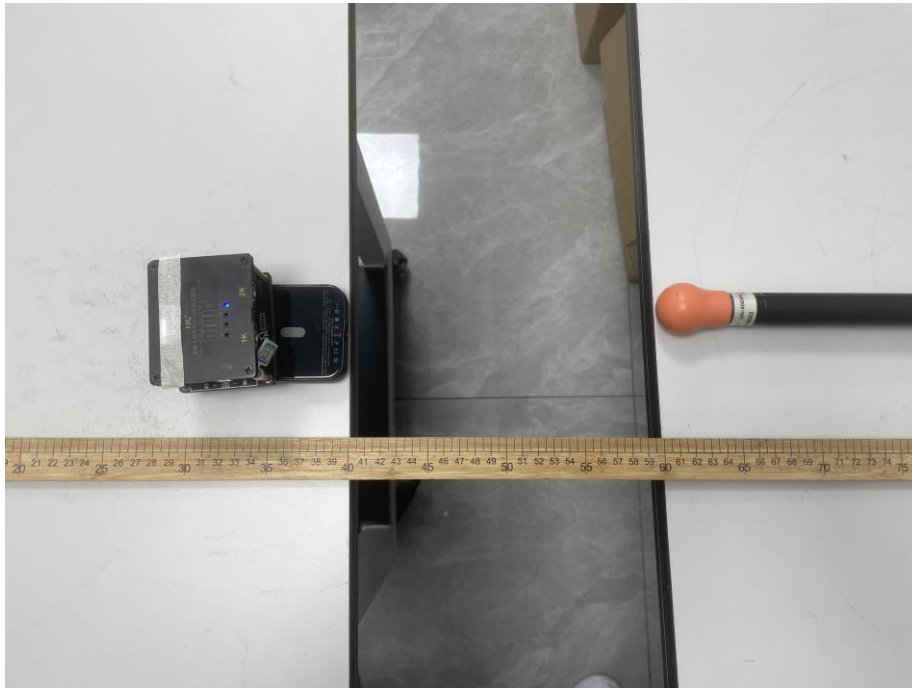




TC  
3C  
PPR  
測




**OCM (Wireless Charging Area 2)**




TEC  
TC  
OVB  
檢

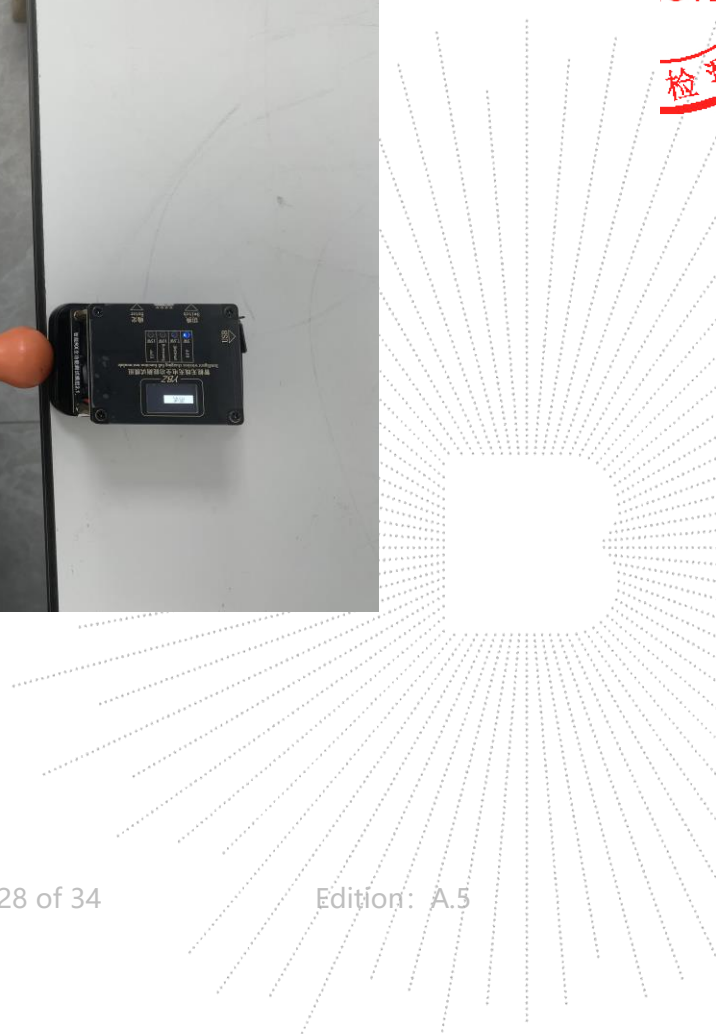


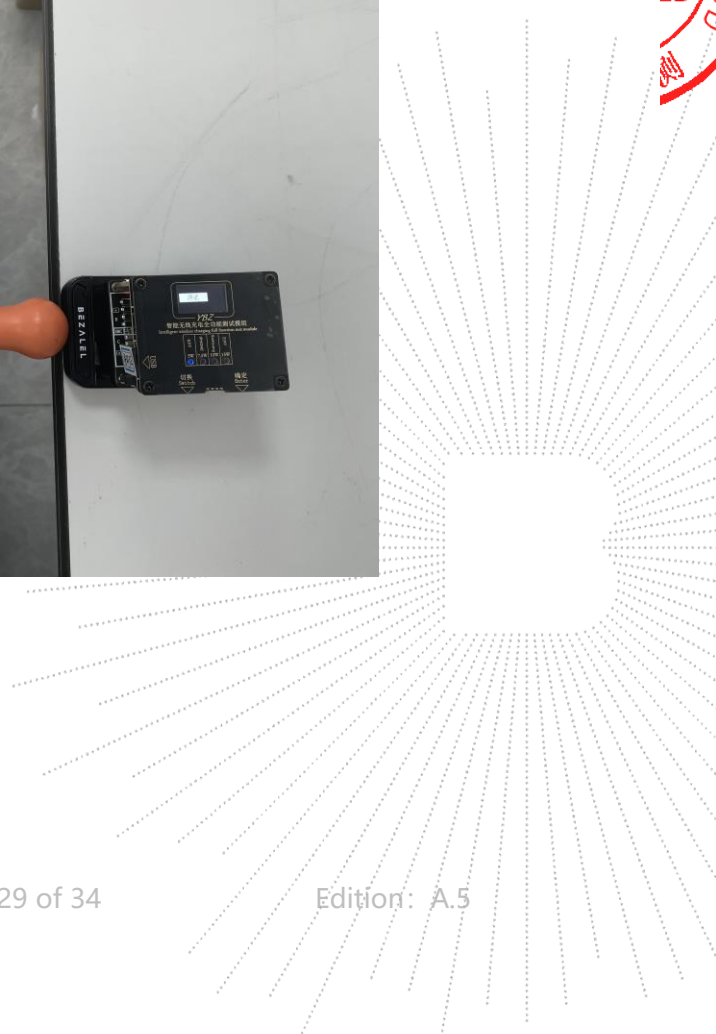




CO., LTD

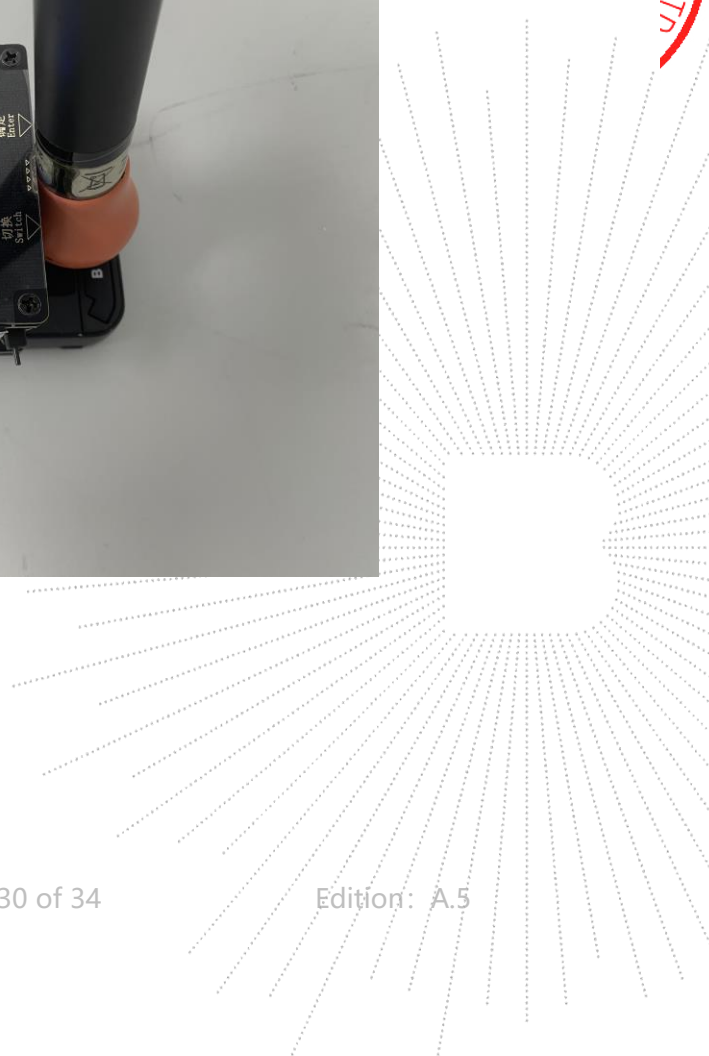


**20CM (Wireless Charging Area 2)**

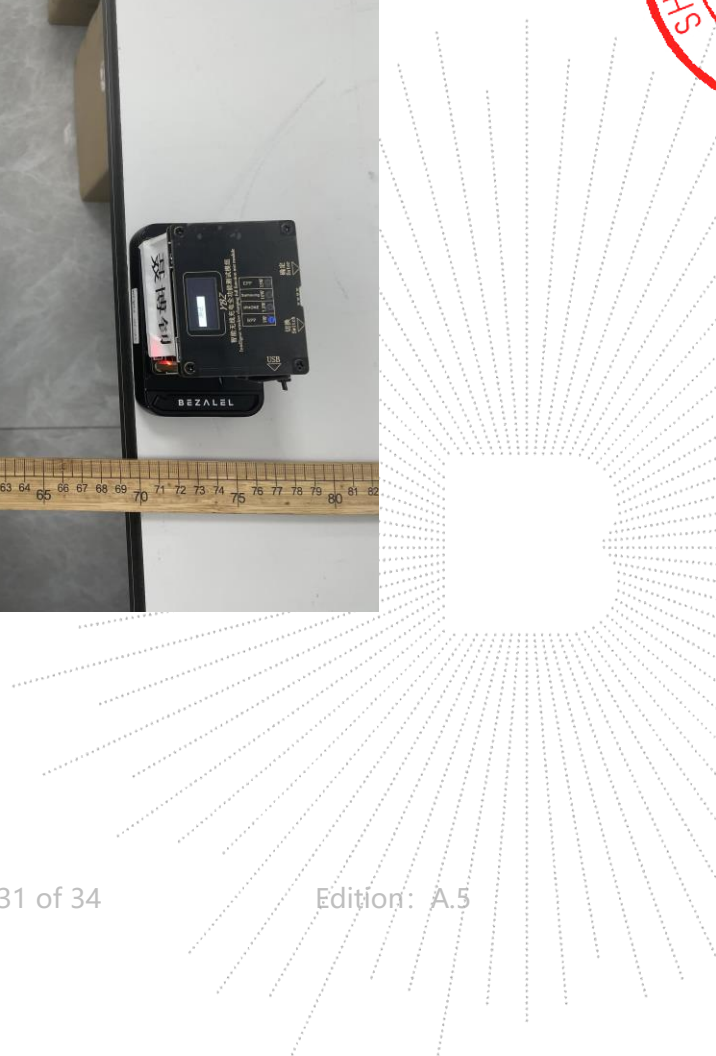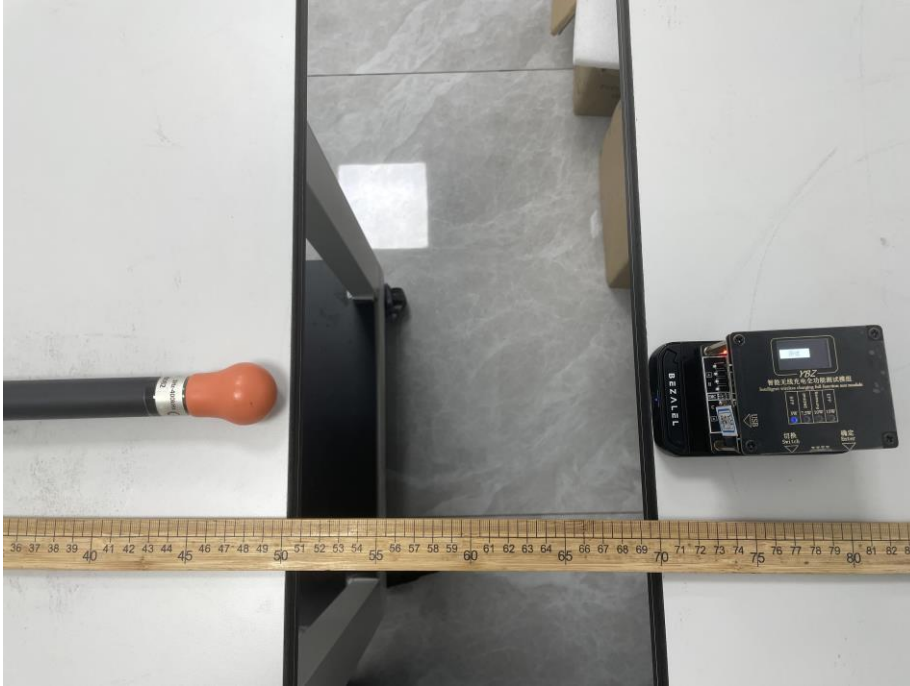




BCTC  
BC  
APPR  
停测

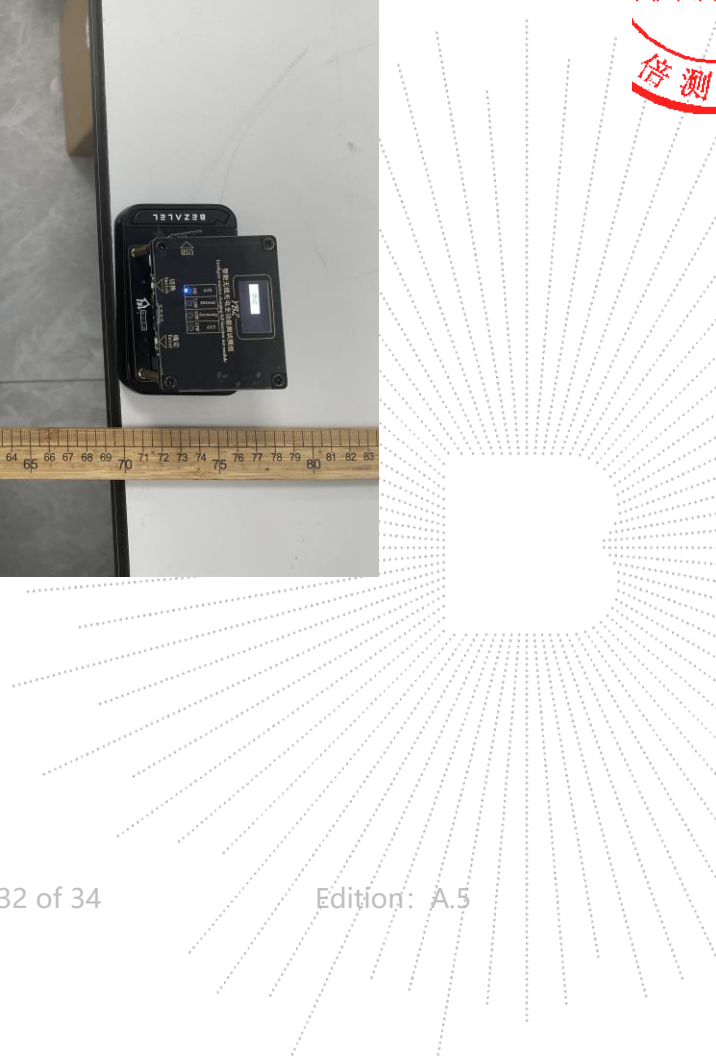



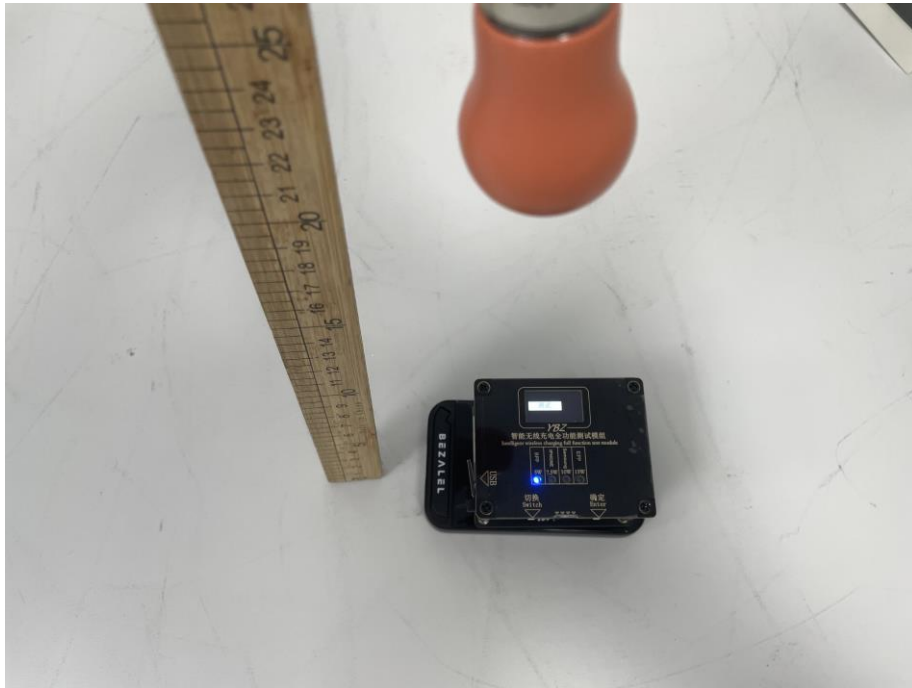

TEST  
TC  
OVER  
检测



**STATEMENT**

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The test report without CMA mark is only used for scientific research, teaching, enterprise product development and internal quality control purposes.
8. The quality system of our laboratory is in accordance with ISO/IEC17025.
9. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

**Address:**

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)

**\*\*\*\*\* END \*\*\*\*\***

