

File reference No.: 2022-09-05

Applicant: Glory Star Technology Industrial Co., Ltd.

Product: Bluetooth glasses

Model No.: SG32, SOG-4/1987, Audio glasses, 2RBSK1512B0BL,

ETHGLSB, ETHGLSH, ETHGLSSEB

Trademark: Glory Star, itek

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 & FCC Part 15 Subpart C,

Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Terry Tang

Manager

Dated: September 05, 2022


Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No.: TW2208188E Page 2 of 46

Date: 2022-09-05



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number: 5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Date: 2022-09-05



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test	8
5.2	Test Method and Test Procedure	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition	9
5.5	Conducted Emission Limit.	9
5.6	Test Result	9
6.0	Radiated Emission test	12
6.1	Test Method and Test Procedure	12
6.2	Configuration of the EUT	13
6.3	EUT Operation Condition	13
6.4	Radiated Emission Limit	13
6.5	Test Result	15
7.0	Band Edge	23
7.1	Test Method and Test Procedure	23
7.2	Radiated Test Setup.	23
7.3	Configuration of the EUT	23
7.4	EUT Operating Condition	23
7.5	Band Edge Limit.	23
7.6	Band Edge Test Result.	24
8.0	Antenna Requirement	28
9.0	20dB bandwidth measurement	29
10.0	FCC ID Label	38
11.0	Photo of Test Setup and EUT View.	39

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2208188E Page 4 of 46

Date: 2022-09-05



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Glory Star Technology Industrial Co., Ltd.

Address: Room2202, Block 1st, Yi Luan Building, Xixiang Road 230, BaoAn District, Shenzhen, China

Telephone: 18870297821

Fax: --

1.3 Description of EUT

Product: Bluetooth glasses

Manufacturer: Glory Star Technology Industrial Co., Ltd.

Address: Room2202, Block 1st, Yi Luan Building, Xixiang Road 230, BaoAn District,

Shenzhen, China

Trademark: Glory Star, itek

Model Number: SG32

Additional Model Name SOG-4/1987, Audio glasses, 2RBSK1512B0BL, ETHGLSB, ETHGLSH,

ETHGLSSEB

Rating: DC5V, 0.5A

Battery: DC3.7V, 140mAh Li-ion battery

Modulation Type: GFSK, Π/4DQPSK and 8DPSK for Bluetooth

Operation Frequency: 2402-2480MHz

Channel Number: 79
Channel Separation: 1MHz
Hardware Version: V1.1
Software Version: V27

Serial No.: SK328BTC20220831

Antenna Designation PCB antenna with gain 5.3dBi Max (Get from the antenna specification)

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2208188E Page 5 of 46

Date: 2022-09-05



1.4 Submitted Sample: 1 Sample

1.5 Test Duration

2022-08-09 to 2022-09-05

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Conducted Emissions Uncertainty = 3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Page 6 of 46

Report No.: TW2208188E

Date: 2022-09-05



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2022-07-15	2023-07-14
LISN	R&S	EZH3-Z5	100294	2022-07-18	2023-07-17
LISN	R&S	EZH3-Z5	100253	2022-07-18	2023-07-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2022-07-18	2023-07-17
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17
Spectrum	R&S	FSIQ26	100292	2022-07-15	2023-07-14
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2024-07-17
Power meter	Anritsu	ML2487A	6K00003613	2022-07-18	2023-07-17
Power sensor	Anritsu	MA2491A	32263	2022-07-18	2023-07-17
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25
EMI Test Receiver	RS	ESVB	826156/011	2022-07-15	2023-07-14
EMI Test Receiver	RS	ESCS 30	834115/006	2022-07-15	2023-07-14
Spectrum	HP/Agilent	E4407B	MY50441392	2022-07-15	2023-07-14
Spectrum	RS	FSP	1164.4391.38	2022-07-15	2023-07-14
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA		2022-07-15	2023-07-14
RF Cable	Zhengdi	7m		2022-07-15	2023-07-14
Pre-Amplifier	Schwarebeck	BBV9743	#218	2022-07-15	2023-07-14
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2022-07-15	2023-07-14
LISN	SCHAFFNER	NNB42	00012	2022-08-18	2023-07-17
ESPI Test Receiver	R&S	ESPI 3	100379	2022-07-15	2023-07-14
LISN	R&S	EZH3-Z5	100294	2022-07-18	2023-07-17

2.2 Automation Test Software

For Conducted Emission Test

Name	Version		
EZ-EMC	Ver.EMC-CON 3A1.1		

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2208188E Page 7 of 46

Date: 2022-09-05



3.0 Technical Details

3.1 Summary of test results

The 1	EUT has	been	tested	accord	ing to	the f	ollowing	specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph 15.207	Conducted Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	Pass	Complies
FCC Part 15, Paragraph 15.209 and RSS-210	Radiated Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	Pass	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2022-09-05



5. Power Line Conducted Emission Test

5.1 Schematics of the test

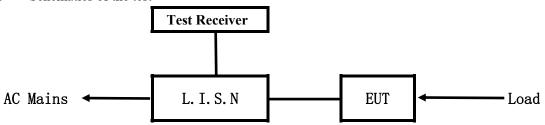


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2014. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2014.

Test Voltage: 120V, 60Hz Block diagram of Test setup

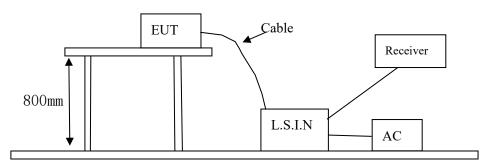

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

79 channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID
Bluetooth glasses	Glory Star Technology Industrial Co., Ltd.	SG32, SOG-4/1987, Audio glasses, 2RBSK1512B0BL, ETHGLSB, ETHGLSH, ETHGLSSEB	2AS7V-SG32

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2208188E Page 9 of 46

Date: 2022-09-05



B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	KEYU	KA23-0502000DEU	Input: 100-240V~, 50/60Hz, 0.35A;
			Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2014

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)			
(MHz)	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	56.0	46.0		
5.00 ~ 30.00	60.0	50.0		

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results:

Date: 2022-09-05



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging + Communication by BT

Results: Pass

Please refer to following diagram for individual

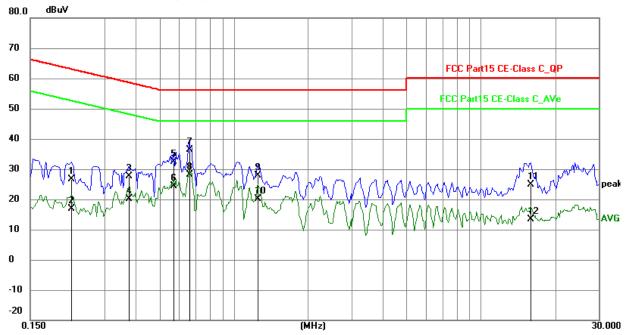

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2202	16.81	9.75	26.56	62.81	-36.25	QP	Р
2	0.2202	7.05	9.75	16.80	52.81	-36.01	AVG	Р
3	0.3762	17.87	9.76	27.63	58.36	-30.73	QP	Р
4	0.3762	10.39	9.76	20.15	48.36	-28.21	AVG	Р
5	0.5712	22.59	9.77	32.36	56.00	-23.64	QP	А
6	0.5712	14.60	9.77	24.37	46.00	-21.63	AVG	Л
7	0.6609	26.52	9.78	36.30	56.00	-19.70	QP	Р
8	0.6609	18.35	9.78	28.13	46.00	-17.87	AVG	Р
9	1.2498	18.06	9.79	27.85	56.00	-28.15	QP	Р
10	1.2498	10.27	9.79	20.06	46.00	-25.94	AVG	Л
11	15.9363	14.38	10.44	24.82	60.00	-35.18	QP	Р
12	15.9363	3.01	10.44	13.45	50.00	-36.55	AVG	Р

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2022-09-05



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging + Communication by BT

Results: Pass

Please refer to following diagram for individual

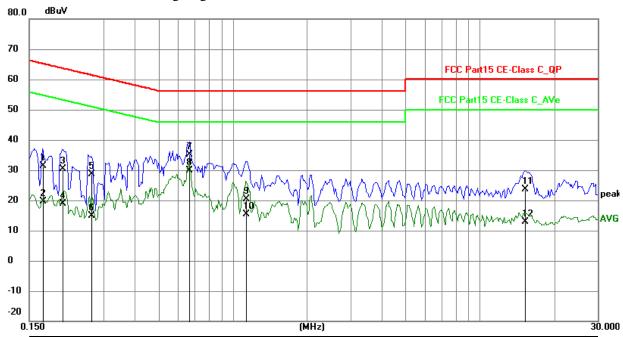

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1695	21.49	9.77	31.26	64.98	-33.72	QP	Р
2	0.1695	9.86	9.77	19.63	54.98	-35.35	AVG	Р
3	0.2046	20.59	9.75	30.34	63.42	-33.08	QP	Р
4	0.2046	9.20	9.75	18.95	53.42	-34.47	AVG	Р
5	0.2686	18.94	9.75	28.69	61.16	-32.47	QP	Ъ
6	0.2686	5.22	9.75	14.97	51.16	-36.19	AVG	Ъ
7	0.6648	25.44	9.78	35.22	56.00	-20.78	QP	Ъ
8	0.6648	20.19	9.78	29.97	46.00	-16.03	AVG	Р
9	1.1328	10.56	9.79	20.35	56.00	-35.65	QP	Р
10	1.1328	5.66	9.79	15.45	46.00	-30.55	AVG	Р
11	15.2577	13.12	10.40	23.52	60.00	-36.48	QP	Р
12	15.2577	2.44	10.40	12.84	50.00	-37.16	AVG	Р

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2022-09-05




6 Radiated Emission Test


- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz (Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

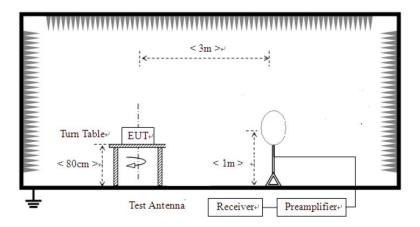

For radiated emissions from 30MHz to1GHz

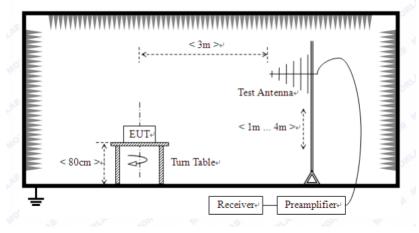


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2022-09-05



For radiated emissions above 1GHz

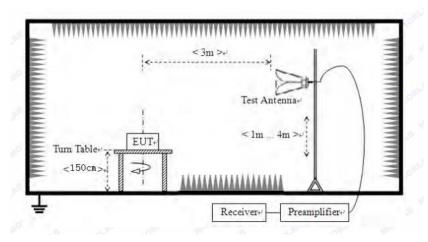

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Stre	ength of Fundame	ntal (3m)	Field S	trength of Harmo	nics (3m)	
(MHz)	mV/m	dBu	V/m	uV/m	dBuV/m		
2400-2483.5	50	94 (Average) 114 (Peak)		500	54 (Average)	74 (Peak)	

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: TW2208188E Page 14 of 46

Date: 2022-09-05



B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)				
0.009-0.490	3	20log(2400/F(kHz)) +40log (300/3)				
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)				
1.705-30	3	69.5				
30-80	3	40.0				
88-216	3	43.5				
216-960	3	46.0				
Above 960	3	54.0				

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. The three modulation modes of GFSK, Pi/4D-QPSK, and 8DPSK were tested. And only the worst case was recorded in the test report. 8DPSK was the worst case.
- 6. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 7. Battery fully charged was used during the test.

Report No.: TW2208188E Page 15 of 46

Date: 2022-09-05




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

Horizontal

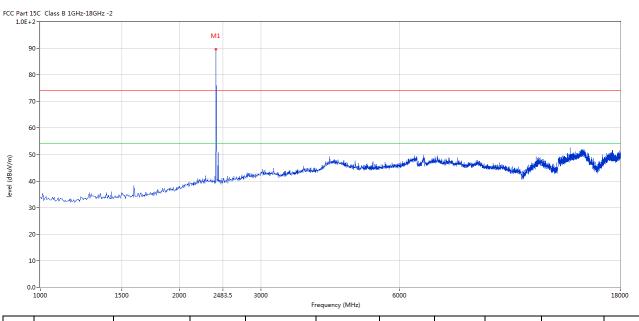


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	89.67	-3.57	114.0	-24.33	Peak	113.00	100	Horizontal	Pass

Report No.: TW2208188E Page 16 of 46

Date: 2022-09-05



Vertical

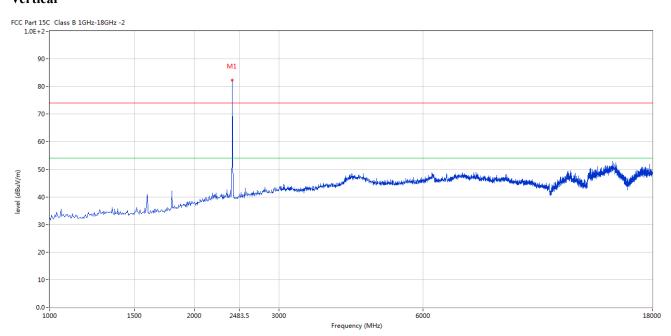

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	82.72	-3.57	114.0	-31.28	Peak	233.00	100	Vertical	Pass


Report No.: TW2208188E Page 17 of 46

Date: 2022-09-05



Please refer to the following test plots for details: Middle Channel-2441MHz

Horizontal

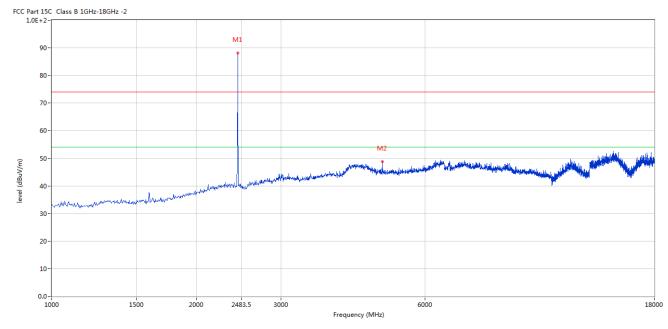


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(0)	(cm)		
1	2441	88.22	-3.57	114.0	-25.78	Peak	136.00	100	Horizontal	Pass
2	4879.280	48.75	3.20	74.0	-25.25	Peak	158.00	100	Horizontal	Pass

Report No.: TW2208188E Page 18 of 46

Date: 2022-09-05



Vertical

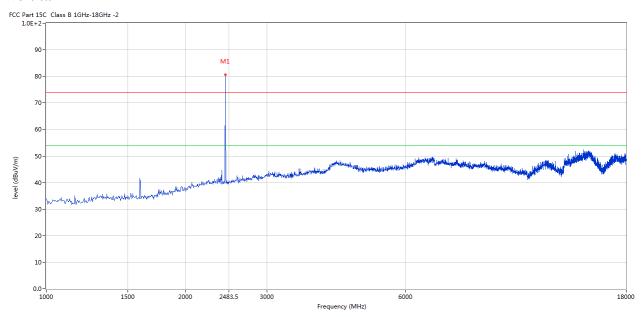

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2441	80.61	-3.57	114.0	-33.39	Peak	243.00	100	Vertical	Pass


Report No.: TW2208188E Page 19 of 46

Date: 2022-09-05



Please refer to the following test plots for details: High Channel-2480MHz

Horizontal

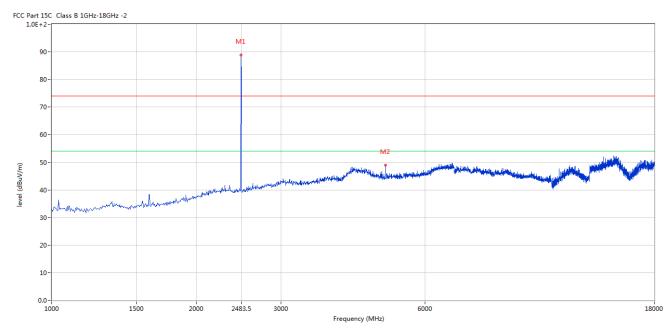


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(0)	(cm)		
1	2480	88.97	-3.57	114.0	-25.03	Peak	117.00	100	Horizontal	Pass
2	4960.010	48.91	3.36	74.0	-25.09	Peak	159.00	100	Horizontal	Pass

Report No.: TW2208188E Page 20 of 46

Date: 2022-09-05



Vertical

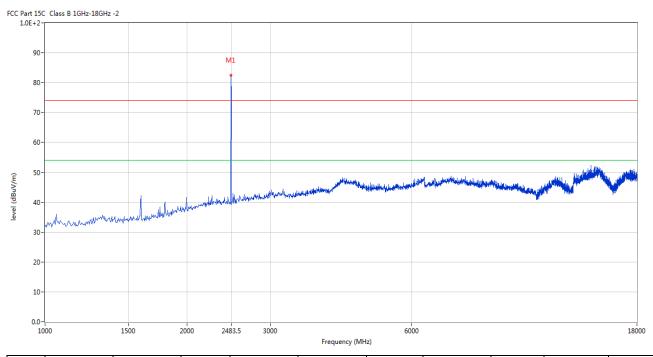

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2480	82.56	-3.57	114.0	-31.44	Peak	90.00	100	Vertical	Pass

Note: (1) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (2) Margin=Emission-Limits
- (3) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (4) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise and less than the limit for more than 20dB. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2208188E Page 21 of 46

Date: 2022-09-05




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

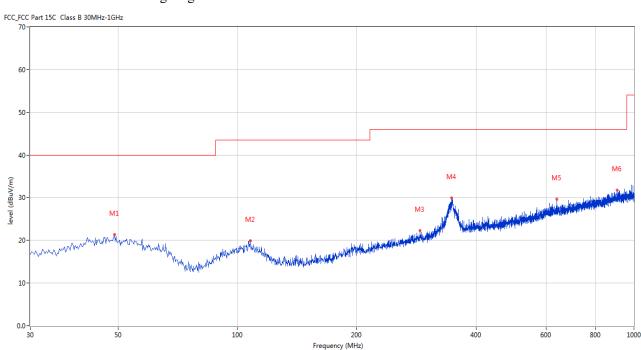

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	48.910	21.36	-11.21	40.0	-18.64	Peak	360.00	200	Horizontal	Pass
2	107.823	19.95	-13.41	43.5	-23.55	Peak	360.00	200	Horizontal	Pass
3	288.925	22.28	-11.24	46.0	-23.72	Peak	360.00	200	Horizontal	Pass
4	347.111	29.95	-9.43	46.0	-16.05	Peak	360.00	200	Horizontal	Pass
5	638.280	29.64	-4.72	46.0	-16.36	Peak	360.00	200	Horizontal	Pass
6	907.146	31.74	-1.75	46.0	-14.26	Peak	360.00	200	Horizontal	Pass

Report No.: TW2208188E Page 22 of 46

Date: 2022-09-05




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

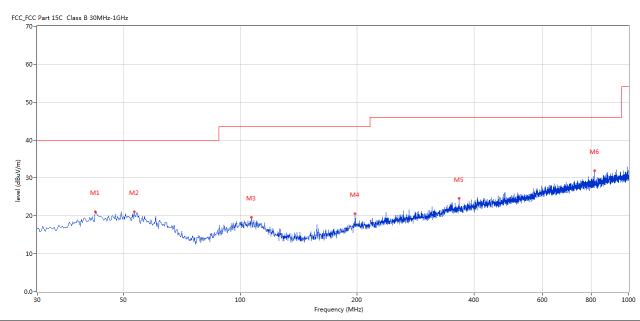

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	42.364	21.09	-11.59	40.0	-18.91	Peak	254.00	200	Vertical	Pass
2	53.274	21.15	-11.51	40.0	-18.85	Peak	91.00	100	Vertical	Pass
3	106.853	19.68	-13.38	43.5	-23.82	Peak	286.00	200	Vertical	Pass
4	197.526	20.54	-13.51	43.5	-22.96	Peak	332.00	200	Vertical	Pass
5	365.536	24.59	-9.45	46.0	-21.41	Peak	271.00	200	Vertical	Pass
6	816.473	31.91	-2.93	46.0	-14.09	Peak	73.00	100	Vertical	Pass

Date: 2022-09-05




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

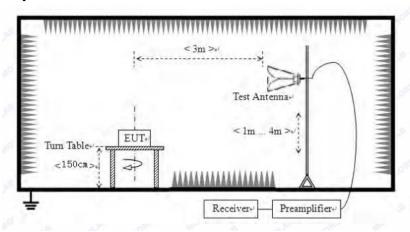

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of The EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.


Report No.: TW2208188E Page 24 of 46

Date: 2022-09-05



7.6 Test Result

Product:	Bluetooth glasses	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

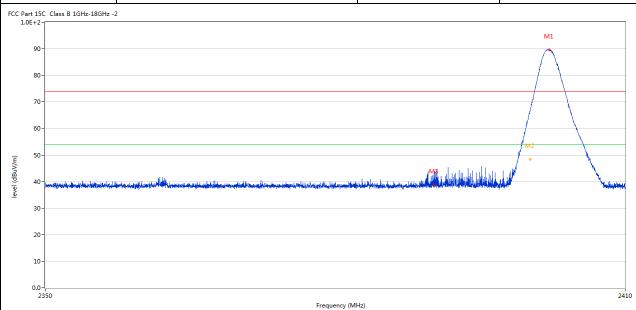

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402.037	89.66	-3.57	74.0	15.66	Peak	122.00	100	Horizontal	N/A
2	2400.042	66.49	-3.57	74.0	-7.51	Peak	117.00	100	Horizontal	Pass
2**	2400.042	48.47	-3.57	54.0	-5.53	AV	117.00	100	Horizontal	Pass
3	2390.040	38.85	-3.53	74.0	-35.15	Peak	1.00	100	Horizontal	Pass

Report No.: TW2208188E Page 25 of 46

	Product:		Bluete	ooth glasses	\$	De	etector		Vertical	
	Mode		Keeping	g Transmitti	ng	Test	Voltage		DC3.7V	
Te	mperature		24	l deg. C,		Hu	Humidity		56% RH	
Te	est Result:			Pass						
C Part	15C Class B 1GHz-18GHz	: -2								
1.01	-2									
ġ	90-								M1	
8	30-								\wedge	
									/ \ 	
	70-									
(50 -								$\overline{}$	
								- 1		
. :	50-									
	50-							/ / / / / / / / / / / / / / / / / / /	12	
	10 - Municipal Color	the sales of the s		and the late of th			INE DESCRIPTION OF THE PERSON	***	12	Maring Land
		errore de la laconomica d		and the state of t	na kina njihih aking ca dja	i ai fliadh i ga bha sta i gan	Maria Maria	M	12	
	10 Marah - Mila - Mala - M	ttivata dadam napatan da ikhij	kate applications, and a	and the Marie India	enis klassa ja kalakusa dan	i addad ii sadan xaiinn		A A A A A A A A A A A A A A A A A A A	12	Madinipalkinja
	40 - Alderstad Alexandra	of the september of the	the state of the s	والمسترجان والمستطوع والمتحالدين	egyiddin daeth ag y daeth a dheil egy a e ag an	i diplosit di dipenten en piane			12	*Miladadaga Nanja
	10 Marah - Mila - Mala - M	eteratuski komuniya en eksi khiji	ikudo adalah siring disebut	on, alberta and beet the city in buy	ensi khasanjibuh albuma adan	i addad biyada na isan		A A A A A A A A A A A A A A A A A A A	12	
	10	tivata dalam nepanna di Alg	ikalo ajikha ingen andra	واستهاره والموادي	egyiphilatering panak a dikulunga a napan	n an false of the second and the se			12	
	40 - A. Marchi, and A. 30	of the all the second s	okule alikuli kuleng dipakai	and the state of t	Frequency (MI				12	
	10	Results	Factor	Limit			Table (o)	Height	ANT	241
	10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 -				Frequency (Mh	tz)	Table (o)	Height (cm)	ANT	241
	10- 20- 2350 Frequency	Results	Factor	Limit	Frequency (Mi	tz)	Table (o) 84.00	_	ANT Vertical	241
No.	10- 20- 2350 Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Frequency (Mh Over Limit (dB)	hz) Detector		(cm)		Verdi N/A
No.	Frequency (MHz) 2402.037	Results (dBuV/m) 82.21	Factor (dB)	Limit (dBuV/m) 74.0	Frequency (MFO) Over Limit (dB) 8.21	Detector Peak	84.00	(cm)	Vertical	241 Verdi

Page 26 of 46

Report No.: TW2208188E Date: 2022-09-05	THE STING LASS

]	Product:		Bluet	tooth glasses			Polarit	y	Horizon	tal	
	Mode		Keepin	g Transmittir	ng	,	Test Volta	age	e DC3.7V		
Te	mperature		2.	4 deg. C,			Humidity		56% R	Н	
Te	est Result:			Pass							
C Part 1	LSC Class B 1GHz-18GHz	: -2				•		•			
			M1	L							
9	0-		M	W.							
8	0-		- / ·	1							
7	0-		- Duy								
6	0-		\int	M							
			Mil	Ja.							
		<i></i>		M2N							
5	0-	- Ju		M2	Man						
5	0-	Apple of the second second		M	Mary Mary Mary Mary Mary Mary Mary Mary	والمالية المالية		ekalifakterikterakterikteri	يورين والطأوان فيسيرا ومخاهر الاورين بالما	n jih Noberpuli	
4		was a supplementary of the sup		M.25	Managamanda	والمراجع والم والمراجع والمراجع والمراجع والمراجع والمراجع والمراجع والمراج	d a galacomo de del ser que asi qual	skustifikus ja kundyn kirikiskus ja	h-programme de la constitución d	njik Malisepol	
4		nit a sealar di ministra de la constanti de la		M	Management	daganis ayan diddanlar	to the second se	shakidha dhaaba dhalladha qib	ئىرىنىدىدىدىدىدىدىدىدىدىدىدىدىدىدىدىدىدىد	ng kabiyya k	
3		nin a seekusuujin seesia alah		M	Many Marine State Control of the Con	المراجعة والمراجعة و	kananan dalaman an an	nk. distably a ble wedge do site de de sigl	ing a state of the	ng kabupat	
3		nit o sealt an initial annies of the		Ma	Many	departure and the second s	i e seksepe kahilapan periode seksepe	s.a.talijeskundyndysteriskopi	t of the second sec	nija kalaupak	
3 2 1		nite a sealment interest and a seal of the		2483.5		dag ang managang dag panalan	i e transporte de la compania de la	n. Antal est de marie de mari	o in the state of	2500	
3 2 1 0.	0		T	1	Frequency (MHz)					2500	
3 2 1	0	Results	Factor	Limit	Frequency (MHz) Over Limit	Detector	Table	Height	ANT		
3 3 2 1 0.	o- 0- 0- 0- 0- 0- 0- 2470 Frequency (MHz)	Results (dBuV/m)	(dB)	Limit (dBuV/m)	Frequency (MHz) Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	2500 Verdid	
3 2 1 0.	0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0	Results (dBuV/m) 88.68	(dB) -3.57	Limit (dBuV/m) 74.0	Over Limit (dB)		Table (o) 118.00	Height (cm)	ANT Horizontal	verdid	
3 3 2 2 1 0.	o- 0- 0- 0- 0- 0- 0- 2470 Frequency (MHz)	Results (dBuV/m)	(dB)	Limit (dBuV/m)	Frequency (MHz) Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	2500 Verdid	

Report No.: TW2208188E Page 27 of 46



Date: 2022-09-05

2479.868

2483.362

2

82.42

49.71

-3.57

-3.57

74.0

74.0

Produ	ict:		E	Bluetooth gla	asses		Detect	tor	Vertica	ıl
Mod	le		Ke	eping Transı	nitting		Test Vol	tage	DC3.7	V
Tempera	ature			24 deg. C	·,	Humidity				Н
Test Re	sult:			Pass						
CC Part 15C Class	B 1GHz-18GHz	-2								
90-				M1						
80-				M						
70-				Jan 1						
60-			/							
				W	M2					
E 50-			/		W					
(m/\mu/dgp) 40-40-40-40-40-40-40-40-40-40-40-40-40-4					Victoria del		والمواب فالالتهاض فتأومهم			Market
30-										
30-										
30-										
30-										
20-					2483.5					2500
20-					2483.5 Frequency (MH	z)				2500
20- 10- 0.0- 2470	equency	Results	Factor	Limit		z) Detector	Table (o)	Height	ANT	2500 Verdi

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

2. For Restricted band test, the three modulation modes of GFSK, Pi/4D-QPSK, and 8DPSK were tested. And only the worst case was recorded in the test report. 8DPSK was the worst case.

8.42

-24.29

Peak

Peak

90.00

90.00

100

100

Vertical

Vertical

N/A

Pass

Report No.: TW2208188E Page 28 of 46

Date: 2022-09-05



8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB antenna. The antenna gain is 5.3dBi Max. It fulfills the requirement of this section. Test Result: Pass

Report No.: TW2208188E Page 29 of 46



Product:	Bluetooth g	glasses	Test Mod	e: Keep tra	ansmitting
Mode	Keeping Tran		Test Volta		23.7V
Temperature	24 deg.	C,	Humidity	y 56%	% RH
Test Result:	Pass		Detector	r]	PK
0dB Bandwidth	919.84k	Hz			
Ref Lvl 10 dBm		ndB] 20.00 dB 57936 kHz		kHz RF Att kHz ms Unit	20 dB dBm
0		1	▼ n	2.4018	-4.06 dBm 37074 GHz
-10			B ▼	T] [T1] -2	24.24 dBm
-20	Th		▼ T2	2.4015 T2 [T1] -2	
1MAX -30				4	11
-40				\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	
-50	man de la company de la compan			1	
-60				\	many
-70					
-80					
-90 Center 2.402		300 kHz	,		oan 3 MHz

Report No.: TW2208188E Page 30 of 46



GFSK										
Product:		Bluet	ooth glass	ses	-	Test Mode:		Keep tra	ansmitting	
Mode		Keepin	g Transmi	tting	Г	est Voltage	е	DC	3.7V	
Temperature		2	4 deg. C,			Humidity		56%	% RH	
Test Result:	Pass					Detector]	PK	
20dB Bandwidth	919.84kHz									
		Marker	1 [T1 r	ndB]	RBW	30 k	Hz R	F Att	20 dB	
Ref Lvl		ndB	20.	.00 dB	VBW	100 k				
10 dBm		BW 919	839679	936 kHz	SWT	8.5 m	ns Ui	nit	dBm	
10						$lacktriangledown_1$	[T1]	- 4	.94 dBm	A
								2.44087	074 GHz	
0				1		ndI	8	20	.00 dB	
				M	~\/\	BW ∇ _T .		9.83967	936 kHz	
-10					\ \	V.T.	[T1]	2.44057	.07 dBm	
				\sim		V ▼ _T :	[2 [T1]	-24		
-20			TA			T2		2.44148	998 GHz	
1MAX						~~~_				1MA
-30		7					Υ.			
-40	پ یمبر	كرسير					Ì	.M		
-50	~~						V	\	~	
-60										
-70										
-80										
-90										
Center 2				300	kHz/			Spa	n 3 MHz	
Date: 2.	SEP.20	22 13:	20:18							

Page 31 of 46

Report No.: TW2208188E



GFSK		D1 ·	41. 1			Γ4 λ		IZ - 1		
Product:			tooth glass			Test Mode:			ansmitting	
Mode			g Transmi	ιτing	-	est Voltage	:		3.7V	
Temperature		2.	4 deg. C,			Humidity			% RH	
Test Result:			Pass			Detector]	PK	
20dB Bandwidth	919.84kHz									
()		Marker	1 [T1 r		RBW	30 k		F Att	20 dB	
Ref Lvl		ndB		00 dB	VBW	100 k				
10 dBm		BW 919	839679	36 kHz	SWT	8.5 m	s Ui	nit	dBm	1
10						lacksquare1	[T1]	- 5	.37 dBm	A
								2.47987	074 GHz	-
0				1		ndE	}	20	.00 dB	
				\sim	~ M	BW	91	19.83967		
-10					$-\lambda$	$\nabla_{\mathrm{T}1}$	[T1]	-25	.66 dBm	
				\sim	\	V	[T1]	2.47957	014 GHz .25 dBm	
-20				<i>)</i> *		<u> </u>	. [11]	2.48048	998 GHz	
1MAX			Ţ N			T2 V				1M2
-30			\sim							
		~				·	4			
-40		- '					7			
	٠٨٠	~~~~~						~~		
-50	~~						$\overline{}$	\ \		
~~~~~								h		
-60									-W	
-70										
-80										
-90										
Center 2	.48 GH:	z		300	kHz/			Spa	ın 3 MHz	
Date: 2.SEP.2022 13:34:52										

Page 32 of 46 Report No.: TW2208188E



Л/4DQPSK							
Product:	Blu	etooth glasses		Test Mode:	F	Keep transmi	tting
Mode	Keepi	ng Transmitting	g	Test Voltage		DC3.7V	
Temperature		24 deg. C,		Humidity		56% RH	
Test Result:		Pass	Detector		PK		
20dB Bandwidth							
R	Marker	1 [T1 ndB]	R	30 k	Hz RF	Att 2	0 dB
Ref Lvl	ndB	20.00		3W 100 k		_	
10 dBm	BW 1	1.28657315	MHz S	√T 8.5 m	s Uni	it	dBm
				<b>v</b> ₁	[T1]	-4.0!	5 dBm
0					2	2.40187074	4 GHz
0			1	ndF	3	20.00	
			//	BW VTI	L [T1]	28657315 -24.3	
-10		~~\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	/ <del>V</del>	MM W/		2.40138978	
		$\int$		$\nabla_{\mathrm{T}}$	[T1]	-24.4	5 dBm
-20 1MAX	T				T2 2	2.40267635	5 GHz 1MA
-30							
- 40						M	
-60							~~~
-70							
-80							
-90 Center 2.	402 GHz	<u> </u>	300 kHz/			Span 3	3 MHz
Date: 2.S	SEP.2022 13:	56:59					

Report No.: TW2208188E Page 33 of 46



Л/4DQPSK										
Product:		Bluet	tooth glass	ses	ı	Test Mode:	:	Keep tra	ansmitting	
Mode		Keepin	g Transmi	tting	7	Test Voltage	e	DC	23.7V	
Temperature		2	4 deg. C,			Humidity		56%	% RH	
Test Result:			Pass			Detector		]	PK	
20dB Bandwidth		1.281MHz								
(R)		Marker	1 [T1 r	ndB]	RBW	30 k	Hz R	F Att	20 dB	
Ref Lvl		ndB		00 dB	VBW	100 k				
10 dBm		BW 1	1.280561	12 MHz	SWT	8.5 m	ns U	nit	dBm	1
						<b>v</b> ₁	[T1]	-4	.90 dBm	A
0						ndI	8	2.44087	074 GHz	
				<u> </u>	~	BW		1.28056		
-10			0			V _T	[T1]	-25	.05 dBm	
				W	V	$\sqrt{}$	2 [T1]	2.44038		
-20		T	$\mathcal{L}$				T2	2.44167	034 GHz	
-30							7			1MA
-40	5						\\ \			
-50	~~~							V	my	
-60										
-70										
-80										
-90 Center 2	.441 G	Hz		300	kHz/			Spa	ın 3 MHz	
Date: 2.	.SEP.20	22 13:	50:55							

Page 34 of 46

Report No.: TW2208188E



T/4DQPSK	·							•				
Product:		Blue	tooth glass	ses		T	est Mode:		Keep tra	nsmitting		
Mode		Keepin	g Transmi	tting		To	est Voltage		DC	3.7V		
Temperature		2	4 deg. C,			]	Humidity		56%	6 RH		
Test Result:			Pass				Detector		I	PΚ		
20dB Bandwidth		1.275MHz										
Ŕ		Marker	1 [T1 n	ndB]	R	BW	30 k	Hz R	F Att	20 dB		
Ref Lvl		ndB		00 dB		BW	100 k					
10 dBm		BW I	1.274549	10 MHz	S	WT	8.5 m	s Ui	nit	dBm	1 -	
10							<b>v</b> ₁	[T1]	-5	.39 dBm	A	
									2.47987	074 GHz		
0				1			ndB		20	.00 dB		
				\ \ \ _ /	$\gamma \wedge$	١	BW $oldsymbol{ abla}_{\mathrm{T1}}$	[T1]	1.27454	910 MHz .01 dBm		
-10			~~	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \		$\backslash \Gamma$	My ,		2.47939	579 GHz		
						٧	$A^{\perp}$	[T1]	-25	.29 dBm		
-20 1MAX		T	~					\T2	2.48067	034 GHz	1MA	
-30												
-40								\\\\				
-50	w ~~									may		
-60												
-70												
-80												
-90 Center 2	2.48 GH:	z		300	kHz/				Spa	n 3 MHz		
Date: 2	Date: 2.SEP.2022 13:											

Page 35 of 46 Report No.: TW2208188E



BDPSK										
Product:	Blue	tooth glas	ses		T	est Mode:		Keep tran	smitting	
Mode	Keepii	ng Transm	itting		To	est Voltage		DC3	.7V	
Temperature	2	24 deg. C,			]	Humidity		56%	RH	
Test Result:	Pass					Detector		PI	ζ	
20dB Bandwidth	1.244MHz								-	
<b>R</b>	Marker	1 [T1 n	ndB]	RI	ЗW	30 k	Hz Rl	F Att	20 dB	
Ref Lvl 10 dBm	ndB BW 1	20. 244488	00 dB 98 MHz		WE WT	100 ki		nit	dBm	ı
10						<b>v</b> ₁	[T1]		20 45	1
						. т	[11]	2.40187	.39 dBm 074 GHz	A
0			<u></u>	1 ~		ndE BW		20	.00 dB 898 MHz	
-10		~^^	$\sim \sim \sim$	<u> </u>	7	▼ _T	[T1]	-23 2.40141	.64 dBm 984 GHz	
		/				∇ <u>1</u> 2	[T1]	-23	.14 dBm	
-20		}					\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	2.40266	433 GHz	1M2
-30										
-40							$\bigwedge$			
-50								کری	~~~~_\n	
-60										
-70										
-80										
-90										
Center 2.40	02 GHz		300	kHz/				Spa	n 3 MHz	_
ate: 2.SE	P.2022 14:	01:38								

Page 36 of 46

Report No.: TW2208188E



8DPSK									
Product:		Bluetooth glass	es	Γ	est Mode:		Keep tra	ansmitting	
Mode	K	eeping Transmi	tting	Т	est Voltage		DC	C3.7V	
Temperature		24 deg. C,			Humidity		569	% RH	
Test Result:		Pass			Detector		]	PK	
20dB Bandwidth		1.251MHz							
(R)	Mar	ker 1 [T1 r	ndB]	RBW	30 kH	z RI	7 Att	20 dB	
Ref Lvl	ndB		00 dB	VBW	100 kH				
10 dBm	BW	1.250501	.00 MHz	SWT	8.5 ms	Uı	nit	dBm	
10					<b>v</b> ₁	[T1]	- 4	4.26 dBm	A
0							2.44087	7074 GHz	
			1		ndB		20	0.00 dB	
			/_/		$oldsymbol{ abla}_{ ext{T1}}$	[T1]	1.25050	0100 MHz 4.33 dBm	
-10		^^^	$\sim$	7	^\		2.44041		
				·	$ abla_{12}$	[T1]	-24		
-20 1MAX						F2 <b>V</b>	2.44167	7034 GHz	1MA
-30									
-40	1						$\bigcirc$		
-50	W						\	$\sim$	
-60									
-70									
-80									
-90 Center 2.	441 GHz		300	kHz/			Spa	an 3 MHz	
Date: 2.5	SEP.2022	14:25:03							

Page 37 of 46 Report No.: TW2208188E



DPSK											
			Bluetooth glasses Keeping Transmitting			Γ	Test Mode: Test Voltage Humidity Detector		Keep transmitting DC3.7V 56% RH		
						To					
Temperature		24 deg. C, Pass									
Test Result:									PK		
20dB Bandwidth	1.251MHz										
Ŕ		Marker	1 [T1 r	ndB]	F	RBW	30 k	Hz Rl	F Att	20 dB	
Ref Lvl		ndB		00 dB	7	/BW	100 k				
10 dBm		BW 1	1.250501	00 MHz	S	SWT	8.5 m	s Uı	nit	dBm	1 -
							<b>v</b> ₁	[T1]	- 4	.99 dBm	A
0									2.47987	074 GHz	
				1			ndB BW		20 1.25050	.00 dB	
1.0					$\bigwedge$ $\swarrow$	$\overline{}$	$oldsymbol{ abla}_{ ext{T1}}$	[T1]	-25	100 MHz	
-10				~ V	~	7	$\wedge$		2.47941	984 GHz	
						Ť	V <del>V</del> t1	[T1]	-25	.27 dBm	
-20 1MAX		· /	1					T2	2.48067	034 GHz	1MA
-30											
-40	$\wedge$	لمسمم						M			
-50	M.								m	~~~\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	
-60											
-70											
-80											
-90 Center 2.48 GHz 300 kH						,			Spa	n 3 MHz	!
Date: 5	.SEP.20	22 10:	04:28								

Report No.: TW2208188E Page 38 of 46

Date: 2022-09-05




#### 10.0 FCC ID Label

#### FCC ID: 2AS7V-SG32

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### **Mark Location:**

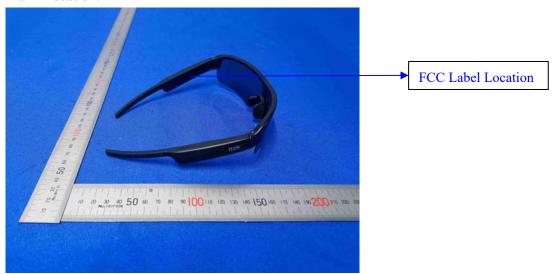


Report No.: TW2208188E Page 39 of 46

Date: 2022-09-05



#### 11.0 Photo of testing 11.1

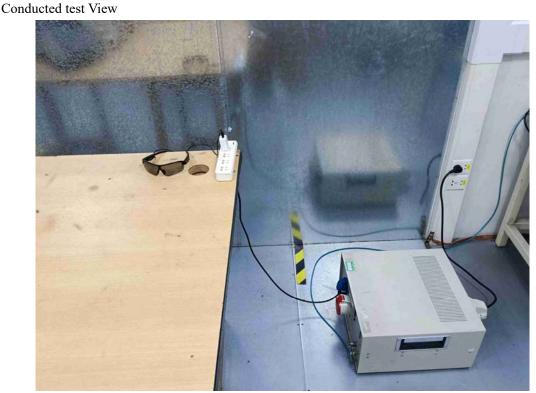


Page 40 of 46

Report No.: TW2208188E

Date: 2022-09-05



#### Radiated emission test view

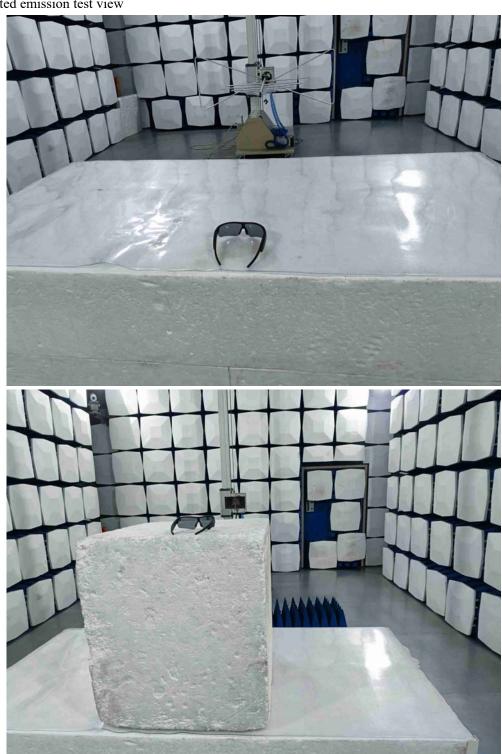

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2022-09-05



## 11.2 Photographs – EUT

Outside View



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 42 of 46

Report No.: TW2208188E

Date: 2022-09-05



Outside View



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 43 of 46

Report No.: TW2208188E

Date: 2022-09-05



Outside View

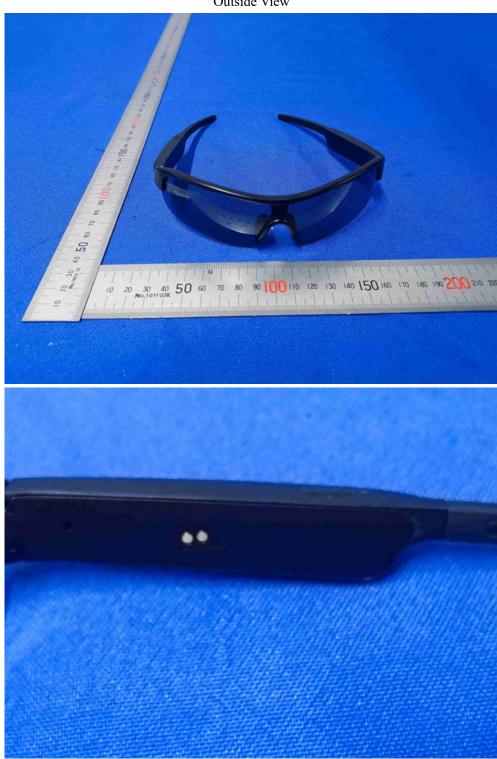

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 44 of 46

Report No.: TW2208188E

Date: 2022-09-05



Inside View

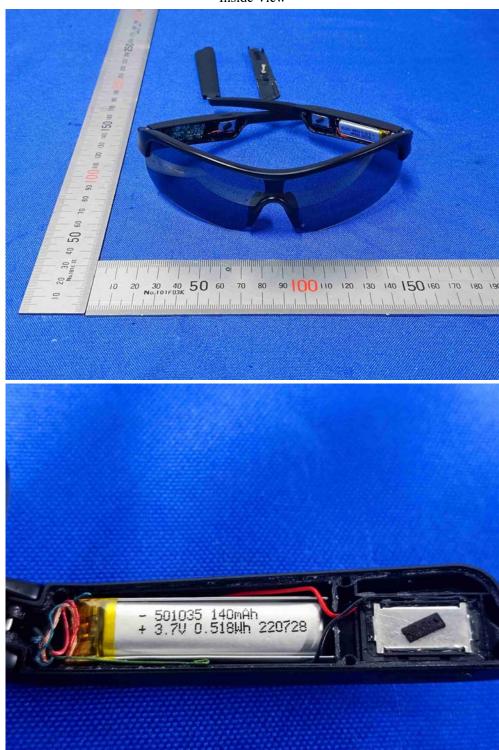

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 45 of 46

Report No.: TW2208188E

Date: 2022-09-05



Inside View

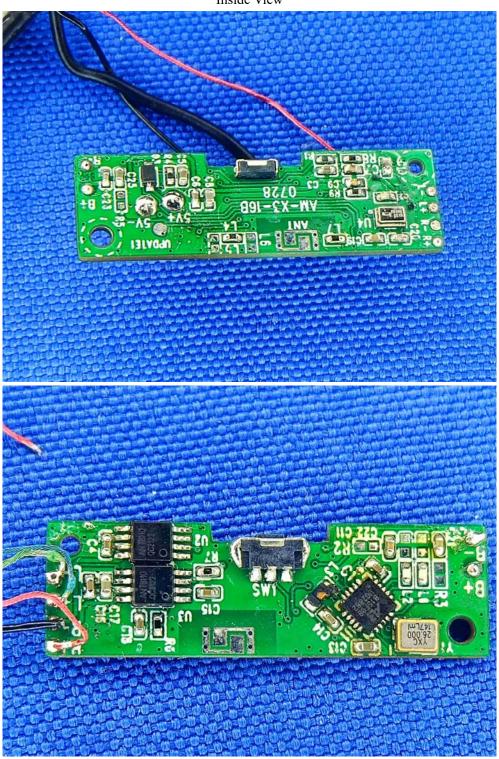

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Page 46 of 46

Report No.: TW2208188E

Date: 2022-09-05



Inside View

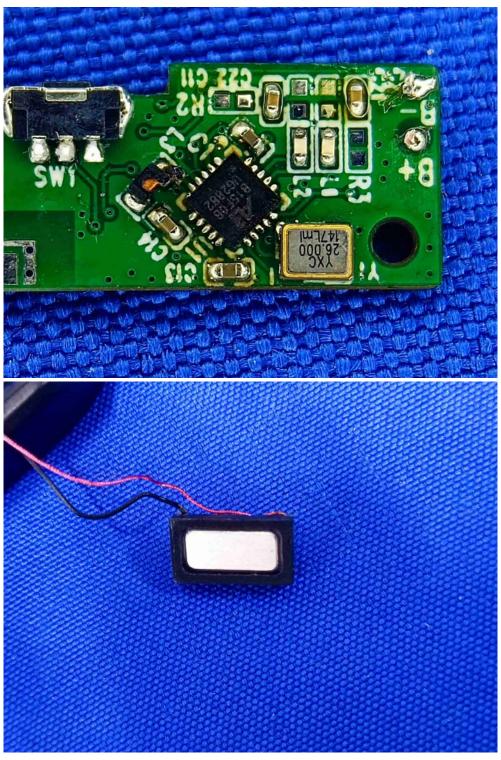

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.