

Report No.: TW2207043E File reference No.: 2022-07-09

Applicant: Shenzhen Glory Star Technology Industrial Co., Ltd.

Product: TWS Earphone

Model No.: TWS105, MI-E101T

Trademark: Merkury, Glory Star

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Terry Tong

Terry Tang

Manager

Dated: July 09, 2022

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

## SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2207043E Page 2 of 84

Date: 2022-07-09



## **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

#### **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO 17025:2017 General Requirements) for the Competence of testing Laboratories.

### FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

## Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

#### A2LA (Certification Number: 5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 84

Report No.: TW2207043E

Date: 2022-07-09



# **Test Report Conclusion**

### Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty.	4
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit	14
7.0	20dB Bandwidth	26
8.0	Maximum Output Power.	38
9.0	Carrier Frequency Separation.	41
10.0	Number of Hopping Channel	45
11.0	Time of Occupancy (Dwell Time)	49
12.0	Out of Band Measurement.	62
13.0	Antenna Requirement.	79
14.0	FCC ID Label.	80
15.0	Photo of Test Setup and FUT View	81

Date: 2022-07-09



Page 4 of 84

#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

### 1.2 Applicant Details

Applicant: Shenzhen Glory Star Technology Industrial Co., Ltd.

Address: Room2102, Block 1st, Yi Luan Building, Xixiang Road 230, BaoAn District, Shenzhen, China

Telephone: +86-755-86397260 Fax: +86-755-26609516

#### 1.3 Description of EUT

Product: TWS Earphone

Manufacturer: Shenzhen Glory Star Technology Industrial Co., Ltd.

Address: Room 2102, Block 1st, Yi Luan Building, Xixiang Road 230, BaoAn District,

Shenzhen, China

Brand Name: Merkury, Glory Star

Model Number: TWS105 Additional Model Number: MI-E101T

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channels for Bluetooth

Antenna: Chip Antenna. The gain of the antennas is 1.06dBi (Get from the antenna

specification)

Input Voltage: DC5.0V

Battery: DC5V input or Built-in DC3.7V, 35mAh Li-ion battery for earphones and DC5V

input or Built-in DC3.7V, 400mAh Li-ion battery for charger base

Hardware Version: V1.0 Software Version: V1.0

Serial No.: TWS105202207

### 1.4 Submitted Sample: 2 Samples

## 1.5 Test Duration

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2022-07-09



Page 5 of 84

2022-07-05 to 2022-07-09

#### Test Uncertainty 1.6

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions below 1GHz Uncertainty =4.7dB Radiated Emissions above 1GHz Uncertainty =6.0dB Conducted Power Uncertainty =6.0dB Occupied Channel Bandwidth Uncertainty = 5%

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Andy -xing

Report No.: TW2207043E Page 6 of 84

Date: 2022-07-09



2.0 Test Equipment							
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date		
ESPI Test Receiver	R&S	ESPI 3	100379	2022-06-17	2023-06-16		
LISN	R&S	EZH3-Z5	100294	2022-06-17	2023-06-16		
LISN	R&S	EZH3-Z5	100253	2022-06-17	2023-06-16		
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2022-06-17	2023-06-16		
Loop Antenna	EMCO	6507	00078608	2022-06-17	2023-06-16		
Spectrum	R&S	FSIQ26	100292	2022-06-17	2023-06-16		
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-06-17	2023-06-16		
Horn Antenna	R&S	BBHA 9120D	9120D-631	2021-07-02	2024-07-01		
Power meter	Anritsu	ML2487A	6K00003613	2022-06-17	2023-06-16		
Power sensor	Anritsu	MA2491A	32263	2022-06-17	2023-06-16		
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2021-07-02	2024-07-01		
9*6*6 Anechoic			N/A	2022-06-17	2023-06-16		
EMI Test Receiver	RS	ESVB	826156/011	2022-06-17	2023-06-16		
EMI Test Receiver	RS	ESH3	860904/006	2022-06-17	2023-06-16		
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2022-06-17	2023-06-16		
Spectrum	HP/Agilent	E4407B	MY50441392	2022-06-17	2023-06-16		
Spectrum	RS	FSP	1164.4391.38	2022-06-17	2023-06-16		
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/F A		2022-06-17	2023-06-16		
RF Cable	Zhengdi	7m		2022-06-17	2023-06-16		
RF Switch	EM	EMSW18	060391	2022-06-17	2023-06-16		
Pre-Amplifier	Schwarebeck	BBV9743	#218	2022-06-17	2023-06-16		
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2022-06-17	2023-06-16		
LISN	SCHAFFNER	NNB42	00012	2022-01-14	2023-01-13		

#### 2.2 Automation Test Software

## For Conducted Emission Test

Name	Version	
EZ-EMC	Ver.EMC-CON 3A1.1	

#### For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 7 of 84 Report No.: TW2207043E

Date: 2022-07-09



#### 3.0 **Technical Details**

#### 3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	Pass	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	Pass	Complies
Carrier Frequency Separation	15.247(a)(1)	Pass	Complies
20dB Channel Bandwidth	15.247 (a)(1)	Pass	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	Pass	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	Pass	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	Pass	Complies
<b>Conducted Emissions</b>	15.207(a), 15.107	Pass	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	Pass	Complies

#### 3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

#### 4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 84


Report No.: TW2207043E

Date: 2022-07-09



#### 5. **Power Line Conducted Emission Test**

#### 5.1 Schematics of the test

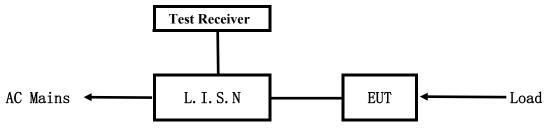


EUT: Equipment Under Test

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V∼ 60Hz Block diagram of Test setup

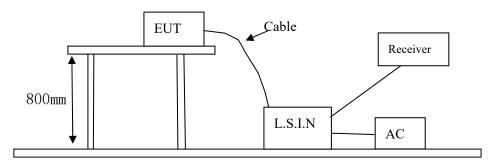

#### 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Date: 2022-07-09



## A. EUT

Device	Manufacturer	Model	FCC ID
TWS Earphone	Glory Star Technology Industrial Co.,	TWS105, MI-E101T	2AS7V-TWS105
1 ws Earphone	Ltd.	1 W 5105, WII-E1011	2A3/V-1W3103

#### B. Internal Device

Device	Manufacturer	Model	Rating
N/A			

## C. Peripherals

Device	Manufacturer	Model	Rating
N/A			

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

### 5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB $\mu$ V)				
(MHz)	Quasi-peak Level	Average Level			
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*			
$0.50 \sim 5.00$	56.0	46.0			
5.00 ~ 30.00	60.0	50.0			

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

## 5.6 Test Results

Pass

Page 9 of 84

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2022-07-09



#### Disturbance Voltage Limits at mains on Live terminals (150kHz to 30MHz) A:


**EUT Operating Environment** 

Humidity: 65%RH Atmospheric Pressure: 101 kPa Temperature: 26°C

**EUT set Condition: Keep Bluetooth Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

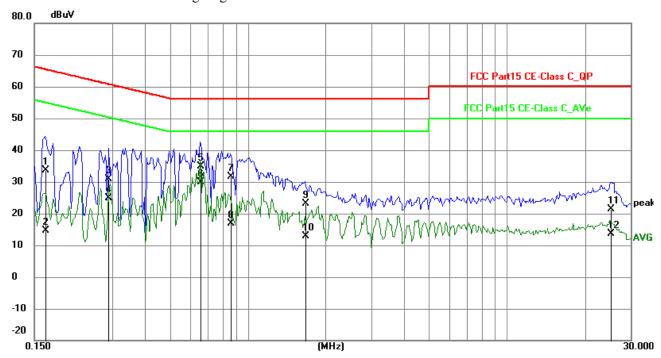

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1655	23.74	9.77	33.51	65.18	-31.67	QP	Р
2	0.1655	4.96	9.77	14.73	55.18	-40.45	AVG	Р
3	0.2904	21.09	9.76	30.85	60.51	-29.66	QP	Р
4	0.2904	15.18	9.76	24.94	50.51	-25.57	AVG	Р
5	0.6570	25.06	9.78	34.84	56.00	-21.16	QP	Р
6	0.6570	20.06	9.78	29.84	46.00	-16.16	AVG	Р
7	0.8598	21.78	9.79	31.57	56.00	-24.43	QP	Р
8	0.8598	6.97	9.79	16.76	46.00	-29.24	AVG	Р
9	1.6710	13.31	9.80	23.11	56.00	-32.89	QP	Р
10	1.6710	3.04	9.80	12.84	46.00	-33.16	AVG	Р
11	25.0779	10.43	10.99	21.42	60.00	-38.58	QP	Р
12	25.0779	2.69	10.99	13.68	50.00	-36.32	AVG	Р

Date: 2022-07-09



## B: Disturbance Voltage Limits at mains on Neutral terminals (150kHz to 30MHz)


**EUT Operating Environment** 

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Keep Bluetooth Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

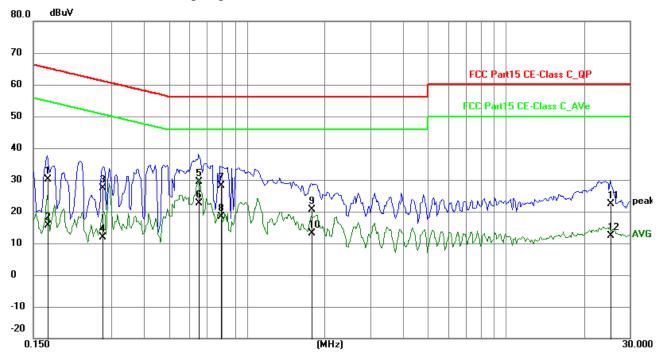

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1695	20.45	9.77	30.22	64.98	-34.76	QP	Р
2	0.1695	5.93	9.77	15.70	54.98	-39.28	AVG	Р
3	0.2787	17.62	9.76	27.38	60.85	-33.47	QP	Р
4	0.2787	2.22	9.76	11.98	50.85	-38.87	AVG	Р
5	0.6531	19.67	9.78	29.45	56.00	-26.55	QP	Р
6	0.6531	12.81	9.78	22.59	46.00	-23.41	AVG	Р
7	0.7960	18.46	9.78	28.24	56.00	-27.76	QP	Р
8	0.7960	8.67	9.78	18.45	46.00	-27.55	AVG	Р
9	1.7724	10.93	9.80	20.73	56.00	-35.27	QP	Р
10	1.7724	3.33	9.80	13.13	46.00	-32.87	AVG	Р
11	25.1949	11.35	11.00	22.35	60.00	-37.65	QP	Р
12	25.1949	1.44	11.00	12.44	50.00	-37.56	AVG	Р

Report No.: TW2207043E Page 12 of 84

Date: 2022-07-09




#### 6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

#### **Block diagram of Test setup**


For radiated emissions from 9kHz to 30MHz

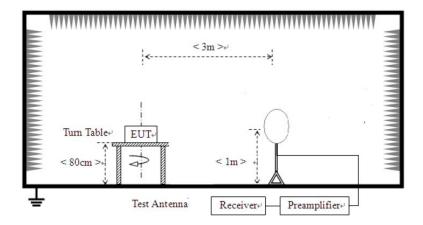


Date: 2022-07-09



For radiated emissions from 30MHz to1GHz

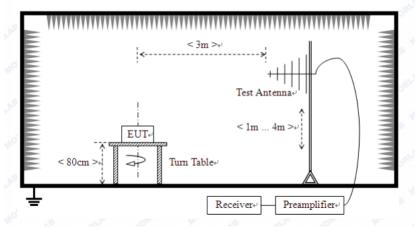

For radiated emissions above 1GHz

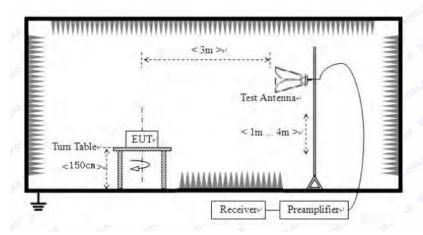

- 6.2 Configuration of The EUT Same as section 5.3 of this report
- 6.3 **EUT Operating Condition** Same as section 5.4 of this report.

Date: 2022-07-09



#### 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Page 14 of 84

#### Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB $\mu$ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4.  $\Pi/4DQPSK$  was the worst case because it has highest output power
- 5. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 6. Battery fully charged was used during the test.

Date: 2022-07-09



Page 15 of 84

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

**EUT set Condition:** Keep Bluetooth Transmitting


**Results: Pass**  Report No.: TW2207043E Page 16 of 84

Date: 2022-07-09



## Test Figure:

Н

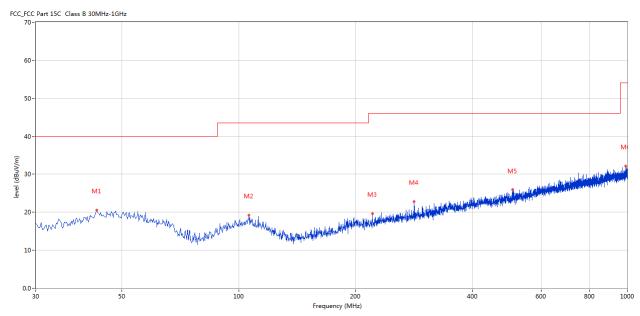

No.	Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
1	43.092	20.55	-11.50	40.0	-19.45	Peak	360.00	100	Horizontal	Pass
2	106.126	19.22	-13.32	43.5	-24.28	Peak	333.00	100	Horizontal	Pass
3	220.800	19.60	-13.29	46.0	-26.40	Peak	360.00	100	Horizontal	Pass
4	282.864	22.87	-11.41	46.0	-23.13	Peak	83.00	100	Horizontal	Pass
5	507.606	25.91	-6.89	46.0	-20.09	Peak	212.00	100	Horizontal	Pass
6	991.030	32.16	-1.36	54.0	-21.84	Peak	308.00	100	Horizontal	Pass


Report No.: TW2207043E Page 17 of 84

Date: 2022-07-09



### Test Figure:

V

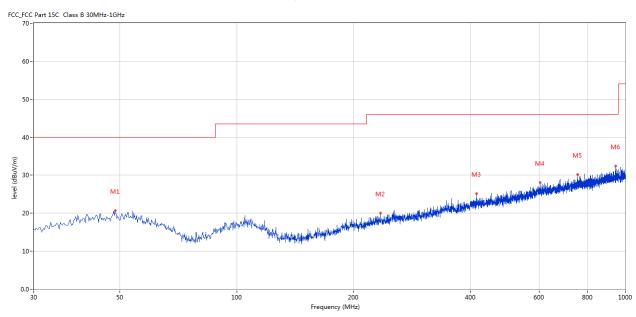

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	48.668	20.69	-11.22	40.0	-19.31	Peak	331.00	100	Vertical	Pass
2	234.376	19.97	-12.53	46.0	-26.03	Peak	58.00	100	Vertical	Pass
3	413.782	25.15	-8.27	46.0	-20.85	Peak	229.00	100	Vertical	Pass
4	604.096	28.04	-4.96	46.0	-17.96	Peak	110.00	100	Vertical	Pass
5	753.924	30.21	-3.40	46.0	-15.79	Peak	236.00	100	Vertical	Pass
6	943.997	32.39	-1.62	46.0	-13.61	Peak	326.00	100	Vertical	Pass

Report No.: TW2207043E Page 18 of 84

Date: 2022-07-09



## **Operation Mode: Transmitting under Low Channel (2402MHz)**

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
4804	1	Н	74(Peak)/ 54(AV)
4804	1	V	74(Peak)/ 54(AV)
7206		H/V	74(Peak)/ 54(AV)
9608	1	H/V	74(Peak)/ 54(AV)
12010	-	H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216	-	H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020	-	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

### **Operation Mode: Transmitting g under Middle Channel (2441MHz)**

Frequency (MHz)	Level@3m (dB \( \mu \text{V/m} \)	Antenna Polarity	Limit@3m (dB \( \mu \text{V/m} \)
	Level@3m (dB # V/m)		
4882	-	Н	74(Peak)/ 54(AV)
4882	1	V	74(Peak)/ 54(AV)
7323	-	H/V	74(Peak)/ 54(AV)
9764		H/V	74(Peak)/ 54(AV)
12205		H/V	74(Peak)/ 54(AV)
14646	-	H/V	74(Peak)/ 54(AV)
17087		H/V	74(Peak)/ 54(AV)
19528		H/V	74(Peak)/ 54(AV)
21969		H/V	74(Peak)/ 54(AV)
24410		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Page 19 of 84 Report No.: TW2207043E

Date: 2022-07-09



### Operation Mode: Transmitting under High Channel (2480MHz)

	8 8	,	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
4960		Н	74(Peak)/ 54(AV)
4960		V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

<sup>2.</sup> Remark "---" means that the emissions level is too low to be measured

Page 20 of 84


Report No.: TW2207043E

Date: 2022-07-09



## Please refer to the following test plots for details:

### Low Channel: Vertical

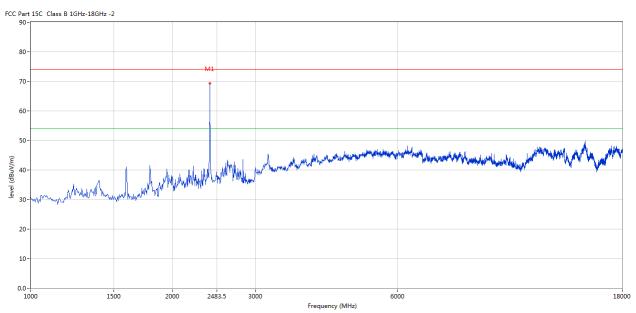


Page 21 of 84 Report No.: TW2207043E

Date: 2022-07-09



#### Low Channel: Horizontal

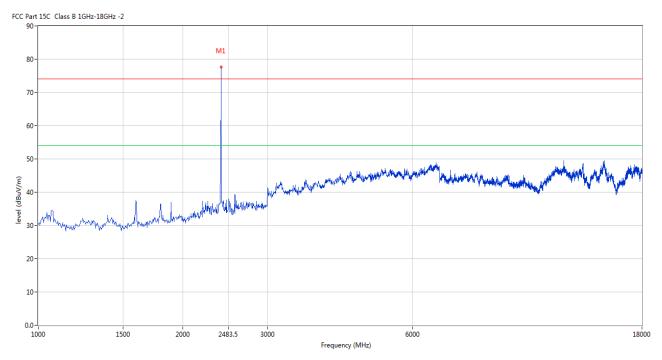


Report No.: TW2207043E Page 22 of 84

Date: 2022-07-09



#### Middle Channel: Horizontal

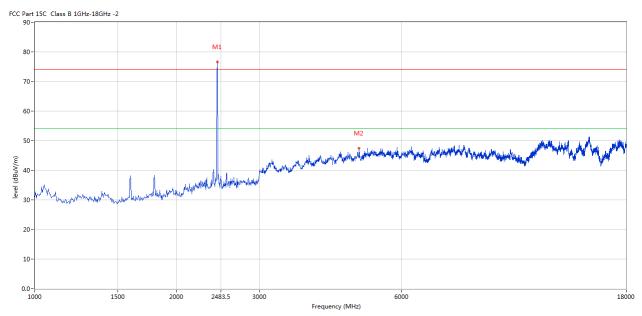


1	No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	2	4880.250	47.50	3.20	74.0	-26.50	Peak	360.00	100	Horizontal	Pass

Report No.: TW2207043E Page 23 of 84

Date: 2022-07-09



#### Middle Channel: Vertical

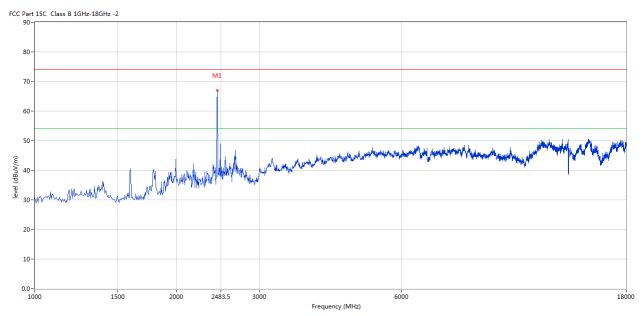


Report No.: TW2207043E Page 24 of 84

Date: 2022-07-09



### **High Channel: Horizontal**

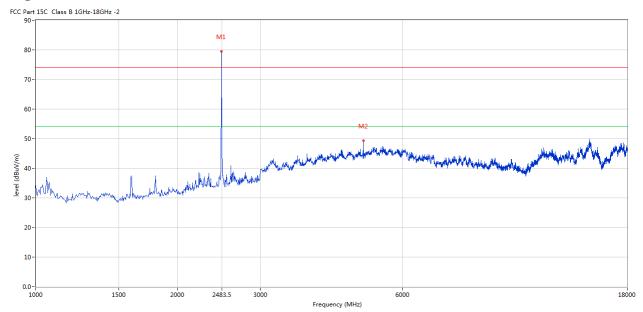


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4961.000	49.25	3.36	74.0	-24.75	Peak	3.00	100	Horizontal	Pass

Report No.: TW2207043E Page 25 of 84

Date: 2022-07-09



#### **High Channel: Vertical**

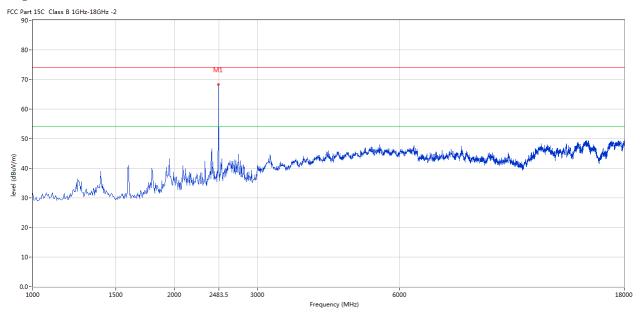

Note: 1. for the radiated emissions above 18G and below 30MHz, it is the floor noise.

2. the measured PK radiated emissions level less than the AV limit, so no necessary to take down the AV result

Date: 2022-07-09



Page 26 of 84

#### 7.0 20dB Bandwidth Measurement

#### 7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

#### 7.2 Limits of 20dB Bandwidth Measurement

N/A

#### 7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

#### 7.4 Test Result

#### Type of Modulation: GFSK

Type of Modulation. Of Six							
EUT TWS		S Earphone	Model	TWS105			
Mode Keep		Transmitting	Input Voltage	DC3.7V			
Temperature 24		4 deg. C,	Humidity	56% RH			
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass/ Fail			
Low	2402	842		Pass			
Middle	2441	842		Pass			
High	2480	848		Pass			


Page 27 of 84 Report No.: TW2207043E

Date: 2022-07-09



### Test Figure:

## 1. Condition: Low Channel

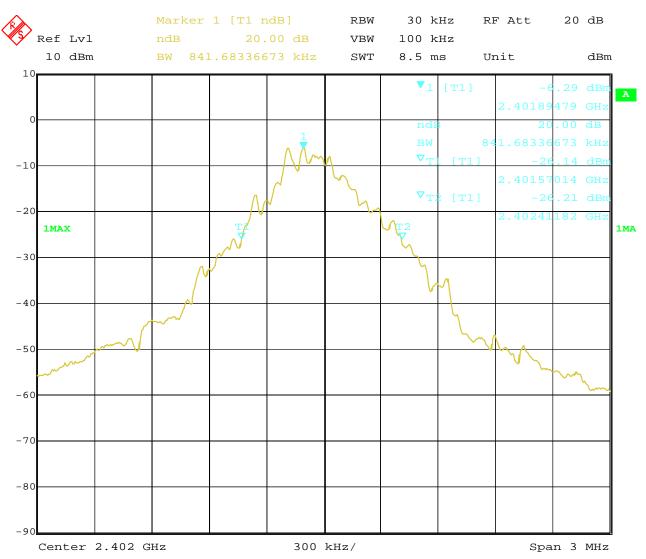


Page 28 of 84 Report No.: TW2207043E

Date: 2022-07-09



#### 2. Condition: Middle Channel

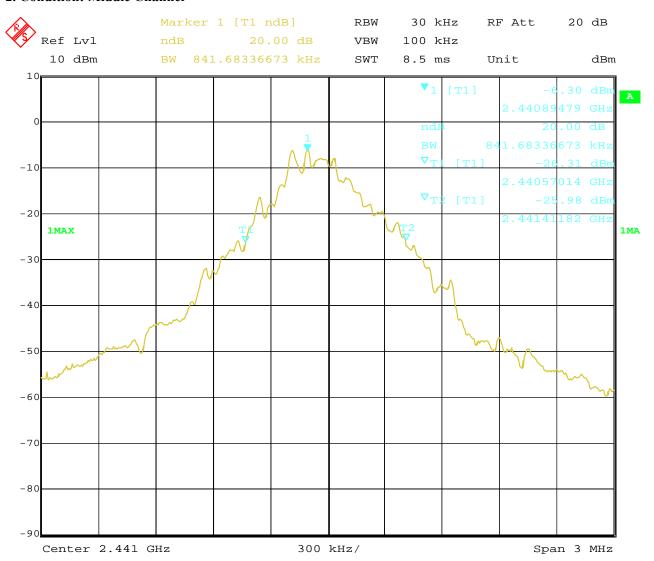


Page 29 of 84 Report No.: TW2207043E

Date: 2022-07-09



#### 3. High Channel

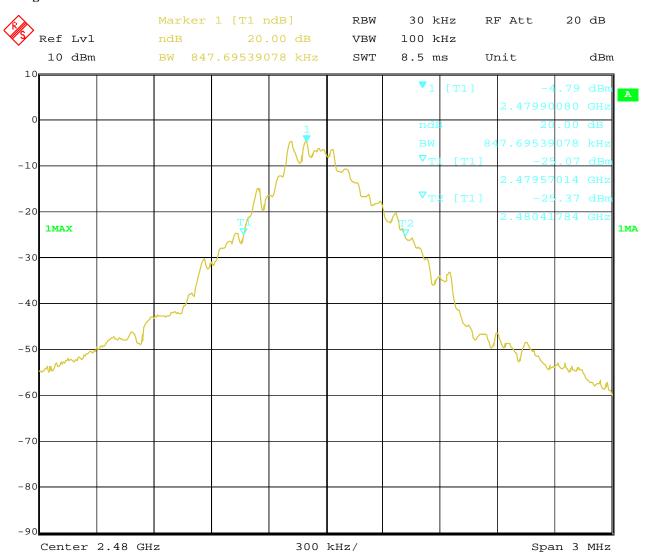

Report No.: TW2207043E Page 30 of 84

Date: 2022-07-09



#### **Test Result**

Type of Modulation:  $\sqrt{1/4}$ DQPSK

EUT	TW	/S Earphone	Model	TWS105
Mode	Keep	Transmitting	Input Voltage	DC3.7V
Temperature	2	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)  20 dB Bandwidth (kHz)		Maximum Limit (kHz)	Pass/ Fail
Low	2402	1287		Pass
Middle	2441	1281		Pass
High	2480	1281		Pass


Page 31 of 84 Report No.: TW2207043E

Date: 2022-07-09



### Test Figure:

## 1. Condition: Low Channel

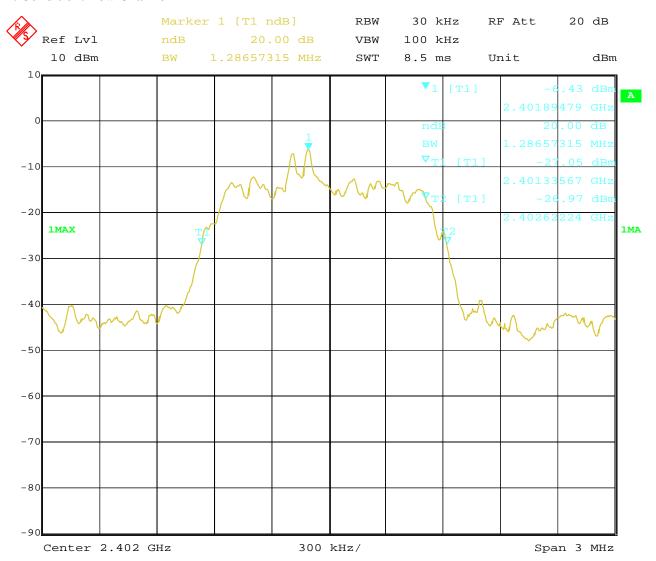


Page 32 of 84 Report No.: TW2207043E

Date: 2022-07-09



#### 2. Condition: Middle Channel

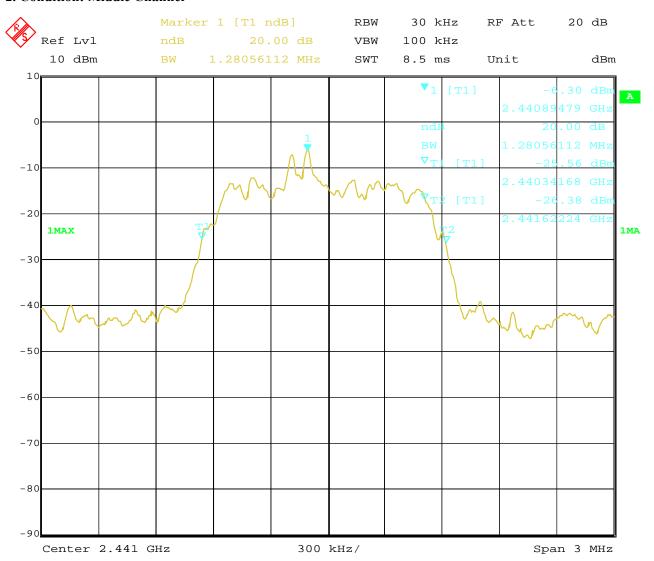


Page 33 of 84 Report No.: TW2207043E

Date: 2022-07-09



#### 3. High Channel

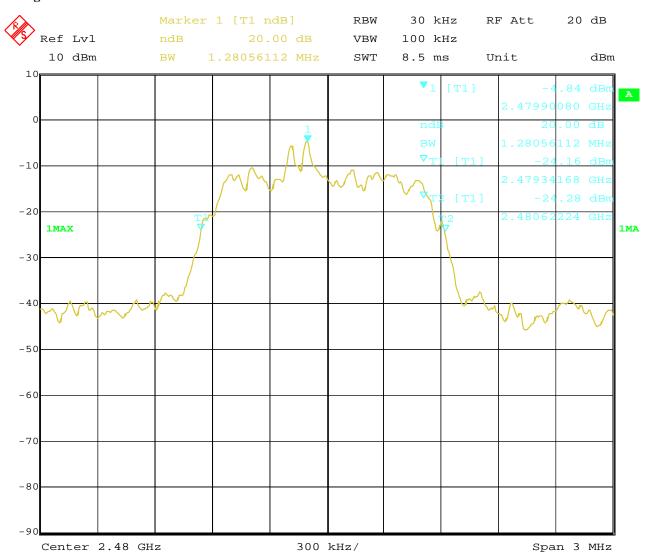

Date: 2022-07-09



Page 34 of 84

## 8. Maximum Output Power

### 8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

#### **8.3 Test Procedure**

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Date: 2022-07-09



Page 35 of 84

#### **8.4Test Results**

### Type of Modulation: GFSK

EUT	VT	WS Earphone	Model	TWS105
Mode	Kee	p Transmitting	Input Voltage	DC3.7V
Temperature		24 deg. C,	Humidity	56% RH
Channel	Channel Max. Power Output Frequency (dBm)  (MHz) Peak		Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-5.35	30	Pass
Middle			30	Pass
High			30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The **Peak** power was measured

### 

EUT		TWS Earphone	Model	TWS105
Mode		Keep Transmitting	Input Voltage	DC3.7V
Temperature		24 deg. C,	Humidity	56% RH
Channel	Channel Frequency	Max. Power Output (dBm)	Peak Power Limit	Pass/ Fail
	(MHz)	Peak	(dBm)	
Low	2402	-1.87	30	Pass
Middle	2441 -1.74		30	Pass
High	2480	-0.20	30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2022-07-09



Page 36 of 84

# 9. Carrier Frequency Separation

### 9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

## 9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

#### 9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span; Video (or Average) Bandwidth (VBW)  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 37 of 84 Report No.: TW2207043E

Date: 2022-07-09




#### 9.4Test Result

## **Type of Modulation: GFSK**

EUT	TWS Earphone		Model		TWS105
Mode	Hopping On		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity		56% RH
Carrier Frequency Separation			Limit		Pass/ Fail
1.000MHz		≥ 25 kHz or 2/3	of the 20 dB ban	dwidth	Pass

#### **Test Plots**

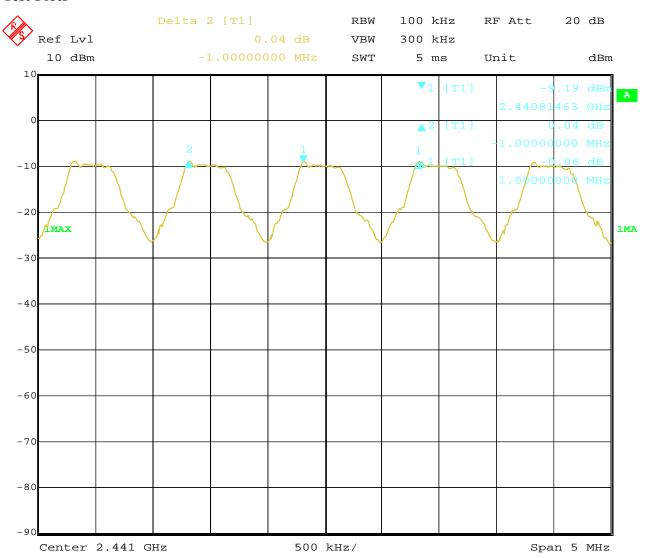

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: TW2207043E Page 38 of 84


Date: 2022-07-09



### Type of Modulation: Л/4DQPSK

EUT	TWS Earphone		Model		TWS105
Mode	Hopping On I		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity		56% RH
Carrier Frequency Separation		Limit			Pass/ Fail
1.000MHz		≥ 25 kHz or 2	2/3 of 20 dB bandy	width	Pass

#### **Test Plots**

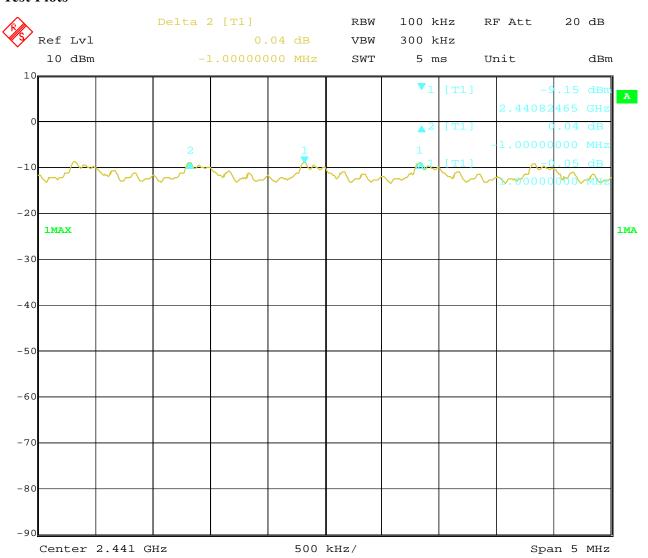

Report No.: TW2207043E

Date: 2022-07-09



Page 39 of 84

#### 10. Number of Hopping Channels

## 10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

#### 10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

#### **10.3 Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 40 of 84

Report No.: TW2207043E

Date: 2022-07-09




#### **10.4Test Result**

#### Type of Modulation: GFSK

EUT	TWS Earphone		Model	TWS105	
Mode	Hopping On		Input Voltage	DC3.7V	
Temperature	24 deg. C,		Humidity	56% RH	
Operating Free	quency	Number of hopping channels		Limit	Pass/ Fail
2402-2480MH	2402-2480MHz 79			≥ 15	Pass

#### **Test Plot**

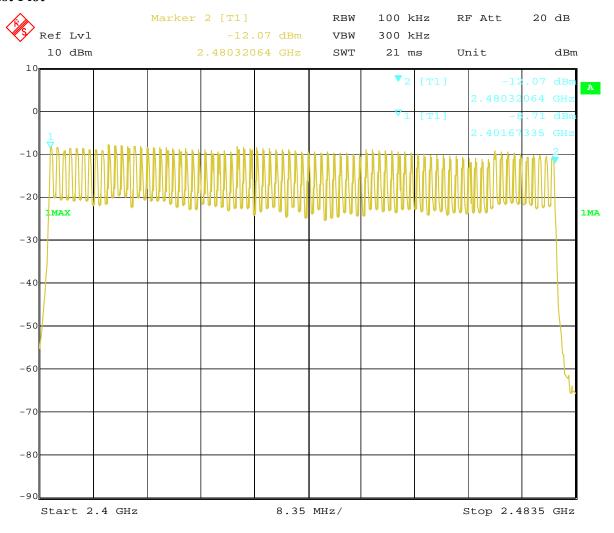

Page 41 of 84

Report No.: TW2207043E


Date: 2022-07-09



#### Type of Modulation: $\sqrt{J/4DQPSK}$

EUT	TWS Earphone		Mode	el		TWS105
Mode	Hopping On		Input Volta			DC3.7V
Temperature	24 deg. C,		Hum	idity	56% RH	
Operating Frequ	Number of hopping channels		g	Lir	nit	Pass/ Fail
2402-2480MHz		79		<u>&gt;</u>	15	Pass

#### **Test Plot**

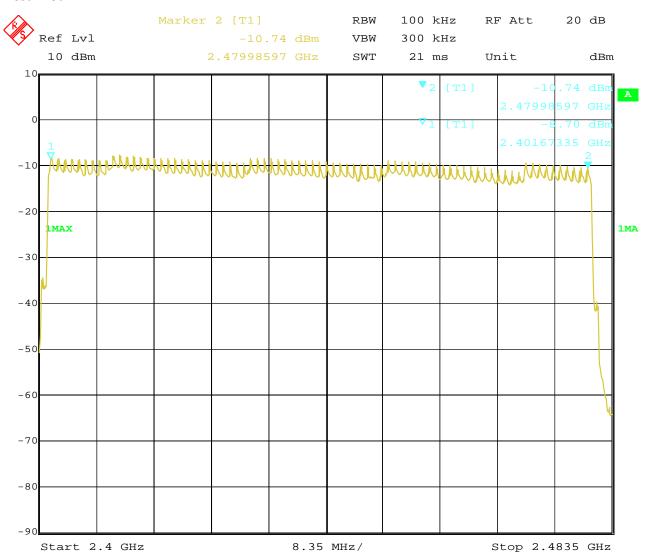

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: TW2207043E

Date: 2022-07-09



Page 42 of 84

### 11. Time of Occupancy (Dwell Time)

#### 11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### 11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

#### 11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No.: TW2207043E

Date: 2022-07-09



Page 43 of 84

#### 11.4 Test Result

#### Type of Modulation: GFSK

EUT	TWS I	TWS Earphone		Т	WS105
Mode	Keep Tr	Keep Transmitting		Ε	OC3.7V
Temperature	e 24 d	24 deg. C,		56% RH	
Channel	Reading	Hoping	g Rate	Actual	Limit
DH5					
Middle	2.986ms	266.667 hop/s		0.319s	0.4s
			DH3		
Middle	1.743ms	400 hop/s		0.279s	0.4s
DH1			DH1		
Middle	0.461ms	800 h	nop/s	0.148s	0.4s

Actual = Reading  $\times$  (Hopping rate / Number of channels)  $\times$  Test period, Test period = 0.4 [seconds / channel]  $\times$  79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 $\mu$ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.


Page 44 of 84

Report No.: TW2207043E

Date: 2022-07-09




Test Plots:

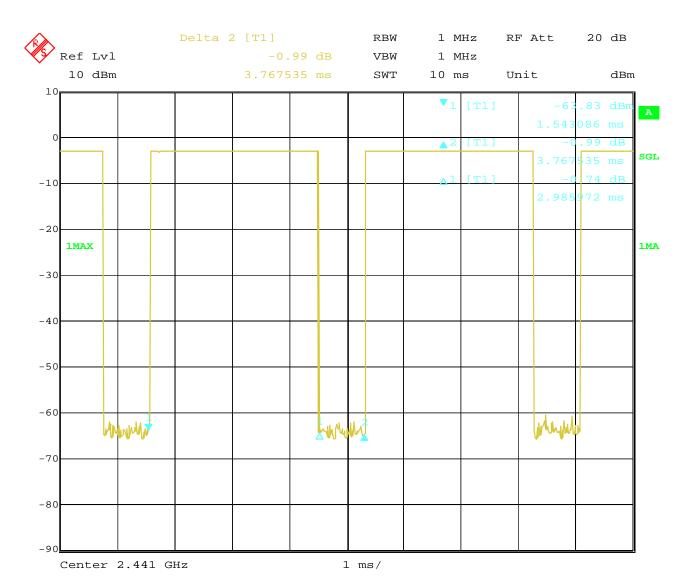

Page 45 of 84 Report No.: TW2207043E

Date: 2022-07-09




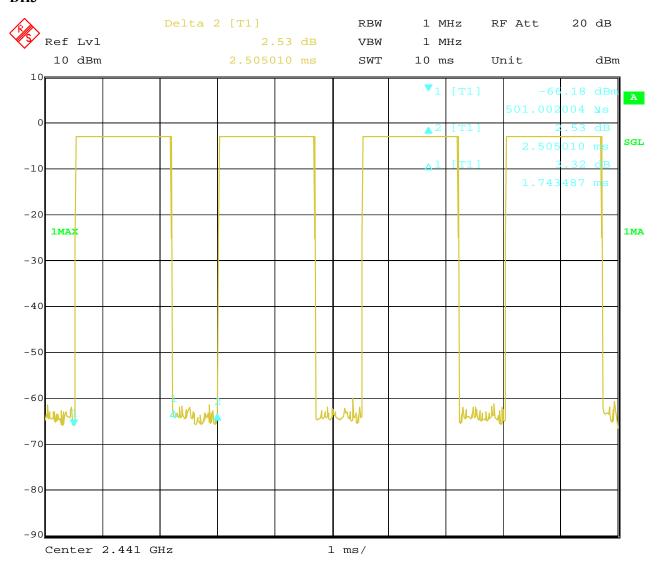

Page 46 of 84 Report No.: TW2207043E

Date: 2022-07-09



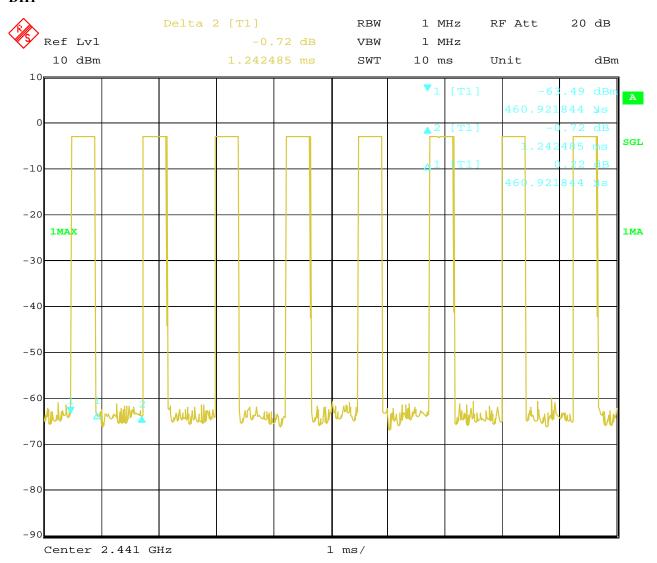

Report No.: TW2207043E Page 47 of 84

Date: 2022-07-09



#### **Test Result**

## Type of Modulation: $\sqrt{J}/4DQPSK$

EUT	TWS I	Earphone	Model	7	TWS105
Mode	Keep Tra	ansmitting	Input Voltage	]	DC3.7V
Temperatur	re 24 d	leg. C,	Humidity	4	56% RH
Channel	Reading	Hoping	g Rate	Actual	Limit
2DH5					
Middle	2.986ms	266.667 hop/s		0.319s	0.4s
			2DH3		
Middle	1.723ms	400 hop/s		0.276s	0.4s
			2DH1		
Middle	0.481ms	800 h	nop/s	0.154s	0.4s

Actual = Reading  $\times$  (Hopping rate / Number of channels)  $\times$  Test period, Test period = 0.4 [seconds / channel]  $\times$  79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 $\mu$ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.


A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Page 48 of 84 Report No.: TW2207043E

Date: 2022-07-09




#### Test Plots:

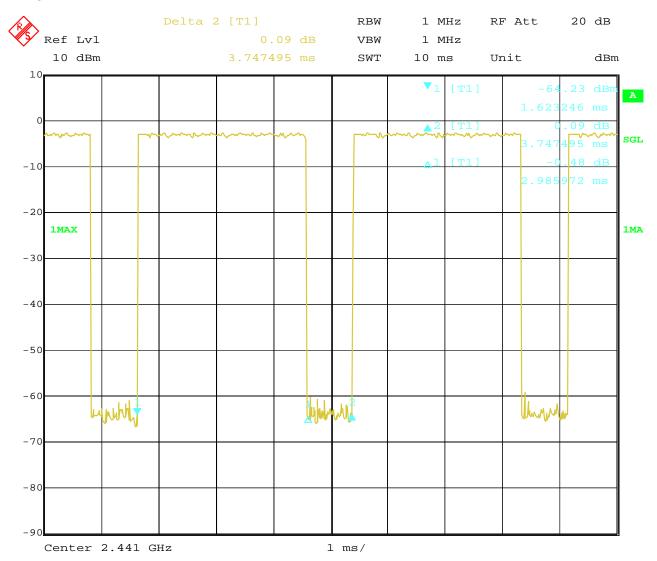

Page 49 of 84 Report No.: TW2207043E

Date: 2022-07-09




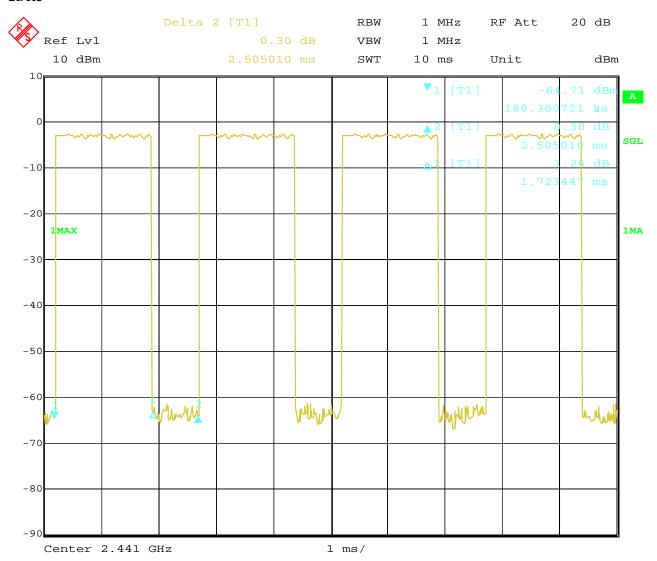

Page 50 of 84 Report No.: TW2207043E

Date: 2022-07-09



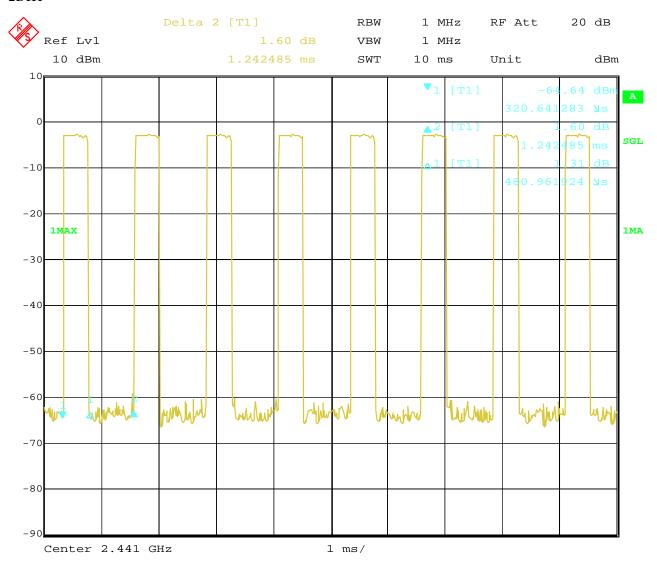

Report No.: TW2207043E


Date: 2022-07-09



Page 51 of 84

#### 12 Out of Band Measurement

#### 12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

#### 12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

#### **12.3 Test Procedure**

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100kHz, VBW=300 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 52 of 84 Report No.: TW2207043E


Date: 2022-07-09



## **Type of Modulation: GFSK**

#### Band Edge Test Result 12.4

Product:	TWS Earphone	Test Mode:	TWS105
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

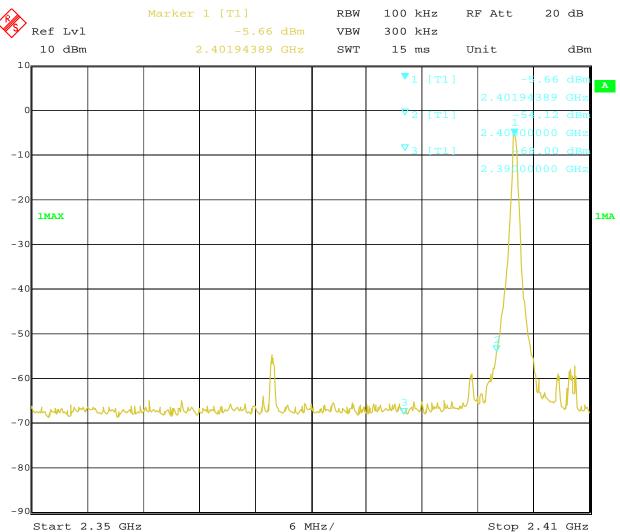

Page 53 of 84

Report No.: TW2207043E


Date: 2022-07-09



#### **Type of Modulation: GFSK**

#### Band Edge Test Result 12.4

Product:	TWS Earphone	Test Mode:	TWS105
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

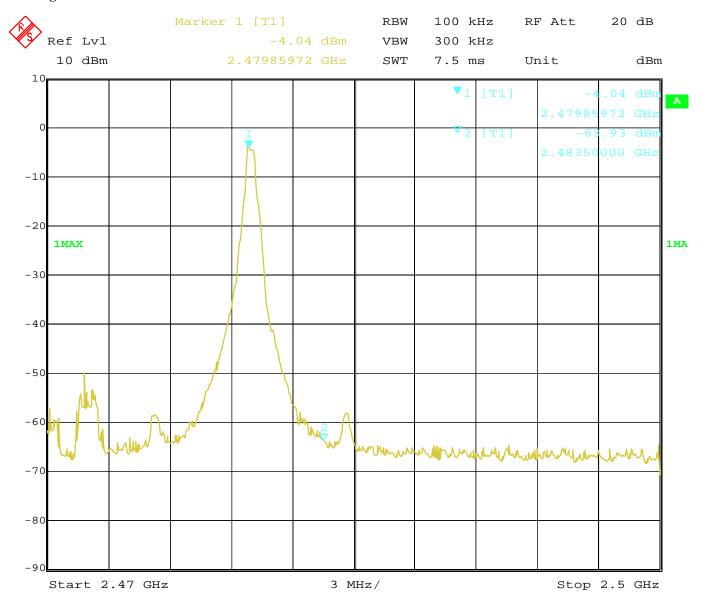

Page 54 of 84 Report No.: TW2207043E


Date: 2022-07-09



## Type of Modulation: GFSK

## Band Edge Test Result

Product:	TWS Earphone	Test Mode:	TWS105
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

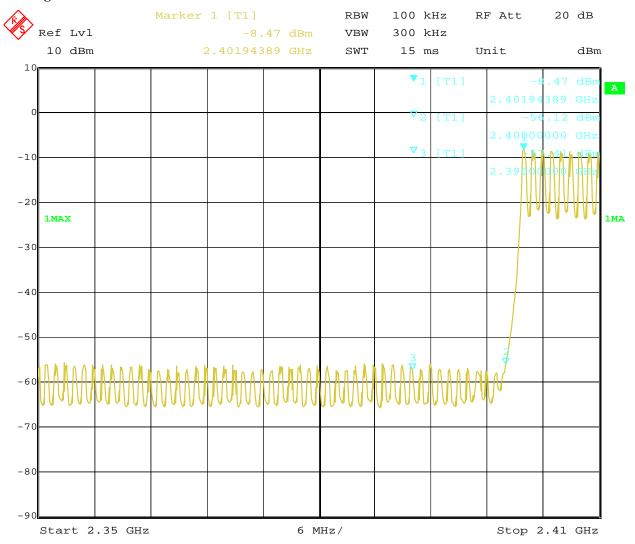

Page 55 of 84 Report No.: TW2207043E


Date: 2022-07-09



## **Type of Modulation: GFSK**

#### Band Edge Test Result

Product:	TWS Earphone	Test Mode:	TWS105
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

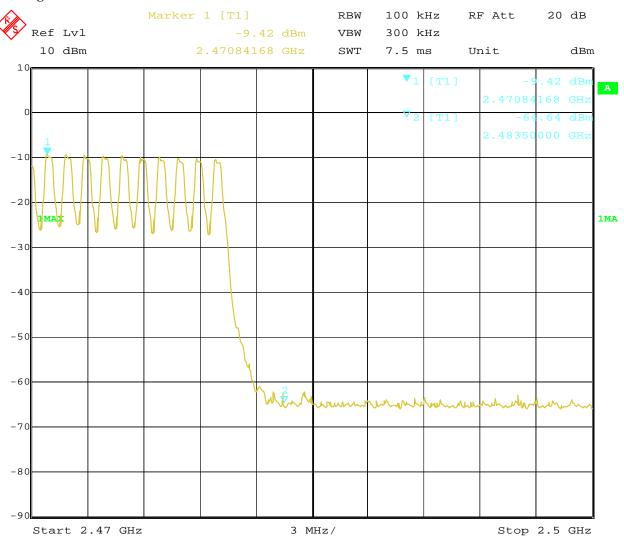

Page 56 of 84

Report No.: TW2207043E


Date: 2022-07-09



## Type of Modulation: $\sqrt{1/4}$ DQPSK

## 12.4 Out of Band Test Result

Product:	TWS Earphone	Test Mode:	TWS105
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

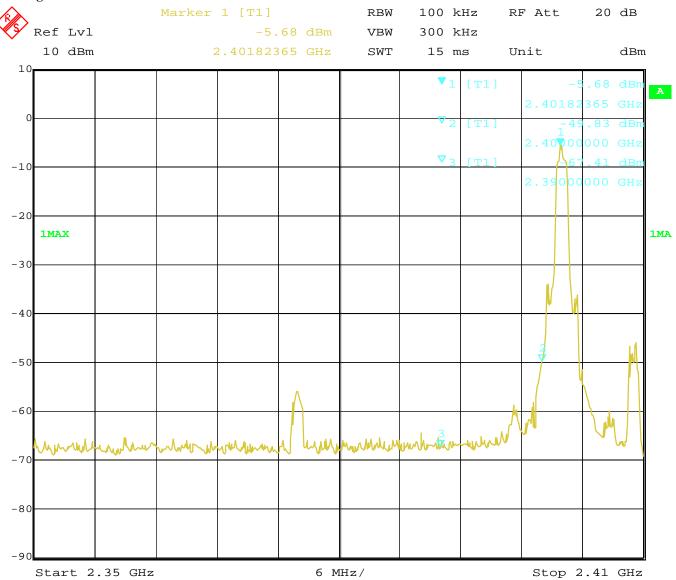

Page 57 of 84 Report No.: TW2207043E


Date: 2022-07-09



#### Type of Modulation: Л/4DQPSK

#### Band Edge Test Result 12.4

Product:	TWS Earphone	Test Mode:	TWS105
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

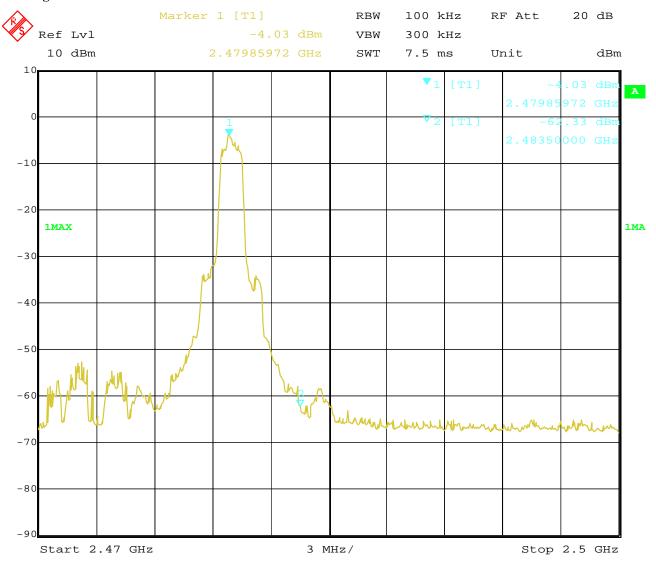

Page 58 of 84 Report No.: TW2207043E


Date: 2022-07-09



#### Type of Modulation: Л/4DQPSK

## Out of Band Test Result

Product:	TWS Earphone	Test Mode:	TWS105
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

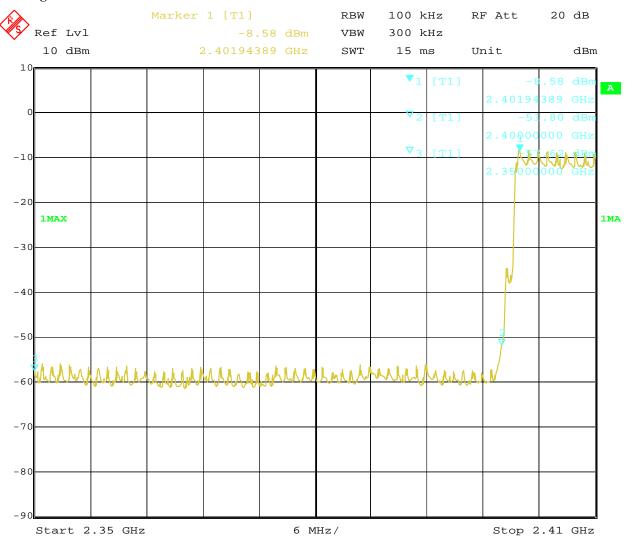

Page 59 of 84

Report No.: TW2207043E


Date: 2022-07-09



## Type of Modulation: $\pi/4DQPSK$

## Out of Band Test Result

Product:	TWS Earphone	Test Mode:	TWS105
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

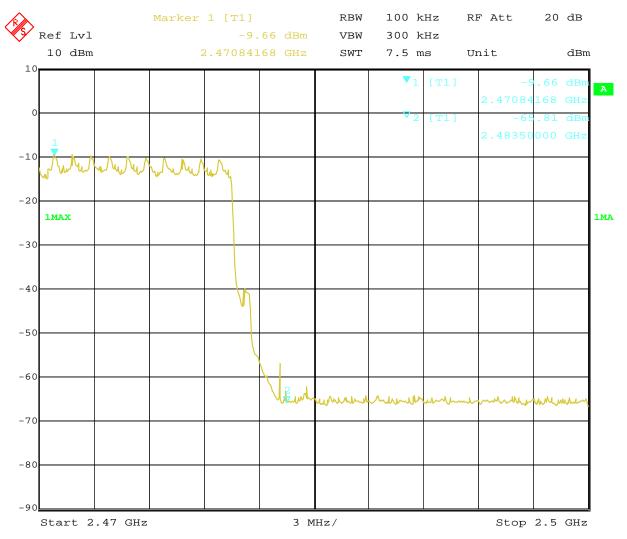


Report No.: TW2207043E Page 60 of 84

Date: 2022-07-09



#### 12.4 **Restrict Band Measurement**

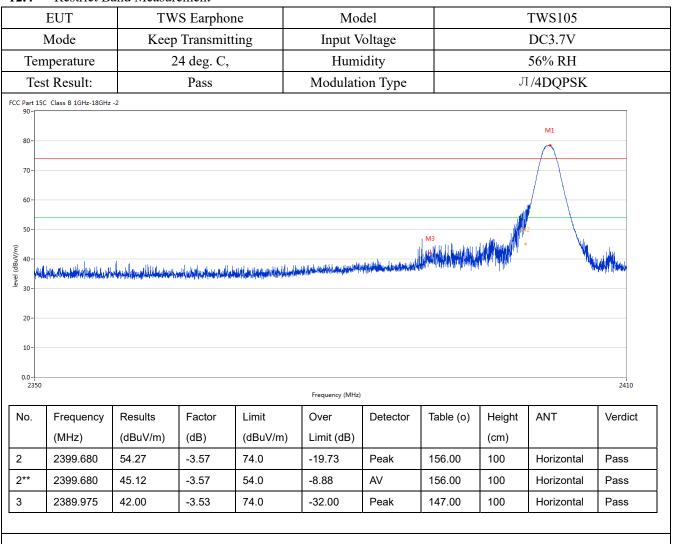


Page 61 of 84 Report No.: TW2207043E

Date: 2022-07-09



#### 12.4 Restrict Band Measurement

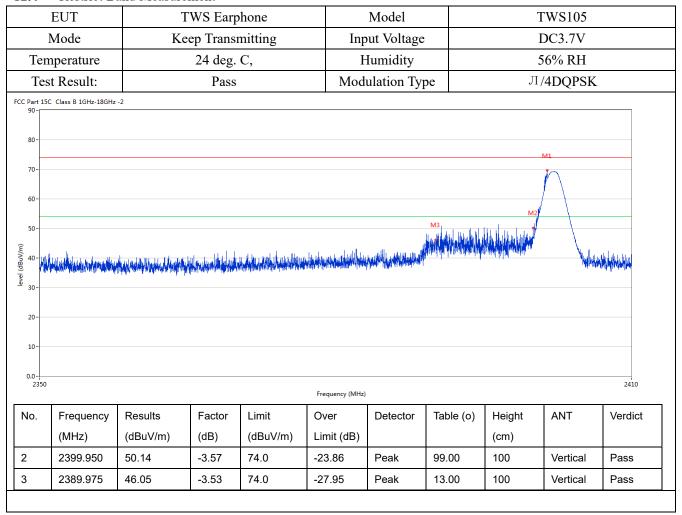

Report No.: TW2207043E Page 62 of 84

Date: 2022-07-09



#### 12.4 Restrict Band Measurement

E	EUT	TV	VS Earpl	none	M	odel			TWS105	
N	Mode	Kee	Transm	nitting	Input	Voltage			DC3.7V	
Temp	perature		24 deg. (	Ξ,	Hu	midity			56% RH	
Test	t Result:		Pass		Modula	ation Type		٠	∏/4DQPSK	
C Part 15C (	Class B 1GHz-18GHz	-2					•			
80-			<i>y</i>							
70-										
60-			u tik William							
		الليال								
50-		kildirild		1	<b>.</b> .					
					The same of the sa			<u> </u>	iantum cuim il quality disk philabouring	May a light again. If the Aghly
50- 40- 30-					The same of the sa		the acceptance of the second	dan budan propinsi singka	iantumususus alipuddiffyddigad afundispud	Mayor likhangar di lipu da da da
40-					Market Mills		the state of the s	المعارفين والمعارفين و	hairen eine die belief die feligie bei jard in de	Mar Walter All Is a Mar
40 - 30 - 20 - 20 -						Marin de pris de la	haife a maragin da mar la bar pi ya	dad bulante popular virgilis	instruments deutstydd fel dinheisiad	marijandindaj
40- 30-						Marin de pris de Aplid	the analysis of the second	الموادية ال	interpretarilly of the policy of the state o	ma, cidare di Pada di
40 - 30 - 20 - 20 -					2483.5 Frequency (MHz)				induserativativativativativativativativati	2500
20- 10- 2470	Frequency	Results	Factor	Limit			Table (o)	Height	ANT	2500 Verdict
40- 20- 10- 2470	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	T	Frequency (MHz)					

Report No.: TW2207043E Page 63 of 84

Date: 2022-07-09



#### **Restrict Band Measurement** 12.4

EU	J I	1 **	S Earpho	one	1710	del			ΓWS105	
Mo	ode	Keep	Transmi	tting	Input '	Voltage		]	DC3.7V	
Tempe	erature	2	24 deg. C,	,	Hun	nidity		4	56% RH	
Test R	Result:		Pass		Modulat	ion Type		Л	/4DQPSK	
Part 15C Clas	ss B 1GHz-18GHz	-2								
80-										
70-			Mr	M						
			M	1						
60-				M.						
50-	fdd Lailmalla a fffferfyr fe f. c.	londinish kula teksis de de la	liviylar del	A Park	k of the latest of the latest of the	الإن الله الله الله الله الله الله الله الل	100 100 100 100 100 100 100 100 100 100	ما فلم داد رور الدرانية الما فلما الماسان ال	والمراسلة	Marketti aktiiva
50-	Marie de californie de des	harvandri yapaan ka	Hrithard &	The state of the s	anipahlipinipalinpahi	hill of the state	abaliff, fireber hairel	uhidi Madhadaladdh	Kalitanik (Majidnik) per	Migh maid airipp
40-	hidanina katifilarik des	horina de diplomo de Militado	livito de la companya della companya della companya de la companya de la companya della companya	The state of the s	anyahilyainajadannintia	hill of the state	abaliff fitteler baliff	abiekkelejejekepk	rfahltanhthydyidodd phl	Hiphranid Adapta
40-	distantisticality or by or	handisin di dapah kan pertebut di per	ingly of	The state of the s	knowledge kilosofi de provincia	distribution of the 100	abhalidh direicheo <sup>d</sup> haliadh	akirik kira agabaph	<sub>(</sub> Azdiklariak laydyadaliyada	Affin and Adapt
30- 20-	dijanirahan Perdebut	apodosou bud paposopiete i i i i i i i i i i i i i i i i i i	livyba <sup>rd</sup>	The state of the s	k nye delik piliniya kineenii ka		ababaff lationed quitable	akidik di bagi dagi b	Additional types of the test o	Apphaed Adopt
30- 20-	diglament and the published on	harding the displayed the light	bylk ra	2	183.5 Frequency (MHz)		adda halfa fa fara da ar da a bhaile fa	akentenagahaph	Ashikanak kyapanakipah	2500
50- 40- 30- 20- 10- 0.0- 2470	requency	Results	Factor	2. Limit		Detector	Table (o)	Height	ANT	2500 Verdict
30- 20- 10- 0.0- 2470	requency MHz)	Results (dBuV/m)	Factor (dB)		Frequency (MHz)	Detector	Table (o)	Height (cm)	ANT	1

Note: 1. For Restricted band test, only the worst case was reported and  $\pi/4$ DQPSK was the worst case

2. The measured PK radiated emissions level less than the AV limit, so no necessary to take down the AV result

Report No.: TW2207043E

Date: 2022-07-09



# Page 64 of 84

### 13.0 Antenna Requirement

#### 13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 13.2 Antenna Connected constructions

Chip antenna used. The gain is 1.06dBi.

Report No.: TW2207043E

Date: 2022-07-09



Page 65 of 84

#### 14.0 FCC ID Label

#### **FCC ID: 2AS7V-TWS105**

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Page 66 of 84

Report No.: TW2207043E

Date: 2022-07-09



#### 15.0 **Photo of testing**

Conducted Emission Test Setup:



Page 67 of 84

Report No.: TW2207043E

Date: 2022-07-09



#### Radiated Emission Test Setup:



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2207043E

Date: 2022-07-09



#### Photographs - EUT

## Outside View - charger base



The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 69 of 84

Report No.: TW2207043E

Date: 2022-07-09



## Outside View - charger base



The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 70 of 84 Report No.: TW2207043E

Date: 2022-07-09



## Outside View - charger base




Page 71 of 84

Report No.: TW2207043E

Date: 2022-07-09



## Outside View - Left earphone

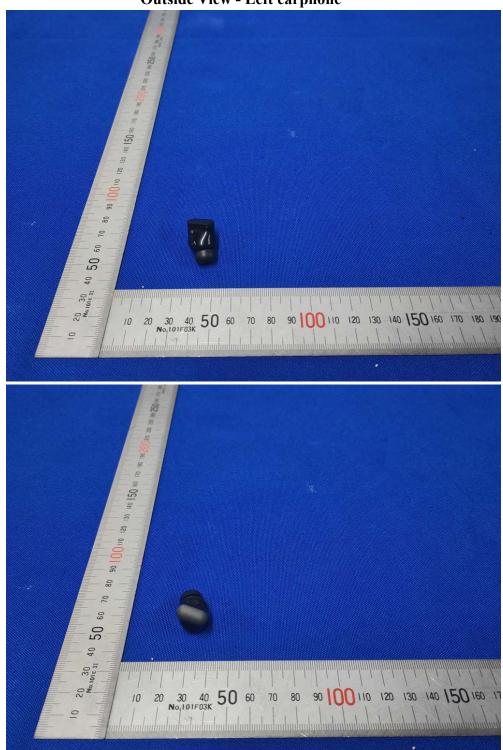

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 72 of 84 Report No.: TW2207043E

Date: 2022-07-09



## Outside View - Left earphone

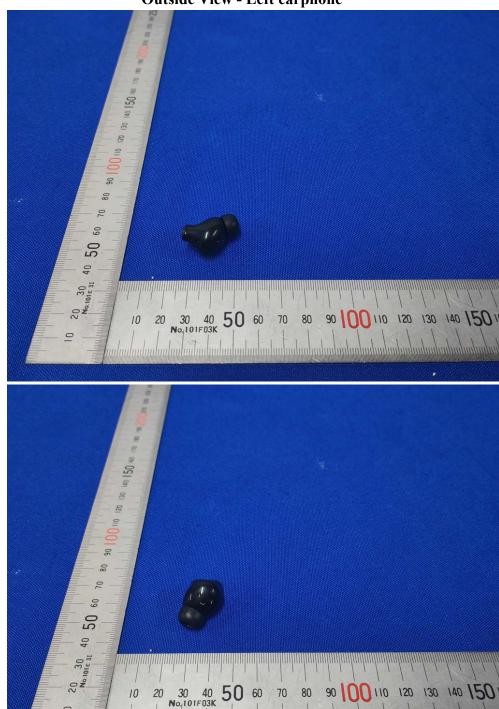

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 73 of 84


Report No.: TW2207043E

Date: 2022-07-09



## Inside View - Left earphone



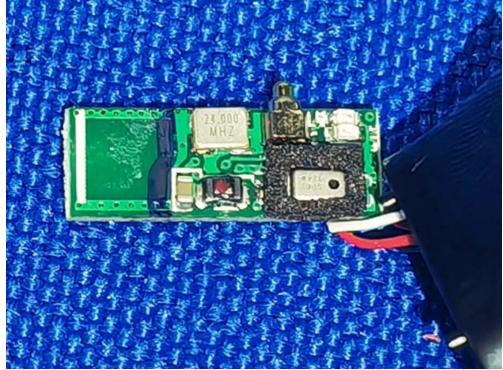


Page 74 of 84


Report No.: TW2207043E

Date: 2022-07-09



# **Inside View - Left earphone**

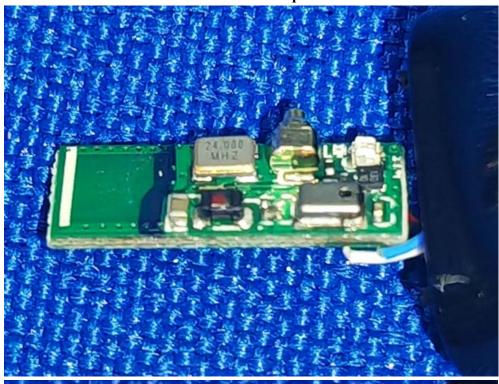

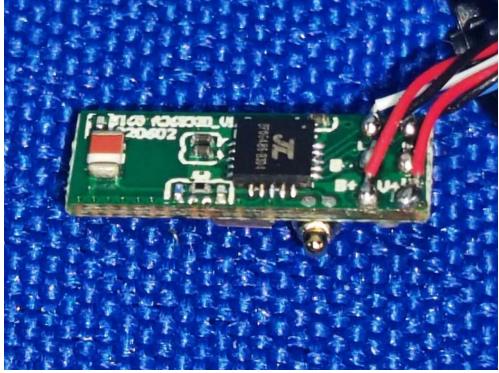


Page 75 of 84

Report No.: TW2207043E

Date: 2022-07-09



**Inside View - Left earphone** 

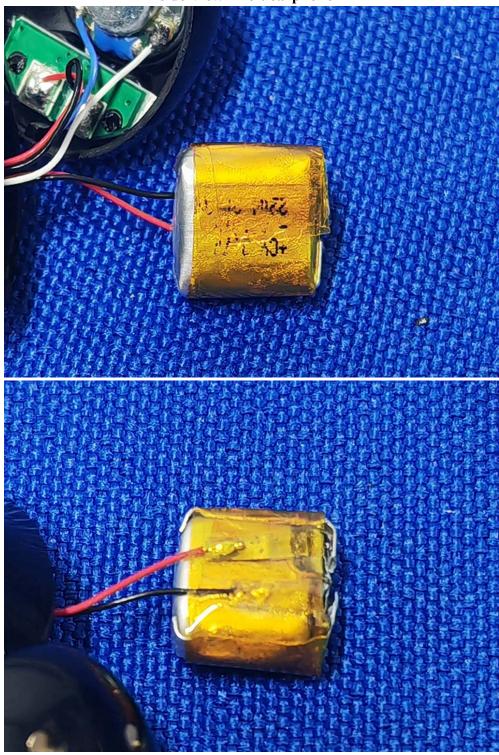


Page 76 of 84

Report No.: TW2207043E

Date: 2022-07-09



Inside View - Left earphone

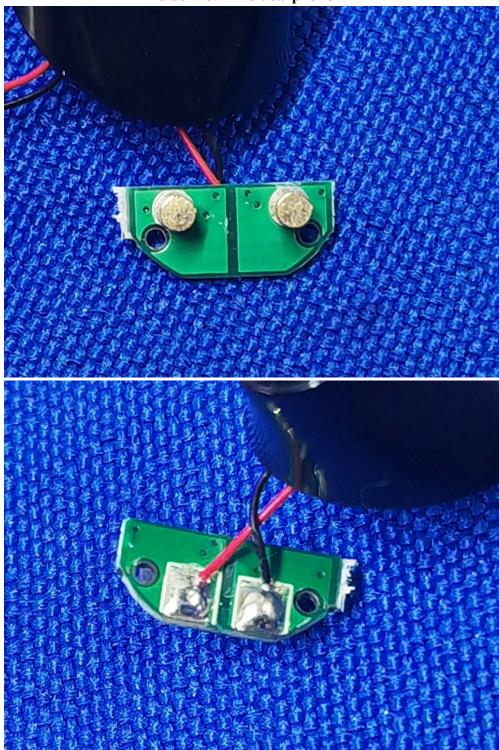

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 77 of 84

Report No.: TW2207043E

Date: 2022-07-09



Inside View - Left earphone

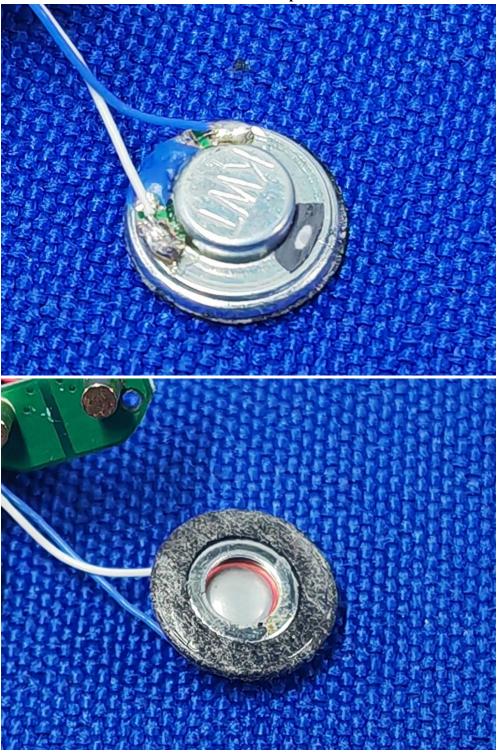

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 78 of 84

Report No.: TW2207043E

Date: 2022-07-09



### **Outside View - Right earphone**






Page 79 of 84

Report No.: TW2207043E

Date: 2022-07-09



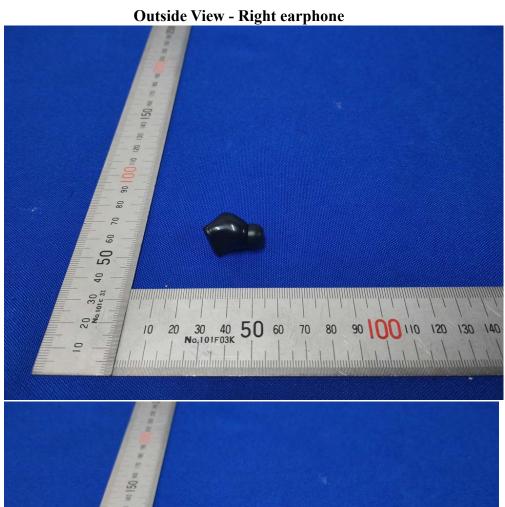




Page 80 of 84

Report No.: TW2207043E

Date: 2022-07-09



### Inside View - Right earphone

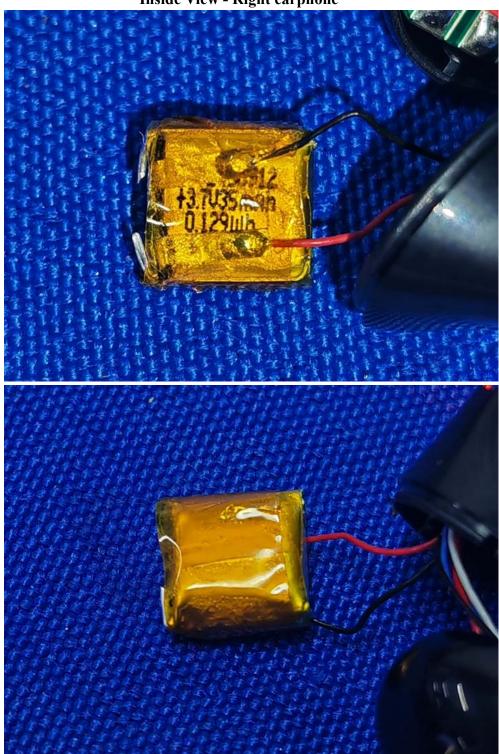

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 81 of 84

Report No.: TW2207043E

Date: 2022-07-09



### Inside View - Right earphone

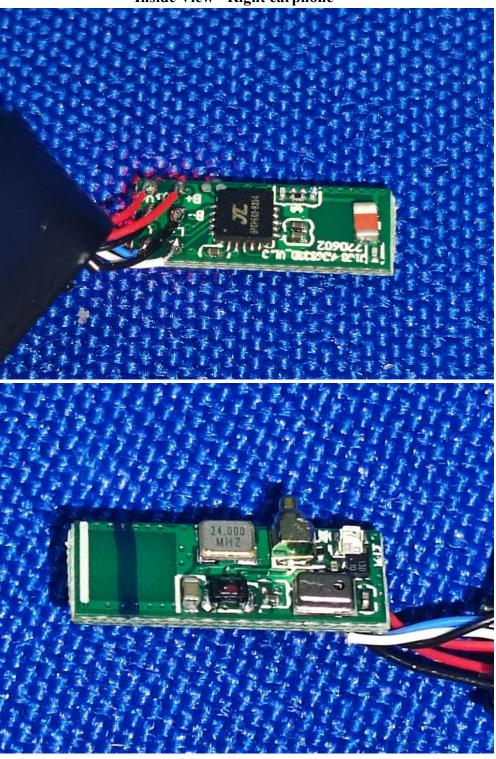

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 82 of 84

Report No.: TW2207043E

Date: 2022-07-09



Inside View - Right earphone

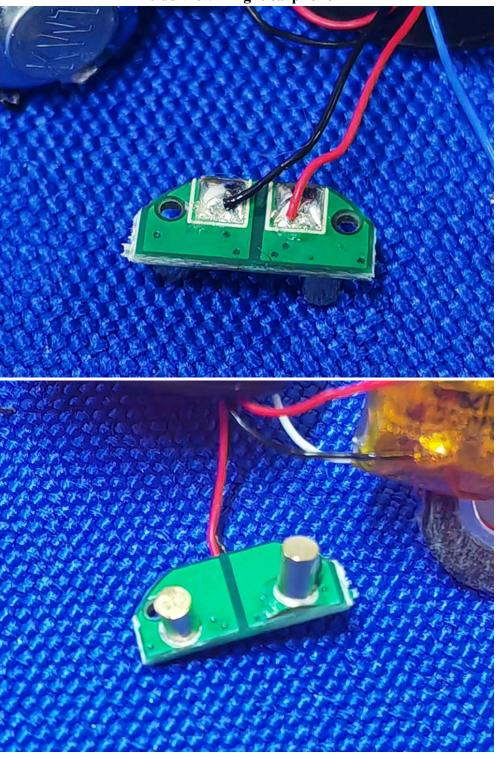

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 83 of 84

Report No.: TW2207043E

Date: 2022-07-09



Inside View - Right earphone

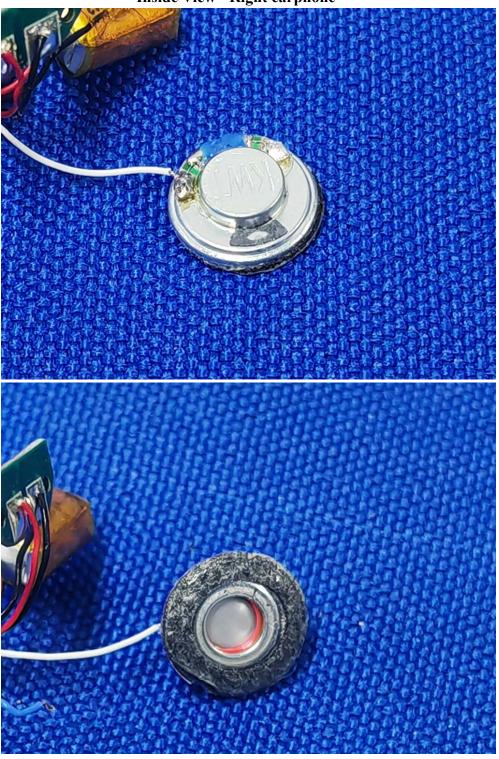

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 84 of 84 Report No.: TW2207043E

Date: 2022-07-09



Inside View - Right earphone



**End of Report**