



Report No.: TW2009018E File reference No.: 2020-09-09

Applicant: Shenzhen Glory Star Technology Industrial Co., Ltd.

Product: TWS Earpods

Model No.: TWS61A (see the page 4 for additional models)

Trademark: Glory Star

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: September 09, 2020

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2009018E Page 2 of 96

Date: 2020-09-09



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 96

Report No.: TW2009018E

Date: 2020-09-09



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT.	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
5.1	Test Method and Test Procedure.	12
5.2	Configuration of the EUT.	12
6.3	EUT Operation Condition.	12
5.4	Radiated Emission Limit.	13
7.0	20dB Bandwidth	25
8.0	Maximum Output Power.	37
9.0	Carrier Frequency Separation.	40
10.0	Number of Hopping Channel.	44
11.0	Time of Occupancy (Dwell Time)	48
12.0	Out of Band Measurement.	61
13.0	Antenna Requirement.	78
14.0	FCC ID Label.	79
15.0	Photo of Test Setup and EUT View	80

Report No.: TW2009018E Page 4 of 96

Date: 2020-09-09



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: Shenzhen Glory Star Technology Industrial Co., Ltd.

Address: Room1102, Block 1st, Yi Luan Building, Xixiang Road 230, BaoAn District, Shenzhen, China

Telephone: +86-755-86397260 Fax: +86-755-26609516

1.3 Description of EUT

Product: TWS Earpods

Manufacturer: Shenzhen Glory Star Technology Industrial Co., Ltd.

Address: Room1102, Block 1st, Yi Luan Building, Xixiang Road 230, BaoAn District,

Shenzhen, China

Brand Name: Glory Star Model Number: TWS61A

Additional Model Number: MI-E046T-101, MI-E046T-199, MI-E046T-473, MI-E046T-198, TWS55, TWS46,

TWS44, TWS143, TWS145, TWS55D, TWS38, TWS30, TWS153, G91, TWS72, TWS29, TWS08,

TWS50, TWS23, TWS80, EB73, BT698, TWS61A, EB28, BT699, TWS72, BT715, EB297,

BT702, EB297, EB299, G33, TWS74, NC33, G91, NC34, TWS61

Type of Modulation GFSK, 月/4D-QPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channels for Bluetooth

Antenna: PCB Antenna. The gain of the antennas is 0.94dBi (Get from the antenna

specification provided by the applicant)

Input Voltage: DC5.0V

Battery: DC3.7V, 30mAh Li-ion battery
Hardware Version: L8S-AC6963A-V2.0 200526--LDO

Software Version: 014

1.4 Submitted Sample: 1 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2009018E Page 5 of 96

Date: 2020-09-09



1.5 Test Duration

2020-09-02 to 2020-09-09

Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty = 6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer Terry lang

The sample tested by

Print Name: Terry Tang

Page 6 of 96

Report No.: TW2009018E

Date: 2020-09-09



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2020-06-23	2021-06-22
Loop Antenna	EMCO	6507	00078608	2020-06-23	2021-06-22
Spectrum	R&S	FSIQ26	100292	2020-06-23	2021-06-22
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2020-06-23	2021-06-22
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2020-06-23	2021-06-22
Power sensor	Anritsu	MA2491A	32263	2020-06-23	2021-06-22
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2020-06-23	2021-06-22
EMI Test Receiver	RS	ESH3	860904/006	2020-06-23	2021-06-22
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2020-06-23	2021-06-22
Spectrum	HP/Agilent	E4407B	MY50441392	2020-06-23	2021-06-22
Spectrum	RS	FSP	1164.4391.38	2020-01-18	2021-01-17
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2020-06-23	2021-06-22
RF Cable	Zhengdi	7m		2020-06-23	2021-06-22
RF Switch	EM	EMSW18	060391	2020-06-23	2021-06-22
Pre-Amplifier	Schwarebeck	BBV9743	#218	2020-06-23	2021-06-22
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2020-06-23	2021-06-22
LISN	SCHAFFNER	NNB42	00012	2020-01-07	2021-01-06

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

Page 7 of 96

Report No.: TW2009018E

Date: 2020-09-09



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	PASS	Complies
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 96


Report No.: TW2009018E

Date: 2020-09-09



5. Power Line Conducted Emission Test

5.1 Schematics of the test

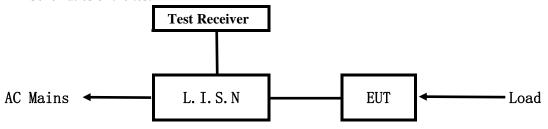


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 500hm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~60Hz Block diagram of Test setup

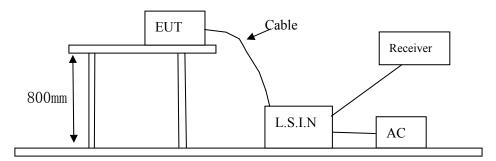

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Report No.: TW2009018E

Date: 2020-09-09



A. EUT

Device	Manufacturer	Model	FCC ID
		MI-E046T-101, MI-E046T-199, MI-E046T-473,	
		MI-E046T-198, TWS55,TWS46, TWS44,	
	Shenzhen Glory Star	TWS61, TWS143, TWS145, TWS55D, TWS38,	
TWS Earpods	Technology Industrial	TWS30, TWS153, G91, TWS72, TWS29, TWS08,	2AS7V-TWS61A
	Co., Ltd.	TWS50,TWS23,TWS80, EB73, BT698,TWS61A,	
		EB28, BT699, TWS72, BT715, EB297,BT702,	
		EB297, EB299, G33,TWS74, NC33, G91, NC34	

B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	KEYU	KA23-0502000DEU	Input: 100-240V~, 50/60Hz, 0.35A;
			Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)				
(MHz)	Quasi-peak Level	Average Level			
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*			
$0.50 \sim 5.00$	56.0	46.0			
5.00 ~ 30.00	60.0	50.0			

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2020-09-09



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Humidity: 65%RH Atmospheric Pressure: 101 kPa Temperature: 26°C

EUT set Condition: Keep Bluetooth Transmitting

Results: PASS

Please refer to following diagram for individual

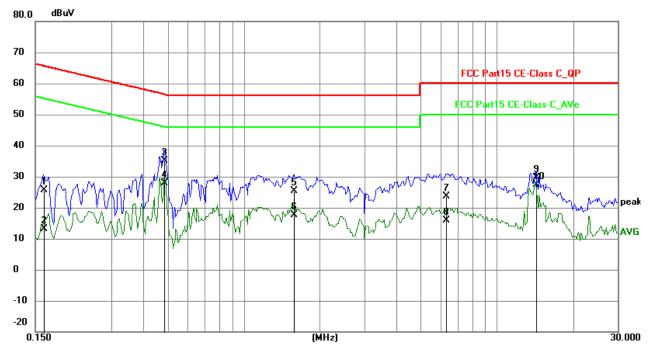

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1617	15.90	9.78	25.68	65.38	-39.70	QP	Р
2	0.1617	3.46	9.78	13.24	55.38	-42.14	AVG	Р
3	0.4854	25.25	9.77	35.02	56.25	-21.23	QP	Р
4	0.4854	18.20	9.77	27.97	46.25	-18.28	AVG	Р
5	1.5696	15.51	9.80	25.31	56.00	-30.69	QP	Р
6	1.5696	7.88	9.80	17.68	46.00	-28.32	AVG	Р
7	6.3033	13.72	9.98	23.70	60.00	-36.30	QP	Р
8	6.3033	5.87	9.98	15.85	50.00	-34.15	AVG	Р
9	14.2749	19.37	10.35	29.72	60.00	-30.28	QP	Р
10	14.2749	16.96	10.35	27.31	50.00	-22.69	AVG	Р

Date: 2020-09-09



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Humidity: 65%RH Atmospheric Pressure: 101 kPa Temperature: 26°C

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Please refer to following diagram for individual

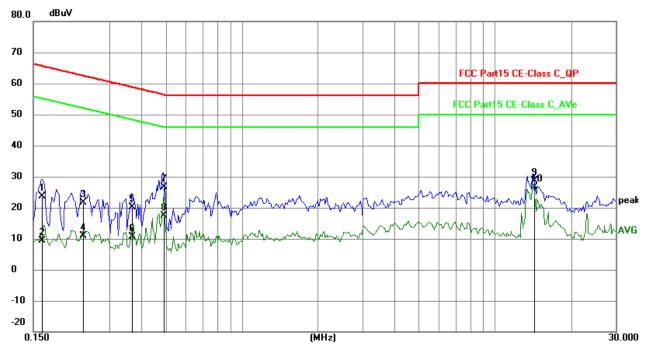

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1617	13.97	9.78	23.75	65.38	-41.63	QP	Р
2	0.1617	-0.34	9.78	9.44	55.38	-45.94	AVG	Р
3	0.2358	11.85	9.75	21.60	62.24	-40.64	QP	Р
4	0.2358	1.01	9.75	10.76	52.24	-41.48	AVG	Р
5	0.3684	10.35	9.76	20.11	58.54	-38.43	QP	Р
6	0.3684	0.94	9.76	10.70	48.54	-37.84	AVG	Р
7	0.4893	16.93	9.77	26.70	56.18	-29.48	QP	Р
8	0.4893	7.51	9.77	17.28	46.18	-28.90	AVG	Р
9	14.2749	18.32	10.35	28.67	60.00	-31.33	QP	Р
10	14.2749	16.19	10.35	26.54	50.00	-23.46	AVG	Р

Report No.: TW2009018E Page 12 of 96


Date: 2020-09-09



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

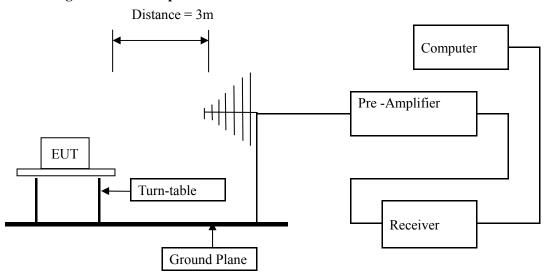

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: TW2009018E Page 13 of 96

Date: 2020-09-09



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. 8DPSK was the worst case because it has highest output power
- 5. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No.: TW2009018E

Date: 2020-09-09



Page 14 of 96

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Page 15 of 96


Report No.: TW2009018E

Date: 2020-09-09



Test Figure:

H

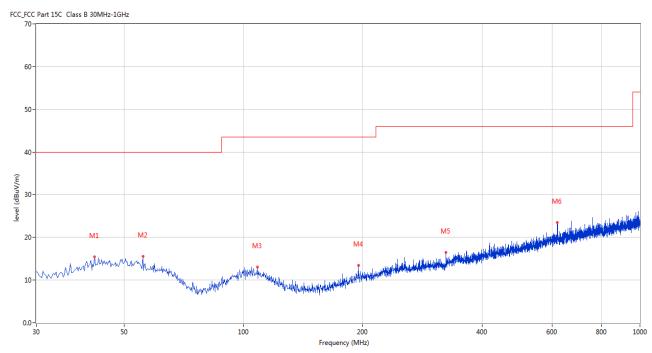

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	42.122	15.44	-11.64	40.0	-24.56	Peak	222.00	100	Horizontal	Pass
2	55.699	15.57	-11.94	40.0	-24.43	Peak	117.00	100	Horizontal	Pass
3	108.550	13.10	-13.46	43.5	-30.40	Peak	249.00	100	Horizontal	Pass
4	194.859	13.46	-13.81	43.5	-30.04	Peak	210.00	100	Horizontal	Pass
5	324.079	16.46	-10.47	46.0	-29.54	Peak	199.00	100	Horizontal	Pass
6	619.128	23.43	-4.86	46.0	-22.57	Peak	2.00	100	Horizontal	Pass


Page 16 of 96 Report No.: TW2009018E

Date: 2020-09-09



Test Figure:

V

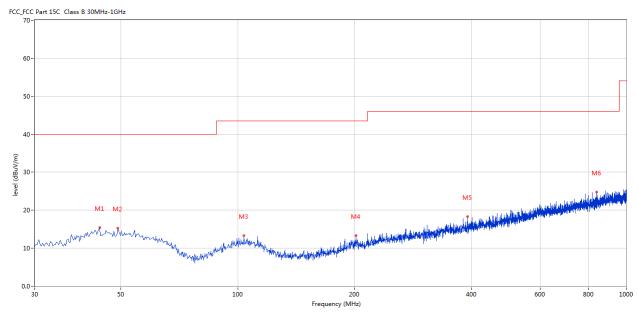

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	44.061	15.46	-11.47	40.0	-24.54	Peak	147.00	100	Vertical	Pass
2	49.153	15.30	-11.24	40.0	-24.70	Peak	236.00	100	Vertical	Pass
3	103.702	13.26	-13.35	43.5	-30.24	Peak	222.00	100	Vertical	Pass
4	201.405	13.34	-13.42	43.5	-30.16	Peak	40.00	100	Vertical	Pass
5	390.022	18.28	-8.88	46.0	-27.72	Peak	255.00	100	Vertical	Pass
6	840.475	24.85	-2.61	46.0	-21.15	Peak	100.00	100	Vertical	Pass

Report No.: TW2009018E Page 17 of 96

Date: 2020-09-09



Operation Mode: Transmitting under Low Channel (2402MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4804		Н	74(Peak)/ 54(AV)
4804		V	74(Peak)/ 54(AV)
7206		H/V	74(Peak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2441MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4882		Н	74(Peak)/ 54(AV)
4882		V	74(Peak)/ 54(AV)
7323		H/V	74(Peak)/ 54(AV)
9764		H/V	74(Peak)/ 54(AV)
12205		H/V	74(Peak)/ 54(AV)
14646		H/V	74(Peak)/ 54(AV)
17087		H/V	74(Peak)/ 54(AV)
19528		H/V	74(Peak)/ 54(AV)
21969		H/V	74(Peak)/ 54(AV)
24410		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No.: TW2009018E Page 18 of 96

Date: 2020-09-09



Operation Mode: Transmitting under High Channel (2480MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4960		Н	74(Peak)/ 54(AV)
4960		V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

^{2.} Remark "---" means that the emissions level is too low to be measured

Report No.: TW2009018E Page 19 of 96


Date: 2020-09-09



Please refer to the following test plots for details:

Low Channel: Vertical

FCC_FCC Part 15B Class B 1GHz-18GHz - 2

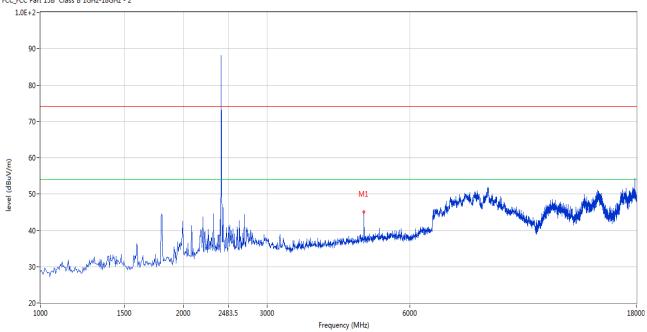


١	No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
		(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	1	4802.799	45.05	3.12	54.0	-8.95	Peak	95.00	100	V	Pass

Page 20 of 96 Report No.: TW2009018E

Date: 2020-09-09



Low Channel: Horizontal

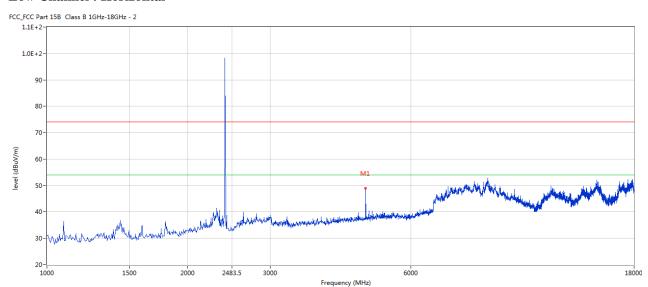


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4802.799	49.89	3.12	54.0	-4.11	Peak	214.00	100	Н	Pass

Page 21 of 96 Report No.: TW2009018E

Date: 2020-09-09



Middle Channel: Horizontal

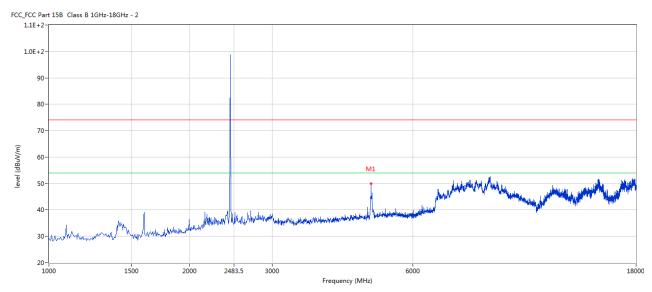


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4879.280	50.04	3.20	54.0	-3.96	Peak	224.00	100	Н	Pass

Page 22 of 96 Report No.: TW2009018E

Date: 2020-09-09



Middle Channel: Vertical

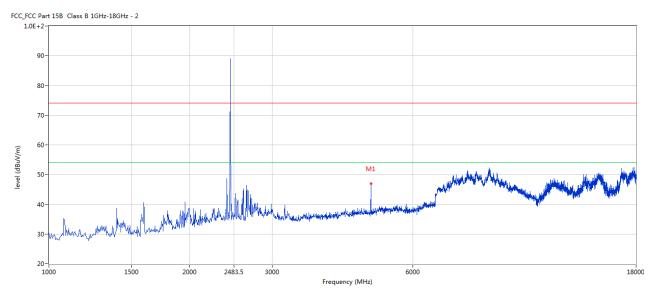


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4883.529	46.89	3.20	54.0	-7.11	Peak	180.00	100	٧	Pass

Page 23 of 96 Report No.: TW2009018E

Date: 2020-09-09



High Channel: Horizontal

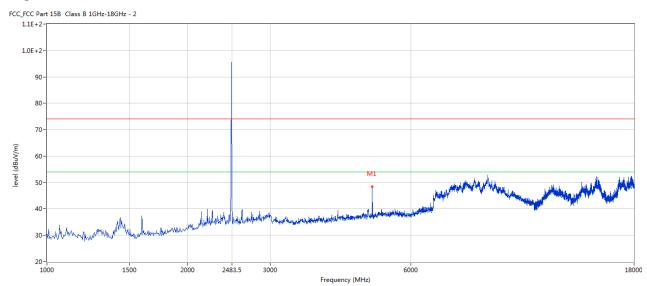


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4960.010	49.31	3.36	54.0	-4.69	Peak	234.00	100	Н	Pass

Report No.: TW2009018E Page 24 of 96

Date: 2020-09-09



High Channel: Vertical

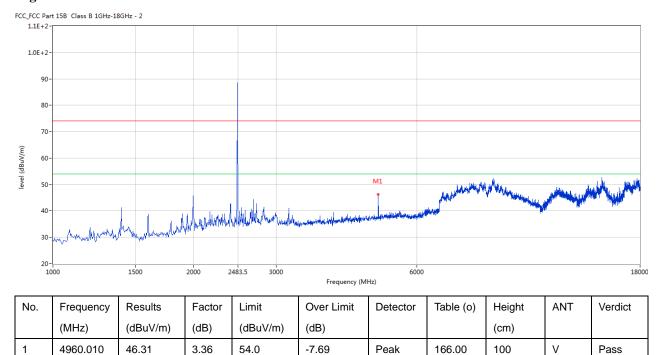

Note: 1. for the radiated emissions above 18G and below 30MHz, it is the floor noise.

2. the measured PK radiated emissions level less than the AV limit, so no necessary to take down the AV result

Report No.: TW2009018E

Date: 2020-09-09



Page 25 of 96

7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

JI	oddiddioni of pir			
EUT	TW	'S Earpods	Model	TWS61A
Mode	Keep	Transmitting	Input Voltage	DC3.7V
Temperat	ure 2	4 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass/ Fail
Low	2402	782		Pass
Middle	2441	782		Pass
High	2480	782		Pass


Page 26 of 96 Report No.: TW2009018E

Date: 2020-09-09



Test Figure:

1. Condition: Low Channel

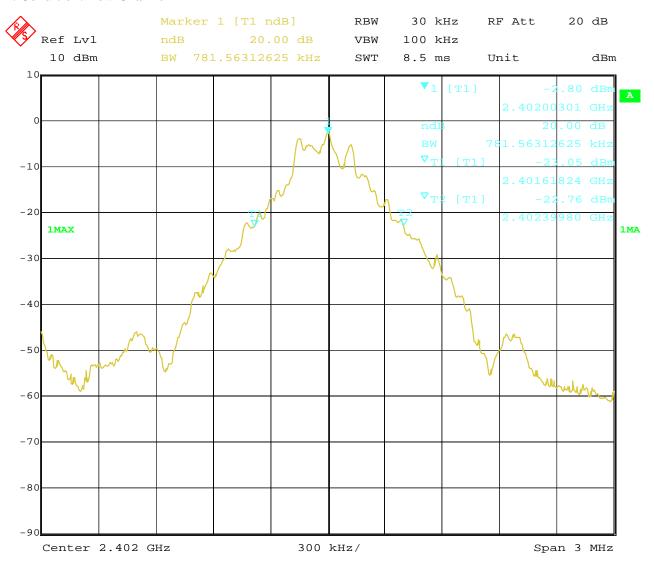

8.SEP.2020

14:19:25


Date:

Report No.: TW2009018E Page 27 of 96

Date: 2020-09-09



2. Condition: Middle Channel

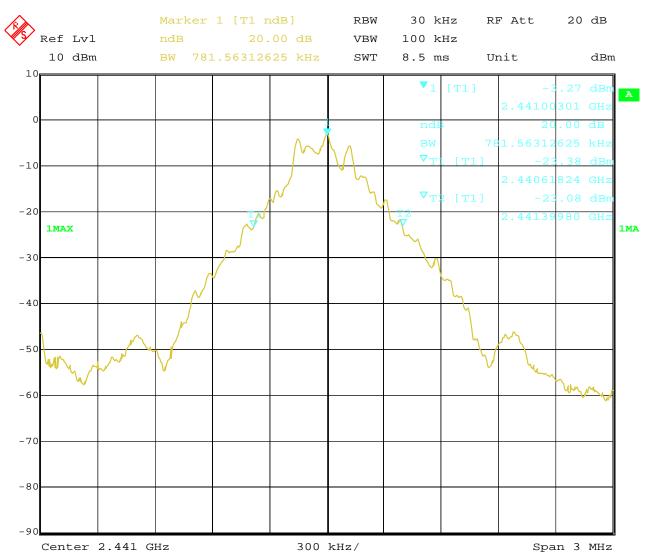


8.SEP.2020 Date: 14:20:49 Report No.: TW2009018E Page 28 of 96

Date: 2020-09-09



3. High Channel

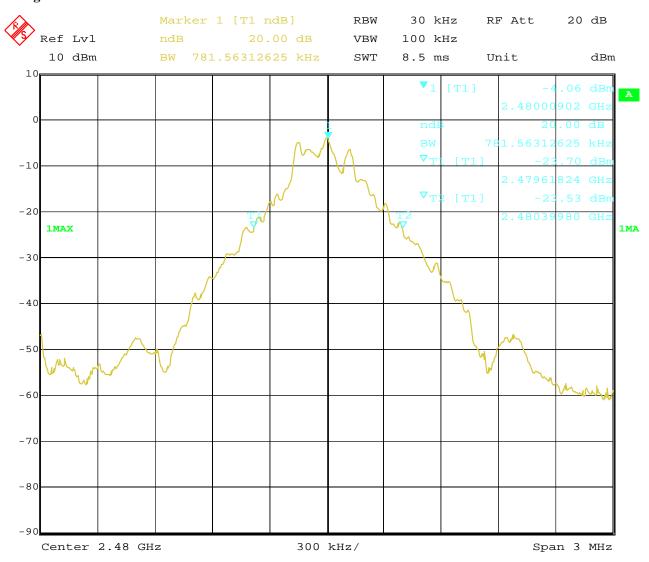

8.SEP.2020 Date: 14:22:14 Report No.: TW2009018E

Date: 2020-09-09



Page 29 of 96

Test Result

Type of Modulation: JI/4D-QPSK

EUT	TV	WS Earpods	Model	TWS61A
Mode	Keep	Transmitting	Input Voltage	DC3.7V
Temperature	2	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1220		Pass
Middle	2441 1220			Pass
High	2480	1220		Pass


Page 30 of 96 Report No.: TW2009018E

Date: 2020-09-09



Test Figure:

1. Condition: Low Channel

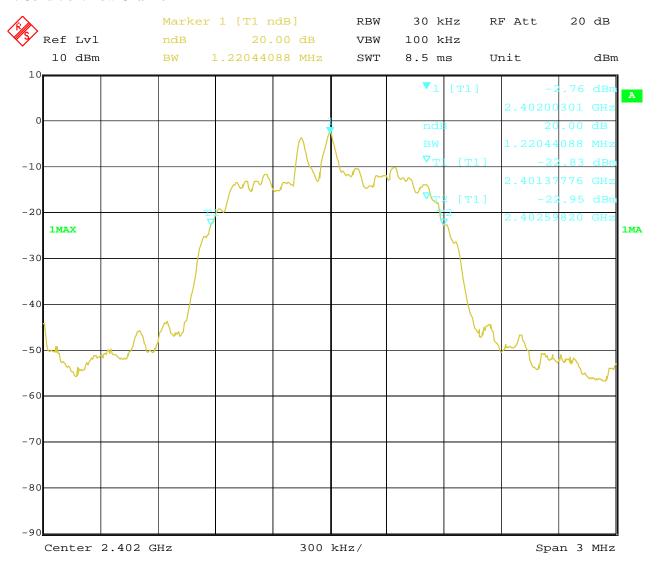


Date: 8.SEP.2020 14:18:44 Report No.: TW2009018E Page 31 of 96

Date: 2020-09-09



2. Condition: Middle Channel

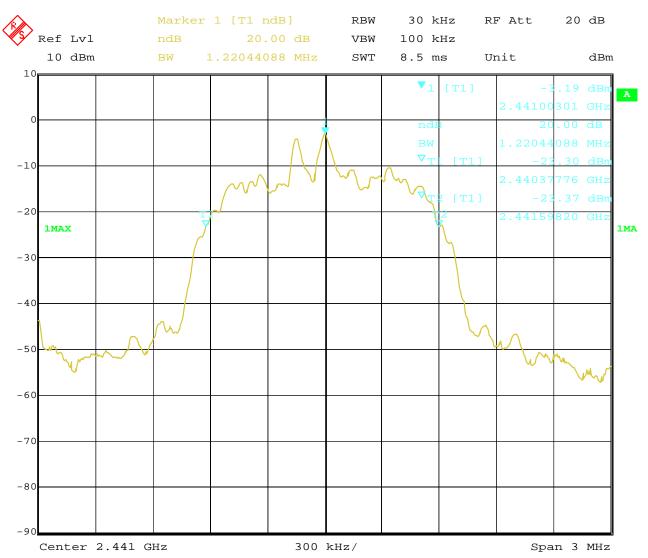


8.SEP.2020 Date: 14:11:06 Report No.: TW2009018E Page 32 of 96

Date: 2020-09-09



3. High Channel

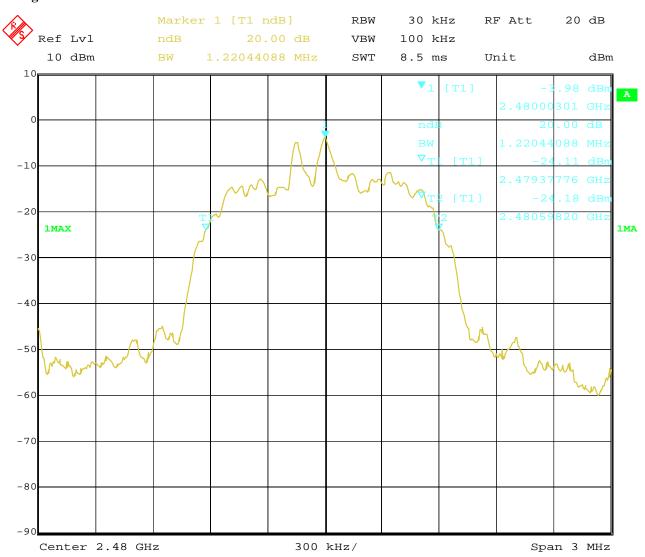

8.SEP.2020 Date: 13:52:42

Page 33 of 96 Report No.: TW2009018E

Date: 2020-09-09



Test Result

Type of Modulation: 8DPSK

EUT	TWS Earpods		Model	TWS61A
Mode	Keep Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1214		Pass
Middle	2441	1214	-	Pass
High	2480	1220	-	Pass


Page 34 of 96 Report No.: TW2009018E

Date: 2020-09-09



Test Figure:

1. Condition: Low Channel

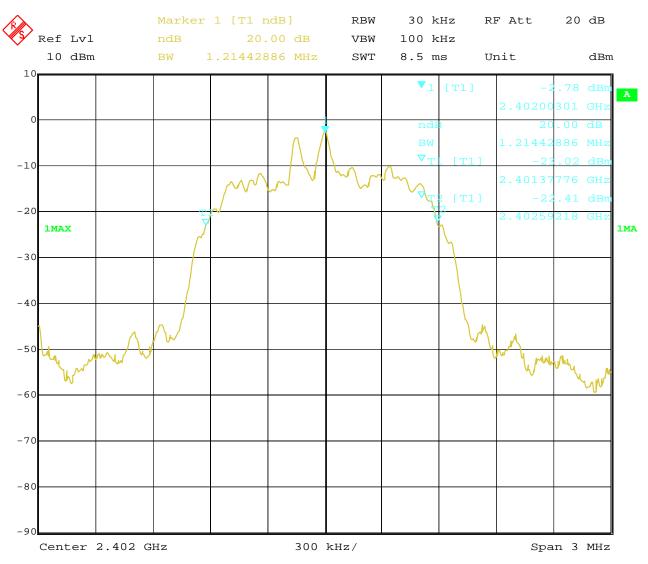


Date: 8.SEP.2020 14:14:08 Report No.: TW2009018E Page 35 of 96

Date: 2020-09-09



2. Condition: Middle Channel

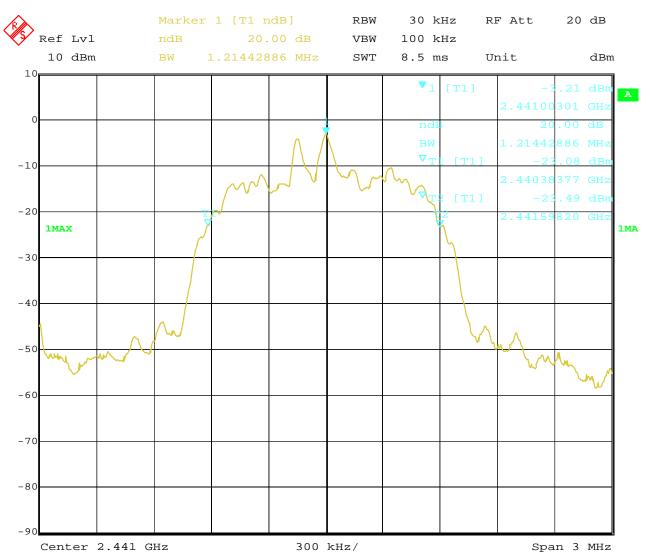


8.SEP.2020 Date: 14:13:29 Report No.: TW2009018E Page 36 of 96

Date: 2020-09-09



3. High Channel

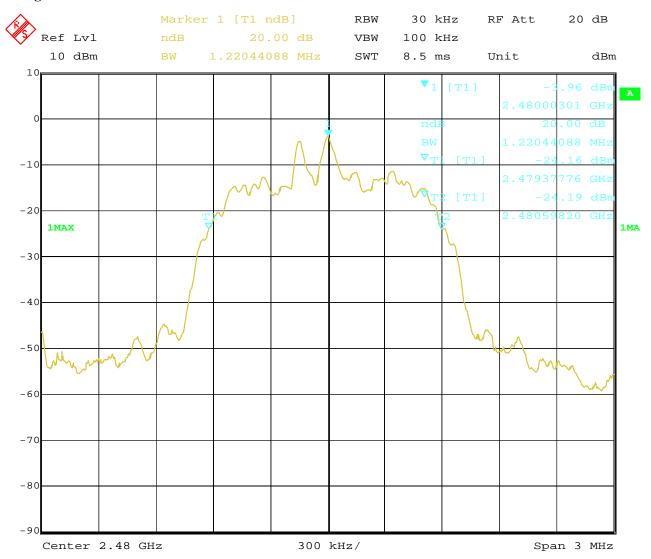

8.SEP.2020 Date: 13:51:19

Date: 2020-09-09



Page 37 of 96

8. Maximum Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = RBW=3MHz; Sweep = 60s; Detector function = PK; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 38 of 96

Report No.: TW2009018E

Date: 2020-09-09



8.4Test Results

Type of Modulation: GFSK

EUT	TWS Earpods		Model	TWS61A
Mode	Keep Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C, Humid		Humidity	56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-1.61	30	Pass
Middle	2441	-2.08	30	Pass
High	2480	-2.72	30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The **Peak** power was measured

Type of Modulation: JI/4D-QPSK

EUT		TWS Earpods	Model	TWS61A
Mode		Keep Transmitting	Input Voltage	DC3.7V
Temperature		24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm) Peak	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-0.74	30	Pass
Middle	2441	-1.21	30	Pass
High	2480	-1.85	30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The **Peak** power was measured

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Date: 2020-09-09



Page 39 of 96

Type of Modulation: 8DPSK

EUT	,	TWS Earpods		TWS61A
Mode	Ke	Keep Transmitting		DC3.7V
Temperature	e	24 deg. C,		56% RH
Channel	Channel Frequency	Max. Power Output (dBm)	Peak Power Limit	Pass/ Fail
Chamier	(MHz)	Peak	(dBm)	
Low	2402	-0.72	30	Pass
Middle	2441	-1.15	30	Pass
High	2480	-1.80	30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The **Peak** power was measured

Date: 2020-09-09



Page 40 of 96

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Date: 2020-09-09




9.4Test Result

Type of Modulation: GFSK

EUT	TWS Earpoo	Model	,	TWS61A	
Mode	Hopping On I		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity	56% RH	
Carrier I	Frequency Separation		Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2/3	of the 20 dB ban	dwidth	Pass

Test Plots

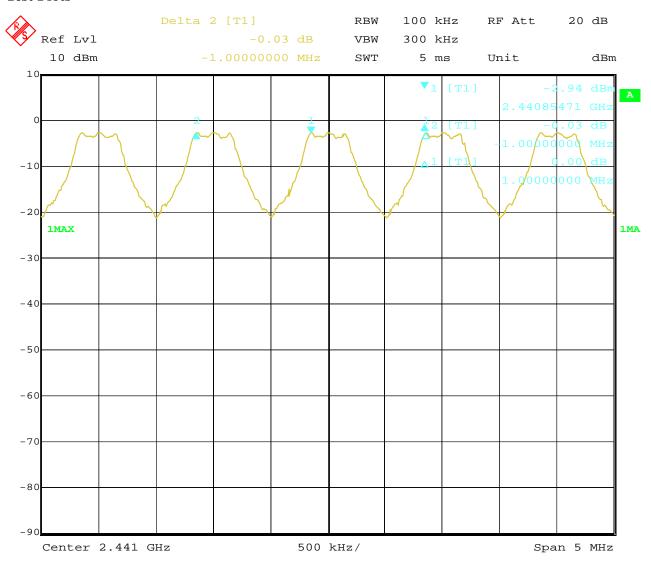

7.SEP.2020 17:27:11 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: TW2009018E Page 42 of 96


Date: 2020-09-09



Type of Modulation: $\sqrt{1/4}$ D-QPSK

EUT	TWS Earpoo	Model		TWS61A	
Mode	Hopping O	Input Voltage		DC3.7V	
Temperature	24 deg. C,	24 deg. C,			56% RH
Carrier Frequency Separation			Limit		Pass/ Fail
1.000MHz		≥ 25 kHz or 2/3 of 20 dB bandwidth		width	Pass

Test Plots

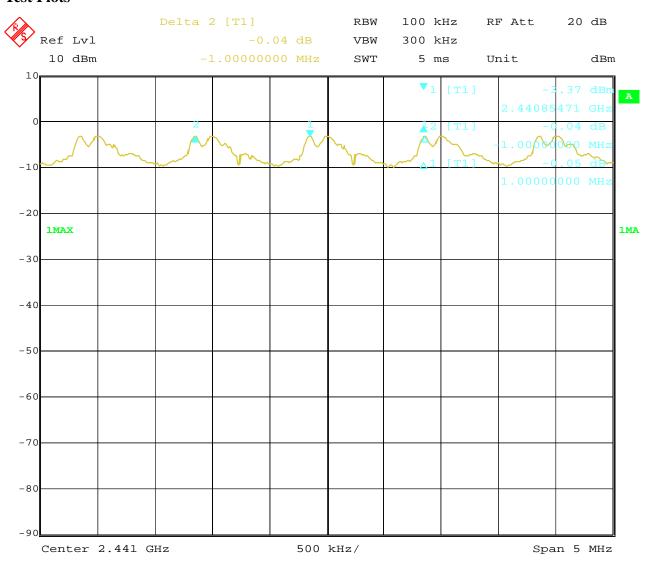

8.SEP.2020 09:43:35

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: TW2009018E Page 43 of 96


Date: 2020-09-09



Type of Modulation: 8DPSK

EUT	TWS Earpoo	Model		TWS61A	
Mode	Hopping On Ir		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity	56% RH	
Carrier Frequency Separation			Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2/3 of 20 dB bandwidth			Pass

Test Plots

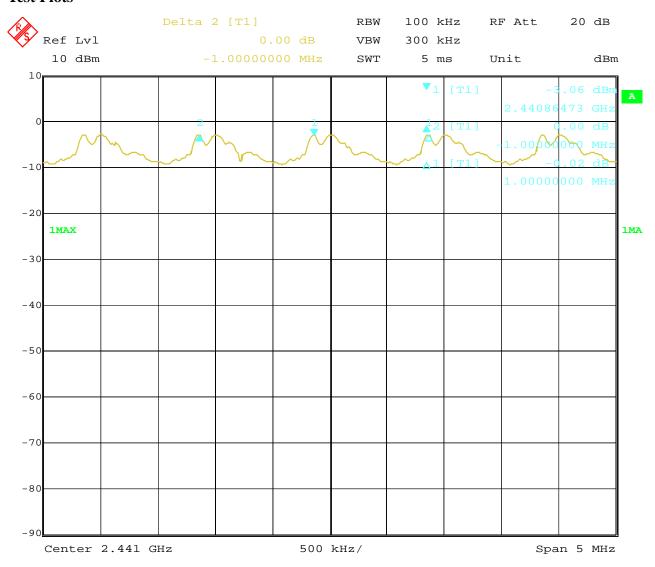

8.SEP.2020 11:07:05 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2020-09-09



Page 44 of 96

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 45 of 96

Report No.: TW2009018E

Date: 2020-09-09




10.4Test Result

Type of Modulation: GFSK

EUT	TWS Earpods		Model	TWS61A	
Mode	Hopping On		Input Voltage	DC3.7V	
Temperature	24 deg. C,		Humidity	56% RH	
Operating Frequency N		Number of hopp	Number of hopping channels		Pass/ Fail
2402-2480MHz		79		≥ 15	Pass

Test Plot

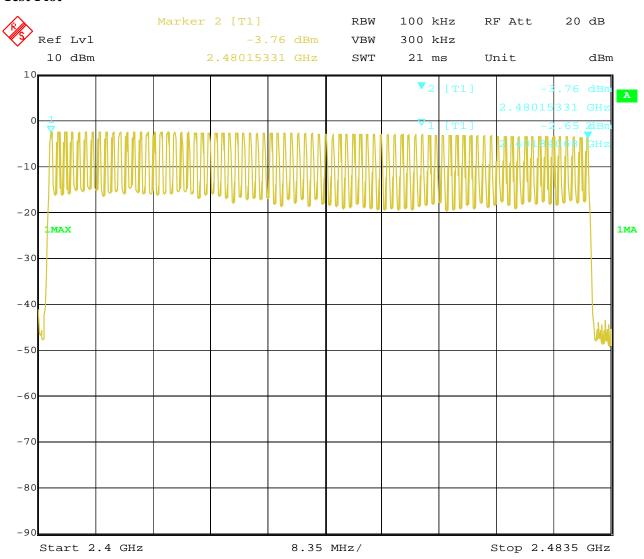

Date: 7.SEP.2020 17:00:20

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 46 of 96

Report No.: TW2009018E


Date: 2020-09-09



Type of Modulation: $\sqrt{1/4}$ D-QPSK

EUT	TWS Earpods		Model		TWS61A	
Mode	Hopping On		Input Voltage		DC3.7V	
Temperature	24 deg. C,		Hum	dity 56%		56% RH
Operating Frequency		Number of hopping channels		Lin	nit	Pass/ Fail
2402-2480MHz		79		<u>></u>	15	Pass

Test Plot

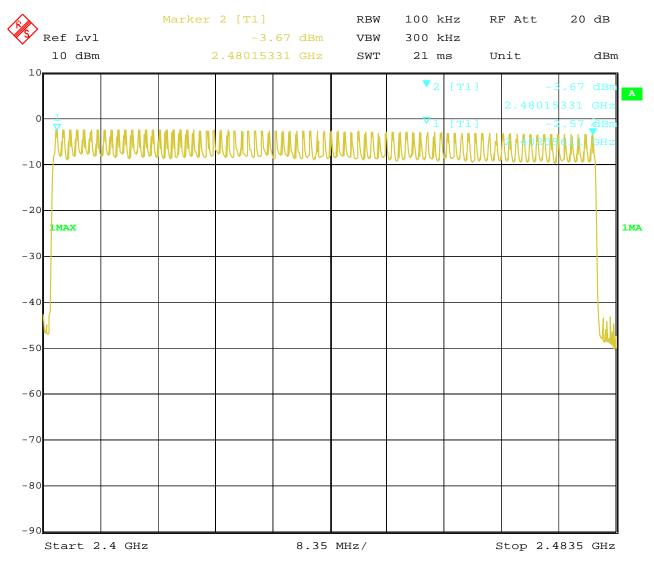

Date: 8.SEP.2020 13:09:42

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: TW2009018E Page 47 of 96


Date: 2020-09-09



Type of Modulation: 8DPSK

EUT	TWS Earpods		Model	del		TWS61A
Mode	Hopping On		Input V	oltage		DC3.7V
Temperature	2	4 deg. C,	Humidi	ity		56% RH
Operating Frequency		Number of hopp channels	oing	Liı	mit	Pass/ Fail
2402-2480MHz		79		<u> </u>	15	Pass

Test Plot

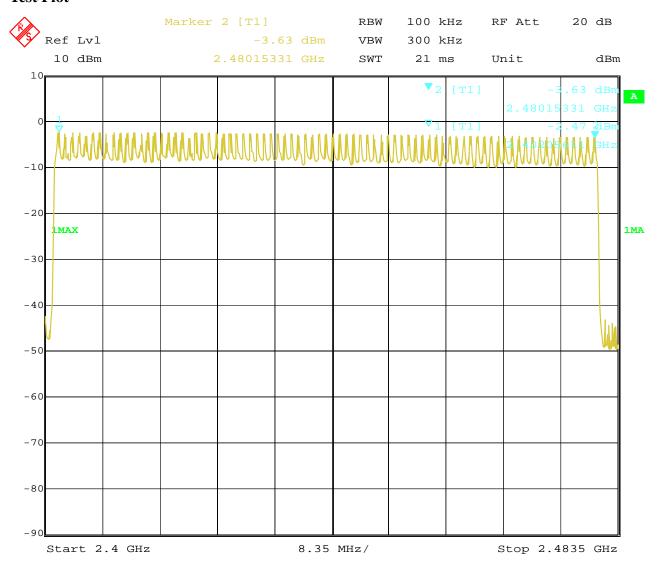

8.SEP.2020 13:04:47 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2020-09-09



Page 48 of 96

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No.: TW2009018E Page 49 of 96

Date: 2020-09-09



11.4 Test Result

Type of Modulation: GFSK

EUT		TWS Earpods		Т	WS61A			
Mode	Keep Tr	ansmitting	Input Voltage	I	DC3.7V			
Temperatur	re 24 d	leg. C,	Humidity	5	56% RH			
Channel	Reading	Hoping	g Rate	Actual	Limit			
			DH5					
Middle	2.986ms	266.66	7 hop/s	0.319s	0.4s			
			DH3					
Middle	1.723ms	400 h	400 hop/s		0.4s			
	DH1							
Middle	0.481ms	800 h	nop/s	0.154s	0.4s			

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Page 50 of 96


Report No.: TW2009018E

Date: 2020-09-09



Test Plots:

DH5

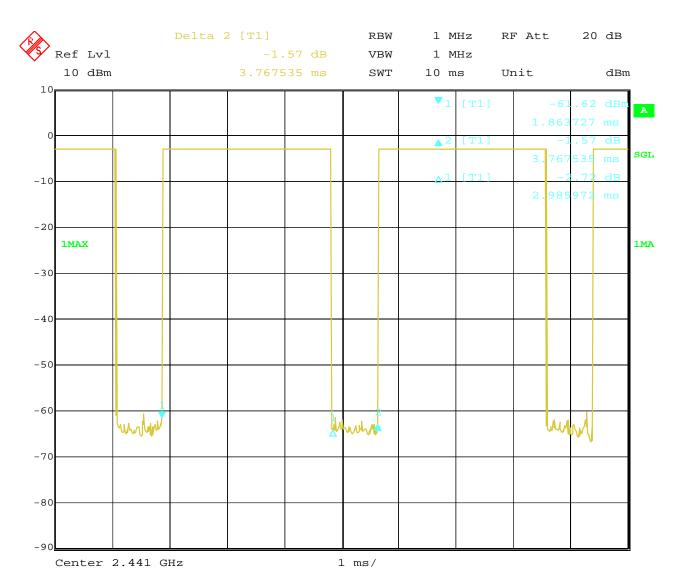


8.SEP.2020 14:34:30 Date:

Report No.: TW2009018E Page 51 of 96

Date: 2020-09-09



DH3

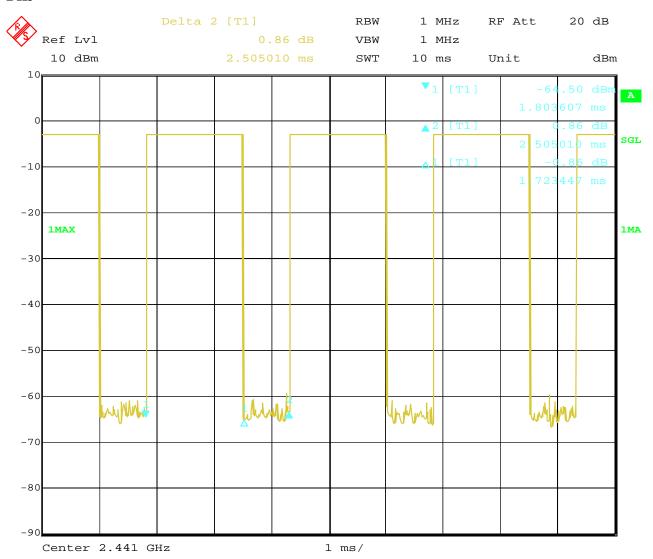


8.SEP.2020 Date: 14:33:57

Page 52 of 96 Report No.: TW2009018E

Date: 2020-09-09



DH1

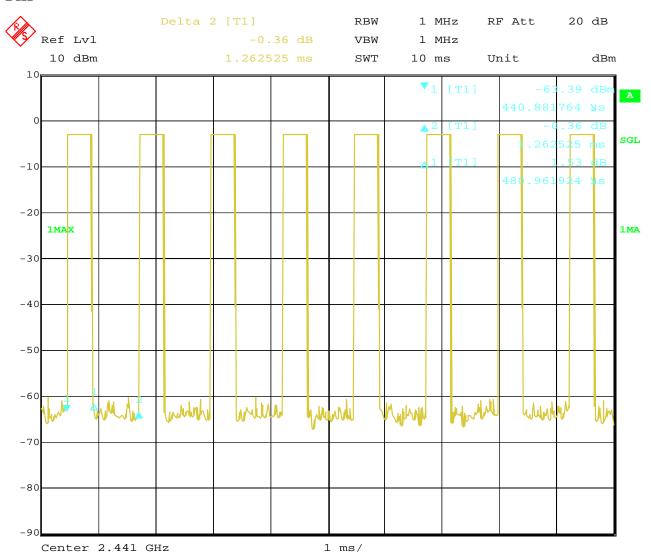

8.SEP.2020 Date: 14:33:08

Date: 2020-09-09



Page 53 of 96

Test Result

Type of Modulation: $\pi/4D$ -QPSK

EUT	TWS	TWS Earpods		TWS61A					
Mode	Keep Tra	ansmitting	Input Voltage	I	DC3.7V				
Temperature	e 24 d	leg. C,	Humidity	5	56% RH				
Channel	Reading	Hoping	g Rate	Actual	Limit				
	2DH5								
Middle	2.986ms	266.667	7 hop/s	0.319s	0.4s				
			2DH3						
Middle	1.743ms	400 h	nop/s	0.279s	0.4s				
	2DH1								
Middle	0.481ms	800 h	nop/s	0.154s	0.4s				

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of $625\mu s$ with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.


Report No.: TW2009018E Page 54 of 96

Date: 2020-09-09



Test Plots:

2DH5

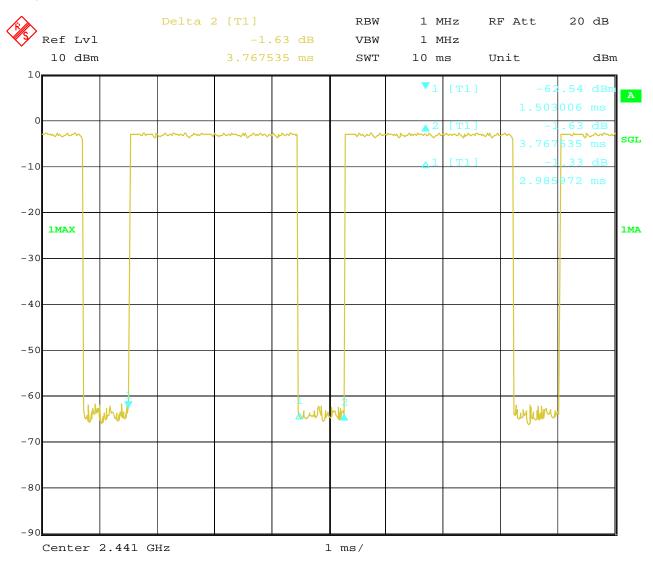


Date: 8.SEP.2020 14:31:56 Report No.: TW2009018E Page 55 of 96

Date: 2020-09-09



2DH3

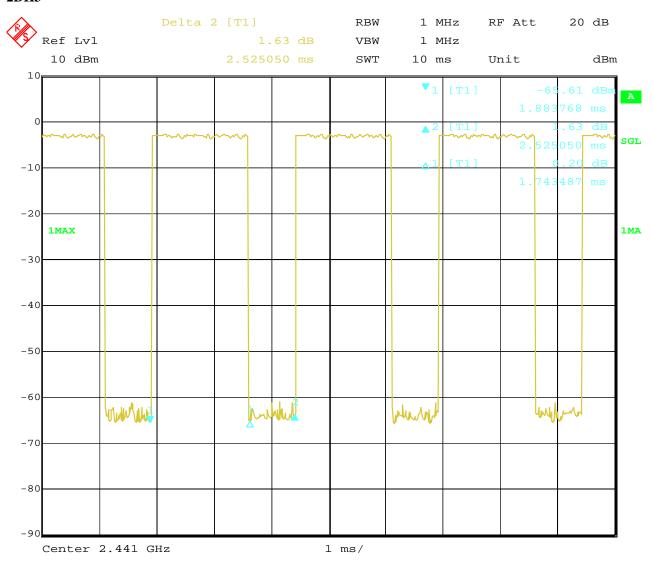


8.SEP.2020 Date: 14:31:08 Report No.: TW2009018E Page 56 of 96

Date: 2020-09-09



2DH1

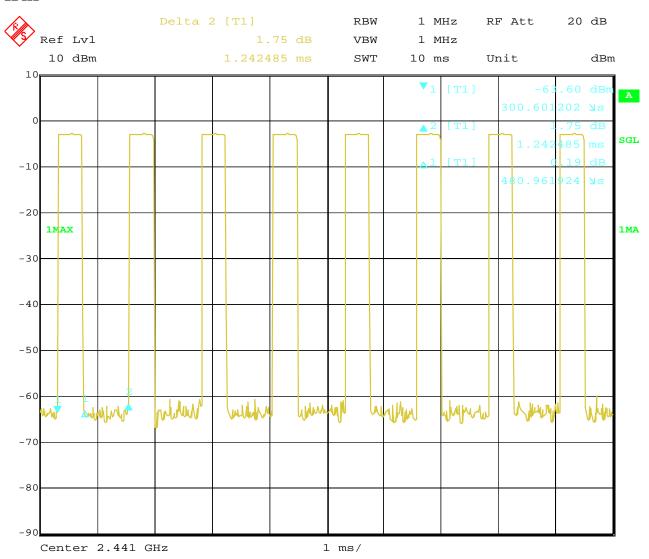

8.SEP.2020 Date: 14:28:30 Report No.: TW2009018E Page 57 of 96

Date: 2020-09-09



Type of Modulation: 8DPSK

EUT	TWS	TWS Earpods		Т	WS61A				
Mode	Keep Tra	ansmitting	Input Voltage	Γ	DC3.7V				
Temperatur	re 24 d	24 deg. C,		5	6% RH				
Channel	Reading	Hoping	g Rate	Actual	Limit				
	3DH5								
Middle	2.986ms	266.667	7 hop/s	0.319s	0.4s				
			3DH3						
Middle	1.743ms	400 h	nop/s	0.279s	0.4s				
	3DH1								
Middle	0.481ms	800 h	nop/s	0.154s	0.4s				

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 µs with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Page 58 of 96


Report No.: TW2009018E

Date: 2020-09-09



Test Plots:

3DH5

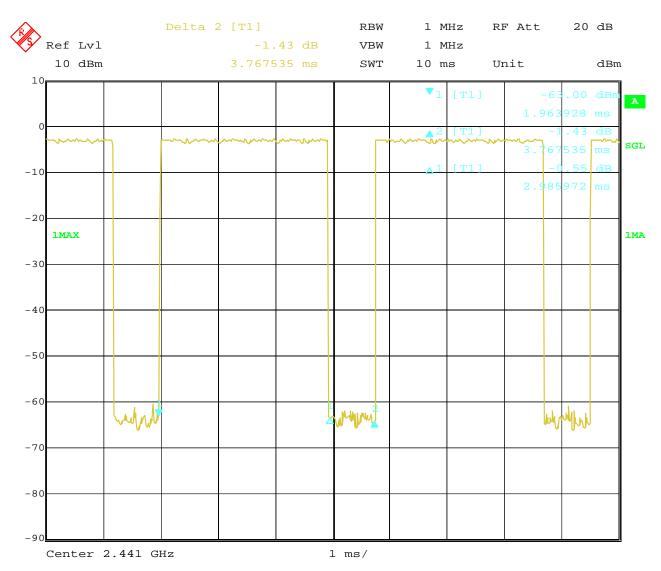


8.SEP.2020 14:32:22 Date:

Report No.: TW2009018E Page 59 of 96

Date: 2020-09-09



3DH3

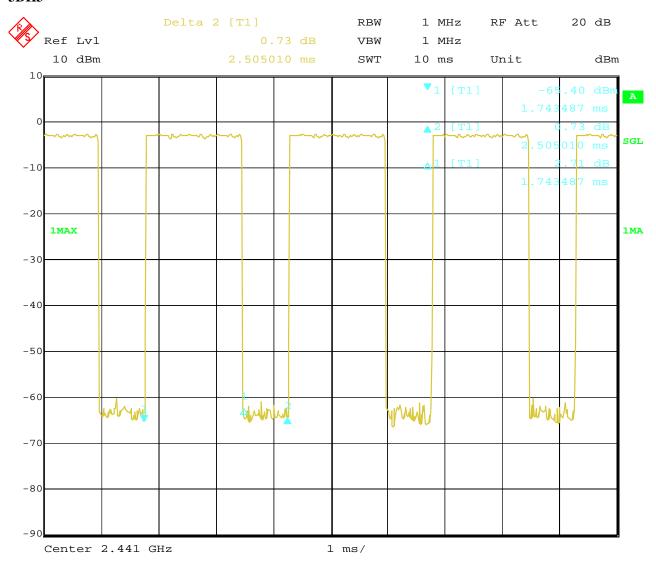


8.SEP.2020 Date: 14:30:46

Page 60 of 96 Report No.: TW2009018E

Date: 2020-09-09



3DH1

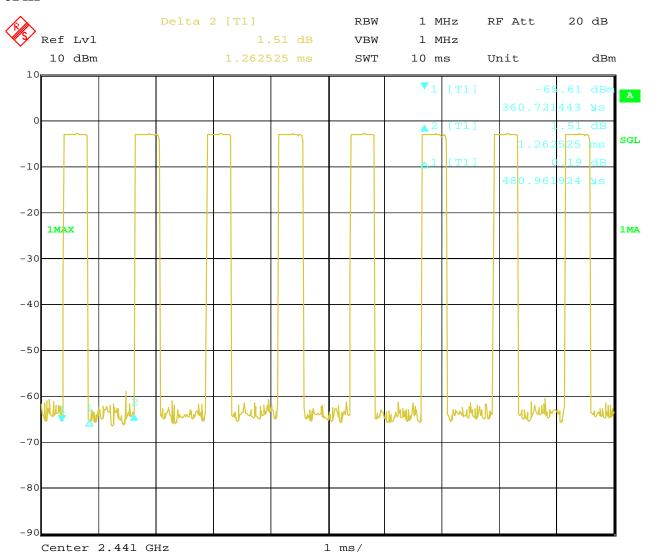


8.SEP.2020 Date: 14:29:59 Report No.: TW2009018E Page 61 of 96

Date: 2020-09-09



12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100kHz, VBW=300 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 62 of 96 Report No.: TW2009018E

Date: 2020-09-09




Type of Modulation: GFSK

Band Edge Test Result 12.4

Product:	TWS Earpods	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

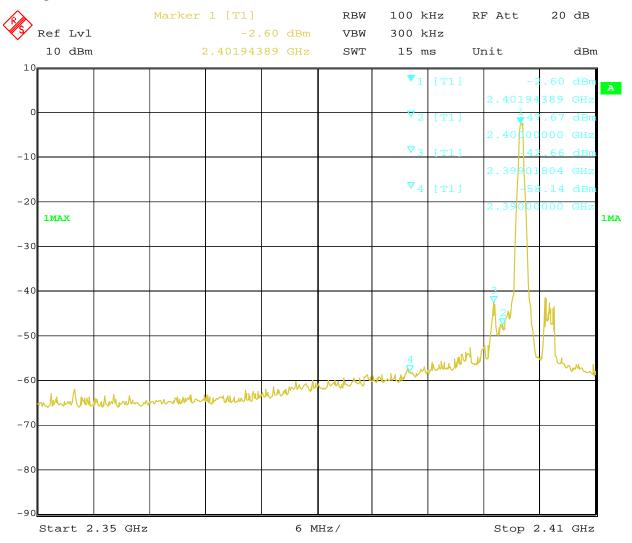

Date: 8.SEP.2020 13:40:39 Report No.: TW2009018E Page 63 of 96

Date: 2020-09-09




Type of Modulation: GFSK

Band Edge Test Result

Product:	TWS Earpods	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

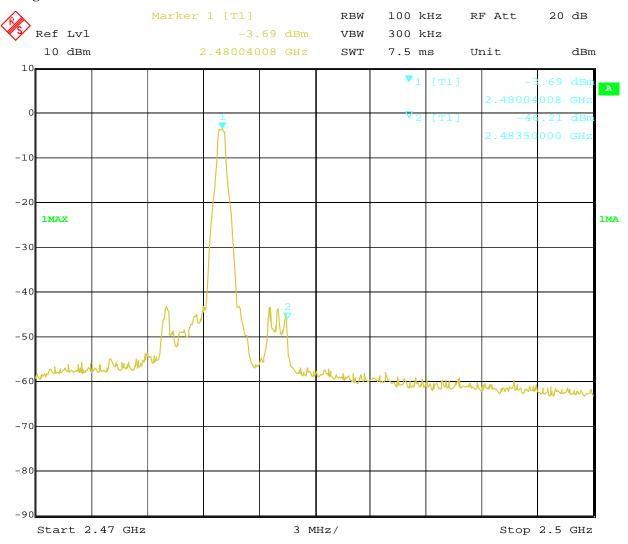

Date: 8.SEP.2020 13:42:50

Page 64 of 96

Report No.: TW2009018E

Date: 2020-09-09




Type of Modulation: GFSK

Band Edge Test Result

Product:	TWS Earpods	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

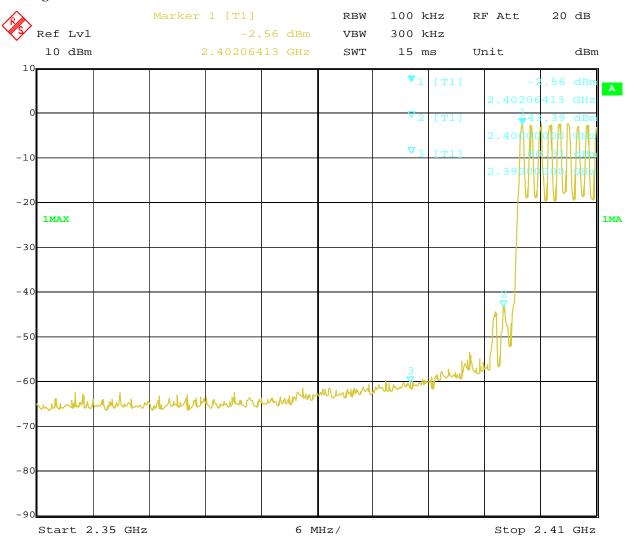

8.SEP.2020 13:22:29 Date:

Page 65 of 96

Report No.: TW2009018E

Date: 2020-09-09




Type of Modulation: GFSK

Band Edge Test Result

Product:	TWS Earpods	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

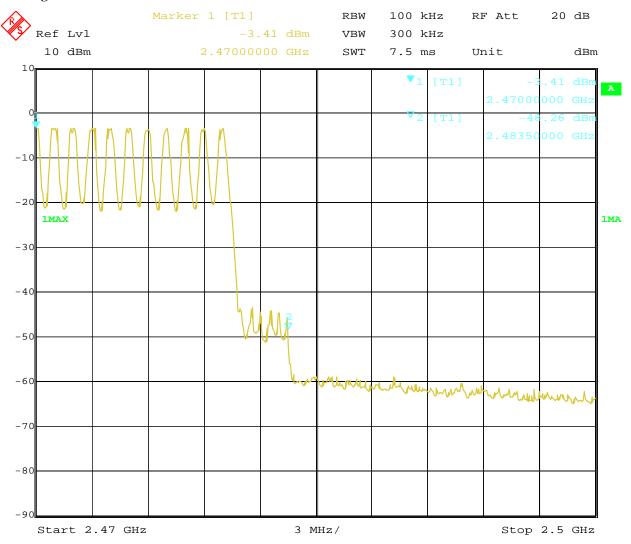

8.SEP.2020 13:20:57 Date:

Page 66 of 96

Report No.: TW2009018E

Date: 2020-09-09




Type of Modulation: $\pi/4D$ -QPSK

12.4 Out of Band Test Result

Product:	TWS Earpods	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

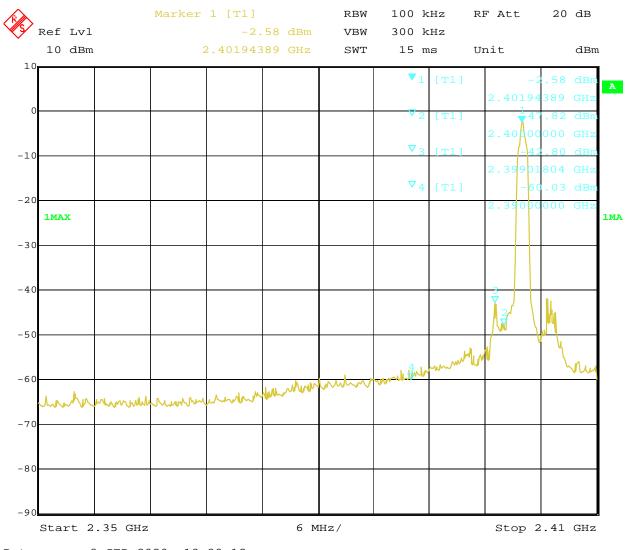

Date: 8.SEP.2020 13:39:12

Page 67 of 96

Report No.: TW2009018E

Date: 2020-09-09




Type of Modulation: $\pi/4D$ -QPSK

Band Edge Test Result 12.4

Product:	TWS Earpods	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

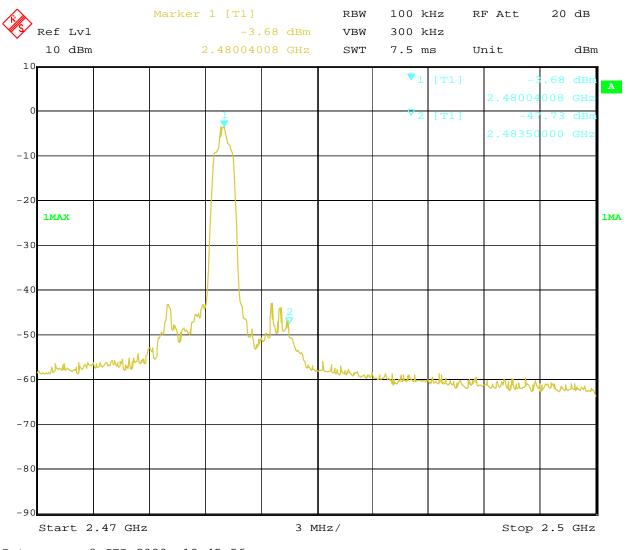

Date: 8.SEP.2020 13:45:56

Page 68 of 96

Report No.: TW2009018E

Date: 2020-09-09




Type of Modulation: $\pi/4D$ -QPSK

Out of Band Test Result

Product:	TWS Earpods	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

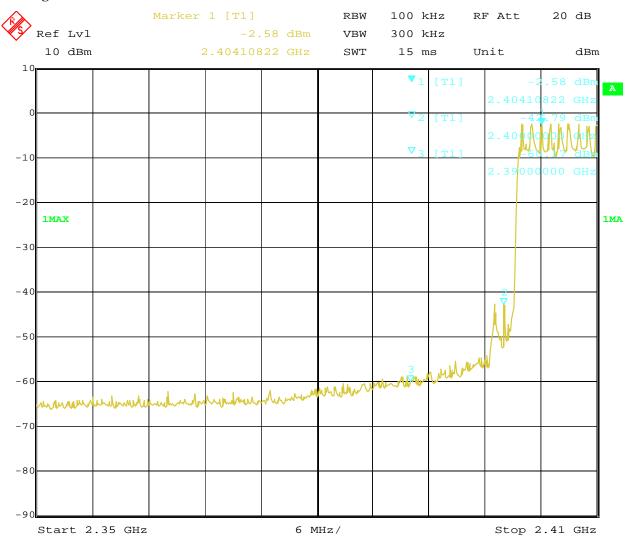

8.SEP.2020 13:24:54 Date:

Page 69 of 96

Report No.: TW2009018E

Date: 2020-09-09




Type of Modulation: $\pi/4D$ -QPSK

Out of Band Test Result

Product:	TWS Earpods	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

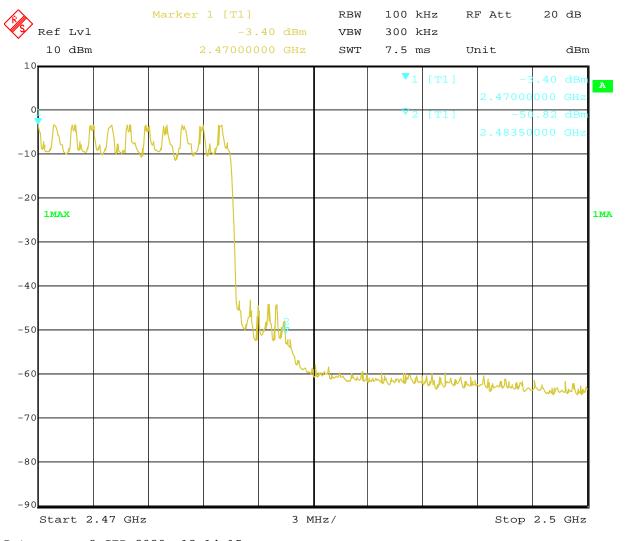

8.SEP.2020 13:14:15 Date:

Page 70 of 96 Report No.: TW2009018E

Date: 2020-09-09




Type of Modulation: 8DPSK

Band Edge Test Result 12.4

Product:	TWS Earpods	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

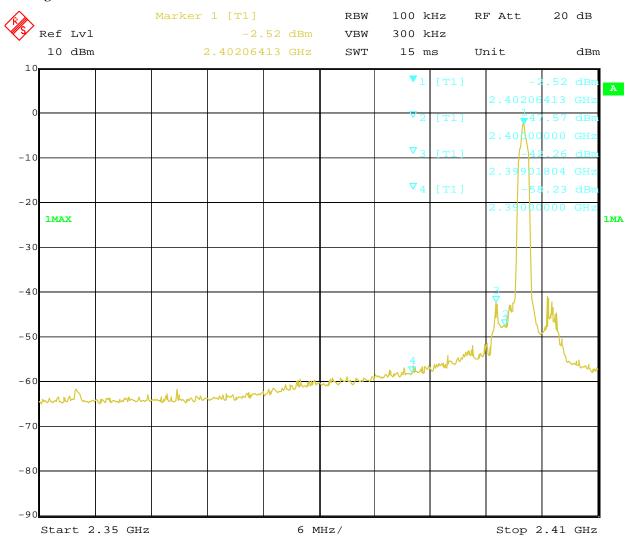

Date: 8.SEP.2020 13:38:25

Page 71 of 96

Report No.: TW2009018E

Date: 2020-09-09




Type of Modulation: 8DPSK

12.4 Band Edge Test Result

Product:	TWS Earpods		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)			$74(dB\mu V/m)$
Restrict Band	$AV(dB\mu V/m)$		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

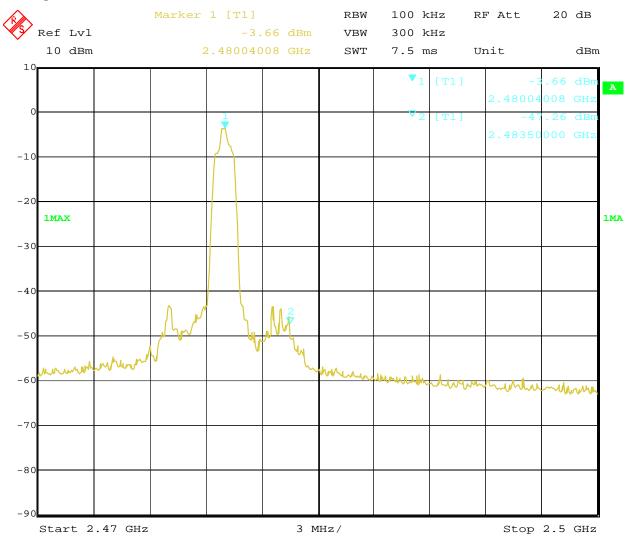

Date: 8.SEP.2020 13:48:58

Page 72 of 96 Report No.: TW2009018E

Date: 2020-09-09




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	TWS Earpods	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

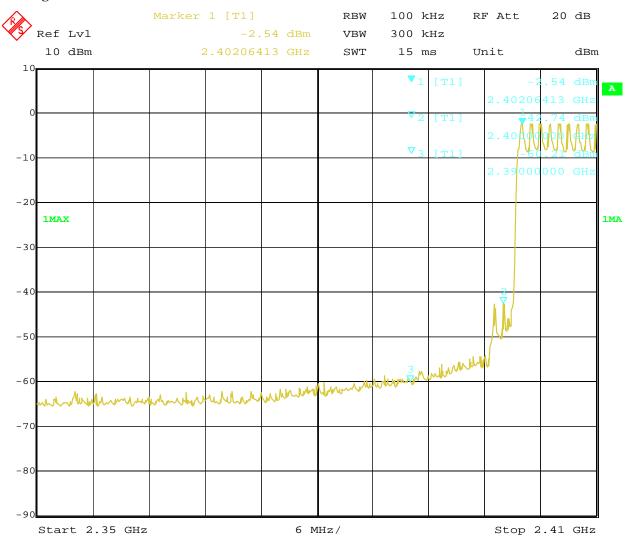

8.SEP.2020 13:30:39 Date:

Report No.: TW2009018E Page 73 of 96

Date: 2020-09-09




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	TWS Earpods	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

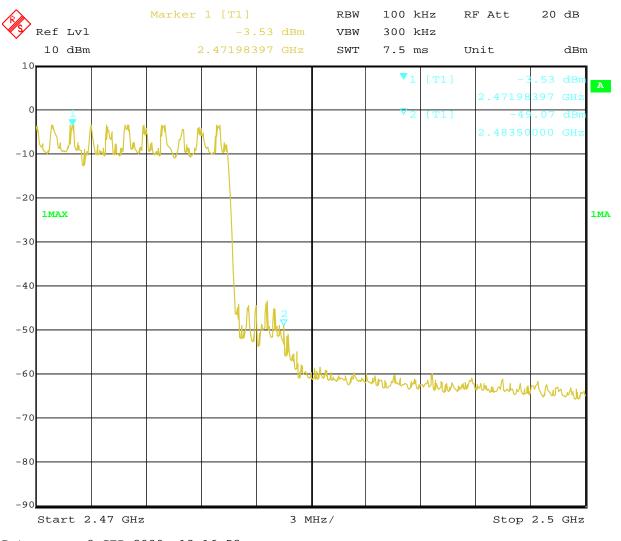

8.SEP.2020 13:16:52 Date:

Page 74 of 96 Report No.: TW2009018E

Date: 2020-09-09



12.4 Restrict Band Measurement


	EUT	TV	VS Earpo	ods	Mo	del		MI-E0	46T-101	
	Mode	Keep	Transm	itting	Input V	/oltage		DC	3.7V	
Τ	emperature	2	24 deg. C	·,	Hum	idity		56%	% RH	
]	Test Result:		Pass		Modulat	ion Type		8D	PSK	
	C Part 15B Class B 1GHz-1	18GHz - 2		_			•			
1.1	E+2-									
1.0	E+2-								\wedge	
	90-								+	
	80-								/	
	70-							/	<u> </u>	
(m/	50							/		
S S	60-									
<u>p</u>							M1	11 1/		
level (d	50-						- 11 † 11 11	Maril Mar		1
p) level (d	40-		station on the best		فريد وين ويوالا المام	المالالالالالالالالالالالالالالالالالال				
level (d			Natural Adams		فيستنيب فالسلطان المستشفيل	Marindan kalada da k				W
level (d	30-		MariaNavara Arabidi		فينستن اللها أيتللن الم	ornational distribution of				W
level (d	40-		Mari Mare public de Mil		Frequency (N					
N level (dBuV/m)	30- 20- 2350	Results	Factor	Limit			Table (o)	Height	ANT	Verdict
	30- 20- 2350				Frequency (N	MHz)	Table (o)	Height (cm)	ANT	Verdict

Page 75 of 96 Report No.: TW2009018E

Date: 2020-09-09



12.4 Restrict Band Measurement

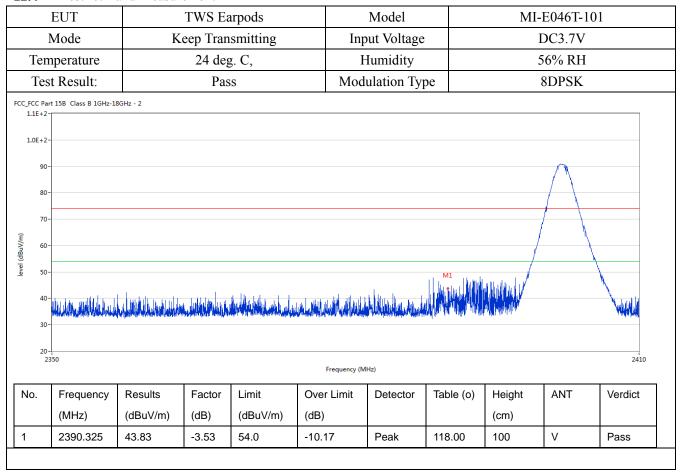

Page 76 of 96 Report No.: TW2009018E

Date: 2020-09-09



12.4 Restrict Band Measurement

	EUT	T	WS Earp	ods	N	Iodel		MI	-E046T-	101
	Mode	Kee	p Transn	nitting	Input	Voltage			DC3.7V	•
	Temperature		24 deg. (Ξ,	Hu	midity			56% RH	[
,	Test Result:		Pass		Modul	ation Type			8DPSK	
	C Part 15B Class B 1GHz-1	8GHz - 2								
1.0	DE+2-			Marine.						
	90 -									
	70-			*						
level (dBuV/m)	60-									
<u>e</u>	40-	Alexandra Maria de la companya della companya della companya de la companya della			Manage House	solution in the second	. 1	l		d
	30-							Ales Perint de la perint de la perinte d La perinte de la perinte d	Amadhinida	
	20-				2483.5 Frequency (N	ИНz)				2500
No	. Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
	2483.5	49.54	-3.57	54.0	-4.46	Peak	64.00	100	Н	Pass

Report No.: TW2009018E Page 77 of 96

Date: 2020-09-09



12.4 Restrict Band Measurement

ŀ	EUT	T	WS Earp	ods	M	odel		MI-	E046T-10)1	
N	Mode	Keep Transmitting 24 deg. C,			Input Voltage Humidity			DC3.7V			
Tem	perature							56% RH			
Test	Result:		Pass		Modula	tion Type			8DPSK		
	15B Class B 1GHz-1	8GHz - 2									
1.1E+2-											
1.0E+2-											
90-											
80-											
70-											
				V							
Ē 60			y								
el (dBuV/m)			NA PARAMETER STATE OF THE STATE								
level (dBuV/m) 50-			pur har a said		A A A A A A A A A A A A A A A A A A A	. 1				1	
level (dBuV/m) 200	itil <mark>da</mark> pelatukalu itooga	White the state of			A A CONTRACTOR OF THE PARTY OF						
					A Jack Market Hill						
40 – 30 –					A Mark Marked Mills						
40-	70				2483.5 Frequency (N	1Hz)		y open de la company de la com		2500	
40 – 30 –	70 Frequency	Results	Factor	Limit		IHz)	Table (o)	Height	ANT	2500 Verdict	
40- 30- 20- 247		Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Frequency (N	T	Table (o)	Height (cm)	ANT		

Note: 1. For Restricted band test, only the worst case was reported and 8DPSK was the worst case

2. The measured PK radiated emissions level less than the AV limit, so no necessary to take down the AV result

Date: 2020-09-09



Page 78 of 96

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

PCB antenna used. The gain is 0.94dBi.

Page 79 of 96 Report No.: TW2009018E

Date: 2020-09-09




14.0 FCC ID Label

FCC ID: 2AS7V-TWS61A

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

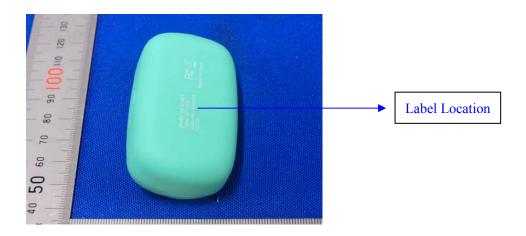

Page 80 of 96 Report No.: TW2009018E

Date: 2020-09-09



15.0 Photo of testing

Conducted Emission Test Setup:




Page 81 of 96

Report No.: TW2009018E

Date: 2020-09-09



Radiated Emission Test Setup:

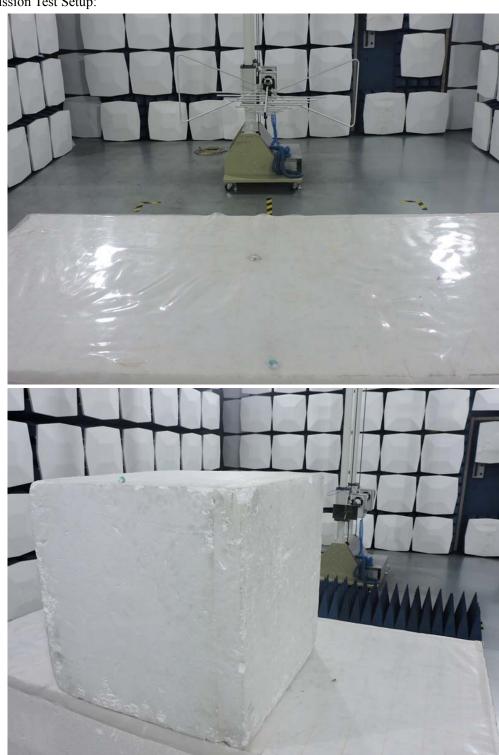

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 82 of 96

Report No.: TW2009018E

Date: 2020-09-09



Photographs - EUT



The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 83 of 96

Report No.: TW2009018E

Date: 2020-09-09



Photographs - EUT



The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: TW2009018E Page 84 of 96

Date: 2020-09-09



Photographs - EUT



Date: 2020-09-09



Photographs - EUT

R-TWS Earpods



The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2020-09-09



Photographs - EUT

R-TWS Earpods





The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2020-09-09



Photographs - EUT

R-TWS Earpods



The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2020-09-09



Photographs - EUT

R-TWS Earpods

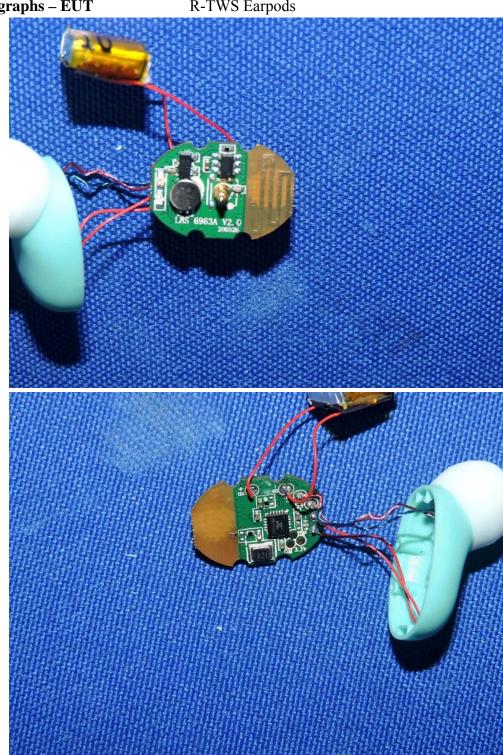

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2020-09-09



Photographs - EUT

R-TWS Earpods

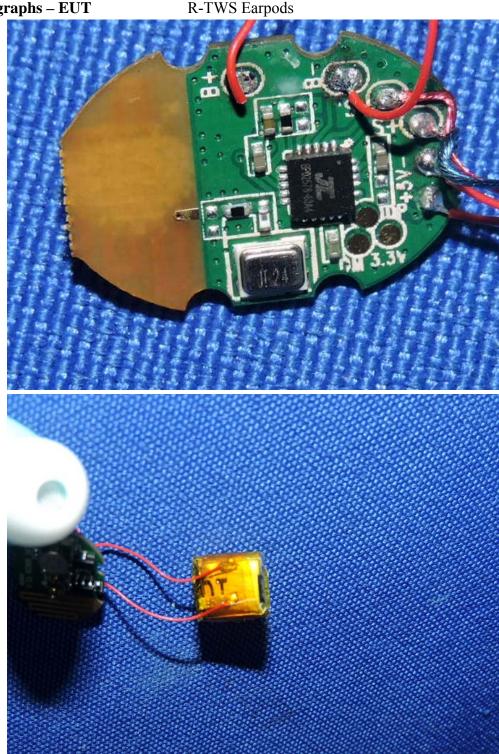

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 90 of 96 Report No.: TW2009018E

Date: 2020-09-09



R-TWS Earpods Photographs - EUT

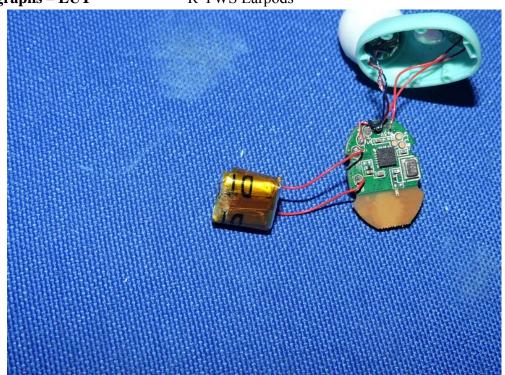


Date: 2020-09-09



Photographs - EUT

L-TWS Earpods

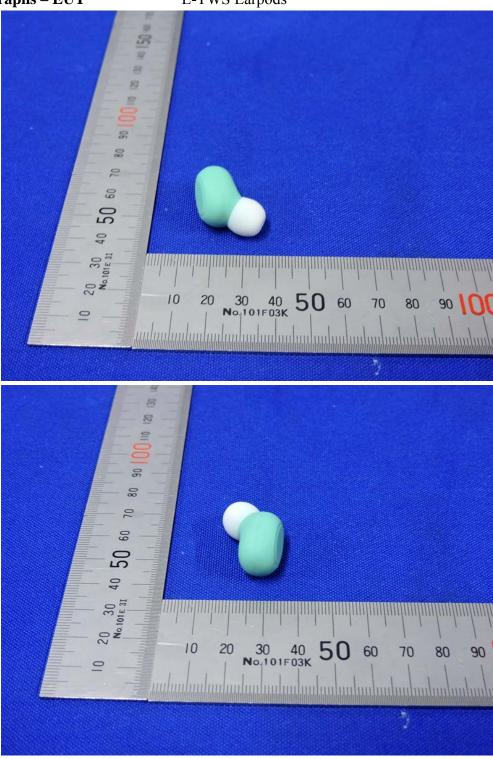

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2020-09-09



Photographs - EUT

L-TWS Earpods



The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2020-09-09



Photographs - EUT

L-TWS Earpods

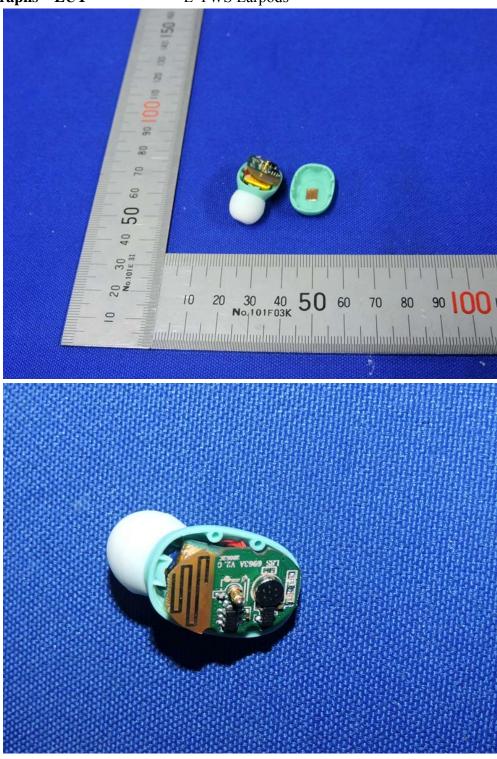

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2020-09-09



Photographs - EUT

L-TWS Earpods

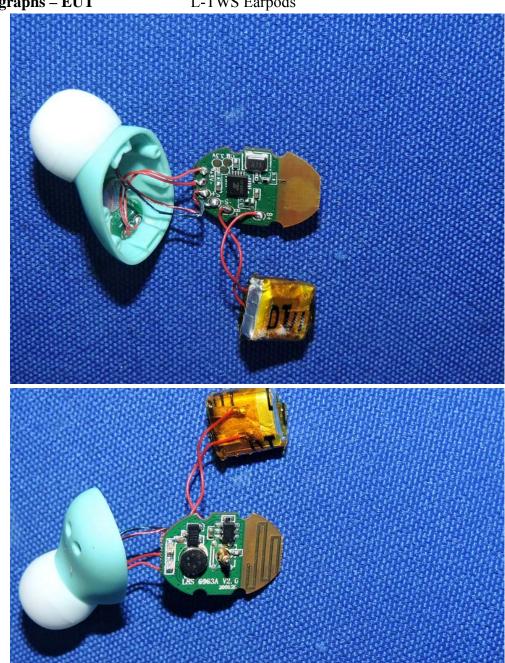

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 95 of 96


Report No.: TW2009018E

Date: 2020-09-09



Photographs - EUT

L-TWS Earpods

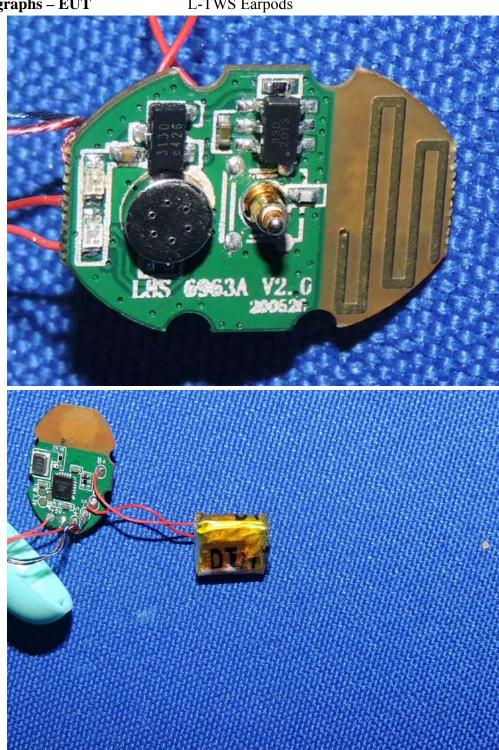

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 96 of 96 Report No.: TW2009018E

Date: 2020-09-09



Photographs - EUT

L-TWS Earpods

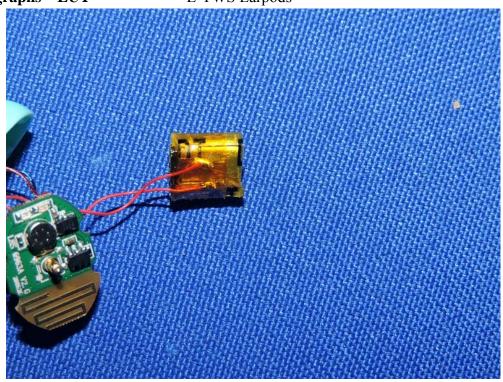

End of Report