

TEST REPORT

FCC/ISED BT Test for BTM530A
Certification

APPLICANT
SEONG JI INDUSTRIAL CO.,LTD.

REPORT NO.
HCT-RF-2011-FI024

DATE OF ISSUE
November 25, 2020

Tested by
Jung Ki Lim



Technical Manager
Jong Seok Lee



HCT CO., LTD.

Soo Chan Lee
SooChan Lee / CEO

HCT CO., LTD.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

<p>TEST REPORT</p> <p>FCC/ISED BT Test for BTM530A</p>	<p>REPORT NO. HCT-RF-2011-FI024</p> <p>DATE OF ISSUE November 25, 2020</p> <p>Additional Model -</p>
---	---

Applicant	SEONG JI INDUSTRIAL CO.,LTD 54-33, DongtanHana 1-gil, Hwaseong-si, Gyeonggi-do, 18423, Korea
Eut Type Model Name	Bluetooth Module BTM530A
FCC ID IC	2AS8LBTM530A 25119-BTM530A
Max. RF Output Power	7.914 dBm (6.19 mW)
Modulation type	GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
FCC Classification	FCC Part 15 Spread Spectrum Transmitter
FCC Rule Part(s)	Part 15 subpart C 15.247
ISED Rule Part(s)	RSS-247 Issue 2 (February 2017) RSS-Gen Issue 5_Amendment 1 (March 2019)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	November 25, 2020	Initial Release

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance.

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

CONTENTS

1. EUT DESCRIPTION	5
2. Requirements for Bluetooth transmitter(15.247)	6
3. TEST METHODOLOGY	7
EUT CONFIGURATION	7
EUT EXERCISE	7
GENERAL TEST PROCEDURES	7
DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION	8
5. FACILITIES AND ACCREDITATIONS	8
FACILITIES	8
EQUIPMENT	8
6. ANTENNA REQUIREMENTS	9
7. MEASUREMENT UNCERTAINTY	10
8. DESCRIPTION OF TESTS	11
9. SUMMARY OF TEST RESULTS	33
10. TEST RESULT	34
10.1 PEAK POWER	34
10.2 BAND EDGES	40
10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99% BW)	47
10.4 NUMBER OF HOPPING FREQUENCY	55
10.5 TIME OF OCCUPANCY (DWELL TIME)	59
10.6 SPURIOUS EMISSIONS	65
10.6.1 CONDUCTED SPURIOUS EMISSIONS	65
10.6.2 RADIATED SPURIOUS EMISSIONS	66
10.6.3 RADIATED RESTRICTED BAND EDGES	71
10.7 RECEIVER SPURIOUS EMISSIONS	74
10.8 POWERLINE CONDUCTED EMISSIONS	75
11. LIST OF TEST EQUIPMENT	79
12. ANNEX A_ TEST SETUP PHOTO	81

1. EUT DESCRIPTION

Model	BTM530A
Additional Model	-
EUT Type	Bluetooth Module
Power Supply	DC 3.30 V
Frequency Range	2402 MHz - 2480 MHz
Max. RF Output Power	7.914 dBm (6.19 mW)
BT Operating Mode	Normal, EDR, AFH
Modulation Type	GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
Modulation Technique	FHSS
Number of Channels	79Channels, Minimum 20 Channels(AFH)
Antenna Specification	Antenna type: Pattern Ant Peak Gain : 0 dBi
Date(s) of Tests	Novenber 13, 2020 ~ November 23, 2020
PMN (Product Marketing Number)	BTM530A
HVIN (Hardware Version Identification Number)	BTM530A
FVIN (Firmware Version Identification Number)	N/A
HMN (Host Marketing Name)	N/A
EUT serial numbers	Radiated : 88571dee81bf, Conducted : 88571dee81cf

2. Requirements for Bluetooth transmitter(15.247)

This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:

- 1) This system is hopping pseudo-randomly.
- 2) Each frequency is used equally on the average by each transmitter.
- 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
- 4) The receiver shifts frequencies in synchronization with the transmitted signals.
 - 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
 - 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

- RSS-247 5.1 (a): The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Device (ANSI C63.10-2013, KDB 558074) is used in the measurement of the test device.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the RSS-GEN issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the analyzer was set to peak detector with a reduced VBW setting(RBW = 1 MHz, VBW = 1/T Hz, where T = Pulse width).

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

According to RSS-GEN(Issue 5) Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested..

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of

ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

8. DESCRIPTION OF TESTS


8.1. Conducted Maximum Peak Output Power

Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 W.
For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 W.
2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Test Configuration

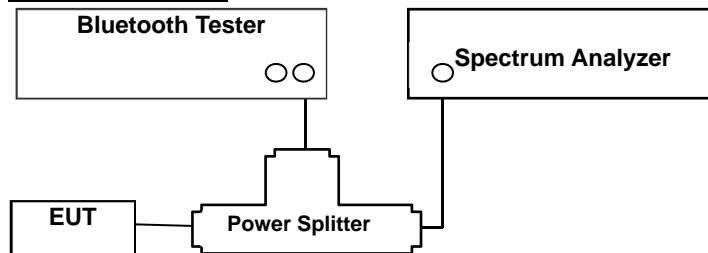

Test Procedure

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak detector mode. This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.5 in ANSI 63.10-2013 & Procedure 10(b)(6)(i) in KDB 558074 v05r02)

- 1) Span: approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- 2) RBW > the 20 dB bandwidth of the emission being measured
- 3) VBW ≥ RBW
- 4) Sweep = Auto
- 5) Detector = Peak
- 6) Trace = Max hold

Sample Calculation


$$\begin{aligned} \text{Output Power} &= \text{Spectrum Reading Power} + \text{Power Splitter loss} + \text{Cable loss(2 ea)} \\ &= 10 \text{ dBm} + 6 \text{ dB} + 1.5 \text{ dB} = 17.5 \text{ dBm} \end{aligned}$$

8.2. Conducted Band Edge(Out of Band Emissions)

Limit

According to § 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Configuration

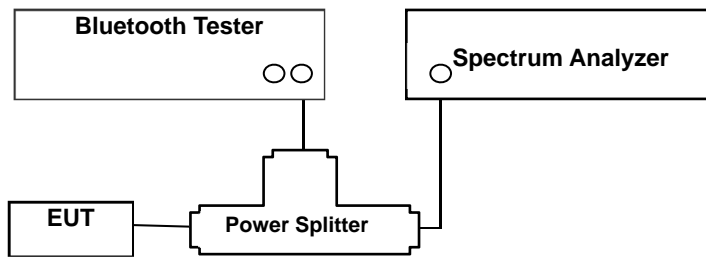

Test Procedure

This test is performed with hopping off and hopping on.

The Spectrum Analyzer is set to (6.10.4 in ANSI 63.10-2013 & Procedure 8.5 and 8.6 in KDB 558074 v05r02)


- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.
- 5) RBW: 100 kHz
- 6) VBW: 300 kHz
- 7) Detector: Peak
- 8) Trace: Max hold

8.3. Frequency Separation & 20 dB Bandwidth

Limit

According to § 15.247(a)(1), Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Configuration

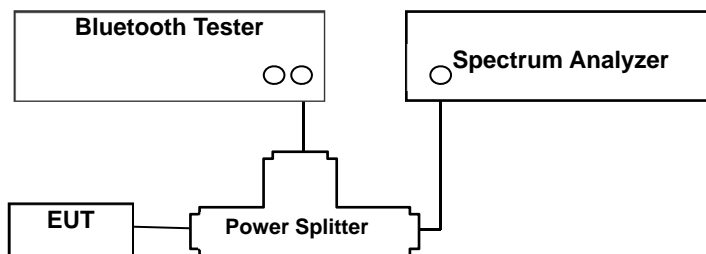

Test Procedure(Frequency Separation)

The Channel Separation test is performed with hopping on.

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.2 in ANSI 63.10-2013 & Procedure 10(b)(6)(iii) in KDB 558074 v05r02)

- 1) Span: Wide enough to capture the peaks of two adjacent channels
- 2) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3) VBW \geq RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.
- 8) Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

Test Procedure (20 dB Bandwidth)

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (6.9.2 in ANSI 63.10-2013)


- 1) Span: Set between two times and five times the OBW
- 2) RBW: 1% to 5% of the OBW.
- 3) VBW $\geq 3 \times$ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.

8.4. Number of Hopping Frequencies

Limit

According to § 15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands shall use at least 15 hopping frequencies.

Test Configuration

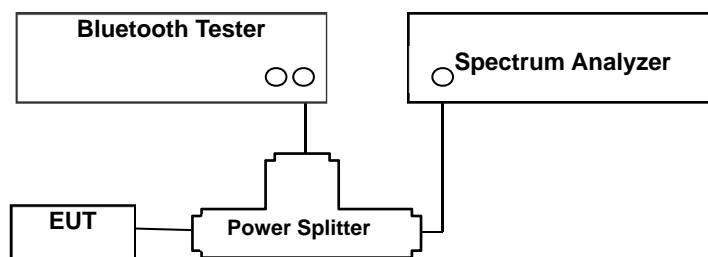

Test Procedure

The Bluetooth frequency hopping function of the EUT was enabled.

The Spectrum Analyzer is set to (7.8.3 in ANSI 63.10-2013 & Procedure 10(b)(4) in KDB 558074 v05r02)


- 1) Span: the frequency band of operation
- 2) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3) VBW \geq RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) Allow the trace to stabilize.

8.5. Time of Occupancy

Limit

According to § 15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration

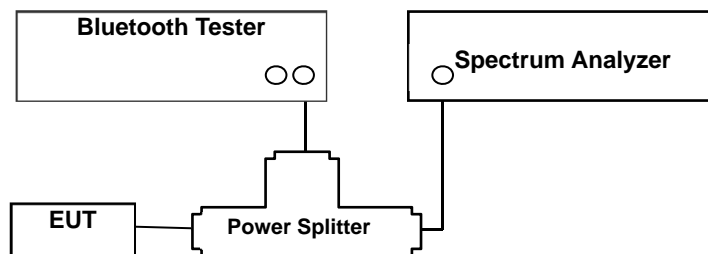

Test Procedure

This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.4 in ANSI 63.10-2013 & Procedure 10(b)(6)(iv) in KDB 558074 v05r02)

- 1) Span: Zero span, centered on a hopping channel
- 2) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- 3) Sweep = as necessary to capture the entire dwell time per hopping channel
- 4) Detector: Peak
- 5) Trace: Max hold

The marker-delta function was used to determine the dwell time.

Sample Calculation

The following calculation process is not relevant to our measurement results. It is just an example.

(1) Non-AFH Mode

- DH 5 (GFSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27$ (ms)
- 2-DH 5 ($\pi/4$ DQPSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27$ (ms)
- 3-DH 5 (8DPSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27$ (ms)

(2) AFH Mode

- DH 5 (GFSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13$ (ms)
- 2-DH 5 ($\pi/4$ DQPSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13$ (ms)
- 3-DH 5 (8DPSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13$ (ms)

Note :

DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving.

Then the system makes worst case 1600/6 hops per second with 79 channels. So the system have each channel 3.3755 times per second and so for 31.6 seconds the system have 106.667 times of appearance.

Each tx-time per appearance of DH5 is 2.890 ms.


Dwell time = Tx-time x 106.667 = 308.27 (ms)

8.6. Conducted Spurious Emissions

Limit

Conducted > 20 dBc

Test Configuration

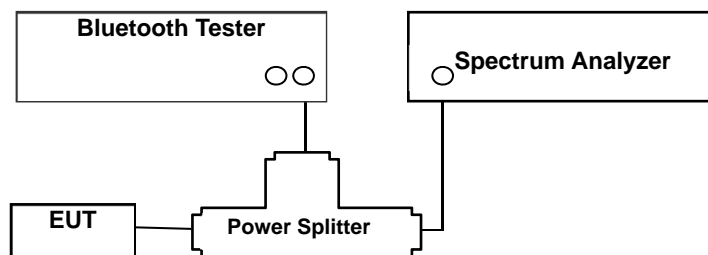

Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The Spectrum Analyzer is set to (7.8.8 in ANSI 63.10-2013 & Procedure 8.5 and 8.6 in KDB 558074 v05r02)

- 1) Span: 30 MHz to 10 times the operating frequency in GHz.
- 2) RBW: 100 kHz
- 3) VBW: 300 kHz
- 4) Sweep: Coupled
- 5) Detector: Peak

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

This test is performed with hopping off.

Factors for frequency

Freq(MHz)	Factor(dB)
30	6.14
100	6.22
200	6.30
300	6.40
400	6.46
500	6.49
600	6.49
700	6.53
800	6.55
900	6.59
1000	6.61
2000	6.88
2400	6.97
2500	6.99
3000	7.09
4000	7.25
5000	7.44
6000	7.51
7000	7.66
8000	7.78
9000	7.90
10000	8.04
11000	8.12
12000	8.28
13000	8.47
14000	8.41
15000	8.51
16000	8.56
17000	8.63
18000	8.75
19000	8.81
20000	8.89
21000	9.18
22000	9.24
23000	9.27
24000	9.35
25000	9.48
26000	9.58

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Cable loss(2 EA) + Splitter loss(6 dB) + EUT Cable(For Conducted)

3. Exten Cable loss : 0.3 dB

8.7. Radiated Test

Limit

FCC

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

ISED


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

FCC&ISED


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

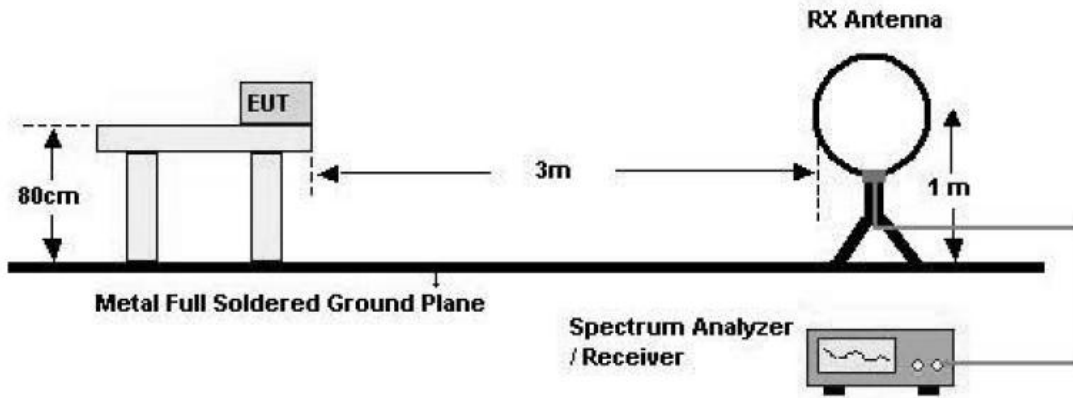

30 MHz - 1 GHz

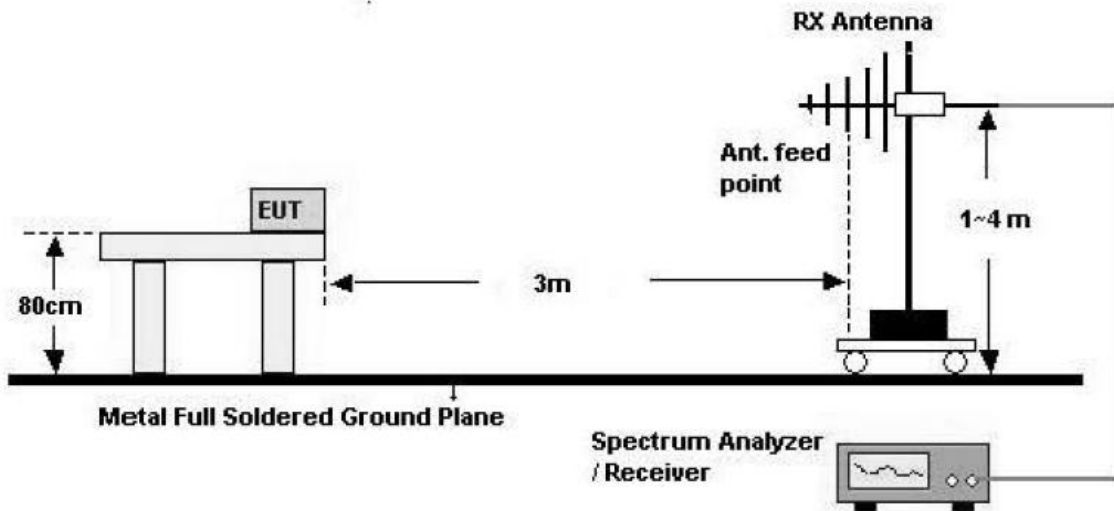

Above 1 GHz

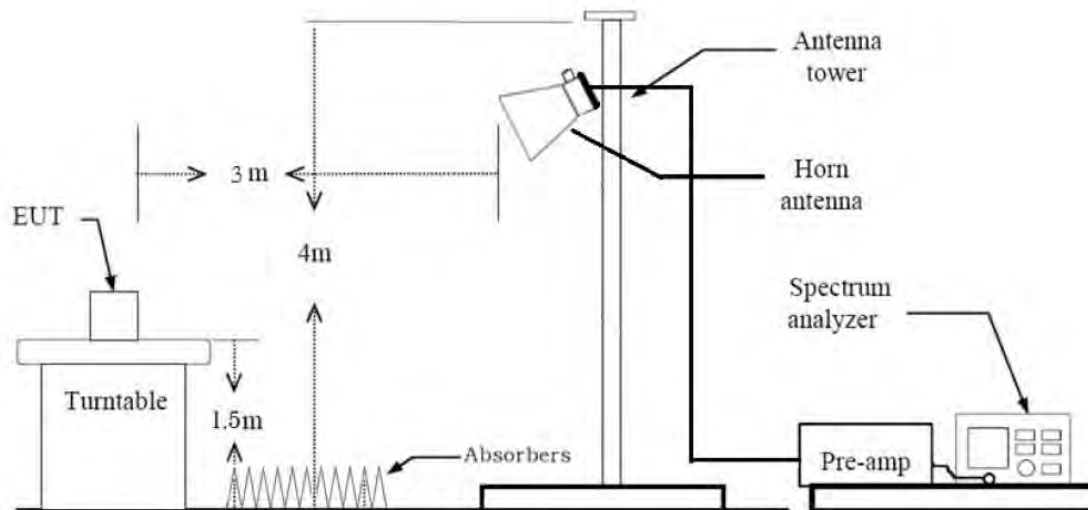

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※In general, (1) is used mainly

7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):
 - Average value of pulsed emissions
 - Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determined from the peak field strength after correcting for the worst-case duty cycle.
 - DCCF = $20\log_{10}(\text{Worst Case Dwell Time} / 100\text{ms}) = -24.702 \text{ dB}$
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
11.
 - [1] Normal (Peak)
= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
 - [2] Normal (Avg)
= (Peak) + D.C.C.F

13. Duty Cycle Correction Factor(AFH mode – minimum channel number case - 20 channels)
- Time to cycle through all channels= $\Delta t = \tau$ [ms] x 20 channels = 58.20 ms, where τ = pulse width
 - $100 \text{ ms} / \Delta t$ [ms] = H → Round up to next highest integer, H ' = 2
 - Worst Case Dwell Time = τ [ms] x H ' = 5.82 ms
 - DCCF = $20\log_{10}(\text{Worst Case Dwell Time} / 100\text{ms}) = -24.702 \text{ dB}$

Test Procedure of Radiated Restricted Band Edge

- Radiated test is performed with hopping off.
- The EUT is placed on a turntable, which is 1.5 m above ground plane.
- We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
- The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Spectrum Setting
 - Measurement Type(Peak):
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - Measurement Type(Average):
 - Average value of pulsed emissions
 - Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determined from the peak field strength after correcting for the worst-case duty cycle.
 - DCCF = $20\log_{10}(\text{Worst Case Dwell Time} / 100\text{ms}) = -24.702 \text{ dB}$
- Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
- Total
 - Normal (Peak)
= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
 - Normal (Avg)
= (Peak) + D.C.C.F

11. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

8.8. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

8.9. Receiver Spurious Emissions

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration


30 MHz - 1 GHz

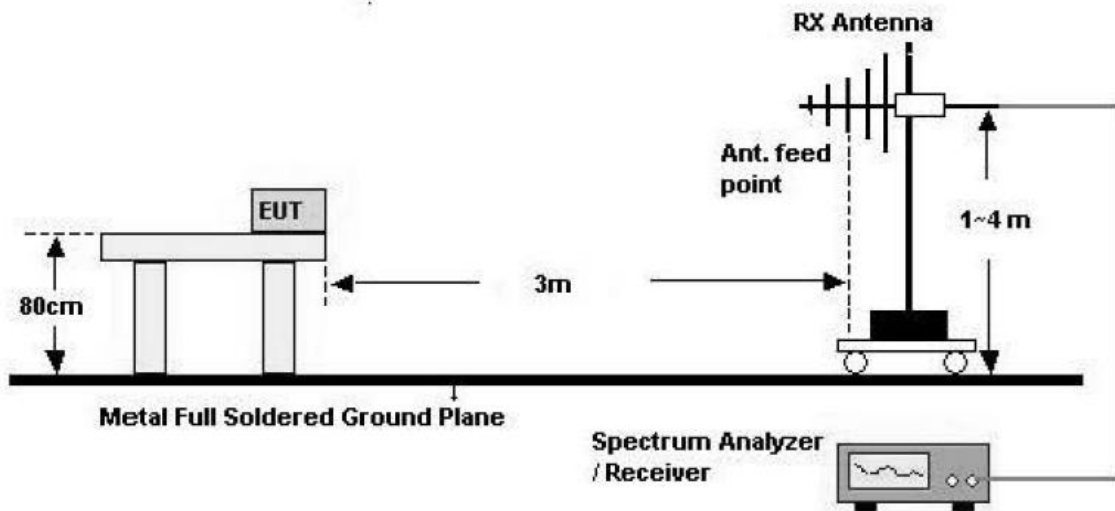

Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

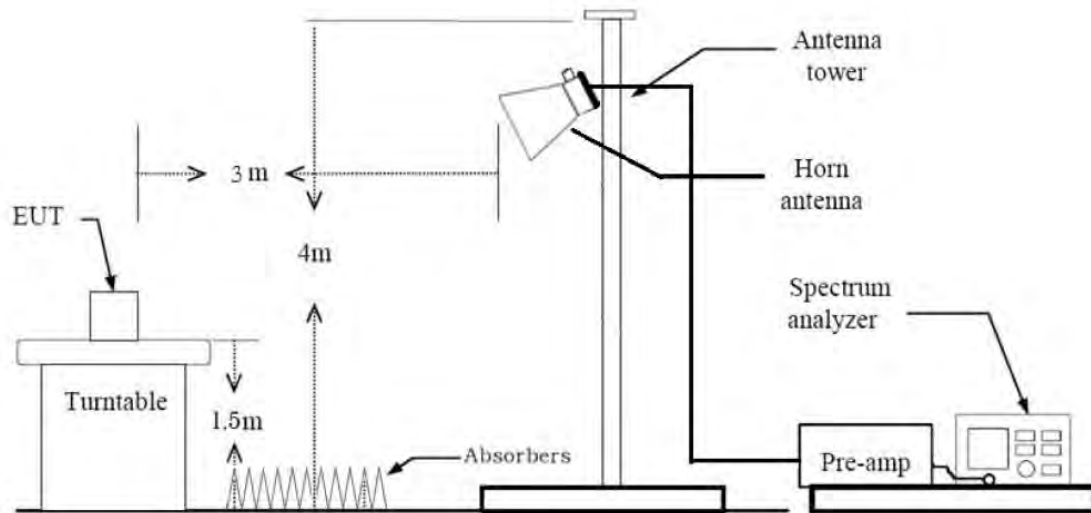

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):
 - We performed using a reduced video BW method was done with the analyzer in linear mode

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 1 kHz

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

8.10. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + Notebook
 - Worstcase : Stand alone + Notebook
2. EUT Axis
 - Radiated Spurious Emissions : Z
 - Radiated Restricted Band Edge : X
3. All data rate of operation were investigated and the test results are worst case in highest data rate of each mode.
 - GFSK : DH5
 - $\pi/4$ DQPSK : 2-DH5
 - 8DPSK : 3-DH5
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + Notebook
 - Worstcase : Stand alone + Notebook

Conducted test

1. The EUT was configured with data rate of highest power.
 - GFSK : DH5
 - $\pi/4$ DQPSK : 2-DH5
 - 8DPSK : 3-DH5
2. AFH & Non-AFH were tested and the worst case results are reported.
(Worst case : Non-AFH)

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	ISED Part Section(s)	Test Limit	Test Condition	Test Result
20 dB Bandwidth	§ 15.247(a)(1)	RSS-247, 5.1	N/A	Conducted	PASS
Occupied Bandwidth	N/A	RSS-GEN, 6.7	N/A		N/A
Conducted Maximum Peak Output Power	§ 15.247(b)(1)	RSS-247, 5.1 b)	< 0.125 W		PASS
Carrier Frequency Separation	§ 15.247(a)(1)	RSS-247, 5.1 b)	> 25 kHz or >2/3 of the 20dB BW		PASS
Number of Hopping Frequencies	§ 15.247(a)(1)(iii)	RSS-247, 5.1 d)	≥ 15		PASS
Time of Occupancy	§ 15.247(a)(1)(iii)	RSS-247, 5.1 d)	< 400 ms		PASS
Conducted Spurious Emissions	§ 15.247(d)	RSS-247, 5.5	> 20 dB for all out-of band emissions		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	RSS-247, 5.5	> 20 dB for all out-of band emissions		PASS
AC Power line Conducted Emissions	§ 15.207(a)	RSS-GEN, 8.8	cf. Section 8.8		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	RSS-GEN, 8.9	cf. Section 8.7	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	RSS-GEN, 8.9 RSS-GEN, 8.10	cf. Section 8.7		PASS
Receiver Spurious Emissions	N/A	RSS-GEN, 7	cf. Section 8.9		PASS

10. TEST RESULT

10.1 PEAK POWER

Channel	Frequency (MHz)	Output Power (GFSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	7.003	5.02	125
Mid	2441	7.913	6.18	
High	2480	7.914	6.19	

Channel	Frequency (MHz)	Output Power (8DPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	6.249	4.22	125
Mid	2441	7.442	5.55	
High	2480	7.520	5.65	

Channel	Frequency (MHz)	Output Power ($\pi/4$ DQPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	5.931	3.92	125
Mid	2441	7.241	5.30	
High	2480	7.358	5.44	

Note:

1. Spectrum reading values are not plot data.

The power results in plot is already including the actual values of loss for the splitter and cable combination.

2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

Actual value of loss for the splitter and cable combination is 6.97 dB at 2400 MHz

and is 6.99 dB at 2500 MHz. And exten cable loss is 0.3 dB.

So, 7.29 dB is offset. And the offset gap in the 2.4 GHz range do not affect the conducted peak power final result.

Test Plots (GFSK)
Peak Power (CH.0)



Test Plots (GFSK)
Peak Power (CH.39)



Test Plots (GFSK)
Peak Power (CH.78)



Test Plots (8DPSK)
Peak Power (CH.0)



Test Plots (8DPSK)
Peak Power (CH.39)



Test Plots (8DPSK)
Peak Power (CH.78)



Test Plots ($\pi/4$ DQPSK)
Peak Power (CH.0)



Test Plots ($\pi/4$ DQPSK)
Peak Power (CH.39)



Test Plots ($\pi/4$ DQPSK)

Peak Power (CH.78)



10.2 BAND EDGES

Without hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	50.669	42.745	43.916	20
Upper	57.880	59.484	59.484	

With hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	54.970	50.598	44.607	20
Upper	58.596	58.491	56.917	

Note :

1. Spectrum reading values are not plot data.

The power results in plot is already including the actual values of loss for the splitter and cable combination.

2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

Actual value of loss for the splitter and cable combination is 6.97 dB at 2400 MHz and is 6.99 dB at 2500 MHz. And exten cable loss is 0.3 dB.

So, 7.29 dB is offset. And the offset gap in the 2.4 GHz range do not affect the conducted peak power final result.

Test Plots without hopping (GFSK)

Band Edges (CH.0)



Test Plots without hopping (GFSK)

Band Edges (CH.78)



Test Plots without hopping (8DPSK)

Band Edges (CH.0)



Test Plots without hopping (8DPSK)

Band Edges (CH.78)



Test Plots without hopping ($\pi/4$ DQPSK)

Band Edges (CH.0)



Test Plots without hopping ($\pi/4$ DQPSK)

Band Edges (CH.78)



Test Plots with hopping (GFSK)

Band Edges (CH.0)



Test Plots with hopping (GFSK)

Band Edges (CH.78)



Test Plots with hopping (8DPSK)
Band Edges (CH.0)



Test Plots with hopping (8DPSK)
Band Edges (CH.78)



Test Plots with hopping ($\pi/4$ DQPSK)
Band Edges (CH.0)



Test Plots with hopping ($\pi/4$ DQPSK)
Band Edges (CH.78)



10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99% BW)

99% BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	874.16	1180.4	1169.3
CH.39	873.26	1184.1	1168.4
CH.78	875.53	1184.6	1169.6

20dB BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	963.1	1304	1316
CH.39	963.0	1308	1316
CH.78	965.1	1305	1319

Channel Separation(kHz)			Limit (kHz)
GFSK	8DPSK	$\pi/4$ DQPSK	
954	1004	988	>25 kHz or >2/3 of the 20dB BW

Test Plots (GFSK)
Channel Separation



Test Plots (8DPSK)
Channel Separation



Test Plots ($\pi/4$ DQPSK)

Channel Separation



Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)



Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)




Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.78)



Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)

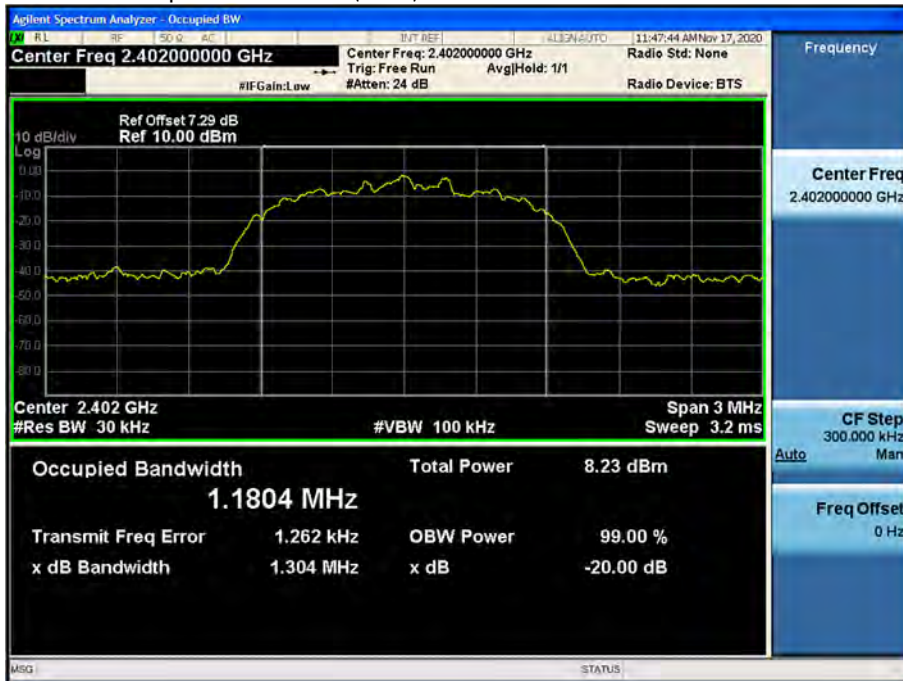

Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)




Test Plots (8DPSK)


20 dB Bandwidth & Occupied Bandwidth (CH.78)




Test Plots ($\pi/4$ DQPSK)
 20 dB Bandwidth & Occupied Bandwidth (CH.0)

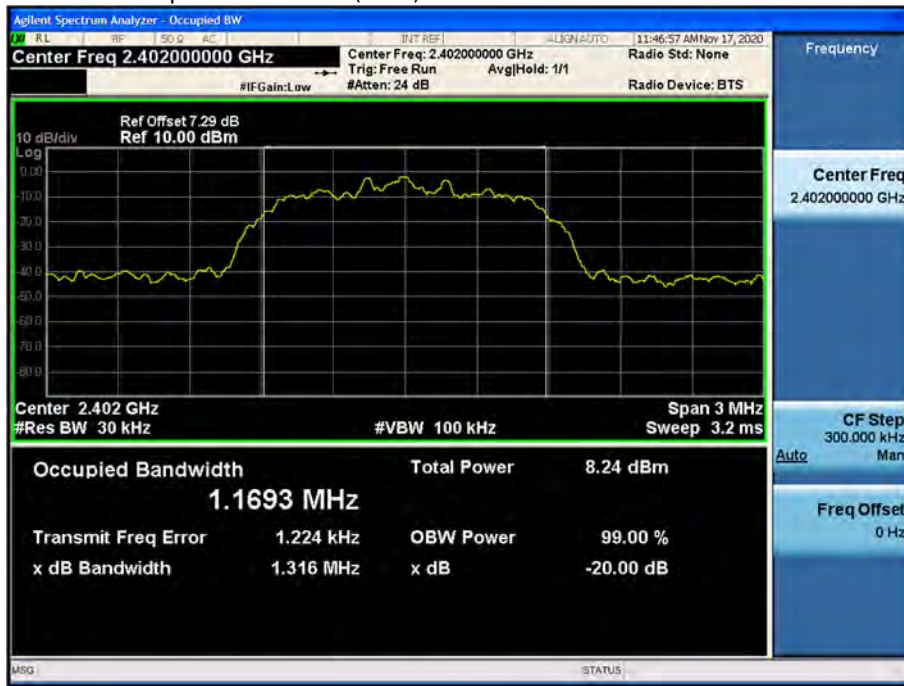

Test Plots ($\pi/4$ DQPSK)
 20 dB Bandwidth & Occupied Bandwidth (CH.39)

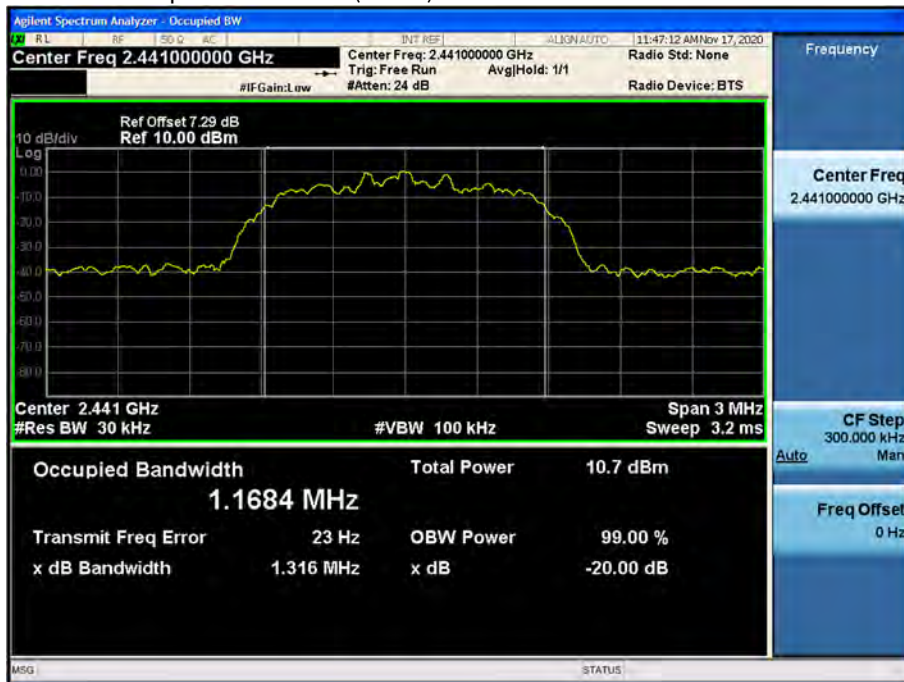

Test Plots ($\pi/4$ DQPSK)
 20 dB Bandwidth & Occupied Bandwidth (CH.78)

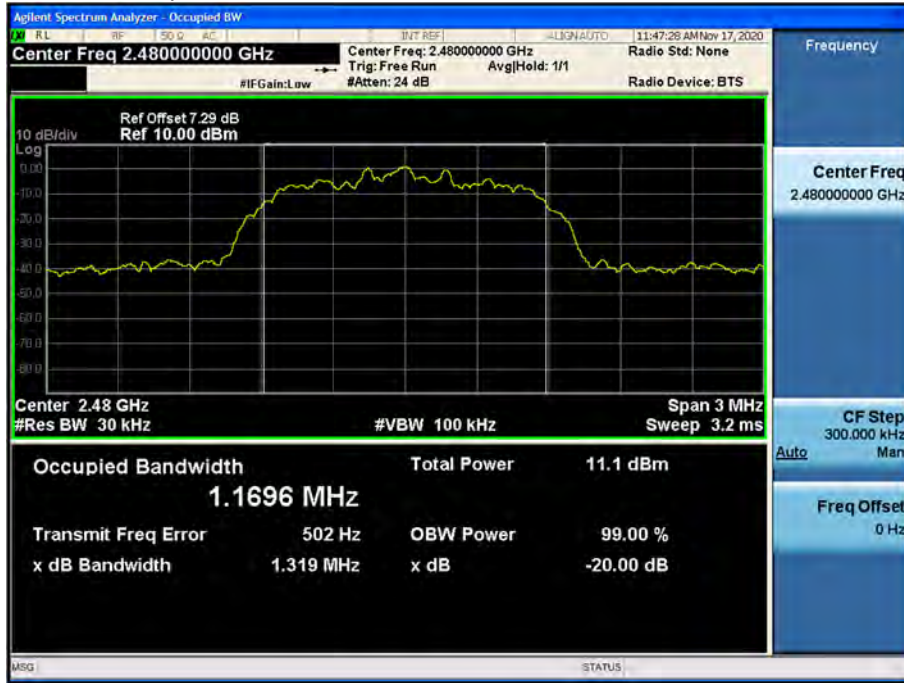

10.4 NUMBER OF HOPPING FREQUENCY


Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15

Note :

In case of AFH mode, minimum number of hopping channels is 20.


Test Plots (GFSK)

Number of Channels (2.4 GHz - 2.441 GHz)

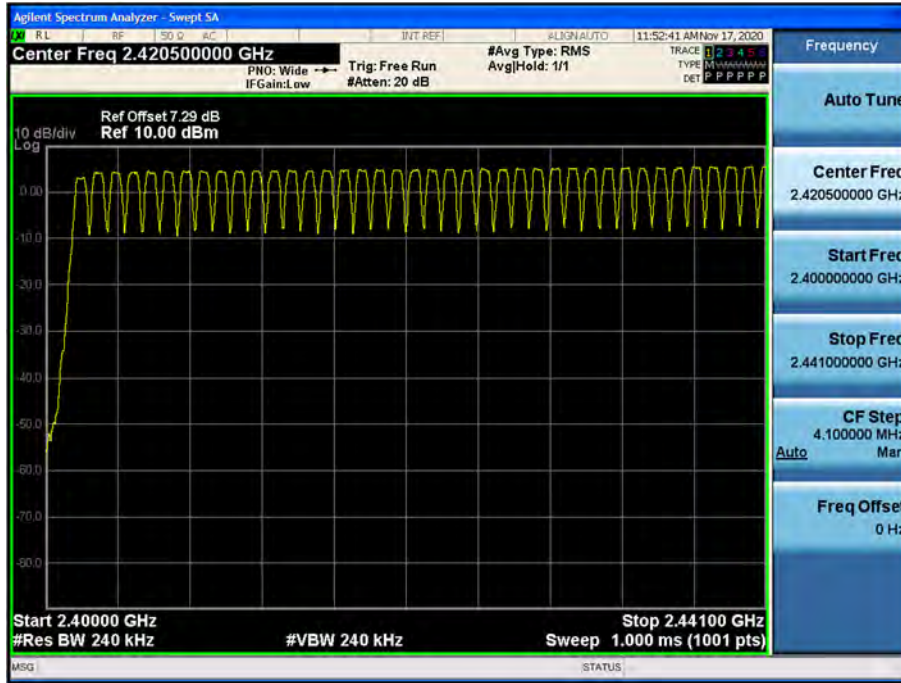


Test Plots (GFSK)

Number of Channels (2.441 GHz - 2.4835 GHz)

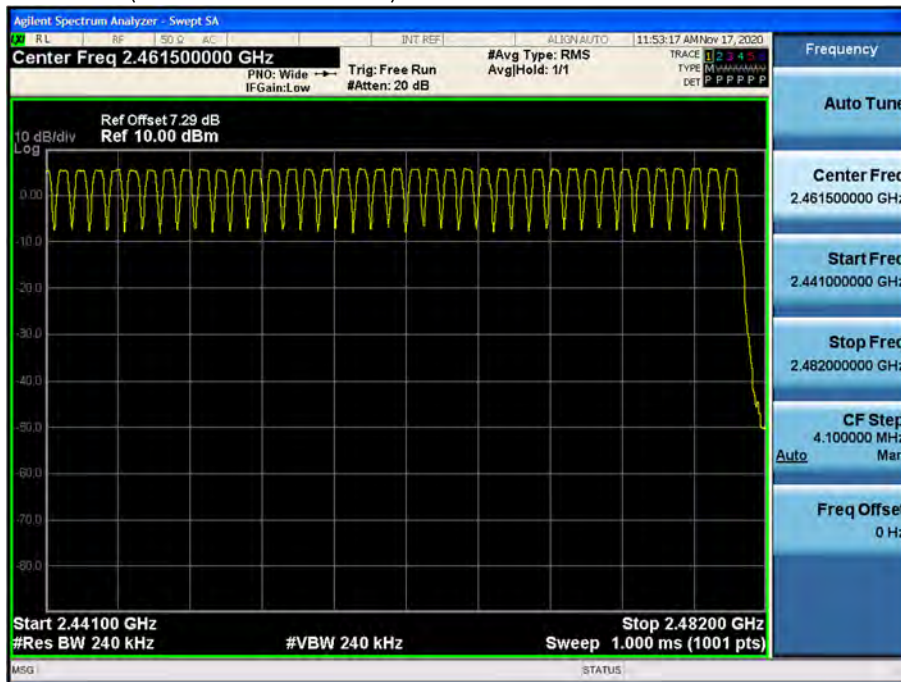


Test Plots (8DPSK)

Number of Channels (2.4 GHz - 2.441 GHz)

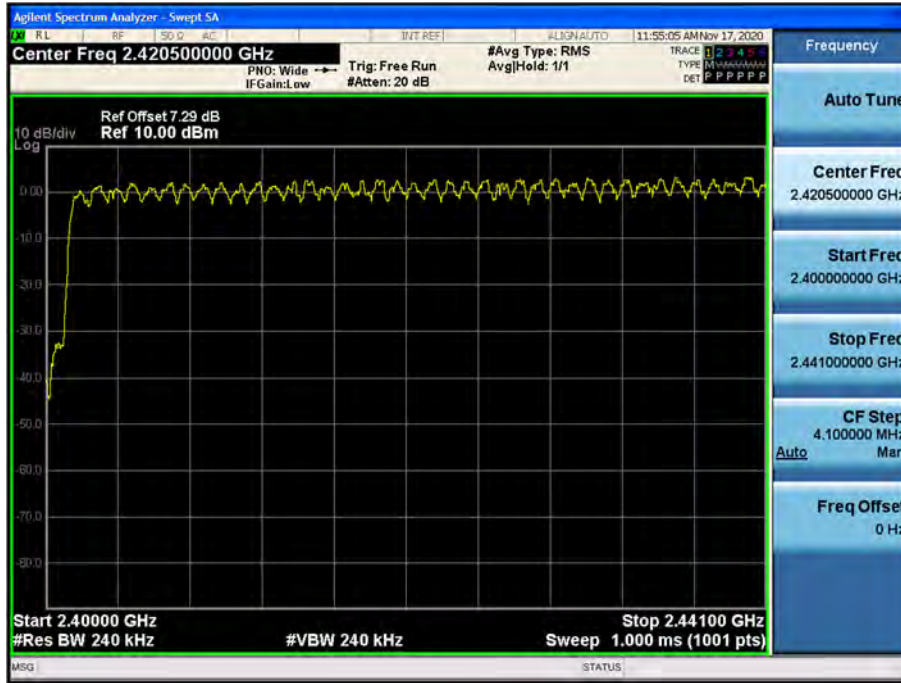


Test Plots (8DPSK)


Number of Channels (2.441 GHz - 2.4835 GHz)

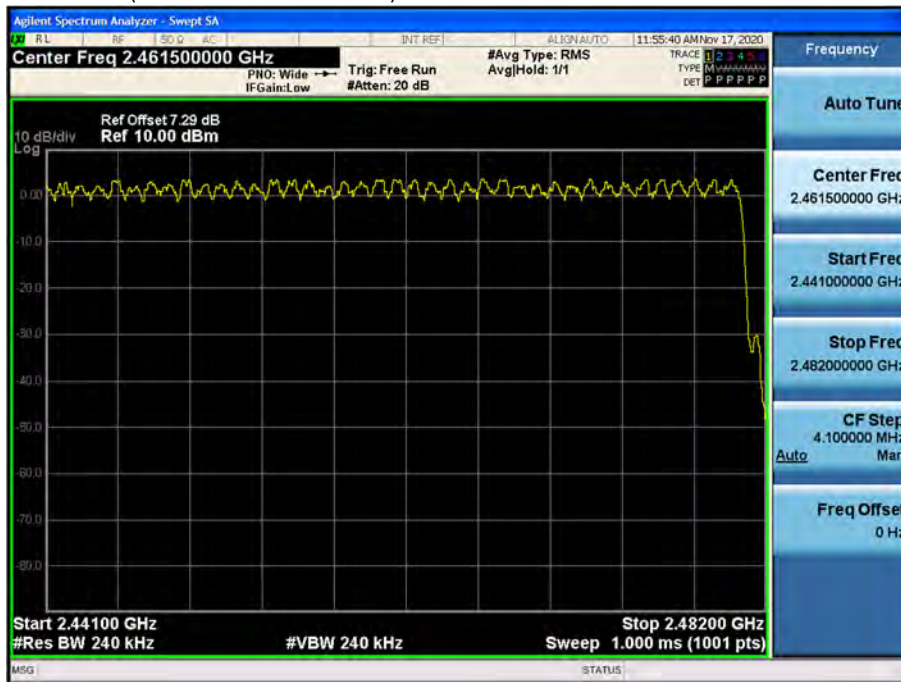

Test Plots ($\pi/4$ DQPSK)
 Number of Channels (2.4 GHz - 2.441 GHz)

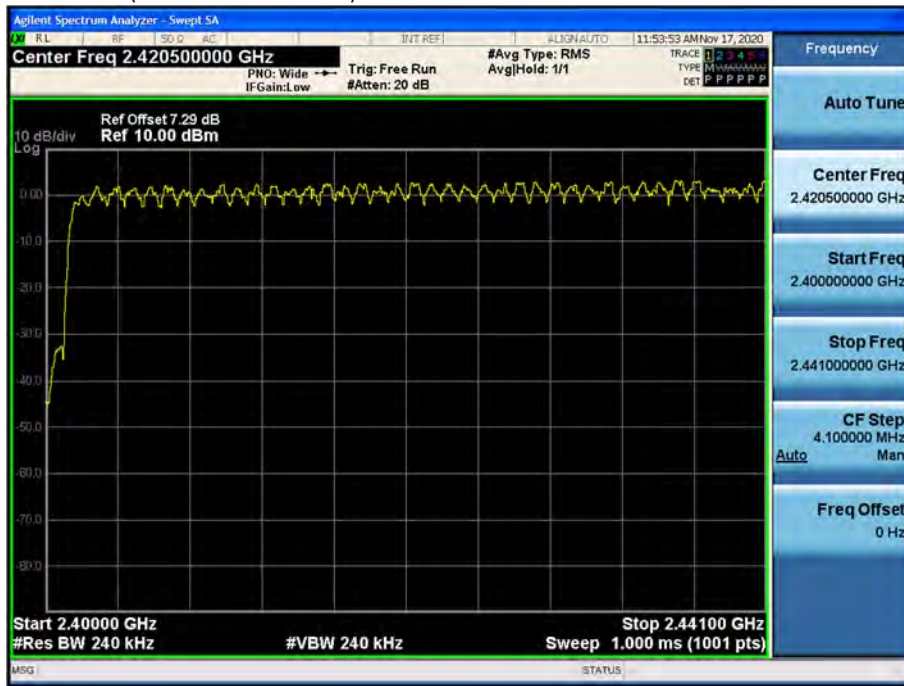

Test Plots ($\pi/4$ DQPSK)
 Number of Channels (2.441 GHz - 2.4835 GHz)

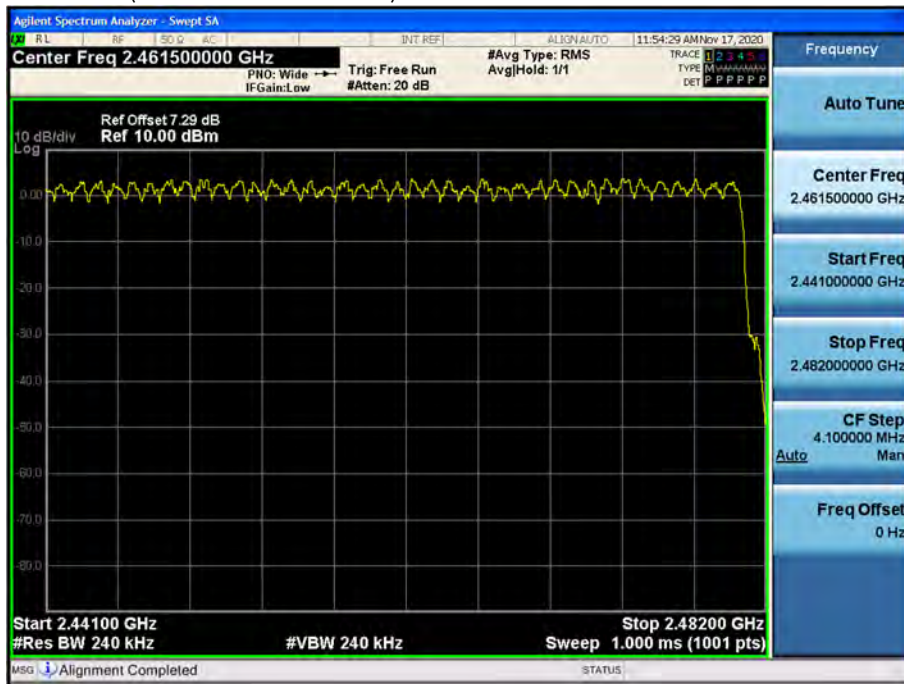

10.5 TIME OF OCCUPANCY (DWELL TIME)

Pulse Time (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
	Low	2.900	2.905	2.905
	Mid	2.900	2.910	2.905
	High	2.900	2.910	2.905

Non-AFH Mode


Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	309.33	309.87	309.87	31.6	400
	Mid	309.33	310.40	309.87	31.6	
	High	309.33	310.40	309.87	31.6	

AFH Mode

Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	154.67	154.93	154.93	8.0	400
	Mid	154.67	155.20	154.93	8.0	
	High	154.67	155.20	154.93	8.0	


Test Plots (GFSK)

Dwell Time (CH.0)

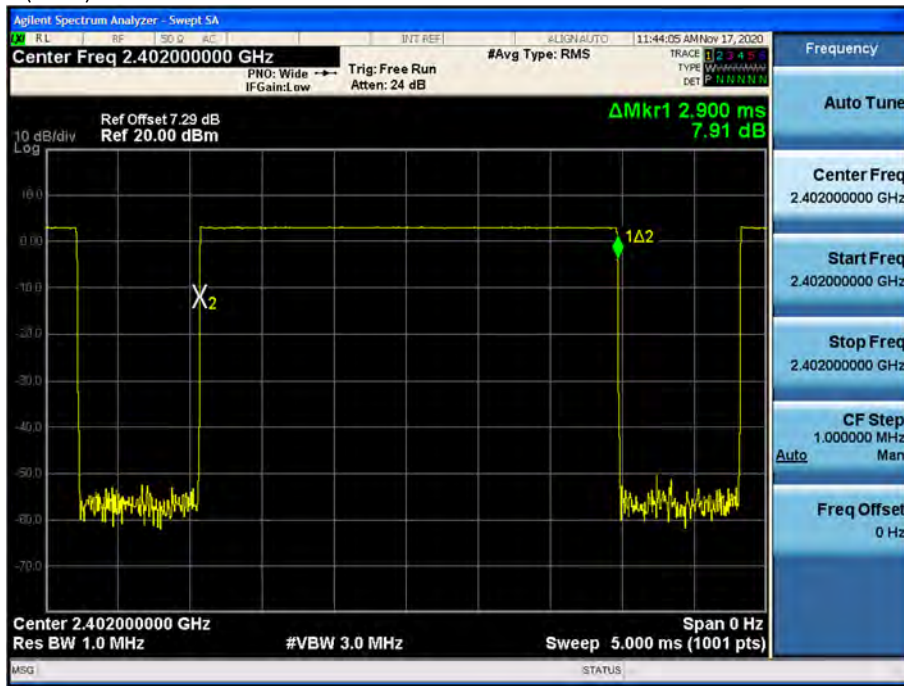


Test Plots (GFSK)


Dwell Time (CH.39)

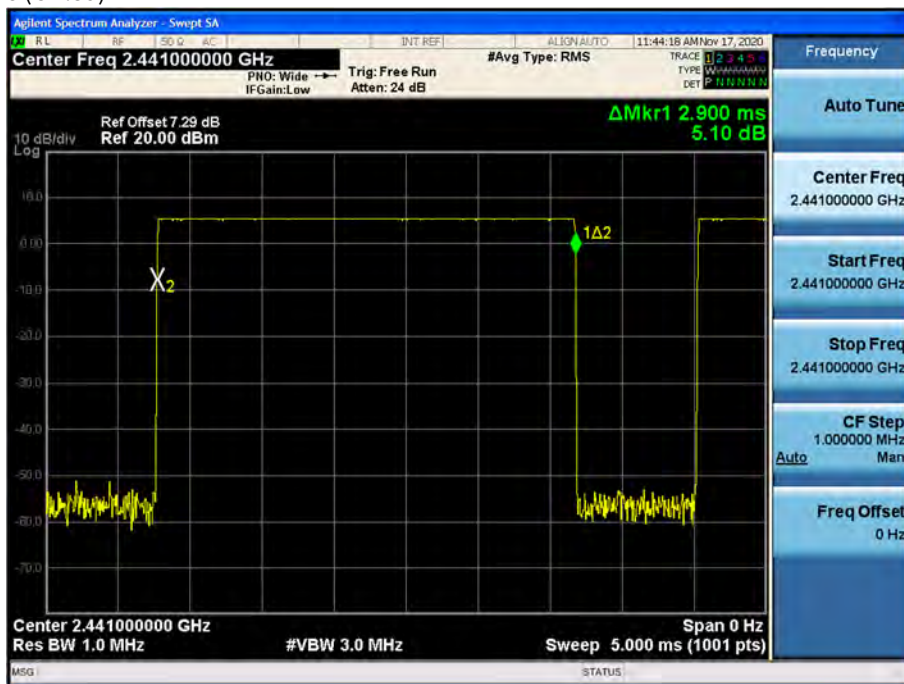

Test Plots (GFSK)
Dwell Time (CH.78)

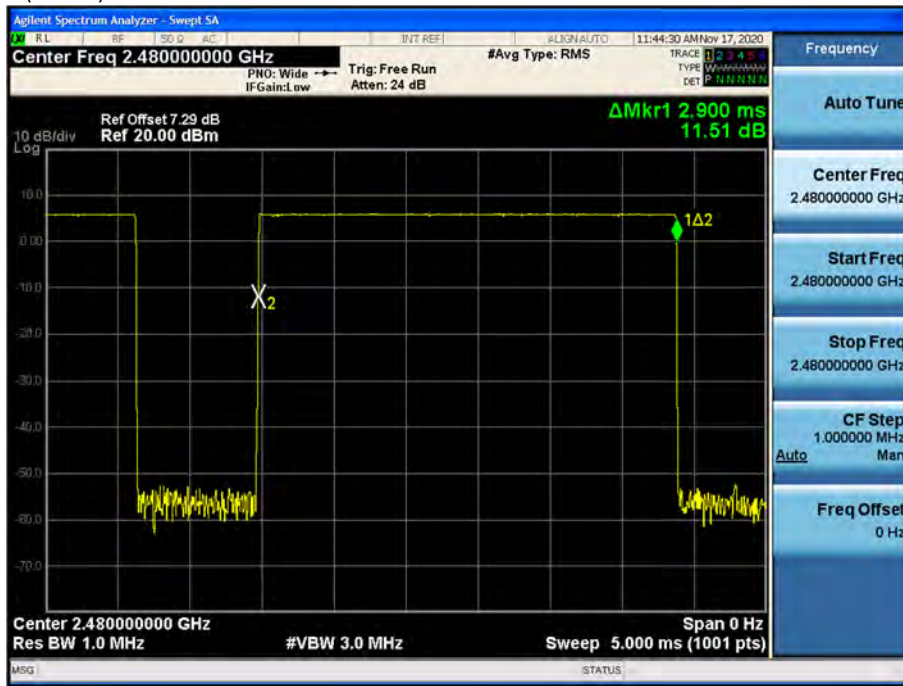


Test Plots (8DPSK)
Dwell Time (CH.0)

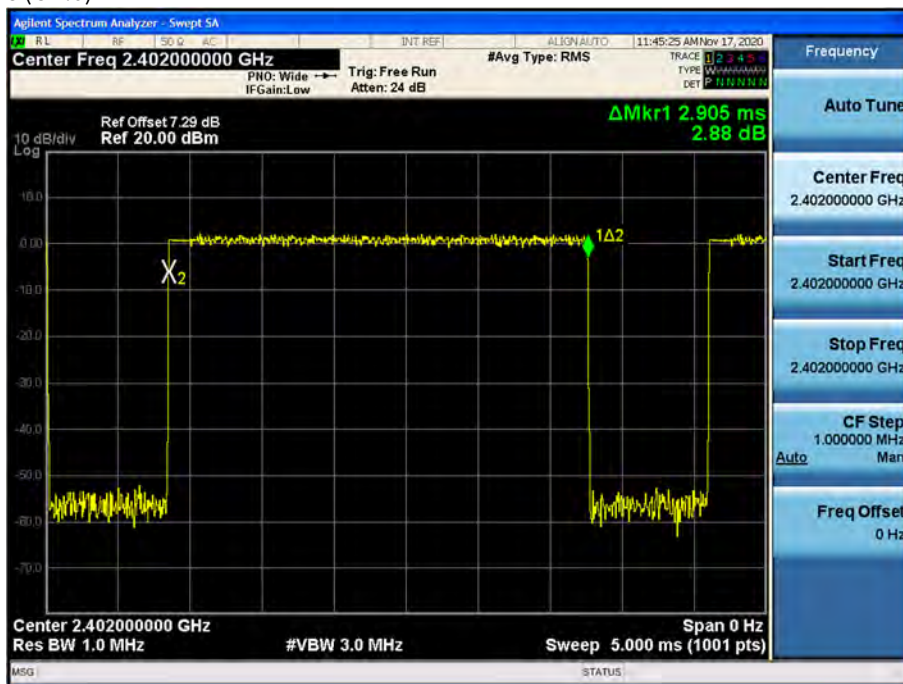


Test Plots (8DPSK)

Dwell Time (CH.39)

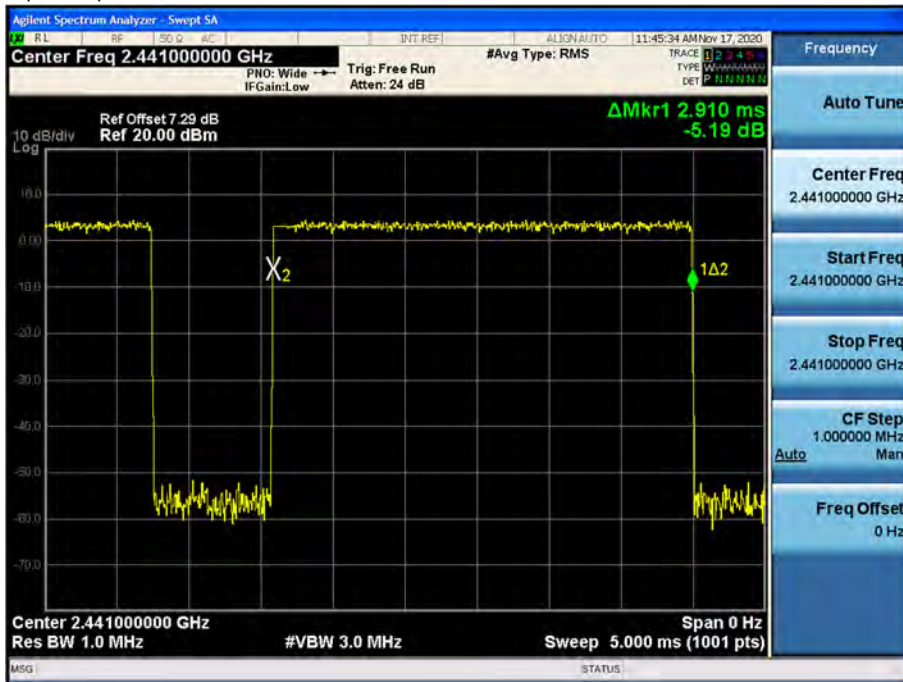


Test Plots (8DPSK)

Dwell Time (CH.78)

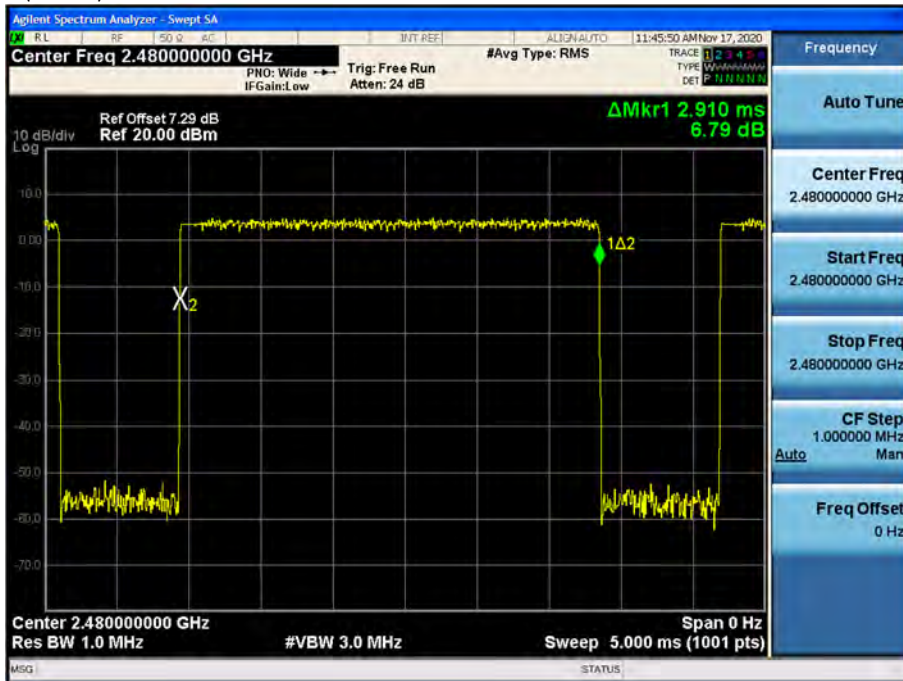


Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.0)

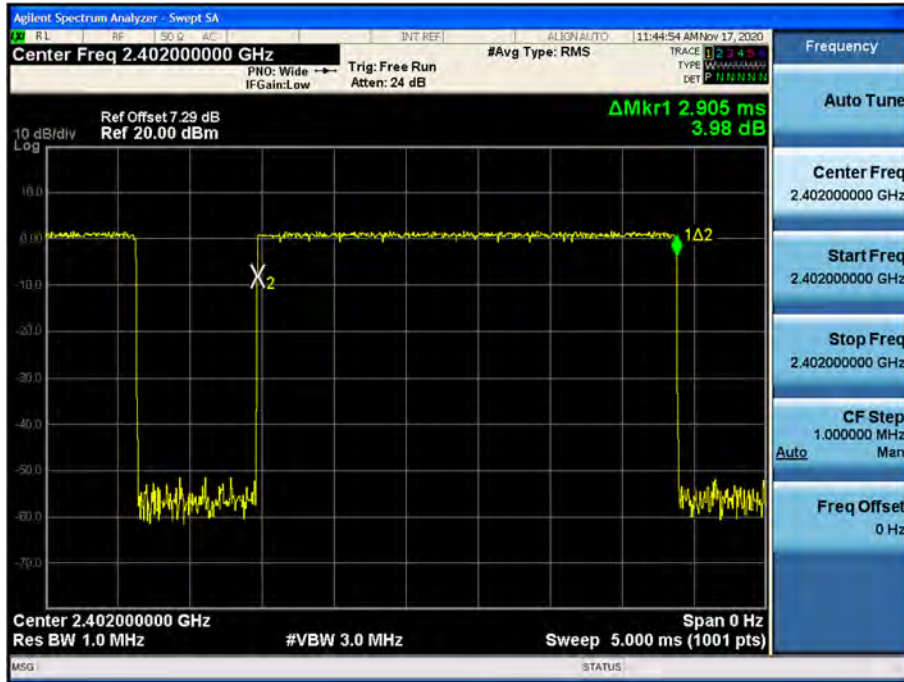


Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.39)

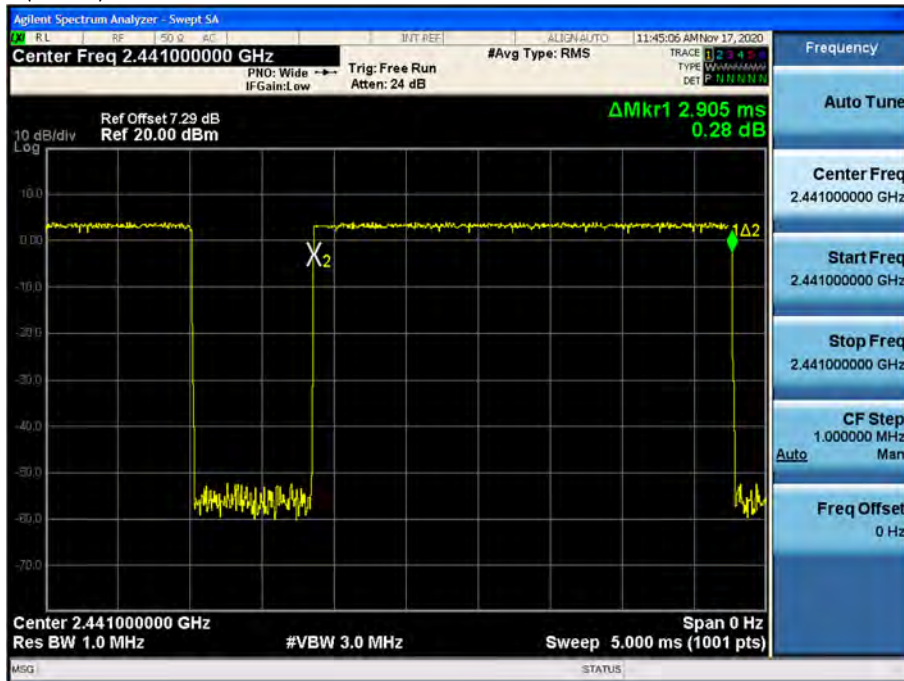

Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.78)

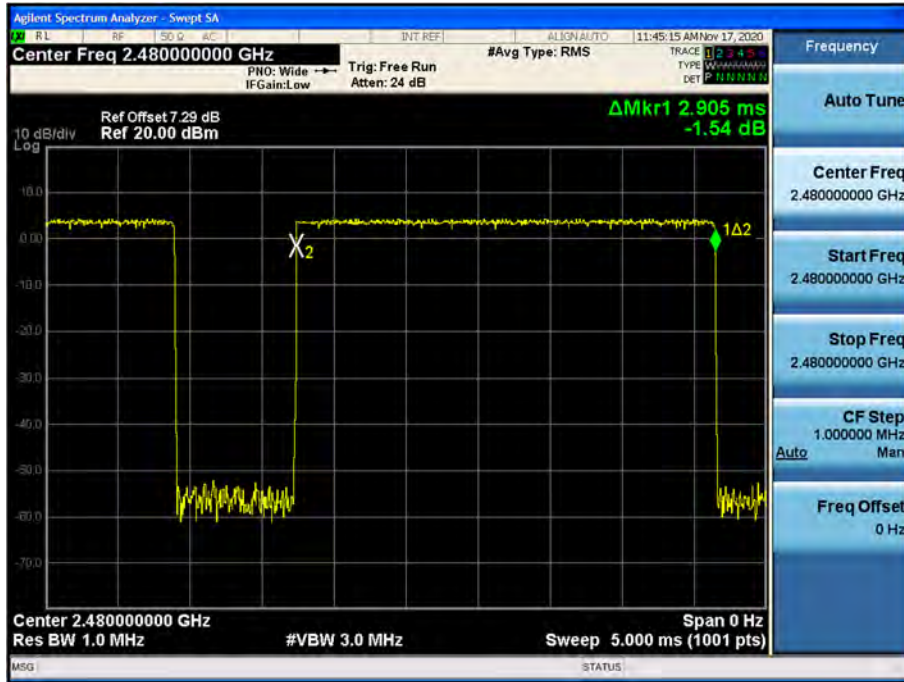

10.6 SPURIOUS EMISSIONS


10.6.1 CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

Test Plots (GPSK)- 30 MHz – 25 GHz

Spurious Emission (CH.78)

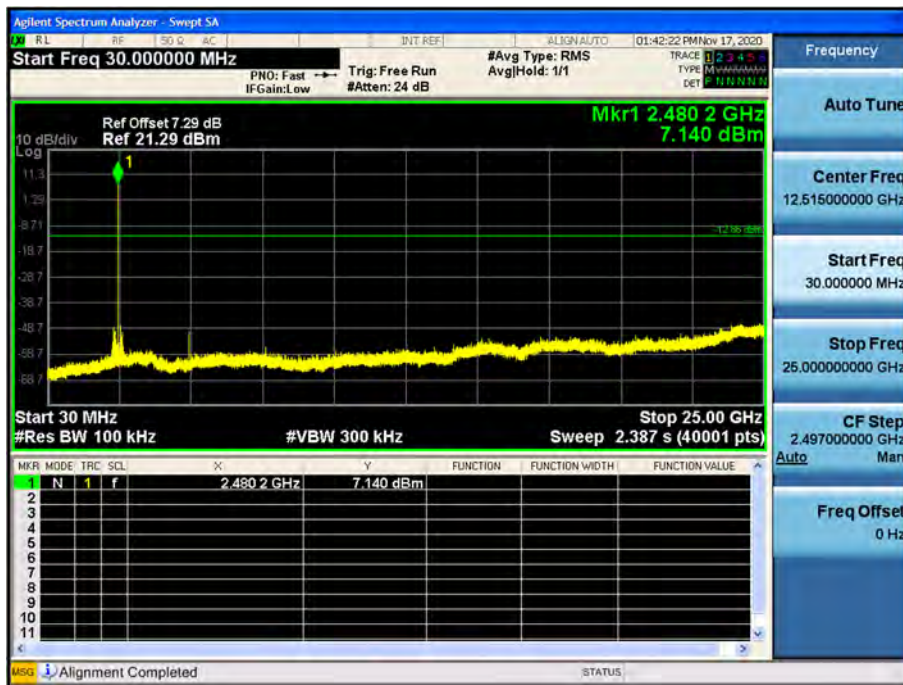

10.6.2 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
2. Radiated test is performed with hopping off.

Frequency Range : Above 1 GHz

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	49.97	2.30	V	0	52.27	73.98	21.71	PK
4804	49.97	2.30	V	-24.70	27.57	53.98	26.41	AV
7206	42.36	12.07	V	0	54.43	73.98	19.55	PK
7206	42.36	12.07	V	-24.70	29.73	53.98	24.25	AV
4804	50.59	2.30	H	0	52.89	73.98	21.09	PK
4804	50.59	2.30	H	-24.70	28.19	53.98	25.79	AV
7206	41.83	12.07	H	0	53.90	73.98	20.08	PK
7206	41.83	12.07	H	-24.70	29.20	53.98	24.78	AV

Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4882	51.66	1.83	V	0	53.49	73.98	20.49	PK
4882	51.66	1.83	V	-24.70	28.79	53.98	25.19	AV
7323	42.85	11.05	V	0	53.90	73.98	20.08	PK
7323	42.85	11.05	V	-24.70	29.20	53.98	24.78	AV
4882	51.79	1.83	H	0	53.62	73.98	20.36	PK
4882	51.79	1.83	H	-24.70	28.92	53.98	25.06	AV
7323	43.16	11.05	H	0	54.21	73.98	19.77	PK
7323	43.16	11.05	H	-24.70	29.51	53.98	24.47	AV

Operation Mode: CH High(GFSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	52.19	2.59	V	0	54.78	73.98	19.20	PK
4960	52.19	2.59	V	-24.70	30.08	53.98	23.90	AV
7440	41.84	11.91	V	0	53.75	73.98	20.23	PK
7440	41.84	11.91	V	-24.70	29.05	53.98	24.93	AV
4960	51.64	2.59	H	0	54.23	73.98	19.75	PK
4960	51.64	2.59	H	-24.70	29.53	53.98	24.45	AV
7440	42.28	11.91	H	0	54.19	73.98	19.79	PK
7440	42.28	11.91	H	-24.70	29.49	53.98	24.49	AV

Operation Mode: CH Low($\pi/4$ DQPSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	48.54	2.30	V	0	50.84	73.98	23.14	PK
4804	48.54	2.30	V	-24.70	26.14	53.98	27.84	AV
7206	38.56	12.07	V	0	50.63	73.98	23.36	PK
7206	38.56	12.07	V	-24.70	25.93	53.98	28.06	AV
4804	48.79	2.30	H	0	51.09	73.98	22.89	PK
4804	48.79	2.30	H	-24.70	26.39	53.98	27.59	AV
7206	39.20	12.07	H	0	51.27	73.98	22.71	PK
7206	39.20	12.07	H	-24.70	26.57	53.98	27.41	AV

 Operation Mode: CH Mid($\pi/4$ DQPSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4882	49.68	1.83	V	0	51.51	73.98	22.47	PK
4882	49.68	1.83	V	-24.70	26.81	53.98	27.17	AV
7323	40.50	11.05	V	0	51.55	73.98	22.43	PK
7323	40.50	11.05	V	-24.70	26.85	53.98	27.13	AV
4882	50.07	1.83	H	0	51.90	73.98	22.08	PK
4882	50.07	1.83	H	-24.70	27.20	53.98	26.78	AV
7323	40.78	11.05	H	0	51.83	73.98	22.15	PK
7323	40.78	11.05	H	-24.70	27.13	53.98	26.85	AV

 Operation Mode: CH High ($\pi/4$ DQPSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	50.25	2.59	V	0	52.84	73.98	21.14	PK
4960	50.25	2.59	V	-24.70	28.14	53.98	25.84	AV
7440	39.57	11.91	V	0	51.48	73.98	22.50	PK
7440	39.57	11.91	V	-24.70	26.78	53.98	27.20	AV
4960	49.29	2.59	H	0	51.88	73.98	22.10	PK
4960	49.29	2.59	H	-24.70	27.18	53.98	26.80	AV
7440	39.11	11.91	H	0	51.02	73.98	22.96	PK
7440	39.11	11.91	H	-24.70	26.32	53.98	27.66	AV

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	48.68	2.30	V	0	50.98	73.98	23.00	PK
4804	48.68	2.30	V	-24.70	26.28	53.98	27.70	AV
7206	39.40	12.07	V	0	51.47	73.98	22.51	PK
7206	39.40	12.07	V	-24.70	26.77	53.98	27.21	AV
4804	49.15	2.30	H	0	51.45	73.98	22.53	PK
4804	49.15	2.30	H	-24.70	26.75	53.98	27.23	AV
7206	39.52	12.07	H	0	51.59	73.98	22.39	PK
7206	39.52	12.07	H	-24.70	26.89	53.98	27.09	AV

Operation Mode: CH Mid(8DPSK)


Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4882	50.20	1.83	V	0	52.03	73.98	21.95	PK
4882	50.20	1.83	V	-24.70	27.33	53.98	26.65	AV
7323	40.77	11.05	V	0	51.82	73.98	22.16	PK
7323	40.77	11.05	V	-24.70	27.12	53.98	26.86	AV
4882	50.35	1.83	H	0	52.18	73.98	21.80	PK
4882	50.35	1.83	H	-24.70	27.48	53.98	26.50	AV
7323	41.03	11.05	H	0	52.08	73.98	21.90	PK
7323	41.03	11.05	H	-24.70	27.38	53.98	26.60	AV

Operation Mode: CH High(8DPSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	50.47	2.59	V	0	53.06	73.98	20.92	PK
4960	50.47	2.59	V	-24.70	28.36	53.98	25.62	AV
7440	39.75	11.91	V	0	51.66	73.98	22.32	PK
7440	39.75	11.91	V	-24.70	26.96	53.98	27.02	AV
4960	50.12	2.59	H	0	52.71	73.98	21.27	PK
4960	50.12	2.59	H	-24.70	28.01	53.98	25.97	AV
7440	39.51	11.91	H	0	51.42	73.98	22.56	PK
7440	39.51	11.91	H	-24.70	26.72	53.98	27.26	AV

RESULT PLOTS

Radiated Spurious Emissions plot – (GFSK, Ch.78 2rd Harmonic, Z-V)

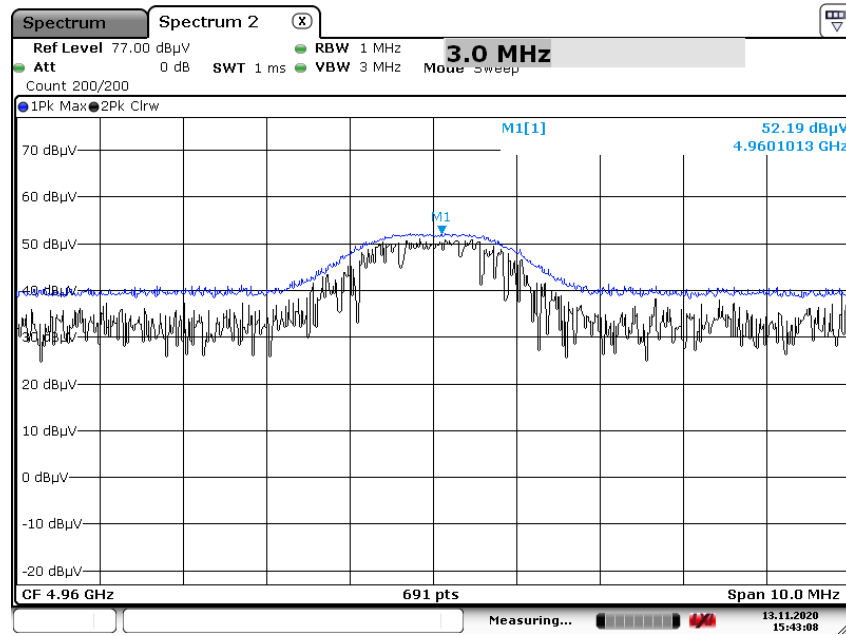

Date: 13.NOV.2020 15:43:08

Note:

Plot of worst case are only reported.

10.6.3 RADIATED RESTRICTED BAND EDGES

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+CL [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect [dB]
2390.0	19.028	34.77	H	0	53.80	73.98	20.18	PK
2390.0	19.028	34.77	H	-24.70	29.10	53.98	24.88	AV
2390.0	18.651	34.77	V	0	53.42	73.98	20.56	PK
2390.0	18.651	34.77	V	-24.70	28.72	53.98	25.26	AV
2483.5	23.400	34.25	H	0	57.65	73.98	16.33	PK
2483.5	23.400	34.25	H	-24.70	32.95	53.98	21.03	AV
2483.5	22.854	34.25	V	0	57.10	73.98	16.88	PK
2483.5	22.854	34.25	V	-24.70	32.40	53.98	21.58	AV

Operation Mode	EDR(π /4DQPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+CL [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect [dB]
2390.0	19.266	34.77	H	0	54.04	73.98	19.94	PK
2390.0	19.266	34.77	H	-24.70	29.33	53.98	24.65	AV
2390.0	18.648	34.77	V	0	53.42	73.98	20.56	PK
2390.0	18.648	34.77	V	-24.70	28.72	53.98	25.26	AV
2483.5	28.335	34.25	H	0	62.59	73.98	11.40	PK
2483.5	28.335	34.25	H	-24.70	37.88	53.98	16.10	AV
2483.5	27.610	34.25	V	0	61.86	73.98	12.12	PK
2483.5	27.610	34.25	V	-24.70	37.16	53.98	16.82	AV

Operation Mode	EDR(8DPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+CL [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect [dB]
2390.0	19.541	34.77	H	0	54.31	73.98	19.67	PK
2390.0	19.541	34.77	H	-24.70	29.61	53.98	24.37	AV
2390.0	18.694	34.77	V	0	53.46	73.98	20.52	PK
2390.0	18.694	34.77	V	-24.70	28.76	53.98	25.22	AV
2483.5	29.792	34.25	H	0	64.04	73.98	9.94	PK
2483.5	29.792	34.25	H	-24.70	39.34	53.98	14.64	AV
2483.5	28.142	34.25	V	0	62.39	73.98	11.59	PK
2483.5	28.142	34.25	V	-24.70	37.69	53.98	16.29	AV

IMD
Test Note:


- Worst Channel : Ch 78
- Worst Mode : Normal(GFSK)

Operation Mode	Normal(GFSK)
Operating Frequency	2480 MHz
Channel No	CH 78 _ IMD

Frequency [MHz]	Reading dBuV	※ A.F.+CL [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect [dB]
2310~2390	22.110	34.77	H	0	56.88	73.98	17.10	PK
2310~2390	22.110	34.77	H	-24.70	32.18	53.98	21.80	AV

RESULT PLOTS

Radiated Restricted Band Edges plot - (8DPSK, Ch.78, X-H)

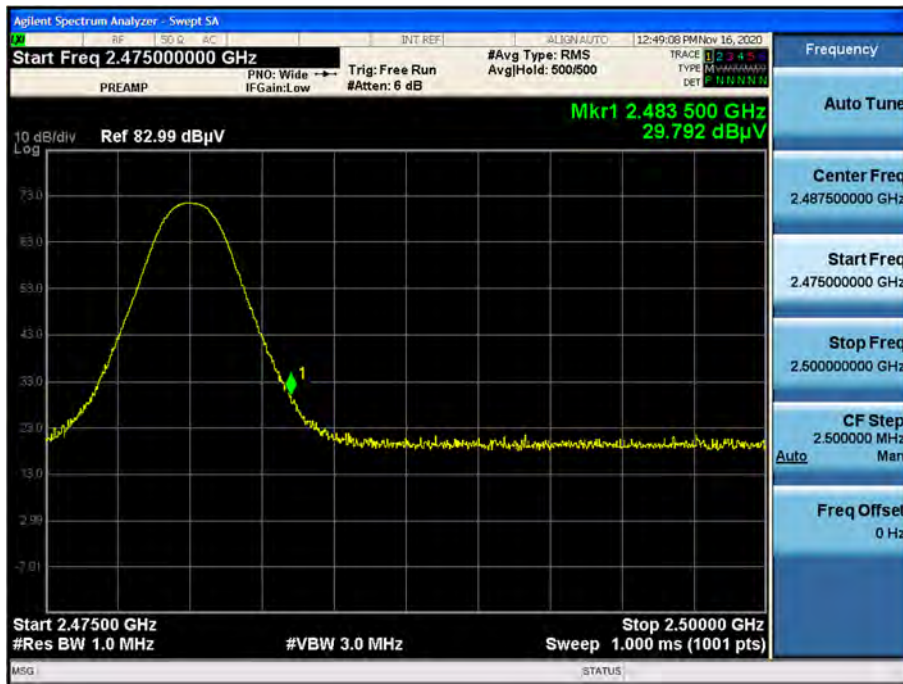

Note:

Plot of worst case are only reported.

10.7 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

10.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

BT MODE L1


1 / 2

HCT TEST Report

Common Information

EUT: BTM530A
 Manufacturer: SEONG JI INDUSTRIAL CO.,LTD
 Test Site: SHIELD ROOM
 Operating Conditions: BT MODE L1

FCC CLASS B

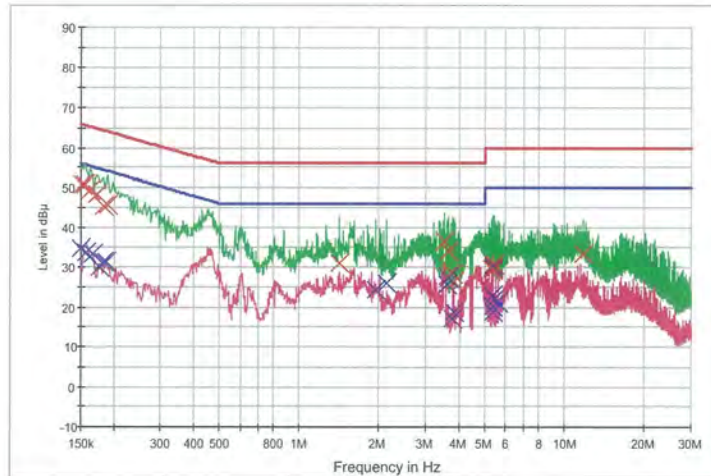

— FCC CLASS B_OP
 — FCC CLASS B_AV
 — Preview Result 1-PK+
— Preview Result 2-AVG
 — Final Result 1-QPK
 — Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.152000	50.7	9.000	On	L1	9.8	15.2	65.9
0.156000	50.8	9.000	On	L1	9.8	14.9	65.7
0.162000	49.3	9.000	On	L1	9.8	16.0	65.4
0.172000	48.2	9.000	On	L1	9.8	16.6	64.9
0.184000	45.4	9.000	On	L1	9.8	18.9	64.3
0.190000	45.7	9.000	On	L1	9.8	18.4	64.0
1.412000	30.9	9.000	On	L1	9.8	25.1	56.0
3.544000	36.6	9.000	On	L1	9.8	19.4	56.0
3.592000	27.8	9.000	On	L1	9.8	28.2	56.0
3.642000	33.9	9.000	On	L1	9.8	22.1	56.0
3.786000	28.3	9.000	On	L1	9.8	27.7	56.0
3.834000	26.2	9.000	On	L1	9.8	29.8	56.0
5.336000	29.7	9.000	On	L1	9.9	30.3	60.0
5.346000	29.5	9.000	On	L1	9.9	30.5	60.0
5.370000	29.4	9.000	On	L1	9.9	30.6	60.0
5.390000	30.6	9.000	On	L1	9.9	29.4	60.0
5.438000	30.7	9.000	On	L1	9.9	29.3	60.0
11.832000	33.3	9.000	On	L1	10.0	26.7	60.0

2020-11-19

오전 10:17:42

BT MODE L1

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	34.7	9.000	On	L1	9.8	21.3	56.0
0.158000	33.6	9.000	On	L1	9.8	22.0	55.6
0.166000	33.5	9.000	On	L1	9.8	21.7	55.2
0.176000	30.1	9.000	On	L1	9.8	24.6	54.7
0.184000	31.4	9.000	On	L1	9.8	22.9	54.3
0.188000	31.3	9.000	On	L1	9.8	22.8	54.1
1.952000	24.4	9.000	On	L1	9.8	21.6	46.0
2.134000	26.0	9.000	On	L1	9.8	20.0	46.0
3.592000	25.5	9.000	On	L1	9.8	20.5	46.0
3.642000	27.3	9.000	On	L1	9.8	18.7	46.0
3.786000	17.1	9.000	On	L1	9.8	28.9	46.0
3.834000	18.8	9.000	On	L1	9.8	27.2	46.0
5.348000	20.2	9.000	On	L1	9.9	29.8	50.0
5.362000	30.3	9.000	On	L1	9.9	19.7	50.0
5.370000	18.9	9.000	On	L1	9.9	31.1	50.0
5.390000	22.7	9.000	On	L1	9.9	27.3	50.0
5.438000	21.7	9.000	On	L1	9.9	28.3	50.0
5.632000	21.3	9.000	On	L1	9.9	28.7	50.0

2020-11-19

오전 10:17:42

Conducted Emissions (Line 2)

BT MODE N


1 / 2

HCT TEST Report

Common Information

EUT: BTM530A
 Manufacturer: SEONG JI INDUSTRIAL CO.,LTD
 Test Site: SHIELD ROOM
 Operating Conditions: BT MODE N

FCC CLASS B

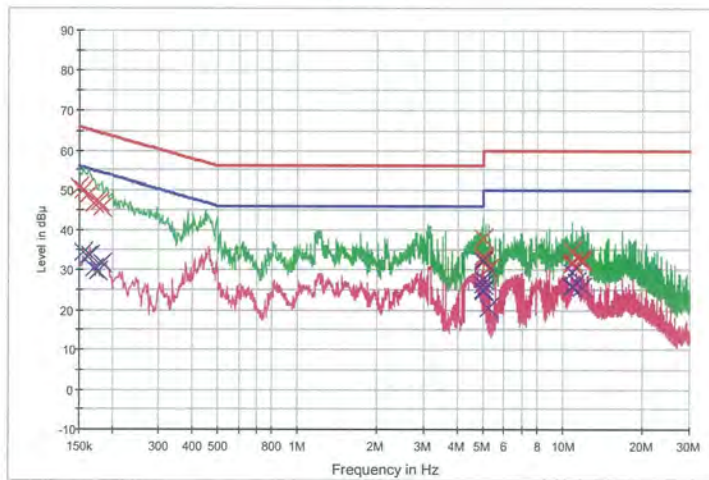

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG X Final Result 1-QPK X Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	50.7	9.000	On	N	9.7	15.3	66.0
0.156000	49.9	9.000	On	N	9.7	15.8	65.7
0.162000	49.1	9.000	On	N	9.7	16.2	65.4
0.170000	46.5	9.000	On	N	9.7	18.5	65.0
0.178000	46.8	9.000	On	N	9.7	17.8	64.6
0.184000	45.4	9.000	On	N	9.7	18.9	64.3
5.000000	32.7	9.000	On	N	9.8	27.3	60.0
5.010000	37.8	9.000	On	N	9.8	22.2	60.0
5.016000	33.3	9.000	On	N	9.8	26.7	60.0
5.024000	31.9	9.000	On	N	9.8	28.1	60.0
5.028000	32.8	9.000	On	N	9.8	27.2	60.0
5.032000	32.0	9.000	On	N	9.8	28.0	60.0
5.236000	30.3	9.000	On	N	9.8	29.7	60.0
10.814000	34.8	9.000	On	N	9.9	25.2	60.0
10.834000	31.3	9.000	On	N	9.9	28.7	60.0
10.844000	31.9	9.000	On	N	9.9	28.1	60.0
11.796000	32.2	9.000	On	N	10.0	27.8	60.0
11.822000	32.9	9.000	On	N	10.0	27.1	60.0

2020-11-19

오전 10:03:56

BT MODE N

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.156000	34.4	9.000	On	N	9.7	21.3	55.7
0.160000	33.2	9.000	On	N	9.7	22.2	55.5
0.164000	33.7	9.000	On	N	9.7	21.5	55.3
0.170000	30.4	9.000	On	N	9.7	24.5	55.0
0.176000	29.7	9.000	On	N	9.7	25.0	54.7
0.184000	31.7	9.000	On	N	9.7	22.6	54.3
5.006000	26.3	9.000	On	N	9.8	23.7	50.0
5.006000	26.2	9.000	On	N	9.8	23.8	50.0
5.010000	24.9	9.000	On	N	9.8	25.1	50.0
5.016000	24.6	9.000	On	N	9.8	25.4	50.0
5.022000	32.5	9.000	On	N	9.8	17.5	50.0
5.028000	27.6	9.000	On	N	9.8	22.4	50.0
5.236000	20.5	9.000	On	N	9.8	29.5	50.0
10.812000	25.9	9.000	On	N	9.9	24.1	50.0
10.834000	25.5	9.000	On	N	9.9	24.5	50.0
10.844000	29.2	9.000	On	N	9.9	20.8	50.0
11.272000	27.0	9.000	On	N	10.0	23.0	50.0
11.796000	25.5	9.000	On	N	10.0	24.5	50.0

2020-11-19

오전 10:03:56

11. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/04/2020	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/10/2020	Annual	100584
ESPAC	SU-642 / Temperature Chamber	03/18/2020	Annual	0093008124
Agilent	N9030A / Signal Analyzer	01/13/2020	Annual	MY49431210
Rohde & Schwarz	OSP 120 / Power Measurement Set	07/02/2020	Annual	101231
Agilent	N1911A / Power Meter	04/07/2020	Annual	MY45100523
Keysight	N1921A / Power Sensor	06/08/2020	Annual	MY57820067
Agilent	87300B / Directional Coupler	11/10/2020	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/25/2020	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/12/2020	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	06/26/2020	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/12/2020	Annual	100422

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	05/18/2020	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	03/22/2019	Biennial	760
Schwarzbeck	BBHA 9120D / Horn Antenna	04/29/2019	Biennial	9120D-937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	11/29/2019	Biennial	BBHA9170541
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	07/28/2020	Annual	102168
Agilent	N9030A / Signal Analyzer	01/13/2020	Annual	MY49431210
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/21/2020	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/10/2020	Annual	1
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	03/02/2020	Annual	8
Wainwright Instruments	WHKX8-6090-7000-18000-40SS/ High Pass Filter	03/02/2020	Annual	25
Api tech.	18B-03 / Attenuator (3 dB)	03/02/2020	Annual	1
Agilent	8493C-10 / Attenuator(10 dB)	03/02/2020	Annual	08285
CERNEX	CBLU1183540 / Power Amplifier	03/02/2020	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	03/02/2020	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	12/26/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2020	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/18/2020	Annual	3000C000276

Note:
Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

12. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2011-FI024-P