

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-206-RWD-001
AGR No. : A204A-242
Applicant : SEONG JI INDUSTRIAL CO., LTD
Address : 54-33, Dongtanhana 1-gil, Gyeonggi-do, Hwaseong-si, South Korea
Manufacturer : SEONG JI INDUSTRIAL CO., LTD
Address : 54-33, Dongtanhana 1-gil, Gyeonggi-do, Hwaseong-si, South Korea
Type of Equipment : Asset Tracker
FCC ID. : 2AS8LIET10MO
Model Name : IET10MO
Multiple Model Name : N/A
Serial number : N/A
Total page of Report : 23 pages (including this page)
Date of Incoming : May 20, 2020
Date of issue : June 01, 2020


SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*
This test report only contains the result of a single test of the sample supplied for the examination.
It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:


Tae-Ho, Kim / Senior Manager
ONETECH Corp.

Approved by:


Ki-Hong, Nam / Chief Engineer
ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY.....	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	7
4. EUT MODIFICATIONS.....	8
5. SYSTEM TEST CONFIGURATION.....	9
5.1 JUSTIFICATION.....	9
5.2 PERIPHERAL EQUIPMENT	9
5.3 MODE OF OPERATION DURING THE TEST	9
5.4 CONFIGURATION OF TEST SYSTEM.....	14
5.5 ANTENNA REQUIREMENT	14
6. PRELIMINARY TEST	14
6.1 GENERAL RADIATED EMISSIONS TESTS	14
7. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	15
7.1 OPERATING ENVIRONMENT	15
7.2 TEST SET-UP FOR CONDUCTED / RADIATED MEASUREMENT	15
7.3 TEST EQUIPMENT USED.....	16
7.5 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION	17
7.5.1 Spurious & Harmonic Radiated Emission above 1 GHz.....	17
8. RADIATED EMISSION TEST	21
8.1 OPERATING ENVIRONMENT	21
8.2 TEST SET-UP	21
8.3 TEST EQUIPMENT USED.....	21
8.4 TEST DATA.....	22

8.4.1 Test data for 30 MHz ~ 1 000 MHz.....22
8.4.2 Test data for Below 30 MHz.....23
8.4.3 Test data for above 1 GHz.....23

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-206-RWD-001	June 01, 2020	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : SEONG JI INDUSTRIAL CO., LTD
 Address : 54-33, Dongtanhana 1-gil, Gyeonggi-do, Hwaseong-si, South Korea
 Manufacturer : SEONG JI INDUSTRIAL CO., LTD
 Address : 54-33, Dongtanhana 1-gil, Gyeonggi-do, Hwaseong-si, South Korea
 Contact Person : Sangyoung, Lee / Senior researcher
 Telephone No. : +82-70-7837-2853
 FCC ID : 2AS8LIET10MO
 Model Name : IET10MO
 Brand Name : -
 Serial Number : N/A
 Date : June 01, 2020

EQUIPMENT CLASS	DSS – PART 15 SPREAD SPECTRUM TRANSMITTER
E.U.T. DESCRIPTION	Asset Tracker
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247(a)(1)(i)	20 dB Bandwidth	N/A (See Note)
15.247(b)(2)	Conducted Maximum Peak Output Power	N/A (See Note)
15.247(a)(1)	Carrier Frequency Separation	N/A (See Note)
15.247(a)(1)(i)	Number of Hopping Frequencies	N/A (See Note)
15.247(a)(1)(i)	Time of Occupancy	N/A (See Note)
15.247(d)	Conducted Spurious Emissions	N/A (See Note)
15.247(d)	Band Edge(Out of Band Emissions)	N/A (See Note)
15.207(a)	AC Power line Conducted Emissions	N/A (See Note)
15.247(d), 15.205, 15.209	Radiated Spurious Emissions	Met the Limit / PASS
15.247(d), 15.205, 15.209	Radiated Restricted Band Edge	Met the Limit / PASS

Note: The EUT have a RF Test already approved. (Model: SRM200A / FCC ID: 2AS8LSRM200A)

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

It should not be reproduced except in full, without the written approval of ONETECH Corp.

EMC-003 (Rev.2)

3. GENERAL INFORMATION

3.1 Product Description

The SEONG JI INDUSTRIAL CO., LTD, Model IET10MO (referred to as the EUT in this report) is a Asset Tracker. The product specification described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	Asset Tracker			
Temperature Range	-30 °C ~ 60 °C			
OPERATING FREQUENCY	Sig Fox	902.137 5 MHz ~ 904.662 5 MHz (RC2) 920.737 5 MHz ~ 923.262 5 MHz (RC4)		
	Bluetooth LE	2 402 MHz ~ 2 480 MHz		
	WLAN 2.4 GHz	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))		
MODULATION TYPE	Sig Fox	DBPSK		
	Bluetooth LE	GFSK		
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK) 802.11g/n(HT20): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)		
RF OUTPUT POWER	Sig Fox	25.364 dBm		
	Bluetooth LE	Peak	3.68 dBm	
		Average	3.60 dBm	
	WLAN 2.4 GHz	Peak	17.38 dBm(802.11b) 20.05 dBm(802.11g) 19.91 dBm(802.11n_HT20)	
			Average	11.55 dBm(802.11b) 12.17 dBm(802.11g) 12.09 dBm(802.11n_HT20)
		ANTENNA TYPE		
ANTENNA GAIN			Sig Fox: 2.50 dBi Bluetooth LE: 2.50 dBi WLAN 2.4 GHz: 2.50 dBi	
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)			32.768 kHz, 26 MHz, 32 MHz	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	SEONG JI INDUSTRIAL CO., LTD	IET10MO Rev0.9b	N/A
Module	SEONG JI INDUSTRIAL CO., LTD	SRM200A	2AS8LSRM200A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
IET10MO	SEONG JI INDUSTRIAL CO., LTD	Asset Tracker(EUT)	-
nRF52840-Preview-DK	NORDIC SEMICONDUCTOR	Jig Board	EUT
T10 DL Board V3	N/A	Jig Board	EUT
HP Probook	HP	Notebook PC	-
PPP009C	LIE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	AC Adapter	-

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at RC 2 is 902.137 5 MHz, 903.412 5 MHz, 904.662 5 MHz and RC 4 is 920.737 5 MHz, 922.012 5 MHz, 923.262 5 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XZ” axis, but the worst data was recorded in this report.

- Channel List(Sig Fox_RC2)

Channel	Frequency[MHz]	Channel	Frequency[MHz]	Channel	Frequency[MHz]
1	902.137 5	19	903.037 5	37	903.937 5
2	902.162 5	20	903.062 5	38	903.962 5
3	902.187 5	21	903.087 5	39	903.987 5
4	902.212 5	22	903.112 5	40	904.012 5
5	902.237 5	23	903.137 5	41	904.037 5
6	902.262 5	24	903.162 5	42	904.062 5
7	902.437 5	25	903.337 5	43	904.237 5
8	902.462 5	26	903.362 5	44	904.262 5
9	902.487 5	27	903.387 5	45	904.287 5
10	902.512 5	28	903.412 5	46	904.312 5
11	902.537 5	29	903.437 5	47	904.337 5
12	902.562 5	30	903.462 5	48	904.362 5
13	902.737 5	31	903.637 5	49	904.537 5
14	902.762 5	32	903.662 5	50	904.562 5
15	902.787 5	33	903.687 5	51	904.587 5
16	902.812 5	34	903.712 5	52	904.612 5
17	902.837 5	35	903.737 5	53	904.637 5
18	902.862 5	36	903.762 5	54	904.662 5

- Channel List(Sig Fox_RC4)

Channel	Frequency[MHz]	Channel	Frequency[MHz]	Channel	Frequency[MHz]
1	920.737 5	19	921.637 5	37	922.537 5
2	920.762 5	20	921.662 5	38	922.562 5
3	920.787 5	21	921.687 5	39	922.587 5
4	920.812 5	22	921.712 5	40	922.612 5
5	920.837 5	23	921.737 5	41	922.637 5
6	920.862 5	24	921.762 5	42	922.662 5
7	921.037 5	25	921.937 5	43	922.837 5
8	921.062 5	26	921.962 5	44	922.862 5
9	921.087 5	27	921.987 5	45	922.887 5
10	921.112 5	28	922.012 5	46	922.912 5
11	921.137 5	29	922.037 5	47	922.937 5
12	921.162 5	30	922.062 5	48	922.962 5
13	921.337 5	31	922.237 5	49	923.137 5
14	921.362 5	32	922.262 5	50	923.162 5
15	921.387 5	33	922.287 5	51	923.187 5
16	921.412 5	34	922.312 5	52	923.212 5
17	921.437 5	35	922.337 5	53	923.237 5
18	921.462 5	36	922.362 5	54	923.262 5


- Duty Cycle

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Sig Fox [RC2]	-	-	100.00	-
Sig Fox [RC4]	-	-	100.00	-


Note – Duty Cycle : $(Tx\ On\ Time / (Tx\ On\ Time + Tx\ Off\ Time)) * 100$

Correction Factor : $10 * \log(1 / (Duty\ Cycle / 100))$

-. Test Plot

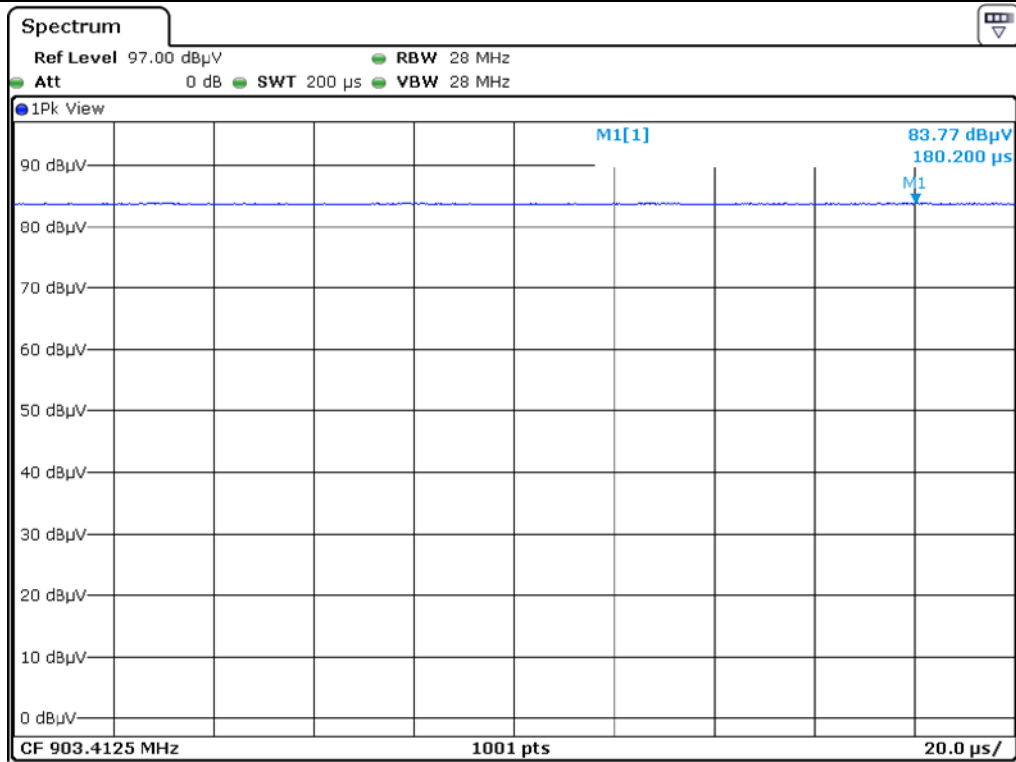

Sig Fox [RC2]

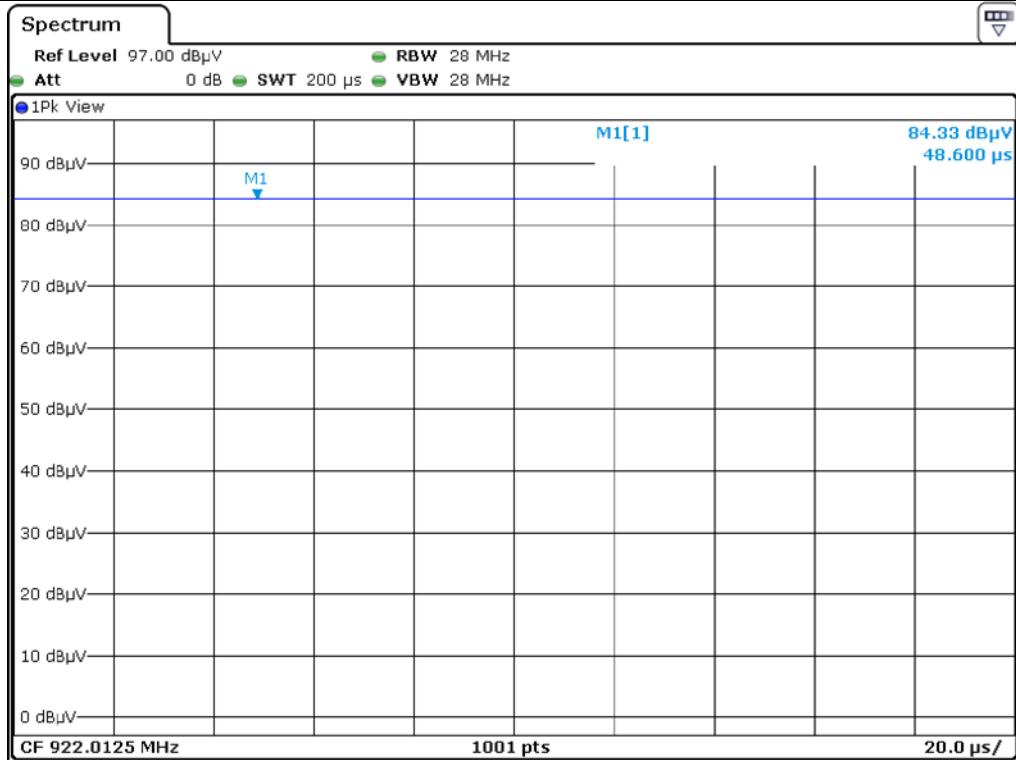

Sig Fox [RC4]

5.4 Configuration of Test System

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is Metal Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

7. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND


7.1 Operating environment

Temperature : 24.3 °C
 Relative humidity : 43.9 % R.H.

7.2 Test set-up for conducted / radiated measurement


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

- Conducted Configuration

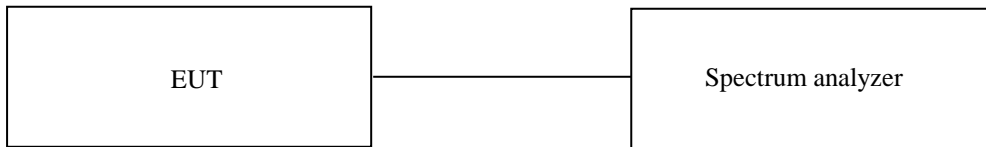


- Radiated Configuration


1. Below 30 MHz

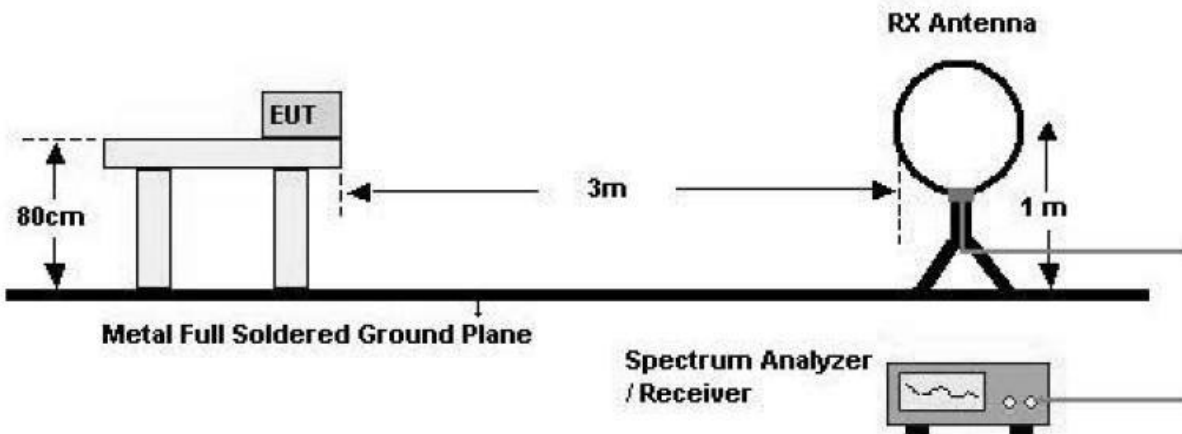

2. 30 MHz - 1 GHz

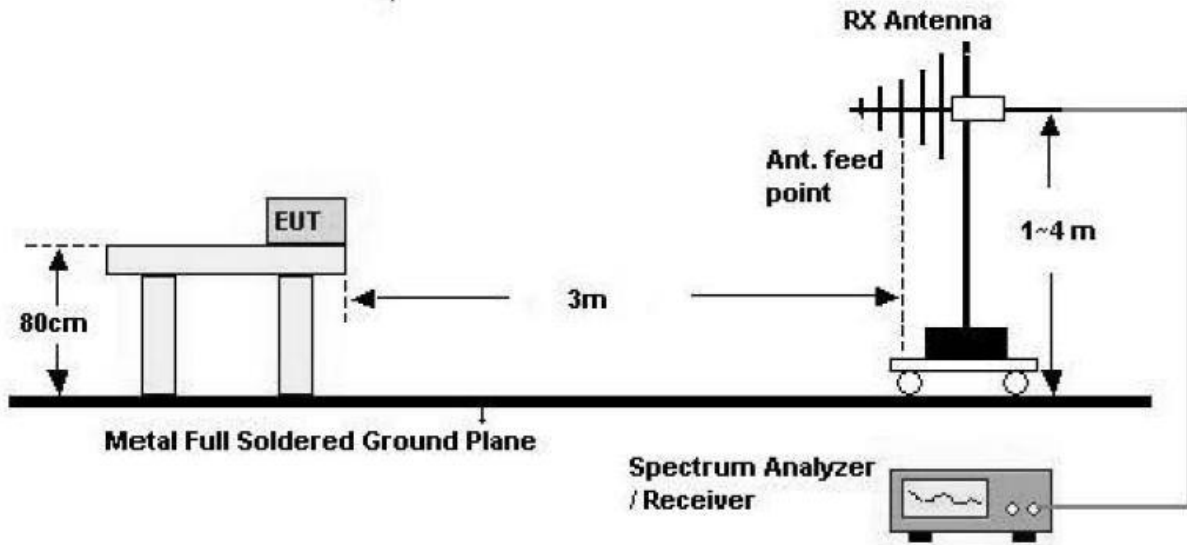

3. Above 1 GHz

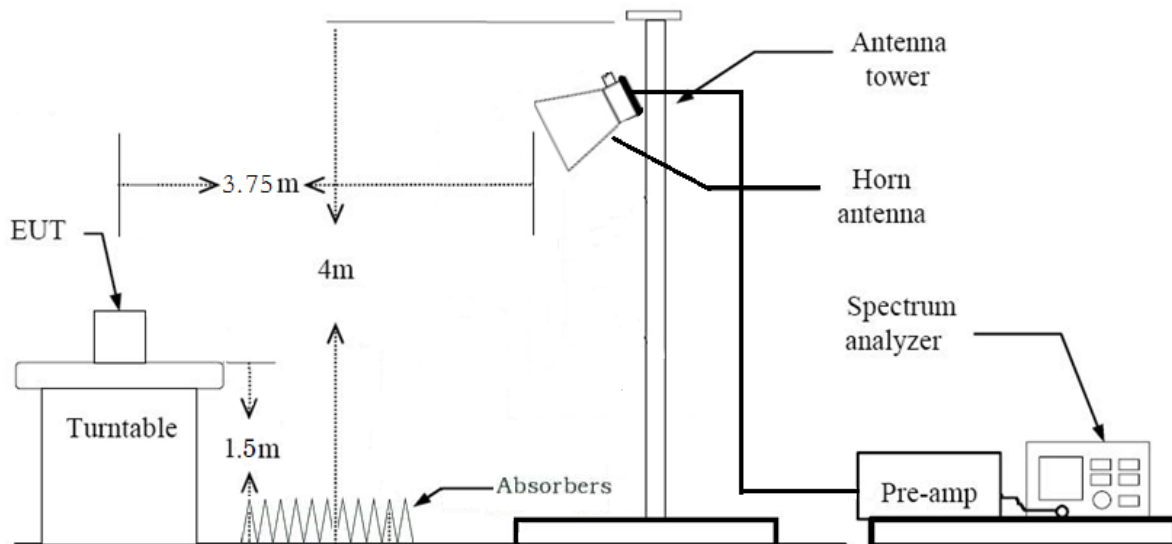

7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Feb. 21, 2020 (1Y)
■ - ESW	Rohde & Schwarz	EMI Test Receiver	101851	Aug. 07, 2019 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Mar. 16, 2020 (1Y)
■ - BBV 9718B	Schwarzbeck	Broadband Preamplifier	00009	Mar. 16, 2020 (1Y)
■ - SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Feb. 20, 2020 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	777	Apr. 08, 2020 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	9120D-1366	Jul. 16, 2019 (1Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 07, 2020 (1Y)

All test equipment used is calibrated on a regular basis.

It should not be reproduced except in full, without the written approval of ONETECH Corp.

EMC-003 (Rev.2)

7.5 Test data for Transmitting mode radiated emission

7.5.1 Spurious & Harmonic Radiated Emission above 1 GHz

7.5.1.1 Test data for RC2

- Test Date : May 21, 2020 ~ May 25, 2020
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak Mode(Peak Detector), 3 MHz for Average Mode(RMS Detector)
- Frequency range : 1 GHz ~ 10.0 GHz
- Measurement distance : 3 m
- Duty Cycle : 100 %
- Result : PASSED

Channel	Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Correction Factor (dB)	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Low	1 804.275	17.22	Peak	H	27.90	9.10	-	54.22	68.20	13.98
	1 804.275	16.87	Peak	V	27.90	9.10	-	53.87	68.20	14.33
	2 706.413	16.70	Peak	H	28.00	9.54	-	54.24	74.00	19.76
	2 706.413	9.61	Average	H	28.00	9.54	-	47.15	54.00	6.85
	2 706.413	15.16	Peak	V	28.00	9.54	-	52.70	74.00	21.30
	2 706.413	7.40	Average	V	28.00	9.54	-	44.94	54.00	9.06
	3 608.550	15.96	Peak	H	28.56	10.03	-	54.55	74.00	19.45
	3 608.550	6.50	Average	H	28.56	10.03	-	45.09	54.00	8.91
	3 608.550	17.42	Peak	V	28.56	10.03	-	56.01	74.00	17.99
	3 608.550	8.46	Average	V	28.56	10.03	-	47.05	54.00	6.95
Middle	1 806.825	16.89	Peak	H	27.90	9.10	-	53.89	68.20	14.31
	1 806.825	16.34	Peak	V	27.90	9.10	-	53.34	68.20	14.86
	2 710.238	17.22	Peak	H	28.00	9.54	-	54.76	74.00	19.24
	2 710.238	8.43	Average	H	28.00	9.54	-	45.97	54.00	8.03
	2 710.238	15.26	Peak	V	28.00	9.54	-	52.80	74.00	21.20
	2 710.238	6.41	Average	V	28.00	9.54	-	43.95	54.00	10.05
	3 613.650	15.38	Peak	H	28.56	10.03	-	53.97	74.00	20.03
	3 613.650	8.69	Average	H	28.56	10.03	-	47.28	54.00	6.72
	3 613.650	15.44	Peak	V	28.56	10.03	-	54.03	74.00	19.97
	3 613.650	8.70	Average	V	28.56	10.03	-	47.29	54.00	6.71

High	1 809.325	17.13	Peak	H	27.90	9.10	-	54.13	68.20	14.07
	1 809.325	16.94	Peak	V	27.90	9.10	-	53.94	68.20	14.26
	2 713.988	16.39	Peak	H	28.00	9.54	-	53.93	74.00	20.07
	2 713.988	8.60	Average	H	28.00	9.54	-	46.14	54.00	7.86
	2 713.988	15.26	Peak	V	28.00	9.54	-	52.80	74.00	21.20
	2 713.988	5.76	Average	V	28.00	9.54	-	43.30	54.00	10.70
	3 618.650	18.01	Peak	H	28.56	10.03	-	56.60	74.00	17.40
	3 618.650	8.40	Average	H	28.56	10.03	-	46.99	54.00	7.01
	3 618.650	17.26	Peak	V	28.56	10.03	-	55.85	74.00	18.15
	3 618.650	8.06	Average	V	28.56	10.03	-	46.65	54.00	7.35

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Hyung-Kwon, Oh / Assistant Manager

7.5.1.2 Test data for RC4

- Test Date : May 21, 2020 ~ May 25, 2020
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak Mode(Peak Detector), 3 MHz for Average Mode(RMS Detector)
- Frequency range : 1 GHz ~ 10.0 GHz
- Measurement distance : 3 m
- Duty Cycle : 100 %
- Result : PASSED

Channel	Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Correction Factor (dB)	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Low	1 841.475	16.26	Peak	H	27.90	9.10	-	53.26	68.20	14.94
	1 841.475	16.02	Peak	V	27.90	9.10	-	53.02	68.20	15.18
	2 762.213	15.44	Peak	H	28.00	9.54	-	52.98	74.00	21.02
	2 762.213	5.76	Average	H	28.00	9.54	-	43.30	54.00	10.70
	2 762.213	14.36	Peak	V	28.00	9.54	-	51.90	74.00	22.10
	2 762.213	6.50	Average	V	28.00	9.54	-	44.04	54.00	9.96
	3 682.950	16.01	Peak	H	28.56	10.03	-	54.60	74.00	19.40
	3 682.950	7.28	Average	H	28.56	10.03	-	45.87	54.00	8.13
	3 682.950	17.18	Peak	V	28.56	10.03	-	55.77	74.00	18.23
	3 682.950	8.11	Average	V	28.56	10.03	-	46.70	54.00	7.30
Middle	1 844.025	15.79	Peak	H	27.90	9.10	-	52.79	68.20	15.41
	1 844.025	15.38	Peak	V	27.90	9.10	-	52.38	68.20	15.82
	2 766.038	15.52	Peak	H	28.00	9.54	-	53.06	74.00	20.94
	2 766.038	5.60	Average	H	28.00	9.54	-	43.14	54.00	10.86
	2 766.038	14.12	Peak	V	28.00	9.54	-	51.66	74.00	22.34
	2 766.038	6.36	Average	V	28.00	9.54	-	43.90	54.00	10.10
	3 688.050	15.87	Peak	H	28.56	10.03	-	54.46	74.00	19.54
	3 688.050	7.04	Average	H	28.56	10.03	-	45.63	54.00	8.37
	3 688.050	17.22	Peak	V	28.56	10.03	-	55.81	74.00	18.19
	3 688.050	8.20	Average	V	28.56	10.03	-	46.79	54.00	7.21

High	1 846.525	16.22	Peak	H	27.90	9.10	-	53.22	68.20	14.98
	1 846.525	16.59	Peak	V	27.90	9.10	-	53.59	68.20	14.61
	2 769.788	15.40	Peak	H	28.00	9.54	-	52.94	74.00	21.06
	2 769.788	5.38	Average	H	28.00	9.54	-	42.92	54.00	11.08
	2 769.788	14.22	Peak	V	28.00	9.54	-	51.76	74.00	22.24
	2 769.788	6.76	Average	V	28.00	9.54	-	44.30	54.00	9.70
	3 693.050	16.24	Peak	H	28.56	10.03	-	54.83	74.00	19.17
	3 693.050	7.68	Average	H	28.56	10.03	-	46.27	54.00	7.73
	3 693.050	16.84	Peak	V	28.56	10.03	-	55.43	74.00	18.57
	3 693.050	7.22	Average	V	28.56	10.03	-	45.81	54.00	8.19

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Hyung-Kwon, Oh / Assistant Manager

8. RADIATED EMISSION TEST

8.1 Operating environment

Temperature : 24 °C
 Relative humidity : 43 % R.H.

8.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 9 kHz to 10.0 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Feb. 21, 2020 (1Y)
■ - ESW	Rohde & Schwarz	EMI Test Receiver	101851	Aug. 07, 2019 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Mar. 16, 2020 (1Y)
■ - BBV 9718B	Schwarzbeck	Broadband Preamplifier	00009	Mar. 16, 2020 (1Y)
■ - SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Feb. 20, 2020 (1Y)
■ - SCU18	Rohde & Schwarz	Signal Conditioning unit	102266	Jul. 24, 2019 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	777	Apr. 08, 2020 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	9120D-1366	Jul. 16, 2019 (1Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 07, 2020 (1Y)


All test equipment used is calibrated on a regular basis.

8.4 Test data

8.4.1 Test data for 30 MHz ~ 1 000 MHz

- Test Date : May 21, 2020 ~ May 25, 2020
- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 000 MHz
- Measurement distance : 3 m

Operating mode : Transmitting mode

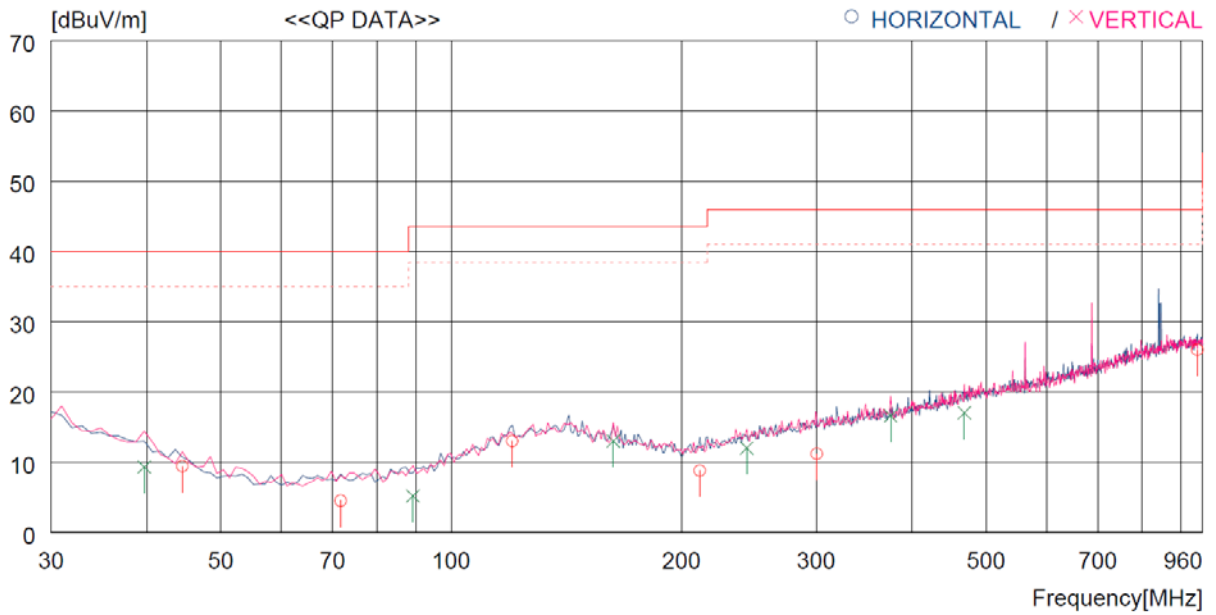

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	44.550	21.0	19.4	1.5	32.5	9.4	40.0	30.6	400	0
2	71.710	17.9	17.3	1.8	32.5	4.5	40.0	35.5	100	357
3	120.210	26.6	16.7	2.2	32.5	13.0	43.5	30.5	200	0
4	211.390	22.8	15.7	2.8	32.5	8.8	43.5	34.7	100	359
5	300.630	21.1	19.3	3.3	32.5	11.2	46.0	34.8	200	0
6	944.698	21.7	29.4	6.2	31.3	26.0	46.0	20.0	200	0
----- Vertical -----										
7	39.700	21.5	18.9	1.4	32.5	9.3	40.0	30.7	200	242
8	89.170	22.0	13.7	2.0	32.5	5.2	43.5	38.3	300	65
9	162.890	24.1	19.0	2.4	32.5	13.0	43.5	30.5	200	359
10	243.400	24.1	17.3	3.0	32.4	12.0	46.0	34.0	100	0
11	375.320	24.3	21.0	3.8	32.5	16.6	46.0	29.4	100	350
12	468.441	22.2	23.2	4.1	32.5	17.0	46.0	29.0	300	255

Tested by: Hyung-Kwon, Oh / Assistant Manager

8.4.2 Test data for Below 30 MHz

- Test Date : May 21, 2020 ~ May 25, 2020
- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.								

8.4.3 Test data for above 1 GHz

- Test Date : May 21, 2020 ~ May 25, 2020
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 10.0 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.								



Tested by: Hyung-Kwon, Oh / Assistant Manager