

FCC/ISED

RF

TEST REPORT

ISSUED BY  
Shenzhen BALUN Technology Co., Ltd.




FOR  
**SGW101X**


ISSUED TO  
SG Wireless Limited


Unit 4, 5/F, Sun Fung Industrial Building, 8 Ma Kok Street, Tsuen Wan  
New Territories, Hong Kong



Tested by:   
Heng Aipiag  
(Engineer)

Date:   
Jun. 26, 2019

Approved by:   
Wei Yanquan  
(Chief Engineer)

Date:   
Jun. 26, 2019

Report No.: BL-SZ1940524-601  
EUT Name: SGW101X  
Model Name: SGW1010, SGW1011 (refer section 2.4)  
Brand Name: SG Wireless  
Test Standard: 47 CFR Part 15 Subpart C  
RSS-Gen (Issue 5, April 2018)  
RSS-247 (Issue 2, February 2017)  
FCC ID: 2AS9401  
ISED Number: 25021-01

Test Conclusion: Pass  
Test Date: Apr. 29, 2019 ~ May 24, 2019  
Date of Issue: Jun. 26, 2019

*NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.*

**Revision History**

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Jun. 19, 2019</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Jun. 26, 2019</u>	<u>Update data on pages P38/40 and P102/104</u>

**TABLE OF CONTENTS**

1 ADMINISTRATIVE DATA (GENERAL INFORMATION) .....5

1.1 Identification of the Testing Laboratory .....5

1.2 Identification of the Responsible Testing Location .....5

1.3 Laboratory Condition .....5

1.4 Announce .....5

2 PRODUCT INFORMATION .....6

2.1 Applicant Information.....6

2.2 Manufacturer Information .....6

2.3 Factory Information .....6

2.4 General Description for Equipment under Test (EUT) .....6

2.5 Technical Information .....7

2.6 Additional Instructions .....8

3 SUMMARY OF TEST RESULTS.....12

3.1 Test Standards .....12

3.2 Verdict .....13

4 GENERAL TEST CONFIGURATIONS.....14

4.1 Test Environments .....14

4.2 Test Equipment List.....14

4.3 Measurement Uncertainty .....15

4.4 Description of Test Setup .....16

4.4.1 For Antenna Port Test .....16

4.4.2 For AC Power Supply Port Test .....16

4.4.3 For Radiated Test (Below 30 MHz) .....17

4.4.4 For Radiated Test (30 MHz-1 GHz) .....17

4.4.5 For Radiated Test (Above 1 GHz).....18

4.5 Measurement Results Explanation Example.....19

4.5.1	For conducted test items: .....	19
4.5.2	For radiated band edges and spurious emission test:.....	19
5	TEST ITEMS.....	20
5.1	Antenna Requirements.....	20
5.1.1	Relevant Standards.....	20
5.1.2	Antenna Anti-Replacement Construction .....	20
5.1.3	Antenna Gain .....	21
5.2	Output Power .....	22
5.2.1	Test Limit.....	22
5.2.2	Test Setup .....	22
5.2.3	Test Procedure.....	22
5.2.4	Test Result .....	23
5.3	Occupied Bandwidth .....	24
5.3.1	Limit.....	24
5.3.2	Test Setup.....	24
5.3.3	Test Procedure.....	24
5.3.4	Test Result .....	24
5.4	Conducted Spurious Emission .....	25
5.4.1	Limit.....	25
5.4.2	Test Setup.....	25
5.4.3	Test Procedure.....	25
5.4.4	Test Result .....	26
5.5	Band Edge (Authorized-band band-edge).....	27
5.5.1	Limit.....	27
5.5.2	Test Setup.....	27
5.5.3	Test Procedure.....	27
5.5.4	Test Result .....	27
5.6	Conducted Emission .....	28
5.6.1	Limit.....	28
5.6.2	Test Setup.....	28
5.6.3	Test Procedure.....	28
5.6.4	Test Result .....	28
5.7	Radiated Spurious Emission .....	29

5.7.1	Limit.....	29
5.7.2	Test Setup.....	29
5.7.3	Test Procedure.....	29
5.7.4	Test Result.....	32
5.8	Band Edge (Restricted-band band-edge).....	33
5.8.1	Limit.....	33
5.8.2	Test Setup.....	33
5.8.3	Test Procedure.....	33
1.1.1	Test Result.....	33
5.9	Power Spectral density (PSD).....	34
5.9.1	Limit.....	34
5.9.2	Test Setup.....	34
5.9.3	Test Procedure.....	34
5.9.4	Test Result.....	34
ANNEX A	TEST RESULT.....	35
A.1	Output Power, E.I.R.P, Duty Cycle.....	35
A.2	Occupied Bandwidth.....	43
A.3	Conducted Spurious Emissions.....	52
A.4	Band Edge (Authorized-band band-edge).....	61
A.5	Conducted Emissions.....	70
A.6	Radiated Spurious Emission.....	74
A.7	Band Edge (Restricted-band band-edge).....	102
A.8	Power Spectral Density (PSD).....	106
ANNEX B	TEST SETUP PHOTOS.....	110
ANNEX C	EUT EXTERNAL PHOTOS.....	110
ANNEX D	EUT INTERNAL PHOTOS.....	110

# 1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

## 1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

## 1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.</p> <p>The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

## 1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

## 1.4 Announce

- (1) The test report reference to the report template version v6.9.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	SG Wireless Limited
Address	Unit 4, 5/F, Sun Fung Industrial Building, 8 Ma Kok Street, Tsuen Wan New Territories, Hong Kong

### 2.2 Manufacturer Information

Manufacturer	SG Wireless Limited
Address	Unit 4, 5/F, Sun Fung Industrial Building, 8 Ma Kok Street, Tsuen Wan New Territories, Hong Kong

### 2.3 Factory Information

Factory	Dongguan Macson Electronics Ltd.
Address	No.5, Jun Da Lu, DongKeng, Dongguan, Guangdong China 523451

### 2.4 General Description for Equipment under Test (EUT)

EUT Name	SGW101X
Model Name Under Test	SGW1010, SGW1011
Series Model Name	SGW1010, SGW1010A, SGW1011, SGW1011A
Description of Model name differentiation	SGW1010: integrated PCB antenna, for max 5.5V high voltage use SGW1010A: integrated PCB antenna, for max 3.6V low voltage use SGW1011: U.FL connector for use with an external antenna, for max 5.5V high voltage use SGW1011A: U.FL connector for use with an external antenna, for max 3.6V low voltage use
Hardware Version	V1.0
Software Version	V0.27
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

## 2.5 Technical Information

Network and Wireless connectivity	Bluetooth 5.0 BLE
-----------------------------------	-------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	DTS	
Modulation Type	GFSK	
Product Type	<input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fix Location	
Transfer Rate	1 Mbps, 2 Mbps	
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.	
Number of channel	40 (at intervals of 2 MHz)	
Tested Channel	0 (2402 MHz), 19 (2440 MHz), 39 (2480 MHz)	
Antenna Type	ANT 0	PCB Antenna
	ANT 1	External Antenna
Antenna Gain	ANT 0	2 dBi (In test items related to antenna gain, the final results reflect this figure.)
	ANT 1	3 dBi(In test items related to antenna gain, the final results reflect this figure.)
Antenna Impedance	50Ω	
Antenna System(MIMO Smart Antenna)	N/A	

## 2.6 Additional Instructions

Bluetooth Low Energy

1 Mbps

ANT 0

EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Power level setup in software			
Test Software Version	J-Link RTT Viewer V6.40		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220
Mode	Channel	Frequency (MHz)	Soft Set
GFSK	CH0	2402	TX LEVEL is built-in set parameters and cannot be changed and selected.
	CH19	2440	
	CH39	2480	

Run Software

```

J-Link RTT Viewer V6.40
File Terminals Input Logging Help
Log All Terminals Terminal 0
00>
00> < test enter 0xdeadbeef
ok
00> < ble start 0xdeadbeef
ok
00> < ble dtm 2 0 37 0
BLE DTM command received 2 0 37 0
00> start time: 0x1147
00> start time: 0x1147
00> ok: 0x0000
    
```

Enter Clear

RTT Viewer connected. 0.000 MB




ANT 1

EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Power level setup in software			
Test Software Version	J-Link RTT Viewer V6.40		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220
Mode	Channel	Frequency (MHz)	Soft Set
GFSK	CH0	2402	TX LEVEL is built-in set parameters and cannot be changed and selected.
	CH19	2440	
	CH39	2480	

Run Software

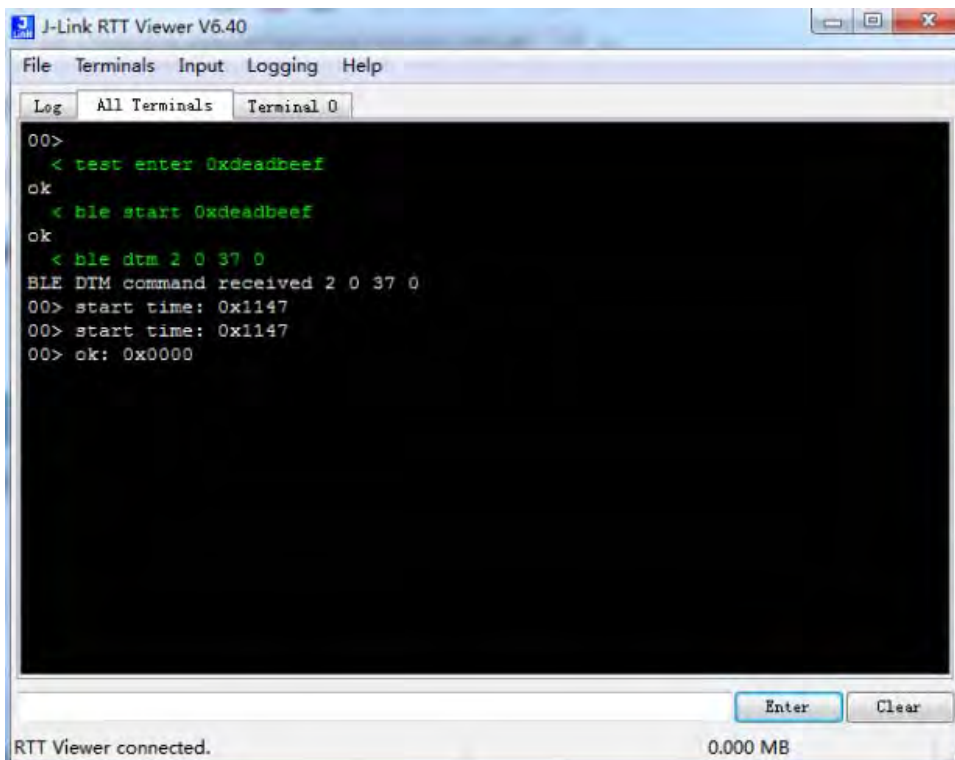

2 Mbps


ANT 0

EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Power level setup in software			
Test Software Version	J-Link RTT Viewer V6.40		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220
Mode	Channel	Frequency (MHz)	Soft Set
GFSK	CH0	2402	TX LEVEL is built-in set parameters and cannot be changed and selected.
	CH19	2440	
	CH39	2480	

Run Software

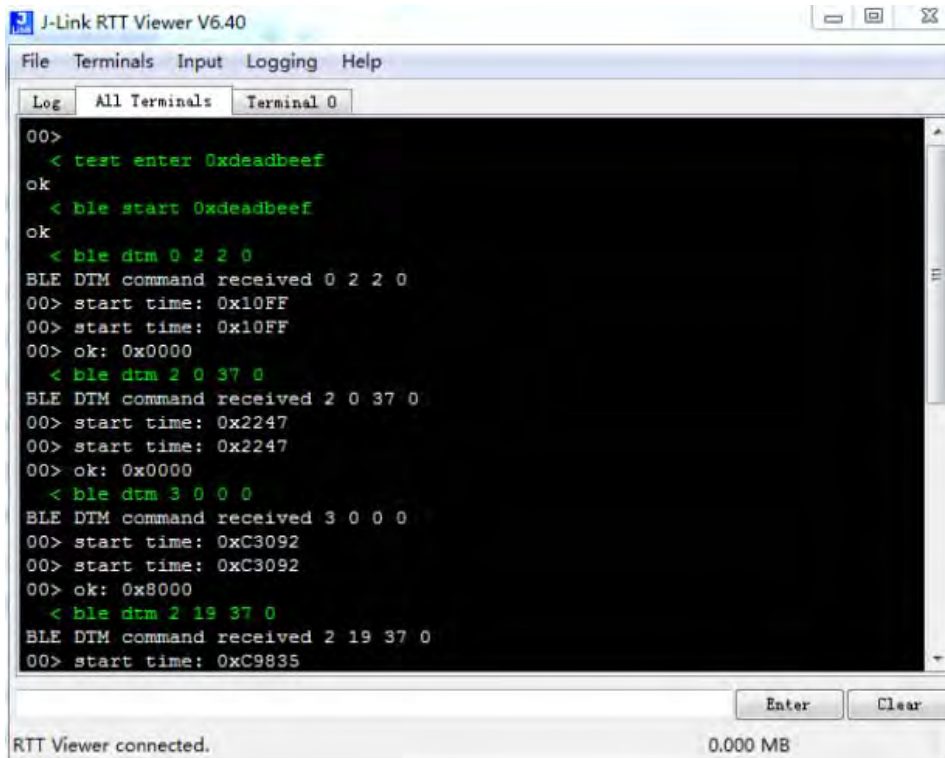


ANT 1

EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Power level setup in software			
Test Software Version	J-Link RTT Viewer V6.40		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220
Mode	Channel	Frequency (MHz)	Soft Set
GFSK	CH0	2402	TX LEVEL is built-in set parameters and cannot be changed and selected.
	CH19	2440	
	CH39	2480	

Run Software

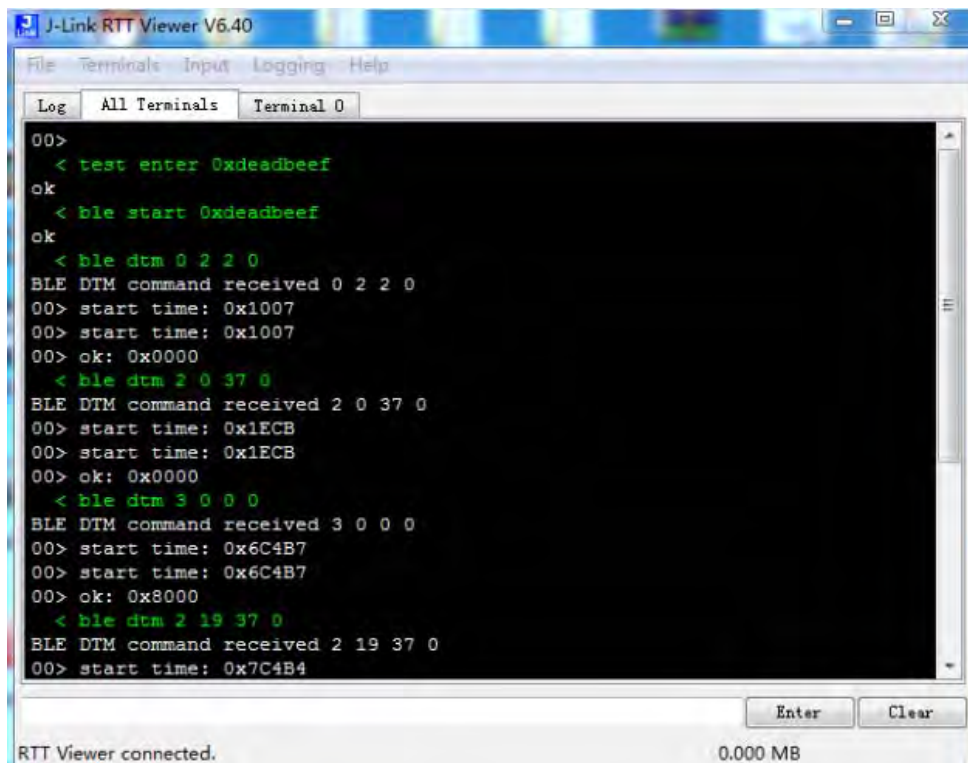

### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-17 Edition)	Miscellaneous Wireless Communications Services
2	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules
3	RSS-Gen (Issue 5, April 2018)	General Requirements for Compliance of Radio Apparatus
4	RSS-247 (Issue 2, February 2017)	Digital Transmission Systems (DTSs), Frequency Hopping Systems(FHSs) and Licence-Exemp Local Area Network (LE-LAN) Devices
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### 3.2 Verdict

No.	Description	FCC Part No.	ISED Part No.	Channel	Test Result	Verdict
1	Antenna Requirement	15.203	RSS-247, 5.4 (6)	N/A	--	Pass <sup>Note1</sup>
2	Output Power	15.247(b)	RSS-247, 5.4 (4)	Low/Middle/High	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247(a)	RSS-GEN, 6.6; RSS-247, 5.2 (1)	Low/Middle/High	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247(d)	RSS-247, 5.5;	Low/ High	ANNEX A.4	Pass
6	Conducted Emission	15.207	RSS-GEN, 8.8	Low/Middle/High	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	RSS-247, 5.2 (2)	Low/Middle/High	ANNEX A.8	Pass
10	Receiver Spurious Emissions	--	RSS-Gen, 7.1.2	--	N/A	N/A <sup>Note2</sup>

Note 1: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note 2: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.3 V

### 4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2018.06.15	2019.06.14
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2018.06.15	2019.06.14
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2018.11.07	2019.11.06
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2018.06.13	2019.06.12
LISN	SCHWARZBECK	NSLK 8127	8127-687	2018.06.13	2019.06.12
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2018.06.15	2019.06.14
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2018.06.15	2019.06.14
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	2019.01.09	2020.01.08
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	2019.01.09	2020.01.08
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2018.06.14	2019.06.13
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2018.06.26	2019.06.25
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.09	2019.11.08
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2017.07.22	2019.07.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2018.07.11	2020.07.10
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2018.06.21	2019.06.20
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2019.01.05	2021.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2020.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2017.08.08	2019.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2018.06.15	2019.06.14
Power Amplifier	OPHIR RF	5225F	1037	2019.02.28	2020.02.27
Power Amplifier	OPHIR RF	5273F	1016	2019.02.28	2020.02.27
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Mouth Simulator	B&K	4227	2423931	2018.11.15	2019.11.14

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Sound Calibrator	B&K	4231	2430337	2018.11.15	2019.11.14
Sound Level Meter	B&K	NL-20	00844023	2018.11.15	2019.11.14
Ear Simulator	B&K	4185	2409449	2018.11.15	2019.11.14
Ear Simulator	B&K	4195	2418189	2018.11.15	2019.11.14
Audio analyzer	B&K	UPL 16	100129	2018.11.15	2019.11.14
Software	BALUN	BL410	-	-	-
Cable	ROHDE&SCHWARZ	JUNFLON	APR0914004	2019.01.09	2020.01.08

### 4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .


Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	$\pm 1.4$ dB
Power Spectral Density, conducted	$\pm 2.5$ dB
Unwanted Emissions, conducted	$\pm 2.8$ dB
All emissions, radiated	$\pm 5.4$ dB
Temperature	$\pm 1$ °C
Humidity	$\pm 4\%$

## 4.4 Description of Test Setup

### 4.4.1 For Antenna Port Test


Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)

For example: the measurement value is 10 dBm and the cable loss is 0.5dB, then the conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

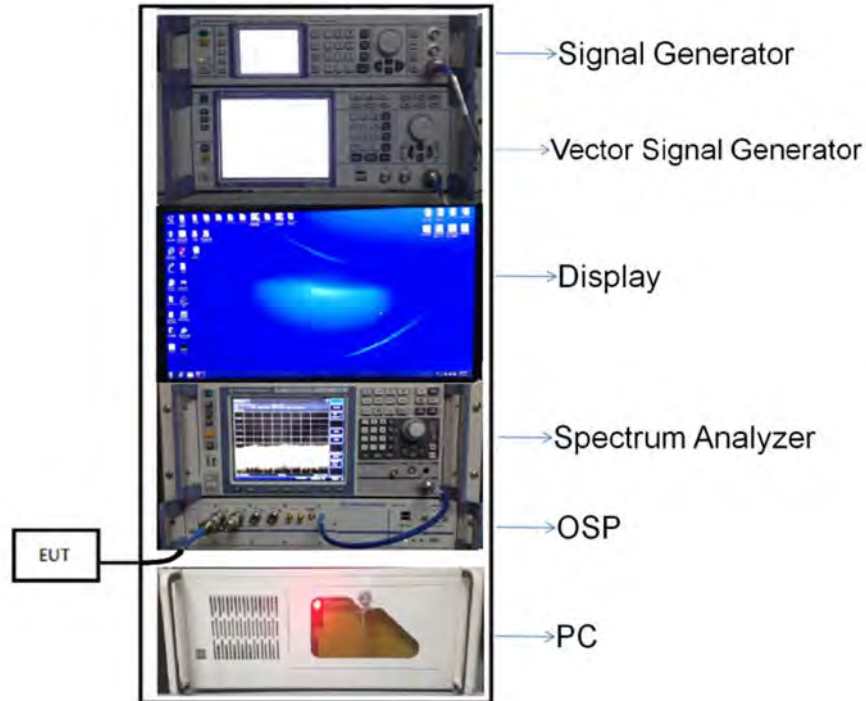

(Diagram 1)


### 4.4.2 For AC Power Supply Port Test

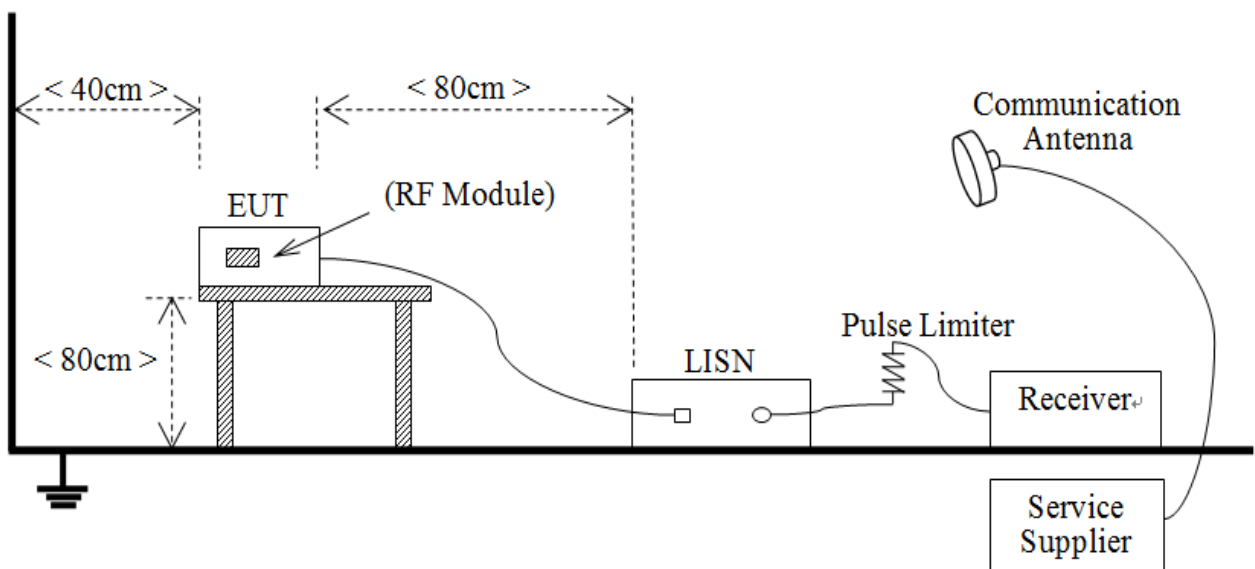

(Diagram 2)




4.4.3 For Radiated Test (Below 30 MHz)

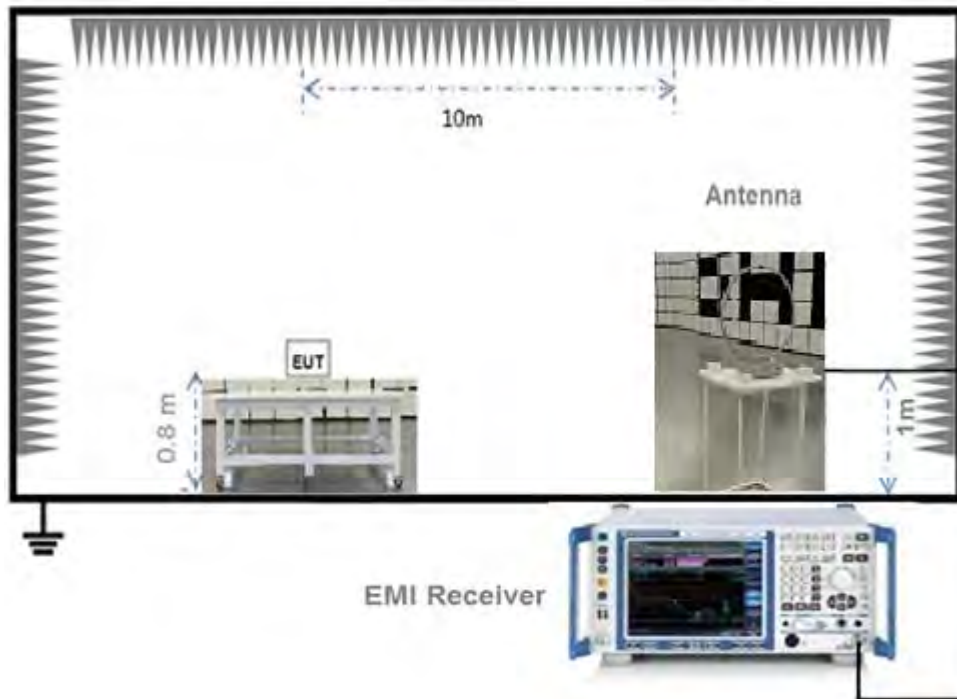


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

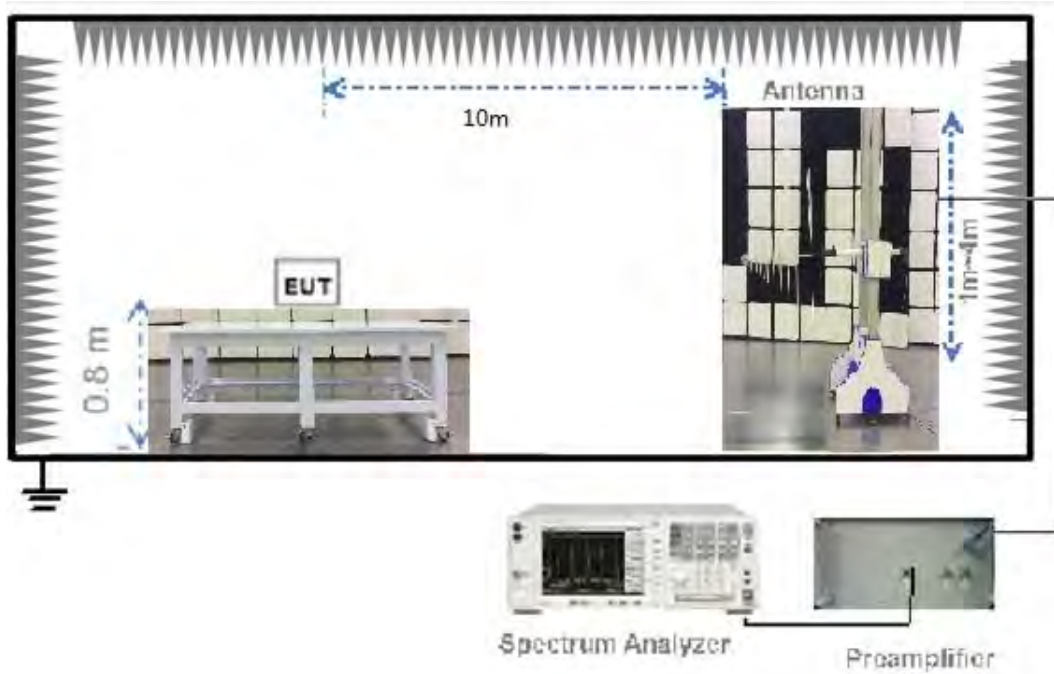

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

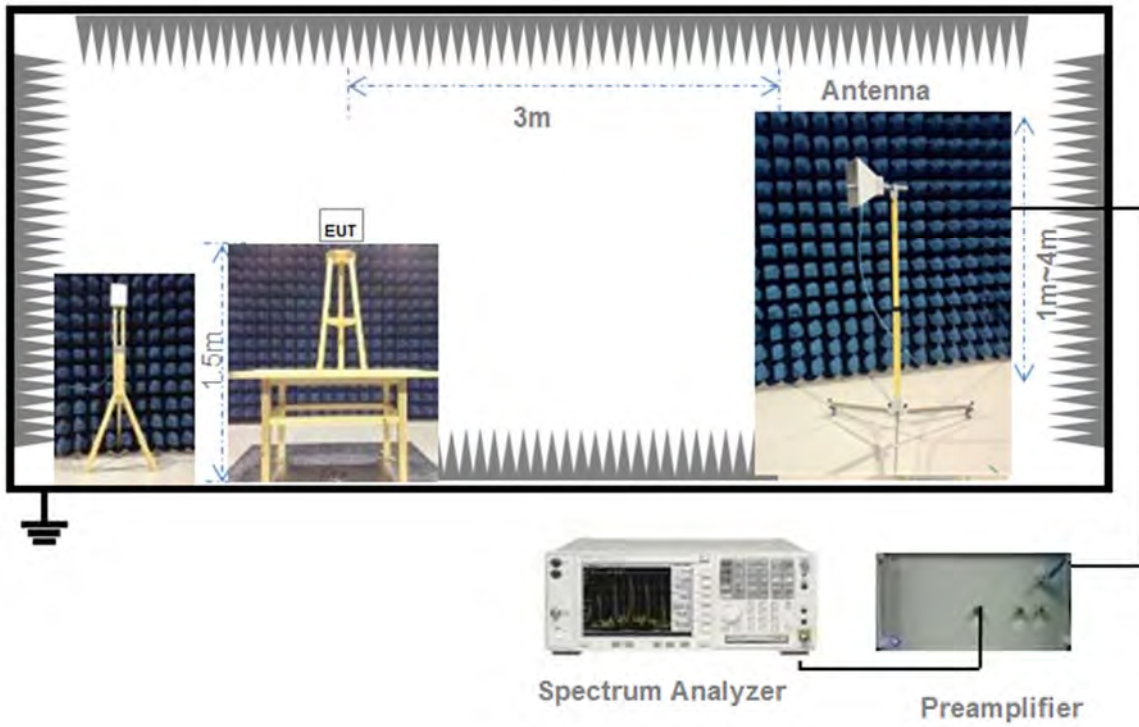

(Diagram 5)

## 4.5 Measurement Results Explanation Example

### 4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

### 4.5.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

## 5 TEST ITEMS

### 5.1 Antenna Requirements

#### 5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

#### 5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Model Name: SGW1010

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	

Model Name: SGW1011

Protected Method	Description
Compliance with 15.203, use of a standard antenna jack or electrical connector is prohibited.	The antenna is the unique connector with a wire antenna.

Reference Documents	Item
Photo	<p>The top photograph shows a close-up of the antenna assembly on a printed circuit board (PCB). A red box highlights a gold-colored connector labeled 'Unique Connector'. Another red box highlights a black integrated circuit labeled 'RF Chip'. The PCB is marked with '5G Wireless', 'SGW1011', and '1/00'. The bottom photograph shows the antenna assembly with a black wire antenna. A ruler is placed vertically to the left of the antenna for scale, showing markings from 10 to 100.</p>

### 5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 5.2 Output Power

### 5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

RSS-247, 5.4 (4)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.

### 5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.2.3 Test Procedure

#### a) Maximum peak conducted output power

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

Set the RBW  $\geq$  DTS bandwidth.

Set VBW  $\geq 3 \times$  RBW.

Set span  $\geq 3 \times$  RBW

Sweep time = auto couple.

Detector = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

#### b) Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW  $\geq$  OBW if possible; otherwise, set RBW to the largest available value.

Set VBW  $\geq$  RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

#### 5.2.4 Test Result

Please refer to ANNEX A.1.

## 5.3 Occupied Bandwidth

### 5.3.1 Limit

FCC §15.247(a); RSS-247, 5.1 (1); RSS-GEN, 6.6

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

### 5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW)  $\geq 3$  RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.3.4 Test Result

Please refer to ANNEX A.2.



## 5.4 Conducted Spurious Emission

### 5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement:

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to  $\geq 1.5$  times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement:

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

#### 5.4.4 Test Result

Please refer to ANNEX A.3.

## 5.5 Band Edge (Authorized-band band-edge)

### 5.5.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle  $\geq 98\%$ ). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission)  $\pm 0.5$  MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission  $\pm 0.5$  MHz.

### 5.5.4 Test Result

Please refer to ANNEX A.4.

## 5.6 Conducted Emission

### 5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

### 5.6.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

### 5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

### 5.6.4 Test Result

Please refer to ANNEX A.5.

## 5.7 Radiated Spurious Emission

### 5.7.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.9; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dBμV/m) = 20\*log[Field Strength (μV/m)].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

### 5.7.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands:

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq 30$  MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $> 1000$  MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

#### Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure:

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction:

If continuous transmission of the EUT (i.e., duty cycle  $\geq 98$  percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle,  $x$ , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW  $\geq 3 \times$  RBW.
- e) Detector = RMS, if  $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is  $10 \log(1/x)$ , where  $x$  is the duty cycle.
  - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is  $20 \log(1/x)$ , where  $x$  is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $\geq 98$  percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain:

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test:

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

#### 5.7.4 Test Result

Please refer to ANNEX A.6.



## 5.8 Band Edge (Restricted-band band-edge)

### 5.8.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.9; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

### 5.8.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

### 1.1.1 Test Result

Please refer to ANNEX A.7.

## 5.9 Power Spectral density (PSD)

### 5.9.1 Limit

FCC §15.247(e); RSS-247, 5.2 (2)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

### 5.9.2 Test Setup

See section 4.4.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .

Set the VBW  $\geq 3 \text{ RBW}$ .

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 5.9.4 Test Result

Please refer to ANNEX A.7.

## ANNEX A TEST RESULT

### A.1 Output Power, E.I.R.P, Duty Cycle

ANT 0

#### Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK(BLE) -1 Mbps		dBm	mW	
	dBm	mW			
Low	7.06	5.08	30	1000	Pass
Middle	7.26	5.32			Pass
High	7.48	5.60			Pass

#### E.I.R.P Test Data (For ISED)

Channel	E.I.R.P		Limit		Verdict
	GFSK(BLE) -1 Mbps		dBm	mW	
	dBm	mW			
Low	9.06	8.05	36	4000	Pass
Middle	9.26	8.43			Pass
High	9.48	8.87			Pass

#### Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK(BLE) -2 Mbps		dBm	mW	
	dBm	mW			
Low	9.87	9.71	30	1000	Pass
Middle	10.03	10.07			Pass
High	10.23	10.54			Pass

#### E.I.R.P Test Data (For ISED)

Channel	E.I.R.P		Limit		Verdict
	GFSK(BLE) -2 Mbps		dBm	mW	
	dBm	mW			
Low	11.87	15.38	36	4000	Pass
Middle	12.03	15.96			Pass
High	12.23	16.71			Pass

**ANT 1**
**Peak Power Test Data**

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK(BLE) -1 Mbps		dBm	mW	
	dBm	mW			
Low	6.22	4.19	30	1000	Pass
Middle	6.27	4.24			Pass
High	6.31	4.28			Pass

**E.I.R.P Test Data (For ISED)**

Channel	E.I.R.P		Limit		Verdict
	GFSK(BLE) -1 Mbps		dBm	mW	
	dBm	mW			
Low	9.22	8.36	36	4000	Pass
Middle	9.27	8.45			Pass
High	9.31	8.53			Pass

**Peak Power Test Data**

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK(BLE) -2 Mbps		dBm	mW	
	dBm	mW			
Low	7.99	6.30	30	1000	Pass
Middle	8.13	6.50			Pass
High	8.09	6.44			Pass


**E.I.R.P Test Data (For ISED)**

Channel	E.I.R.P		Limit		Verdict
	GFSK(BLE) -2 Mbps		dBm	mW	
	dBm	mW			
Low	9.99	9.98	36	4000	Pass
Middle	10.13	10.30			Pass
High	10.09	10.21			Pass

ANT 0

Test plots

GFSK(BLE) -1 Mbps LOW CHANNEL

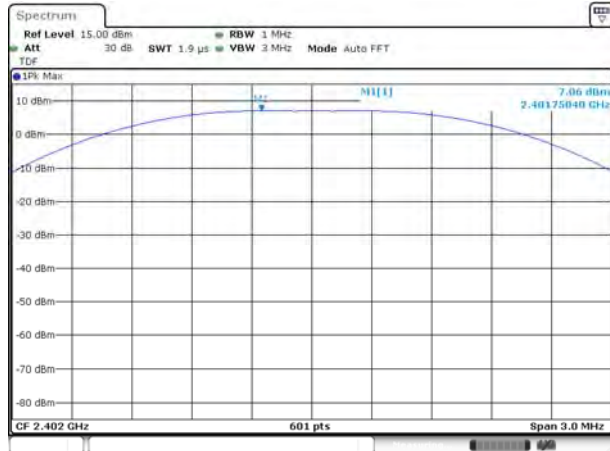

Date: 18.MAY.2019 13:56:10

GFSK(BLE) -1 Mbps MIDDLE CHANNEL



Date: 18.MAY.2019 14:03:52

GFSK(BLE) -1 Mbps HIGH CHANNEL




Date: 18.MAY.2019 14:06:39

ANT 0


Test plots

GFSK(BLE) -2 Mbps LOW CHANNEL

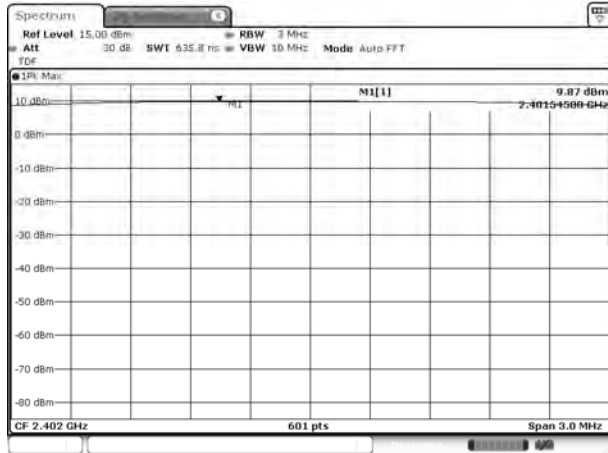


Date: 25 JUN 2019 15:54:12

GFSK(BLE) -2 Mbps MIDDLE CHANNEL

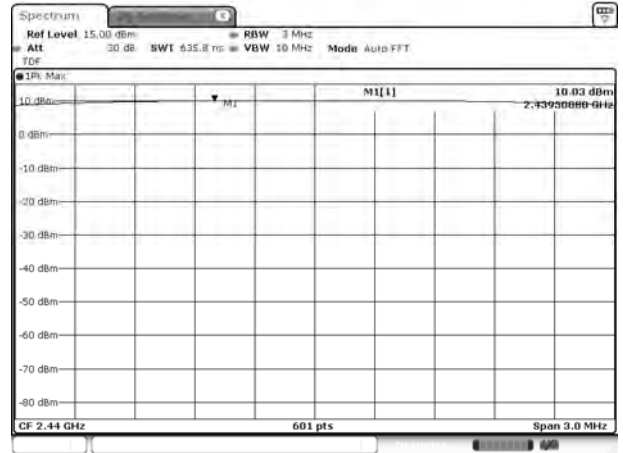

Date: 25 JUN 2019 15:54:52

GFSK(BLE) -2 Mbps HIGH CHANNEL

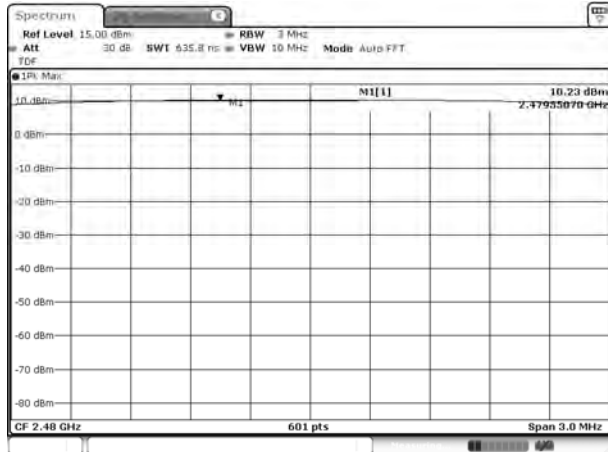

Date: 25 JUN 2019 15:55:46

ANT 1

Test plots

GFSK(BLE) -1 Mbps LOW CHANNEL



Date: 18.MAY.2019 14:51:55

GFSK(BLE) -1 Mbps MIDDLE CHANNEL



Date: 18.MAY.2019 14:56:32

GFSK(BLE) -1 Mbps HIGH CHANNEL




Date: 18.MAY.2019 14:58:57

ANT 1

Test plots

GFSK(BLE) -2 Mbps LOW CHANNEL

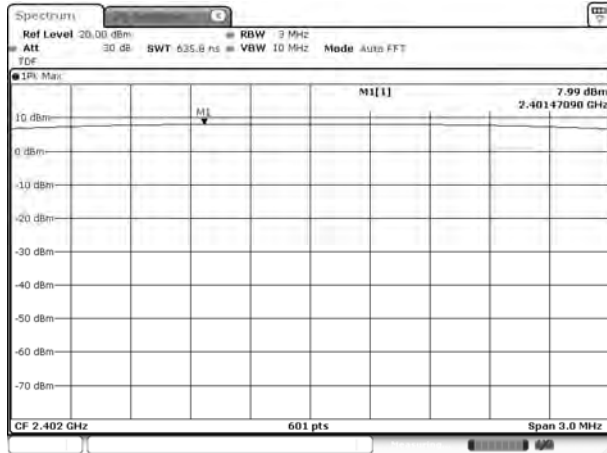


Date: 25 JUN 2019 15:44:19

GFSK(BLE) -2 Mbps MIDDLE CHANNEL



Date: 25 JUN 2019 15:45:04

GFSK(BLE) -2 Mbps HIGH CHANNEL

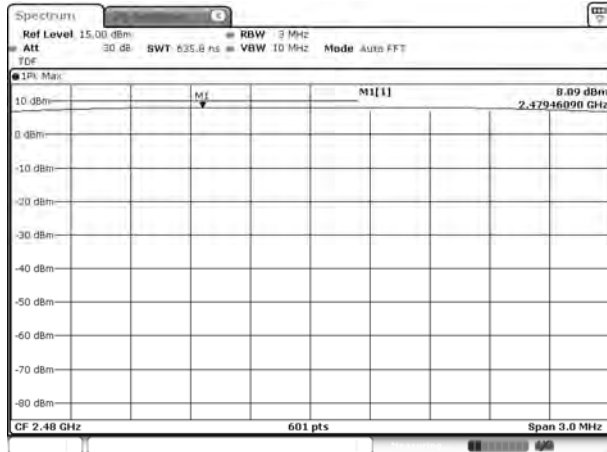

Date: 25 JUN 2019 15:45:32




ANT 0

Duty Cycle Test Data

Band	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)
GFSK (BLE)-1 Mbps	0.390	0.624	62.50%


Test plots

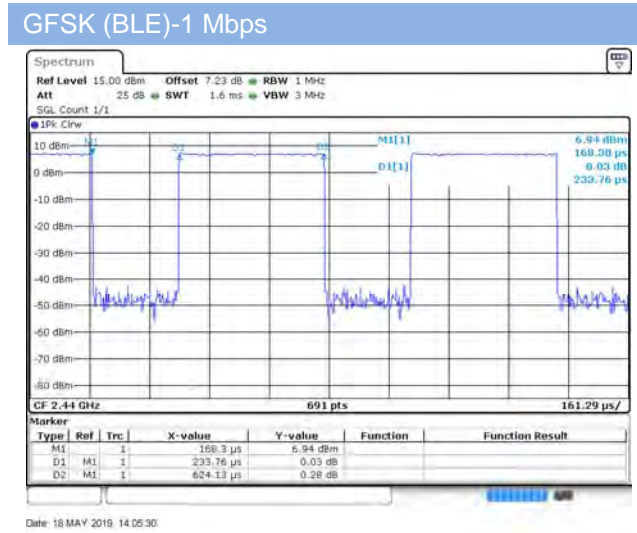

Duty Cycle Test Data


Band	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)
GFSK (BLE)-2 Mbps	0.206	0.625	32.96%

Test plots

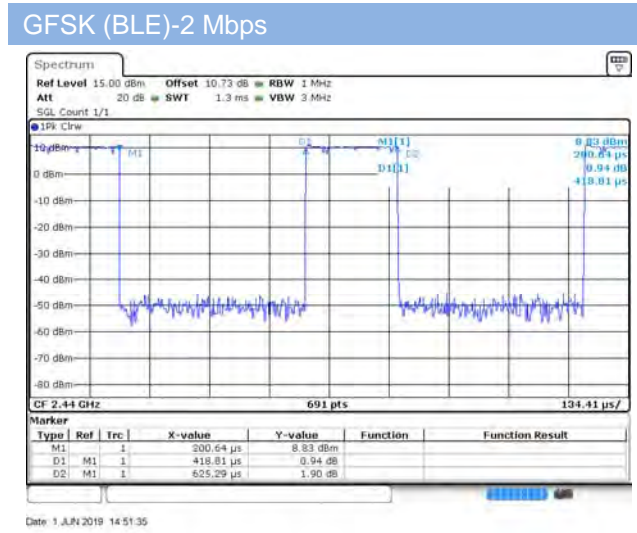


ANT 1
Duty Cycle Test Data

Band	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)
GFSK (BLE)-1 Mbps	0.393	0.626	62.78%

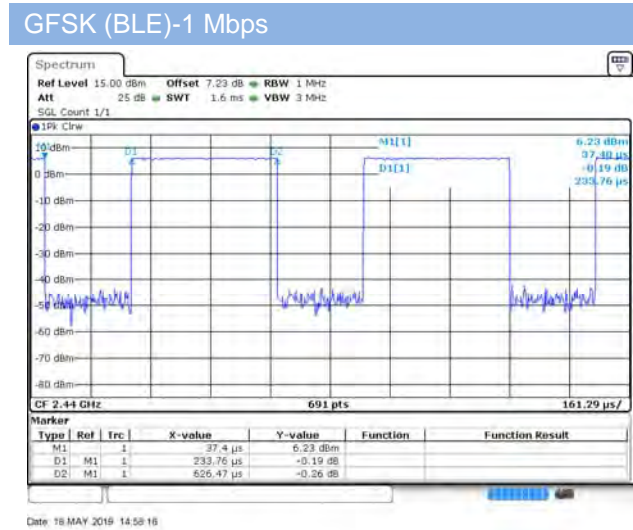Test plots

Duty Cycle Test Data

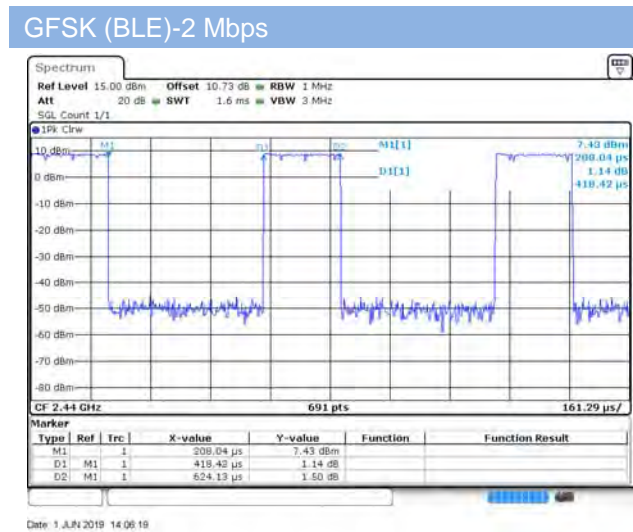Band	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)
GFSK (BLE)-2 Mbps	0.206	0.624	33.01%

Test plots


## A.2 Occupied Bandwidth

### ANT 0

#### Test Data

Test Mode	GFSK (BLE) -1 Mbps		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	695.801	1046.310	≥500
Middle Channel	700.195	1046.310	≥500
High Channel	708.740	1050.651	≥500

Test Mode	GFSK (BLE) -2 Mbps		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	1134.766	2014.472	≥500
Middle Channel	1134.766	2010.130	≥500
High Channel	1130.615	2036.179	≥500

### ANT 1

#### Test Data

Test Mode	GFSK (BLE) -1 Mbps		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	704.346	1041.968	≥500
Middle Channel	713.135	1037.627	≥500
High Channel	708.740	1046.310	≥500

Test Mode	GFSK (BLE) -2 Mbps		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	1143.555	1997.106	≥500
Middle Channel	1134.766	2027.496	≥500
High Channel	1134.766	2049.204	≥500

ANT 0

Test plots

6 dB Bandwidth

GFSK (BLE) -1 Mbps LOW CHANNEL




Date: 18 MAY 2019 13:56:15

GFSK (BLE) -1 Mbps MIDDLE CHANNEL



Date: 18 MAY 2019 14:03:56

GFSK (BLE) -1 Mbps HIGH CHANNEL

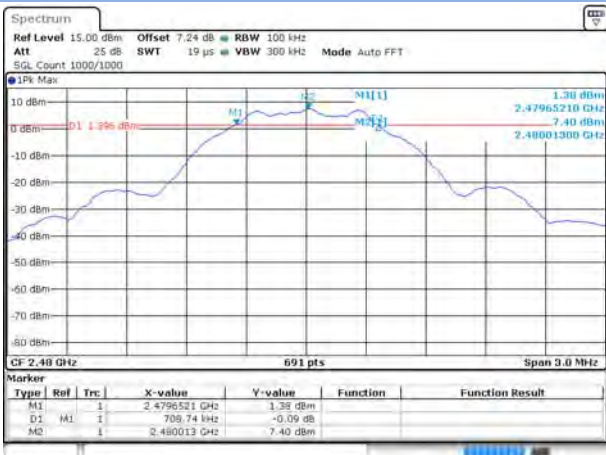


Date: 18 MAY 2019 14:06:44

ANT 0

99% Bandwidth

GFSK (BLE) -1 Mbps LOW CHANNEL

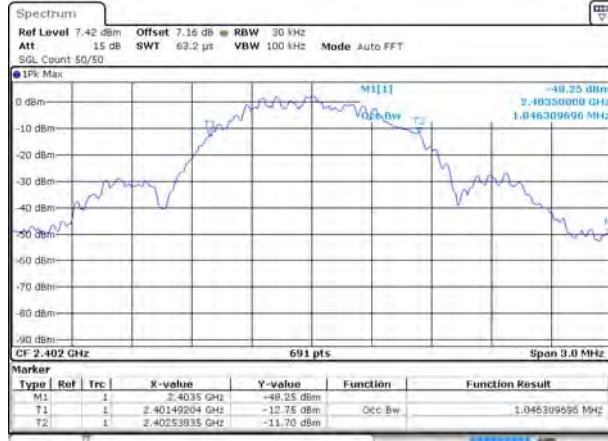

Date: 18 MAY 2019 13:56:20

GFSK (BLE) -1 Mbps MIDDLE CHANNEL



Date: 18 MAY 2019 14:04:01

GFSK (BLE) -1 Mbps HIGH CHANNEL



Date: 18 MAY 2019 14:06:49

ANT 0

Test plots


6 dB Bandwidth

GFSK (BLE) -2 Mbps LOW CHANNEL



Date: 1 JUN 2019 14:41:00

GFSK (BLE) -2 Mbps MIDDLE CHANNEL

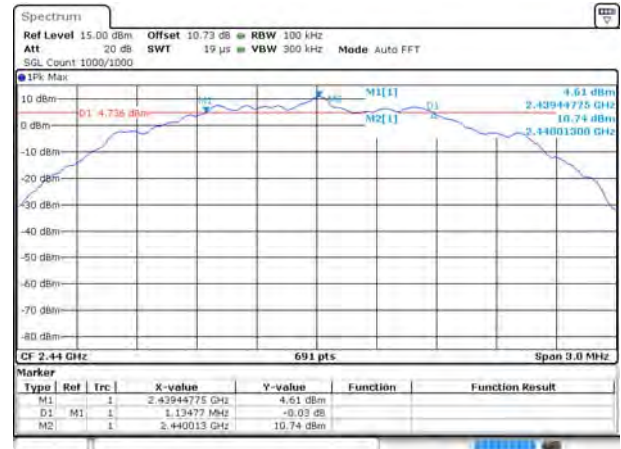

Date: 1 JUN 2019 14:49:22

GFSK (BLE) -2 Mbps HIGH CHANNEL



Date: 1 JUN 2019 14:53:16

ANT 0


99% Bandwidth

GFSK (BLE) -2 Mbps LOW CHANNEL




Date 1 JUN 2019 14:41:05

GFSK (BLE) -2 Mbps MIDDLE CHANNEL

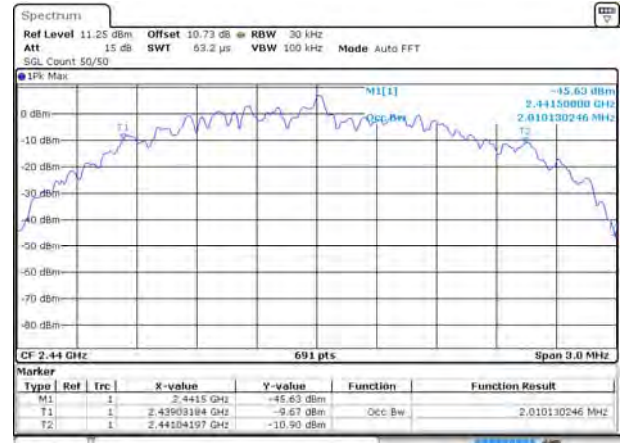

Date 1 JUN 2019 14:49:27

GFSK (BLE) -2 Mbps HIGH CHANNEL

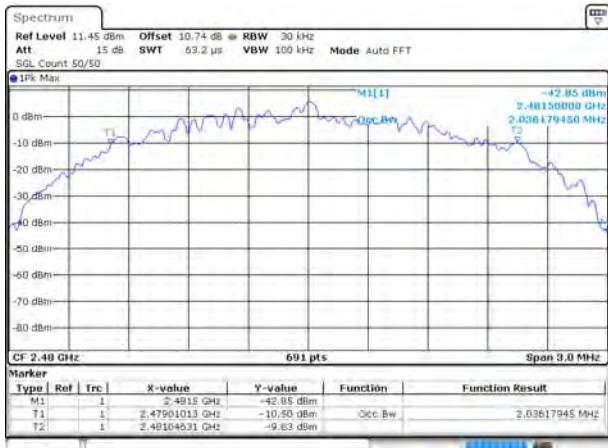

Date 1 JUN 2019 14:53:22

ANT 1

Test plots

6 dB Bandwidth

GFSK (BLE) -1 Mbps LOW CHANNEL



Date: 18 MAY 2019 14:51:59

GFSK (BLE) -1 Mbps MIDDLE CHANNEL



Date: 18 MAY 2019 14:56:36

GFSK (BLE) -1 Mbps HIGH CHANNEL




Date: 18 MAY 2019 14:59:01



**ANT 1**
**99% Bandwidth**
**GFSK (BLE) -1 Mbps LOW CHANNEL**


Date: 18 MAY 2019 14:52:04

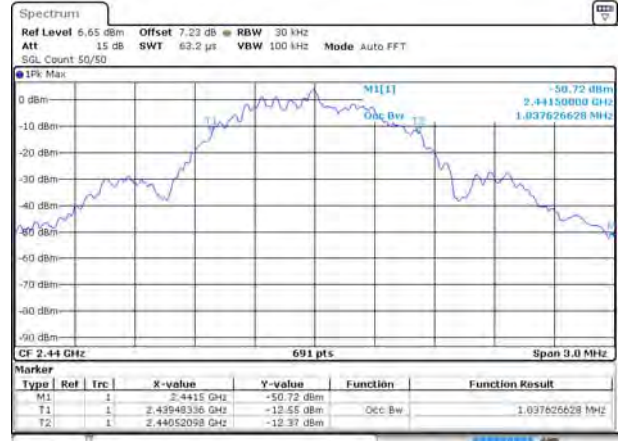**GFSK (BLE) -1 Mbps MIDDLE CHANNEL**


Date: 18 MAY 2019 14:56:41

**GFSK (BLE) -1 Mbps HIGH CHANNEL**



Date: 18 MAY 2019 14:59:06

ANT 1

Test plots

6 dB Bandwidth

GFSK (BLE) -2 Mbps LOW CHANNEL

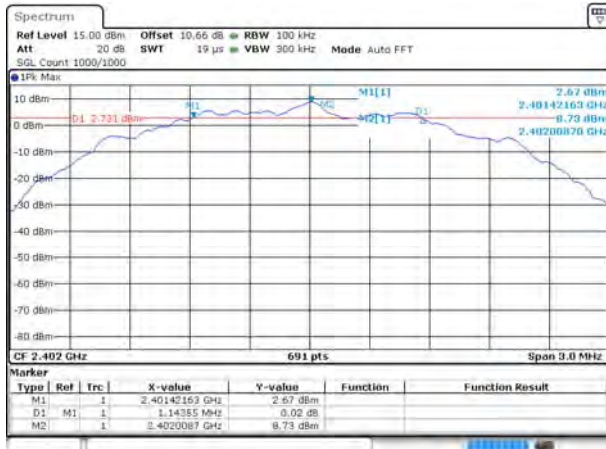

Date: 1 JUN 2019 14:00:52

GFSK (BLE) -2 Mbps MIDDLE CHANNEL



Date: 1 JUN 2019 14:04:20

GFSK (BLE) -2 Mbps HIGH CHANNEL




Date: 1 JUN 2019 14:07:38

ANT 1


99% Bandwidth

GFSK (BLE) -2 Mbps LOW CHANNEL

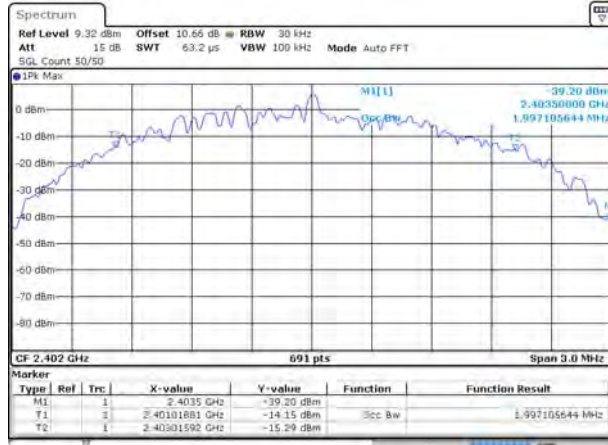


Date: 1 JUN 2019 14:00:57

GFSK (BLE) -2 Mbps MIDDLE CHANNEL

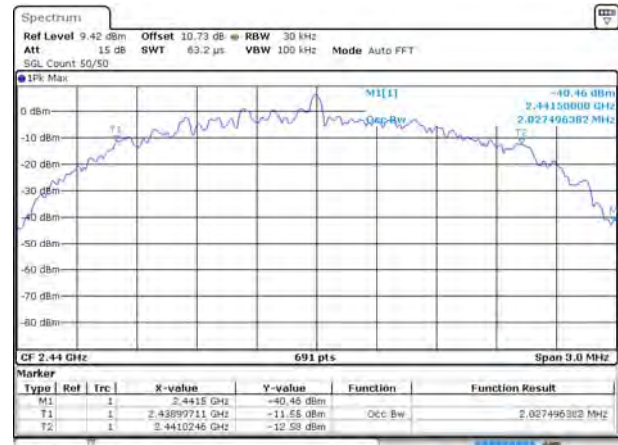

Date: 1 JUN 2019 14:04:25

GFSK (BLE) -2 Mbps HIGH CHANNEL

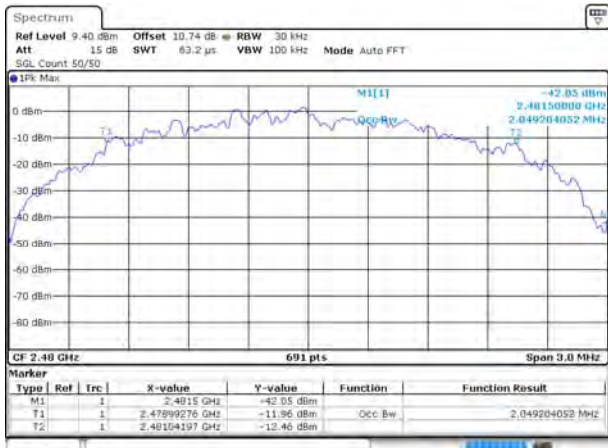

Date: 1 JUN 2019 14:07:43

### A.3 Conducted Spurious Emissions

#### ANT 0

##### Test Data

GFSK (BLE) -1 Mbps				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-27.61	6.97	-13.03	Pass
Middle	-27.75	7.18	-12.82	Pass
High	-27.78	7.39	-12.61	Pass

GFSK (BLE) -2 Mbps				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-24.05	10.51	-9.49	Pass
Middle	-24.38	10.74	-9.26	Pass
High	-23.86	10.96	-9.04	Pass

#### ANT 1


##### Test Data

GFSK (BLE) -1 Mbps				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-27.71	6.11	-13.89	Pass
Middle	-27.34	6.19	-13.81	Pass
High	-26.65	6.23	-13.77	Pass

GFSK (BLE) -2 Mbps				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-23.19	8.78	-11.22	Pass
Middle	-23.97	8.92	-11.08	Pass
High	-24.33	8.83	-11.17	Pass


ANT 0  
Test Plots

GFSK (BLE) -1 Mbps LOW CHANNEL , CARRIER LEVEL

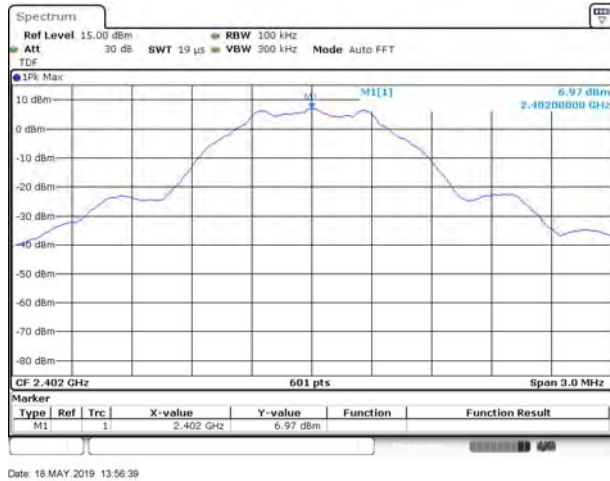


Date: 18 MAY 2019 13:56:39

GFSK (BLE) -1 Mbps LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

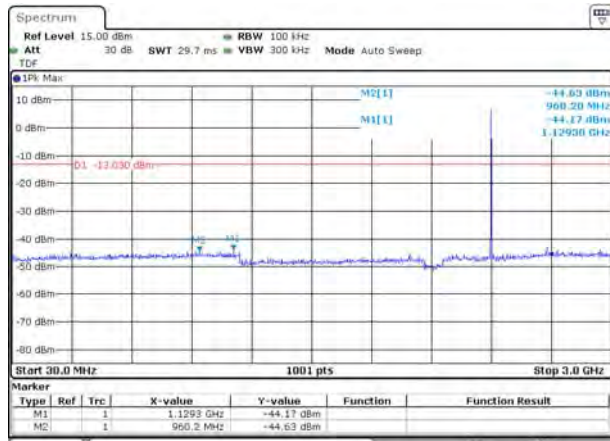


Date: 18 MAY 2019 14:00:21

GFSK (BLE) -1 Mbps LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

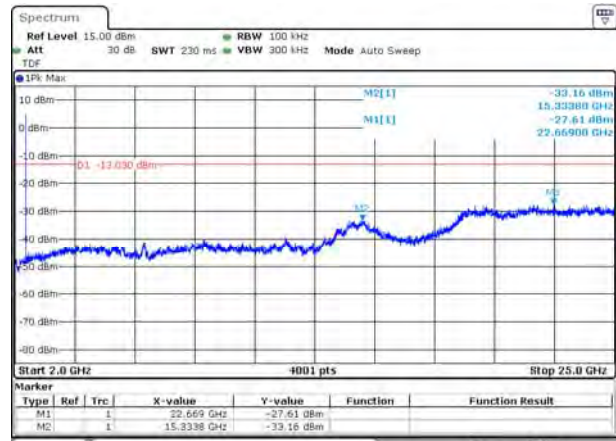


Date: 18 MAY 2019 14:00:45

GFSK (BLE) -1 Mbps MIDDLE CHANNEL , CARRIER LEVEL

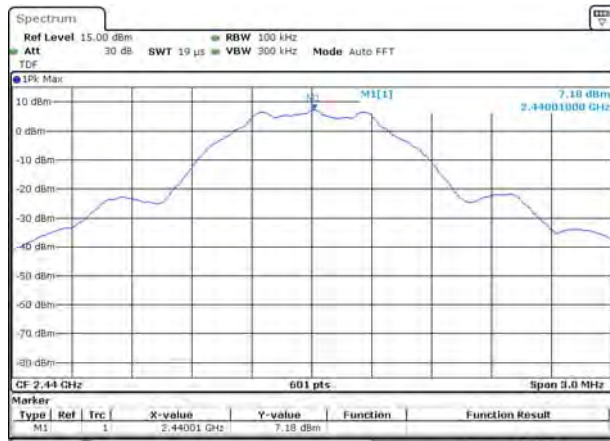


Date: 18 MAY 2019 14:04:12

GFSK (BLE) -1 Mbps MIDDLE CHANNEL ,  
SPURIOUS 30 MHz ~ 3 GHz

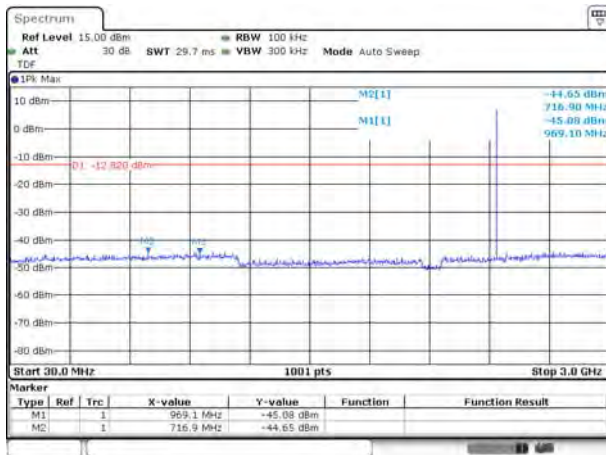


Date: 18 MAY 2019 14:04:56

GFSK (BLE) -1 Mbps MIDDLE CHANNEL ,  
SPURIOUS 3 GHz ~ 25 GHz

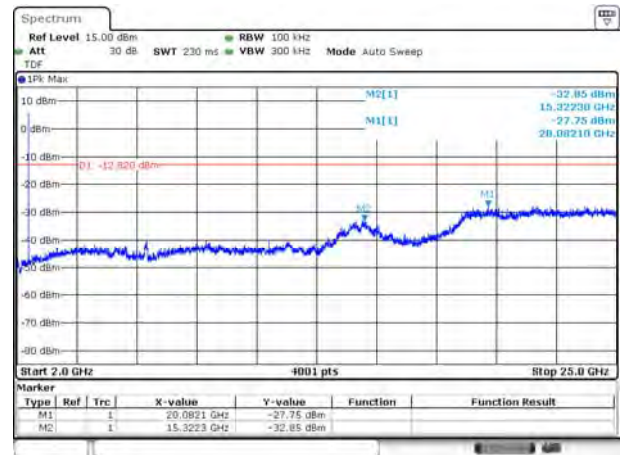


Date: 18 MAY 2019 14:05:11

GFSK (BLE) -1 Mbps HIGH CHANNEL ,  
CARRIER LEVEL

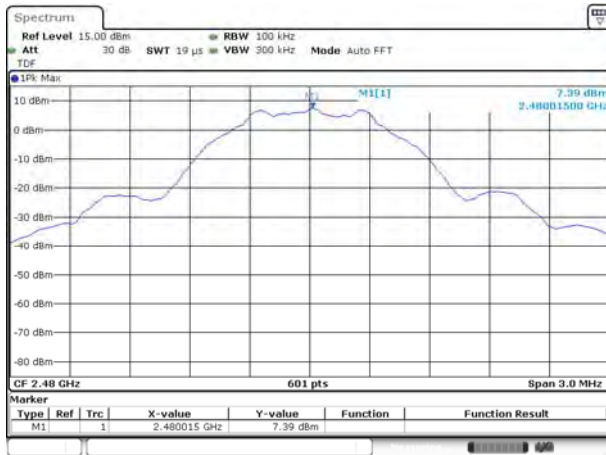


Date: 18 MAY 2019 14:09:46

GFSK (BLE) -1 Mbps HIGH CHANNEL ,  
SPURIOUS 30 MHz ~ 3 GHz

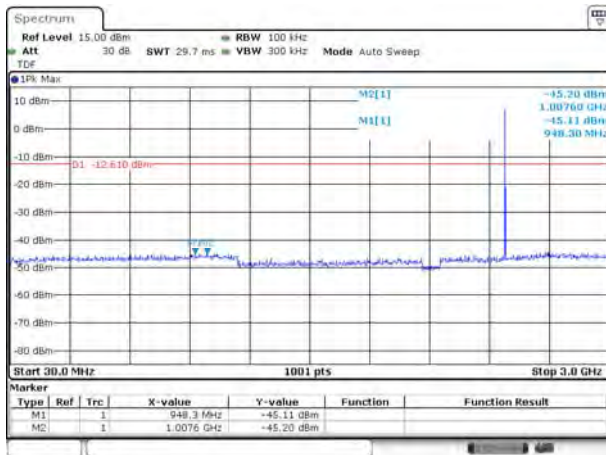

Date: 18 MAY 2019 14:10:27


GFSK (BLE) -1 Mbps HIGH CHANNEL ,  
SPURIOUS 3 GHz ~ 25 GHz

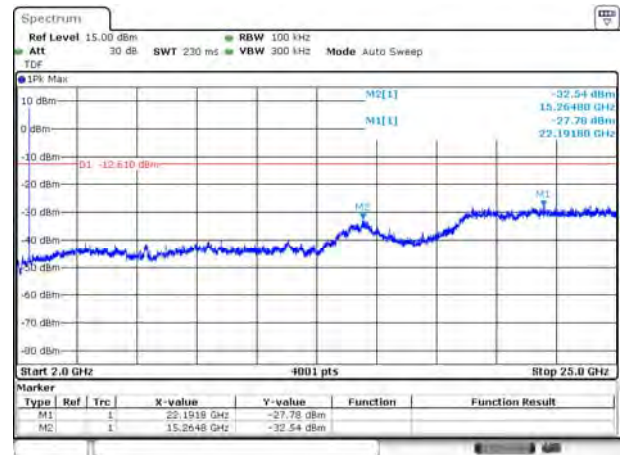

Date: 18 MAY 2019 14:10:41


ANT 0  
Test Plots

GFSK (BLE) -2 Mbps LOW CHANNEL , CARRIER LEVEL

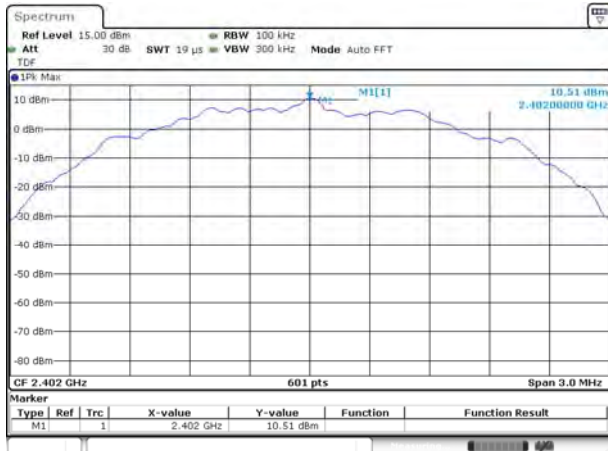


Date: 1 JUN 2019 14:41:58

GFSK (BLE) -2 Mbps LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

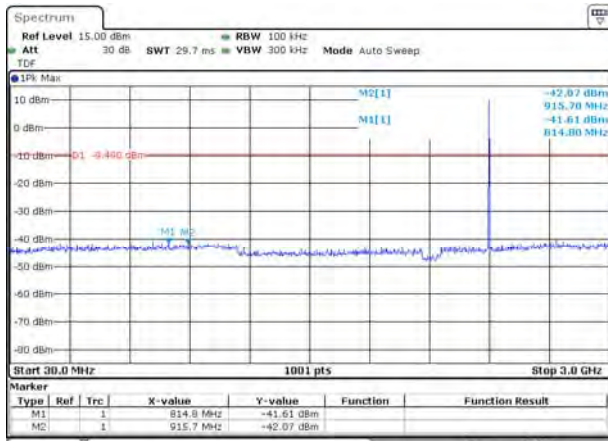


Date: 1 JUN 2019 14:46:55

GFSK (BLE) -2 Mbps LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

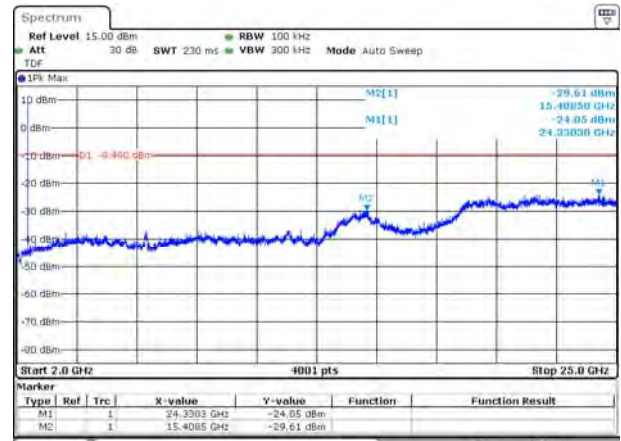


Date: 1 JUN 2019 14:47:10

GFSK (BLE) -2 Mbps MIDDLE CHANNEL , CARRIER LEVEL

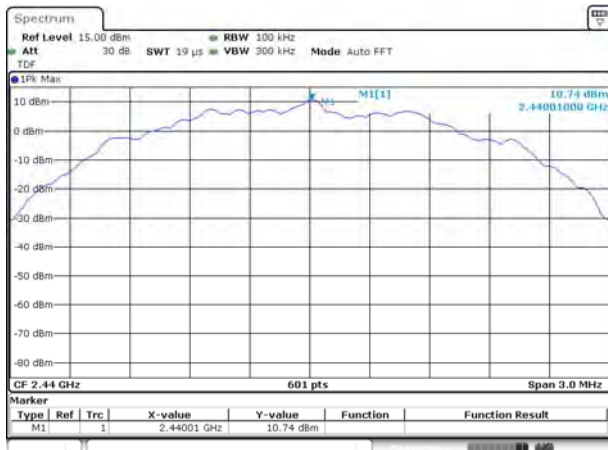


Date: 1 JUN 2019 14:49:38

GFSK (BLE) -2 Mbps MIDDLE CHANNEL ,  
SPURIOUS 30 MHz ~ 3 GHz

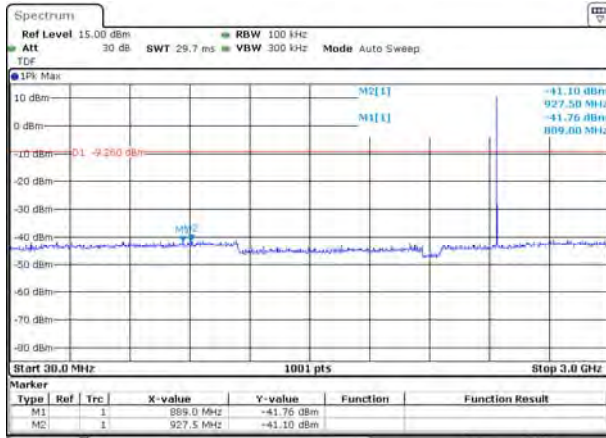


Date: 1 JUN 2019 14:50:18

GFSK (BLE) -2 Mbps MIDDLE CHANNEL ,  
SPURIOUS 3 GHz ~ 25 GHz

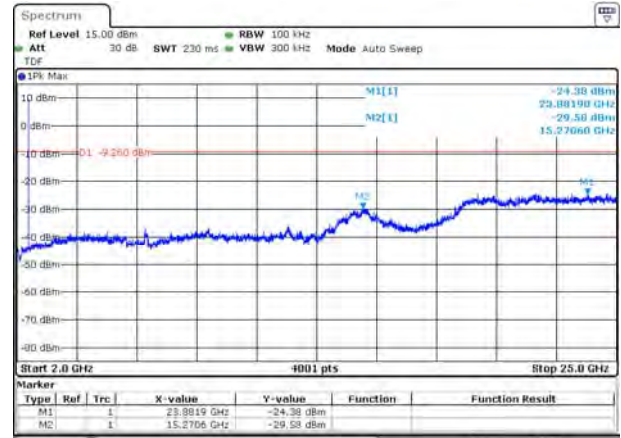


Date: 1 JUN 2019 14:50:43

GFSK (BLE) -2 Mbps HIGH CHANNEL ,  
CARRIER LEVEL

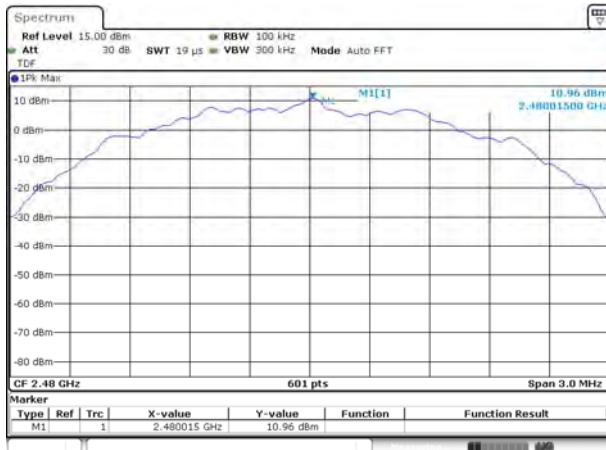


Date: 1 JUN 2019 14:53:38

GFSK (BLE) -2 Mbps HIGH CHANNEL ,  
SPURIOUS 30 MHz ~ 3 GHz

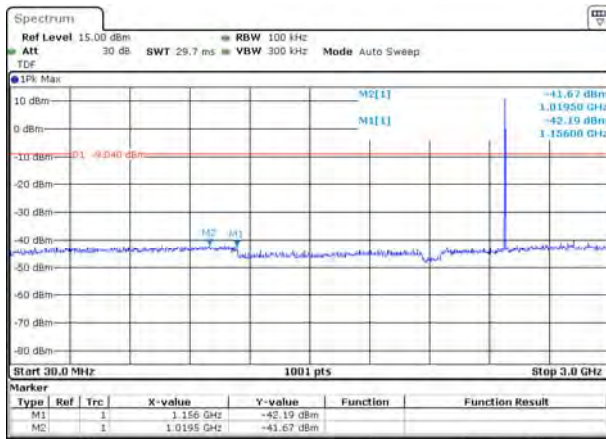

Date: 1 JUN 2019 14:54:17

GFSK (BLE) -2 Mbps HIGH CHANNEL ,  
SPURIOUS 3 GHz ~ 25 GHz

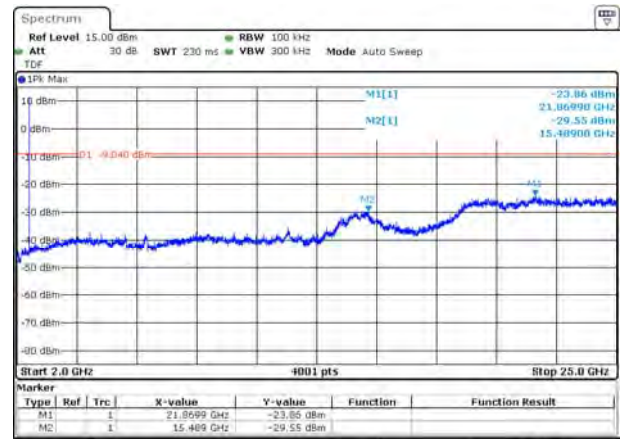

Date: 1 JUN 2019 14:54:43




ANT 1  
Test Plots

GFSK (BLE) -1 Mbps LOW CHANNEL , CARRIER LEVEL




Date: 18 MAY 2019 14:53:53

GFSK (BLE) -1 Mbps LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

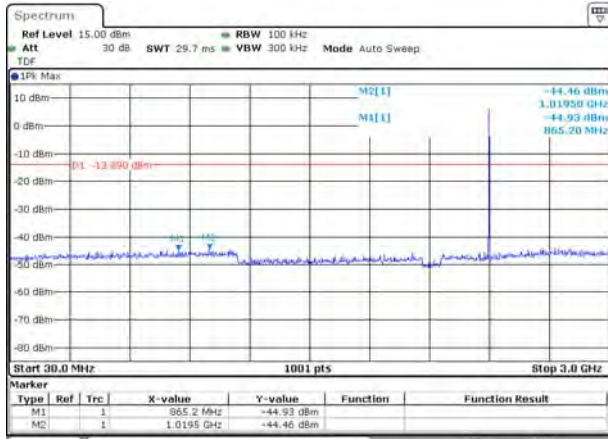


Date: 18 MAY 2019 14:54:30

GFSK (BLE) -1 Mbps LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

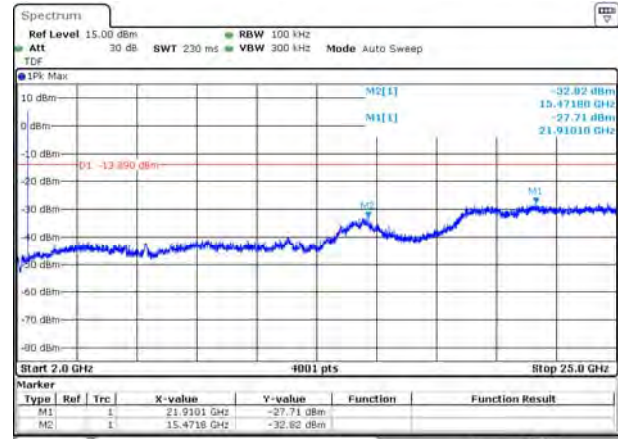


Date: 18 MAY 2019 14:55:09

GFSK (BLE) -1 Mbps MIDDLE CHANNEL , CARRIER LEVEL

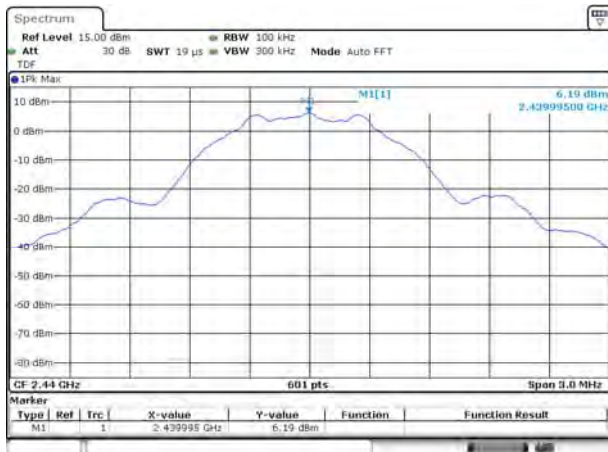


Date: 18 MAY 2019 14:56:54

GFSK (BLE) -1 Mbps MIDDLE CHANNEL ,  
SPURIOUS 30 MHz ~ 3 GHz

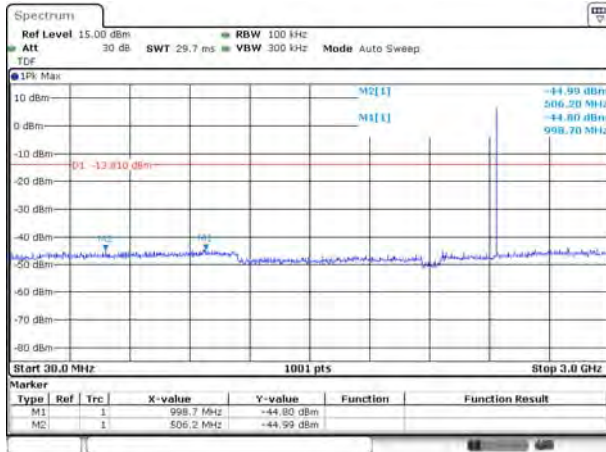


Date: 18 MAY 2019 14:57:34

GFSK (BLE) -1 Mbps MIDDLE CHANNEL ,  
SPURIOUS 3 GHz ~ 25 GHz

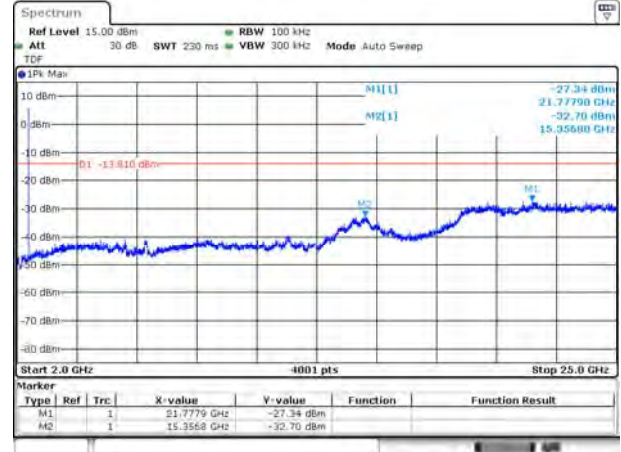


Date: 18 MAY 2019 14:58:02

GFSK (BLE) -1 Mbps HIGH CHANNEL ,  
CARRIER LEVEL

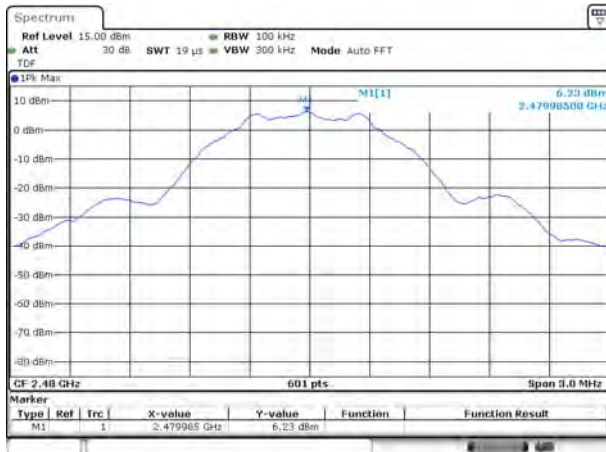


Date: 18 MAY 2019 14:59:14

GFSK (BLE) -1 Mbps HIGH CHANNEL ,  
SPURIOUS 30 MHz ~ 3 GHz

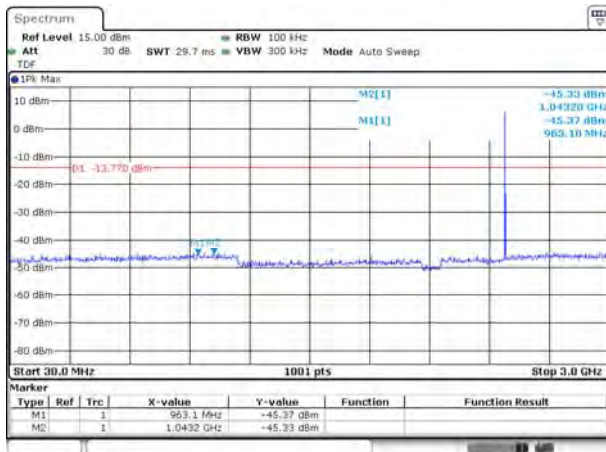

Date: 18 MAY 2019 14:59:52


GFSK (BLE) -1 Mbps HIGH CHANNEL ,  
SPURIOUS 3 GHz ~ 25 GHz

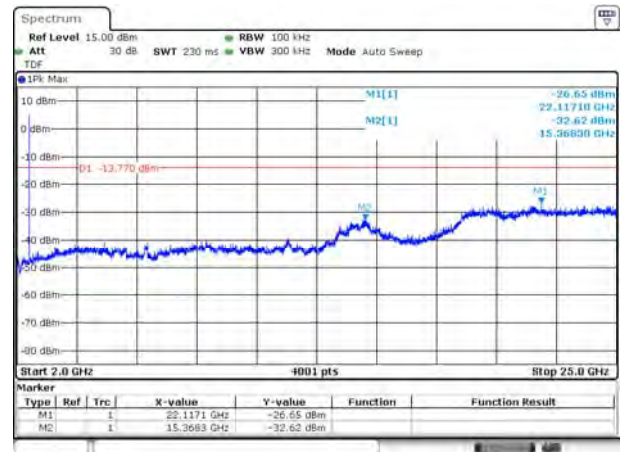

Date: 18 MAY 2019 15:00:12


ANT 1  
Test Plots

GFSK (BLE) -2 Mbps LOW CHANNEL , CARRIER LEVEL

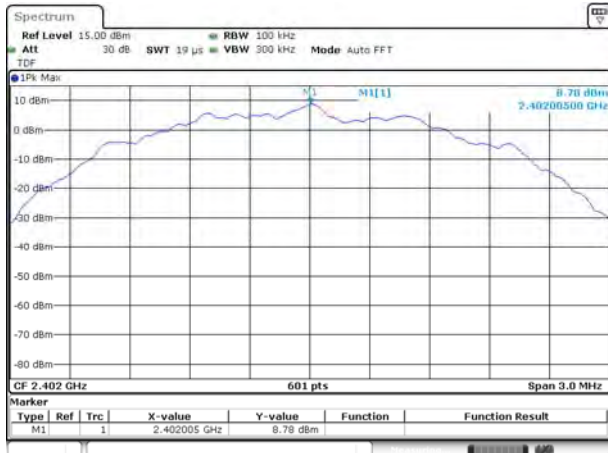


Date: 1 JUN 2019 14:01:09

GFSK (BLE) -2 Mbps LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

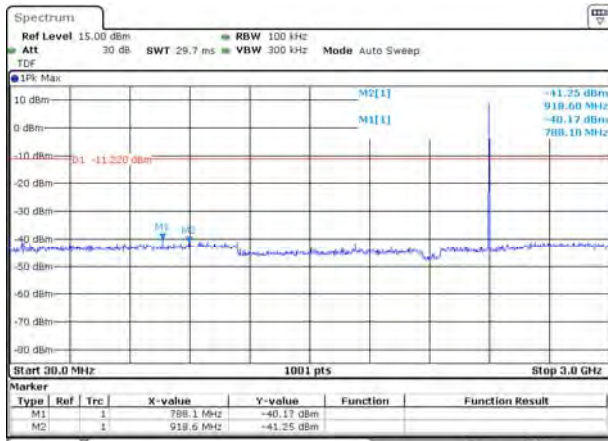


Date: 1 JUN 2019 14:01:59

GFSK (BLE) -2 Mbps LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

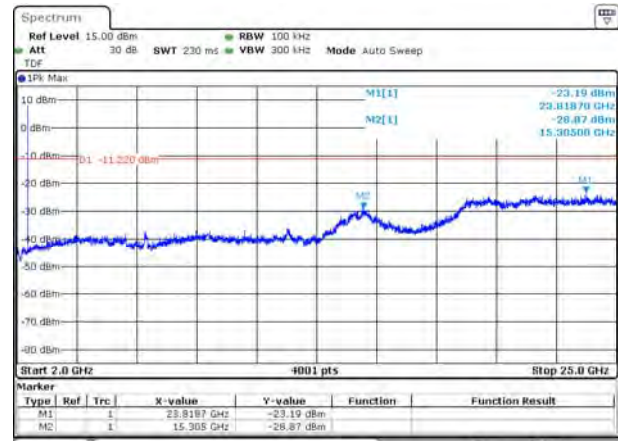


Date: 1 JUN 2019 14:02:25

GFSK (BLE) -2 Mbps MIDDLE CHANNEL , CARRIER LEVEL

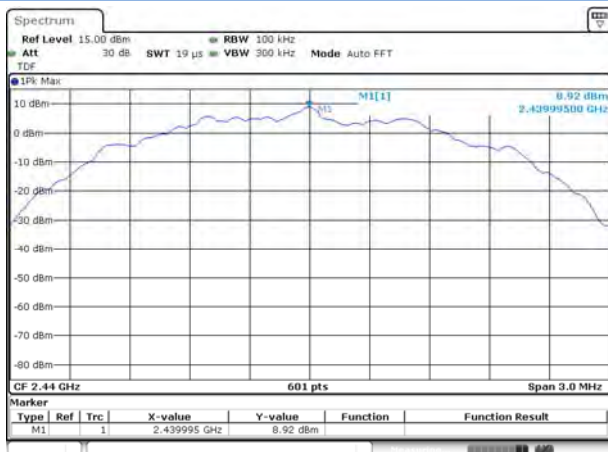


Date: 1 JUN 2019 14:04:42

GFSK (BLE) -2 Mbps MIDDLE CHANNEL ,  
SPURIOUS 30 MHz ~ 3 GHz

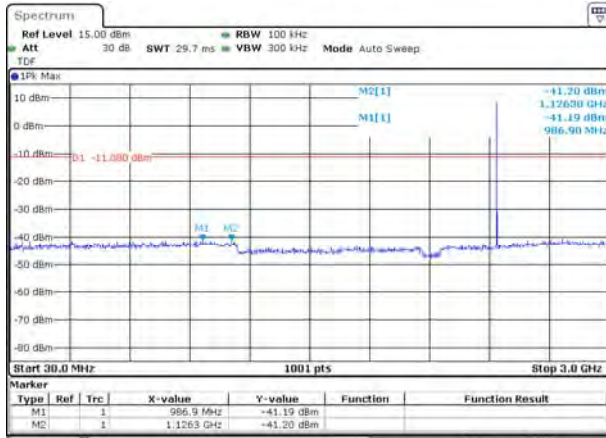


Date: 1 JUN 2019 14:05:37

GFSK (BLE) -2 Mbps MIDDLE CHANNEL ,  
SPURIOUS 3 GHz ~ 25 GHz

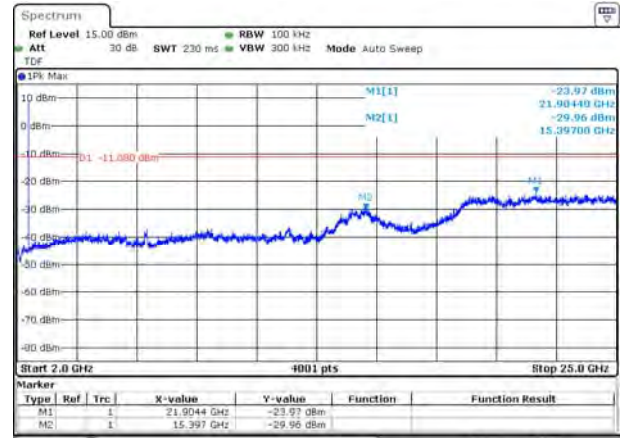


Date: 1 JUN 2019 14:05:58

GFSK (BLE) -2 Mbps HIGH CHANNEL ,  
CARRIER LEVEL

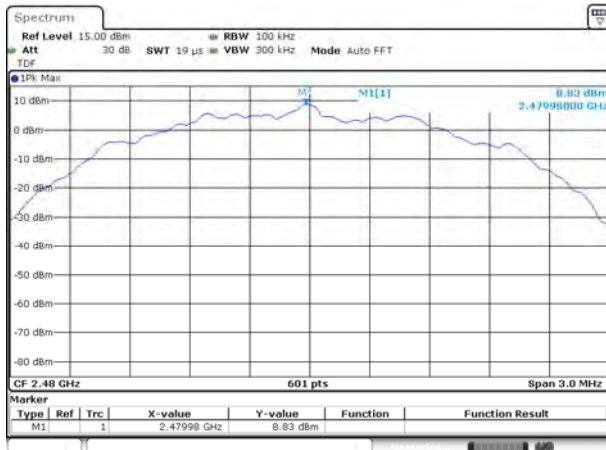


Date: 1 JUN 2019 14:07:54

GFSK (BLE) -2 Mbps HIGH CHANNEL ,  
SPURIOUS 30 MHz ~ 3 GHz

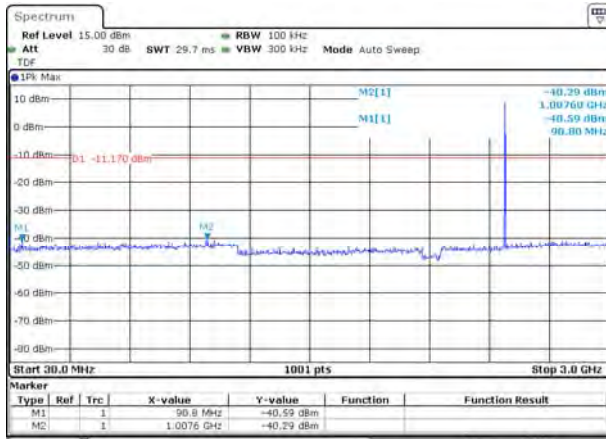

Date: 1 JUN 2019 14:08:34

GFSK (BLE) -2 Mbps HIGH CHANNEL ,  
SPURIOUS 3 GHz ~ 25 GHz

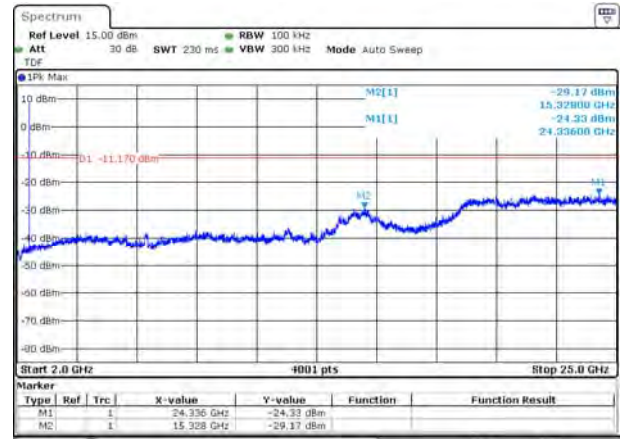

Date: 1 JUN 2019 14:08:58

## A.4 Band Edge (Authorized-band band-edge)

Note: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

### ANT 0

#### BLE-1 Mbps

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-33.58	6.97	-13.03	Pass
High Channel	-45.51	7.39	-12.61	Pass

#### BLE-2 Mbps

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-16.79	10.52	-9.48	Pass
High Channel	-40.47	10.96	-9.04	Pass

### ANT 1

#### BLE-1 Mbps

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-35.14	6.11	-13.89	Pass
High Channel	-47.17	6.23	-13.77	Pass


#### BLE-2 Mbps

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-17.90	8.78	-11.22	Pass
High Channel	-41.90	8.83	-11.17	Pass

ANT 0


Test Plots

GFSK (BLE)-1 Mbps: LOW CHANNEL, Carrier level

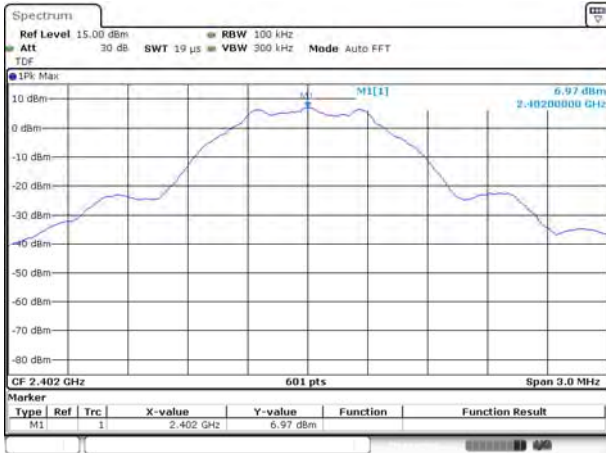


Date: 18 MAY 2019 13:56:39

GFSK (BLE)-1 Mbps: LOW CHANNEL, Reference level

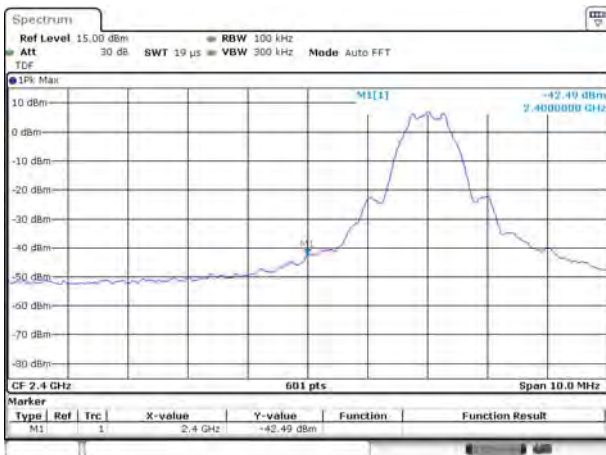


Date: 18 MAY 2019 14:02:24

GFSK (BLE)-1 Mbps: LOW CHANNEL, Band Edge level

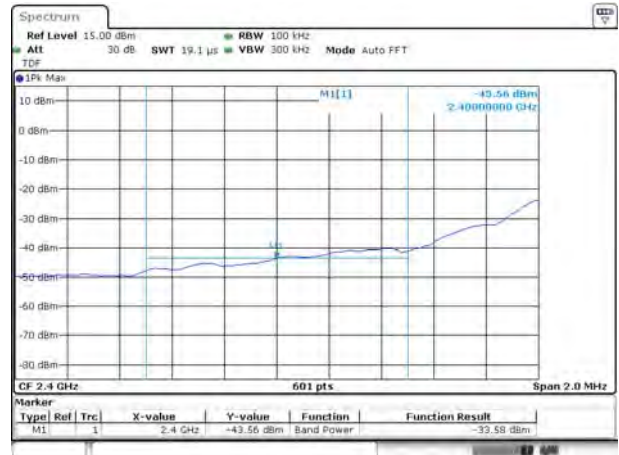


Date: 18 MAY 2019 14:02:35

GFSK (BLE)-1 Mbps: High CHANNEL, Carrier level

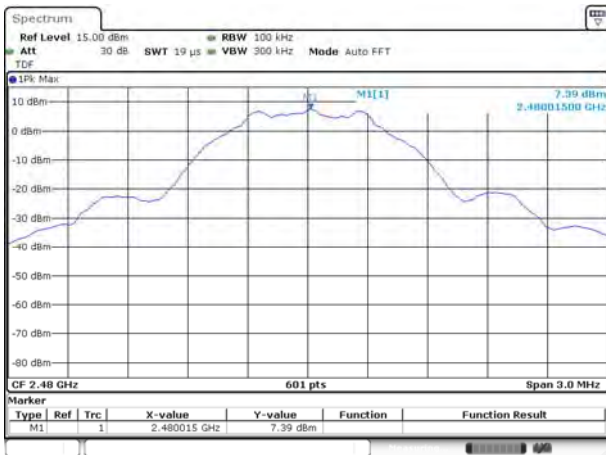


Date: 18.MAY.2019 14:09:46

GFSK (BLE)-1 Mbps: HIGH CHANNEL, Reference level

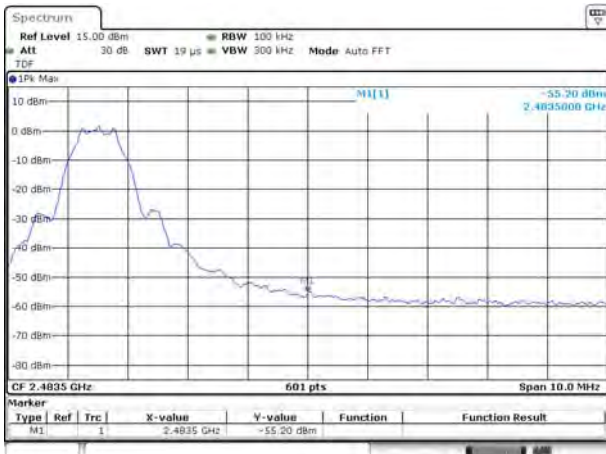


Date: 18.MAY.2019 14:10:55

GFSK (BLE)-1 Mbps: HIGH CHANNEL, Band Edge

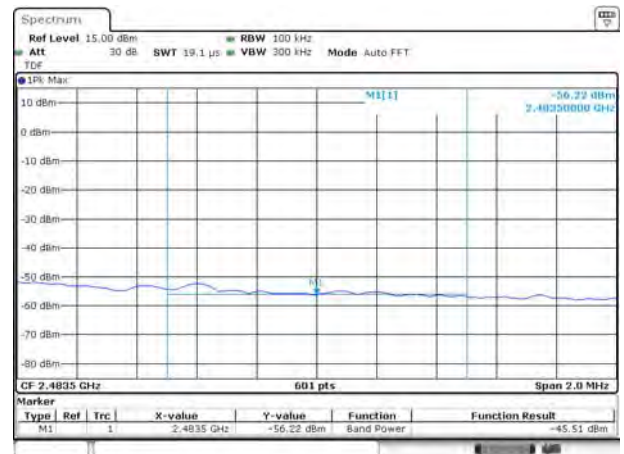


Date: 18.MAY.2019 14:11:25

GFSK (BLE)-2 Mbps: LOW CHANNEL, Carrier level

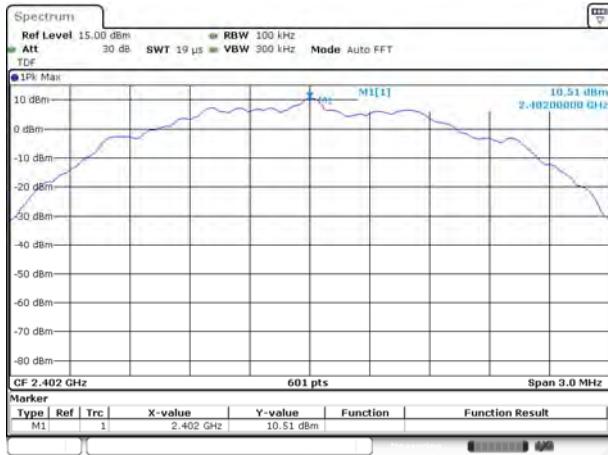


Date: 1 JUN 2019 14:41:58

GFSK (BLE)-2 Mbps: LOW CHANNEL, Reference level

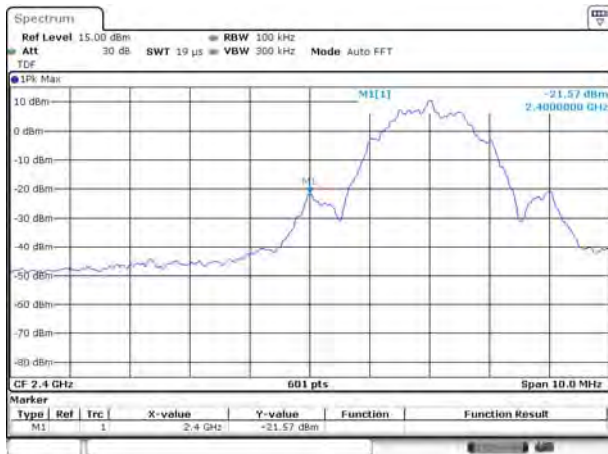

Date: 1 JUN 2019 14:48:07


GFSK (BLE)-2 Mbps: LOW CHANNEL, Band Edge level

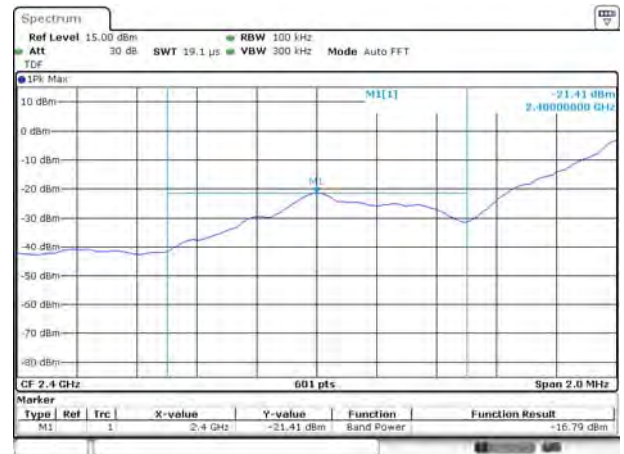

Date: 1 JUN 2019 14:48:14




GFSK (BLE)-2 Mbps: High CHANNEL, Carrier level

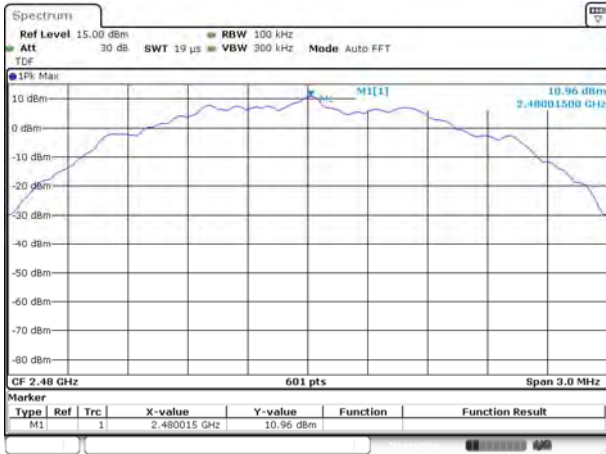


Date: 1 JUN 2019 14:53:38

GFSK (BLE)-2 Mbps: HIGH CHANNEL, Reference level

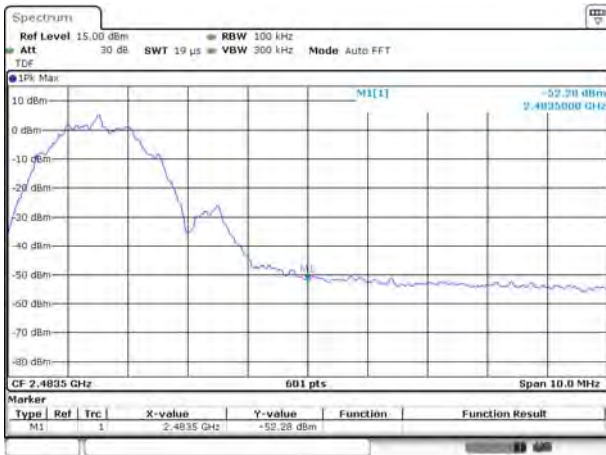

Date: 1 JUN 2019 14:54:57

GFSK (BLE)-2 Mbps: HIGH CHANNEL, Band Edge

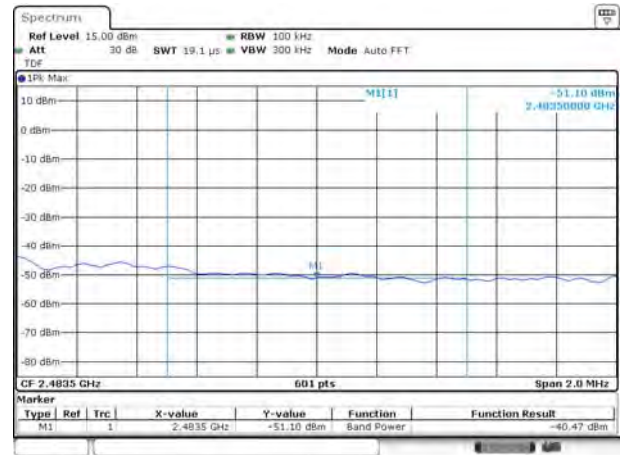

Date: 1 JUN 2019 14:55:10


ANT 1

Test Plots


GFSK (BLE)-1 Mbps: LOW CHANNEL, Carrier level



GFSK (BLE)-1 Mbps: LOW CHANNEL, Reference level

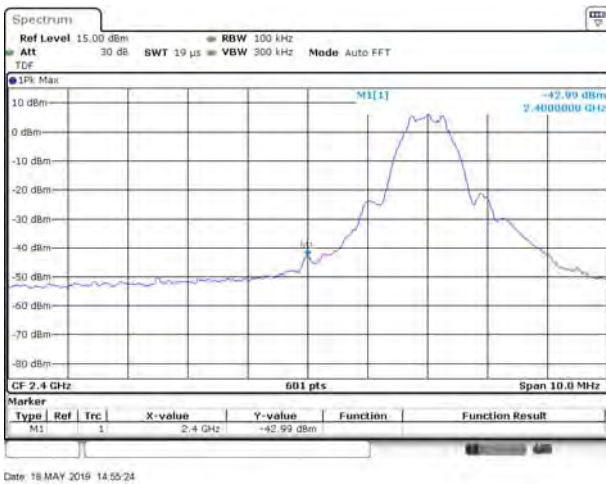


GFSK (BLE)-1 Mbps: LOW CHANNEL, Band Edge level

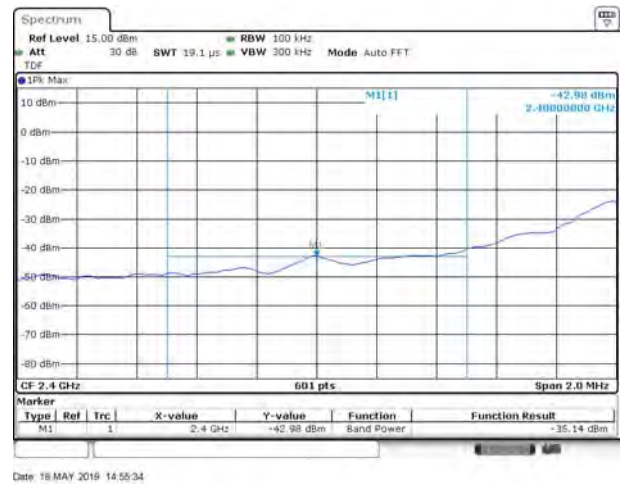


GFSK (BLE)-1 Mbps: High CHANNEL, Carrier level




GFSK (BLE)-1 Mbps: HIGH CHANNEL, Reference level

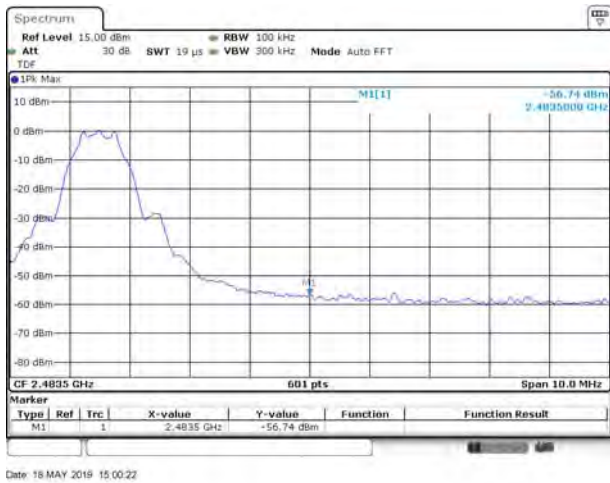

GFSK (BLE)-1 Mbps: HIGH CHANNEL, Band Edge

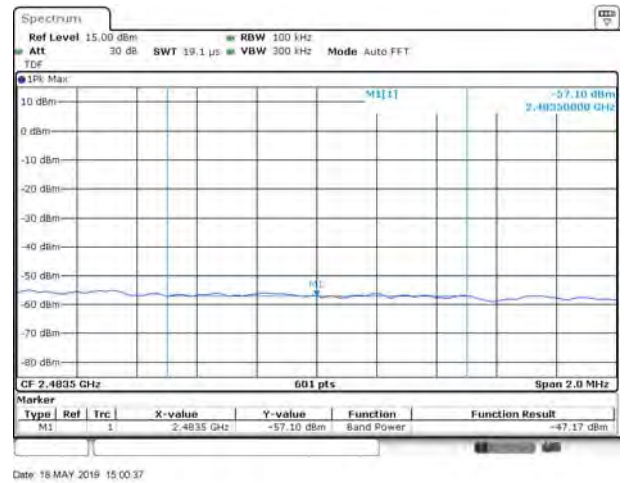


GFSK (BLE)-2 Mbps: LOW CHANNEL, Carrier level

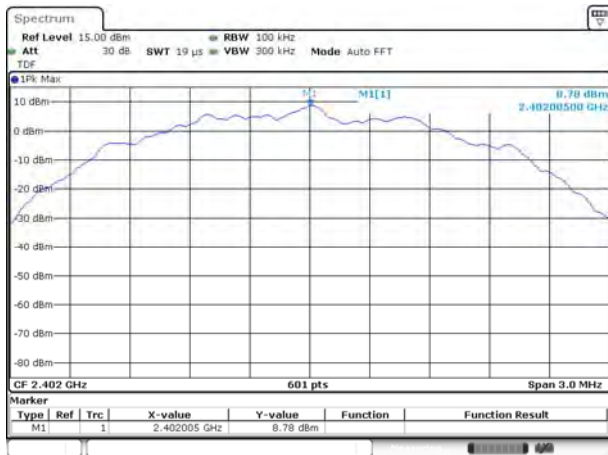


Date: 1 JUN 2019 14:01:09

GFSK (BLE)-2 Mbps: LOW CHANNEL, Reference level

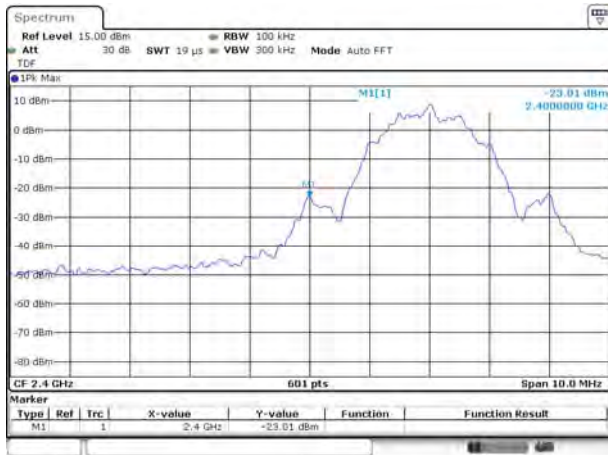


Date: 1 JUN 2019 14:02:35

GFSK (BLE)-2 Mbps: LOW CHANNEL, Band Edge

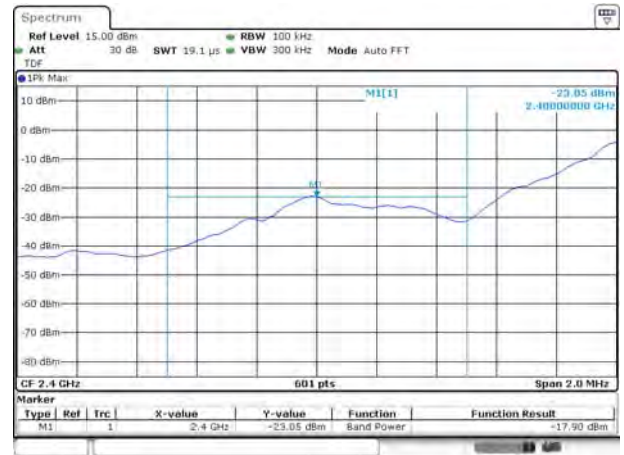


Date: 1 JUN 2019 14:02:48

GFSK (BLE)-2 Mbps: High CHANNEL, Carrier level

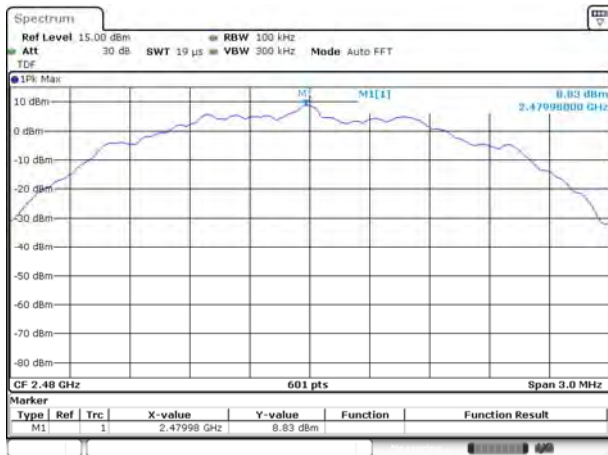


Date: 1 JUN 2019 14:07:54

GFSK (BLE)-2 Mbps: HIGH CHANNEL, Reference level

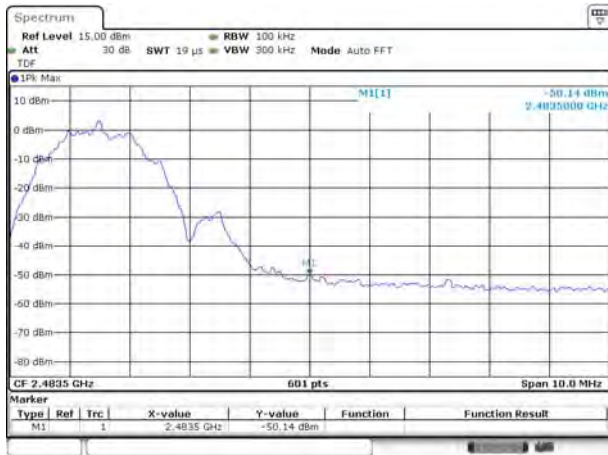

Date: 1 JUN 2019 14:09:12

GFSK (BLE)-2 Mbps: HIGH CHANNEL, Band Edge

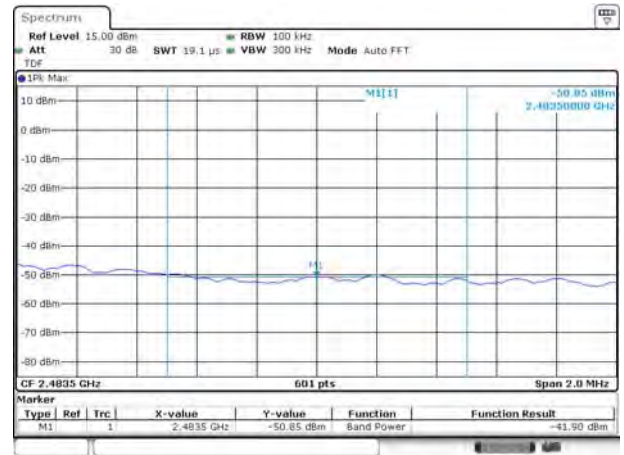

Date: 1 JUN 2019 14:09:24

## A.5 Conducted Emissions

Note 1: The EUT is working in the Normal link mode.


Note 2: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz ) shown here.

Note 3: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

ANT 0


Test Data and Plots

PHASE L

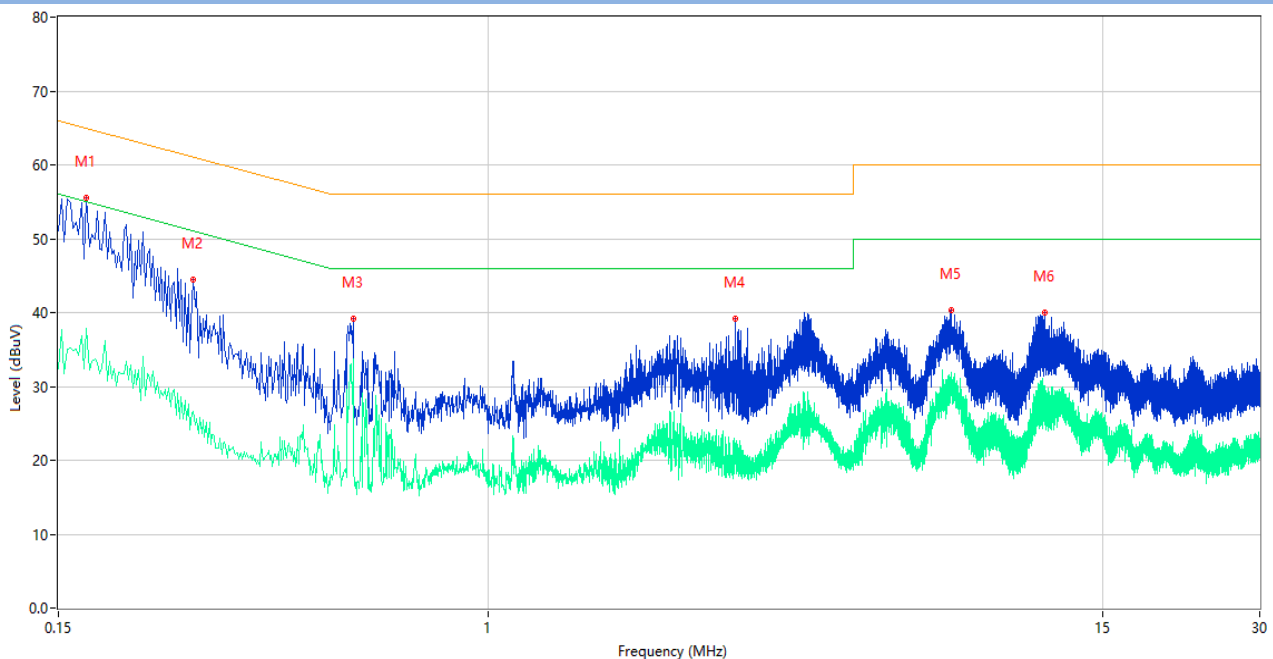

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.168	47.25	10.40	65.06	-17.81	Peak	L	Pass
1**	0.168	32.38	10.40	55.06	-22.68	AV	L	Pass
2	0.272	44.50	10.34	61.06	-16.56	Peak	L	Pass
2**	0.272	26.57	10.34	51.06	-24.49	AV	L	Pass
3	0.550	39.20	10.28	56.00	-16.80	Peak	L	Pass
3**	0.550	33.68	10.28	46.00	-12.32	AV	L	Pass
4	2.970	39.15	10.28	56.00	-16.85	Peak	L	Pass
4**	2.970	22.25	10.28	46.00	-23.75	AV	L	Pass
5	7.710	40.26	10.35	60.00	-19.74	Peak	L	Pass
5**	7.710	31.82	10.35	50.00	-18.18	AV	L	Pass
6	11.608	39.92	10.38	60.00	-20.08	Peak	L	Pass
6**	11.608	29.69	10.38	50.00	-20.31	AV	L	Pass


## PHASE N

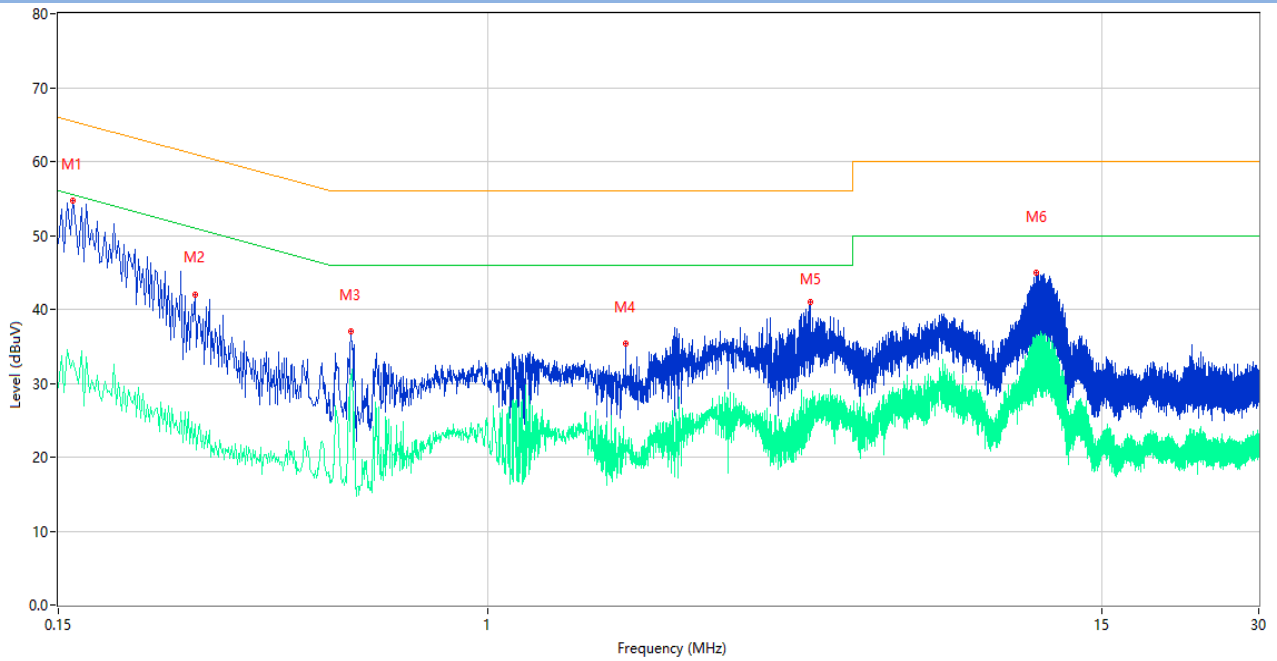

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.160	54.64	10.40	65.46	-10.82	Peak	N	Pass
1**	0.160	33.12	10.40	55.46	-22.34	AV	N	Pass
2	0.274	42.04	10.34	61.00	-18.96	Peak	N	Pass
2**	0.274	24.48	10.34	51.00	-26.52	AV	N	Pass
3	0.546	37.00	10.29	56.00	-19.00	Peak	N	Pass
3**	0.546	30.63	10.29	46.00	-15.37	AV	N	Pass
4	1.836	35.40	10.25	56.00	-20.60	Peak	N	Pass
4**	1.836	22.30	10.25	46.00	-23.70	AV	N	Pass
5	4.148	40.92	10.30	56.00	-15.08	Peak	N	Pass
5**	4.148	27.03	10.30	46.00	-18.97	AV	N	Pass
6	11.250	44.93	10.38	60.00	-15.07	Peak	N	Pass
6**	11.250	36.58	10.38	50.00	-13.42	AV	N	Pass

**ANT 1**
**Test Data and Plots**


## PHASE L

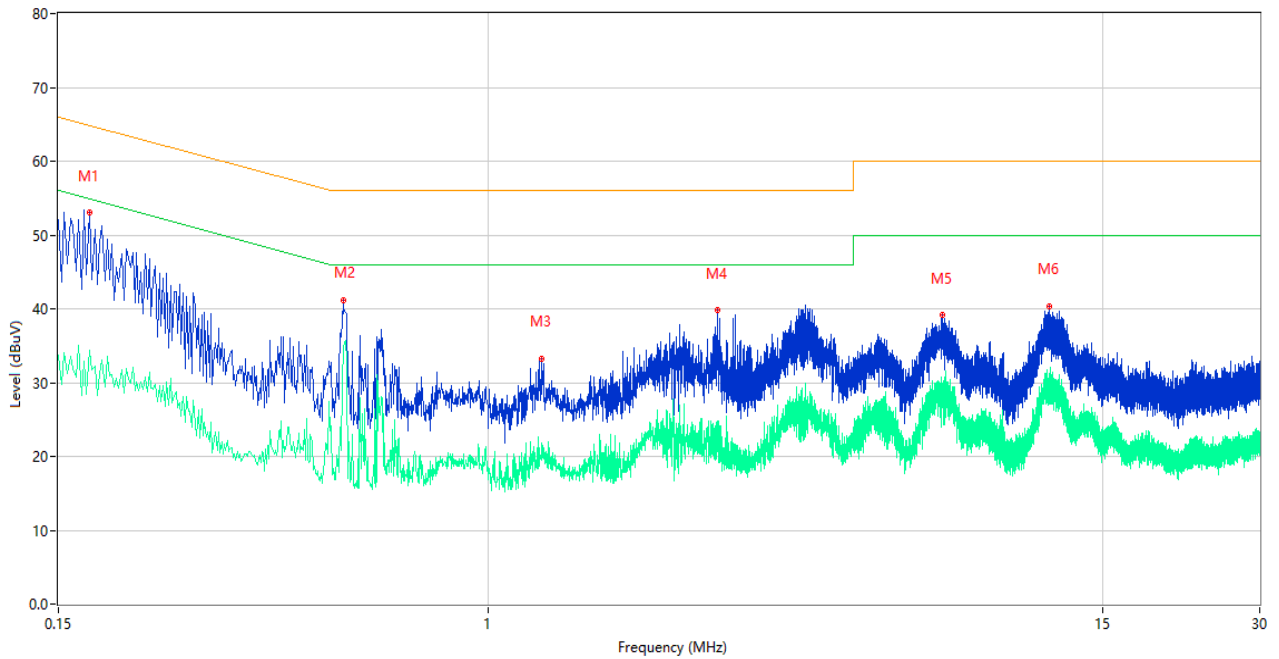

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.172	53.00	10.40	64.86	-11.86	Peak	L	Pass
1**	0.172	34.31	10.40	54.86	-20.55	AV	L	Pass
2	0.526	41.16	10.30	56.00	-14.84	Peak	L	Pass
2**	0.526	34.85	10.30	46.00	-11.15	AV	L	Pass
3	1.266	33.17	10.25	56.00	-22.83	Peak	L	Pass
3**	1.266	21.76	10.25	46.00	-24.24	AV	L	Pass
4	2.750	39.83	10.28	56.00	-16.17	Peak	L	Pass
4**	2.750	24.74	10.28	46.00	-21.26	AV	L	Pass
5	7.404	39.15	10.34	60.00	-20.85	Peak	L	Pass
5**	7.404	29.93	10.34	50.00	-20.07	AV	L	Pass
6	11.834	40.25	10.38	60.00	-19.75	Peak	L	Pass
6**	11.834	31.02	10.38	50.00	-18.98	AV	L	Pass



## PHASE N

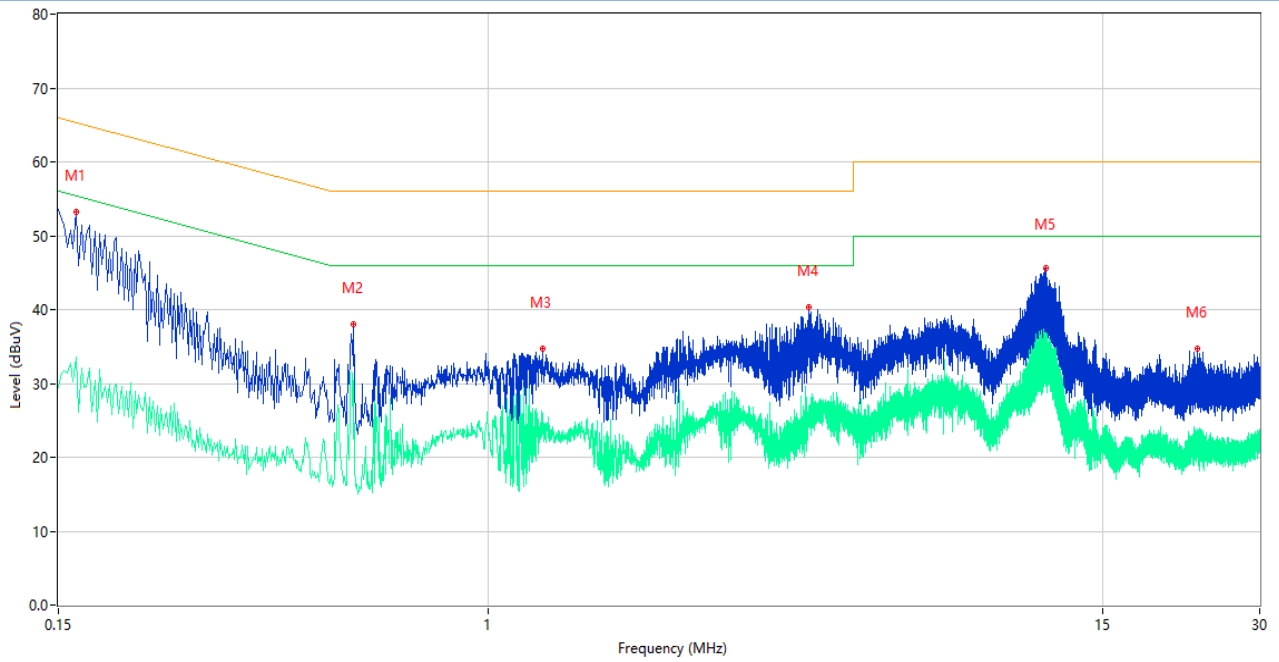

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.162	53.20	10.40	65.36	-12.16	Peak	N	Pass
1**	0.162	33.54	10.40	55.36	-21.82	AV	N	Pass
2	0.552	38.03	10.28	56.00	-17.97	Peak	N	Pass
2**	0.552	30.49	10.28	46.00	-15.51	AV	N	Pass
3	1.268	34.69	10.25	56.00	-21.31	Peak	N	Pass
3**	1.268	26.00	10.25	46.00	-20.00	AV	N	Pass
4	4.100	40.34	10.30	56.00	-15.66	Peak	N	Pass
4**	4.100	24.63	10.30	46.00	-21.37	AV	N	Pass
5	11.666	45.55	10.38	60.00	-14.45	Peak	N	Pass
5**	11.666	35.37	10.38	50.00	-14.63	AV	N	Pass
6	22.790	34.66	10.61	60.00	-25.34	Peak	N	Pass
6**	22.790	22.89	10.61	50.00	-27.11	AV	N	Pass

## A.6 Radiated Spurious Emission

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Note 4: The EUT is working in the Normal link mode below 1 GHz.

Note 5: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

### ANT 0


#### Test Data and Plots

30 MHz to 1 GHz, ANT V

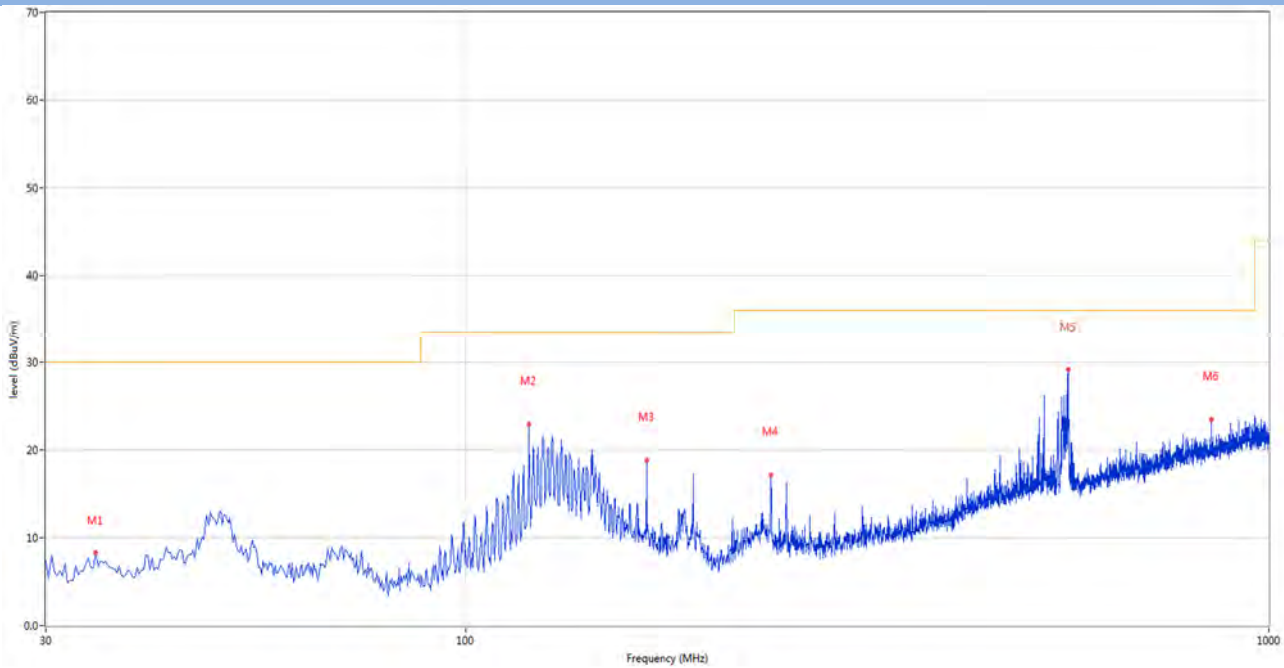

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	34.608	8.37	-27.37	30.0	-21.63	Peak	237.00	200	Vertical	Pass
2	119.967	22.96	-28.03	33.5	-10.54	Peak	356.00	100	Vertical	Pass
3	167.982	18.84	-26.51	33.5	-14.66	Peak	356.00	100	Vertical	Pass
4	240.005	17.14	-27.87	36.0	-18.86	Peak	187.00	200	Vertical	Pass
5	562.530	29.12	-19.17	36.0	-6.88	Peak	98.00	100	Vertical	Pass
6	848.680	23.47	-13.47	36.0	-12.53	Peak	351.00	100	Vertical	Pass

30 MHz to 1 GHz, ANT H

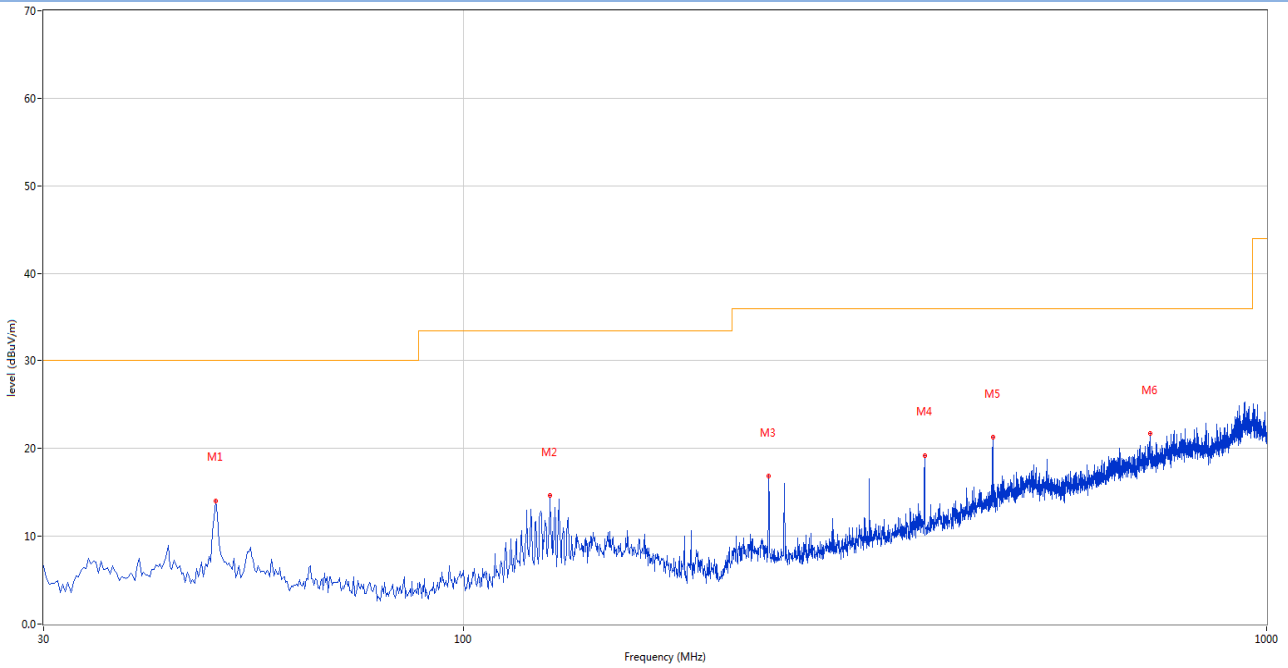


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	49.157	14.02	-27.34	30.0	-15.98	Peak	224.00	200	Horizontal	Pass
2	128.212	14.62	-27.34	33.5	-18.88	Peak	249.00	100	Horizontal	Pass
3	240.005	16.80	-27.87	36.0	-19.20	Peak	230.00	100	Horizontal	Pass
4	375.078	18.46	-23.84	36.0	-17.54	Peak	142.00	200	Horizontal	Pass
5	456.073	21.23	-21.34	36.0	-14.77	Peak	129.00	100	Horizontal	Pass
6	716.032	21.67	-15.39	36.0	-14.33	Peak	230.00	100	Horizontal	Pass

ANT 1


Test Data and Plots

30 MHz to 1 GHz, ANT V

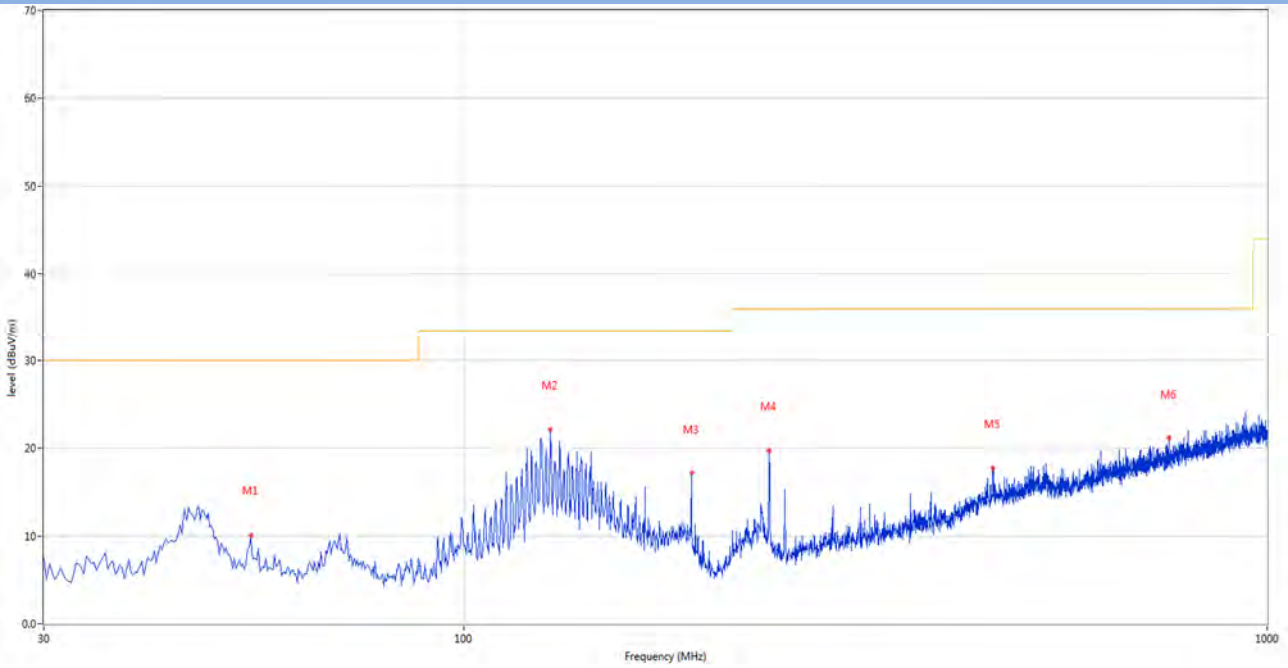

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	54.250	10.05	-27.59	30.0	-19.95	Peak	4.00	100	Vertical	Pass
2	127.970	22.12	-27.34	33.5	-11.38	Peak	192.00	200	Vertical	Pass
3	191.990	17.11	-29.18	33.5	-16.39	Peak	331.00	100	Vertical	Pass
4	240.005	19.73	-27.87	36.0	-16.27	Peak	186.00	200	Vertical	Pass
5	455.830	17.74	-21.37	36.0	-18.26	Peak	218.00	100	Vertical	Pass
6	755.075	21.13	-14.77	36.0	-14.87	Peak	243.00	100	Vertical	Pass

## 30 MHz to 1 GHz, ANT H

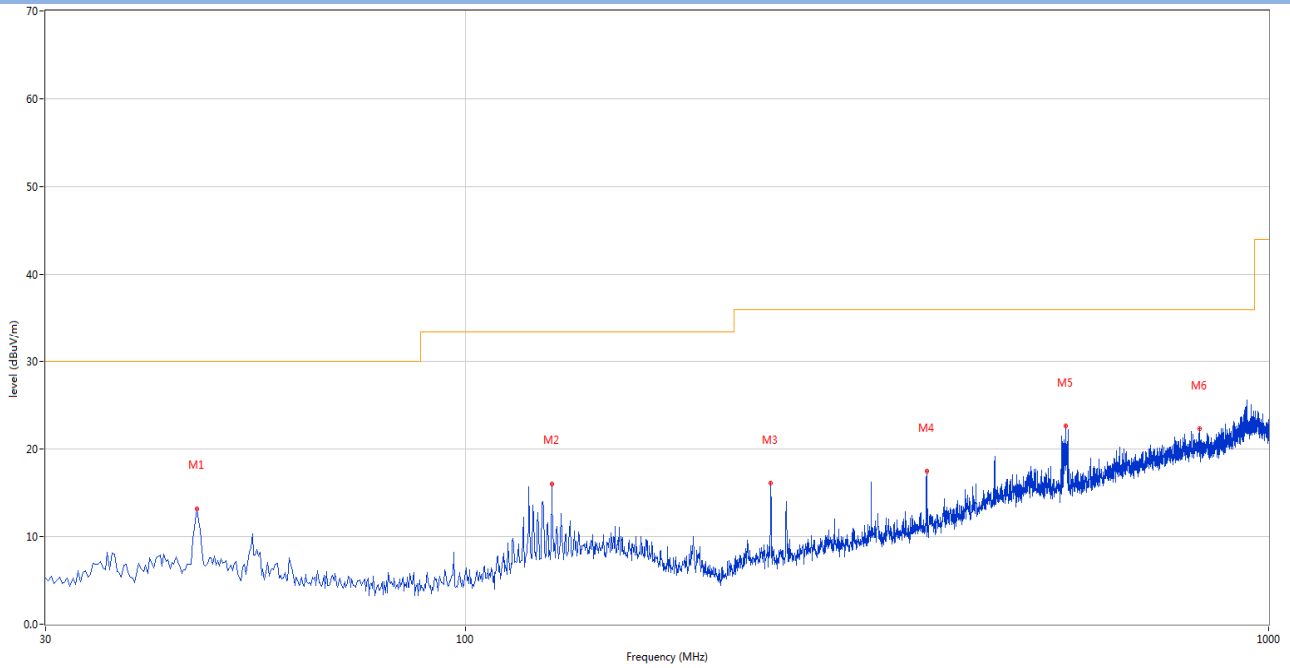


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	46.248	13.17	-27.09	30.0	-16.83	Peak	218.00	200	Horizontal	Pass
2	127.970	16.02	-27.34	33.5	-17.48	Peak	111.00	100	Horizontal	Pass
3	240.005	16.10	-27.87	36.0	-19.90	Peak	249.00	200	Horizontal	Pass
4	375.078	17.43	-23.84	36.0	-18.57	Peak	111.00	100	Horizontal	Pass
5	559.135	22.60	-19.21	36.0	-13.40	Peak	256.00	100	Horizontal	Pass
6	820.308	22.29	-13.47	36.0	-13.71	Peak	360.00	200	Horizontal	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.


**ANT 0**

GFSK (BLE) -1 Mbps LOW CHANNEL 1 GHz to 18 GHz, ANT V

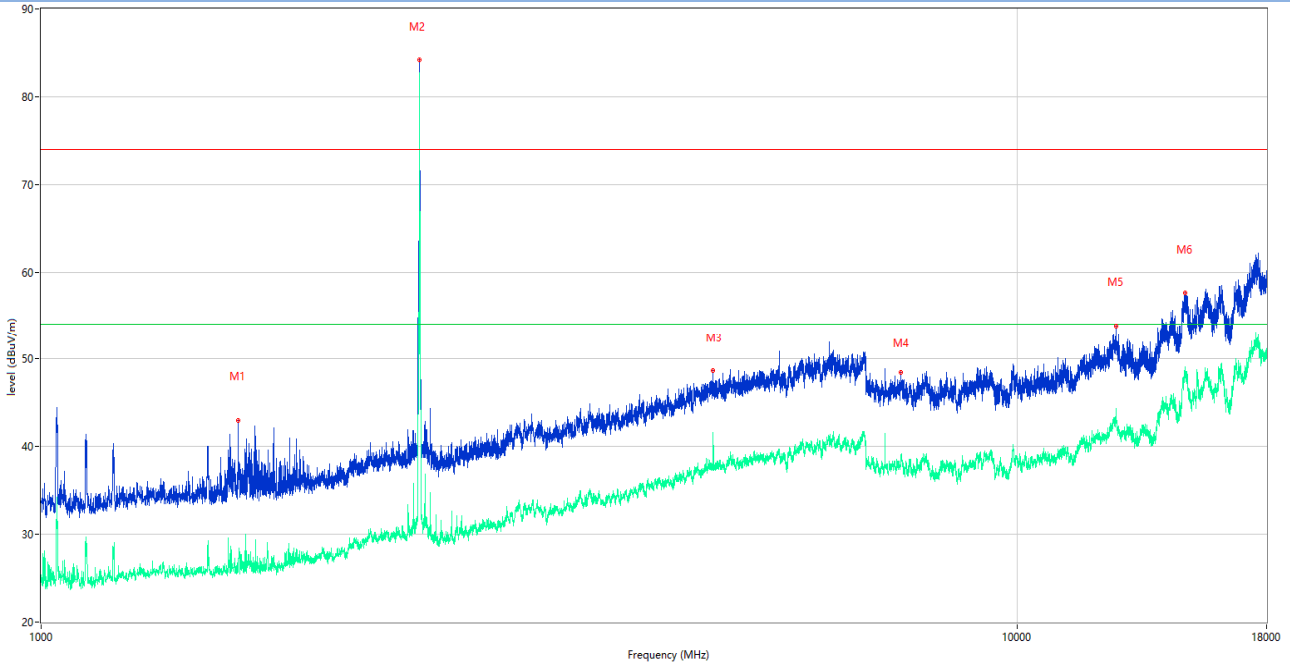


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1592.000	27.28	-15.26	54.0	-26.72	AV	2.00	150	Vertical	Pass
1	1592.000	43.00	-15.26	74.0	-31.00	Peak	2.00	150	Vertical	Pass
2**	2402.500	82.71	-10.95	54.0	28.71	AV	187.00	150	Vertical	N/A
2	2402.500	84.21	-10.95	74.0	10.21	Peak	187.00	150	Vertical	N/A
3**	4880.000	38.55	-1.60	54.0	-15.45	AV	212.00	150	Vertical	Pass
3	4880.000	48.63	-1.60	74.0	-25.37	Peak	212.00	150	Vertical	Pass
4**	7599.437	38.30	17.39	54.0	-15.70	AV	-3.00	150	Vertical	Pass
4	7599.437	48.41	17.39	74.0	-25.59	Peak	-3.00	150	Vertical	Pass
5**	12616.313	43.16	22.24	54.0	-10.84	AV	220.00	150	Vertical	Pass
5	12616.313	53.86	22.24	74.0	-20.14	Peak	220.00	150	Vertical	Pass
6**	14855.250	48.29	27.07	54.0	-5.71	AV	12.00	150	Vertical	Pass
6	14855.250	57.61	27.07	74.0	-16.39	Peak	12.00	150	Vertical	Pass

## GFSK (BLE) -1 Mbps LOW CHANNEL 1 GHz to 18 GHz, ANT H

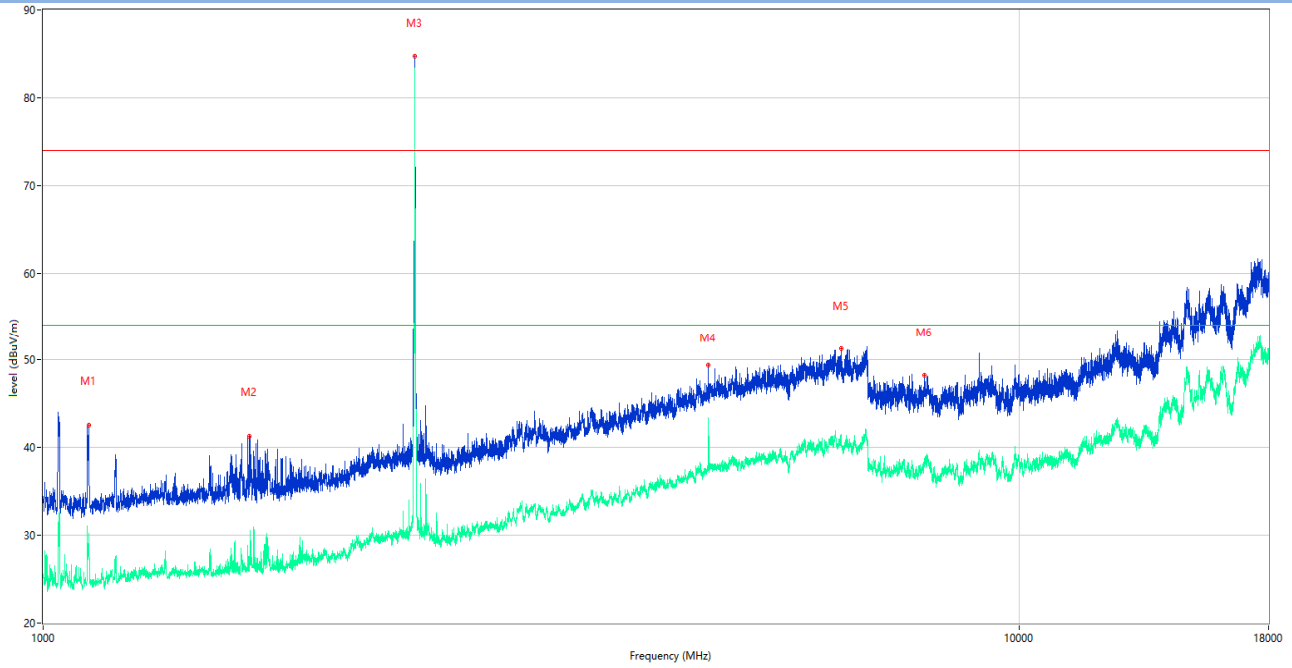

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1114.000	30.28	-15.43	54.0	-23.72	AV	254.00	150	Horizontal	Pass
1	1114.000	42.59	-15.43	74.0	-31.41	Peak	254.00	150	Horizontal	Pass
2**	1627.000	25.88	-15.12	54.0	-28.12	AV	295.00	150	Horizontal	Pass
2	1627.000	41.31	-15.12	74.0	-32.69	Peak	295.00	150	Horizontal	Pass
3**	2402.000	80.84	-10.49	54.0	26.84	AV	212.00	150	Horizontal	N/A
3	2402.000	84.72	-10.49	74.0	10.72	Peak	212.00	150	Horizontal	N/A
4**	4803.000	37.60	-1.92	54.0	-16.40	AV	202.00	150	Horizontal	Pass
4	4803.000	49.44	-1.92	74.0	-24.56	Peak	202.00	150	Horizontal	Pass
5**	6571.000	40.48	2.66	54.0	-13.52	AV	120.00	150	Horizontal	Pass
5	6571.000	51.28	2.66	74.0	-22.72	Peak	120.00	150	Horizontal	Pass
6**	8000.500	38.04	17.82	54.0	-15.96	AV	1.00	150	Horizontal	Pass
6	8000.500	48.21	17.82	74.0	-25.79	Peak	1.00	150	Horizontal	Pass


## GFSK (BLE) -1 Mbps MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

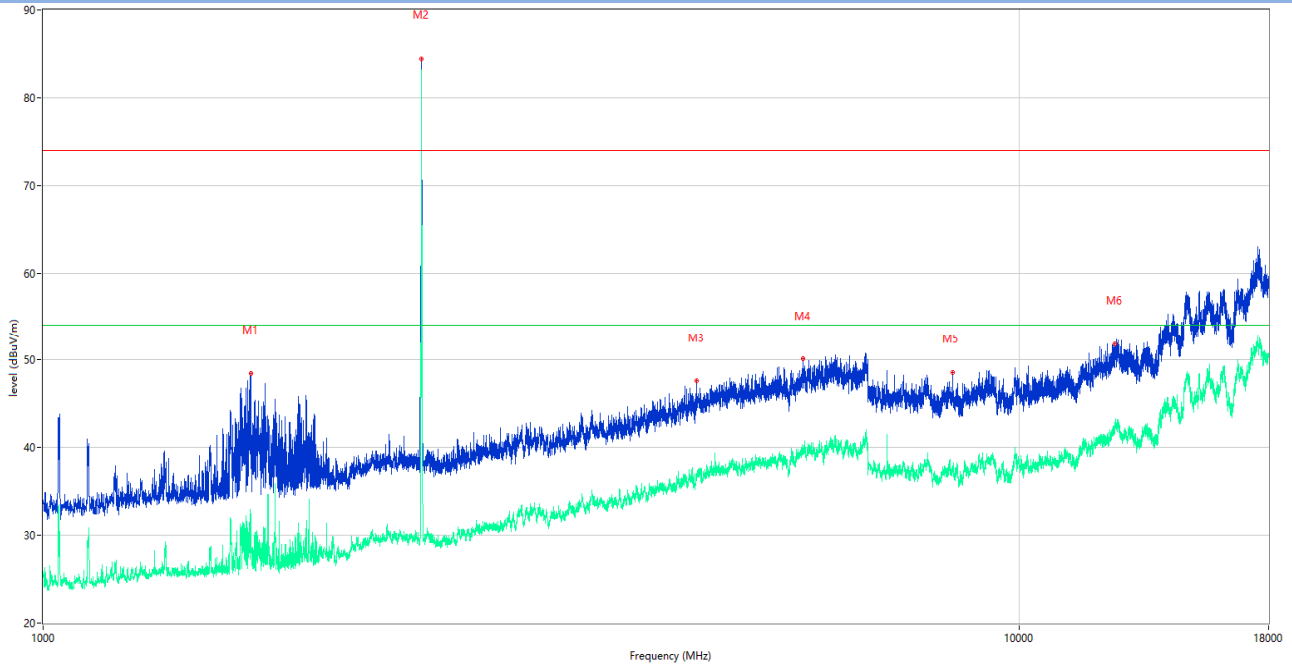

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1631.500	29.64	-14.95	54.0	-24.36	AV	226.00	150	Vertical	Pass
1	1631.500	48.47	-14.95	74.0	-25.53	Peak	226.00	150	Vertical	Pass
2**	2439.500	70.84	-10.98	54.0	16.84	AV	183.00	150	Vertical	N/A
2	2439.500	84.44	-10.98	74.0	10.44	Peak	183.00	150	Vertical	N/A
3**	4674.000	36.80	-2.26	54.0	-17.20	AV	3.00	150	Vertical	Pass
3	4674.000	47.57	-2.26	74.0	-26.43	Peak	3.00	150	Vertical	Pass
4**	6001.000	39.24	2.24	54.0	-14.76	AV	12.00	150	Vertical	Pass
4	6001.000	50.15	2.24	74.0	-23.85	Peak	12.00	150	Vertical	Pass
5**	8541.000	37.49	17.54	54.0	-16.51	AV	15.00	150	Vertical	Pass
5	8541.000	48.61	17.54	74.0	-25.39	Peak	15.00	150	Vertical	Pass
6**	12530.062	42.54	21.37	54.0	-11.46	AV	15.00	150	Vertical	Pass
6	12530.062	51.86	21.37	74.0	-22.14	Peak	15.00	150	Vertical	Pass




## GFSK (BLE) -1 Mbps MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

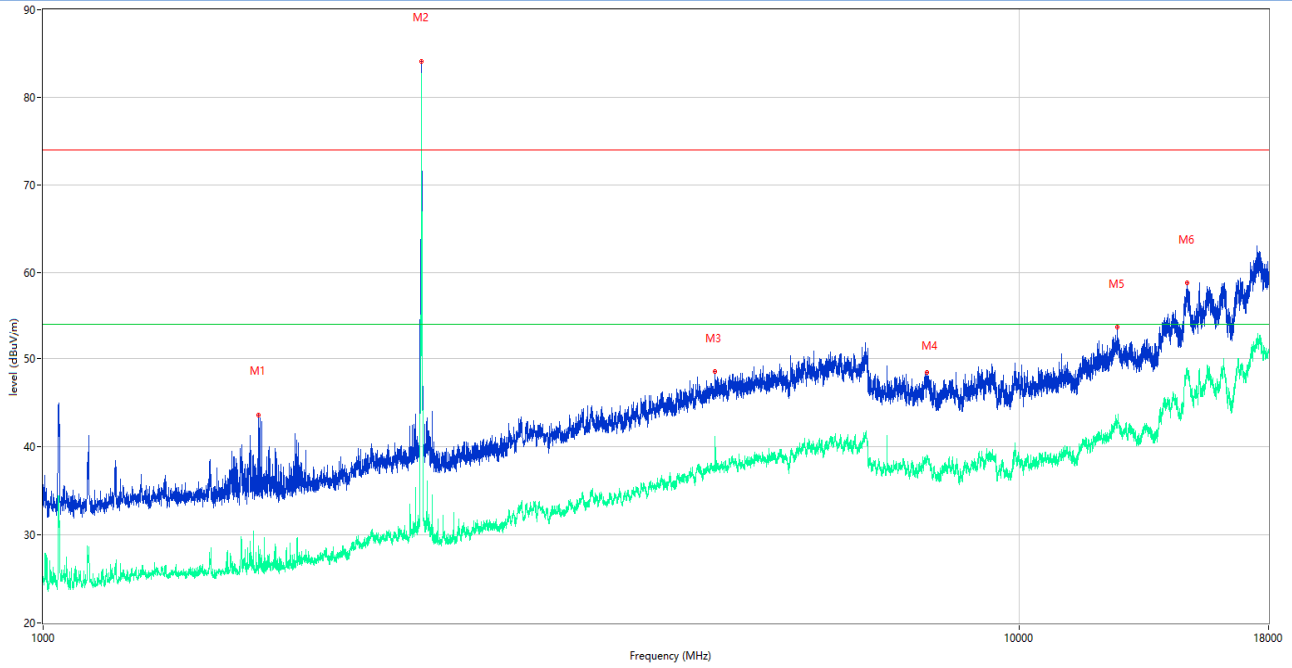


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1662.000	26.15	-15.44	54.0	-27.85	AV	195.00	150	Horizontal	Pass
1	1662.000	43.65	-15.44	74.0	-30.35	Peak	195.00	150	Horizontal	Pass
2**	2440.000	80.44	-10.97	54.0	26.44	AV	195.00	150	Horizontal	N/A
2	2440.000	84.10	-10.97	74.0	10.10	Peak	195.00	150	Horizontal	N/A
3**	4880.000	39.39	-1.60	54.0	-14.61	AV	23.00	150	Horizontal	Pass
3	4880.000	48.54	-1.60	74.0	-25.46	Peak	23.00	150	Horizontal	Pass
4**	8043.625	39.01	18.21	54.0	-14.99	AV	68.00	150	Horizontal	Pass
4	8043.625	48.49	18.21	74.0	-25.51	Peak	68.00	150	Horizontal	Pass
5**	12606.250	42.49	22.09	54.0	-11.51	AV	272.00	150	Horizontal	Pass
5	12606.250	53.69	22.09	74.0	-20.31	Peak	272.00	150	Horizontal	Pass
6**	14867.063	48.54	26.91	54.0	-5.46	AV	1.00	150	Horizontal	Pass
6	14867.063	58.76	26.91	74.0	-15.24	Peak	1.00	150	Horizontal	Pass

## GFSK (BLE) -1 Mbps HIGH CHANNEL 1 GHz to 18 GHz, ANT V

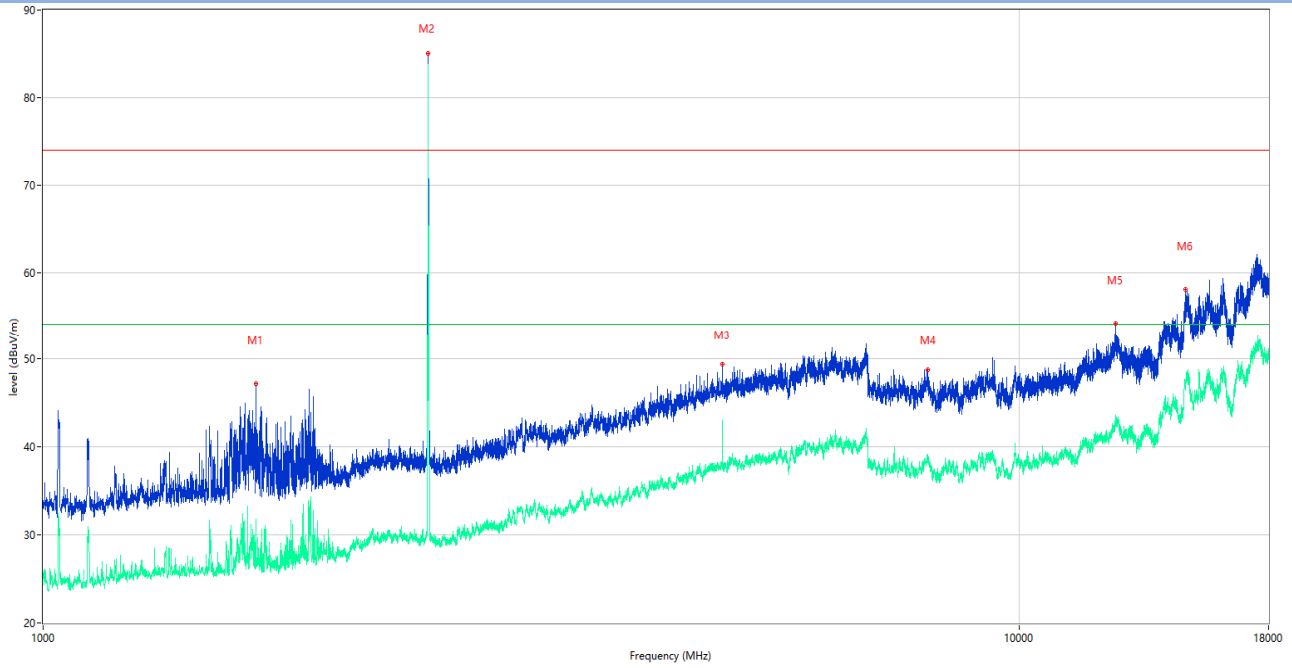


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1650.500	26.24	-15.50	54.0	-27.76	AV	193.00	150	Vertical	Pass
1	1650.500	47.20	-15.50	74.0	-26.80	Peak	193.00	150	Vertical	Pass
2**	2480.000	81.49	-10.01	54.0	27.49	AV	193.00	150	Vertical	N/A
2	2480.000	85.04	-10.01	74.0	11.04	Peak	193.00	150	Vertical	N/A
3**	4960.000	39.79	-1.73	54.0	-14.21	AV	260.00	150	Vertical	Pass
3	4960.000	49.37	-1.73	74.0	-24.63	Peak	260.00	150	Vertical	Pass
4**	8050.812	38.29	18.28	54.0	-15.71	AV	111.00	150	Vertical	Pass
4	8050.812	48.82	18.28	74.0	-25.18	Peak	111.00	150	Vertical	Pass
5**	12550.187	42.92	21.77	54.0	-11.08	AV	69.00	150	Vertical	Pass
5	12550.187	54.15	21.77	74.0	-19.85	Peak	69.00	150	Vertical	Pass
6**	14785.688	47.02	25.95	54.0	-6.98	AV	10.00	150	Vertical	Pass
6	14785.688	58.02	25.95	74.0	-15.98	Peak	10.00	150	Vertical	Pass

GFSK (BLE) -1 Mbps HIGH CHANNEL 1 GHz to 18 GHz, ANT H

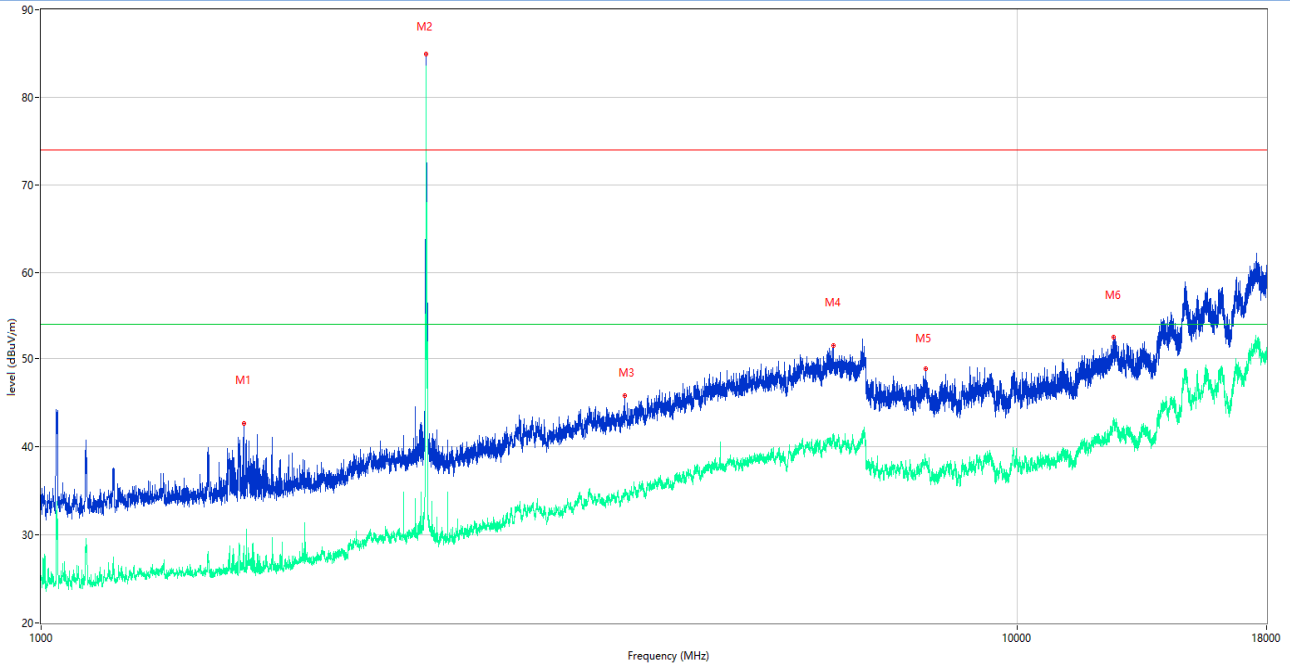


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1614.000	25.94	-15.45	54.0	-28.06	AV	155.00	150	Horizontal	Pass
1	1614.000	42.63	-15.45	74.0	-31.37	Peak	155.00	150	Horizontal	Pass
2**	2480.500	83.53	-9.97	54.0	29.53	AV	194.00	150	Horizontal	N/A
2	2480.500	84.90	-9.97	74.0	10.90	Peak	194.00	150	Horizontal	N/A
3**	3958.000	34.50	-5.26	54.0	-19.50	AV	1.00	150	Horizontal	Pass
3	3958.000	45.88	-5.26	74.0	-28.12	Peak	1.00	150	Horizontal	Pass
4**	6476.000	41.14	3.47	54.0	-12.86	AV	48.00	150	Horizontal	Pass
4	6476.000	51.57	3.47	74.0	-22.43	Peak	48.00	150	Horizontal	Pass
5**	8060.875	38.02	18.30	54.0	-15.98	AV	4.00	150	Horizontal	Pass
5	8060.875	48.85	18.30	74.0	-25.15	Peak	4.00	150	Horizontal	Pass
6**	12548.750	42.76	21.76	54.0	-11.24	AV	15.00	150	Horizontal	Pass
6	12548.750	52.43	21.76	74.0	-21.57	Peak	15.00	150	Horizontal	Pass

## GFSK (BLE) -2 Mbps LOW CHANNEL 1 GHz to 18 GHz, ANT V

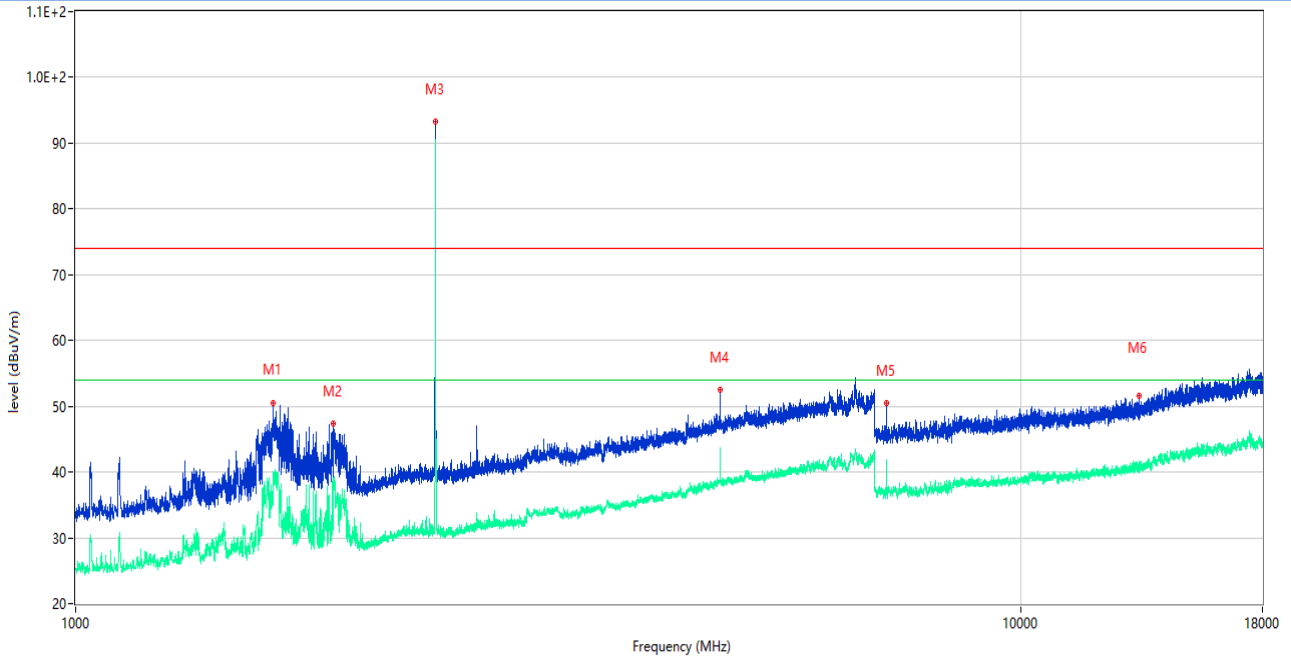


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1617.000	39.40	-17.18	54.0	-14.60	AV	71.00	150	Vertical	Pass
1	1617.000	50.55	-17.18	74.0	-23.45	Peak	71.00	150	Vertical	Pass
2**	1874.500	37.21	-16.12	54.0	-16.79	AV	96.00	150	Vertical	Pass
2	1874.500	47.36	-16.12	74.0	-26.64	Peak	96.00	150	Vertical	Pass
3**	2401.500	83.17	-11.82	54.0	29.17	AV	92.00	150	Vertical	N/A
3	2401.500	93.32	-11.82	74.0	19.32	Peak	92.00	150	Vertical	N/A
4**	4805.000	43.57	-2.96	54.0	-10.43	AV	146.00	150	Vertical	Pass
4	4805.000	52.56	-2.96	74.0	-21.44	Peak	146.00	150	Vertical	Pass
5**	7204.125	36.80	-3.47	54.0	-17.20	AV	128.00	150	Vertical	Pass
5	7204.125	50.41	-3.47	74.0	-23.59	Peak	128.00	150	Vertical	Pass
6**	13328.812	40.56	1.43	54.0	-13.44	AV	331.00	150	Vertical	Pass
6	13328.812	51.54	1.43	74.0	-22.46	Peak	331.00	150	Vertical	Pass

## GFSK (BLE) -2 Mbps LOW CHANNEL 1 GHz to 18 GHz, ANT H

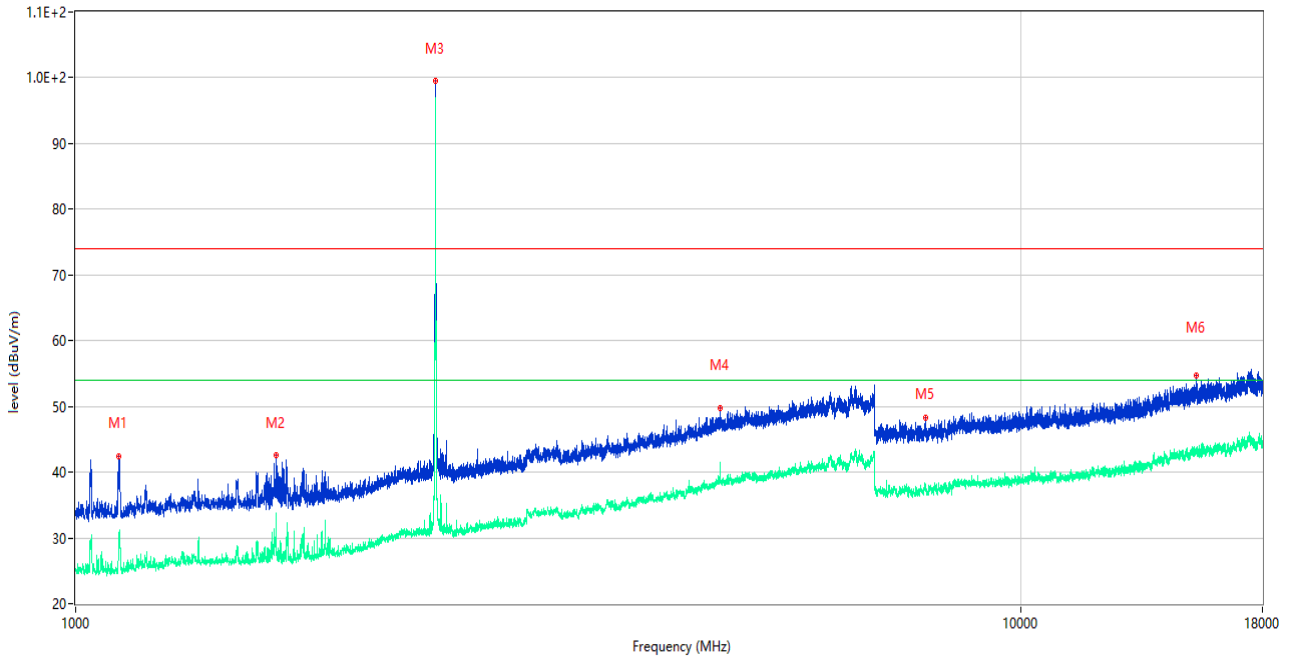


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1109.500	27.08	-18.37	54.0	-26.92	AV	118.00	150	Horizontal	Pass
1	1109.500	42.42	-18.37	74.0	-31.58	Peak	118.00	150	Horizontal	Pass
2**	1630.000	30.15	-17.11	54.0	-23.85	AV	48.00	150	Horizontal	Pass
2	1630.000	42.59	-17.11	74.0	-31.41	Peak	48.00	150	Horizontal	Pass
3**	2401.500	90.90	-11.82	54.0	36.90	AV	57.00	150	Horizontal	N/A
3	2401.500	99.46	-11.82	74.0	25.46	Peak	57.00	150	Horizontal	N/A
4**	4800.000	38.66	-2.62	54.0	-15.34	AV	344.00	150	Horizontal	Pass
4	4800.000	49.77	-2.62	74.0	-24.23	Peak	344.00	150	Horizontal	Pass
5**	7924.313	38.10	-1.91	54.0	-15.90	AV	159.00	150	Horizontal	Pass
5	7924.313	48.36	-1.91	74.0	-25.64	Peak	159.00	150	Horizontal	Pass
6**	15308.063	42.73	1.52	54.0	-11.27	AV	274.00	150	Horizontal	Pass
6	15308.063	54.62	1.52	74.0	-19.38	Peak	274.00	150	Horizontal	Pass

## GFSK (BLE) -2 Mbps MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

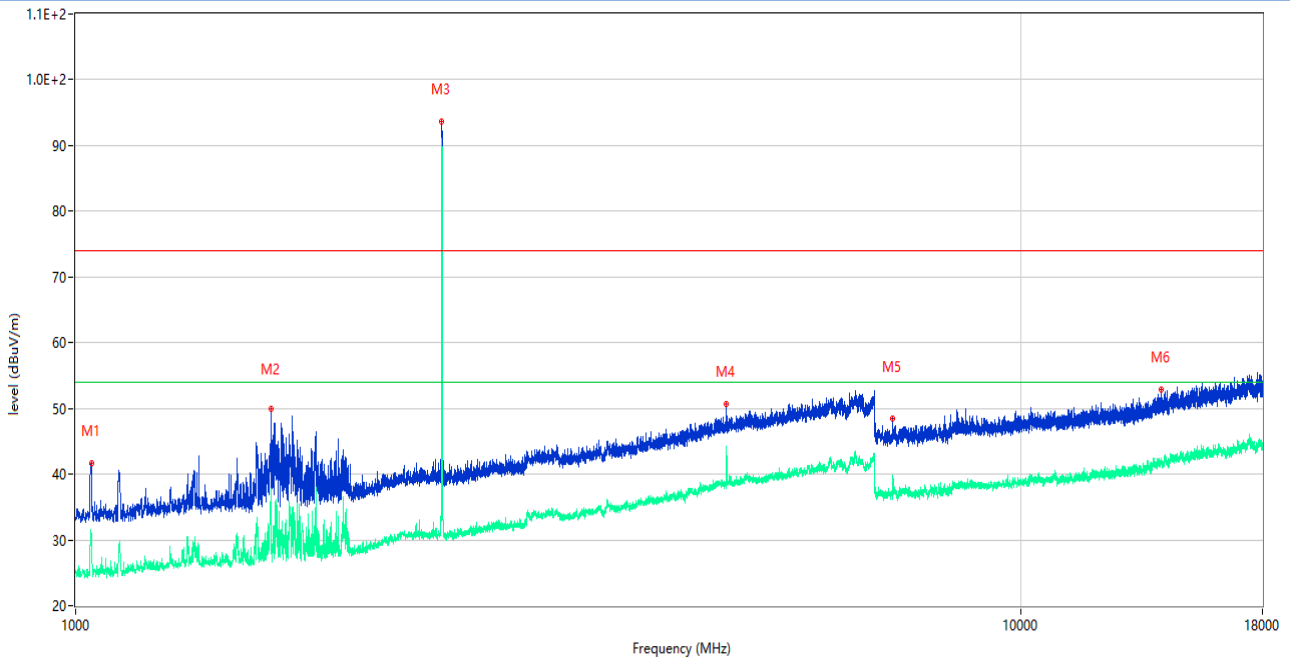


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1040.000	30.94	-18.00	54.0	-23.06	AV	212.00	150	Vertical	Pass
1	1040.000	41.64	-18.00	74.0	-32.36	Peak	212.00	150	Vertical	Pass
2**	1608.500	37.81	-17.58	54.0	-16.19	AV	80.00	150	Vertical	Pass
2	1608.500	49.97	-17.58	74.0	-24.03	Peak	80.00	150	Vertical	Pass
3**	2439.500	84.23	-12.48	54.0	30.23	AV	95.00	150	Vertical	N/A
3	2439.500	93.62	-12.48	74.0	19.62	Peak	95.00	150	Vertical	N/A
4**	4879.000	38.77	-3.11	54.0	-15.23	AV	140.00	150	Vertical	Pass
4	4879.000	50.58	-3.11	74.0	-23.42	Peak	140.00	150	Vertical	Pass
5**	7319.125	37.26	-3.30	54.0	-16.74	AV	126.00	150	Vertical	Pass
5	7319.125	48.47	-3.30	74.0	-25.53	Peak	126.00	150	Vertical	Pass
6**	14061.187	41.38	1.62	54.0	-12.62	AV	21.00	150	Vertical	Pass
6	14061.187	52.85	1.62	74.0	-21.15	Peak	21.00	150	Vertical	Pass

## GFSK (BLE) -2 Mbps MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

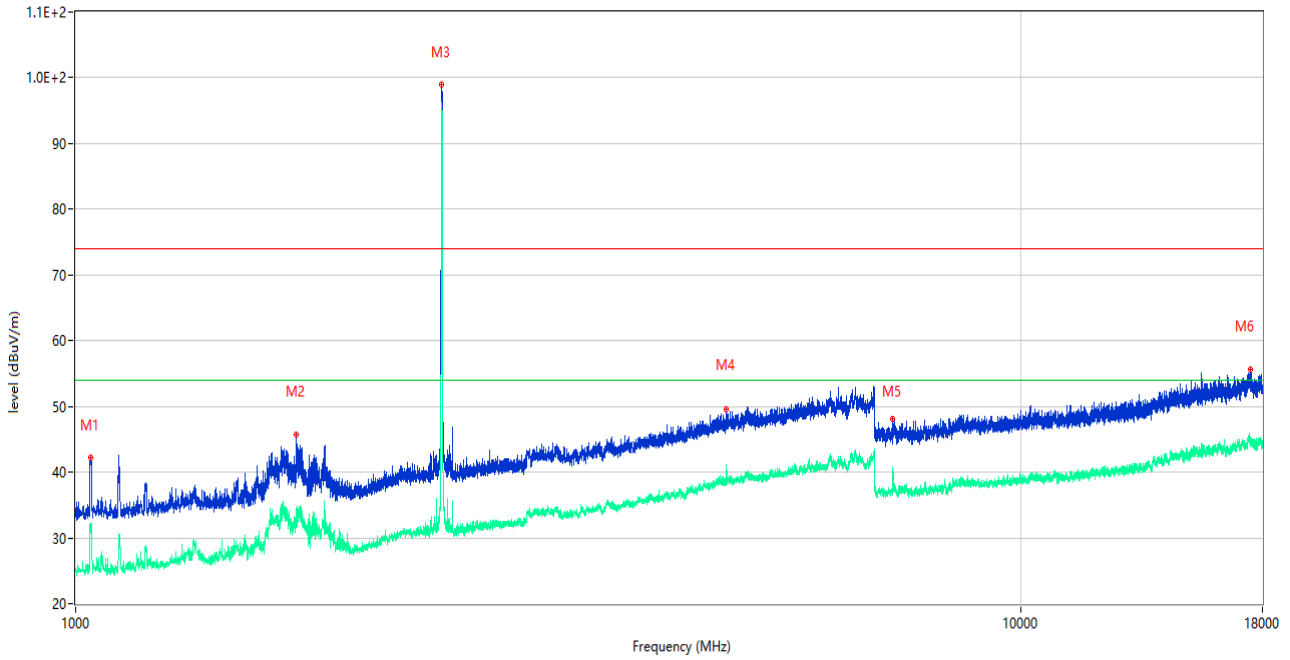

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1020.500	25.23	-17.78	54.0	-28.77	AV	306.00	150	Horizontal	Pass
1	1020.500	33.10	-17.78	74.0	-40.90	Peak	306.00	150	Horizontal	Pass
2**	1713.000	33.10	-17.17	54.0	-20.90	AV	113.00	150	Horizontal	Pass
2	1713.000	45.81	-17.17	74.0	-28.19	Peak	113.00	150	Horizontal	Pass
3**	2439.500	90.24	-12.48	54.0	36.24	AV	57.00	150	Horizontal	N/A
3	2439.500	98.92	-12.48	74.0	24.92	Peak	57.00	150	Horizontal	N/A
4**	4879.000	38.69	-3.11	54.0	-15.31	AV	135.00	150	Horizontal	Pass
4	4879.000	49.64	-3.11	74.0	-24.36	Peak	135.00	150	Horizontal	Pass
5**	7319.125	37.72	-3.30	54.0	-16.28	AV	148.00	150	Horizontal	Pass
5	7319.125	48.04	-3.30	74.0	-25.96	Peak	148.00	150	Horizontal	Pass
6**	17473.688	44.79	3.64	54.0	-9.21	AV	213.00	150	Horizontal	Pass
6	17473.688	55.69	3.64	74.0	-18.31	Peak	213.00	150	Horizontal	Pass


## GFSK (BLE) -2 Mbps HIGH CHANNEL 1 GHz to 18 GHz, ANT V

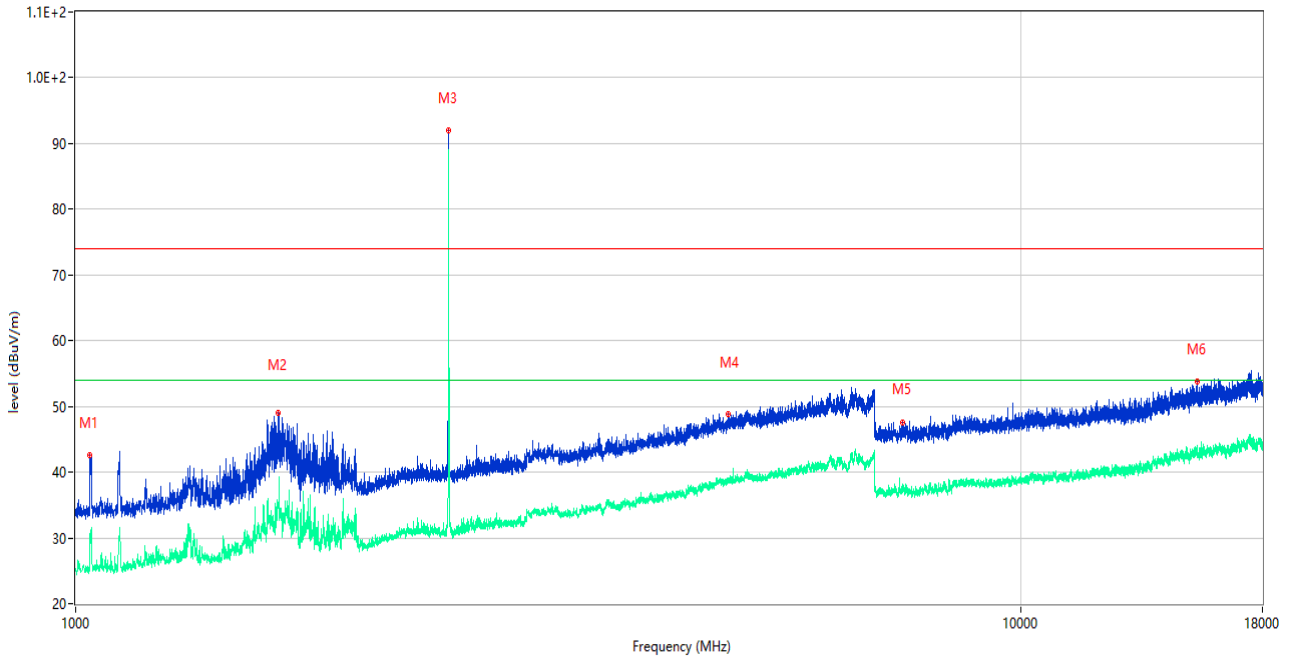


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1025.500	25.38	-17.85	54.0	-28.62	AV	128.00	150	Vertical	Pass
1	1025.500	33.82	-17.85	74.0	-40.18	Peak	128.00	150	Vertical	Pass
2**	1636.000	35.16	-17.20	54.0	-18.84	AV	74.00	150	Vertical	Pass
2	1636.000	48.96	-17.20	74.0	-25.04	Peak	74.00	150	Vertical	Pass
3**	2479.500	83.32	-11.99	54.0	29.32	AV	95.00	150	Vertical	N/A
3	2479.500	91.93	-11.99	74.0	17.93	Peak	95.00	150	Vertical	N/A
4**	4903.000	38.62	-2.58	54.0	-15.38	AV	196.00	150	Vertical	Pass
4	4903.000	48.76	-2.58	74.0	-25.24	Peak	196.00	150	Vertical	Pass
5**	7497.375	37.82	-2.79	54.0	-16.18	AV	326.00	150	Vertical	Pass
5	7497.375	47.57	-2.79	74.0	-26.43	Peak	326.00	150	Vertical	Pass
6**	15354.000	43.40	1.62	54.0	-10.60	AV	3.00	150	Vertical	Pass
6	15354.000	53.80	1.62	74.0	-20.20	Peak	3.00	150	Vertical	Pass



## GFSK (BLE) -2 Mbps HIGH CHANNEL 1 GHz to 18 GHz, ANT H

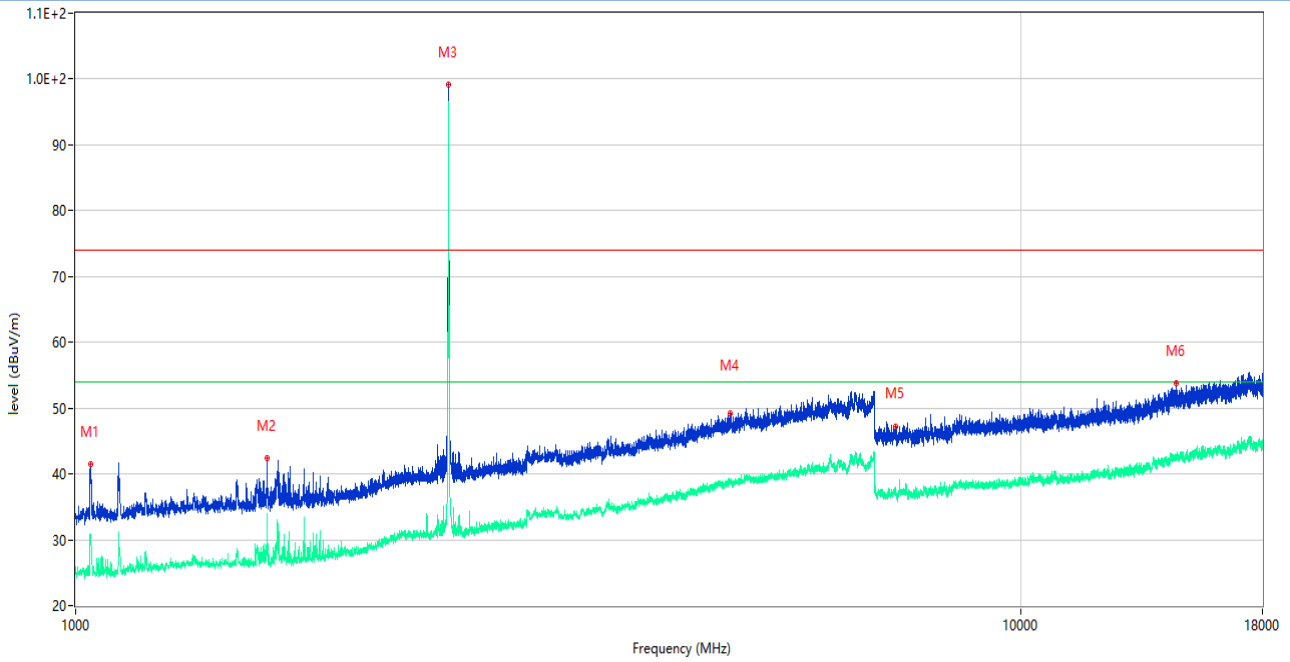


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1032.500	25.89	-17.94	54.0	-28.11	AV	308.00	150	Horizontal	Pass
1	1032.500	33.81	-17.94	74.0	-40.19	Peak	308.00	150	Horizontal	Pass
2**	1593.000	30.86	-17.26	54.0	-23.14	AV	62.00	150	Horizontal	Pass
2	1593.000	42.42	-17.26	74.0	-31.58	Peak	62.00	150	Horizontal	Pass
3**	2480.000	94.97	-11.99	54.0	40.97	AV	121.00	150	Horizontal	N/A
3	2480.000	99.14	-11.99	74.0	25.14	Peak	121.00	150	Horizontal	N/A
4**	4925.000	38.80	-2.73	54.0	-15.20	AV	254.00	150	Horizontal	Pass
4	4925.000	49.20	-2.73	74.0	-24.80	Peak	254.00	150	Horizontal	Pass
5**	7366.562	37.71	-3.55	54.0	-16.29	AV	295.00	150	Horizontal	Pass
5	7366.562	47.25	-3.55	74.0	-26.75	Peak	295.00	150	Horizontal	Pass
6**	14587.500	42.69	1.59	54.0	-11.31	AV	182.00	150	Horizontal	Pass
6	14587.500	53.82	1.59	74.0	-20.18	Peak	182.00	150	Horizontal	Pass

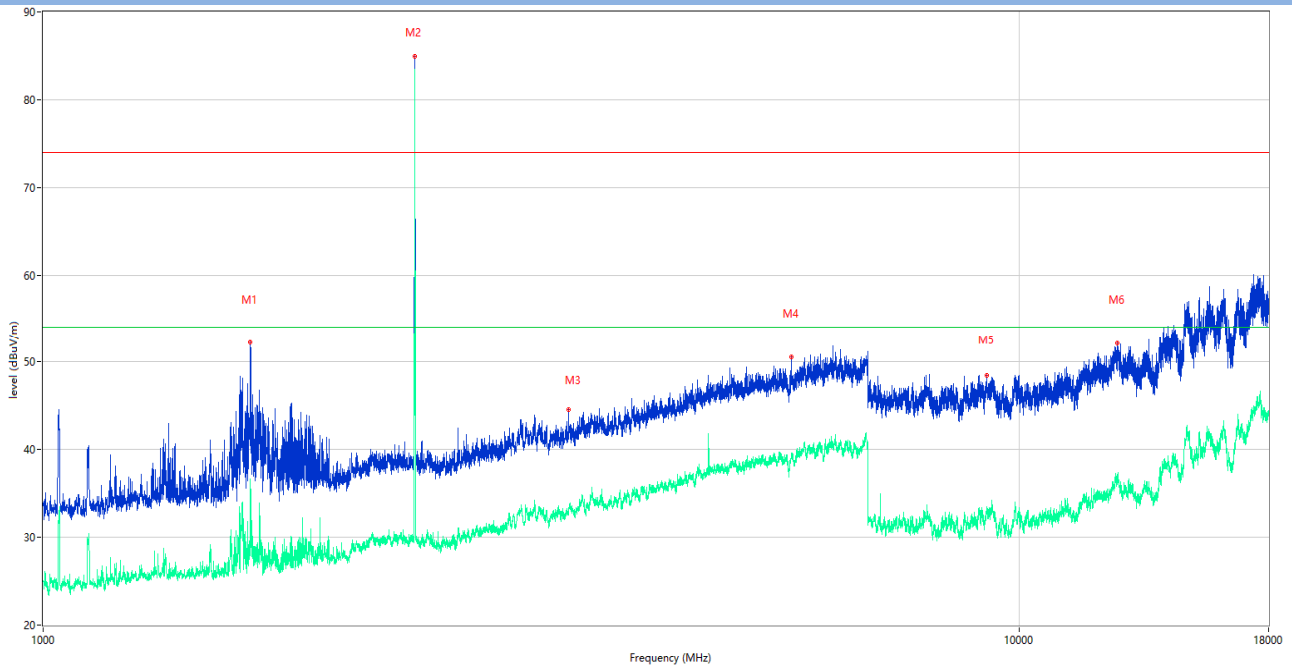**ANT 1**
**GFSK (BLE) -1 Mbps LOW CHANNEL 1 GHz to 18 GHz, ANT V**


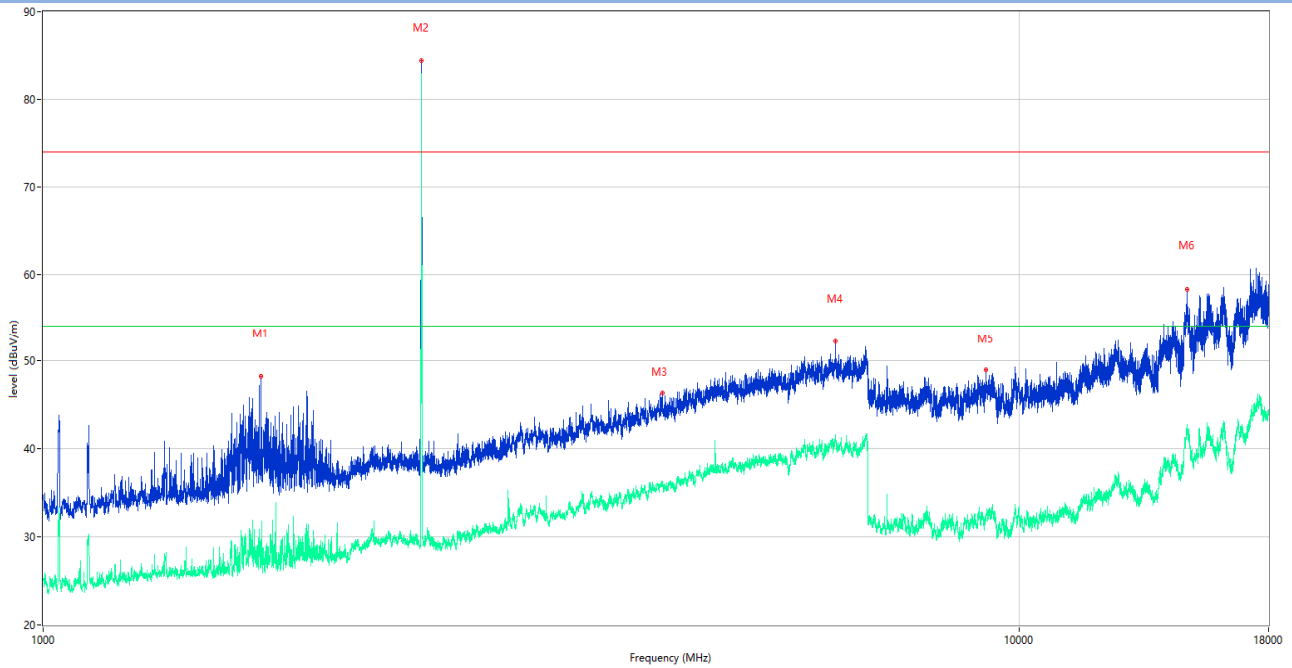
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1629.500	31.97	-15.14	54.0	-22.03	AV	208.00	150	Vertical	Pass
1	1629.500	52.25	-15.14	74.0	-21.75	Peak	208.00	150	Vertical	Pass
2**	2401.500	71.48	-10.44	54.0	17.48	AV	0.00	150	Vertical	N/A
2	2401.500	84.89	-10.44	74.0	10.89	Peak	0.00	150	Vertical	N/A
3**	3455.000	33.18	-6.48	54.0	-20.82	AV	128.00	150	Vertical	Pass
3	3455.000	44.52	-6.48	74.0	-29.48	Peak	128.00	150	Vertical	Pass
4**	5838.000	39.59	0.98	54.0	-14.41	AV	128.00	150	Vertical	Pass
4	5838.000	50.60	0.98	74.0	-23.40	Peak	128.00	150	Vertical	Pass
5**	9254.000	32.76	18.00	54.0	-21.24	AV	128.00	150	Vertical	Pass
5	9254.000	48.47	18.00	74.0	-25.53	Peak	128.00	150	Vertical	Pass
6**	12586.125	36.18	21.71	54.0	-17.82	AV	0.00	150	Vertical	Pass
6	12586.125	52.20	21.71	74.0	-21.80	Peak	0.00	150	Vertical	Pass

## GFSK (BLE) -1 Mbps LOW CHANNEL 1 GHz to 18 GHz, ANT H

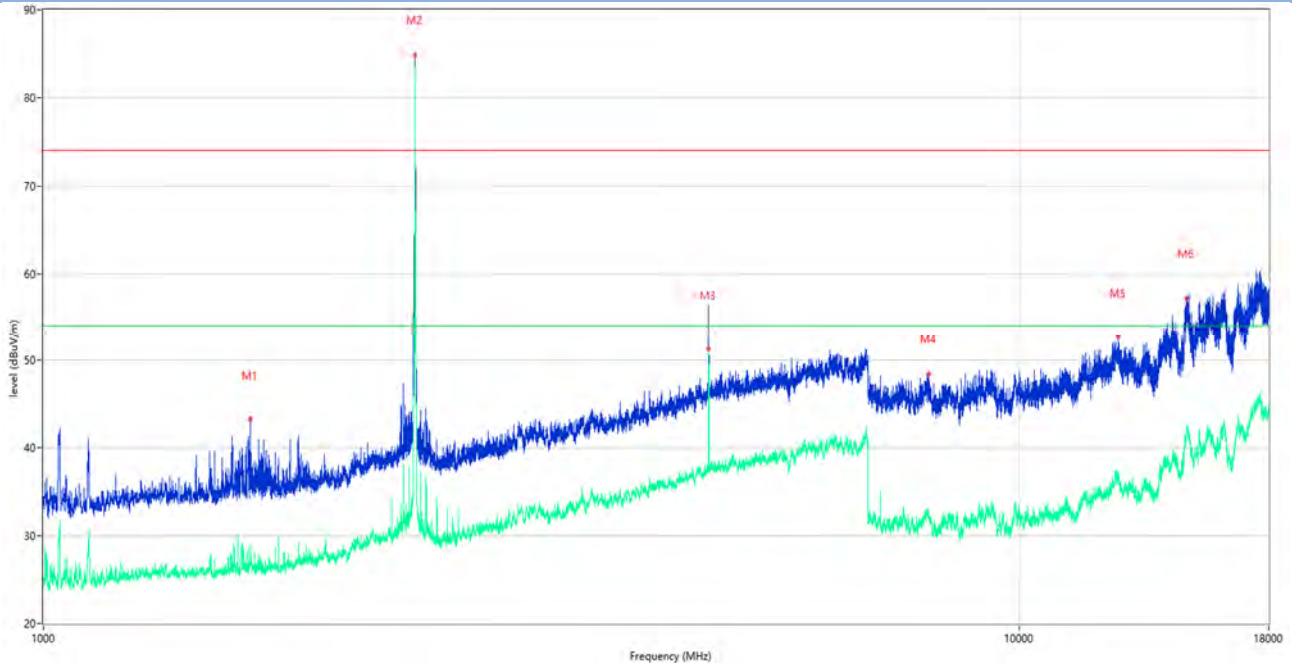


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1629.000	26.96	-15.14	54.0	-27.04	AV	154.00	150	Horizontal	Pass
1	1629.000	43.25	-15.14	74.0	-30.75	Peak	154.00	150	Horizontal	Pass
2**	2401.500	71.76	-10.44	54.0	17.76	AV	2.00	150	Horizontal	N/A
2	2401.500	84.84	-10.44	74.0	10.84	Peak	2.00	150	Horizontal	N/A
3**	4805.000	50.90	-1.99	54.0	-3.10	AV	156.00	150	Horizontal	Pass
3	4805.000	55.84	-1.99	74.0	-18.16	Peak	156.00	150	Horizontal	Pass
4**	8076.687	32.36	17.93	54.0	-21.64	AV	204.00	150	Horizontal	Pass
4	8076.687	48.51	17.93	74.0	-25.49	Peak	204.00	150	Horizontal	Pass
5**	12623.500	37.08	22.23	54.0	-16.92	AV	352.00	150	Horizontal	Pass
5	12623.500	52.75	22.23	74.0	-21.25	Peak	352.00	150	Horizontal	Pass
6**	14829.000	41.71	26.81	54.0	-12.29	AV	157.00	150	Horizontal	Pass
6	14829.000	57.26	26.81	74.0	-16.74	Peak	157.00	150	Horizontal	Pass

GFSK (BLE) -1 Mbps MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1673.000	26.61	-15.47	54.0	-27.39	AV	178.00	150	Vertical	Pass
1	1673.000	48.24	-15.47	74.0	-25.76	Peak	178.00	150	Vertical	Pass
2**	2439.500	70.21	-10.98	54.0	16.21	AV	229.00	150	Vertical	N/A
2	2439.500	84.39	-10.98	74.0	10.39	Peak	229.00	150	Vertical	N/A
3**	4309.000	35.91	-3.57	54.0	-18.09	AV	346.00	150	Vertical	Pass
3	4309.000	46.36	-3.57	74.0	-27.64	Peak	346.00	150	Vertical	Pass
4**	6476.000	40.99	3.47	54.0	-13.01	AV	217.00	150	Vertical	Pass
4	6476.000	52.26	3.47	74.0	-21.74	Peak	217.00	150	Vertical	Pass
5**	9249.688	32.47	17.81	54.0	-21.53	AV	0.00	150	Vertical	Pass
5	9249.688	48.95	17.81	74.0	-25.05	Peak	0.00	150	Vertical	Pass
6**	14859.187	42.17	27.13	54.0	-11.83	AV	133.00	150	Vertical	Pass
6	14859.187	58.31	27.13	74.0	-15.69	Peak	133.00	150	Vertical	Pass

## GFSK (BLE) -1 Mbps MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

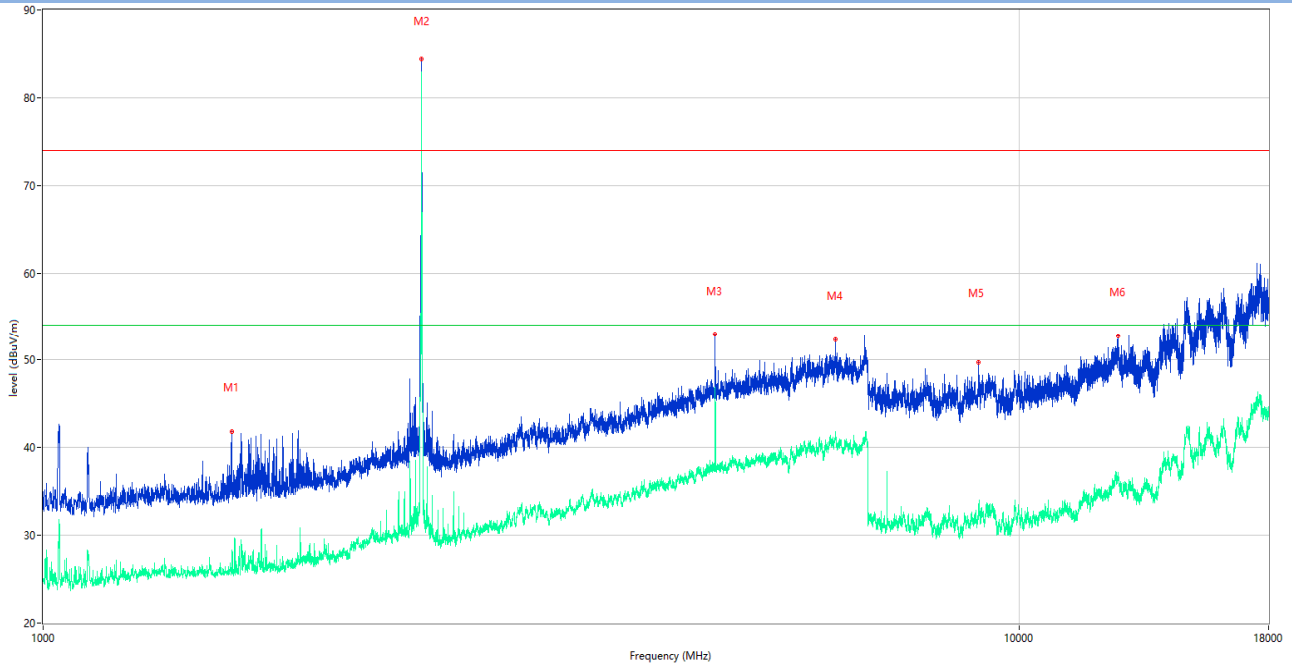


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1560.000	26.44	-15.32	54.0	-27.56	AV	305.00	150	Horizontal	Pass
1	1560.000	41.86	-15.32	74.0	-32.14	Peak	305.00	150	Horizontal	Pass
2**	2440.000	80.72	-10.97	54.0	26.72	AV	179.00	150	Horizontal	N/A
2	2440.000	84.38	-10.97	74.0	10.38	Peak	179.00	150	Horizontal	N/A
3**	4880.000	44.62	-1.60	54.0	-9.38	AV	104.00	150	Horizontal	Pass
3	4880.000	52.99	-1.60	74.0	-21.01	Peak	104.00	150	Horizontal	Pass
4**	6476.000	41.14	3.47	54.0	-12.86	AV	360.00	150	Horizontal	Pass
4	6476.000	52.40	3.47	74.0	-21.60	Peak	360.00	150	Horizontal	Pass
5**	9084.375	32.98	18.71	54.0	-21.02	AV	74.00	150	Horizontal	Pass
5	9084.375	49.76	18.71	74.0	-24.24	Peak	74.00	150	Horizontal	Pass
6**	12612.000	36.42	22.18	54.0	-17.58	AV	254.00	150	Horizontal	Pass
6	12612.000	52.81	22.18	74.0	-21.19	Peak	254.00	150	Horizontal	Pass

GFSK (BLE) -1 Mbps HIGH CHANNEL 1 GHz to 18 GHz, ANT V

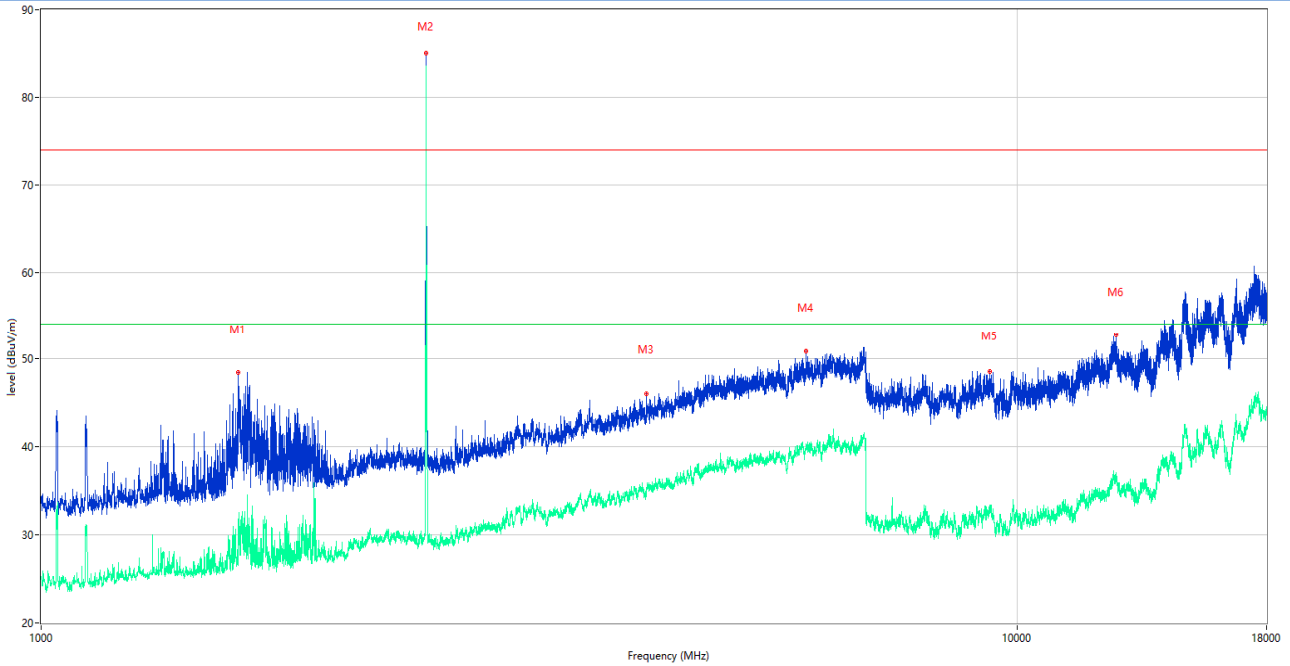


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1593.000	30.26	-15.27	54.0	-23.74	AV	206.00	150	Vertical	Pass
1	1593.000	48.47	-15.27	74.0	-25.53	Peak	206.00	150	Vertical	Pass
2**	2480.500	83.54	-9.97	54.0	29.54	AV	233.00	150	Vertical	N/A
2	2480.500	85.01	-9.97	74.0	11.01	Peak	233.00	150	Vertical	N/A
3**	4171.000	34.95	-3.81	54.0	-19.05	AV	341.00	150	Vertical	Pass
3	4171.000	46.05	-3.81	74.0	-27.95	Peak	341.00	150	Vertical	Pass
4**	6080.000	39.89	1.95	54.0	-14.11	AV	185.00	150	Vertical	Pass
4	6080.000	50.90	1.95	74.0	-23.10	Peak	185.00	150	Vertical	Pass
5**	9367.562	32.44	17.72	54.0	-21.56	AV	95.00	150	Vertical	Pass
5	9367.562	48.60	17.72	74.0	-25.40	Peak	95.00	150	Vertical	Pass
6**	12622.063	36.44	22.26	54.0	-17.56	AV	278.00	150	Vertical	Pass
6	12622.063	52.77	22.26	74.0	-21.23	Peak	278.00	150	Vertical	Pass

GFSK (BLE) -1 Mbps HIGH CHANNEL 1 GHz to 18 GHz, ANT H

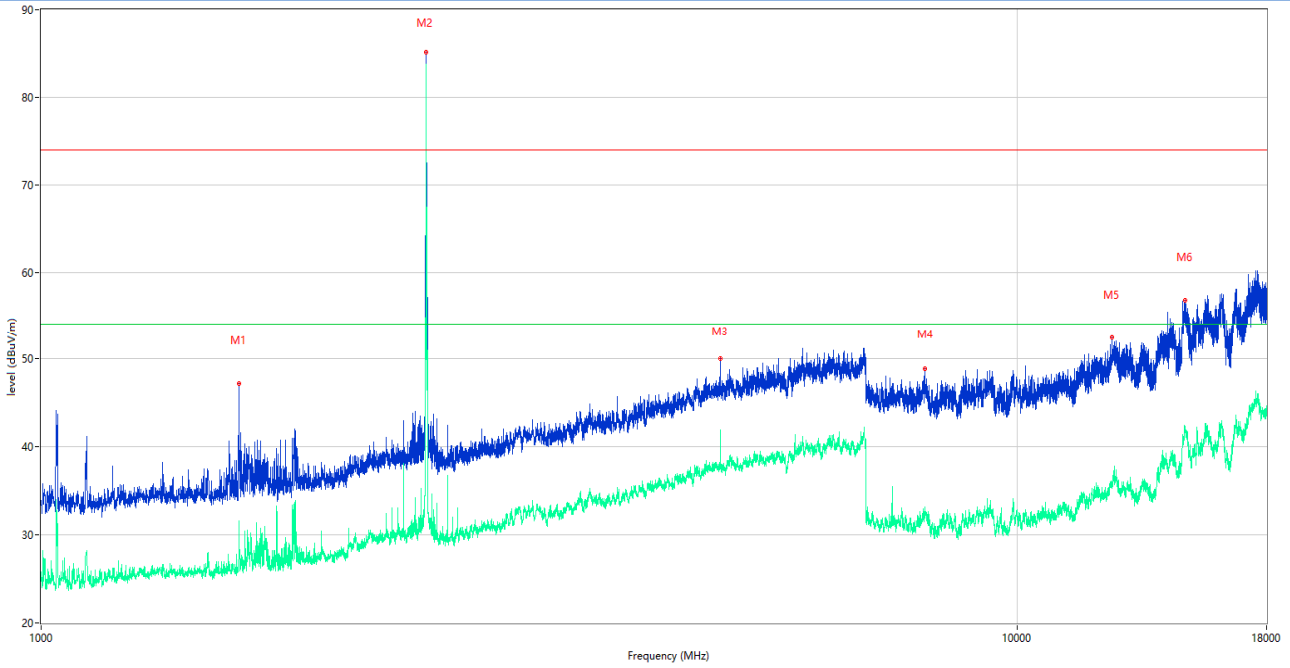

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1595.000	28.25	-15.29	54.0	-25.75	AV	174.00	150	Horizontal	Pass
1	1595.000	47.16	-15.29	74.0	-26.84	Peak	174.00	150	Horizontal	Pass
2**	2480.500	83.82	-9.97	54.0	29.82	AV	303.00	150	Horizontal	N/A
2	2480.500	85.11	-9.97	74.0	11.11	Peak	303.00	150	Horizontal	N/A
3**	4960.000	39.64	-1.73	54.0	-14.36	AV	265.00	150	Horizontal	Pass
3	4960.000	50.02	-1.73	74.0	-23.98	Peak	265.00	150	Horizontal	Pass
4**	8043.625	33.14	18.21	54.0	-20.86	AV	251.00	150	Horizontal	Pass
4	8043.625	48.88	18.21	74.0	-25.12	Peak	251.00	150	Horizontal	Pass
5**	12491.250	35.49	20.84	54.0	-18.51	AV	0.00	150	Horizontal	Pass
5	12491.250	52.44	20.84	74.0	-21.56	Peak	0.00	150	Horizontal	Pass
6**	14861.813	42.34	27.09	54.0	-11.66	AV	294.00	150	Horizontal	Pass
6	14861.813	56.78	27.09	74.0	-17.22	Peak	294.00	150	Horizontal	Pass


## GFSK (BLE) -2 Mbps LOW CHANNEL 1 GHz to 18 GHz, ANT V

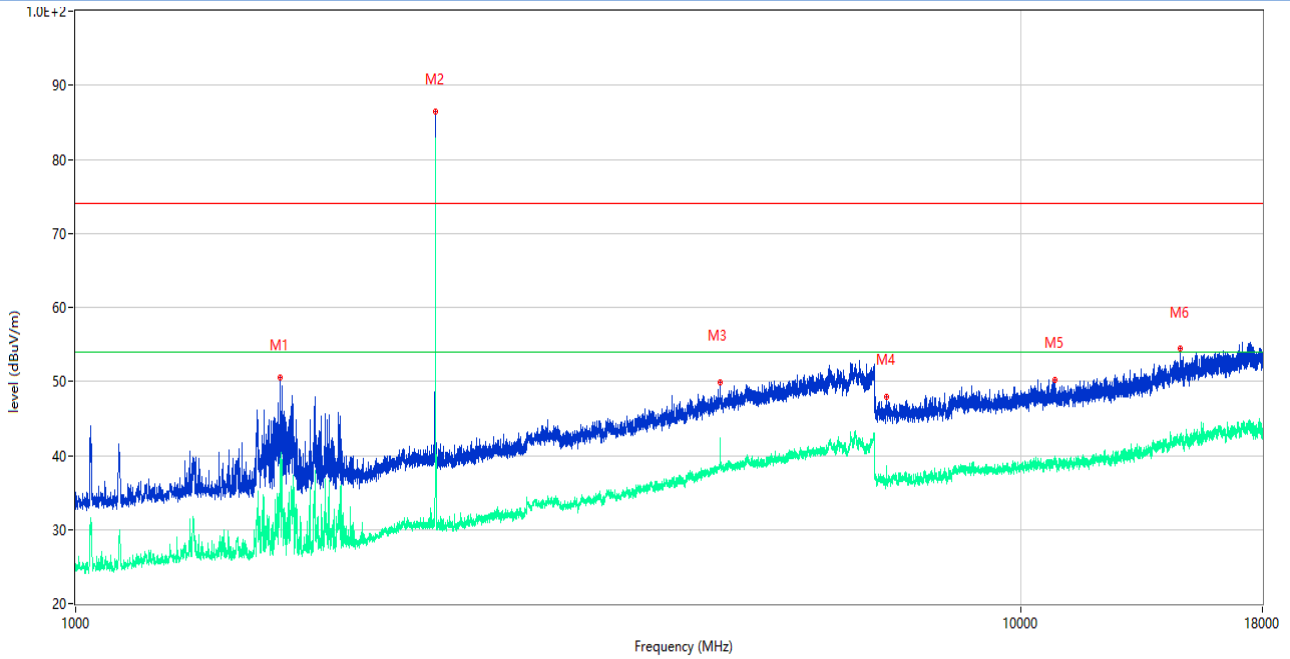

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1647.000	38.84	-16.80	54.0	-15.16	AV	78.00	150	Vertical	Pass
1	1647.000	50.59	-16.80	74.0	-23.41	Peak	78.00	150	Vertical	Pass
2**	2402.500	82.93	-11.82	54.0	28.93	AV	277.00	150	Vertical	N/A
2	2402.500	86.44	-11.82	74.0	12.44	Peak	277.00	150	Vertical	N/A
3**	4803.000	38.58	-2.79	54.0	-15.42	AV	124.00	150	Vertical	Pass
3	4803.000	49.95	-2.79	74.0	-24.05	Peak	124.00	150	Vertical	Pass
4**	7204.125	36.46	-3.47	54.0	-17.54	AV	109.00	150	Vertical	Pass
4	7204.125	47.90	-3.47	74.0	-26.10	Peak	109.00	150	Vertical	Pass
5**	10862.562	39.08	0.55	54.0	-14.92	AV	243.00	150	Vertical	Pass
5	10862.562	50.26	0.55	74.0	-23.74	Peak	243.00	150	Vertical	Pass
6**	14735.813	42.13	1.80	54.0	-11.87	AV	135.00	150	Vertical	Pass
6	14735.813	54.40	1.80	74.0	-19.60	Peak	135.00	150	Vertical	Pass




## GFSK (BLE) -2 Mbps LOW CHANNEL 1 GHz to 18 GHz, ANT H

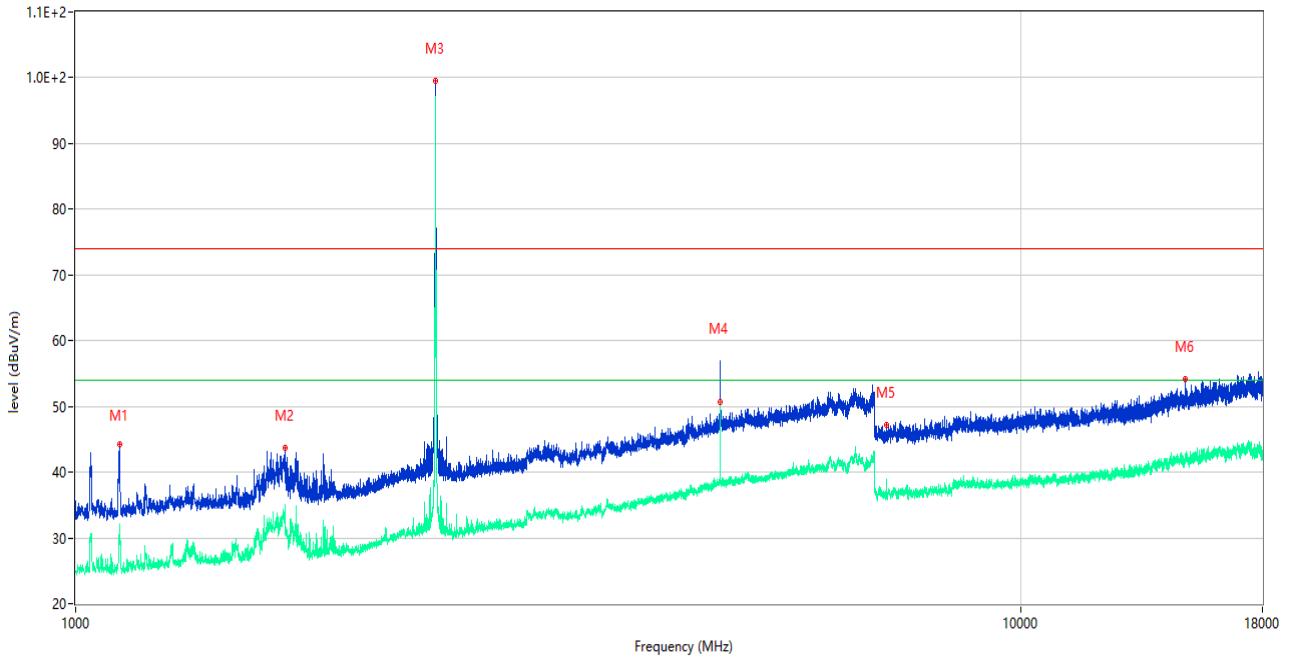


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1114.000	29.72	-18.25	54.0	-24.28	AV	125.00	150	Horizontal	Pass
1	1114.000	44.20	-18.25	74.0	-29.80	Peak	125.00	150	Horizontal	Pass
2**	1666.000	35.02	-17.03	54.0	-18.98	AV	26.00	150	Horizontal	Pass
2	1666.000	43.66	-17.03	74.0	-30.34	Peak	26.00	150	Horizontal	Pass
3**	2402.500	97.06	-11.82	54.0	43.06	AV	46.00	150	Horizontal	N/A
3	2402.500	99.49	-11.82	74.0	25.49	Peak	46.00	150	Horizontal	N/A
4**	4804.000	50.60	-2.89	54.0	-3.40	AV	130.00	150	Horizontal	Pass
4	4804.000	56.32	-2.89	74.0	-17.68	Peak	130.00	150	Horizontal	Pass
5**	7204.125	36.28	-3.47	54.0	-17.72	AV	241.00	150	Horizontal	Pass
5	7204.125	47.18	-3.47	74.0	-26.82	Peak	241.00	150	Horizontal	Pass
6**	14914.312	41.77	1.24	54.0	-12.23	AV	18.00	150	Horizontal	Pass
6	14914.312	54.14	1.24	74.0	-19.86	Peak	18.00	150	Horizontal	Pass

## GFSK (BLE) -2 Mbps MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

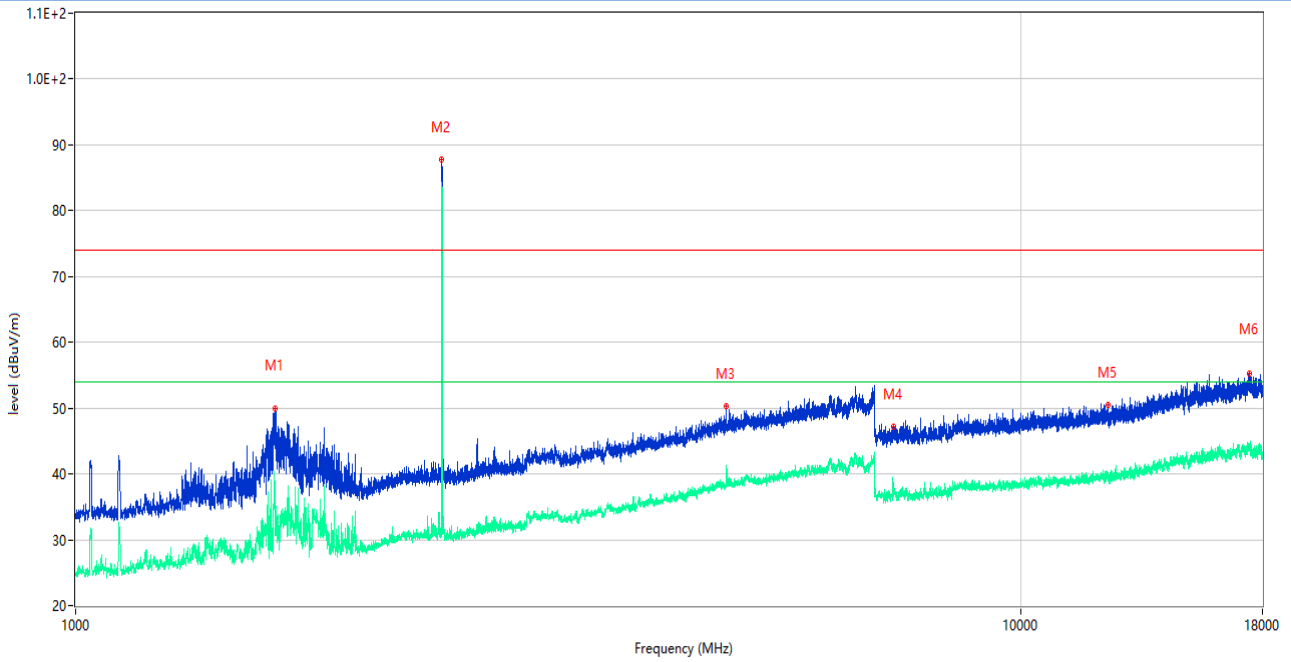


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1624.000	38.93	-17.18	54.0	-15.07	AV	74.00	150	Vertical	Pass
1	1624.000	49.95	-17.18	74.0	-24.05	Peak	74.00	150	Vertical	Pass
2**	2440.500	84.23	-12.55	54.0	30.23	AV	205.00	150	Vertical	N/A
2	2440.500	87.75	-12.55	74.0	13.75	Peak	205.00	150	Vertical	N/A
3**	4879.000	38.50	-3.11	54.0	-15.50	AV	121.00	150	Vertical	Pass
3	4879.000	50.23	-3.11	74.0	-23.77	Peak	121.00	150	Vertical	Pass
4**	7322.000	38.33	-3.29	54.0	-15.67	AV	275.00	150	Vertical	Pass
4	7322.000	47.20	-3.29	74.0	-26.80	Peak	275.00	150	Vertical	Pass
5**	12351.813	39.41	1.73	54.0	-14.59	AV	311.00	150	Vertical	Pass
5	12351.813	50.56	1.73	74.0	-23.44	Peak	311.00	150	Vertical	Pass
6**	17431.687	44.43	4.49	54.0	-9.57	AV	188.00	150	Vertical	Pass
6	17431.687	55.21	4.49	74.0	-18.79	Peak	188.00	150	Vertical	Pass

## GFSK (BLE) -2 Mbps MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

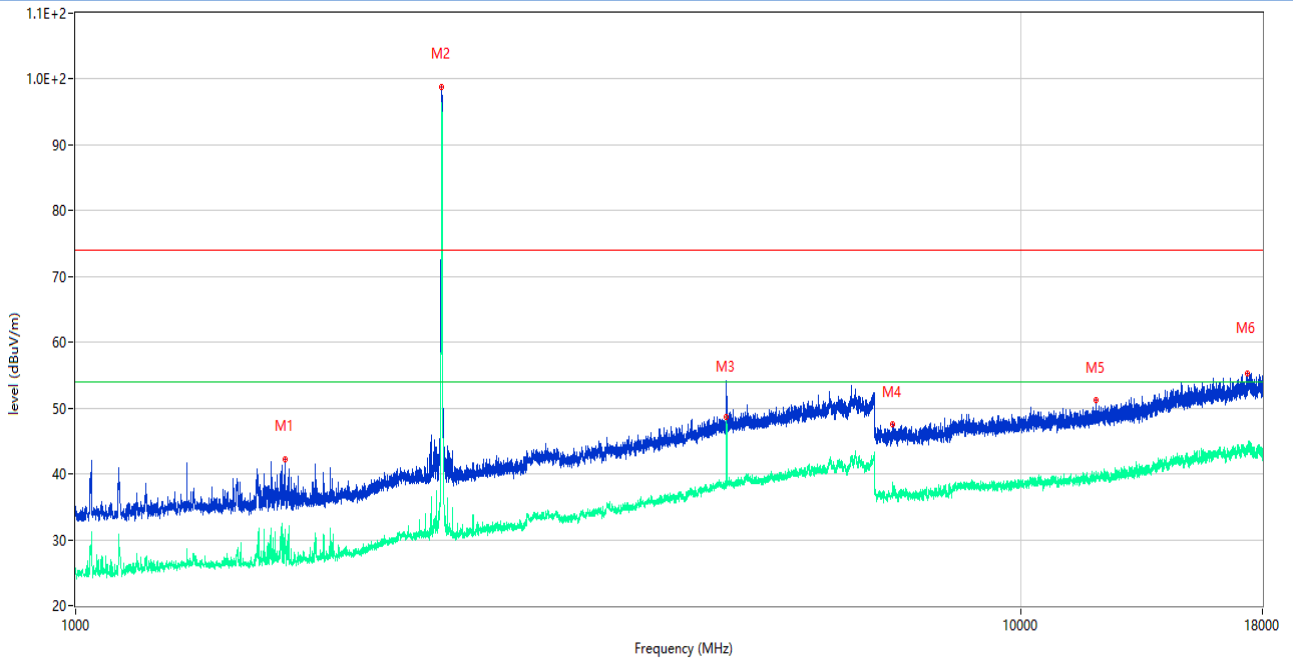


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1667.000	29.47	-17.20	54.0	-24.53	AV	96.00	150	Horizontal	Pass
1	1667.000	42.30	-17.20	74.0	-31.70	Peak	96.00	150	Horizontal	Pass
2**	2439.500	90.26	-12.48	54.0	36.26	AV	233.00	150	Horizontal	N/A
2	2439.500	98.86	-12.48	74.0	24.86	Peak	233.00	150	Horizontal	N/A
3**	4880.000	48.66	-3.14	54.0	-5.34	AV	123.00	150	Horizontal	Pass
3	4880.000	53.79	-3.14	74.0	-20.21	Peak	123.00	150	Horizontal	Pass
4**	7319.125	37.40	-3.30	54.0	-16.60	AV	15.00	150	Horizontal	Pass
4	7319.125	47.51	-3.30	74.0	-26.49	Peak	15.00	150	Horizontal	Pass
5**	11993.875	39.62	1.40	54.0	-14.38	AV	269.00	150	Horizontal	Pass
5	11993.875	51.19	1.40	74.0	-22.81	Peak	269.00	150	Horizontal	Pass
6**	17366.063	44.05	3.30	54.0	-9.95	AV	177.00	150	Horizontal	Pass
6	17366.063	55.27	3.30	74.0	-18.73	Peak	177.00	150	Horizontal	Pass

## GFSK (BLE) -2 Mbps HIGH CHANNEL 1 GHz to 18 GHz, ANT V

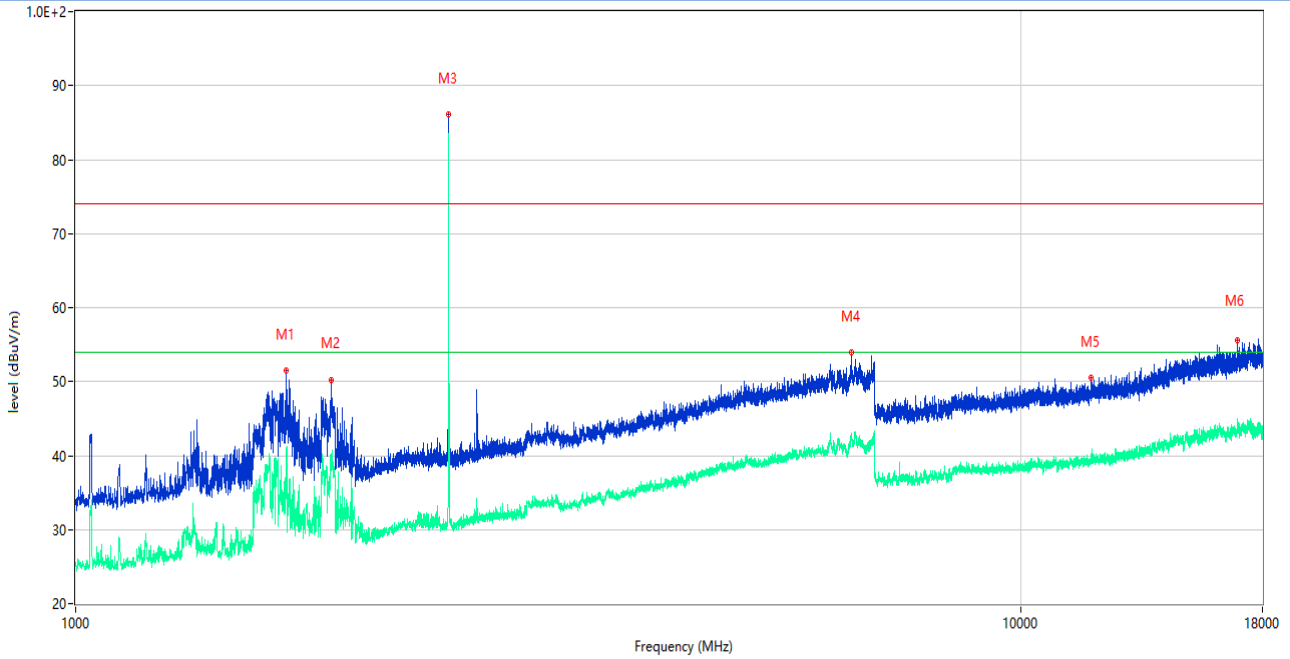

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1671.000	34.22	-17.03	54.0	-19.78	AV	66.00	150	Vertical	Pass
1	1671.000	51.46	-17.03	74.0	-22.54	Peak	66.00	150	Vertical	Pass
2**	1862.000	39.74	-16.05	54.0	-14.26	AV	88.00	150	Vertical	Pass
2	1862.000	50.22	-16.05	74.0	-23.78	Peak	88.00	150	Vertical	Pass
3**	2479.500	76.44	-11.99	54.0	22.44	AV	254.00	150	Vertical	N/A
3	2479.500	86.06	-11.99	74.0	12.06	Peak	254.00	150	Vertical	N/A
4**	6609.000	42.42	0.49	54.0	-11.58	AV	120.00	150	Vertical	Pass
4	6609.000	53.95	0.49	74.0	-20.05	Peak	120.00	150	Vertical	Pass
5**	11863.063	39.57	1.55	54.0	-14.43	AV	52.00	150	Vertical	Pass
5	11863.063	50.46	1.55	74.0	-23.54	Peak	52.00	150	Vertical	Pass
6**	16938.188	44.07	2.81	54.0	-9.93	AV	97.00	150	Vertical	Pass
6	16938.188	55.59	2.81	74.0	-18.41	Peak	97.00	150	Vertical	Pass

## GFSK (BLE) -2 Mbps HIGH CHANNEL 1 GHz to 18 GHz, ANT H

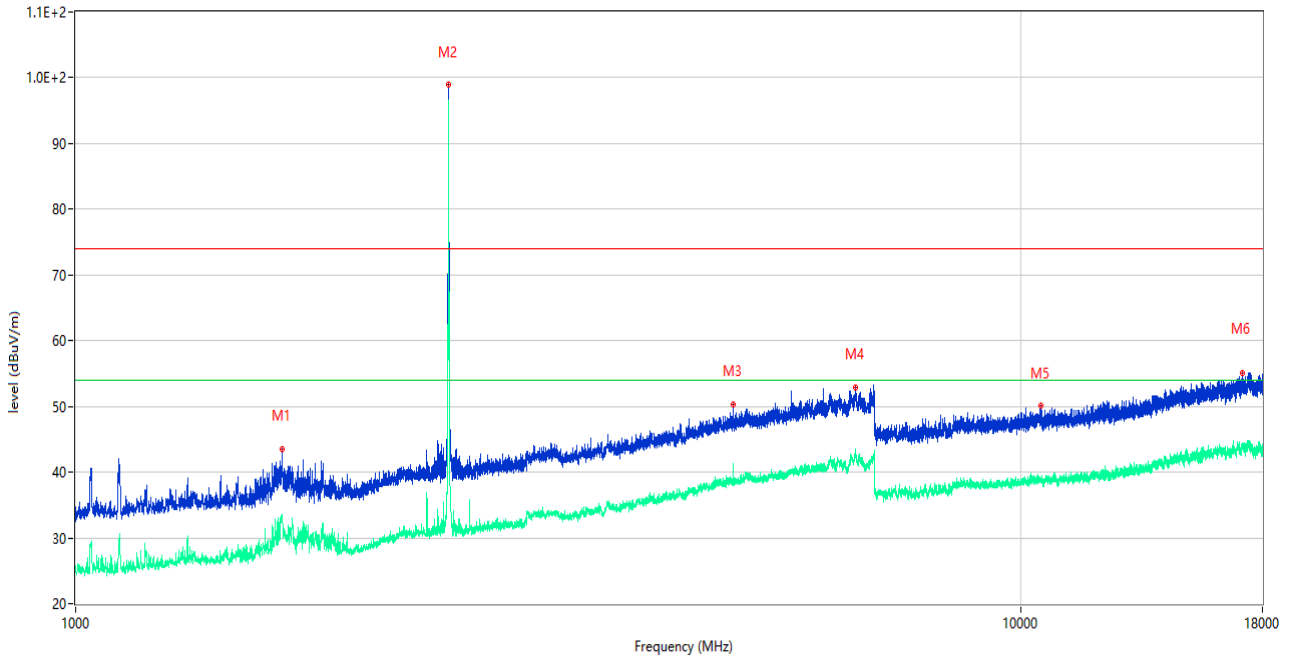

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1652.500	33.47	-17.24	54.0	-20.53	AV	30.00	150	Horizontal	Pass
1	1652.500	43.57	-17.24	74.0	-30.43	Peak	30.00	150	Horizontal	Pass
2**	2479.500	90.41	-11.99	54.0	36.41	AV	234.00	150	Horizontal	N/A
2	2479.500	98.98	-11.99	74.0	24.98	Peak	234.00	150	Horizontal	N/A
3**	4960.000	41.39	-3.24	54.0	-12.61	AV	202.00	150	Horizontal	Pass
3	4960.000	50.38	-3.24	74.0	-23.62	Peak	202.00	150	Horizontal	Pass
4**	6674.000	43.05	0.18	54.0	-10.95	AV	354.00	150	Horizontal	Pass
4	6674.000	52.96	0.18	74.0	-21.04	Peak	354.00	150	Horizontal	Pass
5**	10487.375	38.93	-0.37	54.0	-15.07	AV	0.00	150	Horizontal	Pass
5	10487.375	50.04	-0.37	74.0	-23.96	Peak	0.00	150	Horizontal	Pass
6**	17123.250	43.66	3.17	54.0	-10.34	AV	312.00	150	Horizontal	Pass
6	17123.250	55.06	3.17	74.0	-18.94	Peak	312.00	150	Horizontal	Pass

## A.7 Band Edge (Restricted-band band-edge)

Note 1: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note 2: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note 3: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note 4: The Level (dBuV/m) has been corrected by factor.

### ANT 0


#### BLE -1 Mbps

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	51.31	31.47	74	20.959	PEAK	Pass
		2390	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.5	51.17	31.40	74	20.134	PEAK	Pass
		2483.5	N/A	N/A	54	N/A	AVERAGE	Pass

#### LOW CHANNEL, PEAK

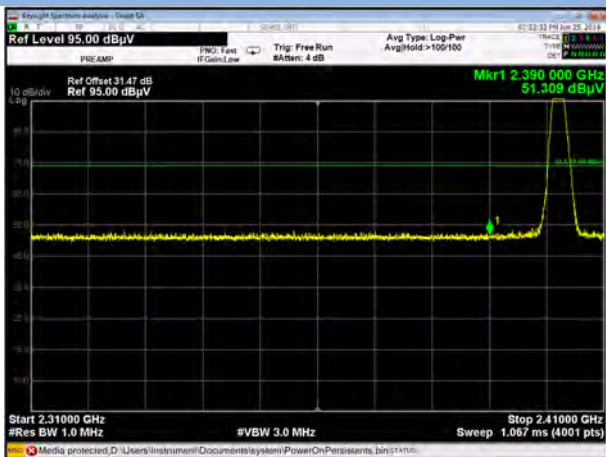


#### HIGH CHANNEL, PEAK

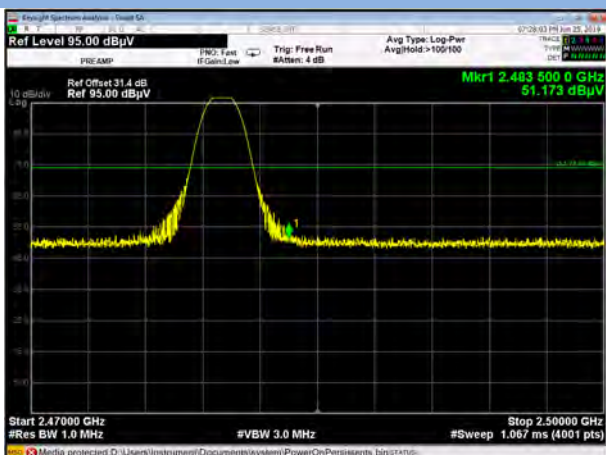

**ANT 0**
**BLE -2 Mbps**

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	53.02	32.61	74	20.977	PEAK	Pass
		2390	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.5	57.84	32.54	74	16.164	PEAK	Pass
		2483.5	44.46	32.54	54	9.544	AVERAGE	Pass

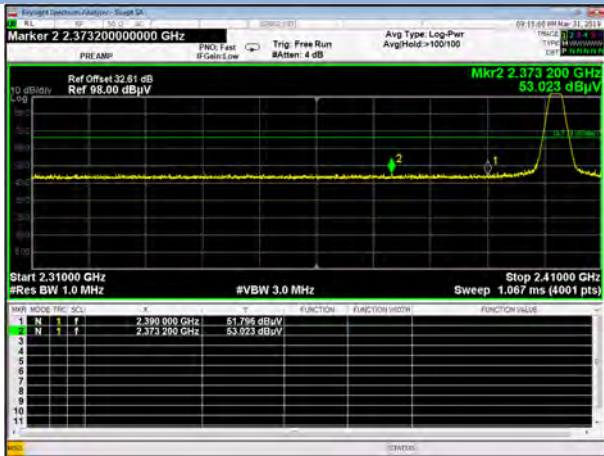**LOW CHANNEL, PEAK**

**HIGH CHANNEL, PEAK**


**HIGH CHANNEL, AV**


ANT 1


BLE -1 Mbps

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	53.75	31.47	74	20.251	PEAK	Pass
		2390	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.5	52.22	31.40	74	20.785	PEAK	Pass
		2483.5	N/A	N/A	54	N/A	AVERAGE	Pass

LOW CHANNEL, PEAK

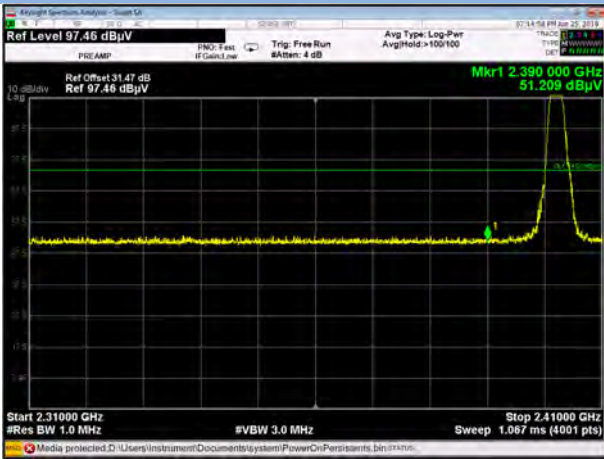

HIGH CHANNEL, PEAK

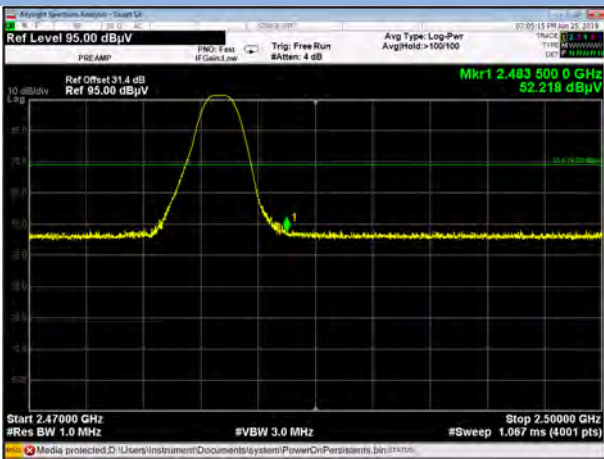



ANT 1

BLE -2 Mbps

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	53.93	32.61	74	20.075	PEAK	Pass
		2390	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.5	56.49	32.54	74	17.506	PEAK	Pass
		2483.5	44.04	32.54	54	9.958	AVERAGE	Pass

LOW CHANNEL, PEAK



HIGH CHANNEL, PEAK



HIGH CHANNEL, AV



## A.8 Power Spectral Density (PSD)

ANT 0


BLE -1 Mbps

Test Data


Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-8.15	8	Pass
Middle Channel	-8.34	8	Pass
High Channel	-8.10	8	Pass

Test plots


GFSK (BLE) -1 Mbps LOW CHANNEL

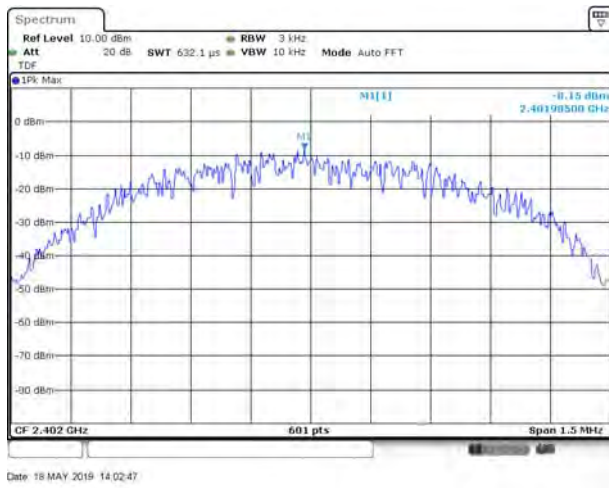

GFSK (BLE) -1 Mbps MIDDLE CHANNEL

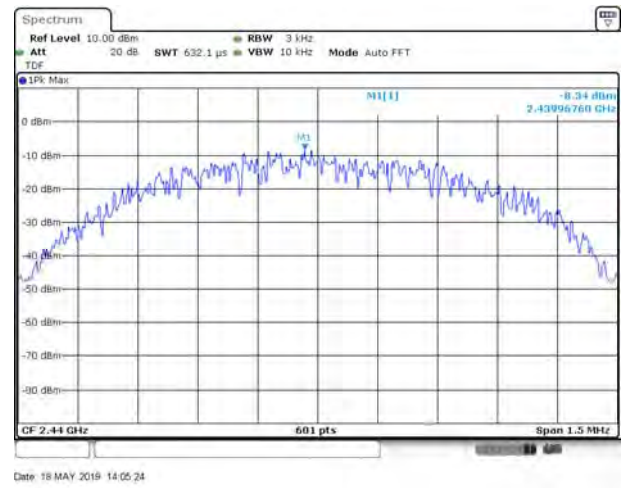

GFSK (BLE) -1 Mbps HIGH CHANNEL

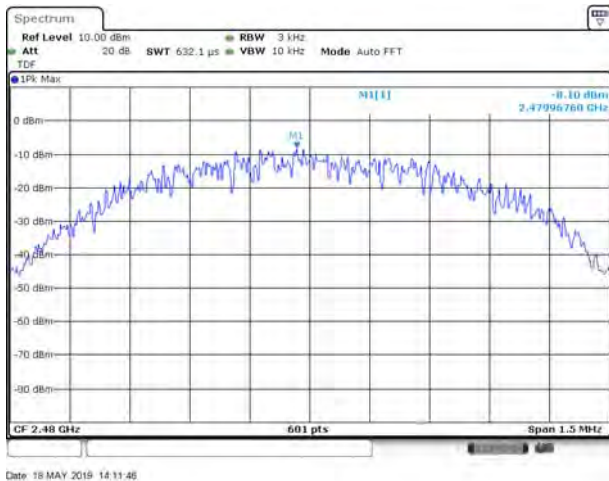

ANT 0


BLE -2 Mbps

Test Data

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-9.30	8	Pass
Middle Channel	-9.32	8	Pass
High Channel	-9.25	8	Pass


Test plots

GFSK (BLE) -2 Mbps LOW CHANNEL

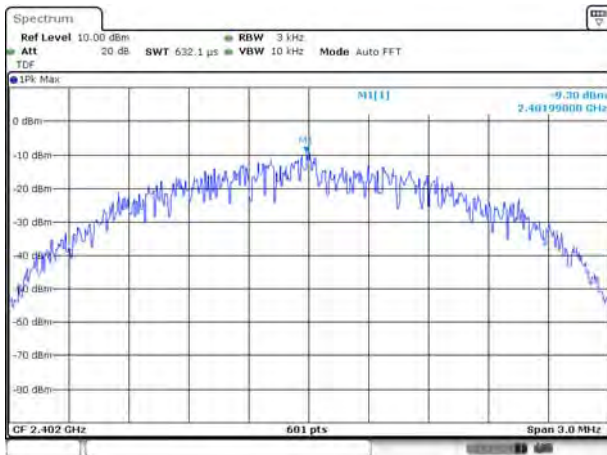


Date: 4 JUN 2019 21:05:45

GFSK (BLE) -2 Mbps MIDDLE CHANNEL

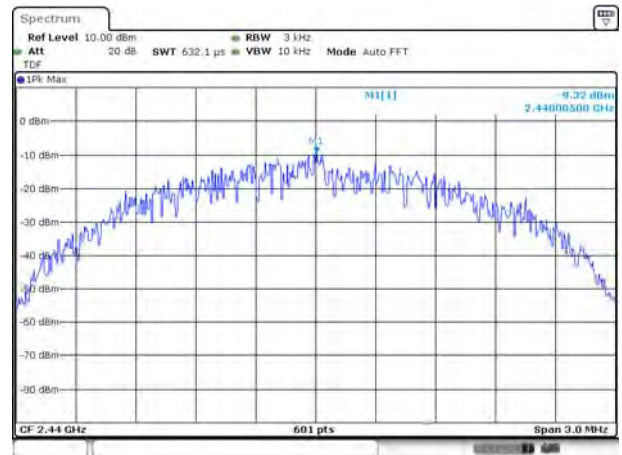

Date: 4 JUN 2019 21:05:06


GFSK (BLE) -2 Mbps HIGH CHANNEL

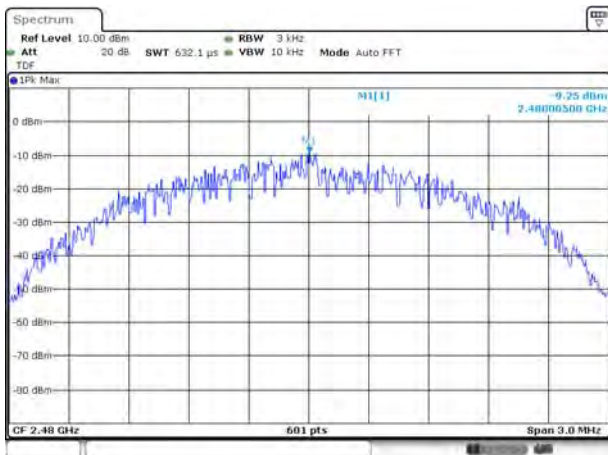


Date: 4 JUN 2019 21:05:58

**ANT 1**
**BLE -1 Mbps**
**Test Data**


Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-9.38	8	Pass
Middle Channel	-9.36	8	Pass
High Channel	-8.99	8	Pass

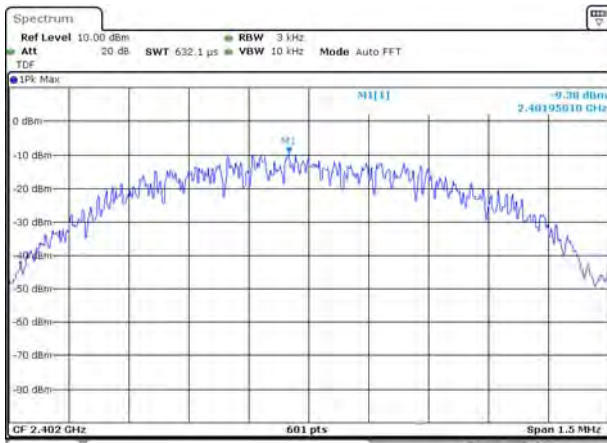**Test plots**
**GFSK (BLE) -1 Mbps LOW CHANNEL**


Date: 18 MAY 2019 14:55:44

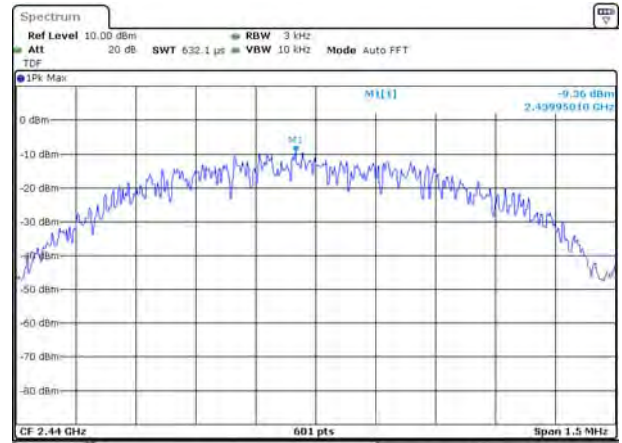**GFSK (BLE) -1 Mbps MIDDLE CHANNEL**


Date: 18 MAY 2019 14:58:11

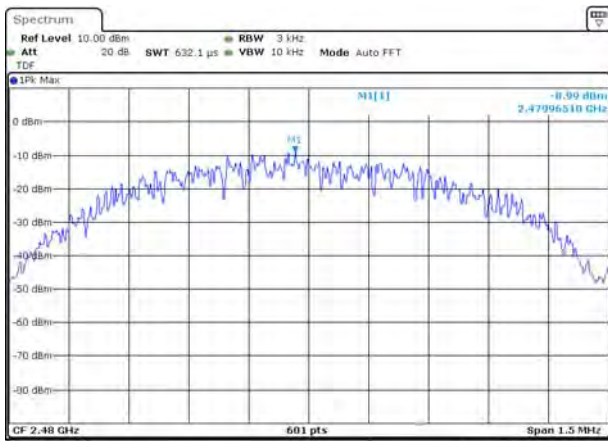**GFSK (BLE) -1 Mbps HIGH CHANNEL**


Date: 18 MAY 2019 15:00:46

ANT 1


BLE -2 Mbps

Test Data


Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-11.05	8	Pass
Middle Channel	-10.87	8	Pass
High Channel	-10.68	8	Pass

Test plots

GFSK (BLE) -2 Mbps LOW CHANNEL      GFSK (BLE) -2 Mbps MIDDLE CHANNEL

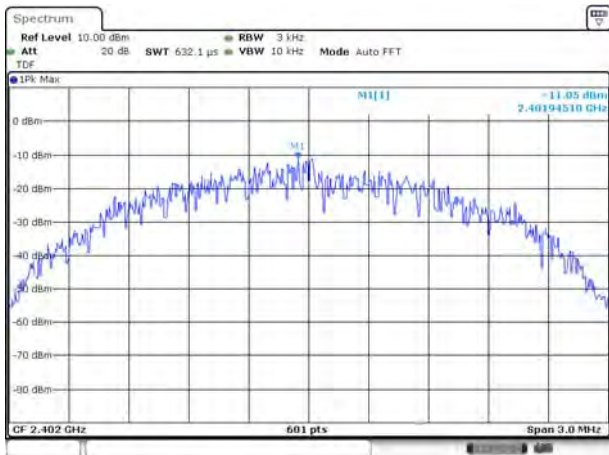


Date: 4 JUN 2019 21:10:04

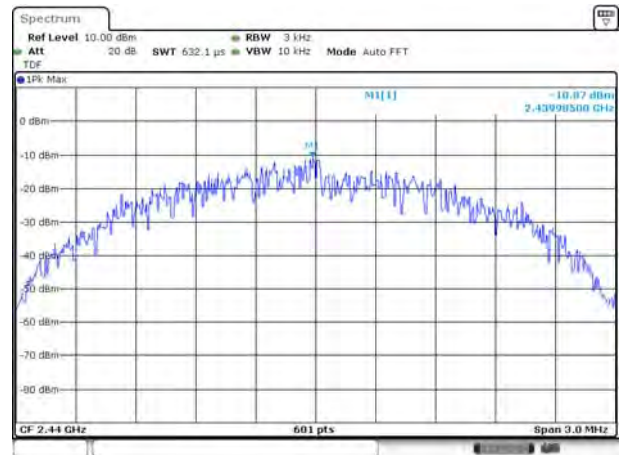

Date: 4 JUN 2019 21:10:57

GFSK (BLE) -2 Mbps HIGH CHANNEL

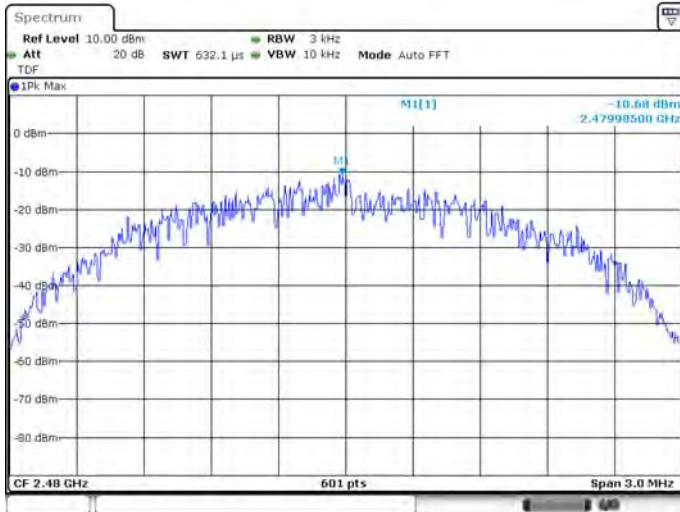

Date: 4 JUN 2019 21:11:37

## **ANNEX B TEST SETUP PHOTOS**

Please refer the document "BL-SZ1940524-AR.PDF".

## **ANNEX C EUT EXTERNAL PHOTOS**

Please refer the document "BL-SZ1940524-AW.PDF".

## **ANNEX D EUT INTERNAL PHOTOS**

Please refer the document "BL-SZ1940524-AI.PDF".

--END OF REPORT--