

FCC/ISED

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.





FOR
SGW111X BLE module


ISSUED TO
SG Wireless Limited


Unit 4, 5/F, Sun Fung Industrial Building, 8 Ma Kok Street, Tsuen Wan
New Territories, Hong Kong



Tested by: 
Heng Aiping

Date: 
Jan. 17, 2020

Approved by: 
Wei Yanquan
(Chief Engineer)

Date: 
Jan. 17, 2020

Report No.: BL-SZ19C0646-601
EUT Name: SGW111X BLE module
Model Name: SGW1110, SGW1111 (refer section 2.4)
Brand Name: SG Wireless
Test Standard: 47 CFR Part 15 Subpart C
RSS-Gen (Issue 5, March 2019)
RSS-247 (Issue 2, February 2017)
FCC ID: 2AS9402
ISED Number: 25021-02
Test Conclusion: Pass
Test Date: Dec. 26, 2019 ~ Jan. 08, 2020
Date of Issue: Jan. 17, 2020

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Jan. 14, 2020</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Jan. 17, 2020</u>	<u>Updated frequency range of Conducted Spurious Emissions on pages 49-56</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Technical Information	7
2.6	Additional Instructions	8
3	SUMMARY OF TEST RESULTS	9
3.1	Test Standards	9
3.2	Verdict	10
4	GENERAL TEST CONFIGURATIONS	11
4.1	Test Environments	11
4.2	Test Equipment List	11
4.3	Measurement Uncertainty	12
4.4	Description of Test Setup	13
4.4.1	For Antenna Port Test	13
4.4.2	For AC Power Supply Port Test	13
4.4.3	For Radiated Test (Below 30 MHz)	14
4.4.4	For Radiated Test (30 MHz-1 GHz)	14
4.4.5	For Radiated Test (Above 1 GHz)	15
4.5	Measurement Results Explanation Example	16

4.5.1	For conducted test items:	16
4.5.2	For radiated band edges and spurious emission test:.....	16
5	TEST ITEMS.....	17
5.1	Antenna Requirements.....	17
5.1.1	Relevant Standards.....	17
5.1.2	Antenna Anti-Replacement Construction	17
5.1.3	Antenna Gain	17
5.2	Output Power	18
5.2.1	Test Limit.....	18
5.2.2	Test Setup.....	18
5.2.3	Test Procedure.....	18
5.2.4	Test Result	19
5.3	Occupied Bandwidth	20
5.3.1	Limit.....	20
5.3.2	Test Setup.....	20
5.3.3	Test Procedure.....	20
5.3.4	Test Result	20
5.4	Conducted Spurious Emission	21
5.4.1	Limit.....	21
5.4.2	Test Setup.....	21
5.4.3	Test Procedure.....	21
5.4.4	Test Result	22
5.5	Band Edge (Authorized-band band-edge).....	23
5.5.1	Limit.....	23
5.5.2	Test Setup.....	23
5.5.3	Test Procedure.....	23
5.5.4	Test Result	23
5.6	Conducted Emission	24
5.6.1	Limit.....	24
5.6.2	Test Setup.....	24
5.6.3	Test Procedure.....	24
5.6.4	Test Result	24
5.7	Radiated Spurious Emission	25

5.7.1	Limit.....	25
5.7.2	Test Setup.....	25
5.7.3	Test Procedure.....	25
5.7.4	Test Result.....	28
5.8	Band Edge (Restricted-band band-edge).....	29
5.8.1	Limit.....	29
5.8.2	Test Setup.....	29
5.8.3	Test Procedure.....	29
1.1.1	Test Result.....	29
5.9	Power Spectral density (PSD).....	30
5.9.1	Limit.....	30
5.9.2	Test Setup.....	30
5.9.3	Test Procedure.....	30
5.9.4	Test Result.....	30
ANNEX A	TEST RESULT.....	31
A.1	Output Power, E.I.R.P, Duty Cycle.....	31
A.2	Occupied Bandwidth.....	39
A.3	Conducted Spurious Emissions.....	48
A.4	Band Edge (Authorized-band band-edge).....	57
A.5	Conducted Emissions.....	66
A.6	Radiated Spurious Emission.....	70
A.7	Band Edge (Restricted-band band-edge).....	98
A.8	Power Spectral Density (PSD).....	102
ANNEX B	TEST SETUP PHOTOS.....	106
ANNEX C	EUT EXTERNAL PHOTOS.....	106
ANNEX D	EUT INTERNAL PHOTOS.....	106

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.</p> <p>The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v6.9.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	SG Wireless Limited
Address	Unit 4, 5/F, Sun Fung Industrial Building, 8 Ma Kok Street, Tsuen Wan New Territories, Hong Kong

2.2 Manufacturer Information

Manufacturer	SG Wireless Limited
Address	Unit 4, 5/F, Sun Fung Industrial Building, 8 Ma Kok Street, Tsuen Wan New Territories, Hong Kong

2.3 Factory Information

Factory	Dongguan Macson Electronics Ltd.
Address	No.5, Jun Da Lu, DongKeng, Dongguan, Guangdong China 523451

2.4 General Description for Equipment under Test (EUT)

EUT Name	SGW111X BLE module
Model Name Under Test	SGW1110, SGW1111
Series Model Name	SGW1110, SGW1111
Description of Model name differentiation	SGW1110: Bluetooth Low Energy module with integrated PCB antenna SGW1111: Bluetooth Low Energy module with U.FL connector for external antenna
Hardware Version	V0.0
Software Version	V1.0
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	Bluetooth 5.0 BLE
-----------------------------------	-------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	DTS	
Modulation Type	GFSK	
Product Type	<input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fix Location	
Transfer Rate	1 Mbps, 2 Mbps	
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.	
Number of Channel	40 (at intervals of 2 MHz)	
Tested Channel	0 (2402 MHz), 19 (2440 MHz), 39 (2480 MHz)	
Antenna Type	Built-in Antenna	PCB Antenna
	External Antenna	External Antenna
Antenna Gain	Built-in Antenna	2 dBi
	External Antenna	3 dBi
Antenna Impedance	50Ω	
Antenna System (MIMO Smart Antenna)	N/A	


2.6 Additional Instructions

EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

Power level setup in software			
Test Software Version	J-Link RTT Viewer V6.40		
Support Units (Software installation media)	Description	Manufacturer	Model
		Notebook	Lenovo
Mode	Channel	Frequency (MHz)	Soft Set
GFSK	CH0	2402	TX LEVEL is built-in set parameters and cannot be changed and selected.
	CH19	2440	
	CH39	2480	

Run Software

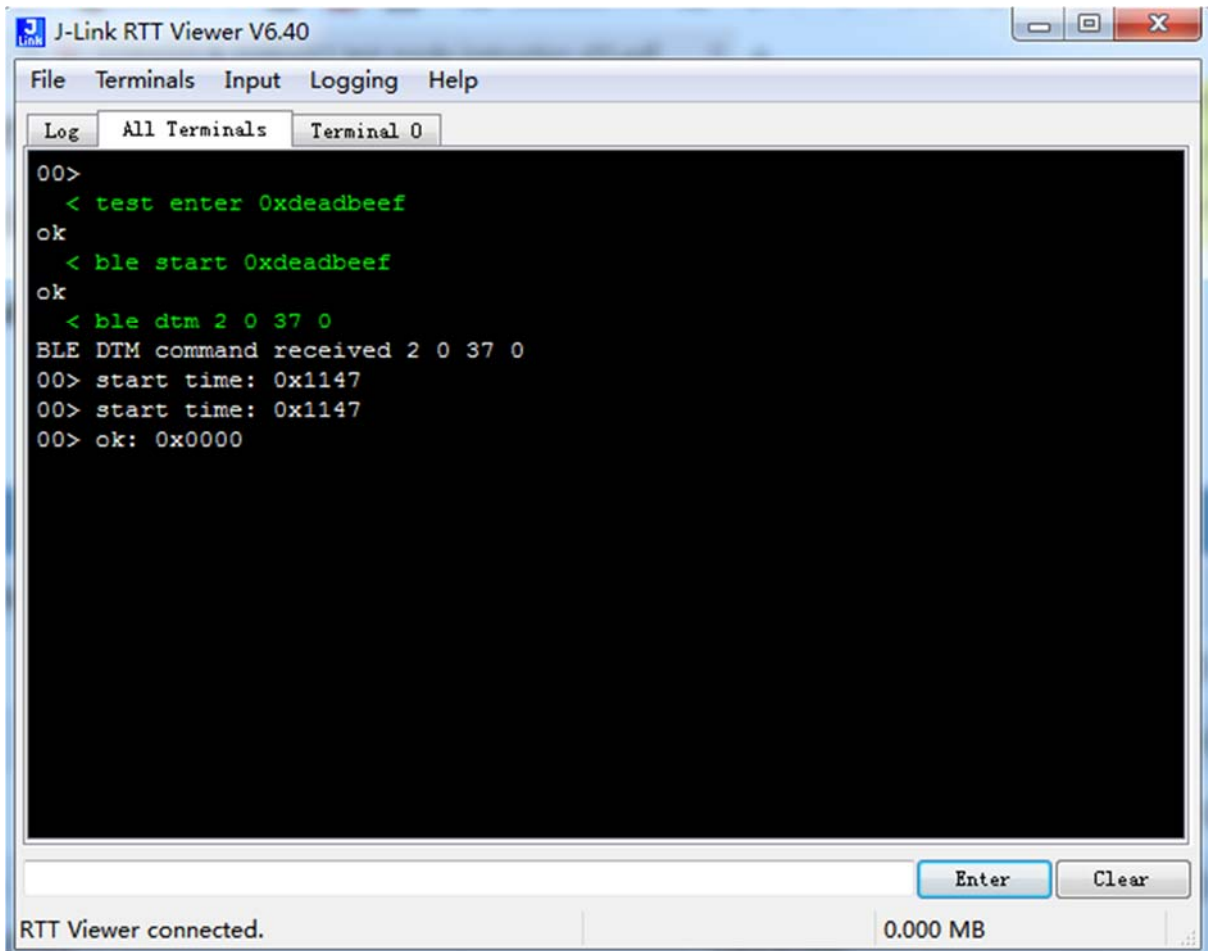

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-17 Edition)	Miscellaneous Wireless Communications Services
2	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules
3	RSS-Gen (Issue 5, Mar. 2019)	General Requirements for Compliance of Radio Apparatus
4	RSS-247 (Issue 2, February 2017)	Digital Transmission Systems (DTSs), Frequency Hopping Systems(FHSs) and Licence-Exemp Local Area Network (LE-LAN) Devices
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	ISED Part No.	Channel	Test Result	Verdict
1	Antenna Requirement	15.203	RSS-247, 5.4 (f)	N/A	--	Pass ^{Note1}
2	Output Power	15.247(b)	RSS-247, 5.4 (d)	Low/Middle/High	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247(a)	RSS-GEN, 6.7; RSS-247, 5.2 (a)	Low/Middle/High	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247(d)	RSS-247, 5.5;	Low/ High	ANNEX A.4	Pass
6	Conducted Emission	15.207	RSS-GEN, 8.8	Low/Middle/High	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	RSS-247, 5.2 (b)	Low/Middle/High	ANNEX A.8	Pass
10	Receiver Spurious Emissions	--	RSS-Gen, 7.4	--	N/A	N/A ^{Note2}

Note 1: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note 2: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

Note 3: The only difference between the EUT (test samples in this report) and testing sample of report No. BL-SZ1940524-601 (FCC ID: 2AS9401) (ISED Number: 25021-01), which issued by Shenzhen BALUN Technology Co., Ltd. on Jun. 26, 2019 are:

1. SGW1110 and SGW1111 are used 4 layers PCB and small size.
2. SGW1110: Bluetooth Low Energy module with integrated PCB antenna.
3. SGW1111: Bluetooth Low Energy module with u.FL connector for external antenna.
4. Updated EUT name, model name, hardware version and software version.

So Radiated Spurious Emission and Band Edge(Restricted-band band-edge) were retested in this report.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.3 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2019.06.13	2020.06.12
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2019.06.13	2020.06.12
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2019.10.29	2020.10.28
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2019.06.13	2020.06.12
LISN	SCHWARZBECK	NSLK 8127	8127-687	2019.06.13	2020.06.12
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2019.06.15	2020.06.14
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2019.06.18	2020.06.17
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2019.06.15	2020.06.14
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	2019.01.09	2020.01.08
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	2019.01.09	2020.01.08
Temperature Chamber	AHK	SP20	1412	2019.06.24	2020.06.23
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.09	2020.11.08
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2018.08.22	2020.08.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2018.07.22	2020.07.21
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2019.01.05	2021.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2020.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.07.19	2020.07.18
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2019.08.23	2020.08.22
Power Amplifier	OPHIR RF	5225F	1037	2019.02.28	2020.02.27
Power Amplifier	OPHIR RF	5273F	1016	2019.02.28	2020.02.27
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Sound Level Meter	B&K	NL-20	00844023	2019.11.12	2020.11.11
Ear Simulator	B&K	4185	2409449	2019.11.12	2020.11.11
Ear Simulator	B&K	4195	2418189	2019.11.12	2020.11.11
Audio analyzer	B&K	UPL 16	100129	2019.11.12	2020.11.11

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Software	BALUN	BL410	-	-	-
Cable	ROHDE&SCHWARZ	JUNFLON	APR0914004	2019.01.09	2020.01.08

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.


Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	± 1.4 dB
Power Spectral Density, conducted	± 2.5 dB
Unwanted Emissions, conducted	± 2.8 dB
All emissions, radiated	± 5.4 dB
Temperature	± 1 °C
Humidity	$\pm 4\%$

4.4 Description of Test Setup

4.4.1 For Antenna Port Test


Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)

For example: the measurement value is 10 dBm and the cable loss is 0.5dB, then the conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

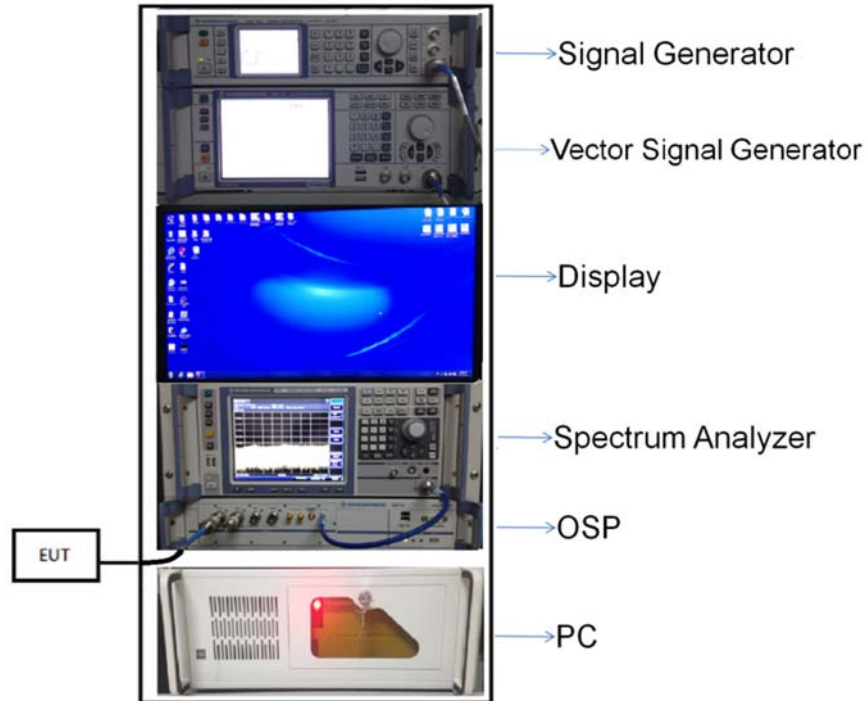


(Diagram 1)

4.4.2 For AC Power Supply Port Test

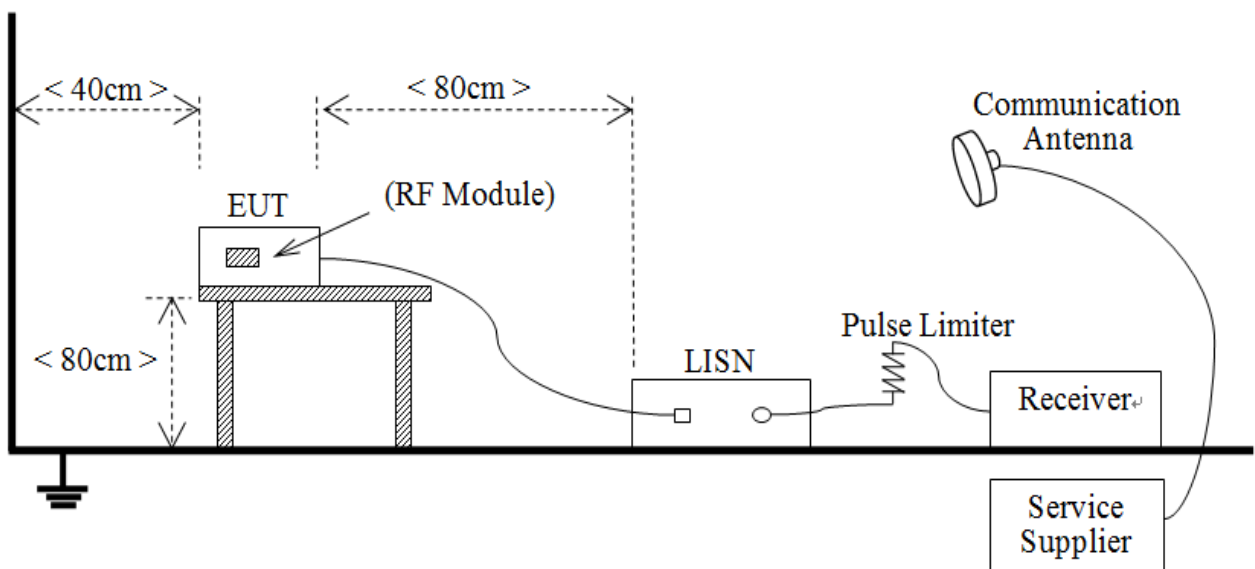


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

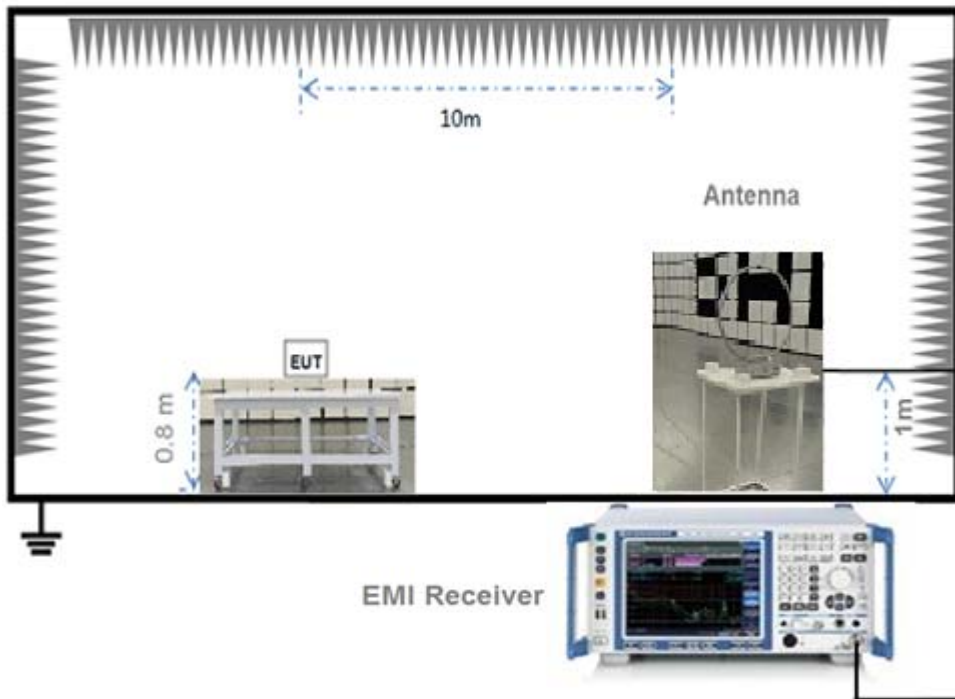


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

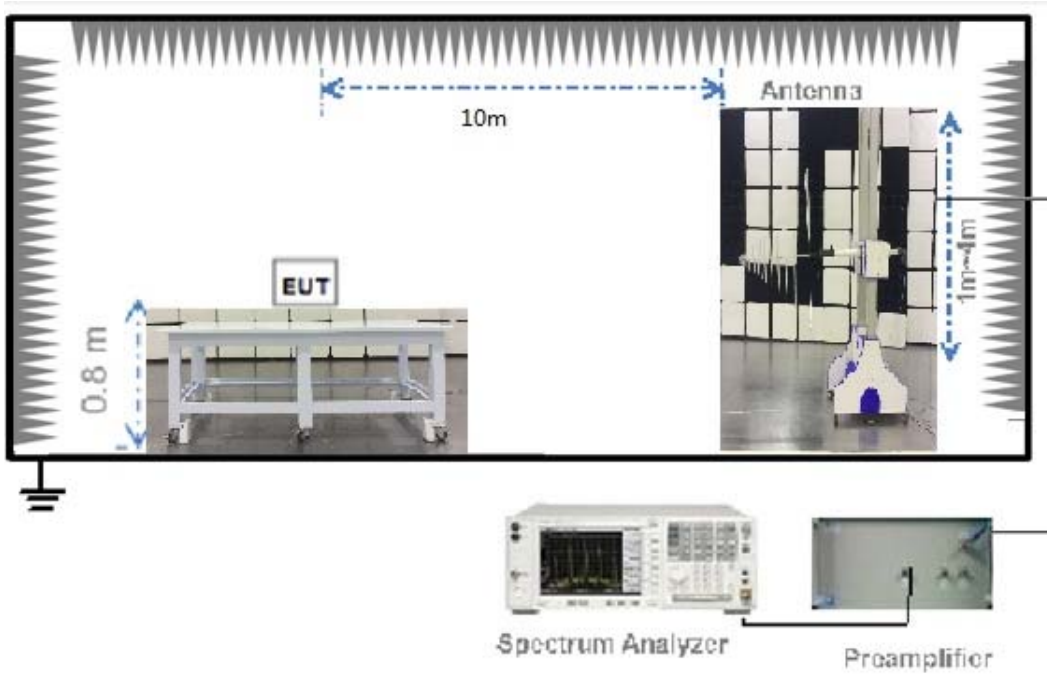

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

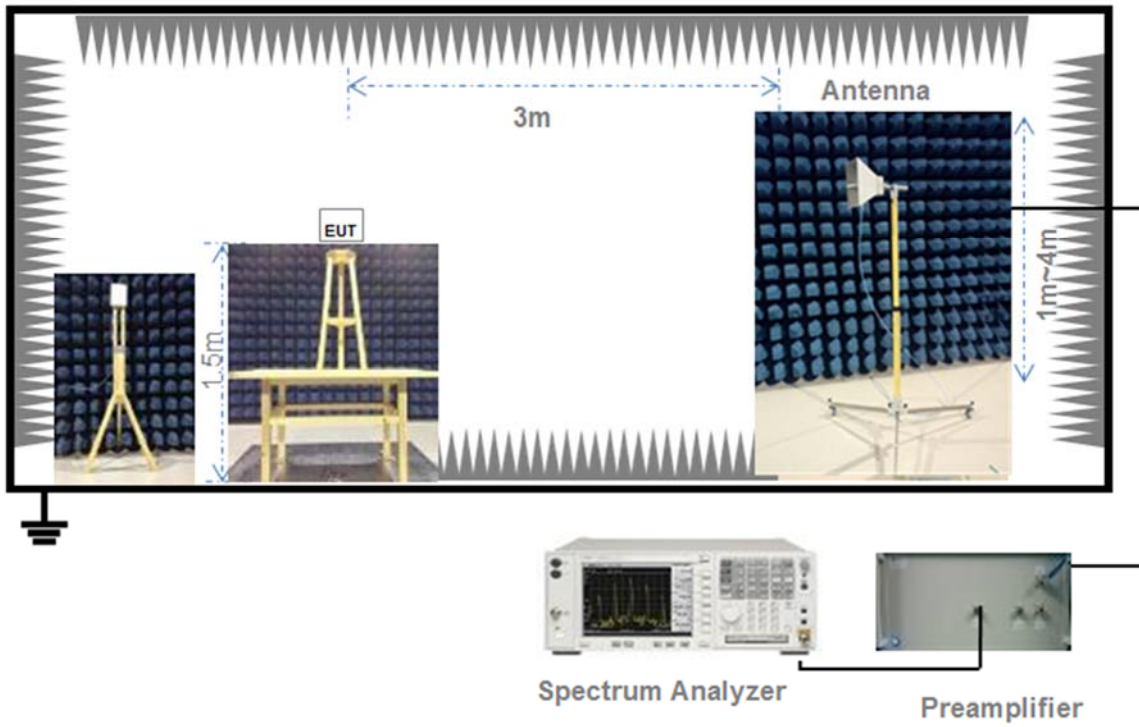

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.5.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Model Name: SGW1010

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

Model Name: SGW1011

Protected Method	Description
Compliance with 15.203, use of a standard antenna jack or electrical connector is prohibited.	The antenna is the unique connector with a wire antenna.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

RSS-247, 5.4 (d)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

a) Maximum peak conducted output power

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

Set the RBW \geq DTS bandwidth.

Set VBW $\geq 3 \times$ RBW.

Set span $\geq 3 \times$ RBW

Sweep time = auto couple.

Detector = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

b) Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value.

Set VBW \geq RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Occupied Bandwidth

5.3.1 Limit

FCC §15.247(a); RSS-247, 5.2 (a); RSS-GEN, 6.7

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement:

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement:

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.9; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dB $\mu\text{V}/\text{m}$) = 20*log[Field Strength ($\mu\text{V}/\text{m}$)].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands:

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure:

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction:

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain:

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test:

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.10; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

1.1.1 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e); RSS-247, 5.2 (b)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

5.9.2 Test Setup

See section 4.4.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.7.

ANNEX A TEST RESULT

A.1 Output Power, E.I.R.P, Duty Cycle

Built-in Antenna

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK(BLE) -1 Mbps		dBm	mW	
	dBm	mW			
Low	7.06	5.08	30	1000	Pass
Middle	7.26	5.32			Pass
High	7.48	5.60			Pass

E.I.R.P Test Data (For ISED)

Channel	E.I.R.P		Limit		Verdict
	GFSK(BLE) -1 Mbps		dBm	mW	
	dBm	mW			
Low	9.06	8.05	36	4000	Pass
Middle	9.26	8.43			Pass
High	9.48	8.87			Pass

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK(BLE) -2 Mbps		dBm	mW	
	dBm	mW			
Low	9.87	9.71	30	1000	Pass
Middle	10.03	10.07			Pass
High	10.23	10.54			Pass

E.I.R.P Test Data (For ISED)

Channel	E.I.R.P		Limit		Verdict
	GFSK(BLE) -2 Mbps		dBm	mW	
	dBm	mW			
Low	11.87	15.38	36	4000	Pass
Middle	12.03	15.96			Pass
High	12.23	16.71			Pass

External Antenna
Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK(BLE) -1 Mbps		dBm	mW	
	dBm	mW			
Low	6.22	4.19	30	1000	Pass
Middle	6.27	4.24			Pass
High	6.31	4.28			Pass

E.I.R.P Test Data (For ISED)

Channel	E.I.R.P		Limit		Verdict
	GFSK(BLE) -1 Mbps		dBm	mW	
	dBm	mW			
Low	9.22	8.36	36	4000	Pass
Middle	9.27	8.45			Pass
High	9.31	8.53			Pass

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK(BLE) -2 Mbps		dBm	mW	
	dBm	mW			
Low	7.99	6.30	30	1000	Pass
Middle	8.13	6.50			Pass
High	8.09	6.44			Pass


E.I.R.P Test Data (For ISED)

Channel	E.I.R.P		Limit		Verdict
	GFSK(BLE) -2 Mbps		dBm	mW	
	dBm	mW			
Low	9.99	9.98	36	4000	Pass
Middle	10.13	10.30			Pass
High	10.09	10.21			Pass

Built-in Antenna


Test plots

GFSK(BLE) -1 Mbps LOW CHANNEL

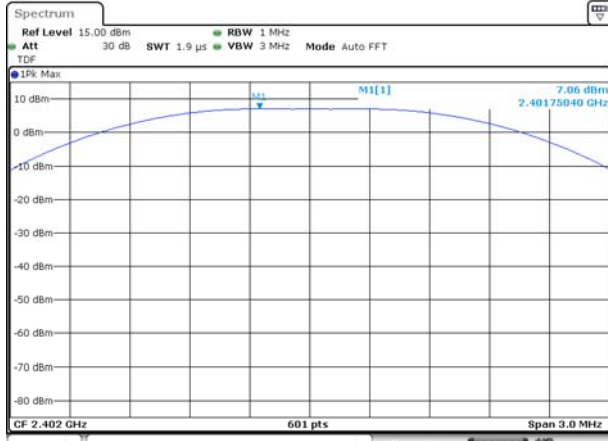


Date: 18.MAY.2019 13:56:10

GFSK(BLE) -1 Mbps MIDDLE CHANNEL

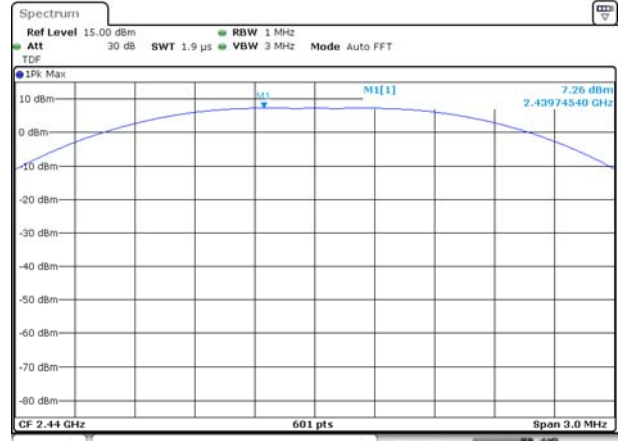

Date: 18.MAY.2019 14:03:52

GFSK(BLE) -1 Mbps HIGH CHANNEL

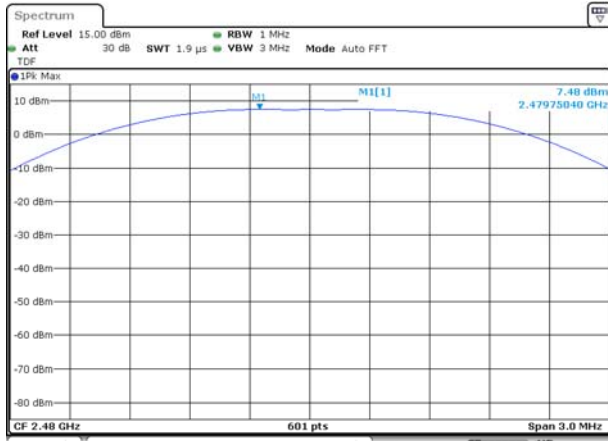


Date: 18.MAY.2019 14:06:39

Built-in Antenna


Test plots

GFSK(BLE) -2 Mbps LOW CHANNEL

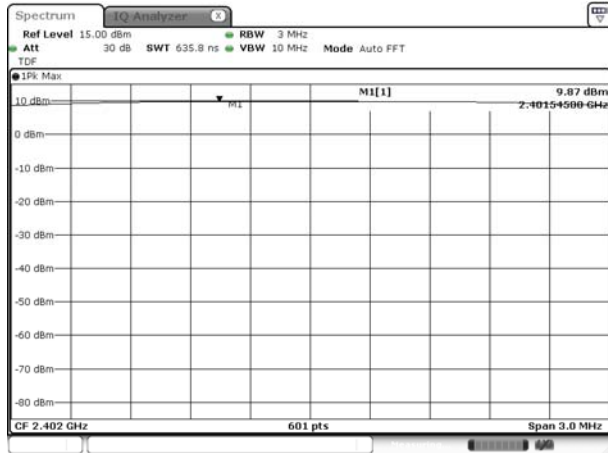


Date: 25 JUN 2019 15:54:12

GFSK(BLE) -2 Mbps MIDDLE CHANNEL

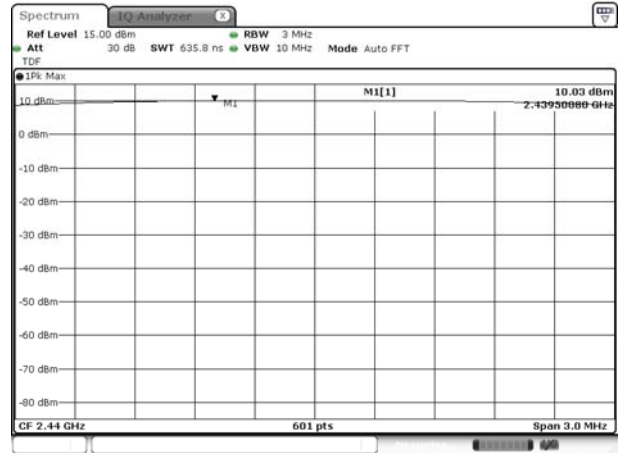

Date: 25 JUN 2019 15:54:52

GFSK(BLE) -2 Mbps HIGH CHANNEL

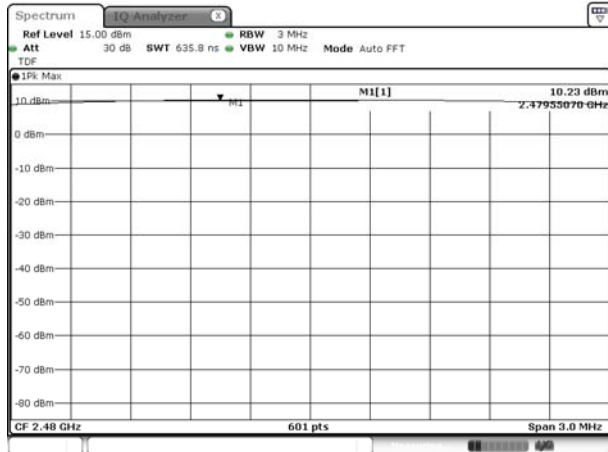


Date: 25 JUN 2019 15:55:46

External Antenna


Test plots

GFSK(BLE) -1 Mbps LOW CHANNEL

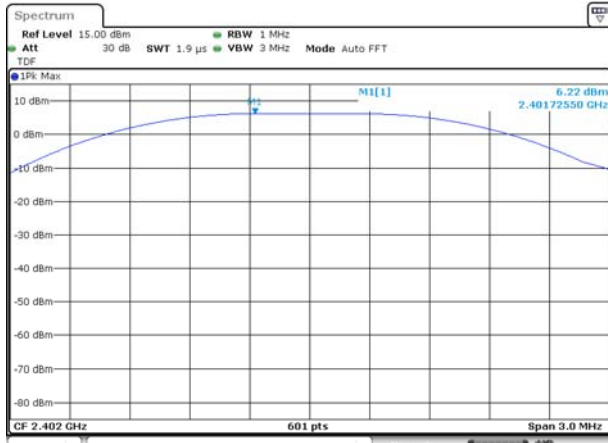

Date: 18.MAY.2019 14:51:55

GFSK(BLE) -1 Mbps MIDDLE CHANNEL

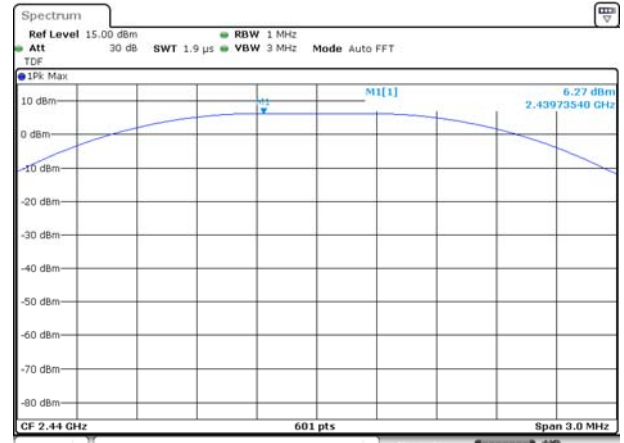

Date: 18.MAY.2019 14:56:32

GFSK(BLE) -1 Mbps HIGH CHANNEL




Date: 18.MAY.2019 14:58:57

External Antenna


Test plots

GFSK(BLE) -2 Mbps LOW CHANNEL

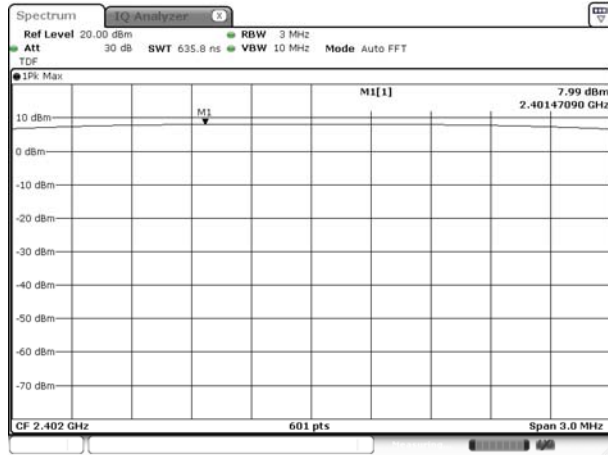


Date: 25 JUN 2019 15:44:19

GFSK(BLE) -2 Mbps MIDDLE CHANNEL

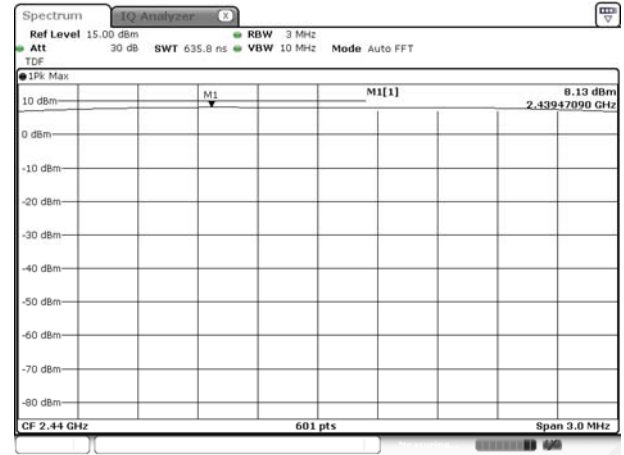

Date: 25 JUN 2019 15:45:04

GFSK(BLE) -2 Mbps HIGH CHANNEL

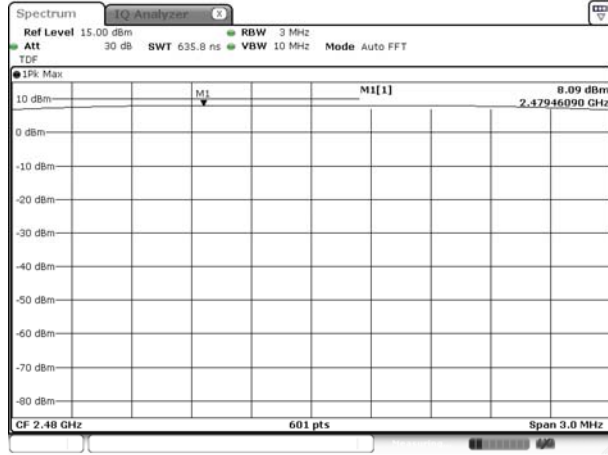


Date: 25 JUN 2019 15:45:32

Built-in Antenna

Duty Cycle Test Data

Band	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)
GFSK (BLE)-1 Mbps	0.390	0.624	62.50%


Test plots

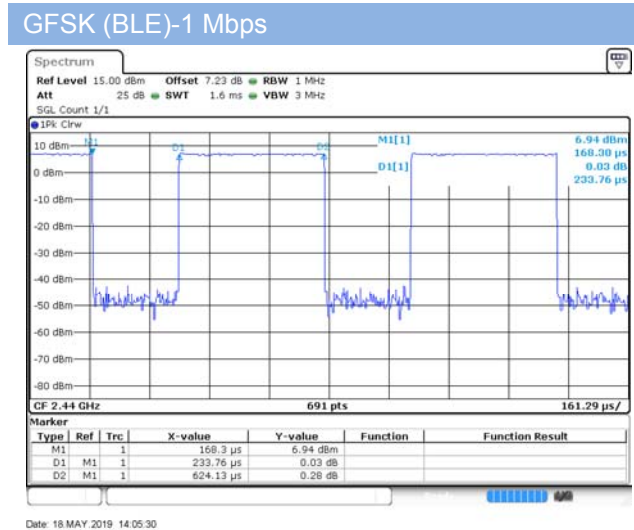

Duty Cycle Test Data

Band	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)
GFSK (BLE)-2 Mbps	0.206	0.625	32.96%

Test plots

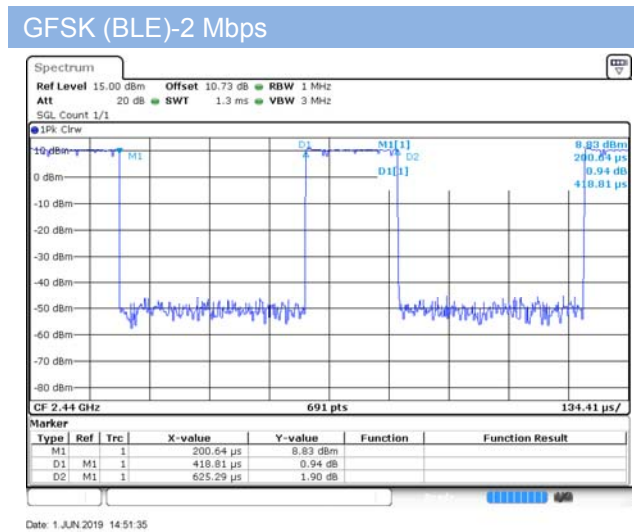


External Antenna

Duty Cycle Test Data

Band	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)
GFSK (BLE)-1 Mbps	0.393	0.626	62.78%


Test plots

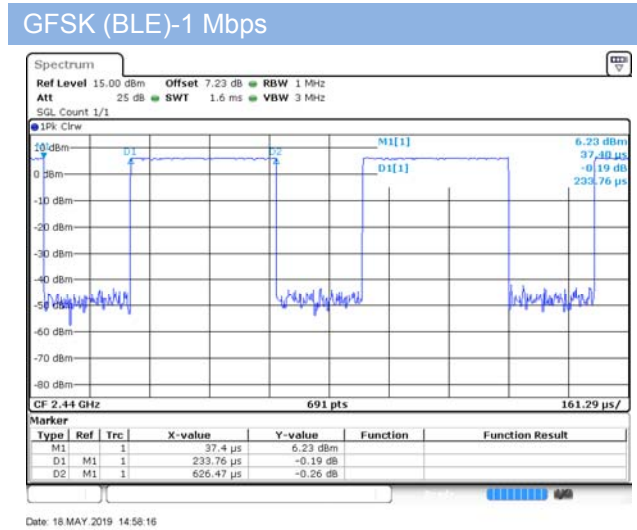

Duty Cycle Test Data

Band	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)
GFSK (BLE)-2 Mbps	0.206	0.624	33.01%

Test plots

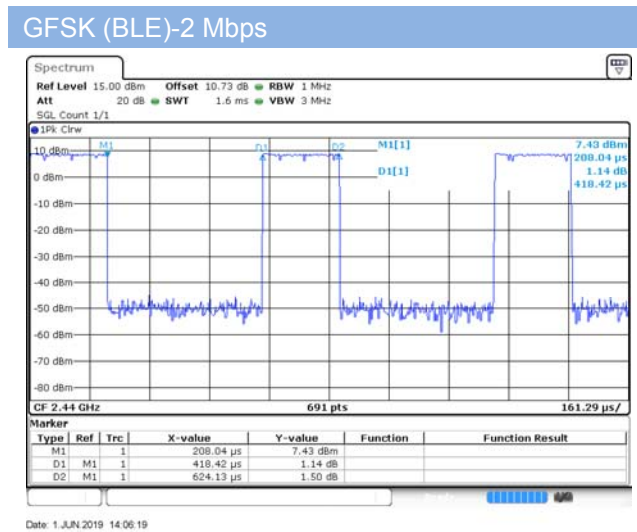

A.2 Occupied Bandwidth

Built-in Antenna

Test Data

Test Mode	GFSK (BLE) -1 Mbps		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	695.801	1046.310	≥500
Middle Channel	700.195	1046.310	≥500
High Channel	708.740	1050.651	≥500

Test Mode	GFSK (BLE) -2 Mbps		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	1134.766	2014.472	≥500
Middle Channel	1134.766	2010.130	≥500
High Channel	1130.615	2036.179	≥500

External Antenna

Test Data

Test Mode	GFSK (BLE) -1 Mbps		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	704.346	1041.968	≥500
Middle Channel	713.135	1037.627	≥500
High Channel	708.740	1046.310	≥500


Test Mode	GFSK (BLE) -2 Mbps		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	1143.555	1997.106	≥500
Middle Channel	1134.766	2027.496	≥500
High Channel	1134.766	2049.204	≥500

Built-in Antenna

Test plots


6 dB Bandwidth

GFSK (BLE) -1 Mbps LOW CHANNEL

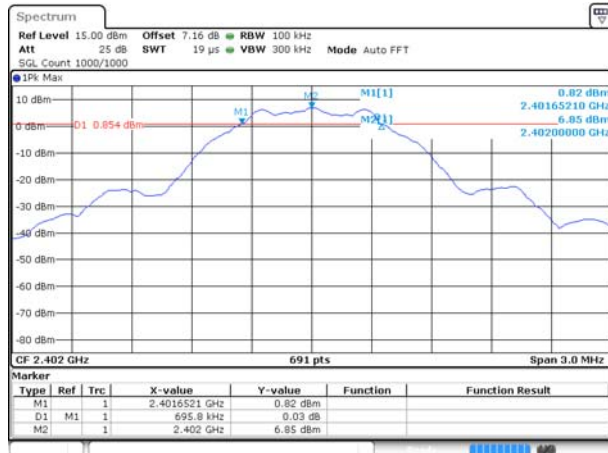


Date: 18 MAY 2019 13:56:15

GFSK (BLE) -1 Mbps MIDDLE CHANNEL

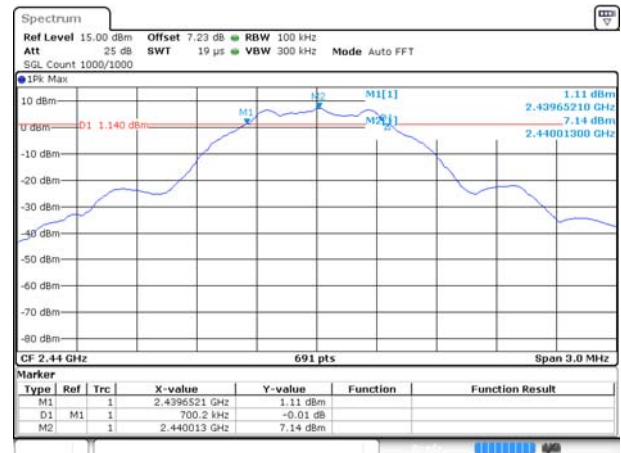

Date: 18 MAY 2019 14:03:56

GFSK (BLE) -1 Mbps HIGH CHANNEL

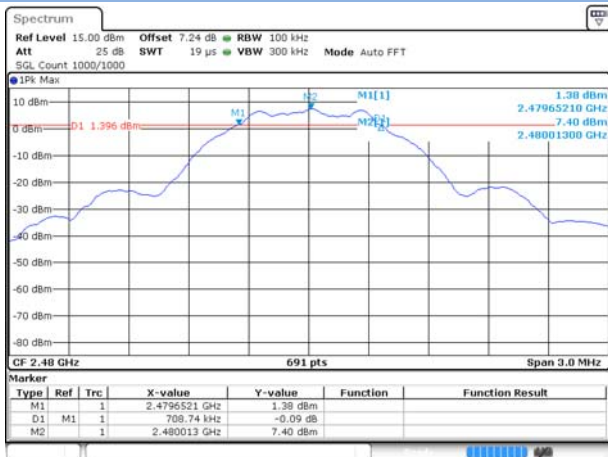

Date: 18 MAY 2019 14:06:44

Built-in Antenna
99% Bandwidth

GFSK (BLE) -1 Mbps LOW CHANNEL



Date: 18 MAY 2019 13:56:20

GFSK (BLE) -1 Mbps MIDDLE CHANNEL



Date: 18 MAY 2019 14:04:01

GFSK (BLE) -1 Mbps HIGH CHANNEL




Date: 18 MAY 2019 14:06:49

Built-in Antenna

Test plots


6 dB Bandwidth

GFSK (BLE) -2 Mbps LOW CHANNEL

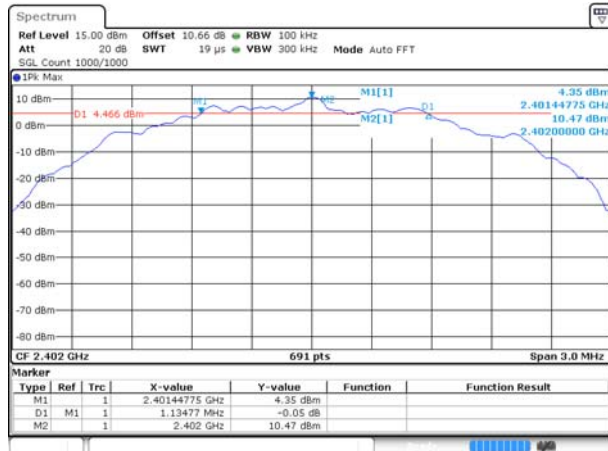


Date: 1 JUN 2019 14:41:00

GFSK (BLE) -2 Mbps MIDDLE CHANNEL

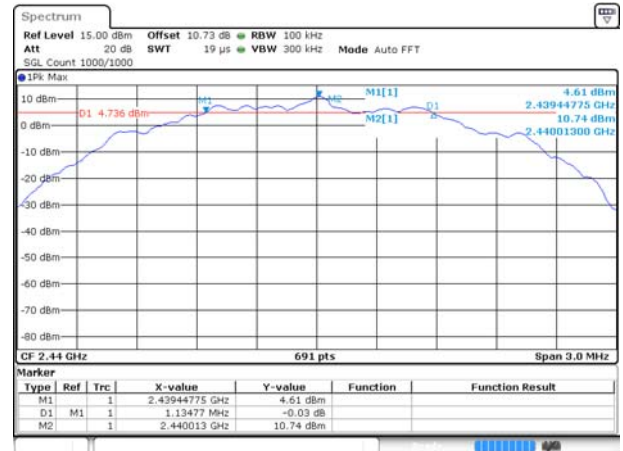

Date: 1 JUN 2019 14:49:22


GFSK (BLE) -2 Mbps HIGH CHANNEL

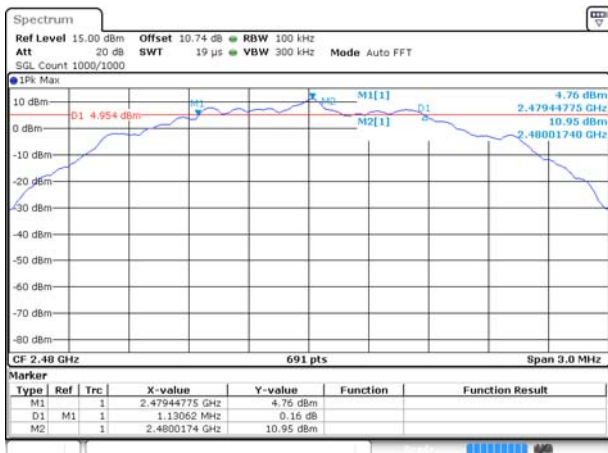

Date: 1 JUN 2019 14:53:16

Built-in Antenna
99% Bandwidth

GFSK (BLE) -2 Mbps LOW CHANNEL

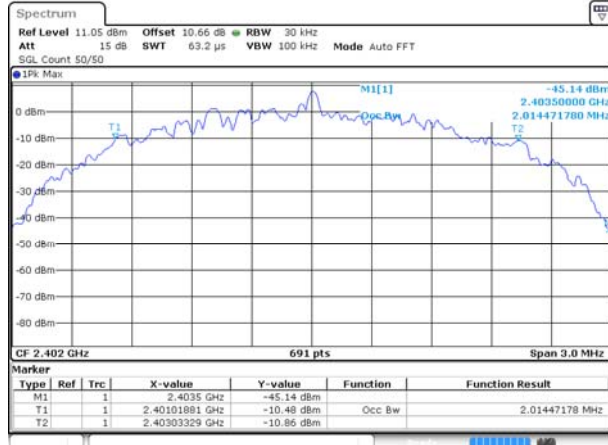


Date: 1 JUN 2019 14:41:05

GFSK (BLE) -2 Mbps MIDDLE CHANNEL



Date: 1 JUN 2019 14:49:27

GFSK (BLE) -2 Mbps HIGH CHANNEL

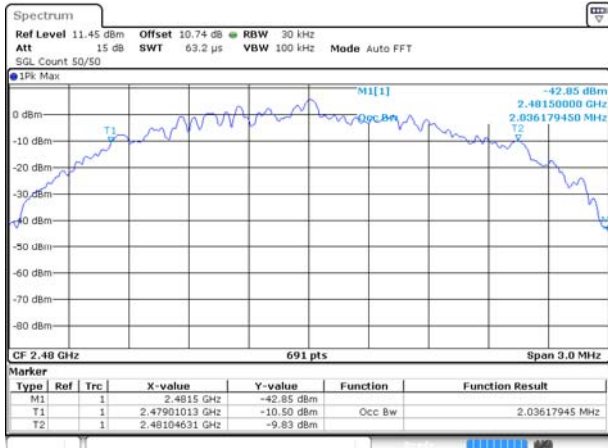


Date: 1 JUN 2019 14:53:22

External Antenna

Test plots


6 dB Bandwidth

GFSK (BLE) -1 Mbps LOW CHANNEL

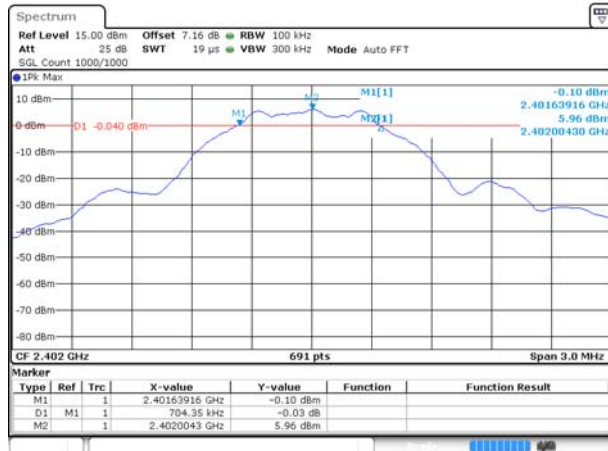


Date: 18 MAY 2019 14:51:59

GFSK (BLE) -1 Mbps MIDDLE CHANNEL

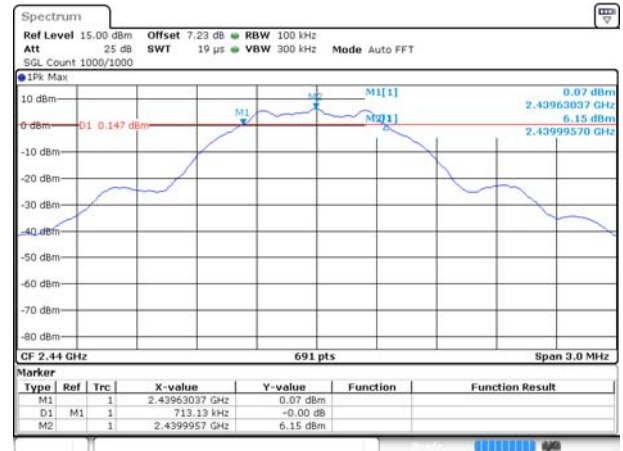

Date: 18 MAY 2019 14:56:36

GFSK (BLE) -1 Mbps HIGH CHANNEL

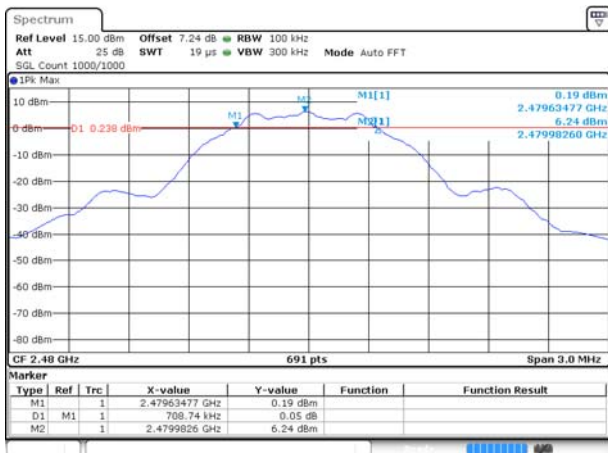

Date: 18 MAY 2019 14:59:01

External Antenna
99% Bandwidth

GFSK (BLE) -1 Mbps LOW CHANNEL




Date: 18.MAY.2019 14:52:04

GFSK (BLE) -1 Mbps MIDDLE CHANNEL



Date: 18.MAY.2019 14:56:41

GFSK (BLE) -1 Mbps HIGH CHANNEL

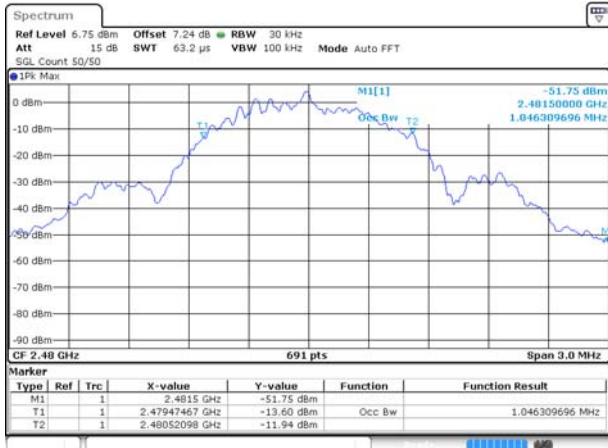


Date: 18.MAY.2019 14:59:06

External Antenna

Test plots


6 dB Bandwidth

GFSK (BLE) -2 Mbps LOW CHANNEL

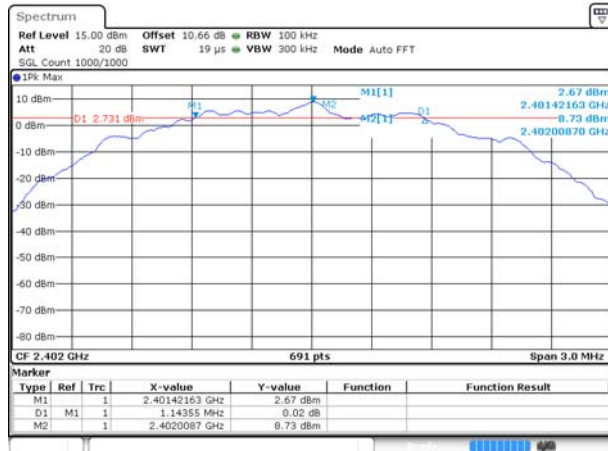


Date: 1 JUN 2019 14:00:52

GFSK (BLE) -2 Mbps MIDDLE CHANNEL

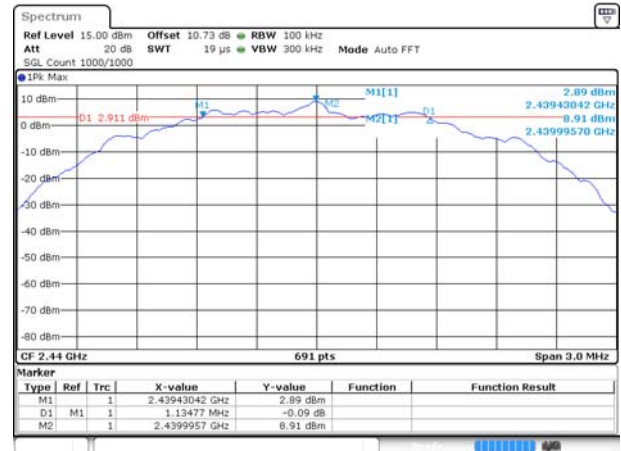

Date: 1 JUN 2019 14:04:20


GFSK (BLE) -2 Mbps HIGH CHANNEL

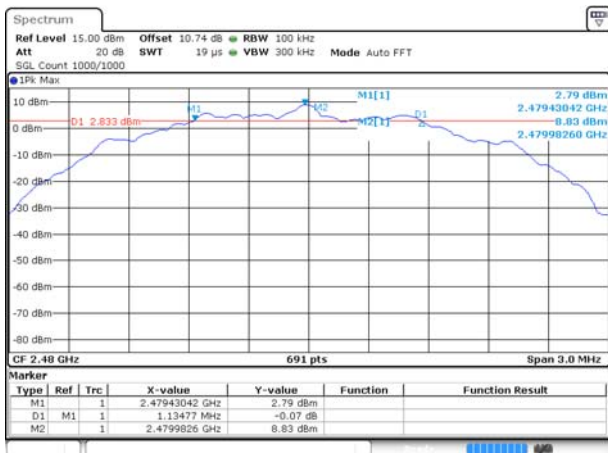

Date: 1 JUN 2019 14:07:38


External Antenna
99% Bandwidth

GFSK (BLE) -2 Mbps LOW CHANNEL

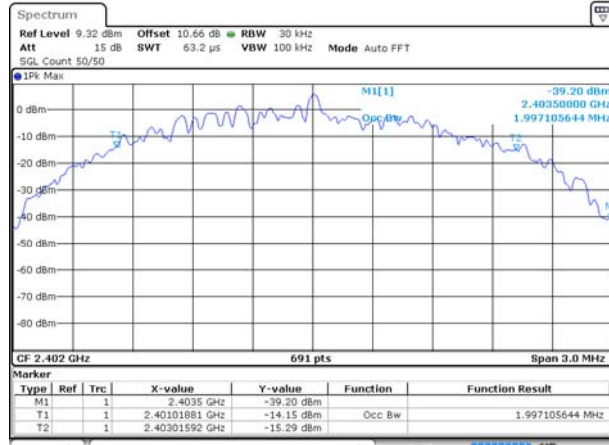


Date: 1 JUN 2019 14:00:57

GFSK (BLE) -2 Mbps MIDDLE CHANNEL

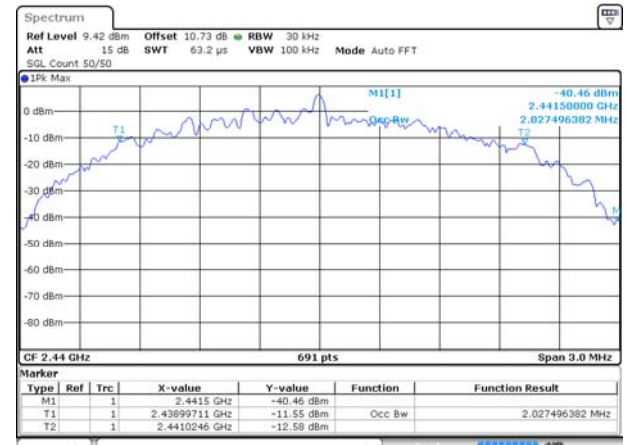

Date: 1 JUN 2019 14:04:25

GFSK (BLE) -2 Mbps HIGH CHANNEL

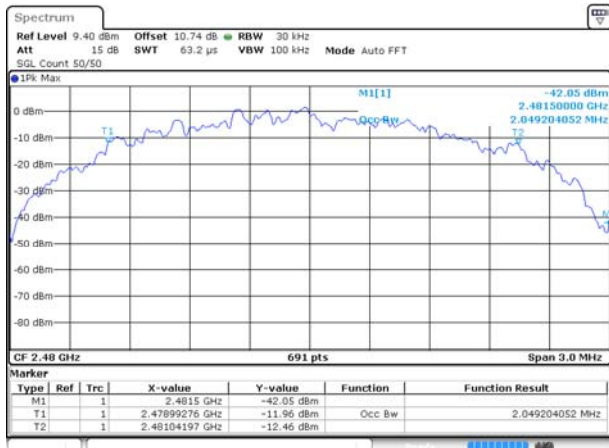

Date: 1 JUN 2019 14:07:43

A.3 Conducted Spurious Emissions

Built-in Antenna

Test Data

GFSK (BLE) -1 Mbps				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-27.61	6.97	-13.03	Pass
Middle	-27.75	7.18	-12.82	Pass
High	-27.78	7.39	-12.61	Pass

GFSK (BLE) -2 Mbps				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-24.05	10.51	-9.49	Pass
Middle	-24.38	10.74	-9.26	Pass
High	-23.86	10.96	-9.04	Pass

External Antenna

Test Data


GFSK (BLE) -1 Mbps				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-27.71	6.11	-13.89	Pass
Middle	-27.34	6.19	-13.81	Pass
High	-26.65	6.23	-13.77	Pass

GFSK (BLE) -2 Mbps				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-23.19	8.78	-11.22	Pass
Middle	-23.97	8.92	-11.08	Pass
High	-24.33	8.83	-11.17	Pass

Built-in Antenna


Test Plots

GFSK (BLE) -1 Mbps LOW CHANNEL , CARRIER LEVEL

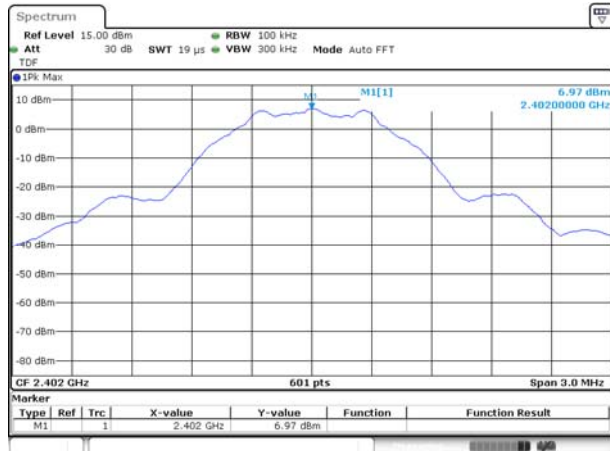


Date: 18 MAY 2019 13:56:39

GFSK (BLE) -1 Mbps LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

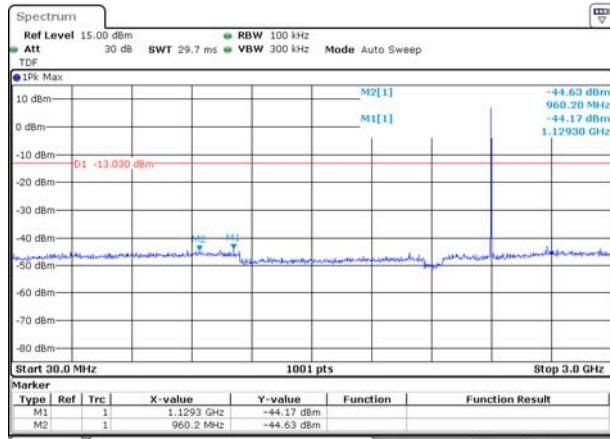


Date: 18 MAY 2019 14:00:21

GFSK (BLE) -1 Mbps LOW CHANNEL , SPURIOUS 2 GHz ~ 25 GHz

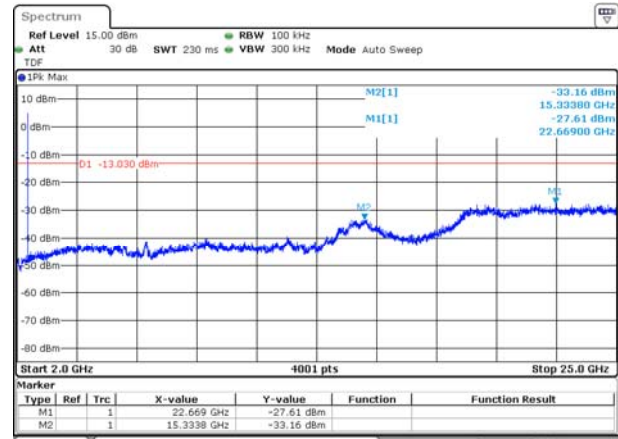


Date: 18 MAY 2019 14:00:45

GFSK (BLE) -1 Mbps MIDDLE CHANNEL , CARRIER LEVEL

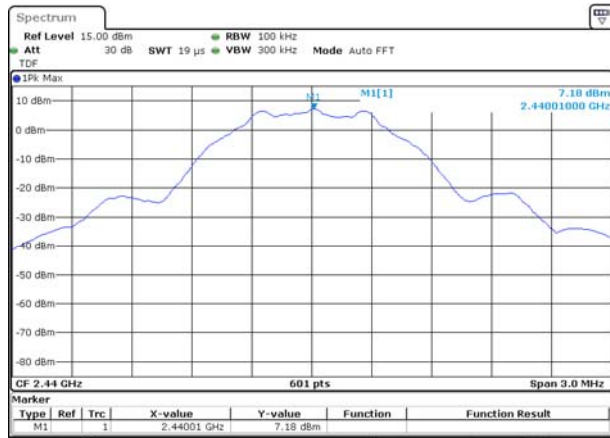


Date: 18 MAY 2019 14:04:12

GFSK (BLE) -1 Mbps MIDDLE CHANNEL ,
SPURIOUS 30 MHz ~ 3 GHz

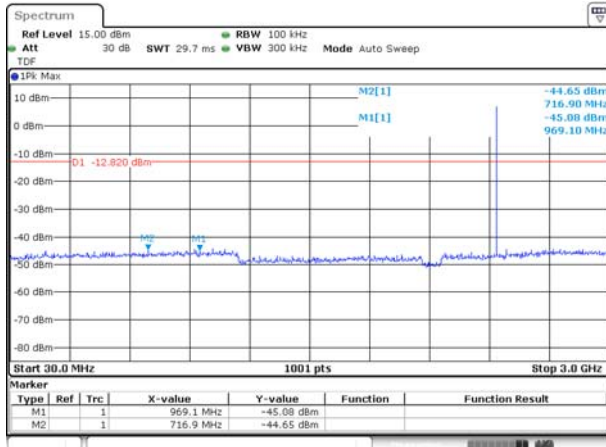


Date: 18.MAY.2019 14:04:56

GFSK (BLE) -1 Mbps MIDDLE CHANNEL ,
SPURIOUS 2 GHz ~ 25 GHz

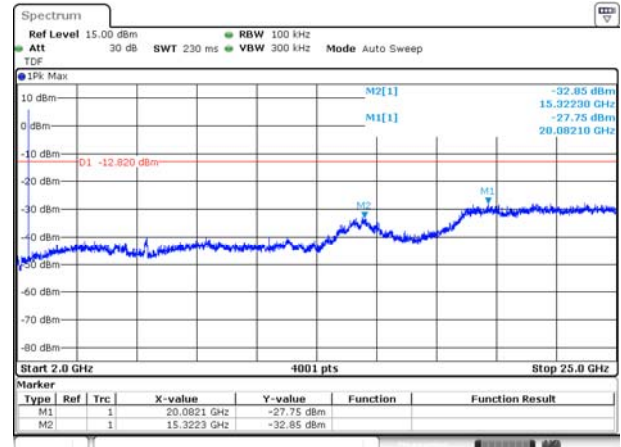


Date: 18.MAY.2019 14:05:11

GFSK (BLE) -1 Mbps HIGH CHANNEL ,
CARRIER LEVEL

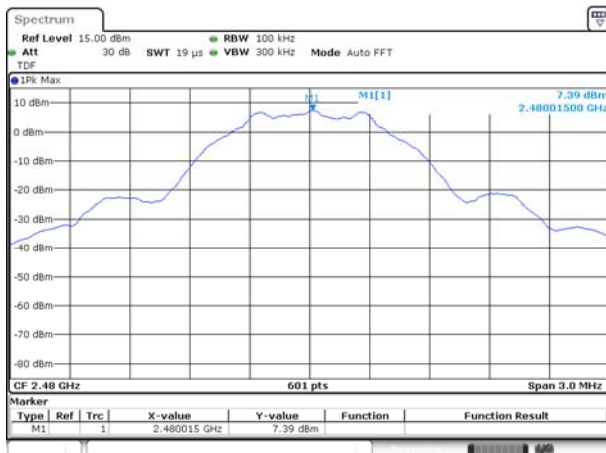


Date: 18.MAY.2019 14:09:46

GFSK (BLE) -1 Mbps HIGH CHANNEL ,
SPURIOUS 30 MHz ~ 3 GHz

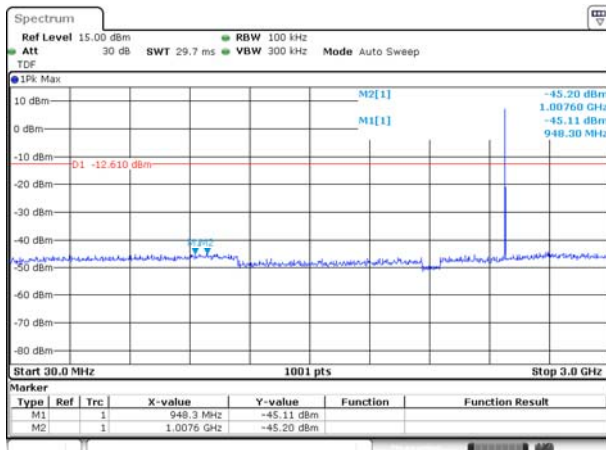

Date: 18.MAY.2019 14:10:27

GFSK (BLE) -1 Mbps HIGH CHANNEL ,
SPURIOUS 2 GHz ~ 25 GHz

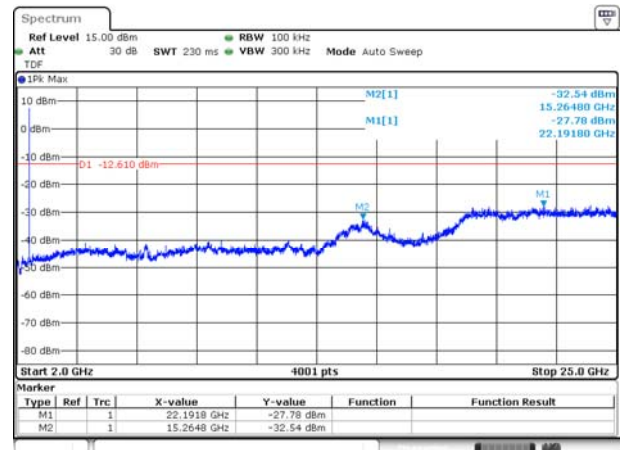


Date: 18.MAY.2019 14:10:41

Built-in Antenna


Test Plots

GFSK (BLE) -2 Mbps LOW CHANNEL , CARRIER LEVEL

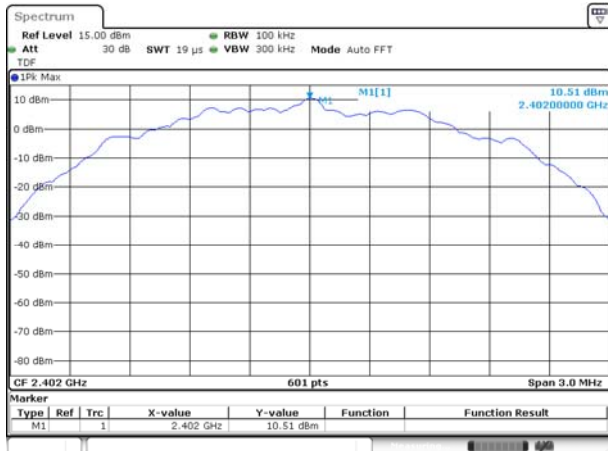


Date: 1.JUN 2019 14:41:58

GFSK (BLE) -2 Mbps LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

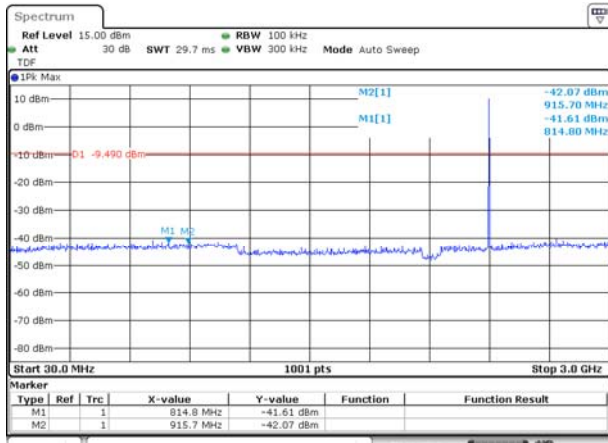


Date: 1.JUN 2019 14:46:55

GFSK (BLE) -2 Mbps LOW CHANNEL , SPURIOUS 2 GHz ~ 25 GHz

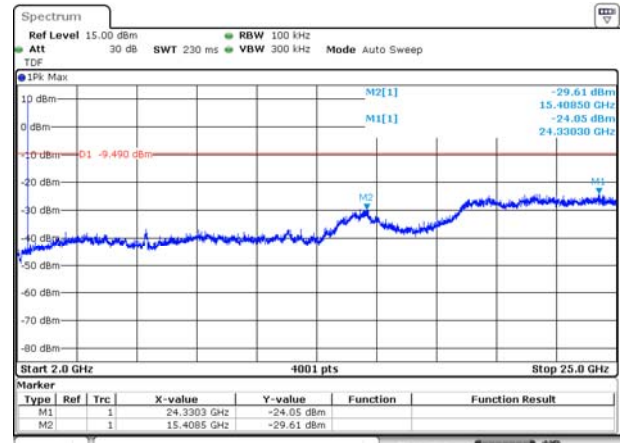


Date: 1.JUN 2019 14:47:10

GFSK (BLE) -2 Mbps MIDDLE CHANNEL , CARRIER LEVEL

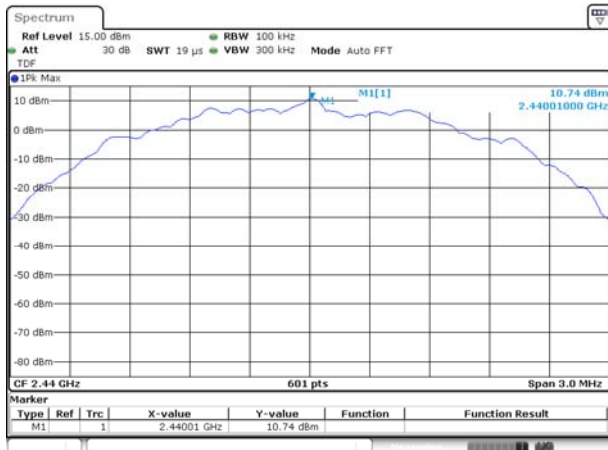


Date: 1.JUN 2019 14:49:38

GFSK (BLE) -2 Mbps MIDDLE CHANNEL ,
SPURIOUS 30 MHz ~ 3 GHz

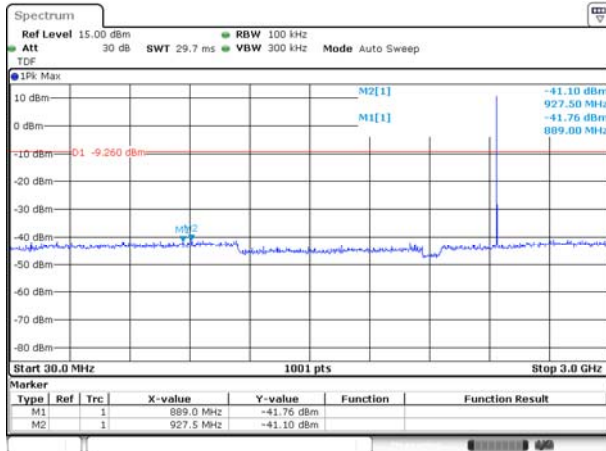


Date: 1 JUN 2019 14:50:18

GFSK (BLE) -2 Mbps MIDDLE CHANNEL ,
SPURIOUS 2 GHz ~ 25 GHz

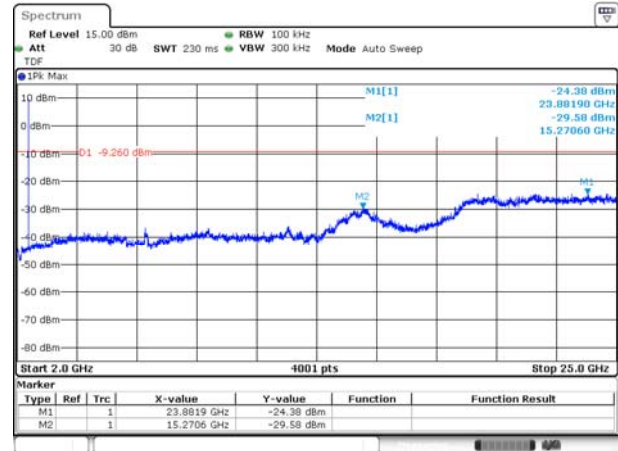


Date: 1 JUN 2019 14:50:43

GFSK (BLE) -2 Mbps HIGH CHANNEL ,
CARRIER LEVEL

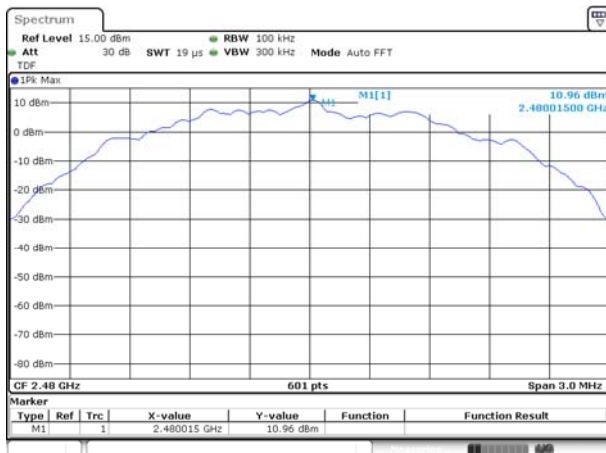


Date: 1 JUN 2019 14:53:38

GFSK (BLE) -2 Mbps HIGH CHANNEL ,
SPURIOUS 30 MHz ~ 3 GHz

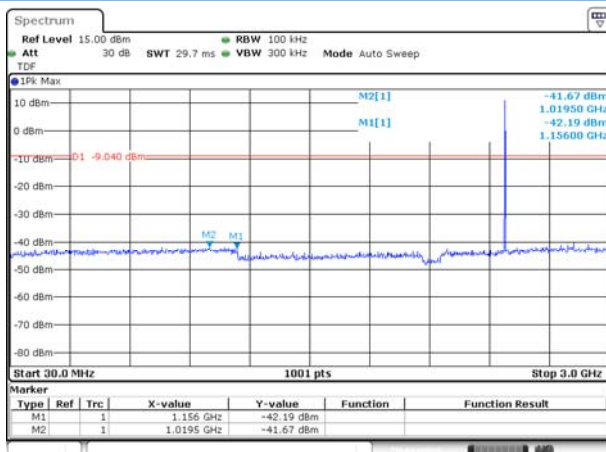

Date: 1 JUN 2019 14:54:17

GFSK (BLE) -2 Mbps HIGH CHANNEL ,
SPURIOUS 2 GHz ~ 25 GHz

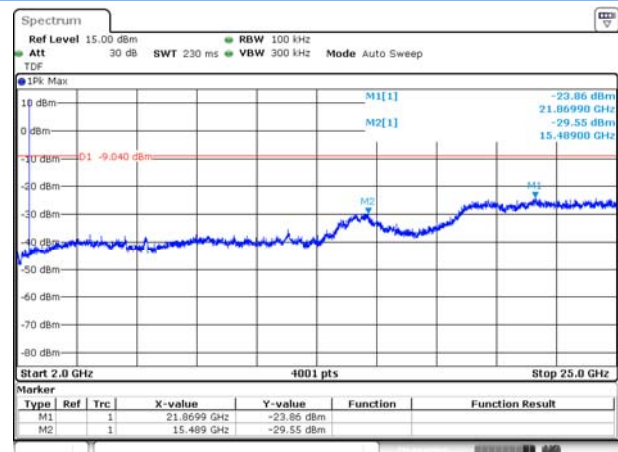


Date: 1 JUN 2019 14:54:43

External Antenna


Test Plots

GFSK (BLE) -1 Mbps LOW CHANNEL , CARRIER LEVEL

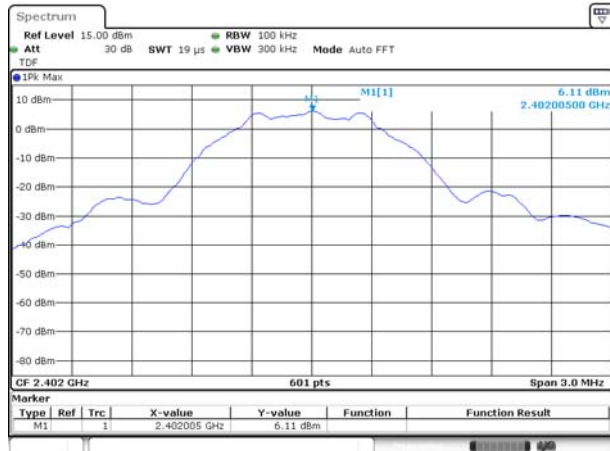


Date: 18 MAY 2019 14:53:53

GFSK (BLE) -1 Mbps LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

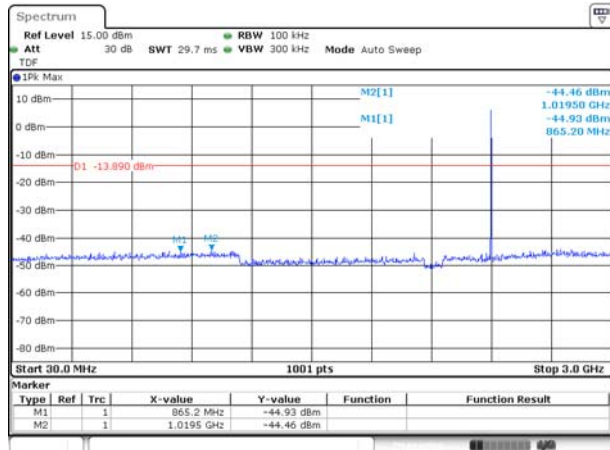


Date: 18 MAY 2019 14:54:30

GFSK (BLE) -1 Mbps LOW CHANNEL , SPURIOUS 2 GHz ~ 25 GHz

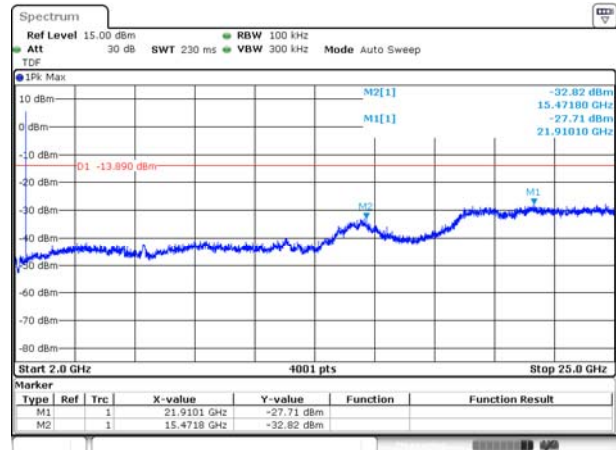


Date: 18 MAY 2019 14:55:09

GFSK (BLE) -1 Mbps MIDDLE CHANNEL , CARRIER LEVEL

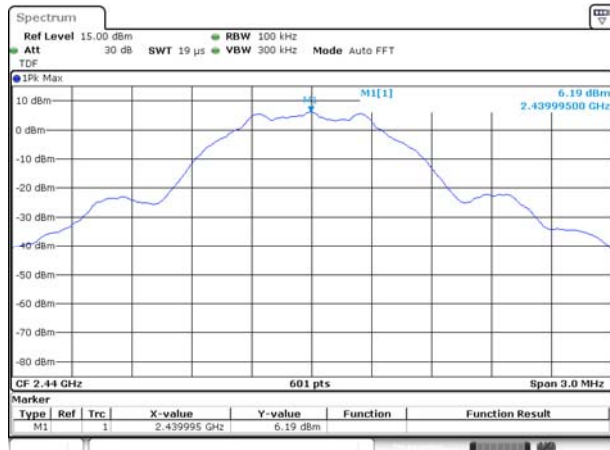


Date: 18 MAY 2019 14:56:54

GFSK (BLE) -1 Mbps MIDDLE CHANNEL ,
SPURIOUS 30 MHz ~ 3 GHz

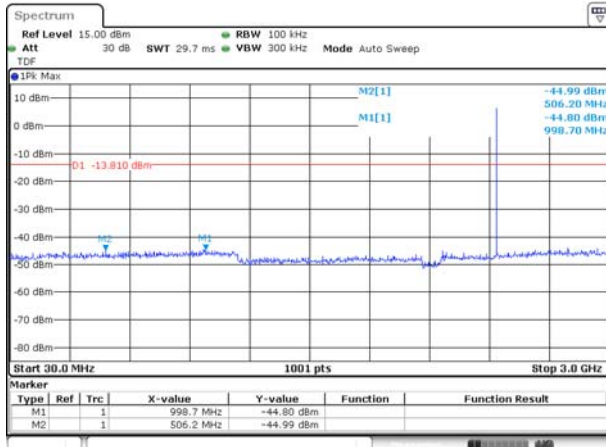


Date: 18 MAY 2019 14:57:34

GFSK (BLE) -1 Mbps MIDDLE CHANNEL ,
SPURIOUS 2 GHz ~ 25 GHz

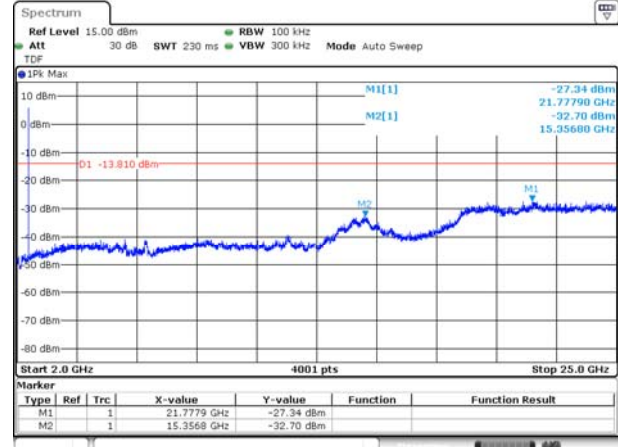


Date: 18 MAY 2019 14:58:02

GFSK (BLE) -1 Mbps HIGH CHANNEL ,
CARRIER LEVEL

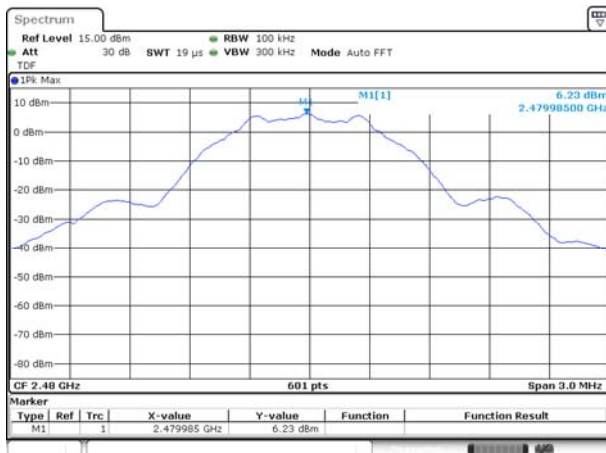


Date: 18 MAY 2019 14:59:14

GFSK (BLE) -1 Mbps HIGH CHANNEL ,
SPURIOUS 30 MHz ~ 3 GHz

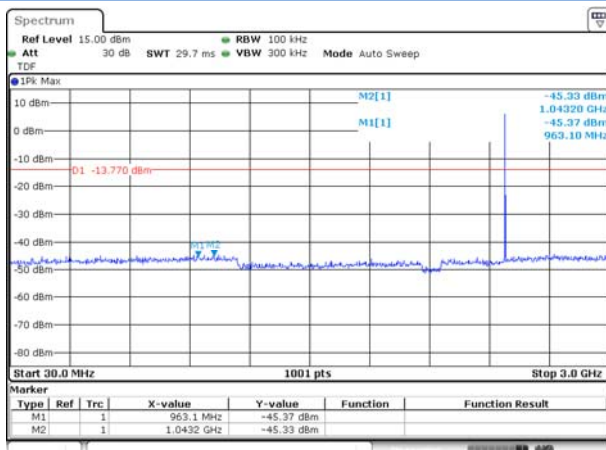

Date: 18 MAY 2019 14:59:52

GFSK (BLE) -1 Mbps HIGH CHANNEL ,
SPURIOUS 2 GHz ~ 25 GHz

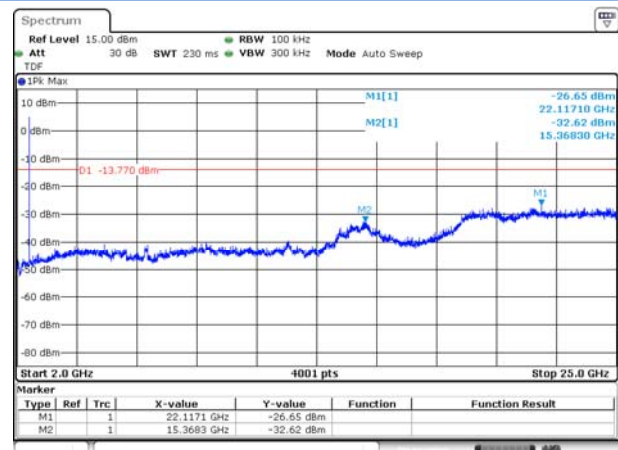


Date: 18 MAY 2019 15:00:12

External Antenna


Test Plots

GFSK (BLE) -2 Mbps LOW CHANNEL , CARRIER LEVEL

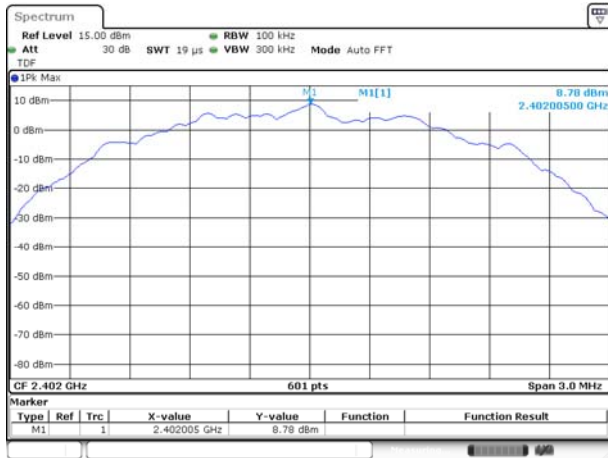


Date: 1.JUN.2019 14:01:09

GFSK (BLE) -2 Mbps LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

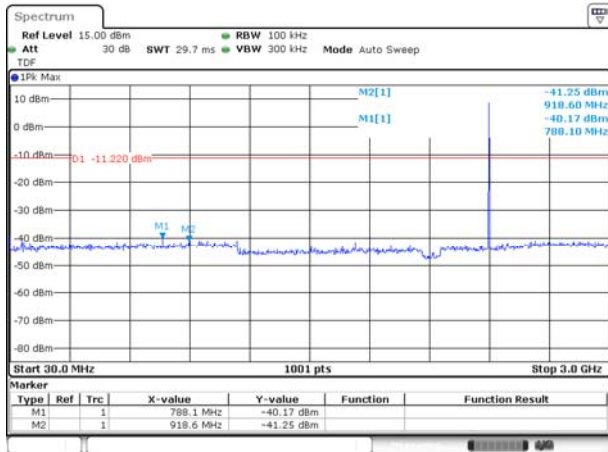


Date: 1.JUN.2019 14:01:59

GFSK (BLE) -2 Mbps LOW CHANNEL , SPURIOUS 2 GHz ~ 25 GHz

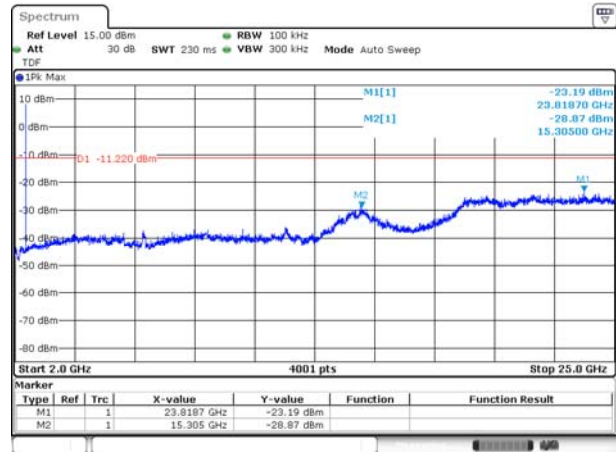


Date: 1.JUN.2019 14:02:25

GFSK (BLE) -2 Mbps MIDDLE CHANNEL , CARRIER LEVEL

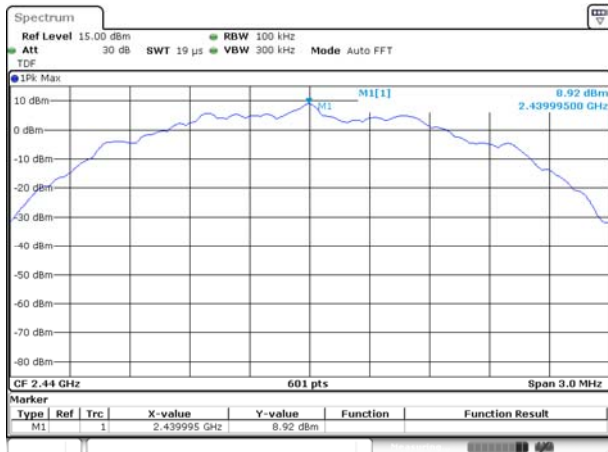


Date: 1.JUN.2019 14:04:42

GFSK (BLE) -2 Mbps MIDDLE CHANNEL ,
SPURIOUS 30 MHz ~ 3 GHz

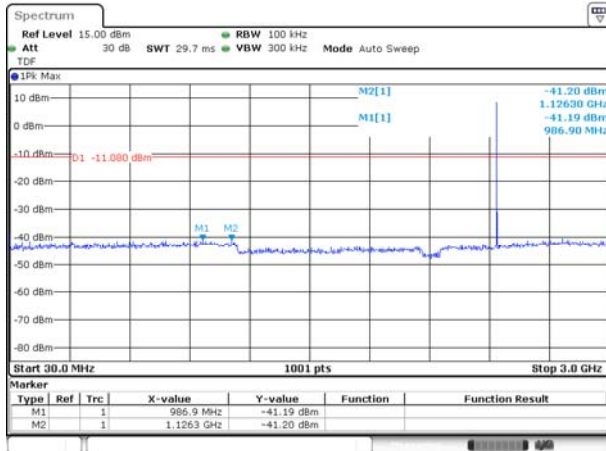


Date: 1 JUN 2019 14:05:37

GFSK (BLE) -2 Mbps MIDDLE CHANNEL ,
SPURIOUS 2 GHz ~ 25 GHz

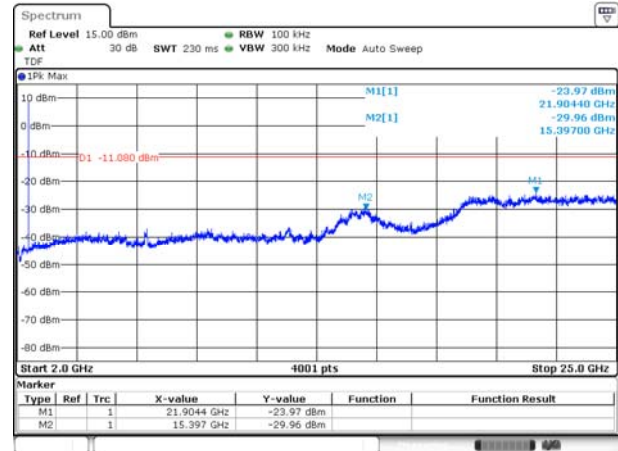


Date: 1 JUN 2019 14:05:58

GFSK (BLE) -2 Mbps HIGH CHANNEL ,
CARRIER LEVEL

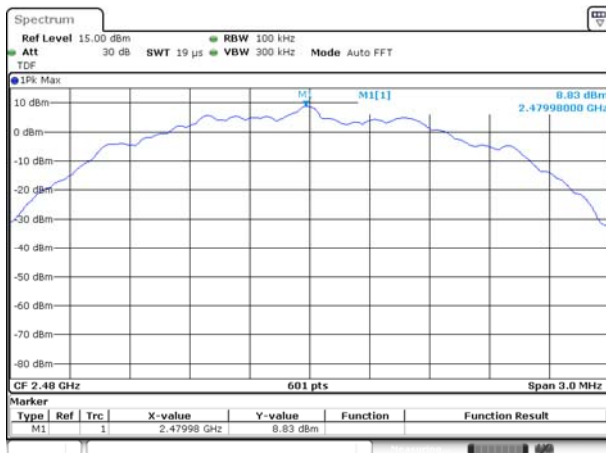


Date: 1 JUN 2019 14:07:54

GFSK (BLE) -2 Mbps HIGH CHANNEL ,
SPURIOUS 30 MHz ~ 3 GHz

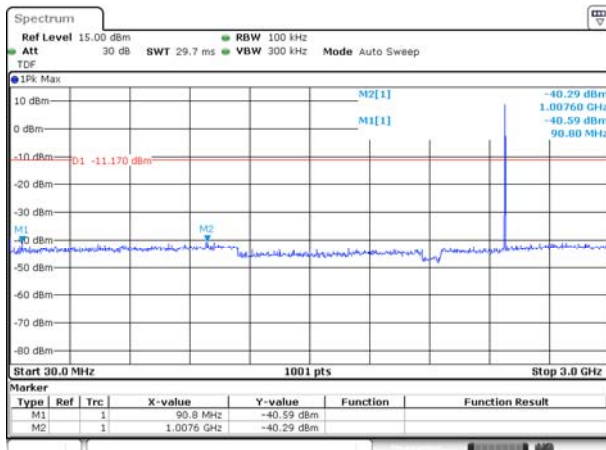

Date: 1 JUN 2019 14:08:34

GFSK (BLE) -2 Mbps HIGH CHANNEL ,
SPURIOUS 2 GHz ~ 25 GHz

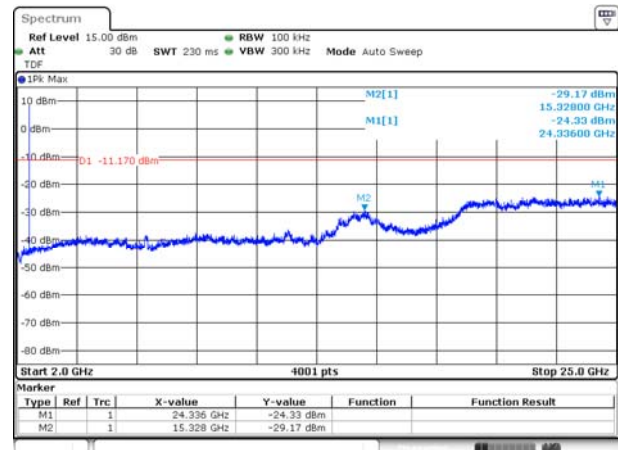

Date: 1 JUN 2019 14:08:58

A.4 Band Edge (Authorized-band band-edge)

Note: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Built-in Antenna

BLE-1 Mbps

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-33.58	6.97	-13.03	Pass
High Channel	-45.51	7.39	-12.61	Pass

BLE-2 Mbps

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-16.79	10.52	-9.48	Pass
High Channel	-40.47	10.96	-9.04	Pass

External Antenna

BLE-1 Mbps

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-35.14	6.11	-13.89	Pass
High Channel	-47.17	6.23	-13.77	Pass


BLE-2 Mbps

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-17.90	8.78	-11.22	Pass
High Channel	-41.90	8.83	-11.17	Pass

Built-in Antenna


Test Plots

GFSK (BLE)-1 Mbps: LOW CHANNEL, Carrier level

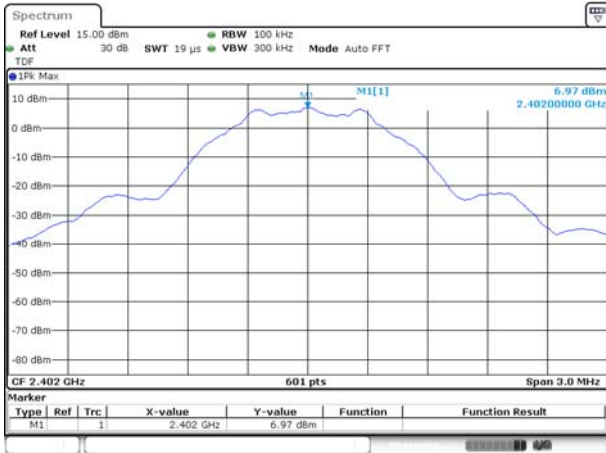


Date: 18.MAY.2019 13:56:39

GFSK (BLE)-1 Mbps: LOW CHANNEL, Reference level

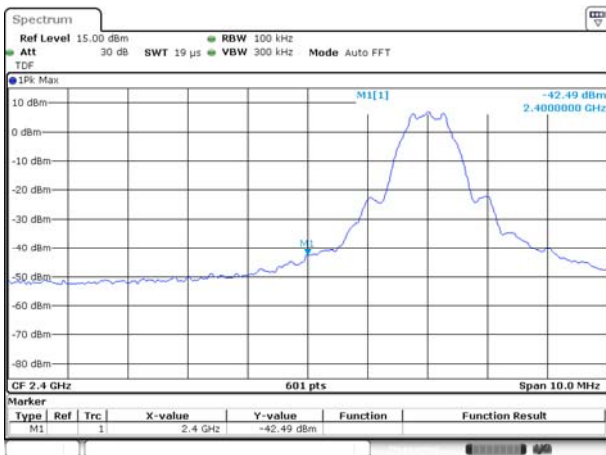


Date: 18.MAY.2019 14:02:24

GFSK (BLE)-1 Mbps: LOW CHANNEL, Band Edge level

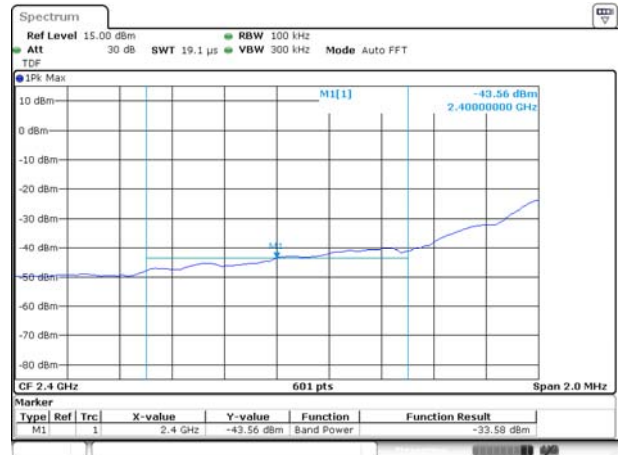


Date: 18.MAY.2019 14:02:35

GFSK (BLE)-1 Mbps: High CHANNEL, Carrier level

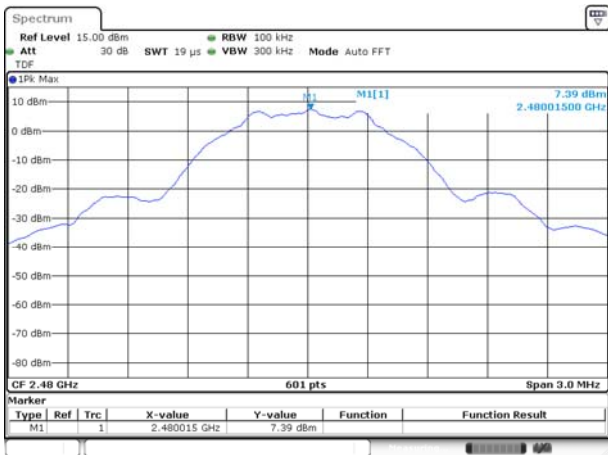


Date: 18.MAY.2019 14:09:46

GFSK (BLE)-1 Mbps: HIGH CHANNEL, Reference level

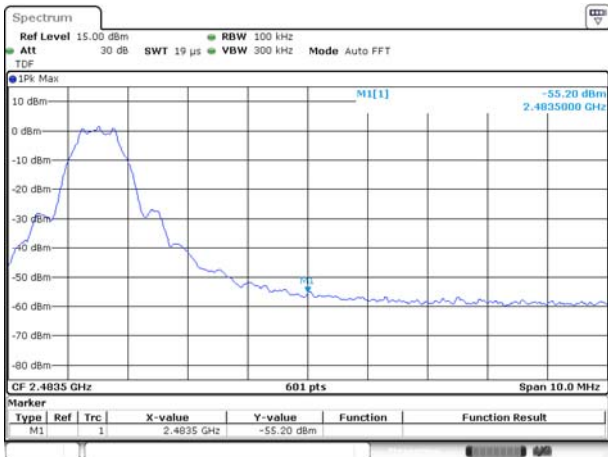


Date: 18.MAY.2019 14:10:55

GFSK (BLE)-1 Mbps: HIGH CHANNEL, Band Edge

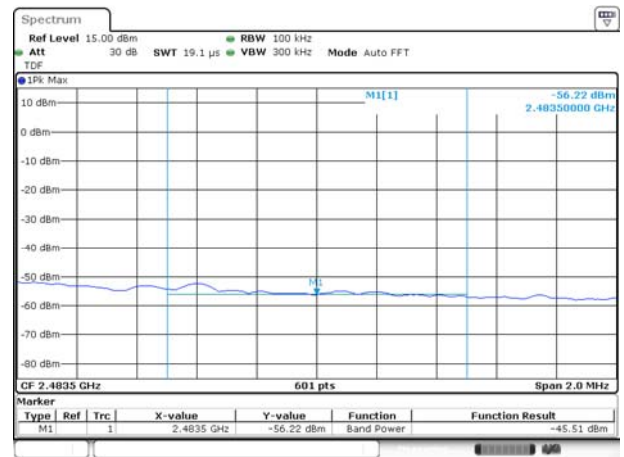


Date: 18.MAY.2019 14:11:25

GFSK (BLE)-2 Mbps: LOW CHANNEL, Carrier level

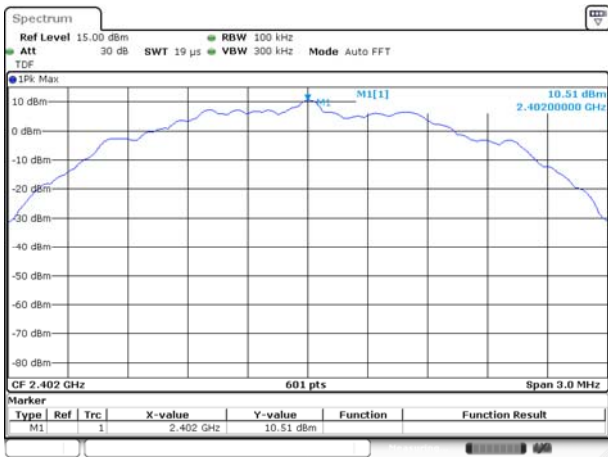


Date: 1 JUN 2019 14:41:58

GFSK (BLE)-2 Mbps: LOW CHANNEL, Reference level

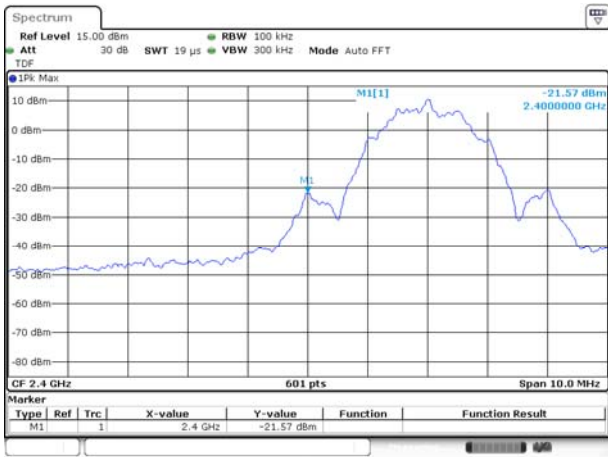


Date: 1 JUN 2019 14:48:07

GFSK (BLE)-2 Mbps: LOW CHANNEL, Band Edge

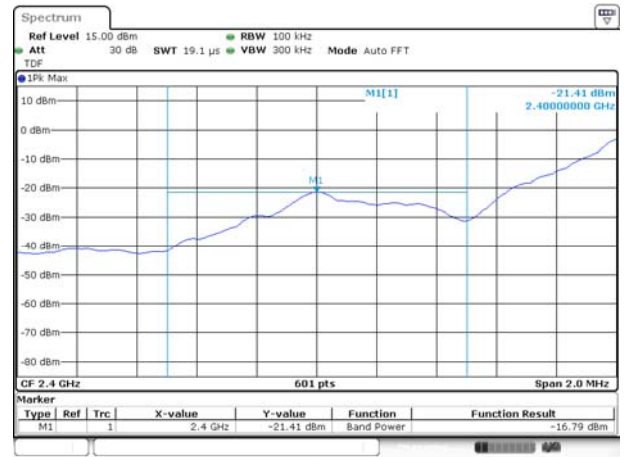


Date: 1 JUN 2019 14:48:14

GFSK (BLE)-2 Mbps: High CHANNEL, Carrier level

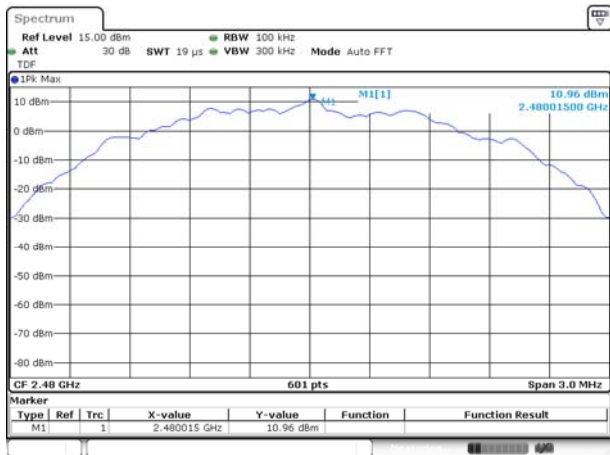


Date: 1 JUN 2019 14:53:38

GFSK (BLE)-2 Mbps: HIGH CHANNEL, Reference level

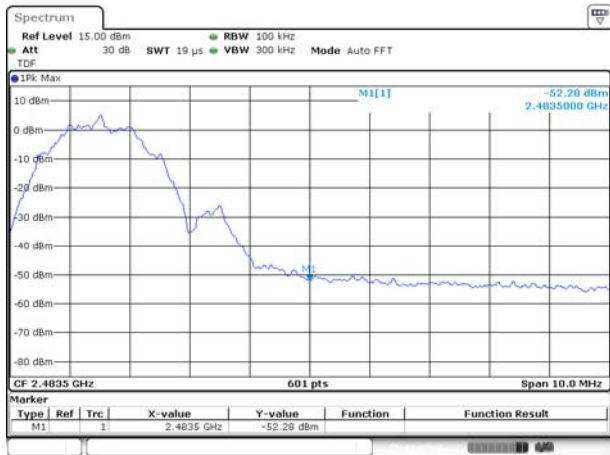

Date: 1 JUN 2019 14:54:57

GFSK (BLE)-2 Mbps: HIGH CHANNEL, Band Edge

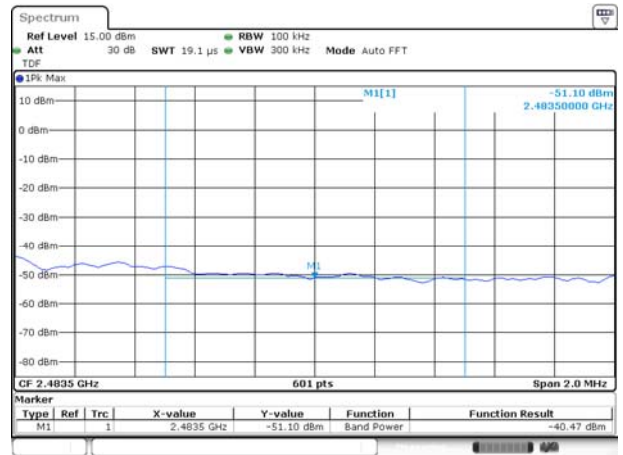


Date: 1 JUN 2019 14:55:10

External Antenna


Test Plots

GFSK (BLE)-1 Mbps: LOW CHANNEL, Carrier level

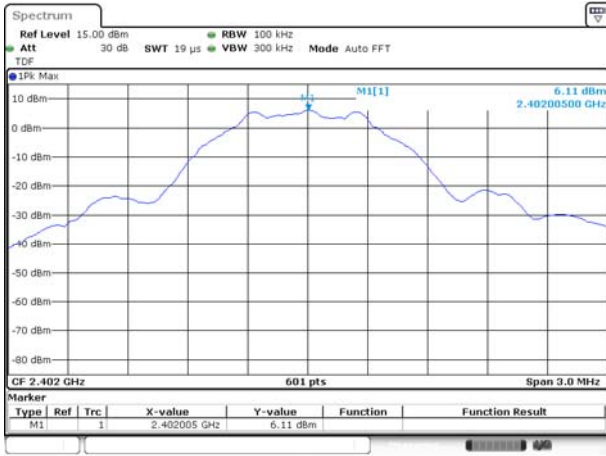


Date: 18 MAY 2019 14:53:53

GFSK (BLE)-1 Mbps: LOW CHANNEL, Reference level

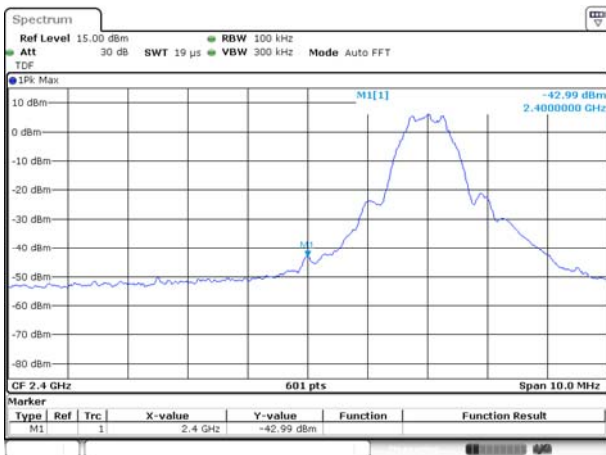


Date: 18 MAY 2019 14:55:24

GFSK (BLE)-1 Mbps: LOW CHANNEL, Band Edge level

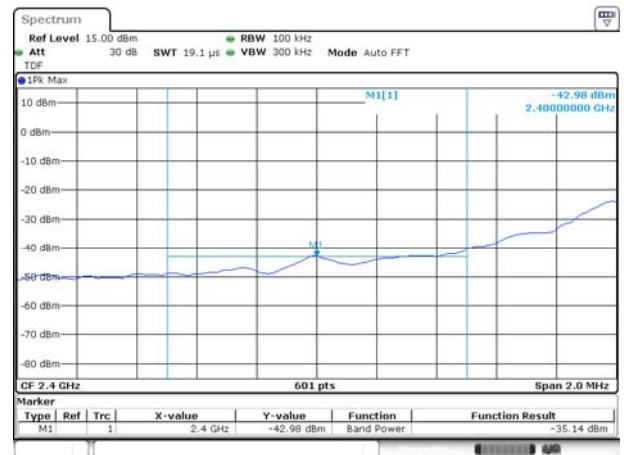


Date: 18 MAY 2019 14:55:34

GFSK (BLE)-1 Mbps: High CHANNEL, Carrier level

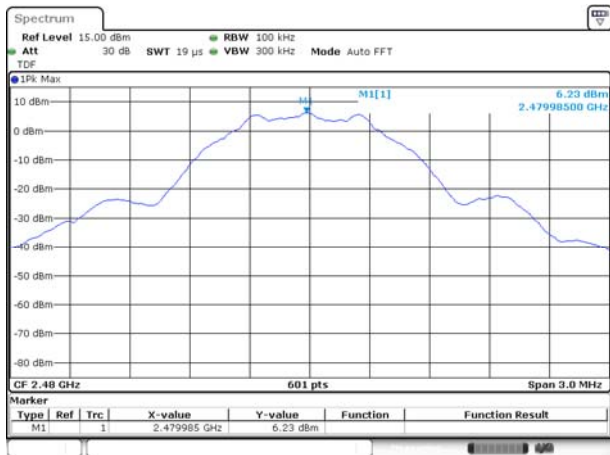


Date: 18 MAY 2019 14:59:14

GFSK (BLE)-1 Mbps: HIGH CHANNEL, Reference level

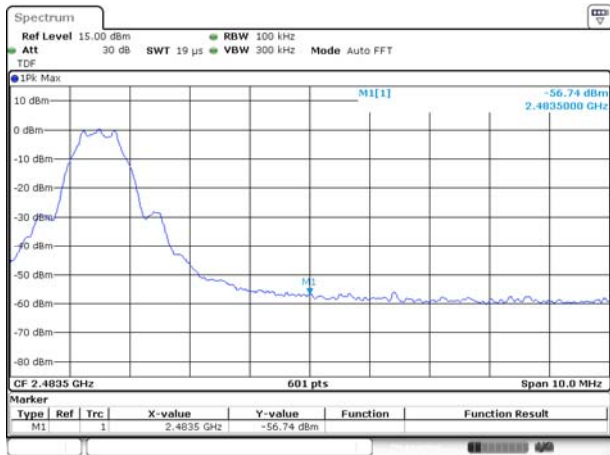


Date: 18 MAY 2019 15:00:22

GFSK (BLE)-1 Mbps: HIGH CHANNEL, Band Edge

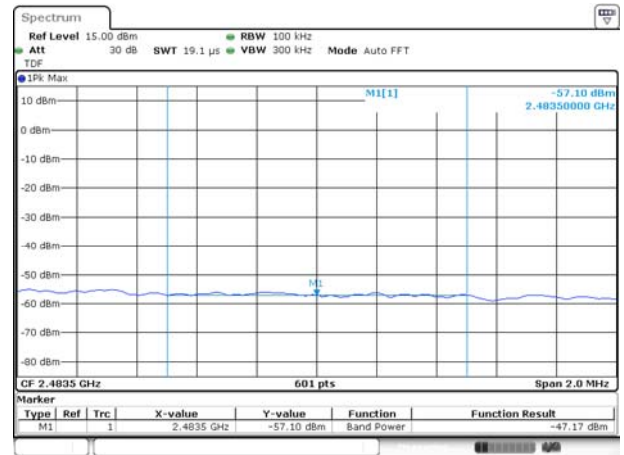


Date: 18 MAY 2019 15:00:37

GFSK (BLE)-2 Mbps: LOW CHANNEL, Carrier level

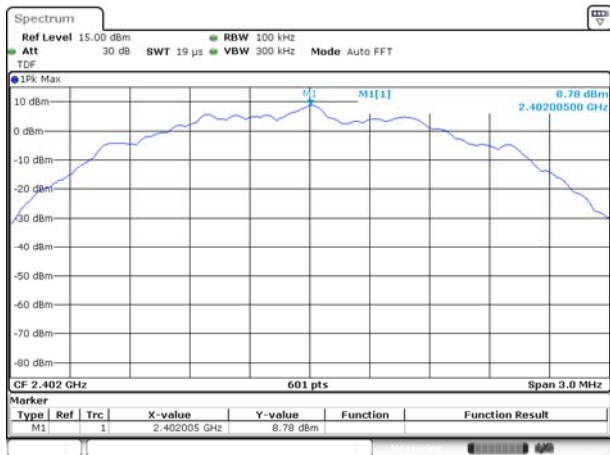


Date: 1 JUN 2019 14:01:09

GFSK (BLE)-2 Mbps: LOW CHANNEL, Reference level

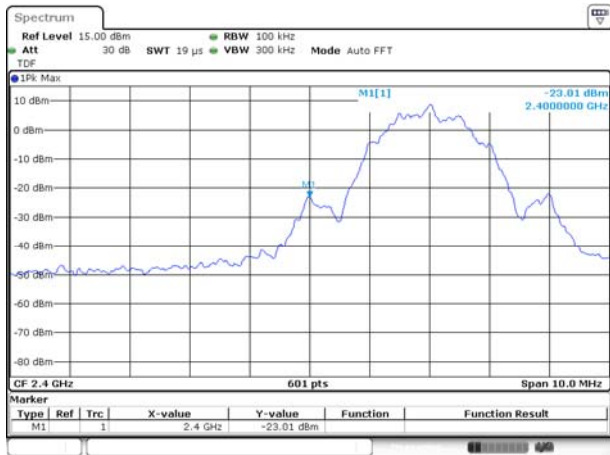


Date: 1 JUN 2019 14:02:35

GFSK (BLE)-2 Mbps: LOW CHANNEL, Band Edge

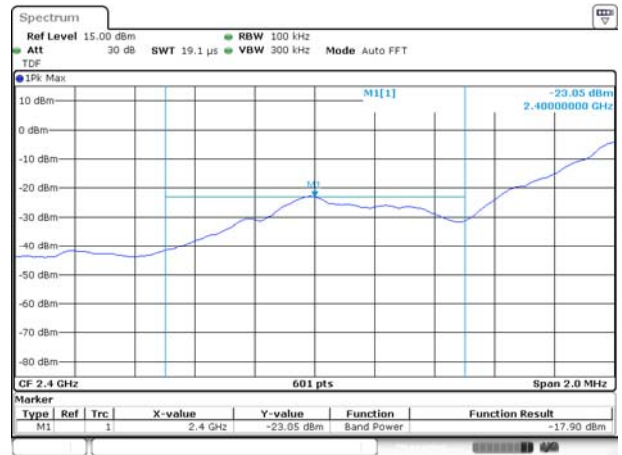


Date: 1 JUN 2019 14:02:48

GFSK (BLE)-2 Mbps: High CHANNEL, Carrier level

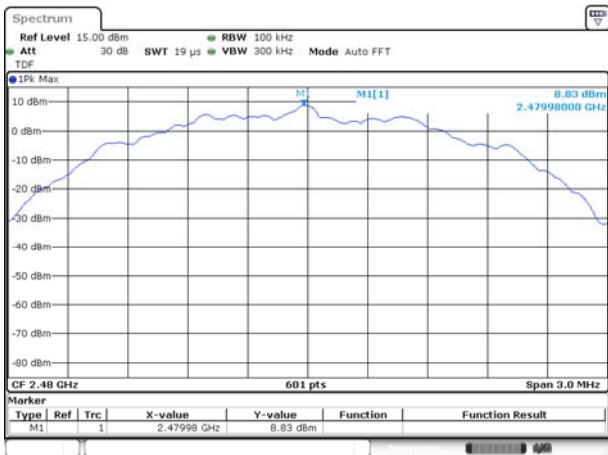


Date: 1 JUN 2019 14:07:54

GFSK (BLE)-2 Mbps: HIGH CHANNEL, Reference level

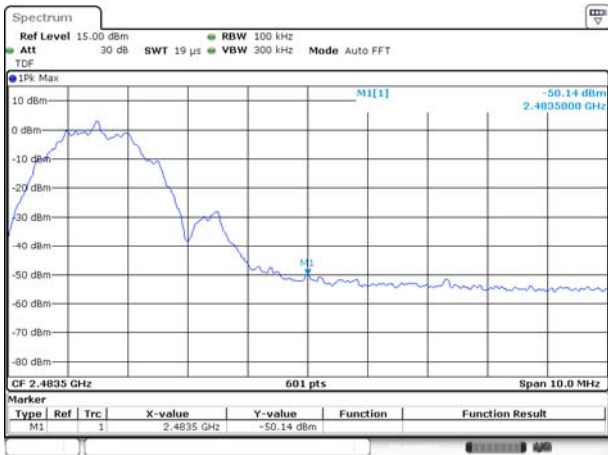

Date: 1 JUN 2019 14:09:12

GFSK (BLE)-2 Mbps: HIGH CHANNEL, Band Edge

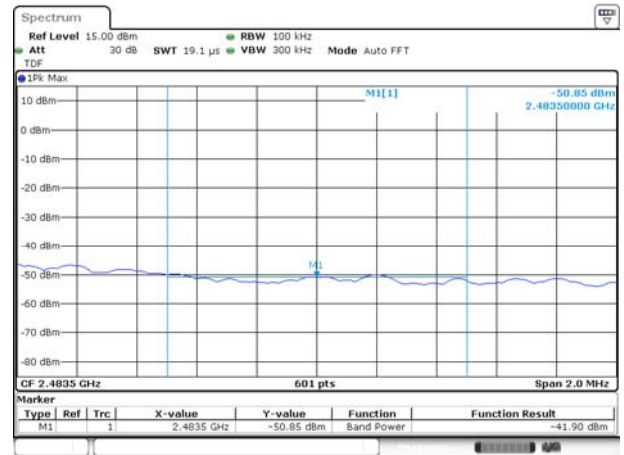

Date: 1 JUN 2019 14:09:24

A.5 Conducted Emissions

Note 1: The EUT is working in the Normal link mode.


Note 2: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note 3: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Built-in Antenna


Test Data and Plots

PHASE L

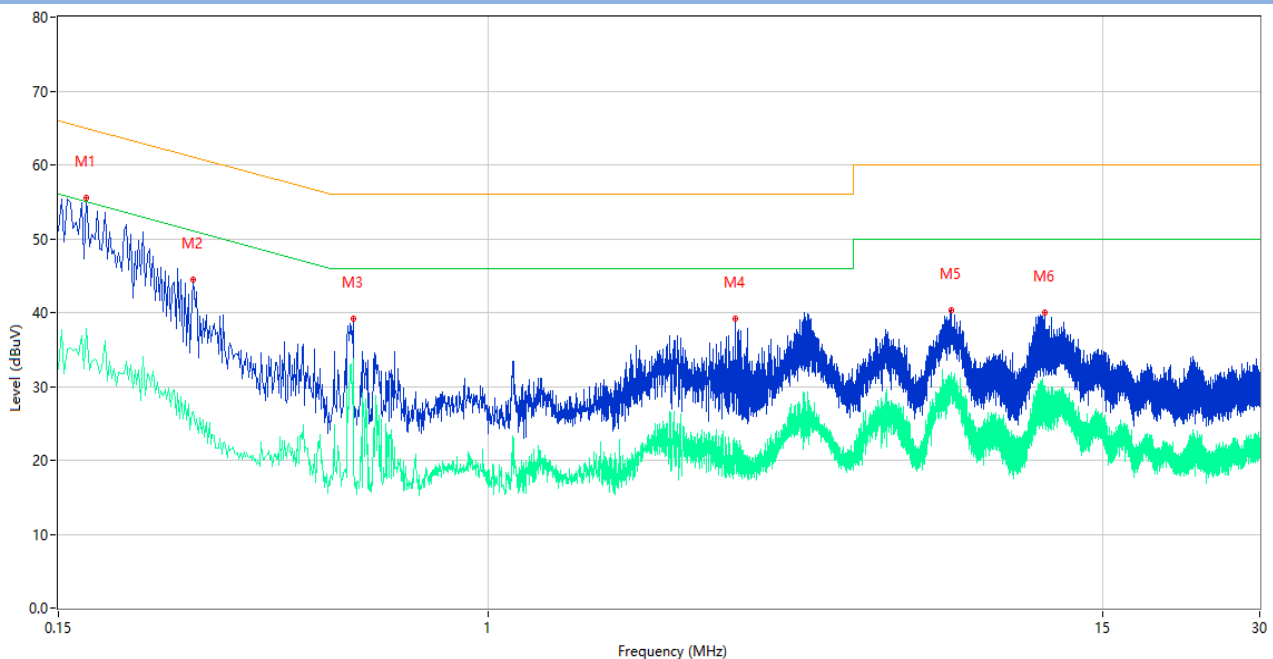

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.168	47.25	10.40	65.06	-17.81	Peak	L	Pass
1**	0.168	32.38	10.40	55.06	-22.68	AV	L	Pass
2	0.272	44.50	10.34	61.06	-16.56	Peak	L	Pass
2**	0.272	26.57	10.34	51.06	-24.49	AV	L	Pass
3	0.550	39.20	10.28	56.00	-16.80	Peak	L	Pass
3**	0.550	33.68	10.28	46.00	-12.32	AV	L	Pass
4	2.970	39.15	10.28	56.00	-16.85	Peak	L	Pass
4**	2.970	22.25	10.28	46.00	-23.75	AV	L	Pass
5	7.710	40.26	10.35	60.00	-19.74	Peak	L	Pass
5**	7.710	31.82	10.35	50.00	-18.18	AV	L	Pass
6	11.608	39.92	10.38	60.00	-20.08	Peak	L	Pass
6**	11.608	29.69	10.38	50.00	-20.31	AV	L	Pass


PHASE N

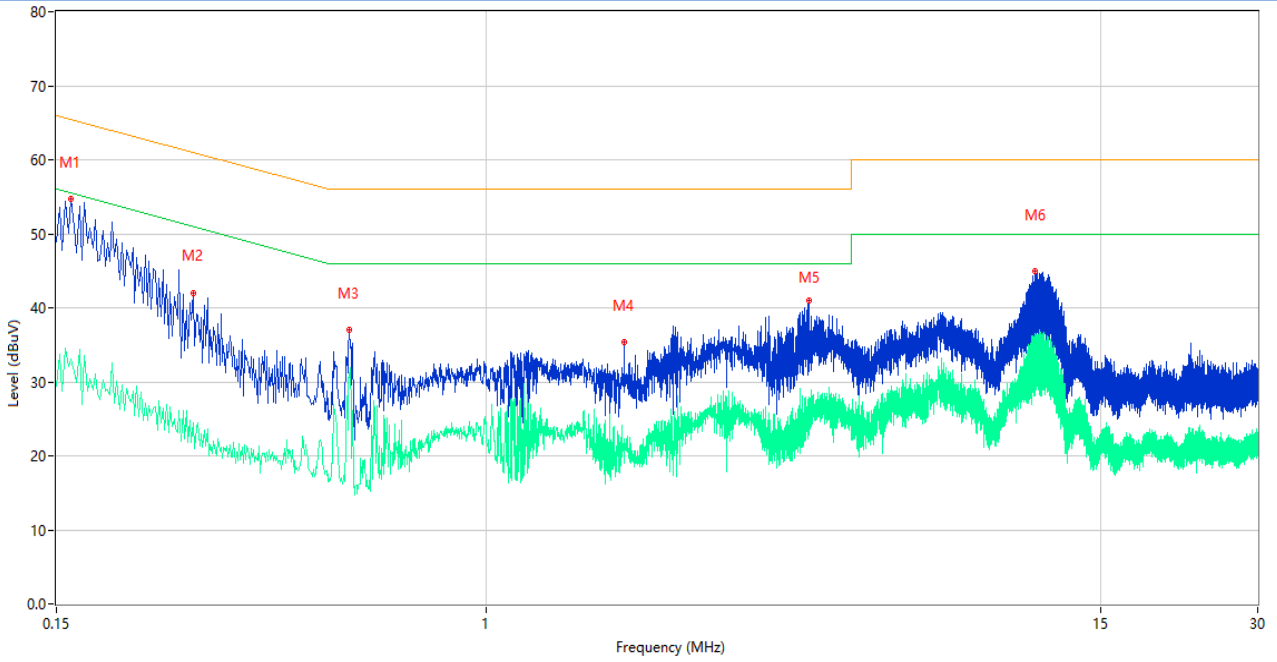

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.160	54.64	10.40	65.46	-10.82	Peak	N	Pass
1**	0.160	33.12	10.40	55.46	-22.34	AV	N	Pass
2	0.274	42.04	10.34	61.00	-18.96	Peak	N	Pass
2**	0.274	24.48	10.34	51.00	-26.52	AV	N	Pass
3	0.546	37.00	10.29	56.00	-19.00	Peak	N	Pass
3**	0.546	30.63	10.29	46.00	-15.37	AV	N	Pass
4	1.836	35.40	10.25	56.00	-20.60	Peak	N	Pass
4**	1.836	22.30	10.25	46.00	-23.70	AV	N	Pass
5	4.148	40.92	10.30	56.00	-15.08	Peak	N	Pass
5**	4.148	27.03	10.30	46.00	-18.97	AV	N	Pass
6	11.250	44.93	10.38	60.00	-15.07	Peak	N	Pass
6**	11.250	36.58	10.38	50.00	-13.42	AV	N	Pass


External Antenna
Test Data and Plots

PHASE L

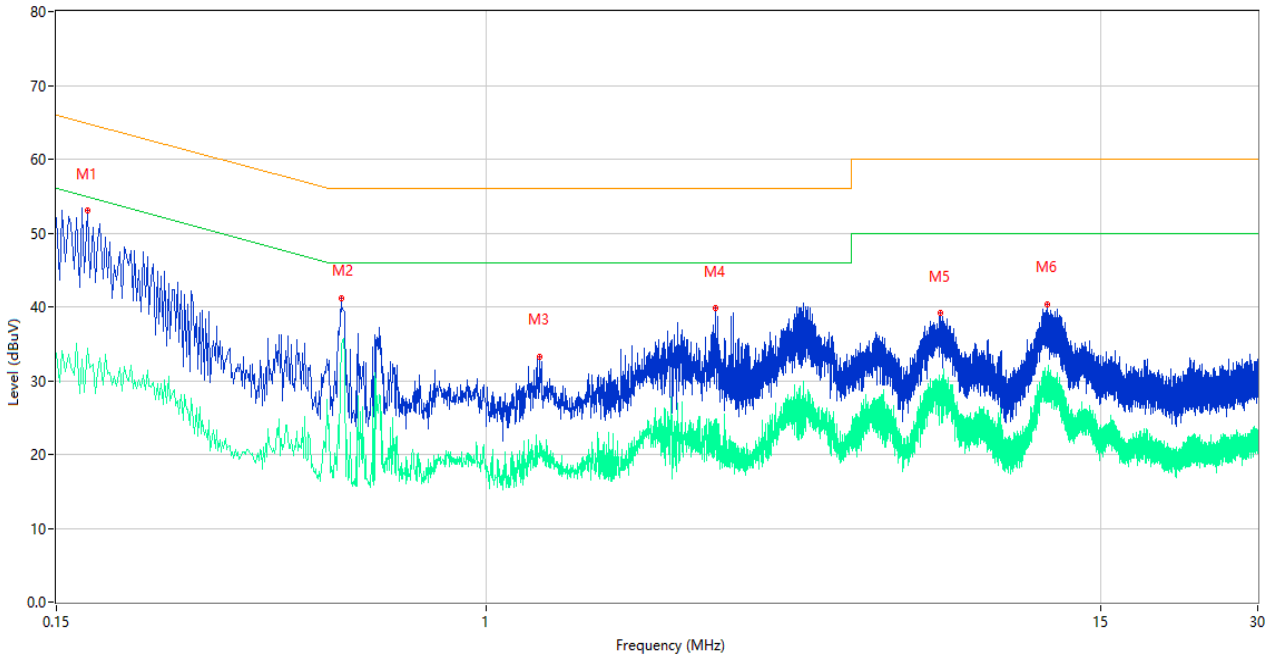

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.172	53.00	10.40	64.86	-11.86	Peak	L	Pass
1**	0.172	34.31	10.40	54.86	-20.55	AV	L	Pass
2	0.526	41.16	10.30	56.00	-14.84	Peak	L	Pass
2**	0.526	34.85	10.30	46.00	-11.15	AV	L	Pass
3	1.266	33.17	10.25	56.00	-22.83	Peak	L	Pass
3**	1.266	21.76	10.25	46.00	-24.24	AV	L	Pass
4	2.750	39.83	10.28	56.00	-16.17	Peak	L	Pass
4**	2.750	24.74	10.28	46.00	-21.26	AV	L	Pass
5	7.404	39.15	10.34	60.00	-20.85	Peak	L	Pass
5**	7.404	29.93	10.34	50.00	-20.07	AV	L	Pass
6	11.834	40.25	10.38	60.00	-19.75	Peak	L	Pass
6**	11.834	31.02	10.38	50.00	-18.98	AV	L	Pass

PHASE N

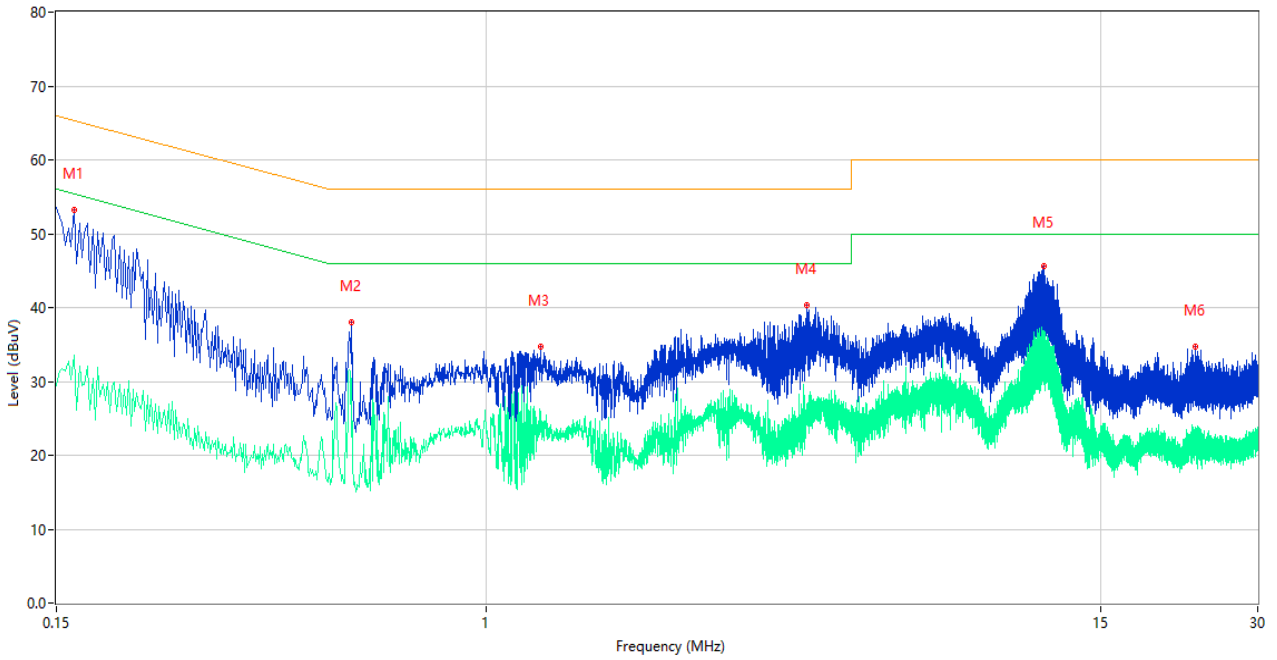

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.162	53.20	10.40	65.36	-12.16	Peak	N	Pass
1**	0.162	33.54	10.40	55.36	-21.82	AV	N	Pass
2	0.552	38.03	10.28	56.00	-17.97	Peak	N	Pass
2**	0.552	30.49	10.28	46.00	-15.51	AV	N	Pass
3	1.268	34.69	10.25	56.00	-21.31	Peak	N	Pass
3**	1.268	26.00	10.25	46.00	-20.00	AV	N	Pass
4	4.100	40.34	10.30	56.00	-15.66	Peak	N	Pass
4**	4.100	24.63	10.30	46.00	-21.37	AV	N	Pass
5	11.666	45.55	10.38	60.00	-14.45	Peak	N	Pass
5**	11.666	35.37	10.38	50.00	-14.63	AV	N	Pass
6	22.790	34.66	10.61	60.00	-25.34	Peak	N	Pass
6**	22.790	22.89	10.61	50.00	-27.11	AV	N	Pass

A.6 Radiated Spurious Emission

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Note 4: The EUT is working in the Normal link mode below 1 GHz.

Note 5: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

Built-in Antenna


Test Data and Plots

30 MHz to 1 GHz, ANT V

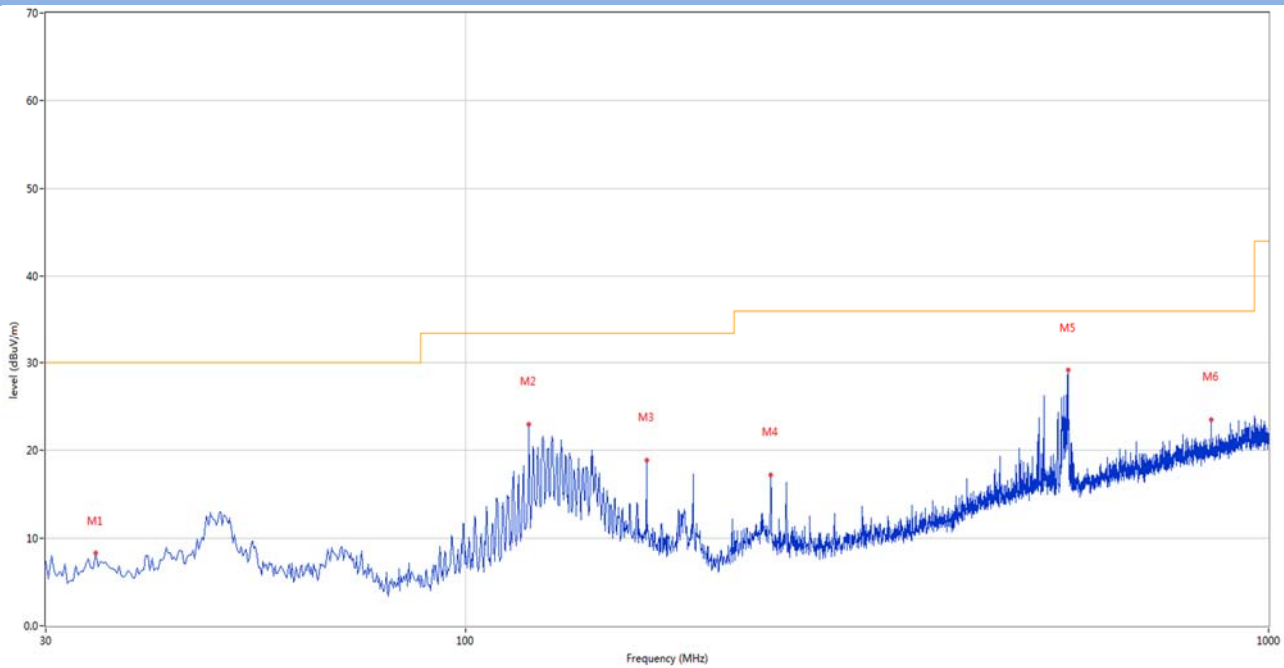

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	34.608	8.37	-27.37	30.0	-21.63	Peak	237.00	200	Vertical	Pass
2	119.967	22.96	-28.03	33.5	-10.54	Peak	356.00	100	Vertical	Pass
3	167.982	18.84	-26.51	33.5	-14.66	Peak	356.00	100	Vertical	Pass
4	240.005	17.14	-27.87	36.0	-18.86	Peak	187.00	200	Vertical	Pass
5	562.530	29.12	-19.17	36.0	-6.88	Peak	98.00	100	Vertical	Pass
6	848.680	23.47	-13.47	36.0	-12.53	Peak	351.00	100	Vertical	Pass

30 MHz to 1 GHz, ANT H

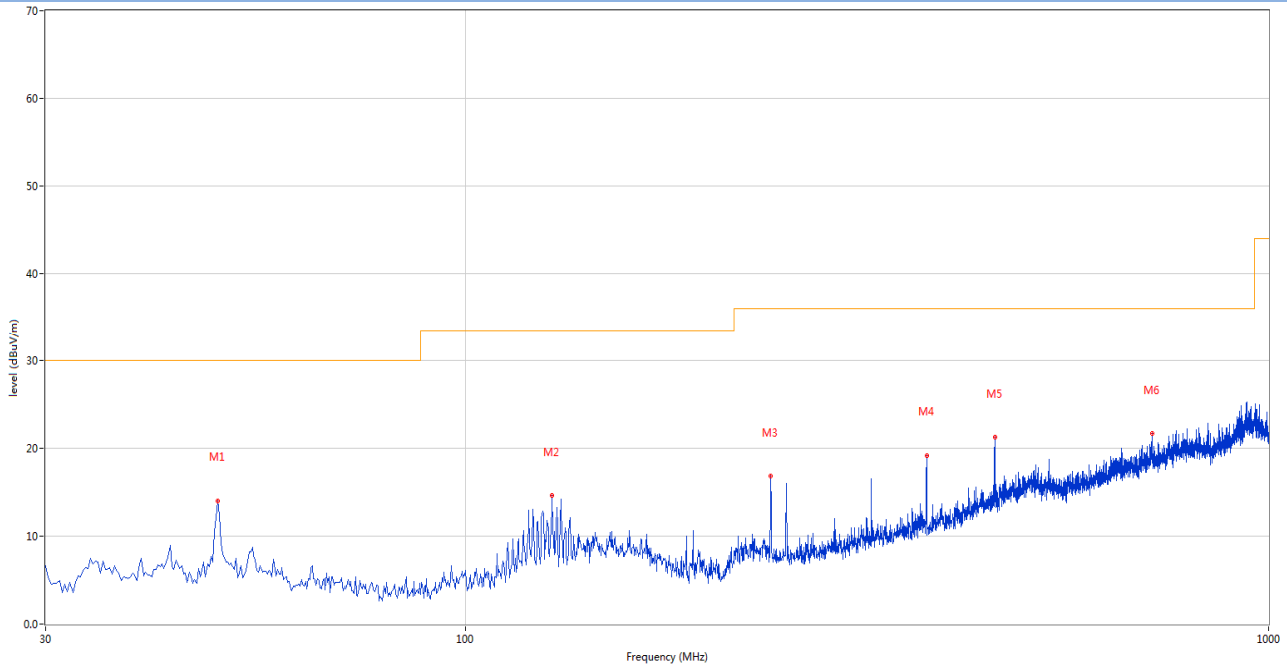


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	49.157	14.02	-27.34	30.0	-15.98	Peak	224.00	200	Horizontal	Pass
2	128.212	14.62	-27.34	33.5	-18.88	Peak	249.00	100	Horizontal	Pass
3	240.005	16.80	-27.87	36.0	-19.20	Peak	230.00	100	Horizontal	Pass
4	375.078	18.46	-23.84	36.0	-17.54	Peak	142.00	200	Horizontal	Pass
5	456.073	21.23	-21.34	36.0	-14.77	Peak	129.00	100	Horizontal	Pass
6	716.032	21.67	-15.39	36.0	-14.33	Peak	230.00	100	Horizontal	Pass

External Antenna


Test Data and Plots

30 MHz to 1 GHz, ANT V

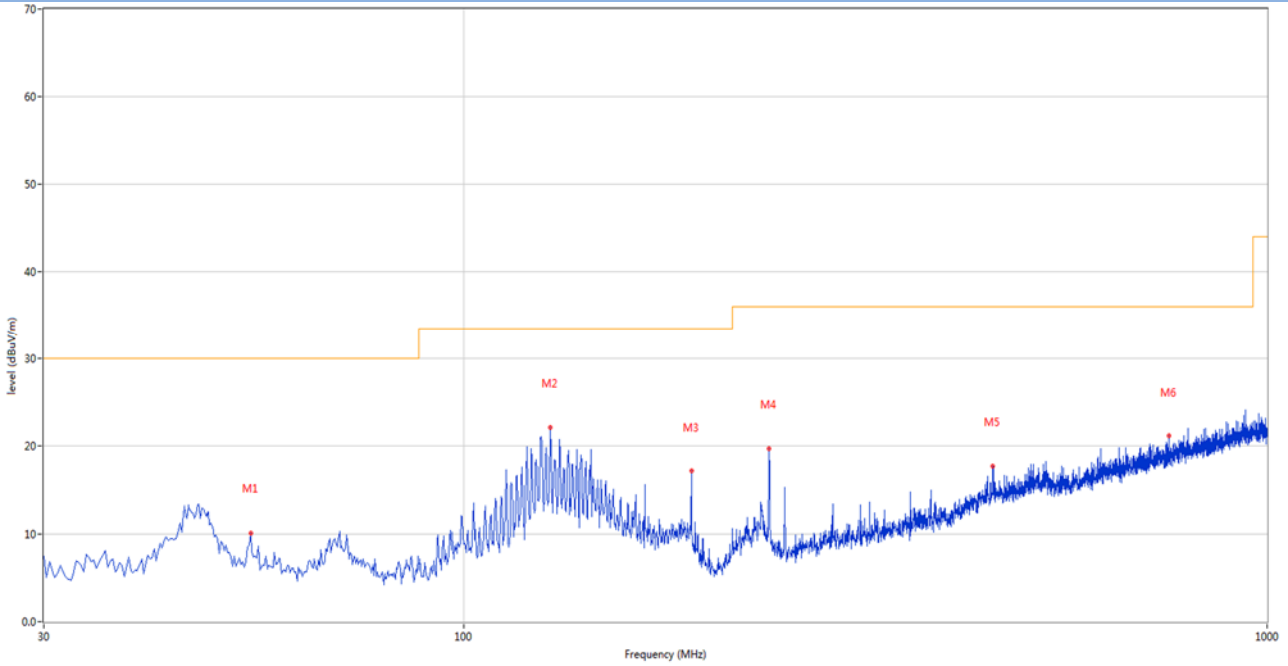

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	54.250	10.05	-27.59	30.0	-19.95	Peak	4.00	100	Vertical	Pass
2	127.970	22.12	-27.34	33.5	-11.38	Peak	192.00	200	Vertical	Pass
3	191.990	17.11	-29.18	33.5	-16.39	Peak	331.00	100	Vertical	Pass
4	240.005	19.73	-27.87	36.0	-16.27	Peak	186.00	200	Vertical	Pass
5	455.830	17.74	-21.37	36.0	-18.26	Peak	218.00	100	Vertical	Pass
6	755.075	21.13	-14.77	36.0	-14.87	Peak	243.00	100	Vertical	Pass

30 MHz to 1 GHz, ANT H

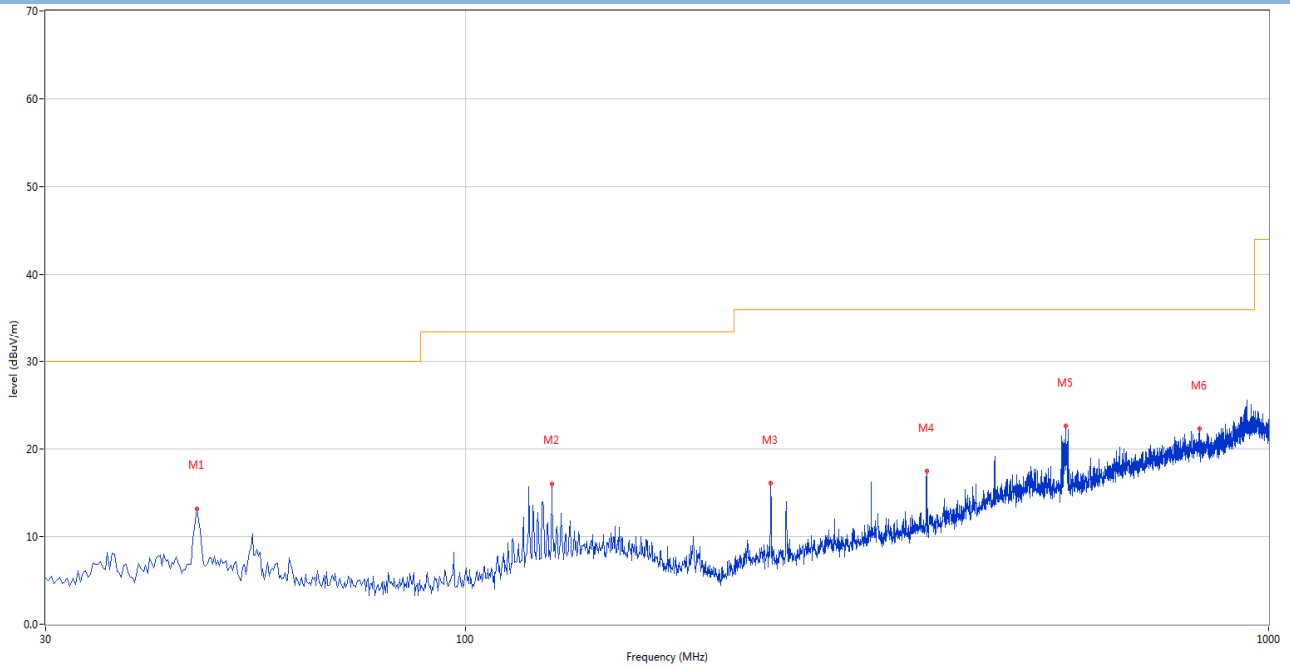

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	46.248	13.17	-27.09	30.0	-16.83	Peak	218.00	200	Horizontal	Pass
2	127.970	16.02	-27.34	33.5	-17.48	Peak	111.00	100	Horizontal	Pass
3	240.005	16.10	-27.87	36.0	-19.90	Peak	249.00	200	Horizontal	Pass
4	375.078	17.43	-23.84	36.0	-18.57	Peak	111.00	100	Horizontal	Pass
5	559.135	22.60	-19.21	36.0	-13.40	Peak	256.00	100	Horizontal	Pass
6	820.308	22.29	-13.47	36.0	-13.71	Peak	360.00	200	Horizontal	Pass


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

Built-in Antenna

GFSK (BLE) -1 Mbps LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

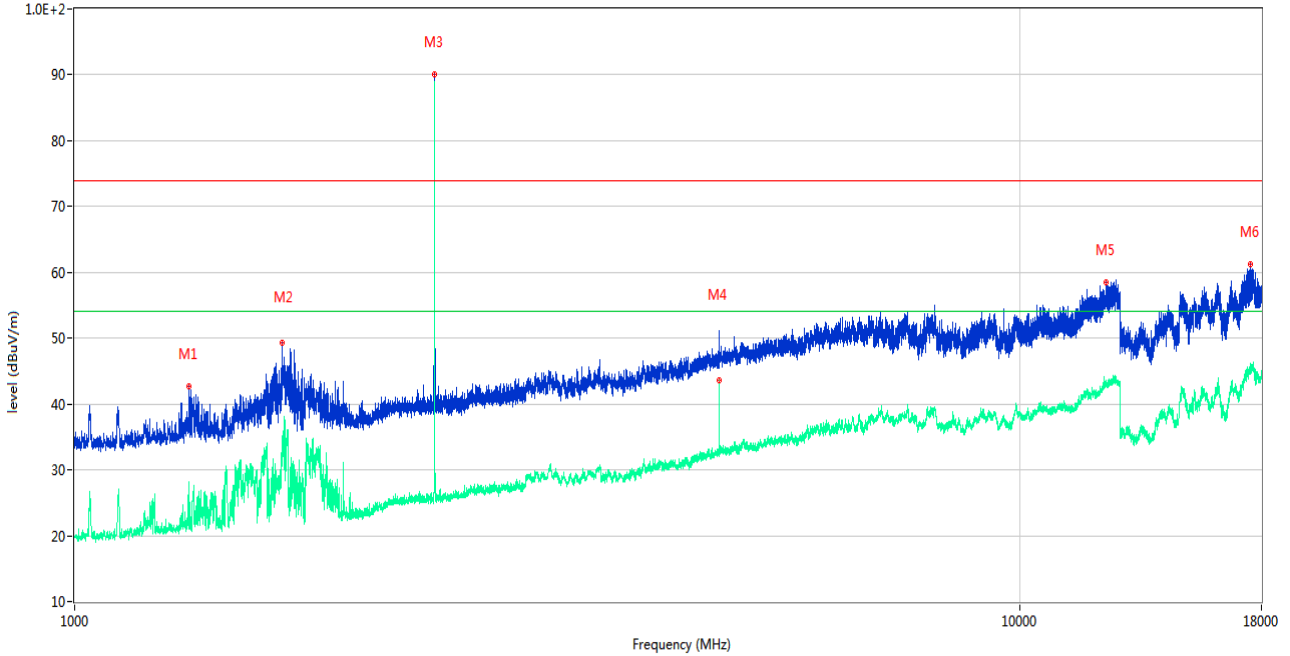

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1320.500	42.61	-14.82	74.0	-31.39	Peak	218.00	150	Vertical	Pass
1**	1320.500	22.30	-14.82	54.0	-31.70	AV	218.00	150	Vertical	Pass
2	1657.000	49.34	-15.23	74.0	-24.66	Peak	211.00	150	Vertical	Pass
2**	1657.000	30.60	-15.23	54.0	-23.40	AV	211.00	150	Vertical	Pass
3	2402.500	90.11	-10.66	74.0	16.11	Peak	233.00	150	Vertical	N/A
3**	2402.500	89.03	-10.66	54.0	35.03	AV	233.00	150	Vertical	N/A
4	4805.000	50.85	-1.98	74.0	-23.15	Peak	360.00	150	Vertical	Pass
4**	4805.000	43.61	-1.98	54.0	-10.39	AV	360.00	150	Vertical	Pass
5	12336.000	58.50	21.39	74.0	-15.50	Peak	340.00	150	Vertical	Pass
5**	12336.000	42.77	21.39	54.0	-11.23	AV	340.00	150	Vertical	Pass
6	17531.437	61.18	30.10	74.0	-12.82	Peak	216.00	150	Vertical	Pass
6**	17531.437	45.48	30.10	54.0	-8.52	AV	216.00	150	Vertical	Pass

GFSK (BLE) -1 Mbps LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

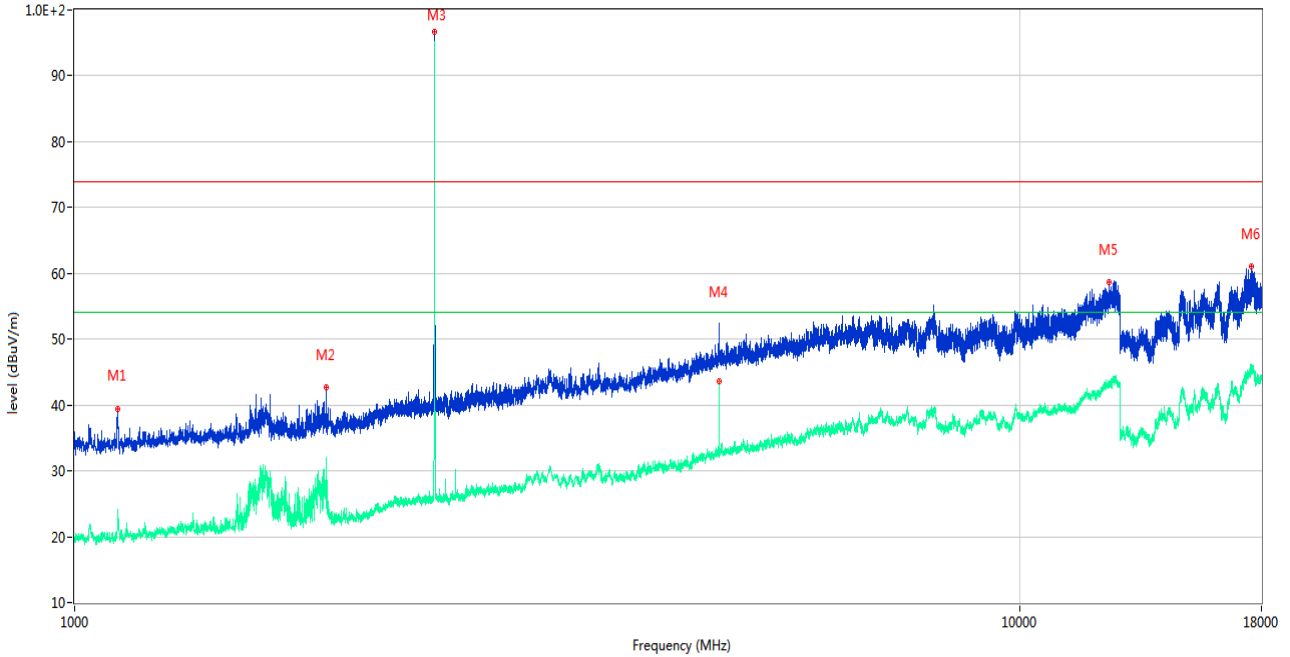

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1109.500	39.31	-15.21	74.0	-34.69	Peak	271.00	150	Horizontal	Pass
1**	1109.500	21.17	-15.21	54.0	-32.83	AV	271.00	150	Horizontal	Pass
2	1846.500	42.70	-13.99	74.0	-31.30	Peak	51.00	150	Horizontal	Pass
2**	1846.500	26.57	-13.99	54.0	-27.43	AV	51.00	150	Horizontal	Pass
3	2401.500	96.72	-10.76	74.0	22.72	Peak	231.00	150	Horizontal	N/A
3**	2401.500	82.93	-10.76	54.0	28.93	AV	231.00	150	Horizontal	N/A
4	4805.000	49.58	-1.98	74.0	-24.42	Peak	49.00	150	Horizontal	Pass
4**	4805.000	43.64	-1.98	54.0	-10.36	AV	49.00	150	Horizontal	Pass
5	12407.875	58.71	21.00	74.0	-15.29	Peak	219.00	150	Horizontal	Pass
5**	12407.875	43.04	21.00	54.0	-10.96	AV	219.00	150	Horizontal	Pass
6	17583.938	61.08	29.63	74.0	-12.92	Peak	266.00	150	Horizontal	Pass
6**	17583.938	45.09	29.63	54.0	-8.91	AV	266.00	150	Horizontal	Pass

GFSK (BLE) -1 Mbps MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

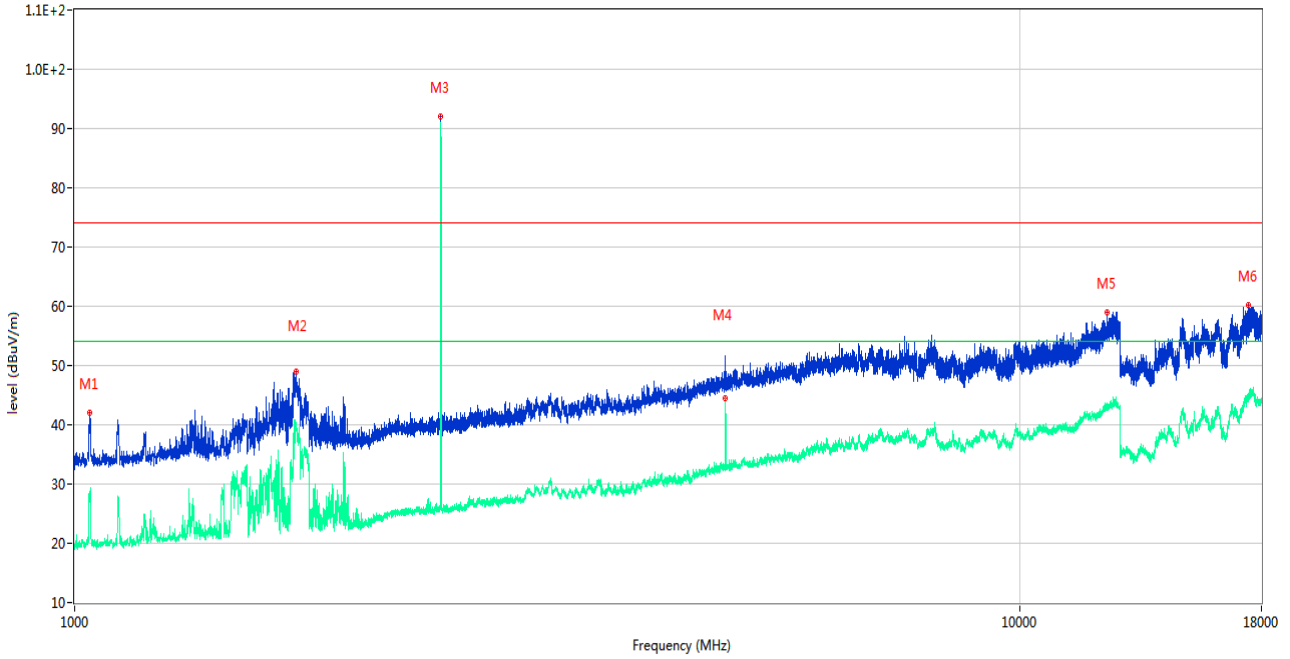

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1033.000	34.45	-14.50	74.0	-39.55	Peak	100.00	150	Vertical	Pass
1**	1033.000	20.95	-14.50	54.0	-33.05	AV	100.00	150	Vertical	Pass
2	1716.000	49.08	-15.16	74.0	-24.92	Peak	192.00	150	Vertical	Pass
2**	1716.000	39.05	-15.16	54.0	-14.95	AV	192.00	150	Vertical	Pass
3	2439.500	91.96	-10.83	74.0	17.96	Peak	234.00	150	Vertical	N/A
3**	2439.500	77.81	-10.83	54.0	23.81	AV	234.00	150	Vertical	N/A
4	4881.000	51.42	-1.56	74.0	-22.58	Peak	354.00	150	Vertical	Pass
4**	4881.000	44.52	-1.56	54.0	-9.48	AV	354.00	150	Vertical	Pass
5	12346.063	58.90	21.30	74.0	-15.10	Peak	341.00	150	Vertical	Pass
5**	12346.063	42.66	21.30	54.0	-11.34	AV	341.00	150	Vertical	Pass
6	17457.938	60.14	28.83	74.0	-13.86	Peak	160.00	150	Vertical	Pass
6**	17457.938	44.49	28.83	54.0	-9.51	AV	160.00	150	Vertical	Pass

GFSK (BLE) -1 Mbps MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

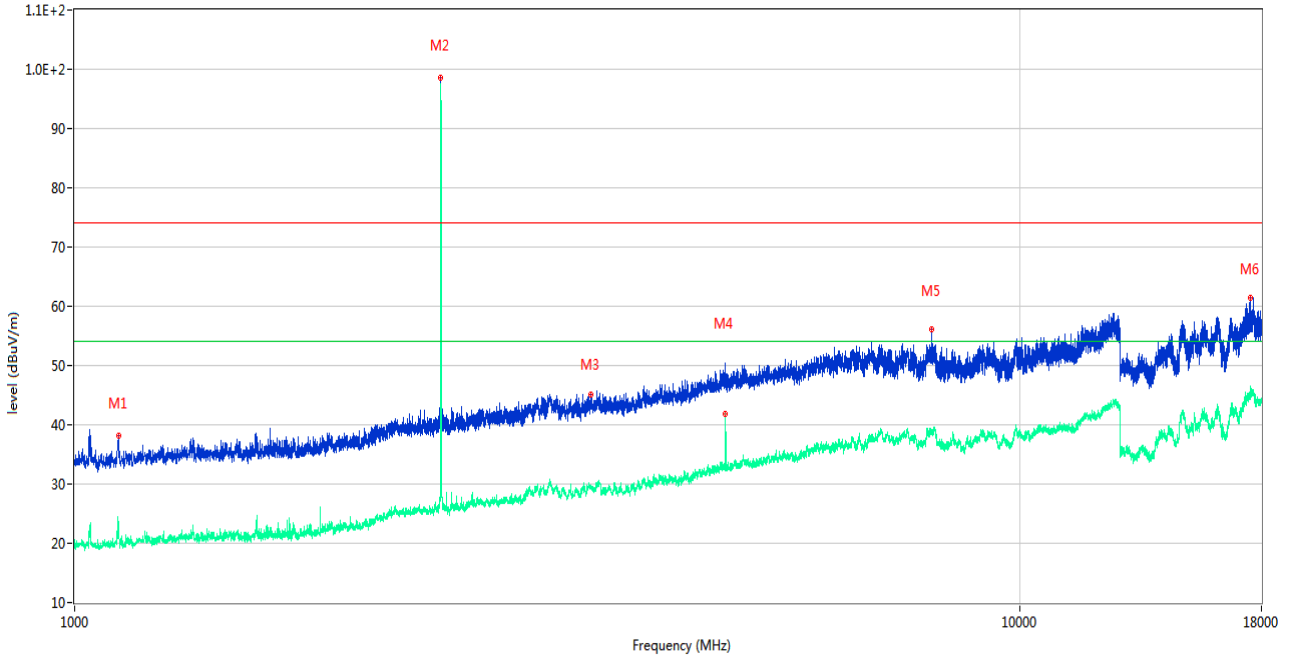

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1114.000	38.24	-15.39	74.0	-35.76	Peak	262.00	150	Horizontal	Pass
1**	1114.000	22.77	-15.39	54.0	-31.23	AV	262.00	150	Horizontal	Pass
2	2439.500	98.56	-10.83	74.0	24.56	Peak	229.00	150	Horizontal	N/A
2**	2439.500	83.89	-10.83	54.0	29.89	AV	229.00	150	Horizontal	N/A
3	3516.000	45.18	-6.55	74.0	-28.82	Peak	68.00	150	Horizontal	Pass
3**	3516.000	29.71	-6.55	54.0	-24.29	AV	68.00	150	Horizontal	Pass
4	4881.000	50.33	-1.56	74.0	-23.67	Peak	277.00	150	Horizontal	Pass
4**	4881.000	41.75	-1.56	54.0	-12.25	AV	277.00	150	Horizontal	Pass
5	8069.500	56.03	18.71	74.0	-17.97	Peak	142.00	150	Horizontal	Pass
5**	8069.500	39.11	18.71	54.0	-14.89	AV	142.00	150	Horizontal	Pass
6	17528.812	61.53	30.01	74.0	-12.47	Peak	0.00	150	Horizontal	Pass
6**	17528.812	45.32	30.01	54.0	-8.68	AV	0.00	150	Horizontal	Pass

GFSK (BLE) -1 Mbps HIGH CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

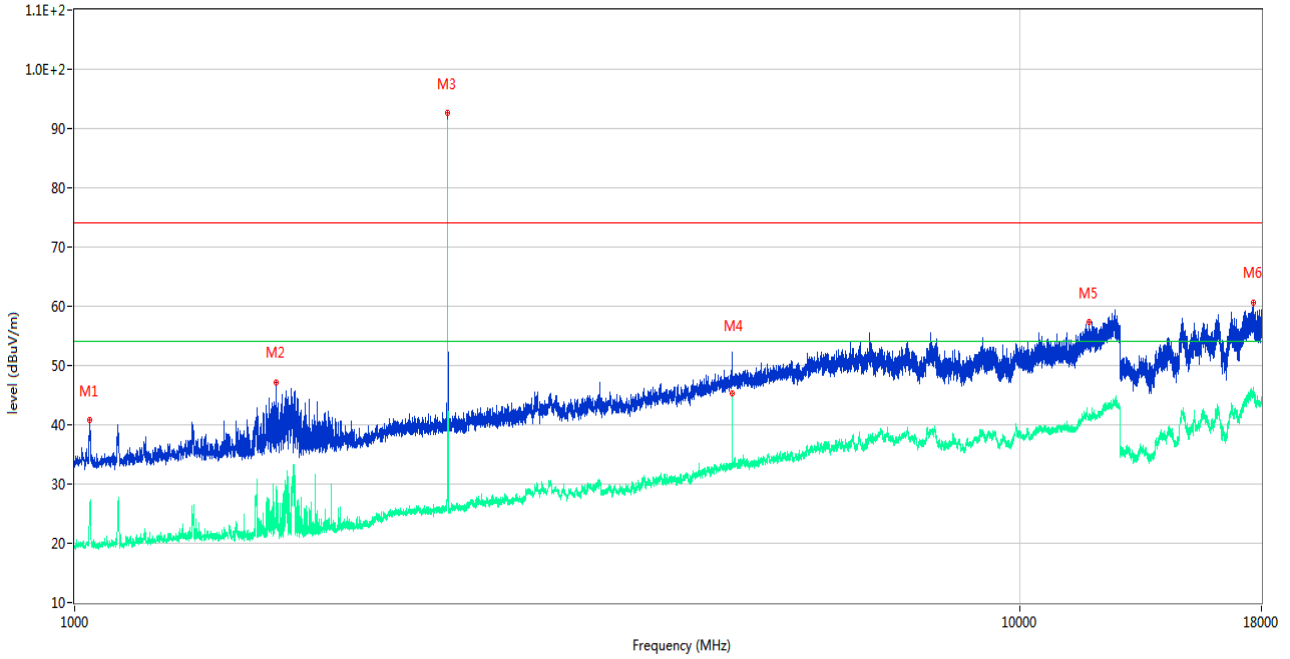

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1025.000	33.35	-14.75	74.0	-40.65	Peak	341.00	150	Vertical	Pass
1**	1025.000	19.21	-14.75	54.0	-34.79	AV	341.00	150	Vertical	Pass
2	1631.500	47.22	-15.20	74.0	-26.78	Peak	211.00	150	Vertical	Pass
2**	1631.500	23.36	-15.20	54.0	-30.64	AV	211.00	150	Vertical	Pass
3	2479.500	92.64	-10.38	74.0	18.64	Peak	167.00	150	Vertical	N/A
3**	2479.500	79.11	-10.38	54.0	25.11	AV	167.00	150	Vertical	N/A
4	4961.000	50.45	-1.85	74.0	-23.55	Peak	46.00	150	Vertical	Pass
4**	4961.000	45.34	-1.85	54.0	-8.66	AV	46.00	150	Vertical	Pass
5	11835.750	57.29	19.76	74.0	-16.71	Peak	178.00	150	Vertical	Pass
5**	11835.750	41.27	19.76	54.0	-12.73	AV	178.00	150	Vertical	Pass
6	17641.687	60.61	29.57	74.0	-13.39	Peak	183.00	150	Vertical	Pass
6**	17641.687	45.49	29.57	54.0	-8.51	AV	183.00	150	Vertical	Pass

GFSK (BLE) -1 Mbps HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

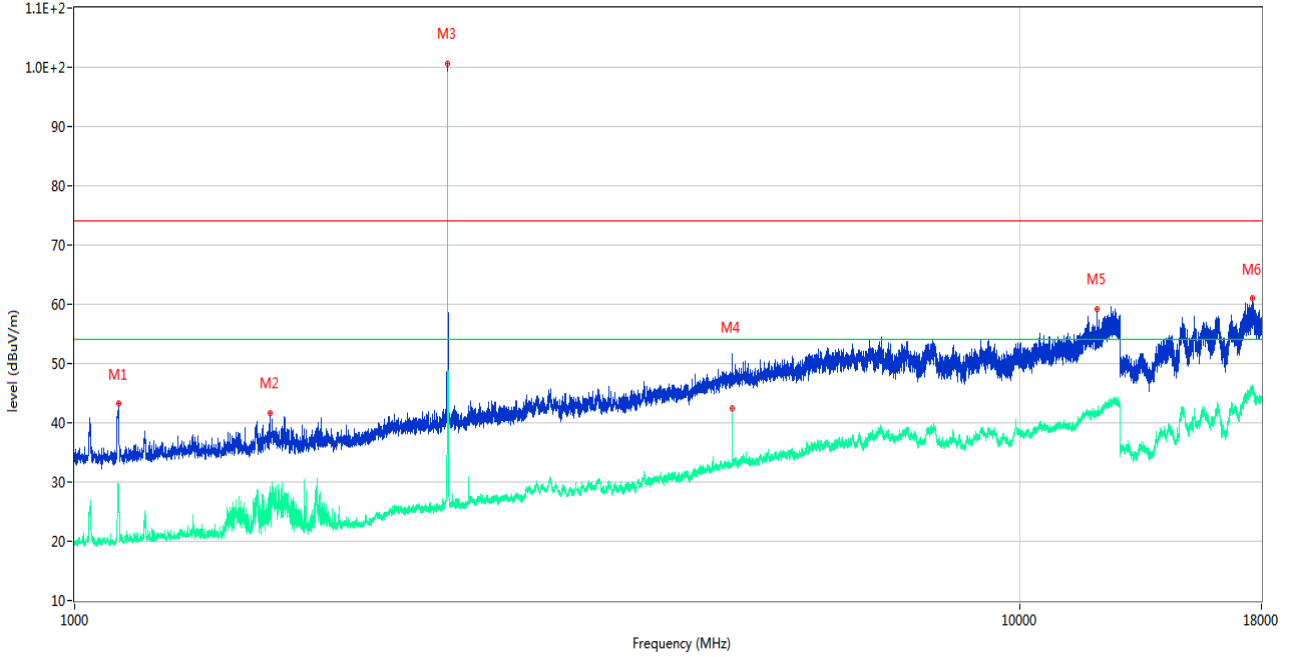

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1114.000	43.18	-15.39	74.0	-30.82	Peak	257.00	150	Horizontal	Pass
1**	1114.000	24.97	-15.39	54.0	-29.03	AV	257.00	150	Horizontal	Pass
2	1610.500	41.64	-15.25	74.0	-32.36	Peak	257.00	150	Horizontal	Pass
2**	1610.500	25.83	-15.25	54.0	-28.17	AV	257.00	150	Horizontal	Pass
3	2480.000	100.64	-10.37	74.0	26.64	Peak	230.00	150	Horizontal	N/A
3**	2480.000	96.30	-10.37	54.0	42.30	AV	230.00	150	Horizontal	N/A
4	4961.000	49.35	-1.85	74.0	-24.65	Peak	223.00	150	Horizontal	Pass
4**	4961.000	42.35	-1.85	54.0	-11.65	AV	223.00	150	Horizontal	Pass
5	12067.188	59.19	20.57	74.0	-14.81	Peak	100.00	150	Horizontal	Pass
5**	12067.188	41.53	20.57	54.0	-12.47	AV	100.00	150	Horizontal	Pass
6	17619.374	60.96	29.42	74.0	-13.04	Peak	199.00	150	Horizontal	Pass
6**	17619.374	45.36	29.42	54.0	-8.64	AV	199.00	150	Horizontal	Pass

GFSK (BLE) -2 Mbps LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

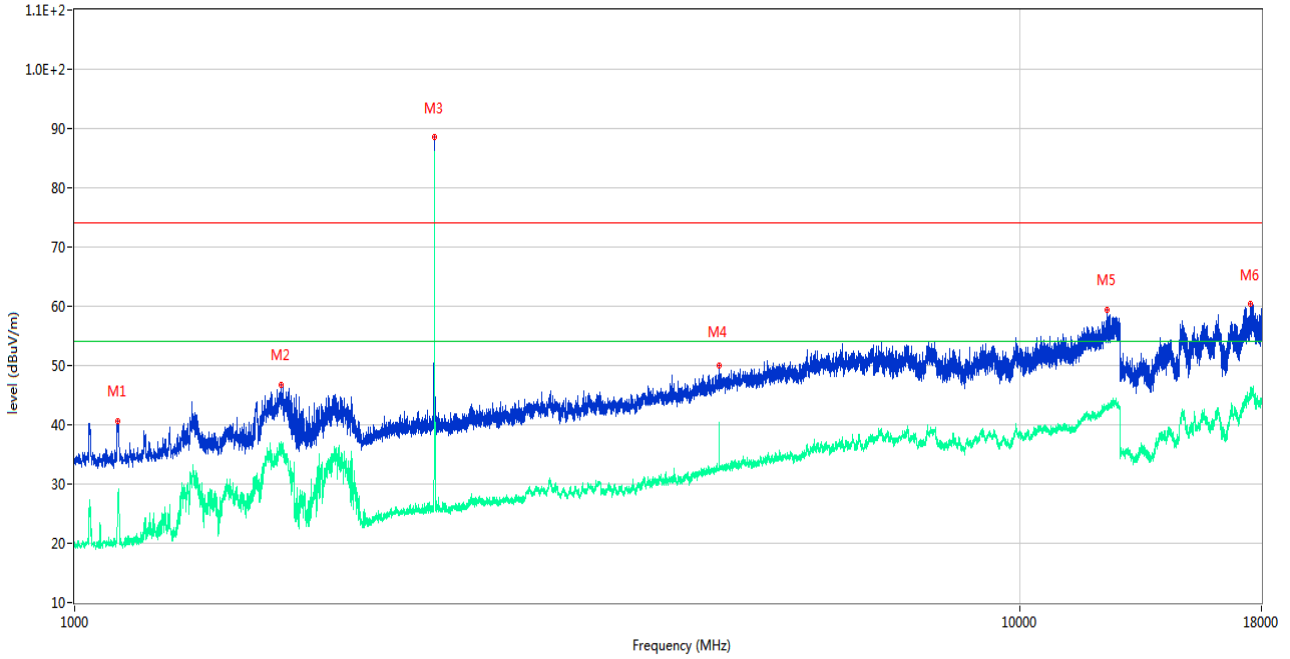

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1110.500	40.62	-15.29	74.0	-33.38	Peak	115.00	150	Vertical	Pass
1**	1110.500	28.24	-15.29	54.0	-25.76	AV	115.00	150	Vertical	Pass
2	1655.000	46.74	-15.28	74.0	-27.26	Peak	240.00	150	Vertical	Pass
2**	1655.000	34.69	-15.28	54.0	-19.31	AV	240.00	150	Vertical	Pass
3	2401.500	88.49	-10.76	74.0	14.49	Peak	240.00	150	Vertical	N/A
3**	2401.500	79.47	-10.76	54.0	25.47	AV	240.00	150	Vertical	N/A
4	4803.000	50.10	-2.23	74.0	-23.90	Peak	0.00	150	Vertical	Pass
4**	4803.000	33.35	-2.23	54.0	-20.65	AV	0.00	150	Vertical	Pass
5	12367.625	59.39	21.15	74.0	-14.61	Peak	37.00	150	Vertical	Pass
5**	12367.625	43.11	21.15	54.0	-10.89	AV	37.00	150	Vertical	Pass
6	17528.812	60.36	30.01	74.0	-13.64	Peak	324.00	150	Vertical	Pass
6**	17528.812	44.93	30.01	54.0	-9.07	AV	324.00	150	Vertical	Pass

GFSK (BLE) -2 Mbps LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

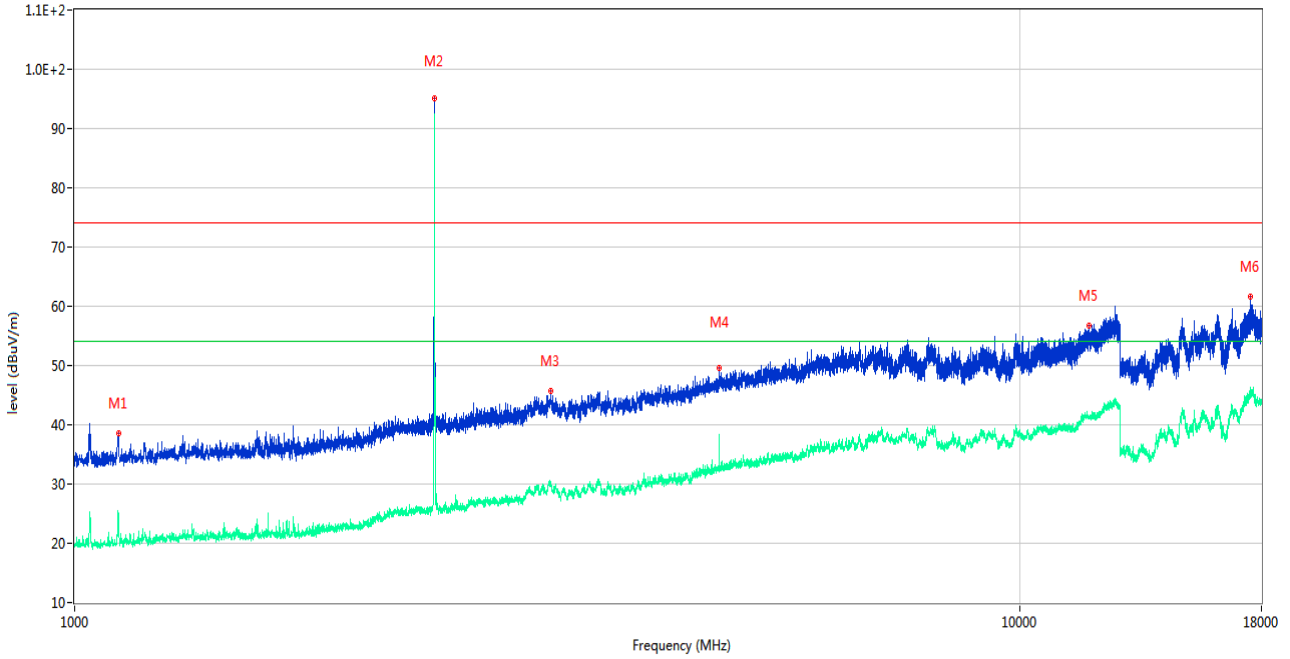

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1114.000	38.67	-15.39	74.0	-35.33	Peak	259.00	150	Horizontal	Pass
1**	1114.000	22.55	-15.39	54.0	-31.45	AV	259.00	150	Horizontal	Pass
2	2402.500	95.14	-10.66	74.0	21.14	Peak	239.00	150	Horizontal	N/A
2**	2402.500	92.54	-10.66	54.0	38.54	AV	239.00	150	Horizontal	N/A
3	3186.000	45.78	-5.65	74.0	-28.22	Peak	84.00	150	Horizontal	Pass
3**	3186.000	30.32	-5.65	54.0	-23.68	AV	84.00	150	Horizontal	Pass
4	4805.000	49.51	-1.98	74.0	-24.49	Peak	221.00	150	Horizontal	Pass
4**	4805.000	38.38	-1.98	54.0	-15.62	AV	221.00	150	Horizontal	Pass
5	11834.313	56.79	19.76	74.0	-17.21	Peak	54.00	150	Horizontal	Pass
5**	11834.313	41.34	19.76	54.0	-12.66	AV	54.00	150	Horizontal	Pass
6	17540.624	61.64	30.38	74.0	-12.36	Peak	83.00	150	Horizontal	Pass
6**	17540.624	45.76	30.38	54.0	-8.24	AV	83.00	150	Horizontal	Pass

GFSK (BLE) -2 Mbps MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

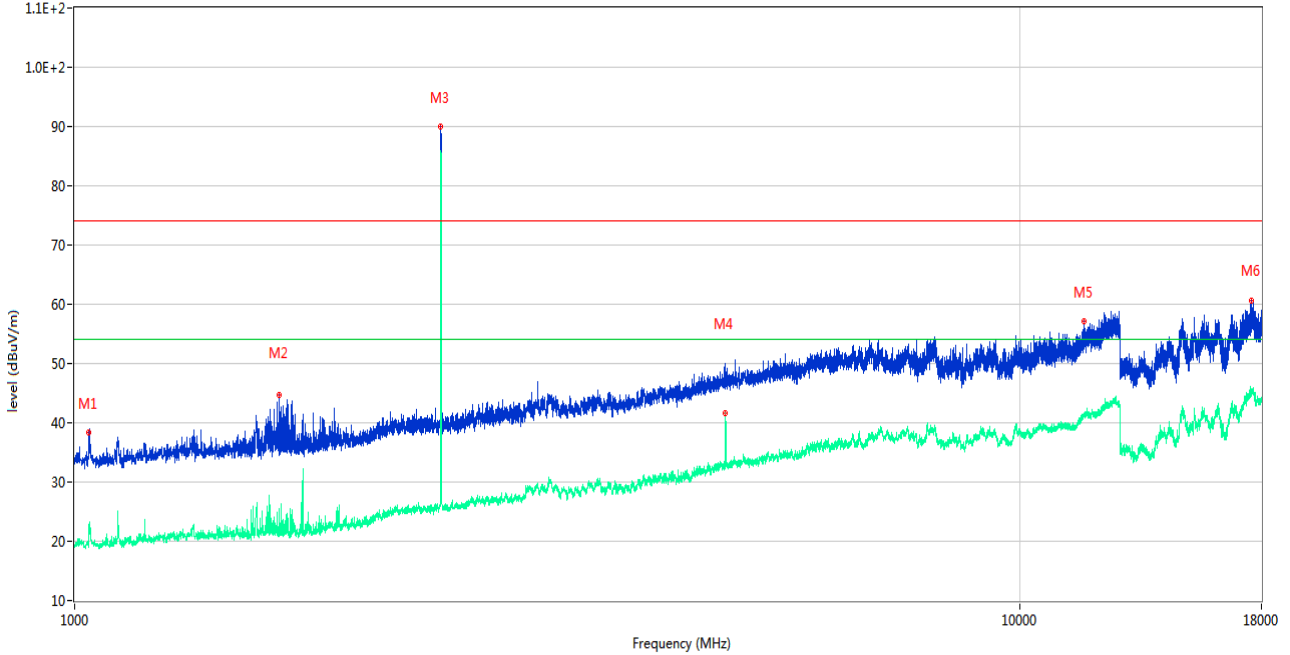

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1023.000	33.60	-14.60	74.0	-40.40	Peak	57.00	150	Vertical	Pass
1**	1023.000	19.02	-14.60	54.0	-34.98	AV	57.00	150	Vertical	Pass
2	1646.500	44.67	-15.44	74.0	-29.33	Peak	208.00	150	Vertical	Pass
2**	1646.500	21.39	-15.44	54.0	-32.61	AV	208.00	150	Vertical	Pass
3	2440.500	89.96	-10.80	74.0	15.96	Peak	230.00	150	Vertical	N/A
3**	2440.500	85.95	-10.80	54.0	31.95	AV	230.00	150	Vertical	N/A
4	4881.000	50.10	-1.56	74.0	-23.90	Peak	20.00	150	Vertical	Pass
4**	4881.000	41.59	-1.56	54.0	-12.41	AV	20.00	150	Vertical	Pass
5	11683.375	57.08	20.40	74.0	-16.92	Peak	63.00	150	Vertical	Pass
5**	11683.375	41.72	20.40	54.0	-12.28	AV	63.00	150	Vertical	Pass
6	17556.376	60.67	29.97	74.0	-13.33	Peak	287.00	150	Vertical	Pass
6**	17556.376	44.99	29.97	54.0	-9.01	AV	287.00	150	Vertical	Pass

GFSK (BLE) -2 Mbps MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

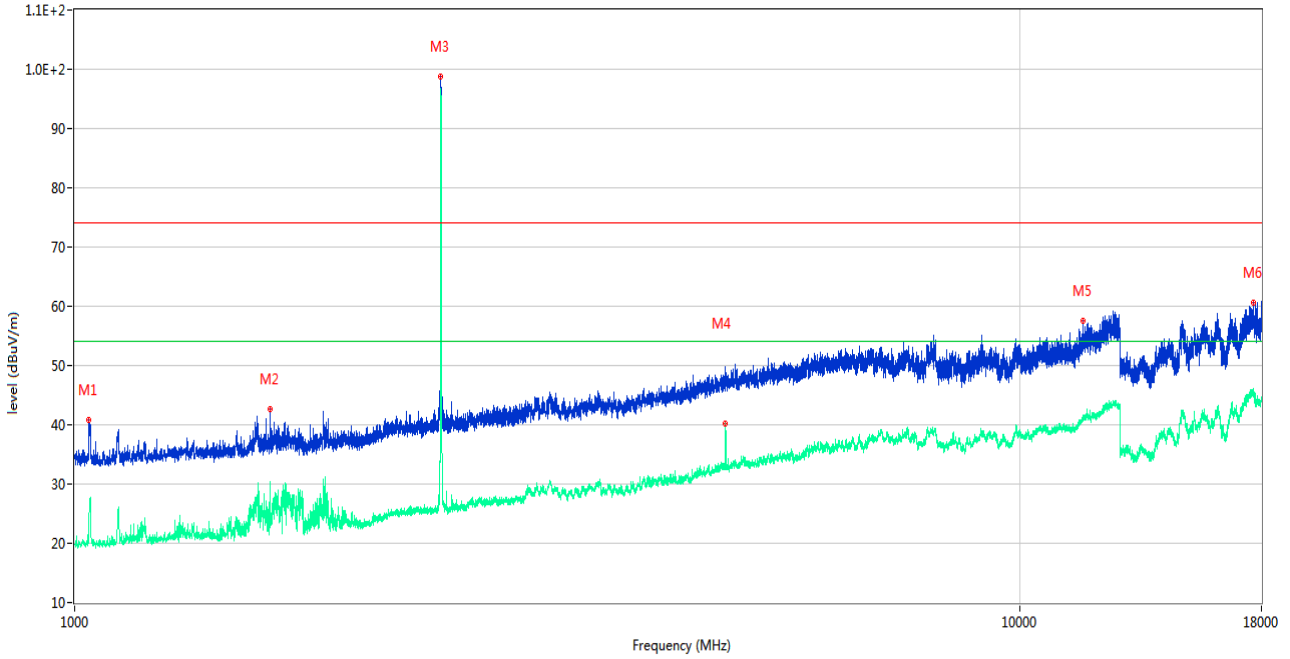

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1036.000	40.73	-14.72	74.0	-33.27	Peak	170.00	150	Horizontal	Pass
1**	1036.000	23.23	-14.72	54.0	-30.77	AV	170.00	150	Horizontal	Pass
2	1609.000	42.67	-15.28	74.0	-31.33	Peak	38.00	150	Horizontal	Pass
2**	1609.000	28.43	-15.28	54.0	-25.57	AV	38.00	150	Horizontal	Pass
3	2439.500	98.81	-10.83	74.0	24.81	Peak	233.00	150	Horizontal	N/A
3**	2439.500	89.41	-10.83	54.0	35.41	AV	233.00	150	Horizontal	N/A
4	4881.000	49.08	-1.56	74.0	-24.92	Peak	0.00	150	Horizontal	Pass
4**	4881.000	40.11	-1.56	54.0	-13.89	AV	0.00	150	Horizontal	Pass
5	11653.188	57.50	20.44	74.0	-16.50	Peak	249.00	150	Horizontal	Pass
5**	11653.188	41.31	20.44	54.0	-12.69	AV	249.00	150	Horizontal	Pass
6	17660.062	60.68	29.16	74.0	-13.32	Peak	184.00	150	Horizontal	Pass
6**	17660.062	45.80	29.16	54.0	-8.20	AV	184.00	150	Horizontal	Pass

GFSK (BLE) -2 Mbps HIGH CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

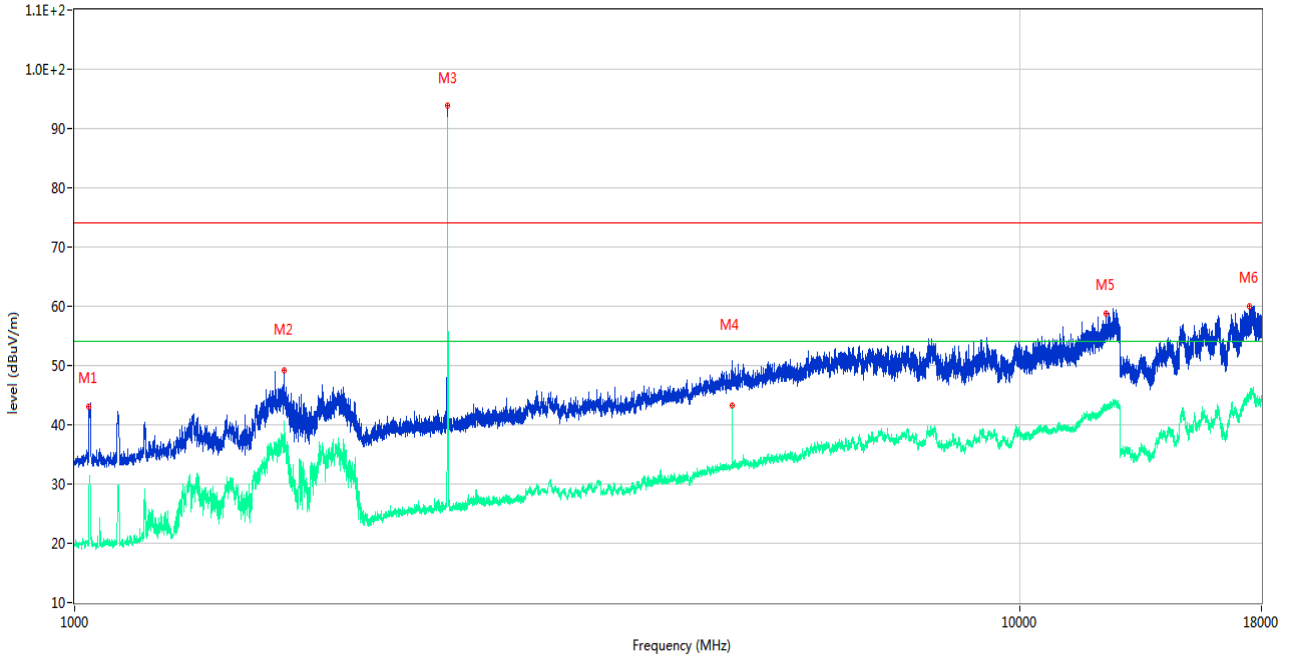

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1027.500	34.81	-14.62	74.0	-39.19	Peak	360.00	150	Vertical	Pass
1**	1027.500	19.81	-14.62	54.0	-34.19	AV	360.00	150	Vertical	Pass
2	1664.000	49.19	-15.18	74.0	-24.81	Peak	231.00	150	Vertical	Pass
2**	1664.000	36.50	-15.18	54.0	-17.50	AV	231.00	150	Vertical	Pass
3	2480.000	93.86	-10.37	74.0	19.86	Peak	165.00	150	Vertical	N/A
3**	2480.000	90.01	-10.37	54.0	36.01	AV	165.00	150	Vertical	N/A
4	4961.000	50.79	-1.85	74.0	-23.21	Peak	94.00	150	Vertical	Pass
4**	4961.000	43.29	-1.85	54.0	-10.71	AV	94.00	150	Vertical	Pass
5	12340.312	58.84	21.34	74.0	-15.16	Peak	313.00	150	Vertical	Pass
5**	12340.312	42.84	21.34	54.0	-11.16	AV	313.00	150	Vertical	Pass
6	17486.813	59.92	29.33	74.0	-14.08	Peak	67.00	150	Vertical	Pass
6**	17486.813	44.69	29.33	54.0	-9.31	AV	67.00	150	Vertical	Pass

GFSK (BLE) -2 Mbps HIGH CHANNEL 1 GHz to 18 GHz, ANT H

RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

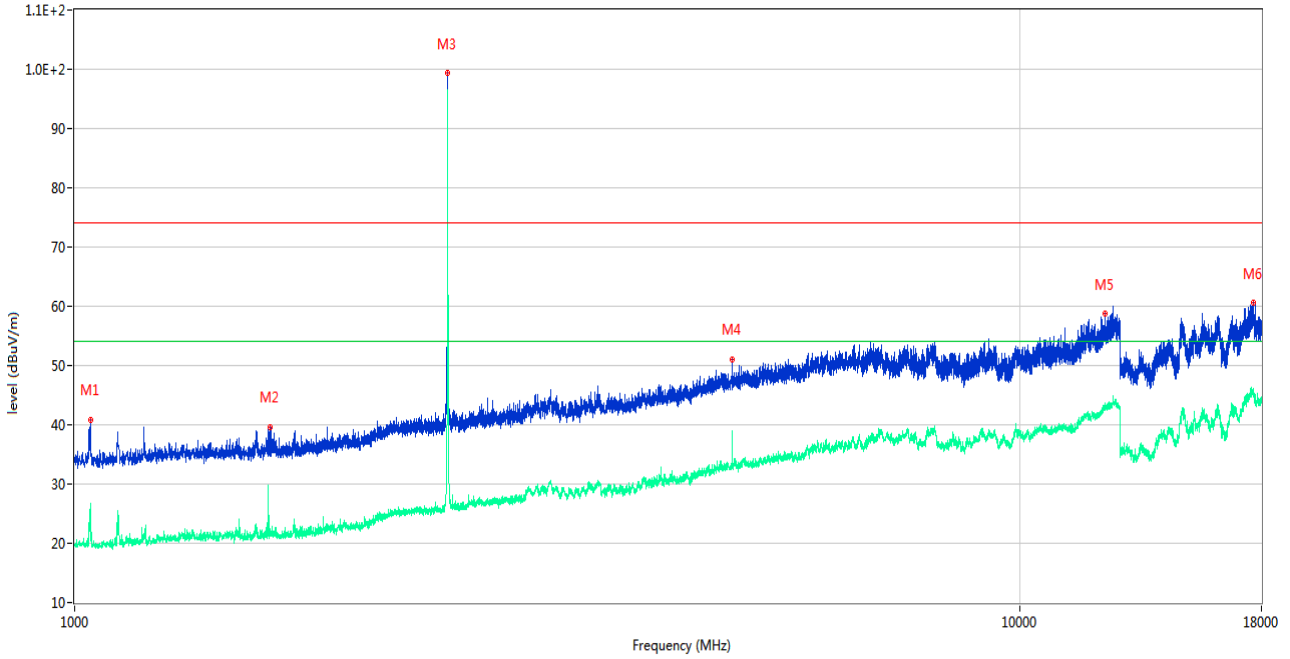


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1022.500	33.73	-14.54	74.0	-40.27	Peak	340.00	150	Horizontal	Pass
1**	1022.500	19.86	-14.54	54.0	-34.14	AV	340.00	150	Horizontal	Pass
2	1610.500	39.63	-15.25	74.0	-34.37	Peak	243.00	150	Horizontal	Pass
2**	1610.500	21.53	-15.25	54.0	-32.47	AV	243.00	150	Horizontal	Pass
3	2480.500	99.31	-10.38	74.0	25.31	Peak	232.00	150	Horizontal	N/A
3**	2480.500	96.63	-10.38	54.0	42.63	AV	232.00	150	Horizontal	N/A
4	4960.000	51.08	-1.80	74.0	-22.92	Peak	224.00	150	Horizontal	Pass
4**	4960.000	37.80	-1.80	54.0	-16.20	AV	224.00	150	Horizontal	Pass
5	12300.063	58.76	21.74	74.0	-15.24	Peak	262.00	150	Horizontal	Pass
5**	12300.063	42.93	21.74	54.0	-11.07	AV	262.00	150	Horizontal	Pass
6	17641.687	60.54	29.57	74.0	-13.46	Peak	218.00	150	Horizontal	Pass
6**	17641.687	45.79	29.57	54.0	-8.21	AV	218.00	150	Horizontal	Pass

External Antenna


GFSK (BLE) -1 Mbps LOW CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

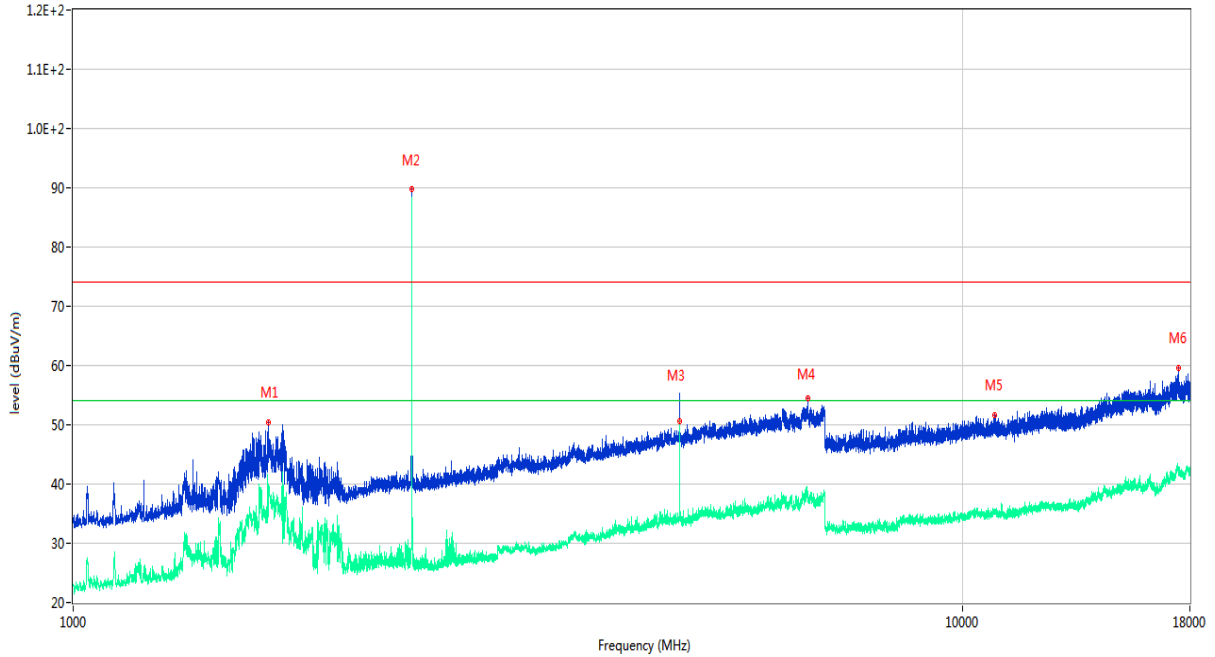


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1657.000	50.33	-17.56	74.0	-23.67	Peak	73.00	150	Vertical	Pass
1**	1657.000	39.29	-17.56	54.0	-14.71	AV	73.00	150	Vertical	Pass
2	2402.000	89.78	-12.11	74.0	15.78	Peak	47.00	150	Vertical	N/A
2**	2402.000	84.74	-12.11	54.0	30.74	AV	47.00	150	Vertical	N/A
3	4805.000	55.25	-2.74	74.0	-18.75	Peak	207.00	150	Vertical	Pass
3**	4805.000	50.60	-2.74	54.0	-3.40	AV	207.00	150	Vertical	Pass
4	6696.000	54.56	-0.29	74.0	-19.44	Peak	346.00	150	Vertical	Pass
4**	6696.000	37.64	-0.29	54.0	-16.36	AV	346.00	150	Vertical	Pass
5	10848.187	51.63	0.90	74.0	-22.37	Peak	233.00	150	Vertical	Pass
5**	10848.187	34.86	0.90	54.0	-19.14	AV	233.00	150	Vertical	Pass
6	17463.187	59.66	3.85	74.0	-14.34	Peak	95.00	150	Vertical	Pass
6**	17463.187	42.49	3.85	54.0	-11.51	AV	95.00	150	Vertical	Pass

GFSK (BLE) -1 Mbps LOW CHANNEL 1 GHz to 18 GHz, ANT H

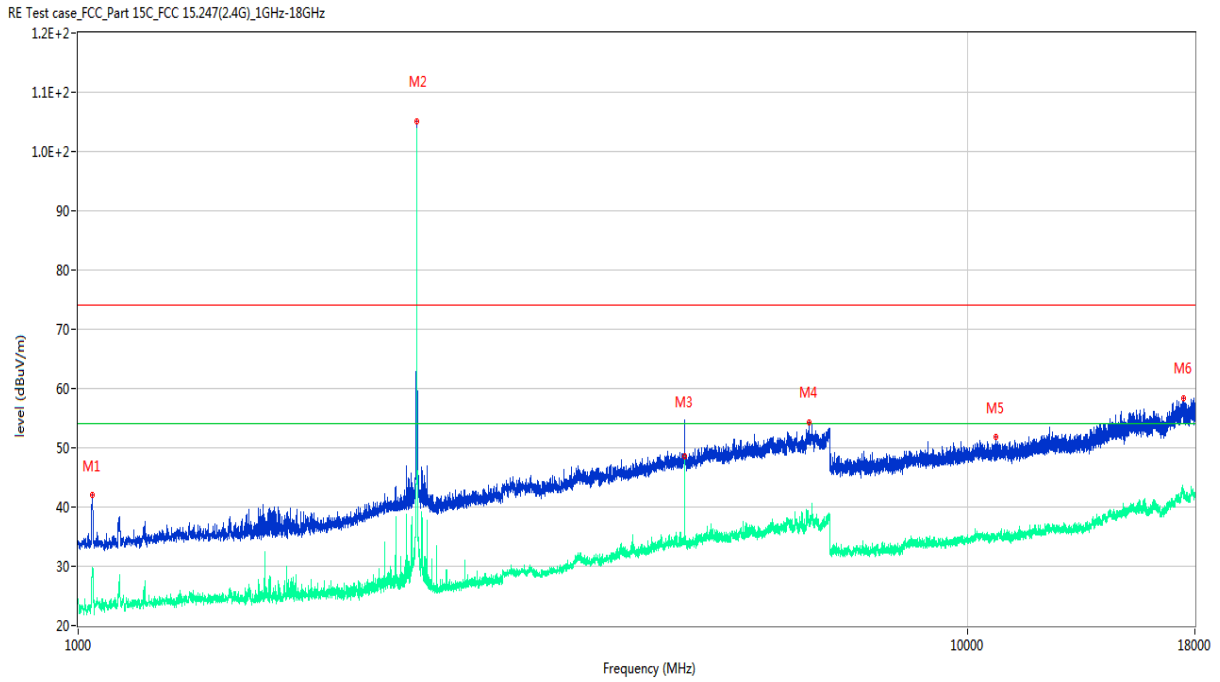


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1035.000	36.95	-18.38	74.0	-37.05	Peak	30.00	150	Horizontal	Pass
1**	1035.000	23.05	-18.38	54.0	-30.95	AV	30.00	150	Horizontal	Pass
2	2401.500	105.10	-12.08	74.0	31.10	Peak	293.00	150	Horizontal	N/A
2**	2401.500	90.29	-12.08	54.0	36.29	AV	293.00	150	Horizontal	N/A
3	4805.000	54.63	-2.74	74.0	-19.37	Peak	194.00	150	Horizontal	Pass
3**	4805.000	48.47	-2.74	54.0	-5.53	AV	194.00	150	Horizontal	Pass
4	6631.000	54.31	-0.04	74.0	-19.69	Peak	142.00	150	Horizontal	Pass
4**	6631.000	37.43	-0.04	54.0	-16.57	AV	142.00	150	Horizontal	Pass
5	10763.375	51.75	-0.19	74.0	-22.25	Peak	59.00	150	Horizontal	Pass
5**	10763.375	34.82	-0.19	54.0	-19.18	AV	59.00	150	Horizontal	Pass
6	17468.436	58.41	3.79	74.0	-15.59	Peak	231.00	150	Horizontal	Pass
6**	17468.436	42.98	3.79	54.0	-11.02	AV	231.00	150	Horizontal	Pass

GFSK (BLE) -1 Mbps MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

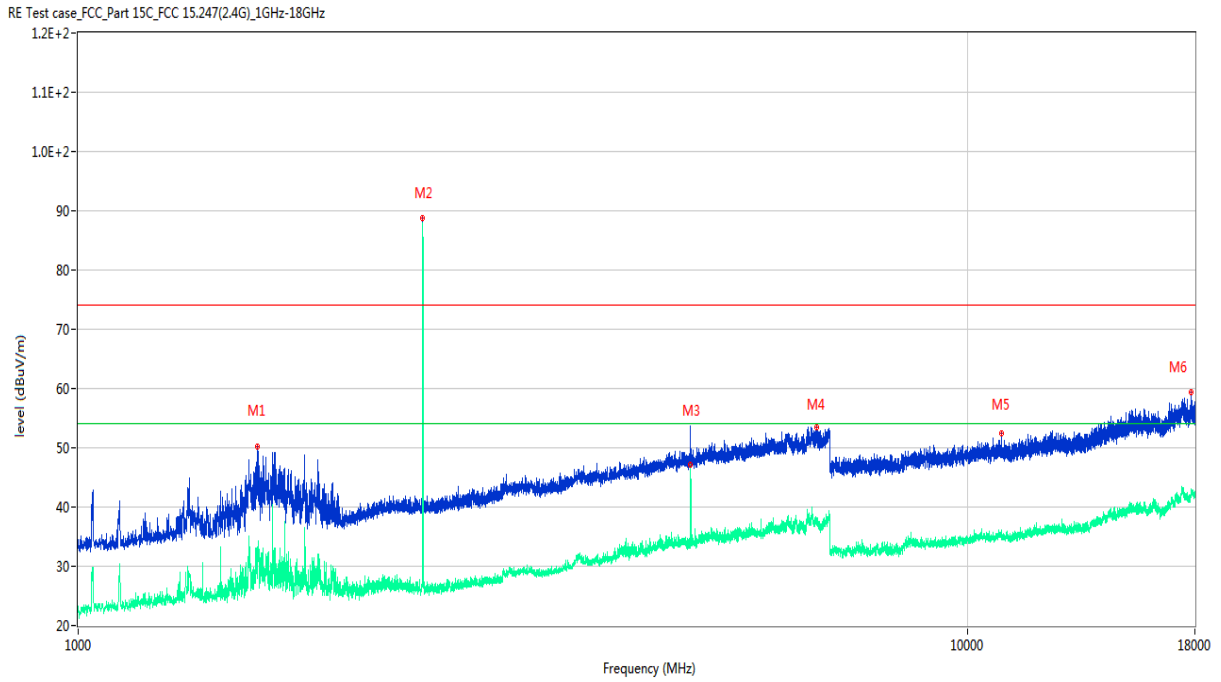


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1592.000	50.21	-17.66	74.0	-23.79	Peak	86.00	150	Vertical	Pass
1**	1592.000	28.50	-17.66	54.0	-25.50	AV	86.00	150	Vertical	Pass
2	2439.500	88.74	-12.73	74.0	14.74	Peak	51.00	150	Vertical	N/A
2**	2439.500	73.95	-12.73	54.0	19.95	AV	51.00	150	Vertical	N/A
3	4881.000	52.80	-3.36	74.0	-21.20	Peak	241.00	150	Vertical	Pass
3**	4881.000	47.16	-3.36	54.0	-6.84	AV	241.00	150	Vertical	Pass
4	6770.000	53.38	-0.65	74.0	-20.62	Peak	71.00	150	Vertical	Pass
4**	6770.000	37.49	-0.65	54.0	-16.51	AV	71.00	150	Vertical	Pass
5	10914.312	52.37	0.46	74.0	-21.63	Peak	154.00	150	Vertical	Pass
5**	10914.312	34.97	0.46	54.0	-19.03	AV	154.00	150	Vertical	Pass
6	17842.500	59.44	4.08	74.0	-14.56	Peak	318.00	150	Vertical	Pass
6**	17842.500	42.38	4.08	54.0	-11.62	AV	318.00	150	Vertical	Pass

GFSK (BLE) -1 Mbps MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

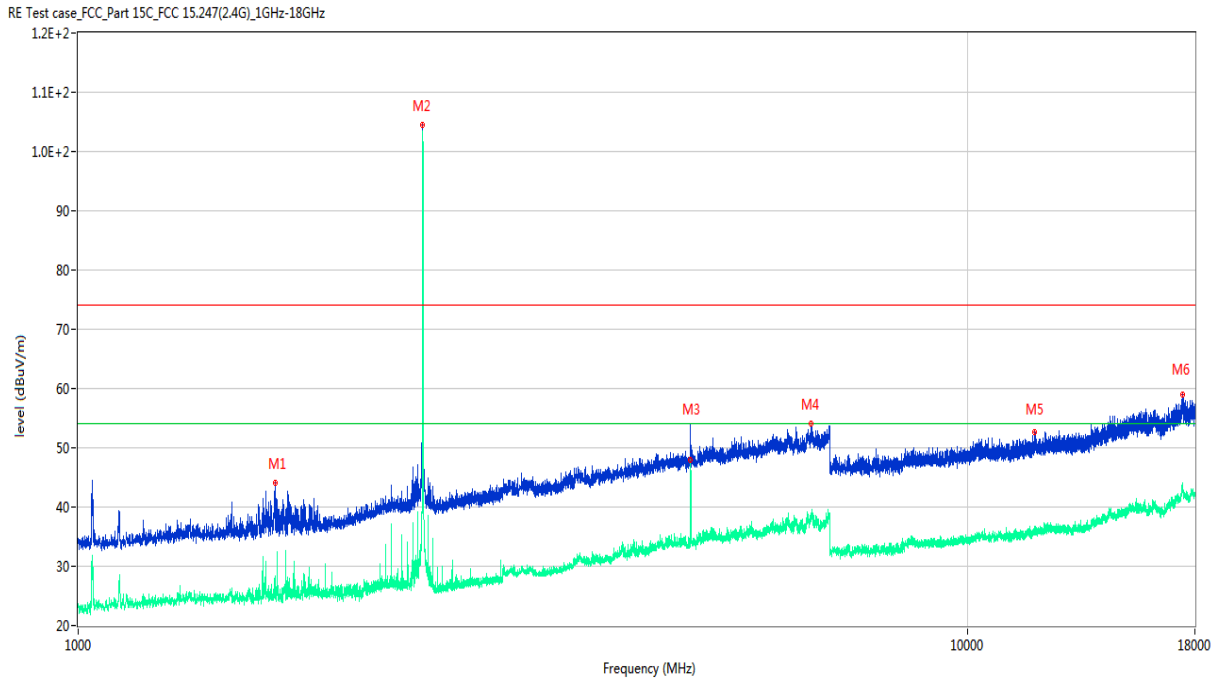


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1665.000	44.01	-17.55	74.0	-29.99	Peak	106.00	150	Horizontal	Pass
1**	1665.000	26.11	-17.55	54.0	-27.89	AV	106.00	150	Horizontal	Pass
2	2439.500	104.49	-12.73	74.0	30.49	Peak	283.00	150	Horizontal	N/A
2**	2439.500	90.21	-12.73	54.0	36.21	AV	283.00	150	Horizontal	N/A
3	4881.000	53.81	-3.36	74.0	-20.19	Peak	252.00	150	Horizontal	Pass
3**	4881.000	47.96	-3.36	54.0	-6.04	AV	252.00	150	Horizontal	Pass
4	6670.000	54.09	-0.16	74.0	-19.91	Peak	28.00	150	Horizontal	Pass
4**	6670.000	38.79	-0.16	54.0	-15.21	AV	28.00	150	Horizontal	Pass
5	11891.812	52.73	2.12	74.0	-21.27	Peak	328.00	150	Horizontal	Pass
5**	11891.812	36.21	2.12	54.0	-17.79	AV	328.00	150	Horizontal	Pass
6	17423.813	59.06	4.74	74.0	-14.94	Peak	157.00	150	Horizontal	Pass
6**	17423.813	43.00	4.74	54.0	-11.00	AV	157.00	150	Horizontal	Pass

GFSK (BLE) -1 Mbps HIGH CHANNEL 1 GHz to 18 GHz, ANT V

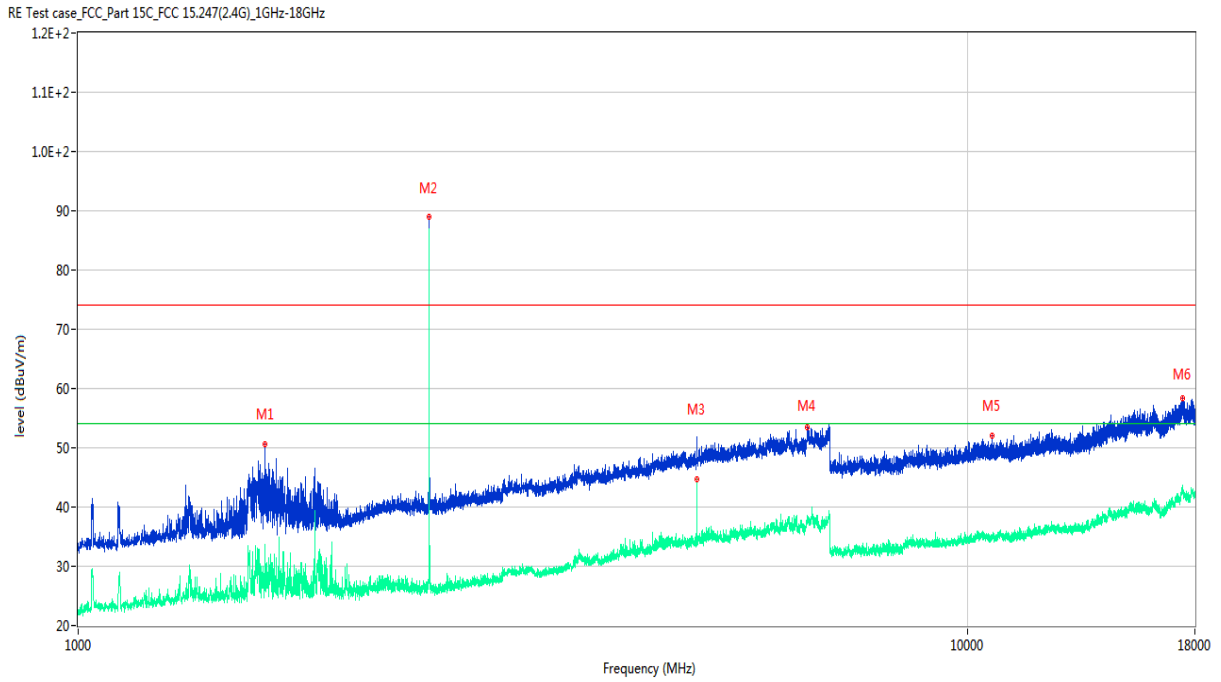

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1620.500	50.61	-17.74	74.0	-23.39	Peak	88.00	150	Vertical	Pass
1**	1620.500	28.51	-17.74	54.0	-25.49	AV	88.00	150	Vertical	Pass
2	2479.500	88.88	-12.27	74.0	14.88	Peak	56.00	150	Vertical	N/A
2**	2479.500	74.32	-12.27	54.0	20.32	AV	56.00	150	Vertical	N/A
3	4961.000	51.10	-3.08	74.0	-22.90	Peak	197.00	150	Vertical	Pass
3**	4961.000	44.68	-3.08	54.0	-9.32	AV	197.00	150	Vertical	Pass
4	6602.000	53.54	0.18	74.0	-20.46	Peak	53.00	150	Vertical	Pass
4**	6602.000	37.54	0.18	54.0	-16.46	AV	53.00	150	Vertical	Pass
5	10651.250	52.09	-0.17	74.0	-21.91	Peak	118.00	150	Vertical	Pass
5**	10651.250	34.97	-0.17	54.0	-19.03	AV	118.00	150	Vertical	Pass
6	17417.251	58.42	4.78	74.0	-15.58	Peak	303.00	150	Vertical	Pass
6**	17417.251	43.40	4.78	54.0	-10.60	AV	303.00	150	Vertical	Pass


GFSK (BLE) -1 Mbps HIGH CHANNEL 1 GHz to 18 GHz, ANT H

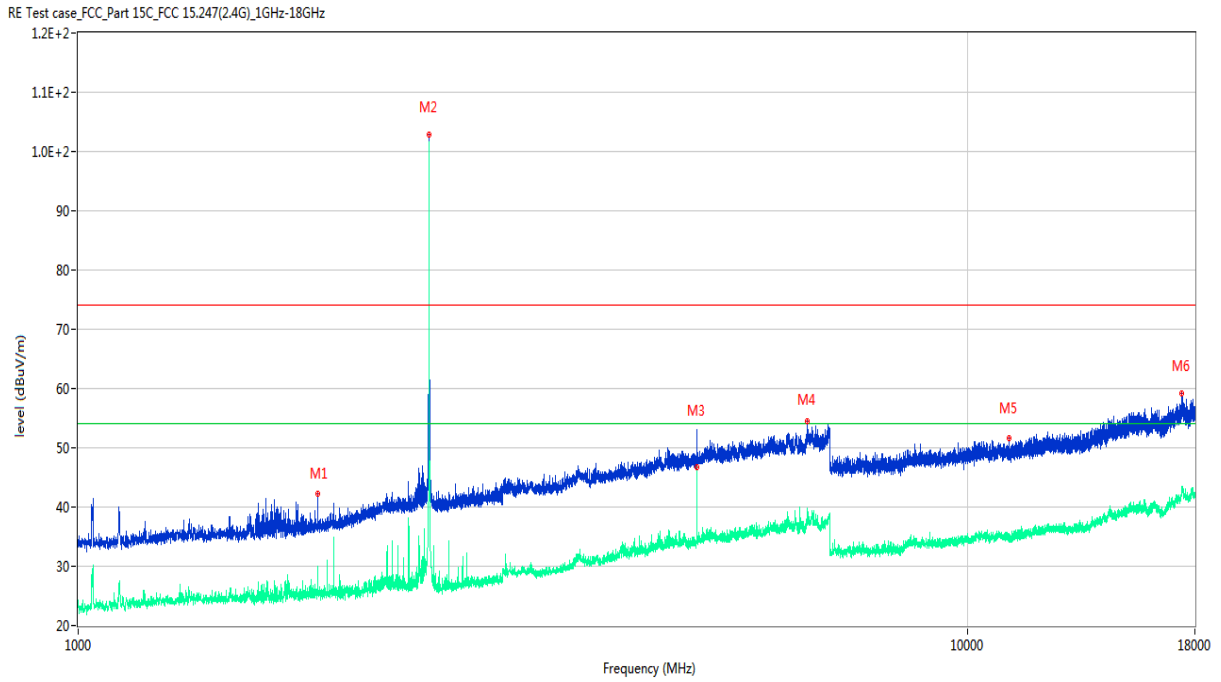

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1858.500	42.17	-16.47	74.0	-31.83	Peak	285.00	150	Horizontal	Pass
1**	1858.500	25.20	-16.47	54.0	-28.80	AV	285.00	150	Horizontal	Pass
2	2479.500	102.89	-12.27	74.0	28.89	Peak	280.00	150	Horizontal	N/A
2**	2479.500	88.76	-12.27	54.0	34.76	AV	280.00	150	Horizontal	N/A
3	4947.000	46.51	-3.58	74.0	-27.49	Peak	232.00	150	Horizontal	Pass
3**	4947.000	33.19	-3.58	54.0	-20.81	AV	232.00	150	Horizontal	Pass
4	6604.000	54.40	0.39	74.0	-19.60	Peak	237.00	150	Horizontal	Pass
4**	6604.000	39.87	0.39	54.0	-14.13	AV	237.00	150	Horizontal	Pass
5	11125.625	51.73	-0.47	74.0	-22.27	Peak	296.00	150	Horizontal	Pass
5**	11125.625	35.13	-0.47	54.0	-18.87	AV	296.00	150	Horizontal	Pass
6	17408.063	59.25	4.51	74.0	-14.75	Peak	131.00	150	Horizontal	Pass
6**	17408.063	42.80	4.51	54.0	-11.20	AV	131.00	150	Horizontal	Pass


GFSK (BLE) -2 Mbps LOW CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

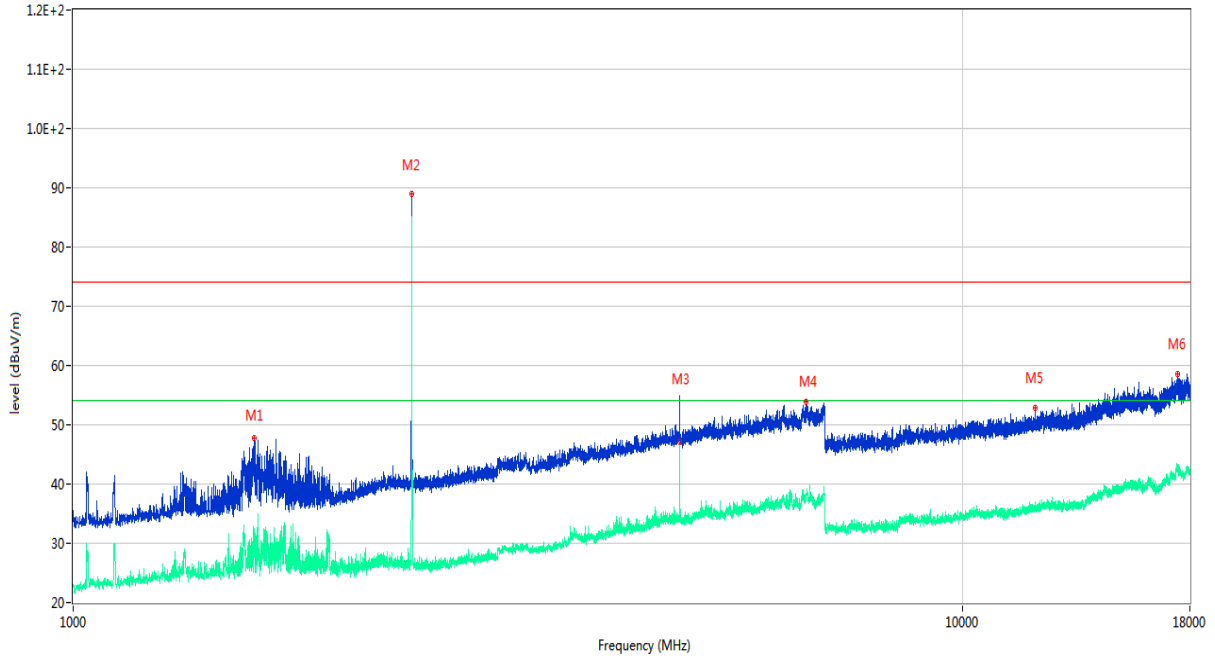

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1598.500	47.82	-17.62	74.0	-26.18	Peak	78.00	150	Vertical	Pass
1**	1598.500	28.70	-17.62	54.0	-25.30	AV	78.00	150	Vertical	Pass
2	2401.500	88.94	-12.08	74.0	14.94	Peak	47.00	150	Vertical	N/A
2**	2401.500	78.14	-12.08	54.0	24.14	AV	47.00	150	Vertical	N/A
3	4804.000	52.90	-2.67	74.0	-21.10	Peak	208.00	150	Vertical	Pass
3**	4804.000	47.05	-2.67	54.0	-6.95	AV	208.00	150	Vertical	Pass
4	6671.000	53.81	-0.18	74.0	-20.19	Peak	228.00	150	Vertical	Pass
4**	6671.000	37.84	-0.18	54.0	-16.16	AV	228.00	150	Vertical	Pass
5	12054.250	52.86	1.39	74.0	-21.14	Peak	3.00	150	Vertical	Pass
5**	12054.250	37.04	1.39	54.0	-16.96	AV	3.00	150	Vertical	Pass
6	17456.626	58.57	3.89	74.0	-15.43	Peak	130.00	150	Vertical	Pass
6**	17456.626	42.57	3.89	54.0	-11.43	AV	130.00	150	Vertical	Pass


GFSK (BLE) -2 Mbps LOW CHANNEL 1 GHz to 18 GHz, ANT H

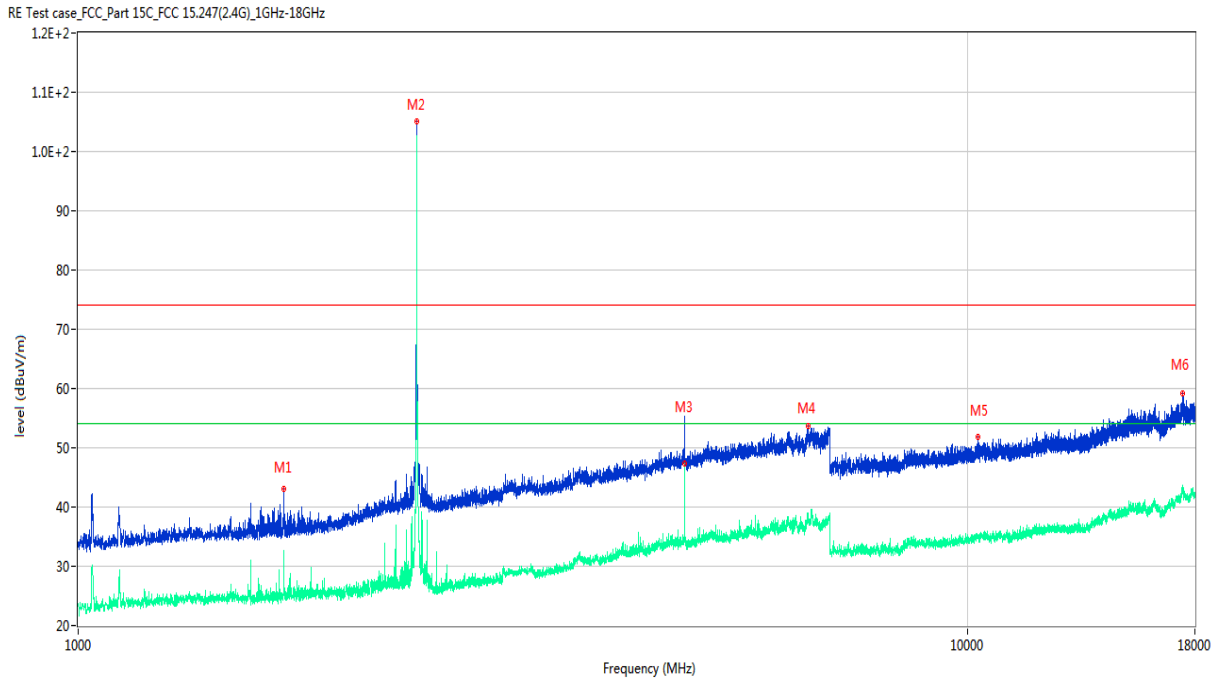

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1702.500	43.02	-17.37	74.0	-30.98	Peak	106.00	150	Horizontal	Pass
1**	1702.500	25.25	-17.37	54.0	-28.75	AV	106.00	150	Horizontal	Pass
2	2401.500	105.17	-12.08	74.0	31.17	Peak	283.00	150	Horizontal	N/A
2**	2401.500	94.38	-12.08	54.0	40.38	AV	283.00	150	Horizontal	N/A
3	4805.000	55.25	-2.74	74.0	-18.75	Peak	196.00	150	Horizontal	Pass
3**	4805.000	47.37	-2.74	54.0	-6.63	AV	196.00	150	Horizontal	Pass
4	6619.000	53.71	0.37	74.0	-20.29	Peak	308.00	150	Horizontal	Pass
4**	6619.000	38.03	0.37	54.0	-15.97	AV	308.00	150	Horizontal	Pass
5	10254.500	51.77	1.22	74.0	-22.23	Peak	272.00	150	Horizontal	Pass
5**	10254.500	34.77	1.22	54.0	-19.23	AV	272.00	150	Horizontal	Pass
6	17423.813	59.12	4.74	74.0	-14.88	Peak	24.00	150	Horizontal	Pass
6**	17423.813	43.20	4.74	54.0	-10.80	AV	24.00	150	Horizontal	Pass


GFSK (BLE) -2 Mbps MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

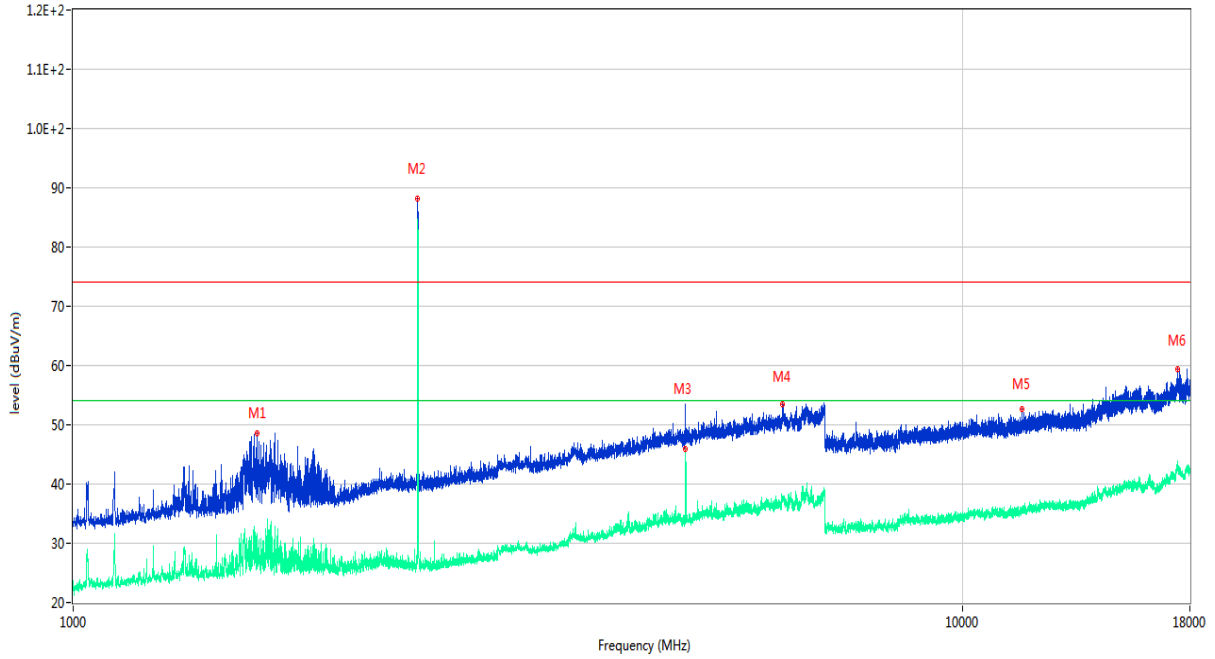


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1608.000	48.51	-17.65	74.0	-25.49	Peak	76.00	150	Vertical	Pass
1**	1608.000	27.50	-17.65	54.0	-26.50	AV	76.00	150	Vertical	Pass
2	2439.500	88.22	-12.73	74.0	14.22	Peak	53.00	150	Vertical	N/A
2**	2439.500	78.26	-12.73	54.0	24.26	AV	53.00	150	Vertical	N/A
3	4880.000	53.01	-3.18	74.0	-20.99	Peak	242.00	150	Vertical	Pass
3**	4880.000	46.00	-3.18	54.0	-8.00	AV	242.00	150	Vertical	Pass
4	6271.000	53.48	-0.15	74.0	-20.52	Peak	315.00	150	Vertical	Pass
4**	6271.000	37.82	-0.15	54.0	-16.18	AV	315.00	150	Vertical	Pass
5	11663.250	52.60	0.51	74.0	-21.40	Peak	360.00	150	Vertical	Pass
5**	11663.250	35.44	0.51	54.0	-18.56	AV	360.00	150	Vertical	Pass
6	17423.813	59.29	4.74	74.0	-14.71	Peak	122.00	150	Vertical	Pass
6**	17423.813	43.63	4.74	54.0	-10.37	AV	122.00	150	Vertical	Pass

GFSK (BLE) -2 Mbps MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

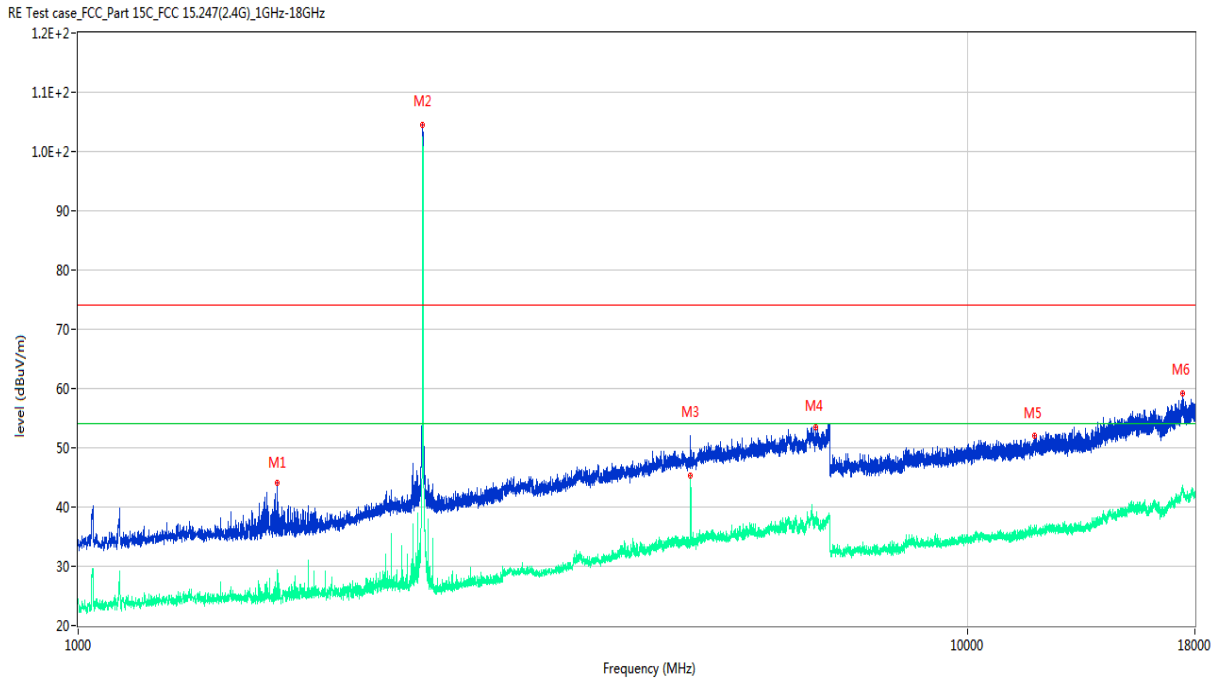


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1675.000	44.05	-17.51	74.0	-29.95	Peak	52.00	150	Horizontal	Pass
1**	1675.000	24.53	-17.51	54.0	-29.47	AV	52.00	150	Horizontal	Pass
2	2440.500	104.57	-12.73	74.0	30.57	Peak	281.00	150	Horizontal	N/A
2**	2440.500	102.46	-12.73	54.0	48.46	AV	281.00	150	Horizontal	N/A
3	4880.000	51.65	-3.18	74.0	-22.35	Peak	254.00	150	Horizontal	Pass
3**	4880.000	45.38	-3.18	54.0	-8.62	AV	254.00	150	Horizontal	Pass
4	6742.000	53.48	0.06	74.0	-20.52	Peak	87.00	150	Horizontal	Pass
4**	6742.000	37.31	0.06	54.0	-16.69	AV	87.00	150	Horizontal	Pass
5	11891.812	52.09	2.12	74.0	-21.91	Peak	64.00	150	Horizontal	Pass
5**	11891.812	36.39	2.12	54.0	-17.61	AV	64.00	150	Horizontal	Pass
6	17418.562	59.16	4.81	74.0	-14.84	Peak	70.00	150	Horizontal	Pass
6**	17418.562	43.14	4.81	54.0	-10.86	AV	70.00	150	Horizontal	Pass

GFSK (BLE) -2 Mbps HIGH CHANNEL 1 GHz to 18 GHz, ANT V

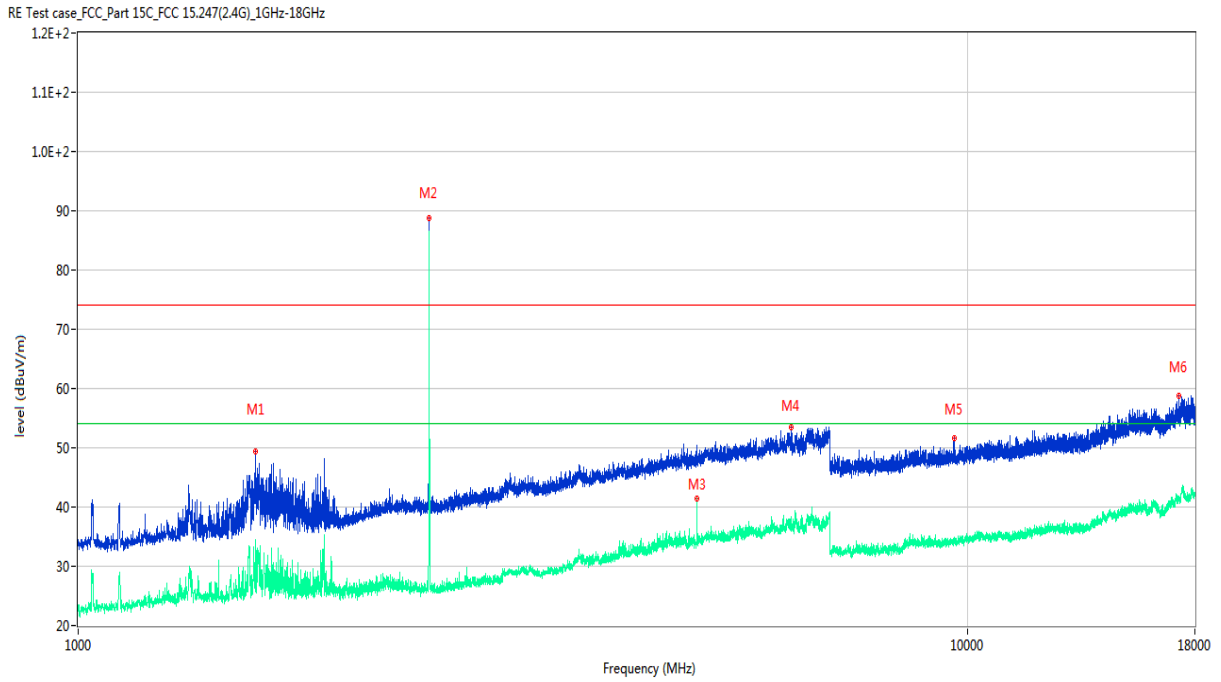

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1582.000	49.30	-17.56	74.0	-24.70	Peak	81.00	150	Vertical	Pass
1**	1582.000	27.70	-17.56	54.0	-26.30	AV	81.00	150	Vertical	Pass
2	2480.500	88.69	-12.33	74.0	14.69	Peak	51.00	150	Vertical	N/A
2**	2480.500	86.48	-12.33	54.0	32.48	AV	51.00	150	Vertical	N/A
3	4961.000	50.49	-3.08	74.0	-23.51	Peak	202.00	150	Vertical	Pass
3**	4961.000	41.44	-3.08	54.0	-12.56	AV	202.00	150	Vertical	Pass
4	6334.000	53.49	-0.91	74.0	-20.51	Peak	347.00	150	Vertical	Pass
4**	6334.000	37.23	-0.91	54.0	-16.77	AV	347.00	150	Vertical	Pass
5	9668.000	51.62	0.31	74.0	-22.38	Peak	19.00	150	Vertical	Pass
5**	9668.000	34.64	0.31	54.0	-19.36	AV	19.00	150	Vertical	Pass
6	17257.126	58.78	2.34	74.0	-15.22	Peak	27.00	150	Vertical	Pass
6**	17257.126	41.01	2.34	54.0	-12.99	AV	27.00	150	Vertical	Pass

GFSK (BLE) -2 Mbps HIGH CHANNEL 1 GHz to 18 GHz, ANT H

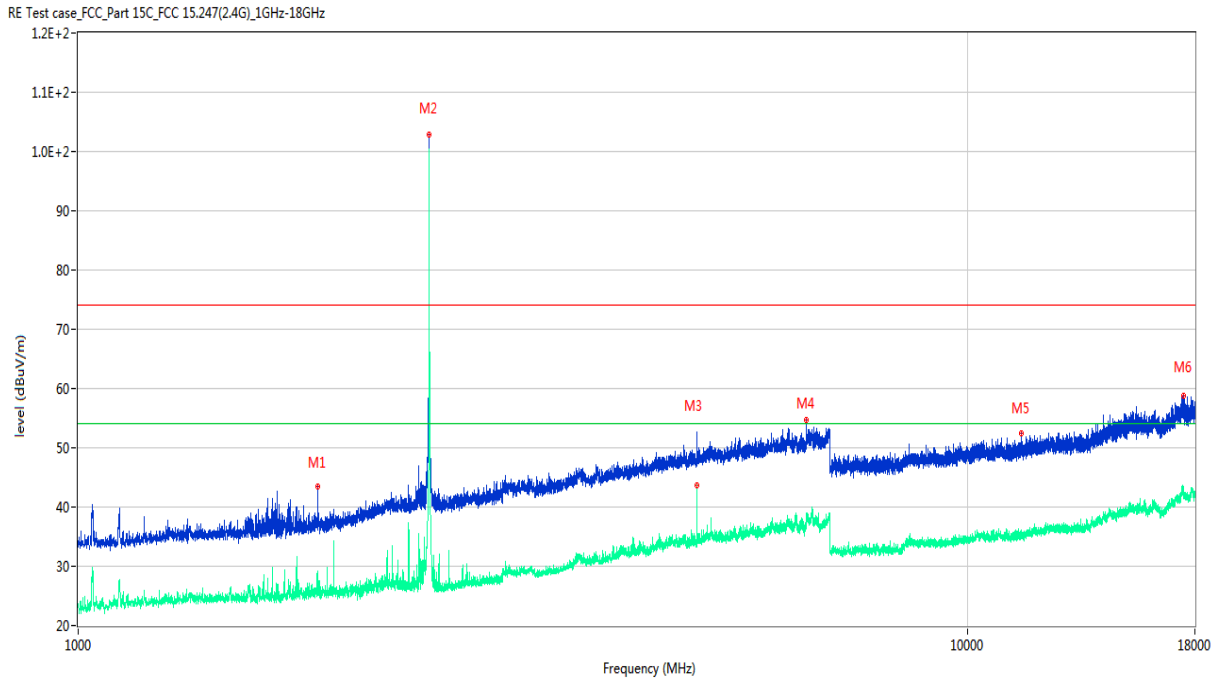

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1860.500	43.55	-16.39	74.0	-30.45	Peak	119.00	150	Horizontal	Pass
1**	1860.500	25.09	-16.39	54.0	-28.91	AV	119.00	150	Horizontal	Pass
2	2480.000	102.88	-12.30	74.0	28.88	Peak	275.00	150	Horizontal	N/A
2**	2480.000	98.29	-12.30	54.0	44.29	AV	275.00	150	Horizontal	N/A
3	4962.000	46.84	-3.04	74.0	-27.16	Peak	94.00	150	Horizontal	Pass
3**	4962.000	43.61	-3.04	54.0	-10.39	AV	94.00	150	Horizontal	Pass
4	6587.000	54.79	-0.96	74.0	-19.21	Peak	57.00	150	Horizontal	Pass
4**	6587.000	37.63	-0.96	54.0	-16.37	AV	57.00	150	Horizontal	Pass
5	11499.375	52.40	0.29	74.0	-21.60	Peak	99.00	150	Horizontal	Pass
5**	11499.375	35.47	0.29	54.0	-18.53	AV	99.00	150	Horizontal	Pass
6	17467.126	58.72	3.81	74.0	-15.28	Peak	108.00	150	Horizontal	Pass
6**	17467.126	42.42	3.81	54.0	-11.58	AV	108.00	150	Horizontal	Pass

A.7 Band Edge (Restricted-band band-edge)

Note¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note⁴: The Level (dBuV/m) has been corrected by factor.

Built-in Antenna


BLE -1 Mbps

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	52.677	31.47	74	21.323	PEAK	Pass
		2390	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.5	58.457	31.4	74	15.543	PEAK	Pass
		2483.5	44.693	31.4	54	9.307	AVERAGE	Pass


LOW CHANNEL, PEAK

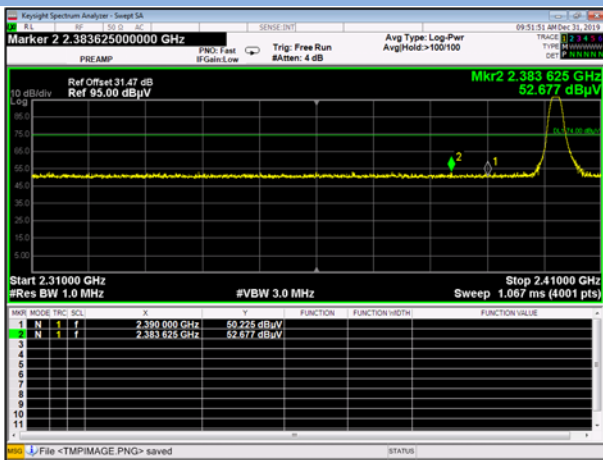

HIGH CHANNEL, PEAK

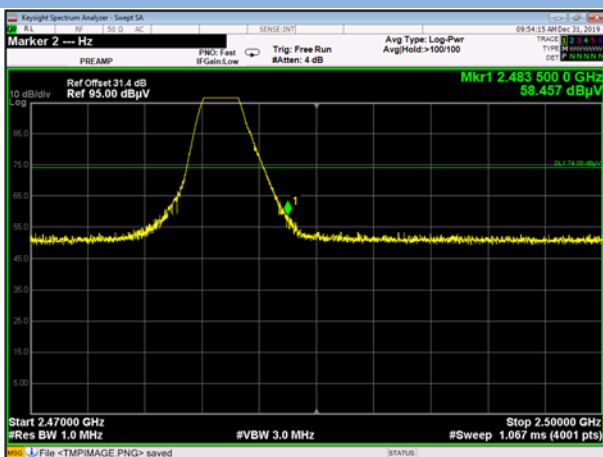

HIGH CHANNEL, AV

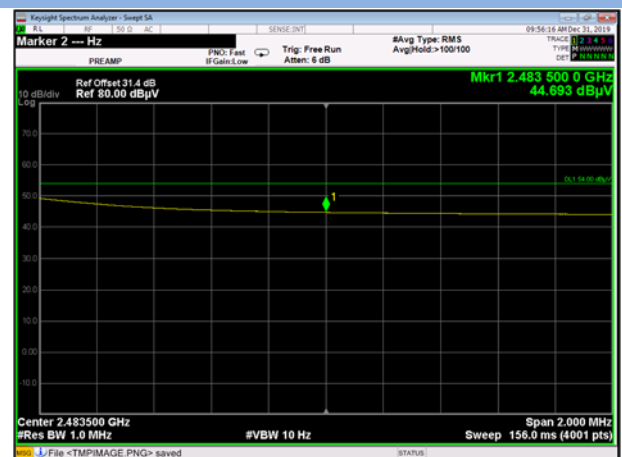


Built-in Antenna


BLE -2 Mbps

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	52.445	31.47	74	21.555	PEAK	Pass
		2390	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.5	58.789	31.4	74	15.211	PEAK	Pass
		2483.5	47.598	31.4	54	6.402	AVERAGE	Pass


LOW CHANNEL, PEAK

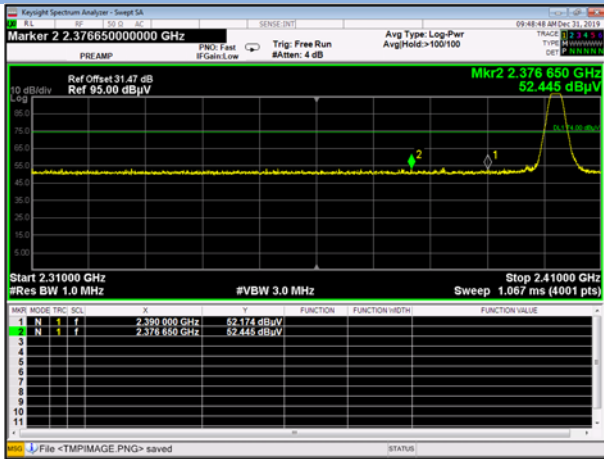

HIGH CHANNEL, PEAK

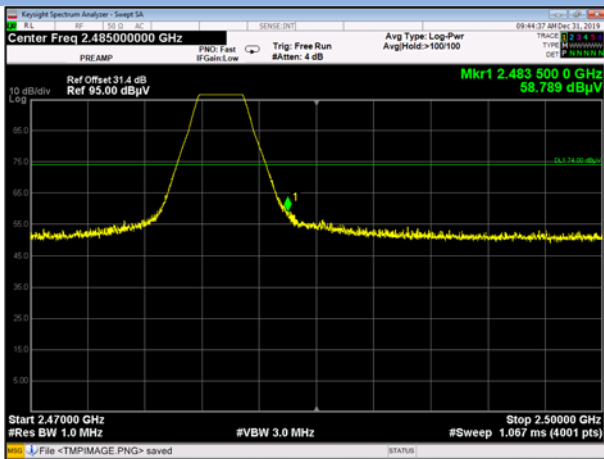

HIGH CHANNEL, AV

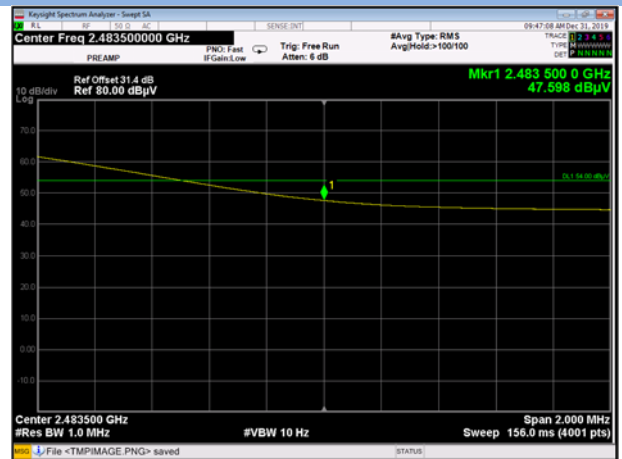


External Antenna

BLE -1 Mbps

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	53.42	31.47	74	20.58	PEAK	Pass
		2390	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.5	53.784	31.4	74	20.216	PEAK	Pass
		2483.5	N/A	N/A	54	N/A	AVERAGE	Pass

LOW CHANNEL, PEAK

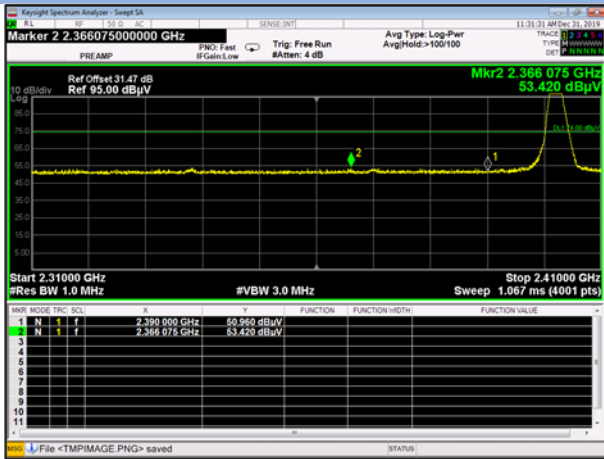

HIGH CHANNEL, PEAK




External Antenna


BLE -2 Mbps

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	53.19	31.47	74	20.81	PEAK	Pass
		2390	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.5	57.582	31.4	74	16.418	PEAK	Pass
		2483.5	48.441	31.4	54	5.559	AVERAGE	Pass

LOW CHANNEL, PEAK

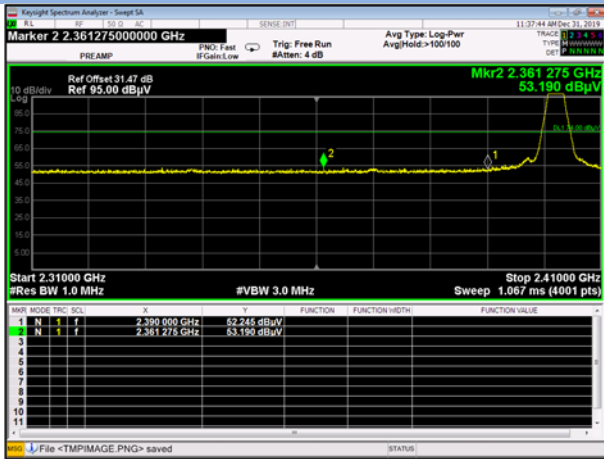

HIGH CHANNEL, PEAK

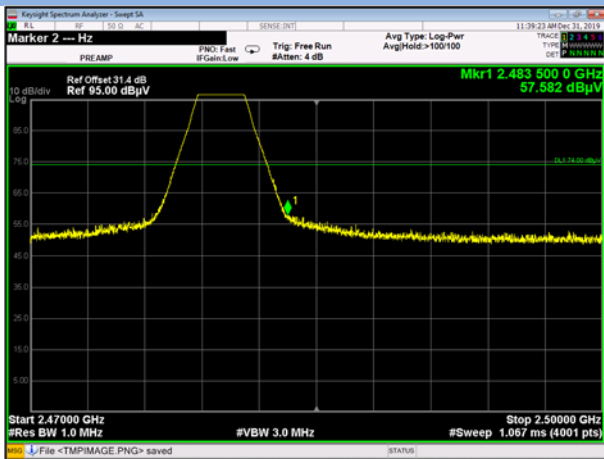

HIGH CHANNEL, AV



A.8 Power Spectral Density (PSD)

Built-in Antenna


BLE -1 Mbps

Test Data

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-8.15	8	Pass
Middle Channel	-8.34	8	Pass
High Channel	-8.10	8	Pass


Test plots

GFSK (BLE) -1 Mbps LOW CHANNEL

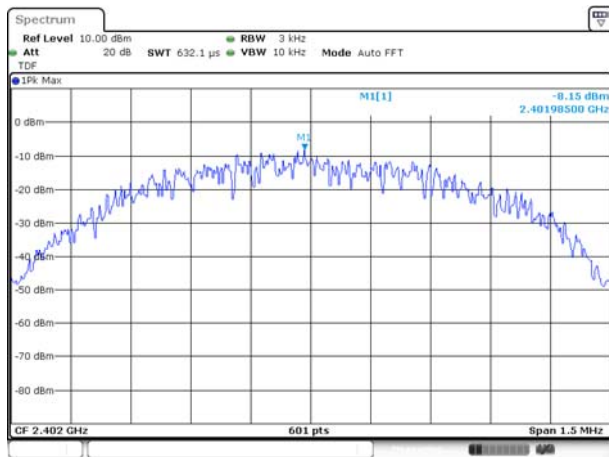


Date: 18 MAY 2019 14:02:47

GFSK (BLE) -1 Mbps MIDDLE CHANNEL

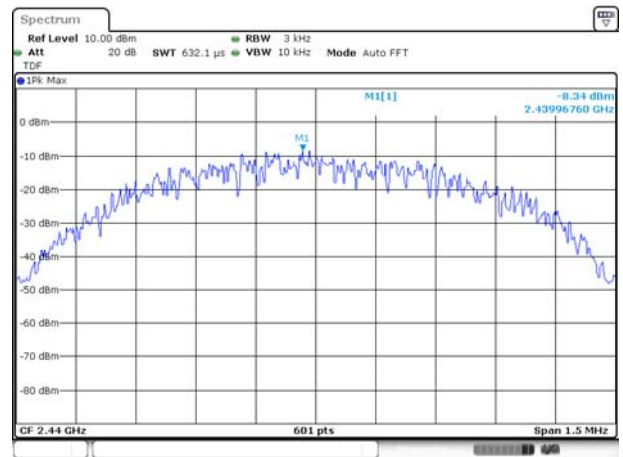

Date: 18 MAY 2019 14:05:24

GFSK (BLE) -1 Mbps HIGH CHANNEL

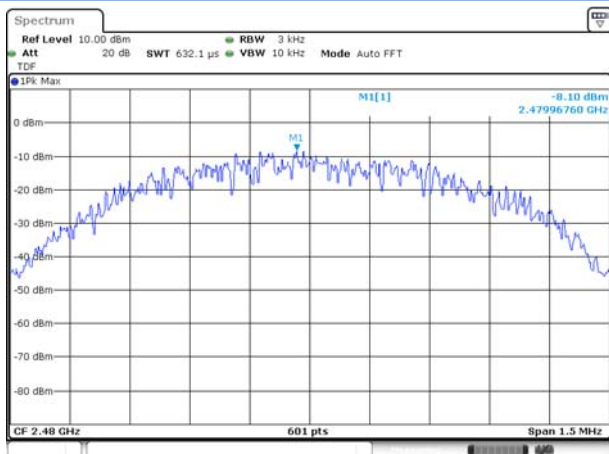

Date: 18 MAY 2019 14:11:46

Built-in Antenna


BLE -2 Mbps

Test Data

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-9.30	8	Pass
Middle Channel	-9.32	8	Pass
High Channel	-9.25	8	Pass


Test plots

GFSK (BLE) -2 Mbps LOW CHANNEL

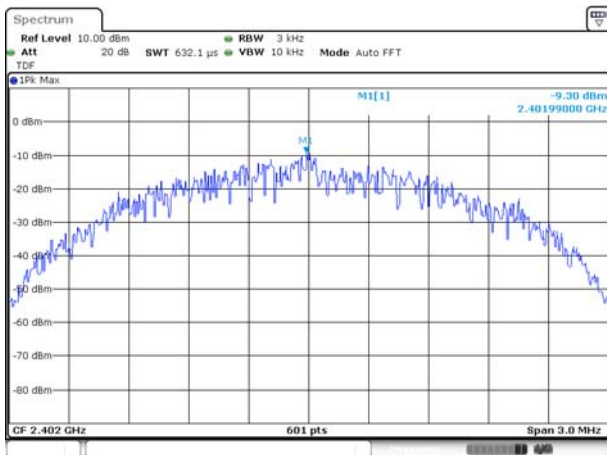


Date: 4 JUN 2019 21:03:45

GFSK (BLE) -2 Mbps MIDDLE CHANNEL

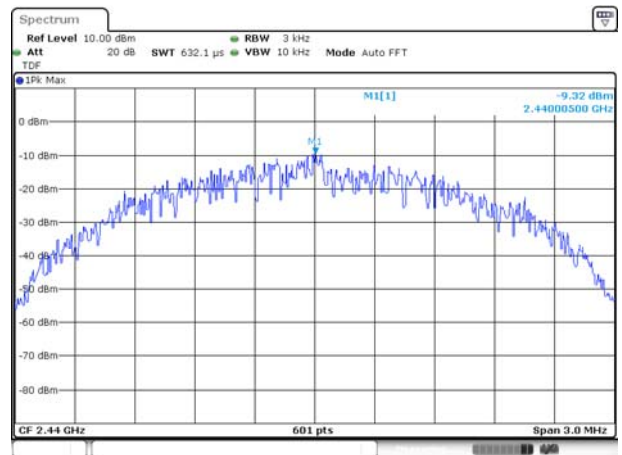

Date: 4 JUN 2019 21:06:06

GFSK (BLE) -2 Mbps HIGH CHANNEL

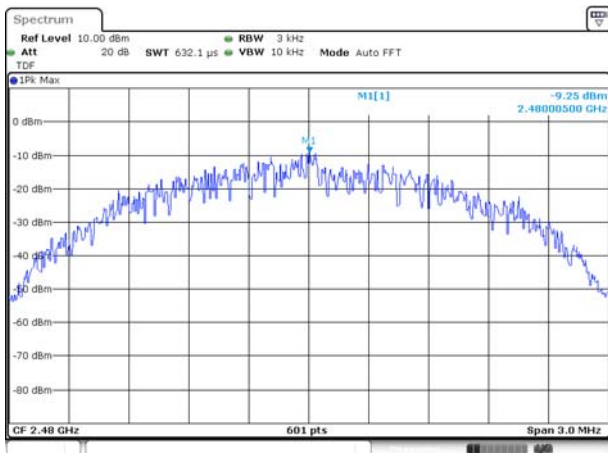

Date: 4 JUN 2019 21:06:58

External Antenna


BLE -1 Mbps

Test Data


Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-9.38	8	Pass
Middle Channel	-9.36	8	Pass
High Channel	-8.99	8	Pass

Test plots

GFSK (BLE) -1 Mbps LOW CHANNEL GFSK (BLE) -1 Mbps MIDDLE CHANNEL

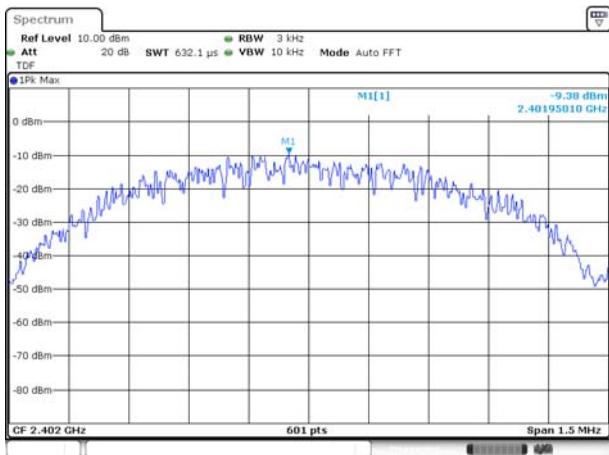


Date: 18 MAY 2019 14:55:44

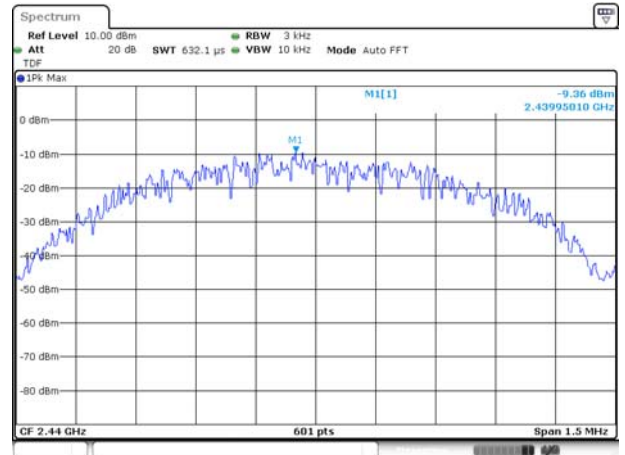

Date: 18 MAY 2019 14:58:11

GFSK (BLE) -1 Mbps HIGH CHANNEL

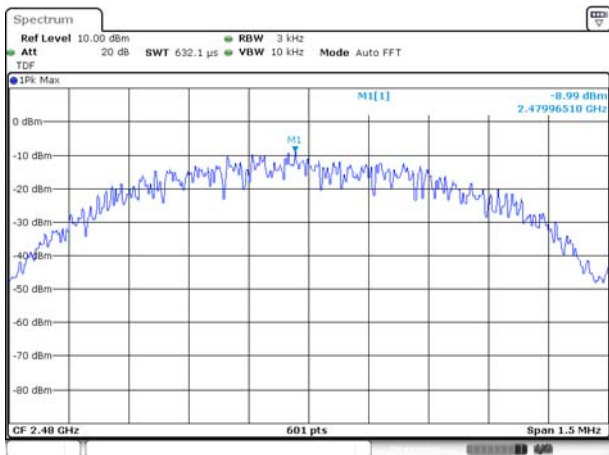

Date: 18 MAY 2019 15:00:46

External Antenna


BLE -2 Mbps

Test Data

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-11.05	8	Pass
Middle Channel	-10.87	8	Pass
High Channel	-10.68	8	Pass


Test plots

GFSK (BLE) -2 Mbps LOW CHANNEL

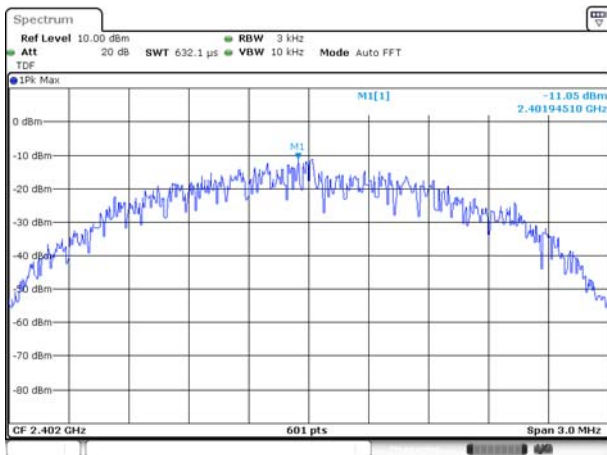


Date: 4 JUN 2019 21:10:04

GFSK (BLE) -2 Mbps MIDDLE CHANNEL

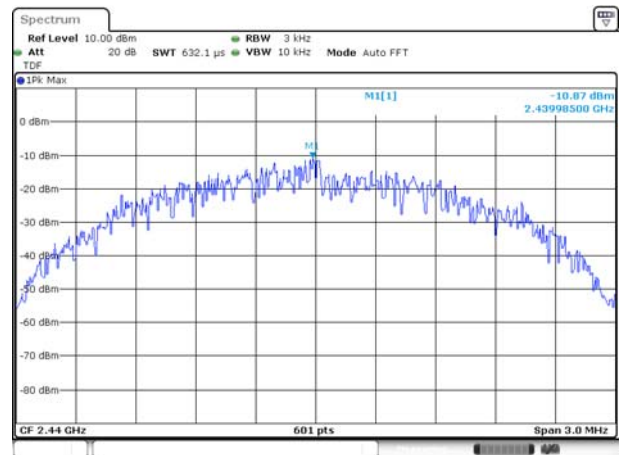

Date: 4 JUN 2019 21:10:57

GFSK (BLE) -2 Mbps HIGH CHANNEL

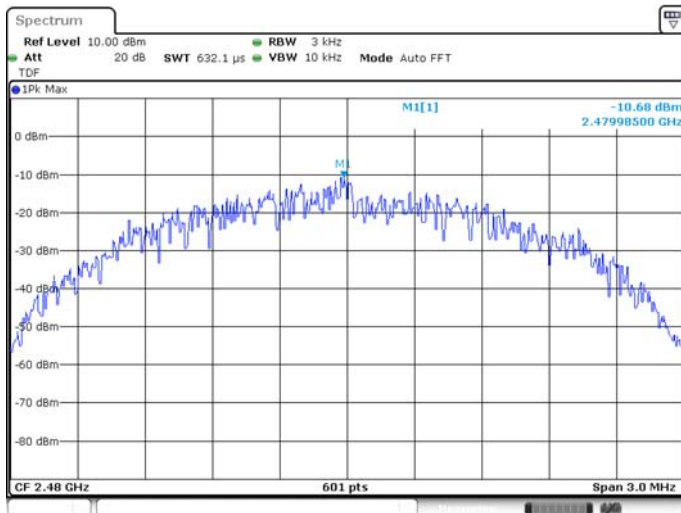

Date: 4 JUN 2019 21:11:37

ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ19C0646-AR.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ19C0646-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ19C0646-AI.PDF".

--END OF REPORT--