


ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-214-RWD-020
Reception No. : 2103001384
Applicant : AMOSENSE
Address : 19-1BL, 90, 4Sandan 5 gil, Jiksan-eup, Cheonan-Si, Chungcheongnam-Do, South Korea
Manufacturer : AMOSENSE
Address : 19-1BL, 90, 4Sandan 5 gil, Jiksan-eup, Cheonan-Si, Chungcheongnam-Do, South Korea
Type of Equipment : MUSE-R
FCC ID. : 2AS9T-SB12-SO
Model Name : SB12
Multiple Model Name : N/A
Serial number : N/A
Total page of Report : 38 pages (including this page)
Date of Incoming : April 01, 2021
Date of issue : April 08, 2021

SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*
 This test report only contains the result of a single test of the sample supplied for the examination.
 It is not a generally valid assessment of the features of the respective products of the mass-production.



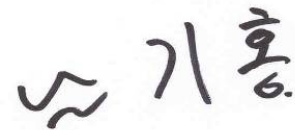

Tested by
 Hyung-Kwon, Oh / Manager
 ONETECH Corp.

Reviewed by
 Tae-Ho, Kim / Senior Manager
 ONETECH Corp.

Approved by
 Ki-Hong, Nam / General Manager
 ONETECH Corp.

CONTENTS**PAGE**

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY.....	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	7
4. EUT MODIFICATIONS.....	7
5.1 JUSTIFICATION.....	8
5.2 PERIPHERAL EQUIPMENT	8
5.3 MODE OF OPERATION DURING THE TEST	8
- CHANNEL LIST.....	10
5.4 CONFIGURATION OF TEST SYSTEM.....	12
6. PRELIMINARY TEST	12
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	12
6.2 GENERAL RADIATED EMISSIONS TESTS	12
7. MINIMUM 6 DB BANDWIDTH.....	13
7.1 OPERATING ENVIRONMENT	13
7.2 TEST SET-UP	13
7.3 TEST DATE	13
7.4 TEST DATA.....	14
8. MAXIMUM PEAK OUTPUT POWER.....	16
8.1 OPERATING ENVIRONMENT	16
8.2 TEST SET-UP	16
8.3 TEST DATE	16
8.4 TEST DATA.....	17
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	19
9.1 OPERATING ENVIRONMENT	19

9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	19
9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	19
9.4 TEST DATE	20
9.5 TEST DATA FOR CONDUCTED EMISSION	21
9.6 TEST DATA FOR RADIATED EMISSION	26
9.6.1 Radiated Emission which fall in the Restricted Band.....	26
9.6.2 Spurious & Harmonic Radiated Emission.....	27
10. PEAK POWER SPECTRAL DENSITY	28
10.1 OPERATING ENVIRONMENT	28
10.2 TEST SET-UP	28
10.3 TEST DATE	28
10.4 TEST DATA.....	29
11. RADIATED EMISSION TEST	31
11.1 OPERATING ENVIRONMENT	31
11.2 TEST SET-UP	31
11.3 TEST DATE	32
11.4 TEST DATA FOR 30 MHZ ~ 1 000 MHZ	33
11.5 TEST DATA FOR BELOW 30 MHZ	34
11.6 TEST DATA FOR ABOVE 1 GHZ	34
12. CONDUCTED EMISSION TEST.....	35
12.1 OPERATING ENVIRONMENT	35
12.2 TEST SET-UP	35
12.3 TEST DATE	35
12.4 TEST DATA.....	36
13. LIST OF TEST EQUIPMENT	38

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-214-RWD-020	April 08, 2021	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : AMOSENSE
 Address : 19-1BL, 90, 4Sandan 5 gil, Jiksan-eup, Cheonan-Si, Chungcheongnam-Do, South Korea
 Manufacturer : AMOSENSE
 Address : 19-1BL, 90, 4Sandan 5 gil, Jiksan-eup, Cheonan-Si, Chungcheongnam-Do, South Korea
 Contact Person : Taik Jin, Yang / Principal engineer
 Telephone No. : +82-10-3795-4037
 FCC ID : 2AS9T-SB12-SO
 Model Name : SB12
 Brand Name : -
 Serial Number : N/A
 Date : April 08, 2021

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	MUSE-R
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2020
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2020. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The AMOSENSE, Model SB12 (referred to as the EUT in this report) is an MUSE-R, Product specification information described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	MUSE-R	
Temperature Range	-20 °C ~ 50 °C	
OPERATING FREQUENCY	Sig Fox	902.137 5 MHz ~ 904.662 5 MHz
	Bluetooth LE	2 402 MHz ~ 2 480 MHz
MODULATION TYPE	Sig Fox	DBPSK
	Bluetooth LE	GFSK
RF OUTPUT POWER'	Sig Fox	22.55 dBm
	Bluetooth LE	-1.01 dBm
ANTENNA TYPE	Sig Fox: Chip + Metal Antenna Bluetooth LE: Chip Antenna	
ANTENNA GAIN	Sig Fox: 0.57 dBi Bluetooth LE: -0.02 dBi	
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	32.768 kHz, 32 MHz, 50 MHz	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	AMONSENSE	MUSE R Rev 2.1	N/A
Battery	N/A	N/A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
SB12	AMONSENSE	MUSE-R(EUT)	-
N/A	N/A	Jig Board	EUT
G6-1121TU	HP	Notebook PC	-
PPP009C	LIE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	AC Adapter	-

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 440 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XZ” axis, but the worst data was recorded in this report.


- Duty Cycle

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Bluetooth LE	0.386	0.240	61.66	2.10

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : 10 * Log(1 / (Duty Cycle / 100))

- Test Plot

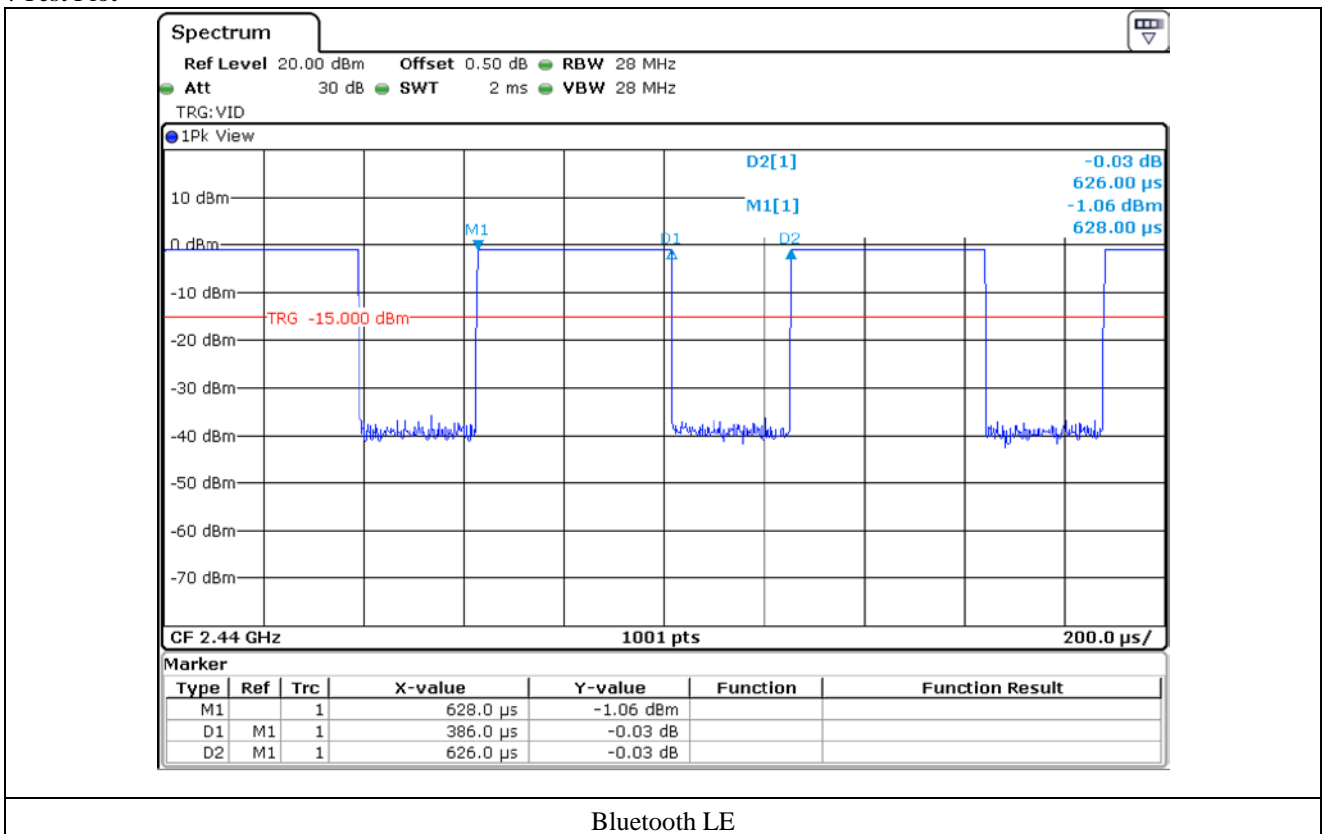

-. Channel List

Sig Fox					
Channel	Frequency [MHz]	Channel	Frequency [MHz]	Channel	Frequency [MHz]
0	902.137 5	1	902.162 5	2	902.1875
3	902.212 5	4	902.237 5	5	902.2625
6	902.437 5	7	902.462 5	8	902.4875
9	902.512 5	10	902.537 5	11	902.5625
12	902.737 5	13	902.762 5	14	902.7875
15	902.812 5	16	902.837 5	17	902.8625
18	903.037 5	19	903.062 5	20	903.0875
21	903.112 5	22	903.137 5	23	903.1625
24	903.337 5	25	903.362 5	26	903.3875
27	903.412 5	28	903.437 5	29	903.4625
30	903.637 5	31	903.662 5	32	903.6875
33	903.712 5	34	903.737 5	35	903.7625
36	903.937 5	37	903.962 5	38	903.9875
39	904.012 5	40	904.037 5	41	904.0625
42	904.237 5	43	904.262 5	44	904.2875
45	904.312 5	46	904.337 5	47	904.3625
48	904.537 5	49	904.562 5	50	904.5875
51	904.612 5	52	904.637 5	53	904.6625

Bluetooth LE			
Channel	Frequency [MHz]	Channel	Frequency [MHz]
0	2 402.00	21	2 444.00
1	2 404.00	22	2 446.00
2	2 406.00	23	2 448.00
3	2 408.00	24	2 450.00
4	2 410.00	25	2 452.00
5	2 412.00	26	2 454.00
6	2 414.00	27	2 456.00
7	2 416.00	28	2 458.00
8	2 418.00	29	2 460.00
9	2 420.00	30	2 462.00
10	2 422.00	31	2 464.00
11	2 424.00	32	2 466.00
12	2 426.00	33	2 468.00
13	2 428.00	34	2 470.00
14	2 430.00	35	2 472.00
15	2 432.00	36	2 474.00
16	2 434.00	37	2 476.00
17	2 436.00	38	2 478.00
18	2 438.00	39	2 480.00
19	2 440.00	-	-
20	2 442.00	-	-

5.4 Configuration of Test System

Line Conducted Test: The EUT was tested in a Charging & Transmitting mode. The EUT was connected to USB and the Power of USB was Connected to DC Adaptor. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.
The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Charging & Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
 Relative humidity : 46 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

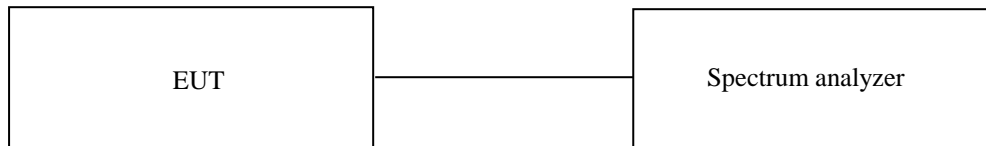


7.3 Test Date


April 01, 2021 ~ April 06, 2021

7.4 Test data


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2 402.00	679.30	500.00	179.30
Middle	2 440.00	704.30	500.00	204.30
High	2 480.00	694.30	500.00	194.30

Remark. Margin = Measured Value - Limit

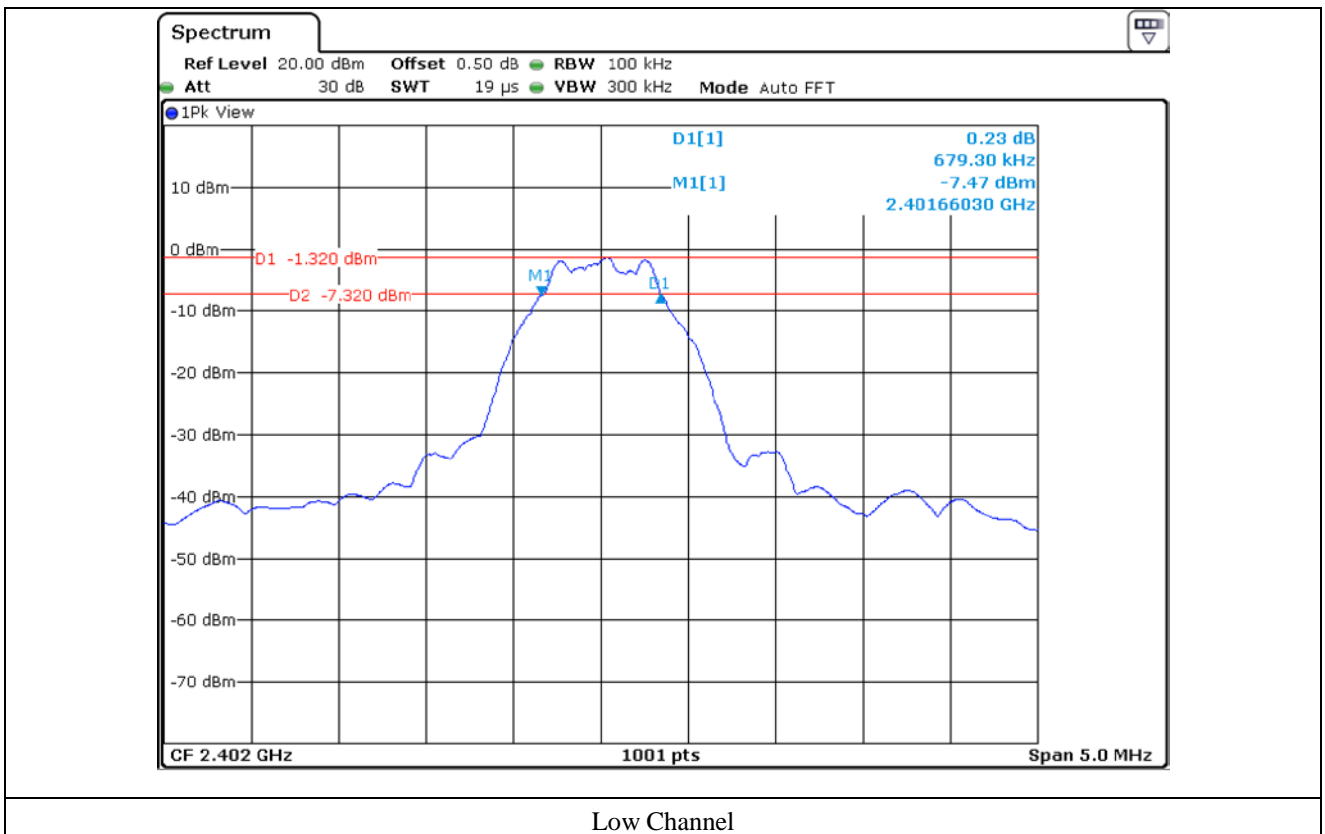

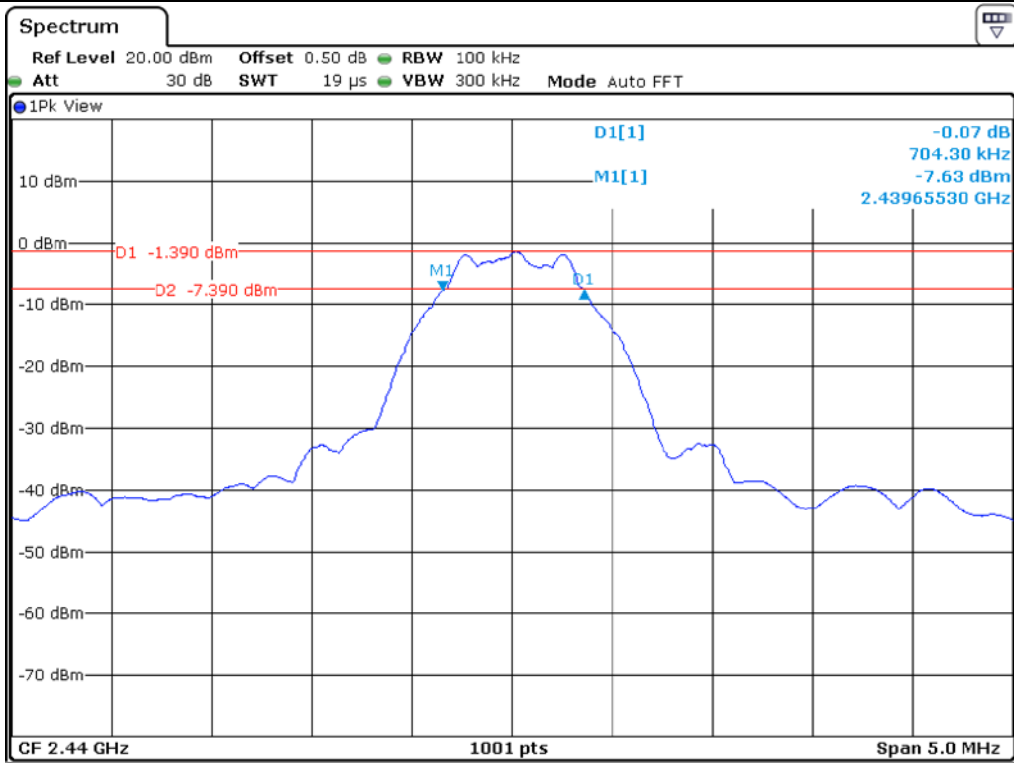

Middle Channel

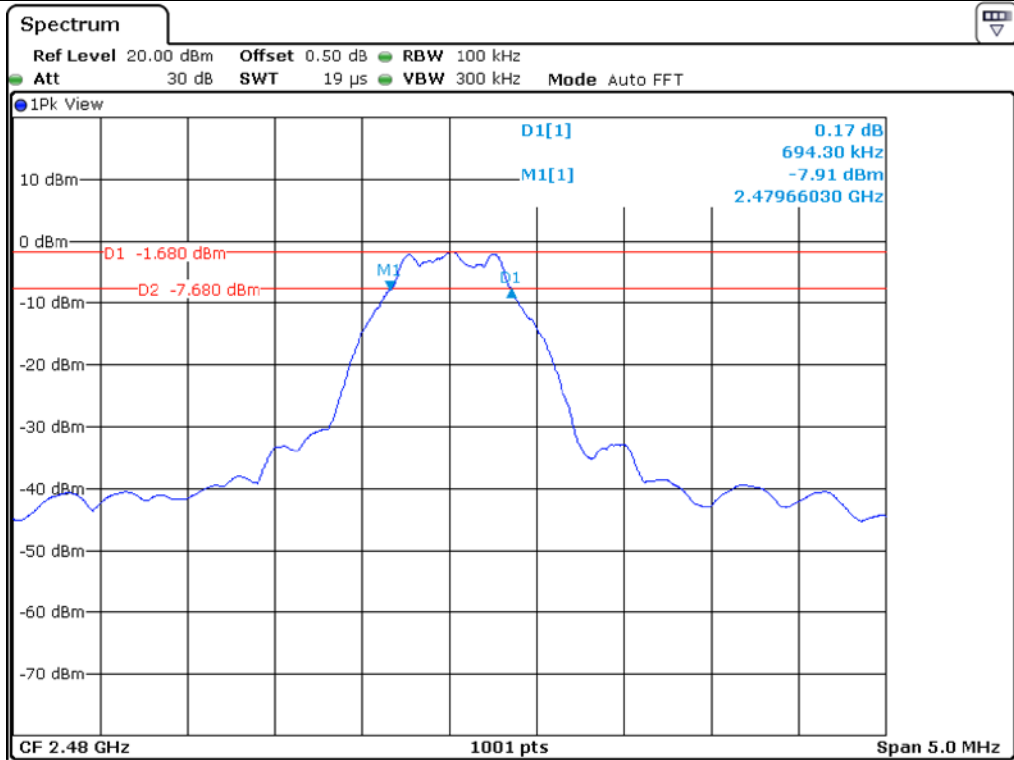

High Channel

8. MAXIMUM PEAK OUTPUT POWER


8.1 Operating environment

Temperature : 23 °C
 Relative humidity : 46 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to \geq DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

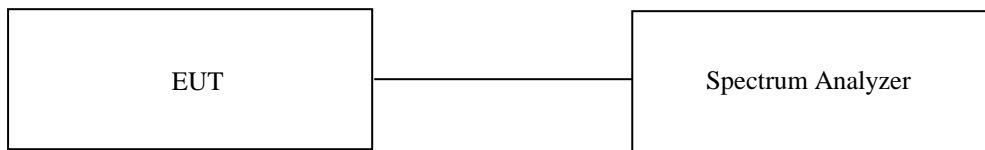

8.3 Test Date


April 01, 2021 ~ April 06, 2021

8.4 Test data


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	-1.06	30.00	31.06
MIDDLE	2 440.00	-1.01	30.00	31.01
HIGH	2 480.00	-1.34	30.00	31.34


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

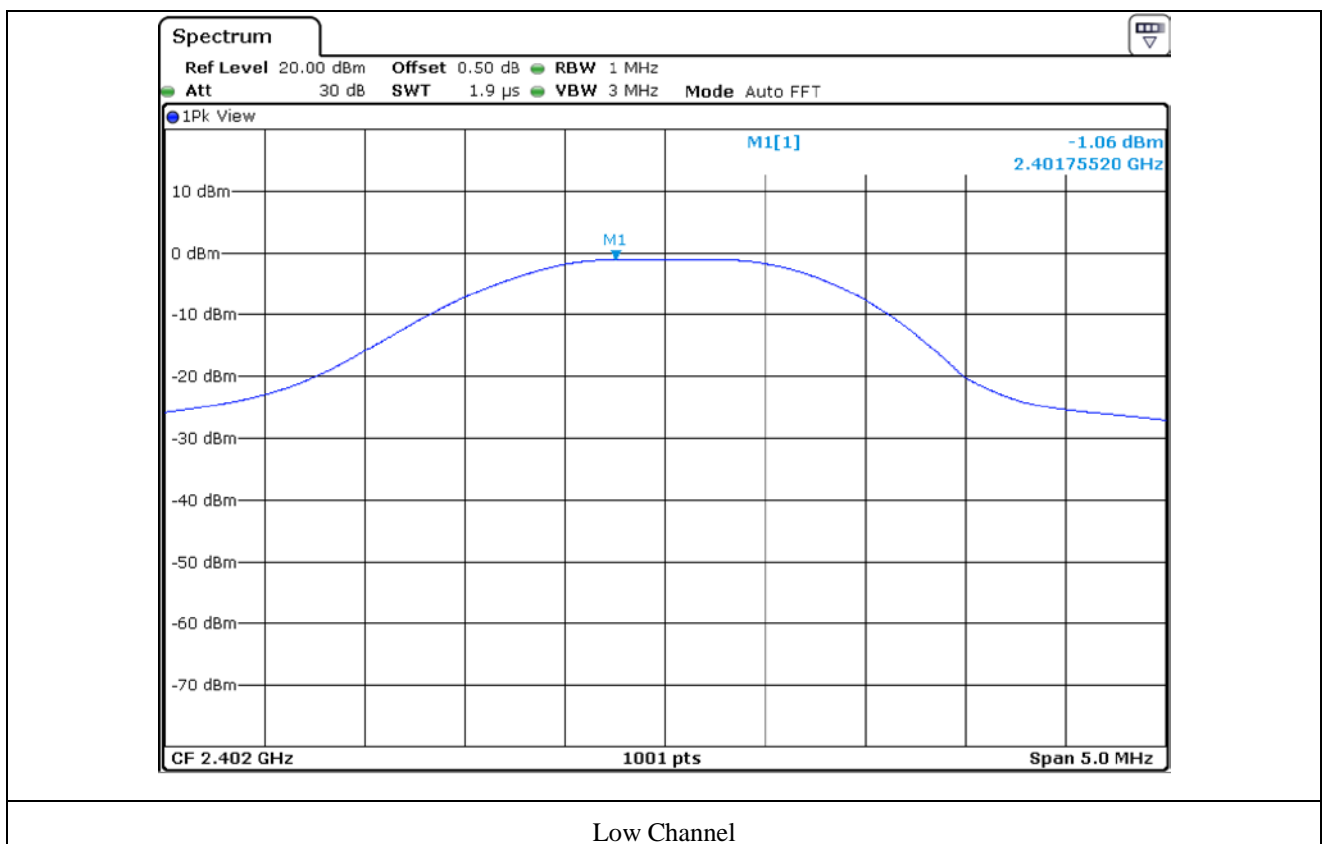

Low Channel

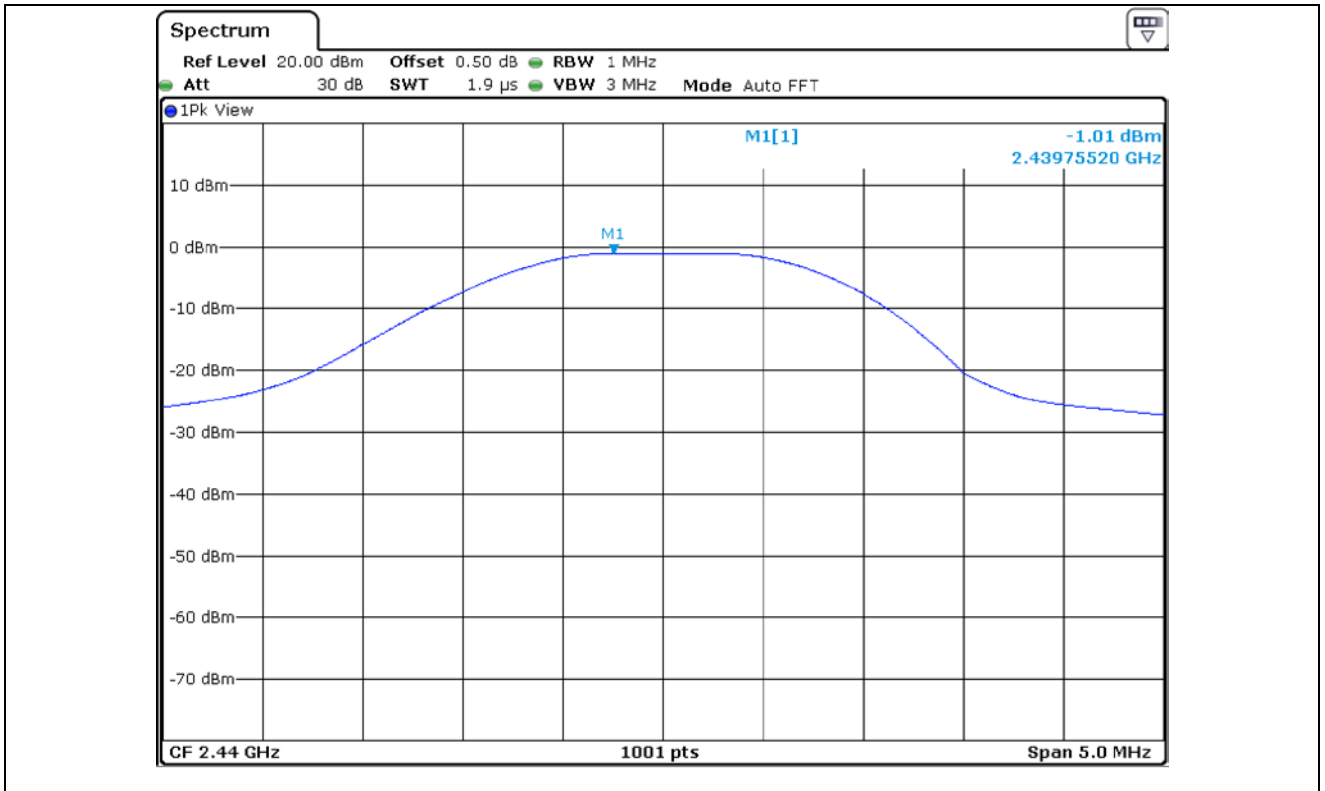

Middle Channel

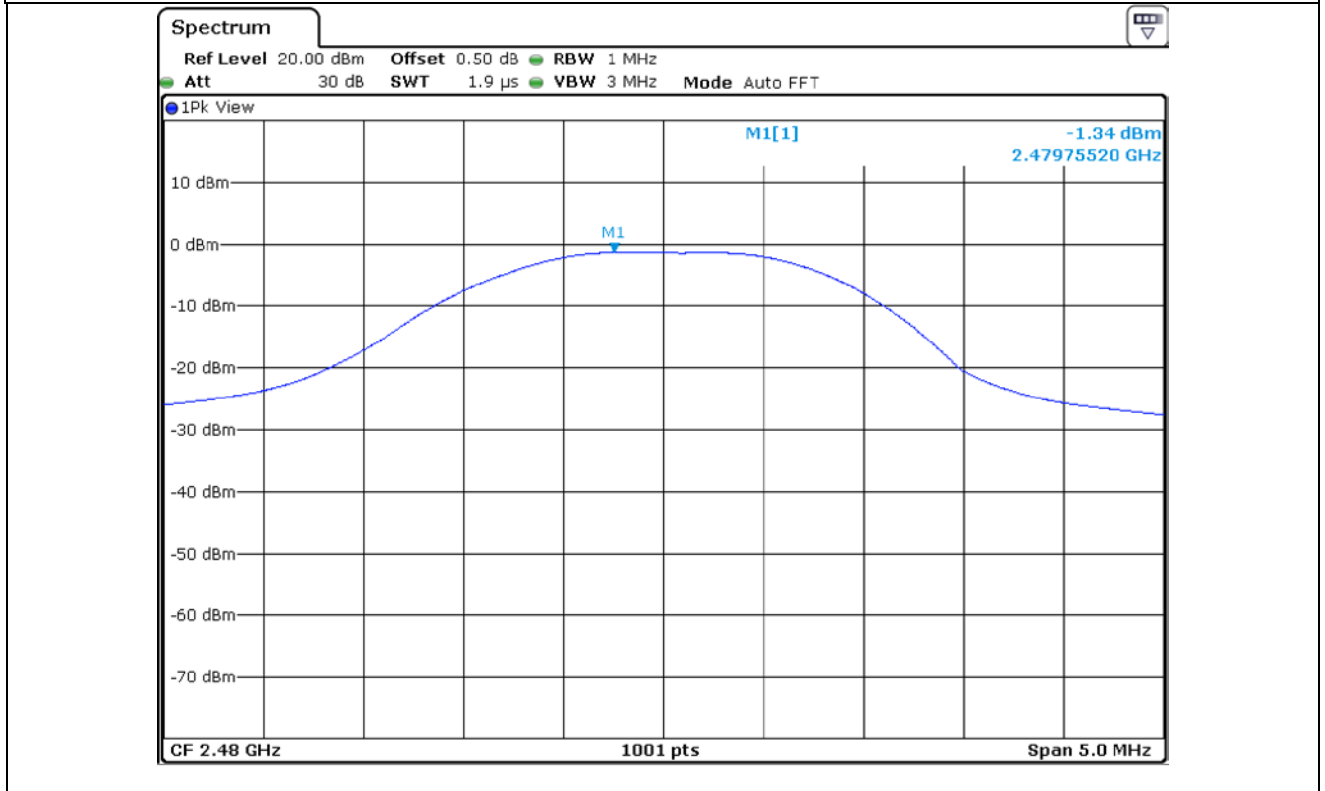

High Channel


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 23 °C
 Relative humidity : 46 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, the video bandwidth is set to 3 times the resolution bandwidth and peak detection was used.

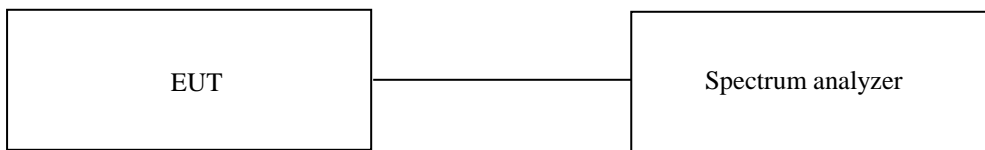


9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

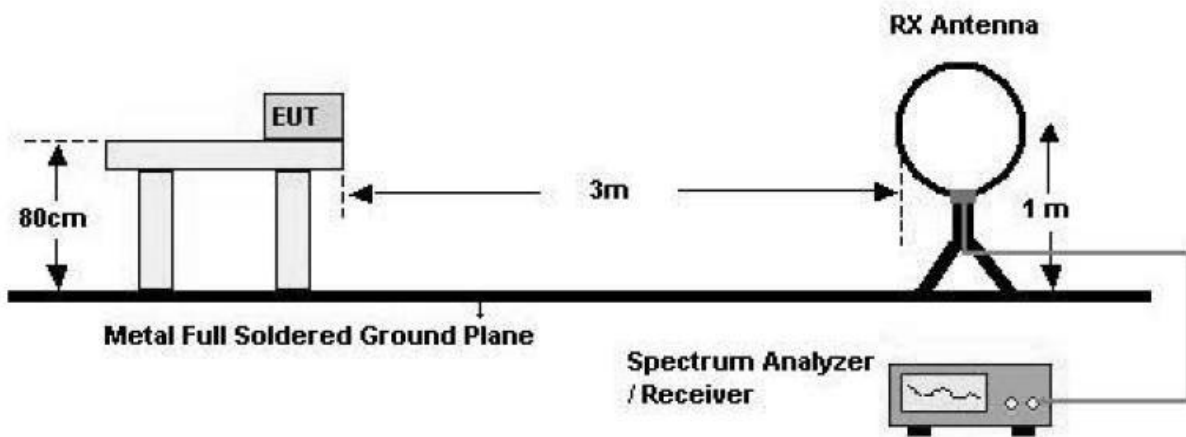

2. 30 MHz - 1 GHz

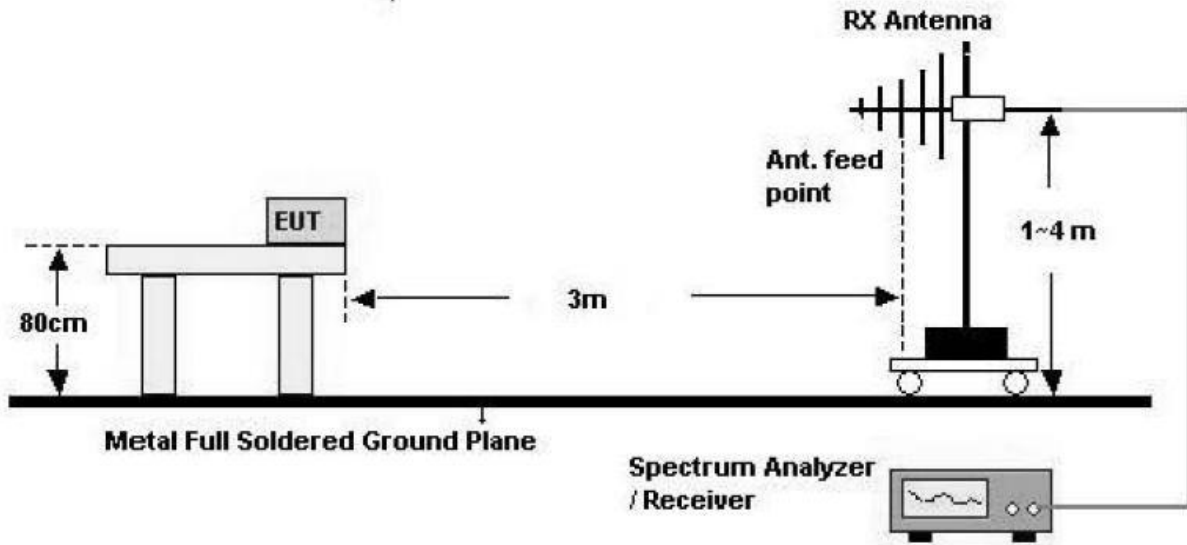


3. Above 1 GHz

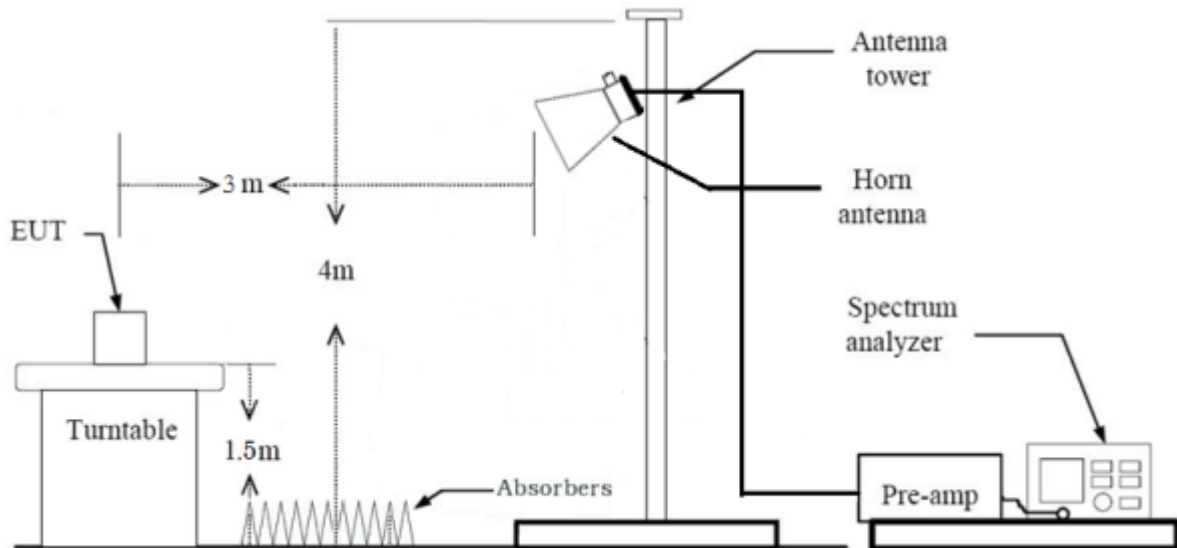


9.4 Test Date

April 01, 2021 ~ April 06, 2021


9.5 Test data for conducted emission

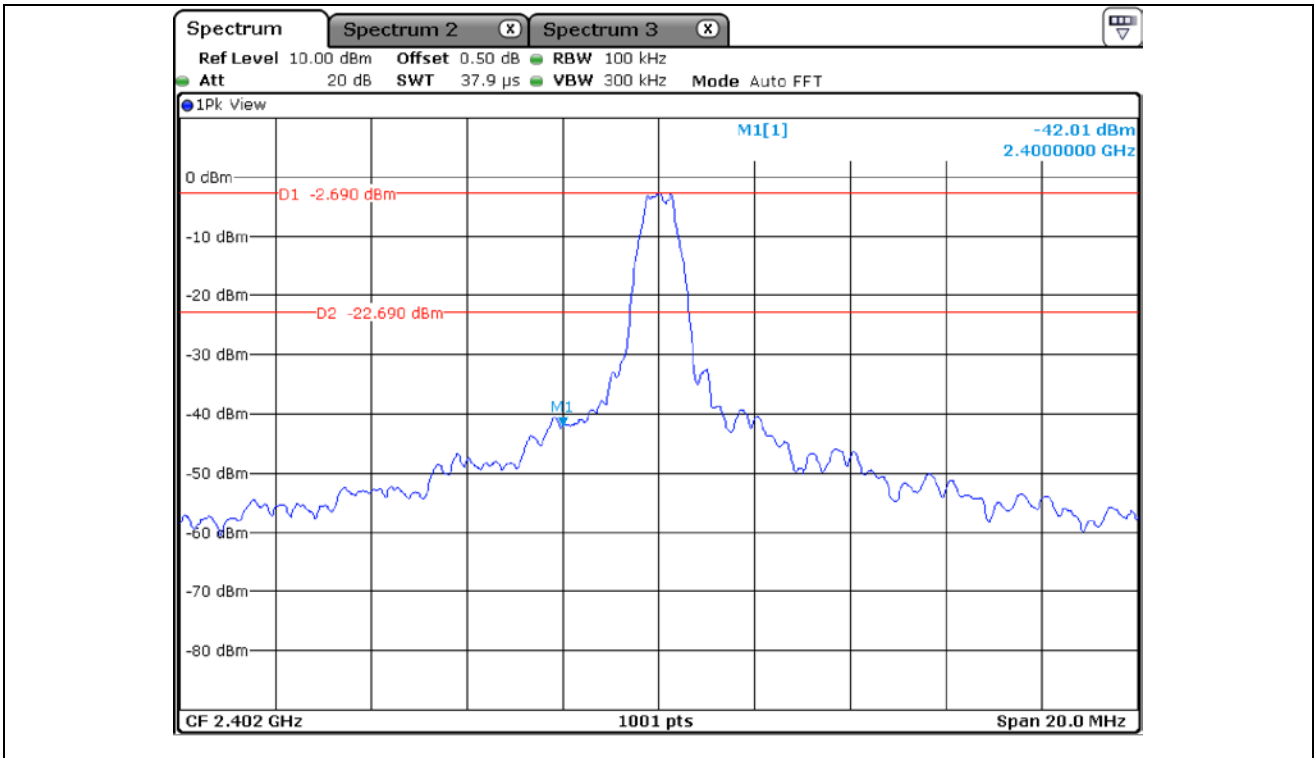


Low Channel

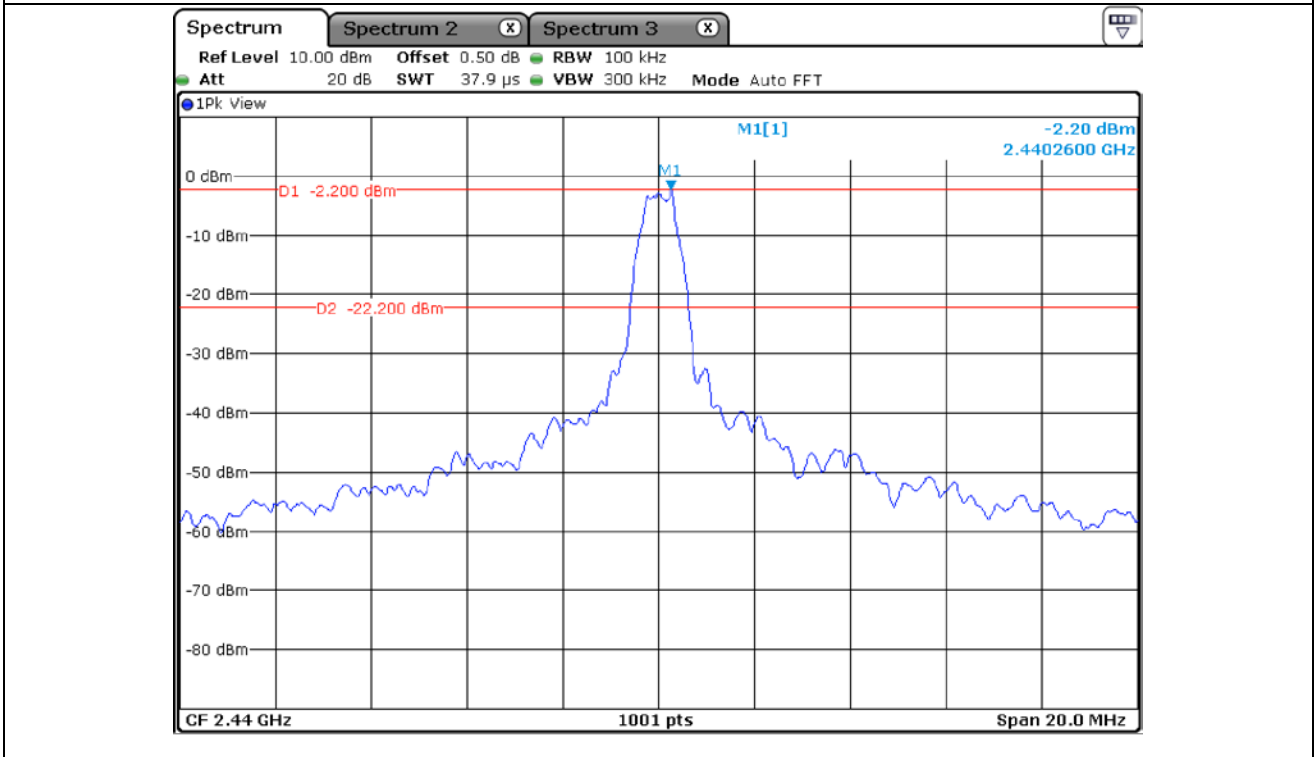


Middle Channel

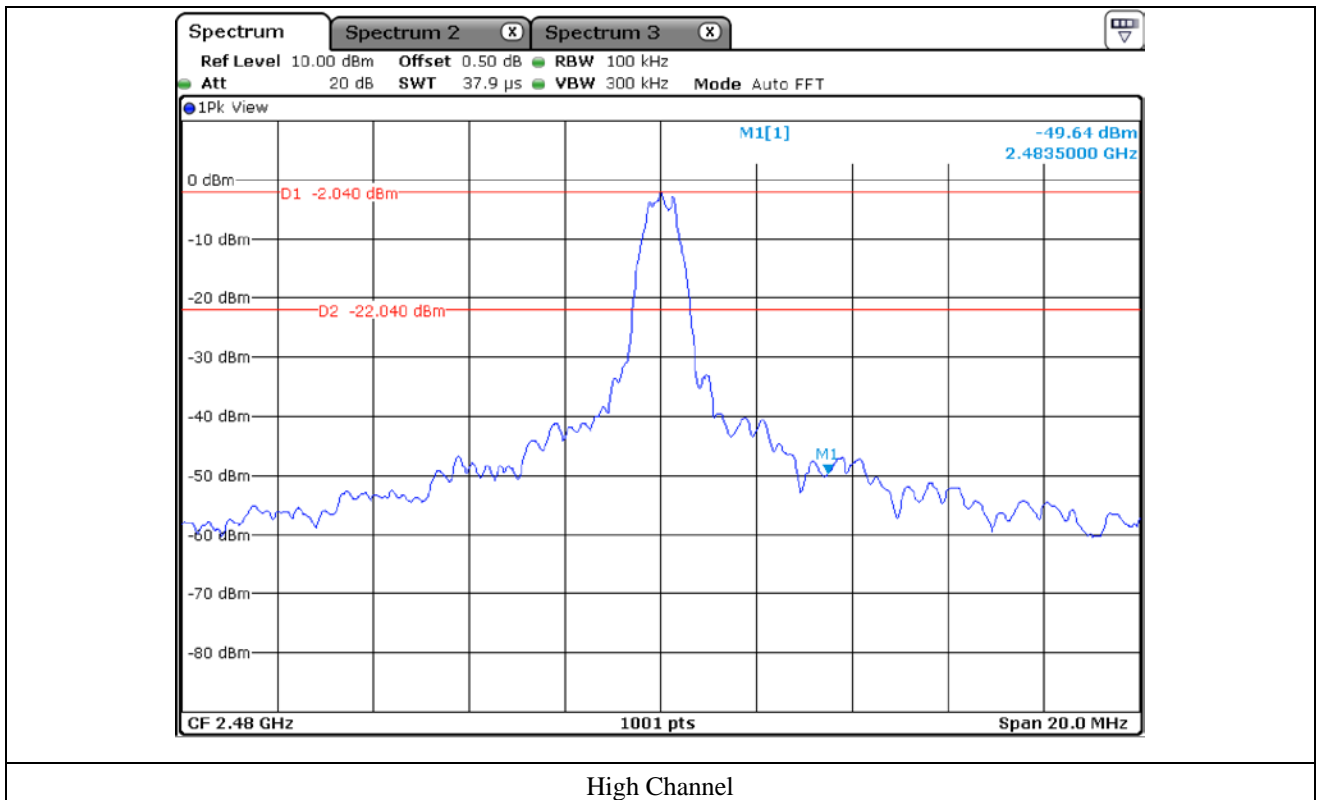


High Channel

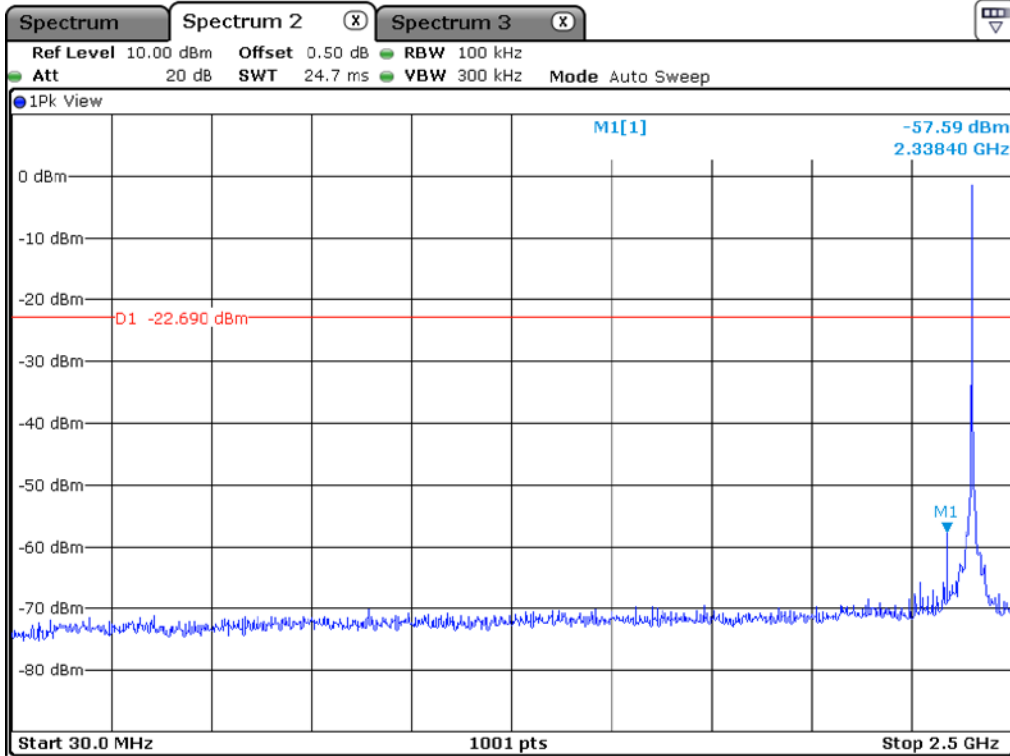


Low Channel

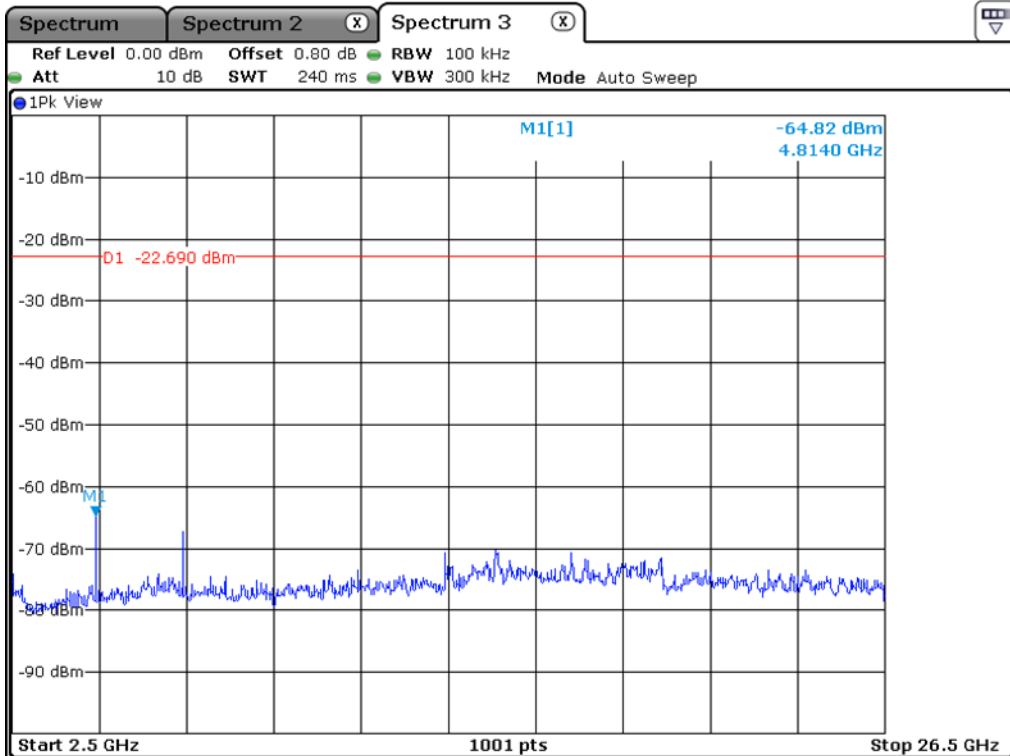


Low Channel

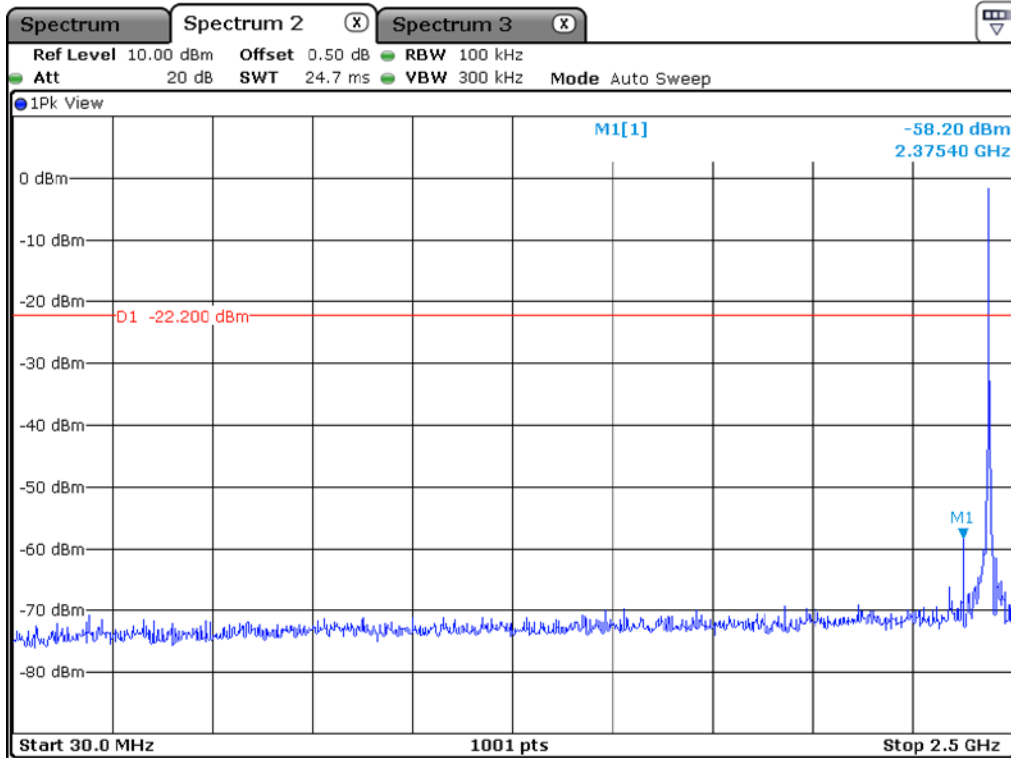


Middle Channel

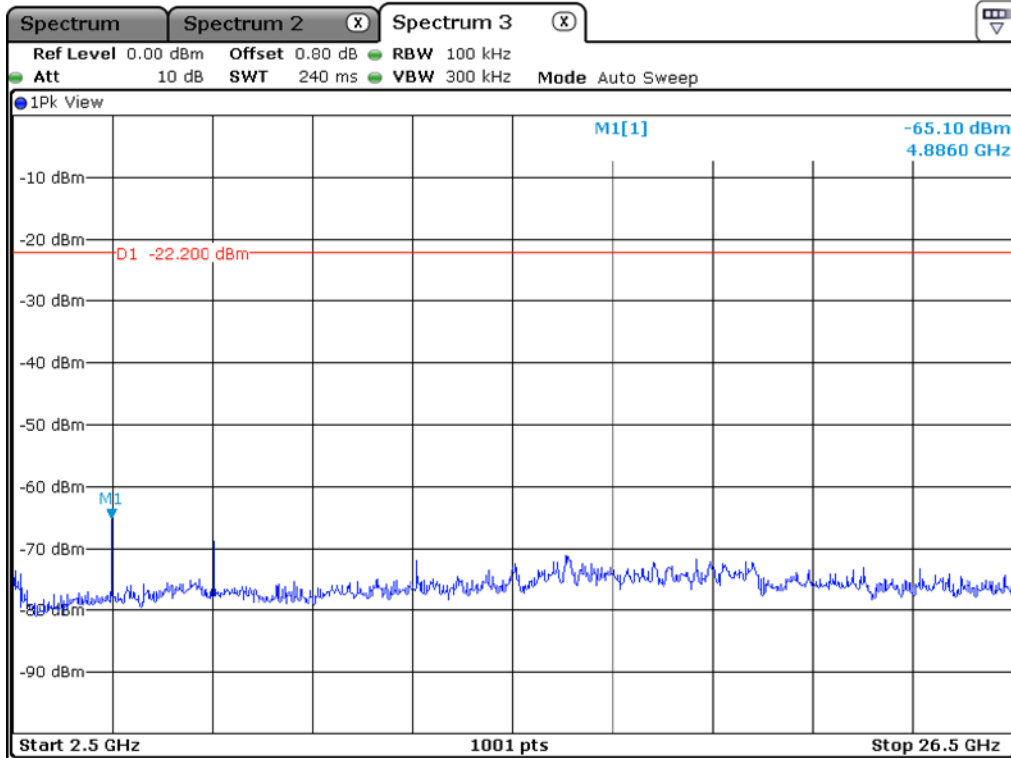

Middle Channel

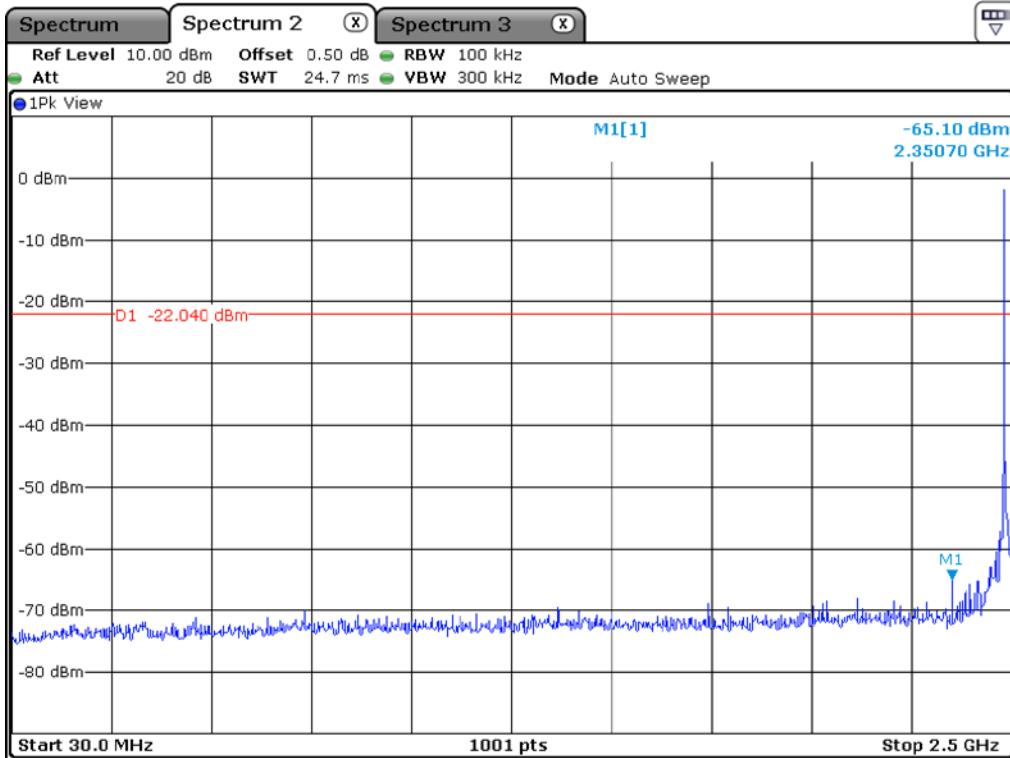

High Channel

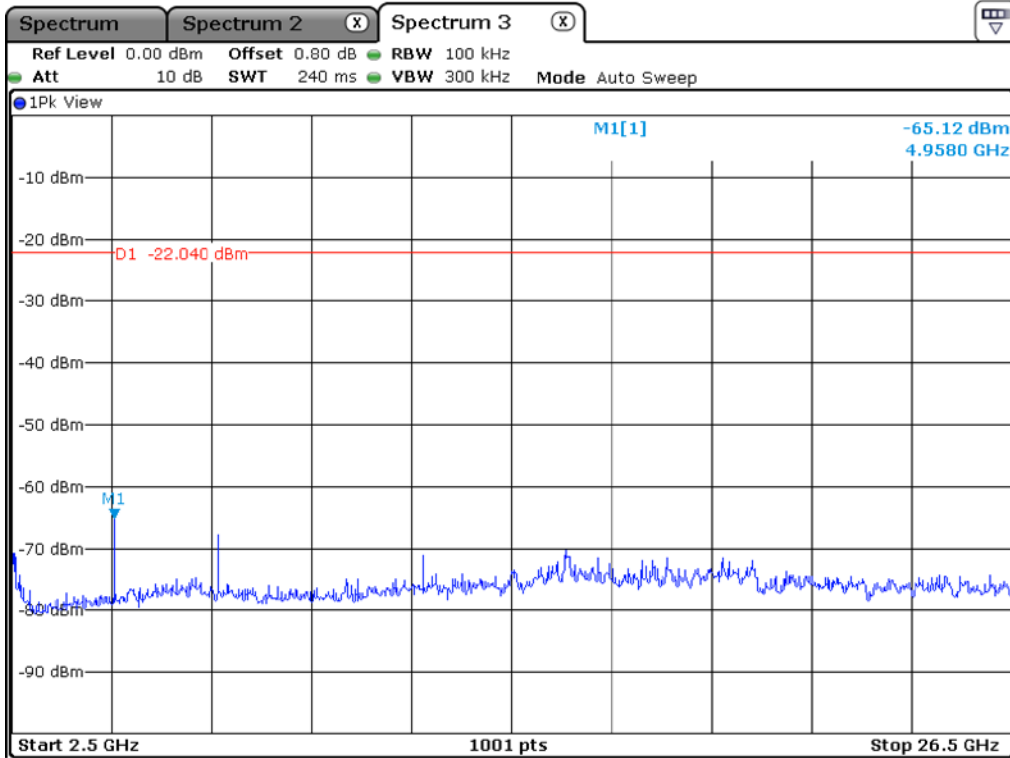

High Channel

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 61.66 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 387.150	20.24	Peak	H	28.00	5.41	-	53.65	74.00	20.35
2 388.760	9.80	Average	H			2.10	45.31	54.00	8.69
2 387.753	21.12	Peak	V			-	54.53	74.00	19.47
2 389.550	9.87	Average	V			2.10	45.38	54.00	8.62
Test Data for High Channel									
2 483.508	23.50	Peak	H	27.50	5.50	-	56.50	74.00	17.50
2 485.012	9.86	Average	H			2.10	44.96	54.00	9.04
2 483.508	25.14	Peak	V			-	58.14	74.00	15.86
2 483.508	9.78	Average	V			2.10	44.88	54.00	9.12

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

9.6.2 Spurious & Harmonic Radiated Emission

- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
1 MHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 61.66 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	18.53	Peak	H	31.30	7.48	-	57.31	74.00	16.69
4 804.00	6.56	Average	H			2.10	47.44	54.00	6.56
4 804.00	18.77	Peak	V			-	57.55	74.00	16.45
4 804.00	6.71	Average	V			2.10	47.59	54.00	6.41
Test Data for Middle Channel									
4 880.00	18.56	Peak	H	31.20	7.72	-	57.48	74.00	16.52
4 880.00	6.17	Average	H			2.10	47.19	54.00	6.81
4 880.00	18.10	Peak	V			-	57.02	74.00	16.98
4 880.00	6.20	Average	V			2.10	47.22	54.00	6.78
Test Data for High Channel									
4 960.00	18.41	Peak	H	31.20	8.09	-	57.70	74.00	16.30
4 960.00	6.22	Average	H			2.10	47.61	54.00	6.39
4 960.00	18.09	Peak	V			-	57.38	74.00	16.62
4 960.00	6.24	Average	V			2.10	47.63	54.00	6.37

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

10. PEAK POWER SPECTRAL DENSITY


10.1 Operating environment

Temperature : 23 °C
 Relative humidity : 46 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

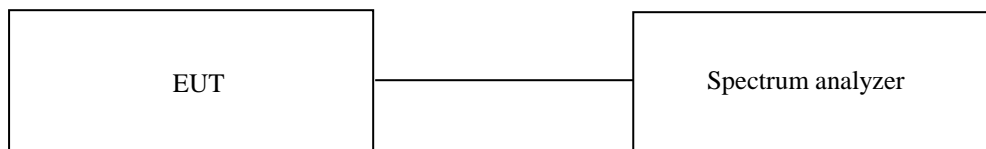

10.3 Test Date

April 01, 2021 ~ April 06, 2021


10.4 Test data

- Test Result : Pass


- Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402.00	-16.55	8.00	24.55
Middle	2 440.00	-16.26	8.00	24.26
High	2 480.00	-15.86	8.00	23.86


Remark. Margin = Limit – Measured value

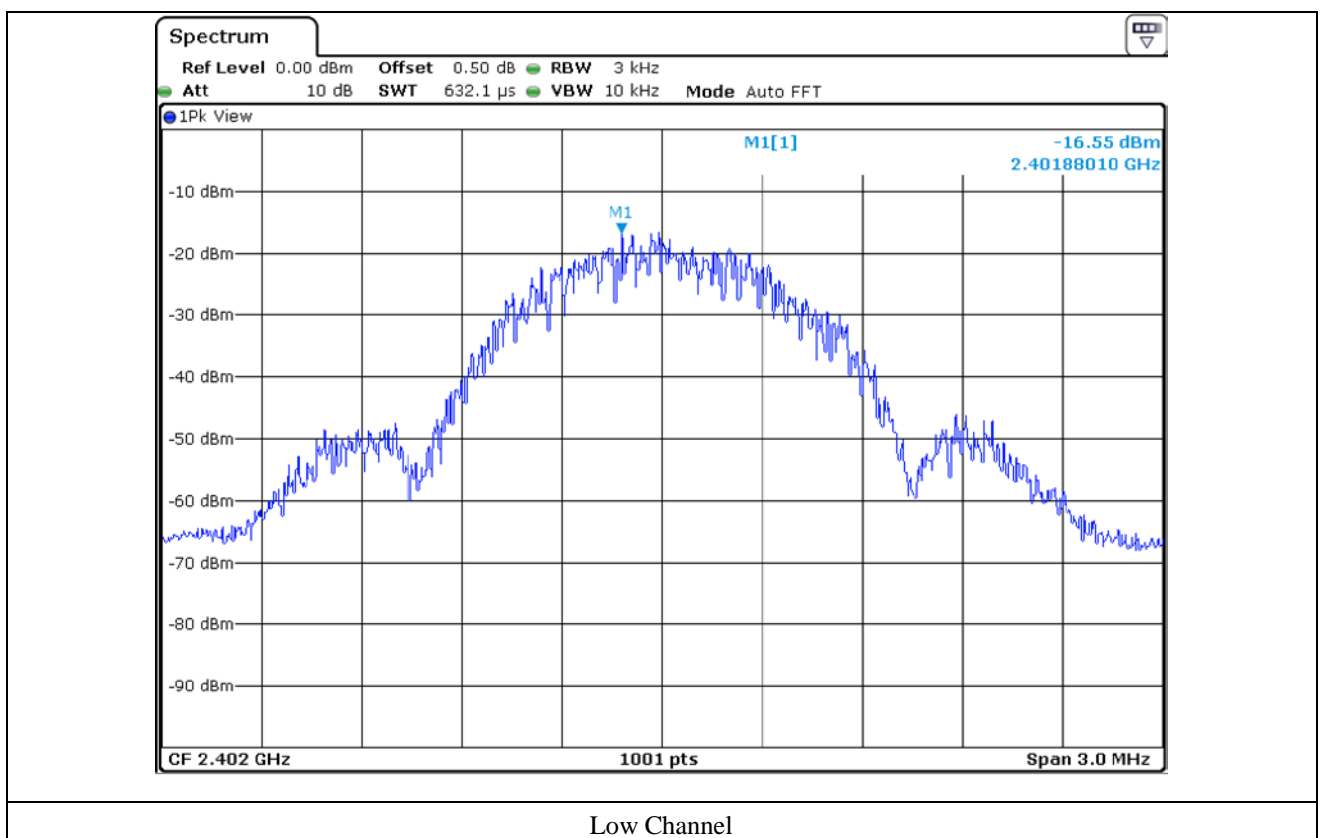

Low Channel

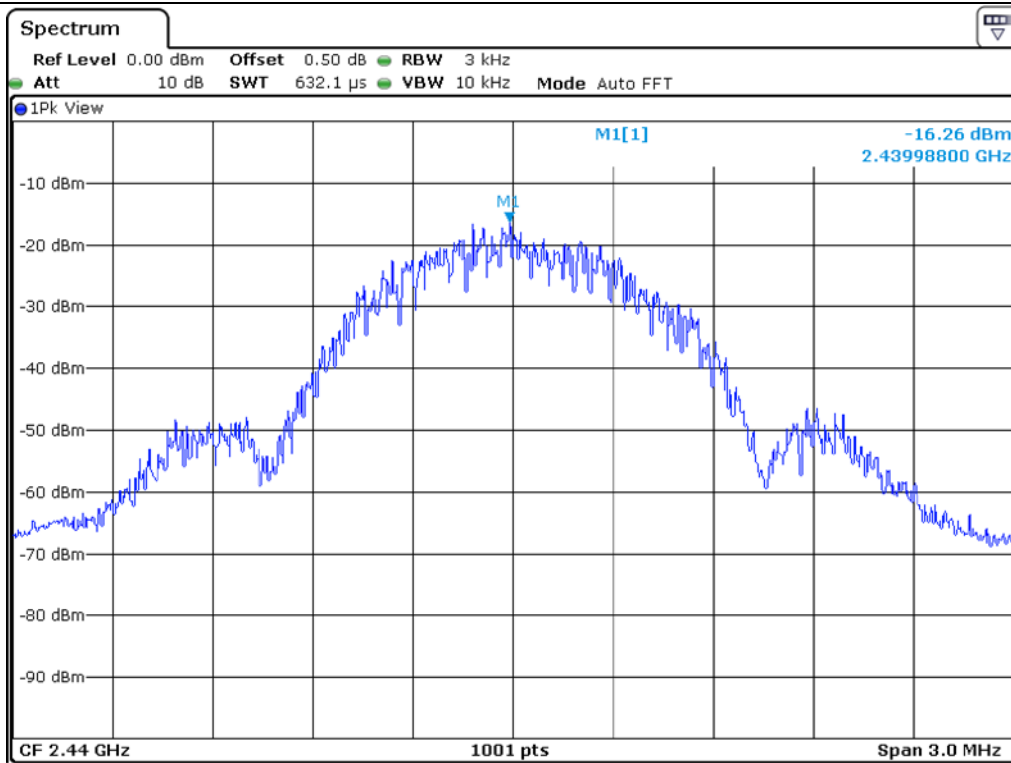

Middle Channel

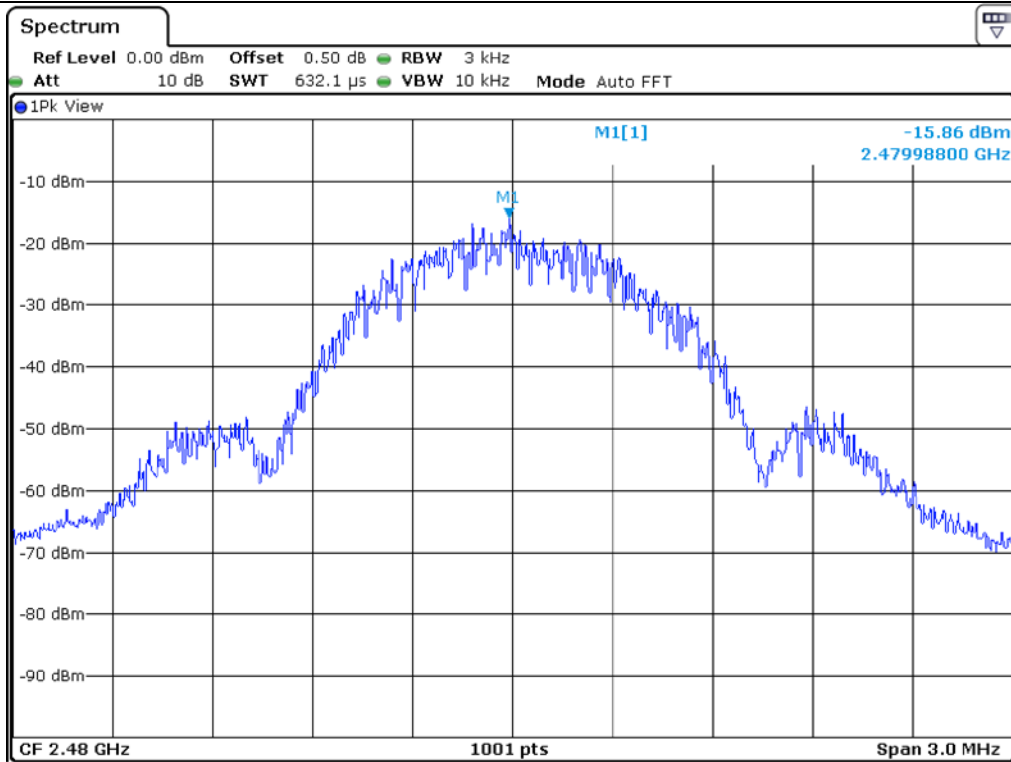

High Channel

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 23 °C
 Relative humidity : 46 % R.H.


11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

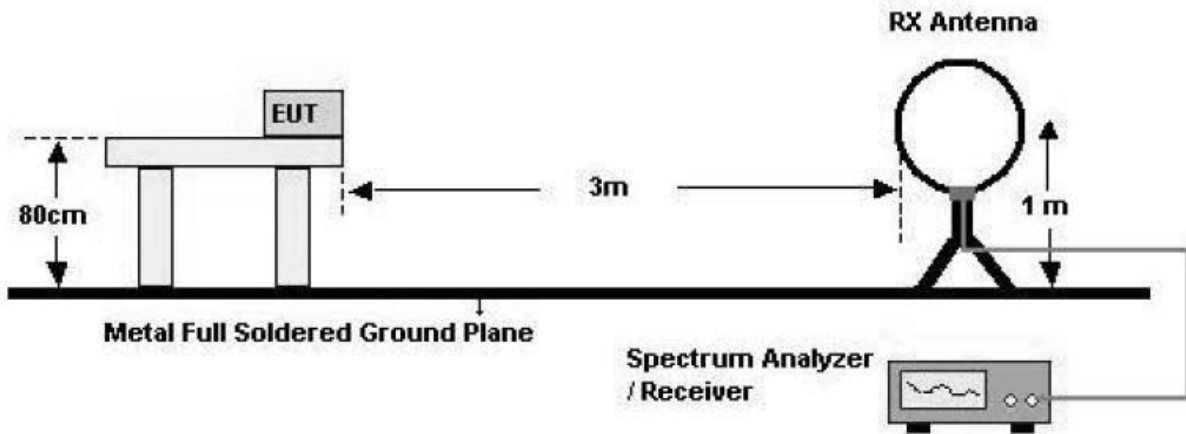

2. 30 MHz - 1 GHz

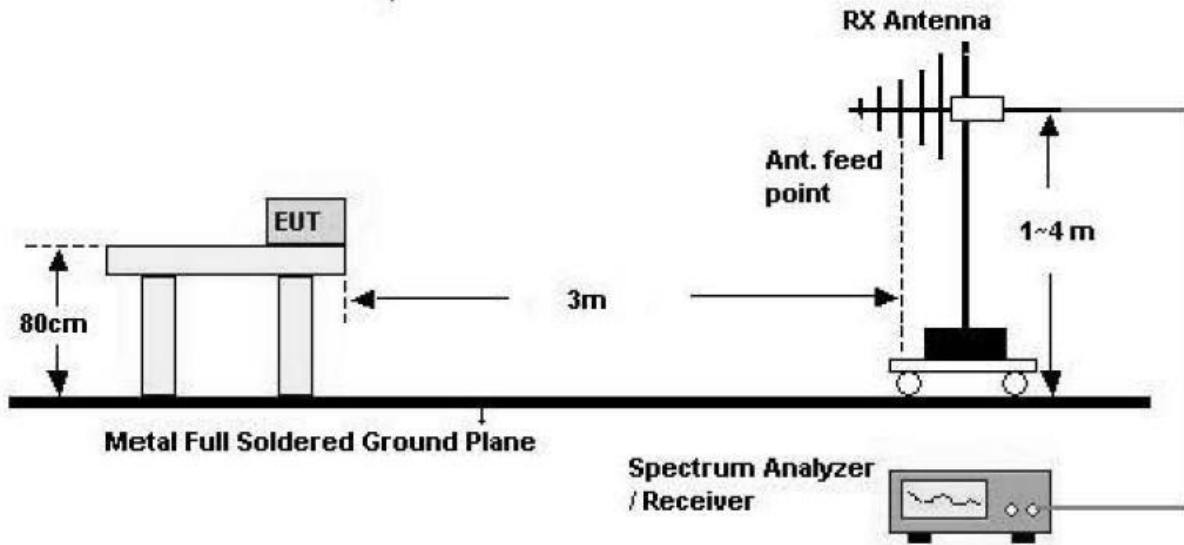

3. Above 1 GHz

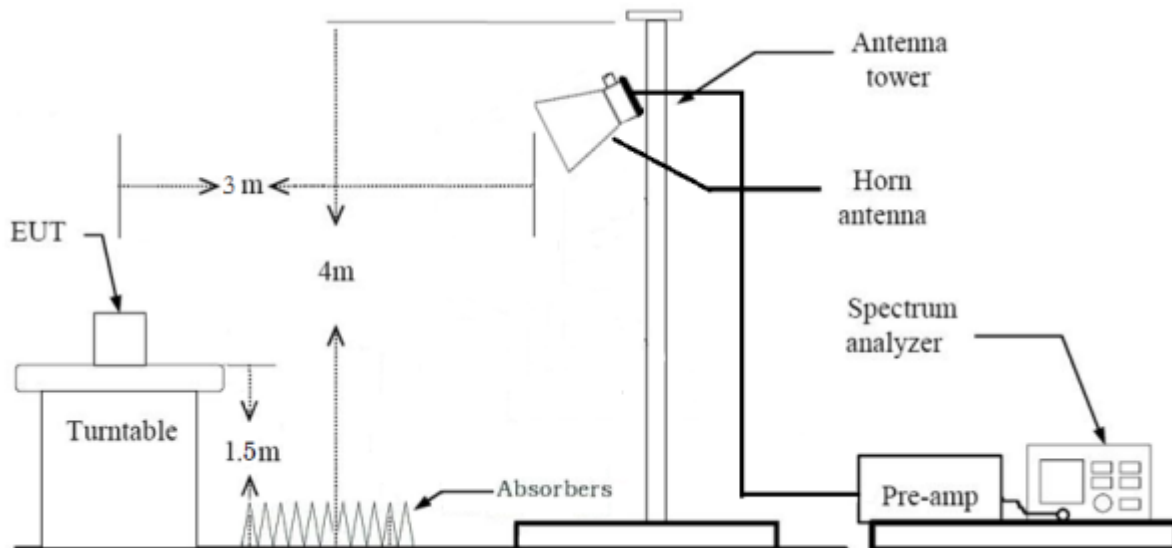

11.3 Test Date

April 01, 2021 ~ April 06, 2021


11.4 Test data for 30 MHz ~ 1 000 MHz

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : MUSE-R

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

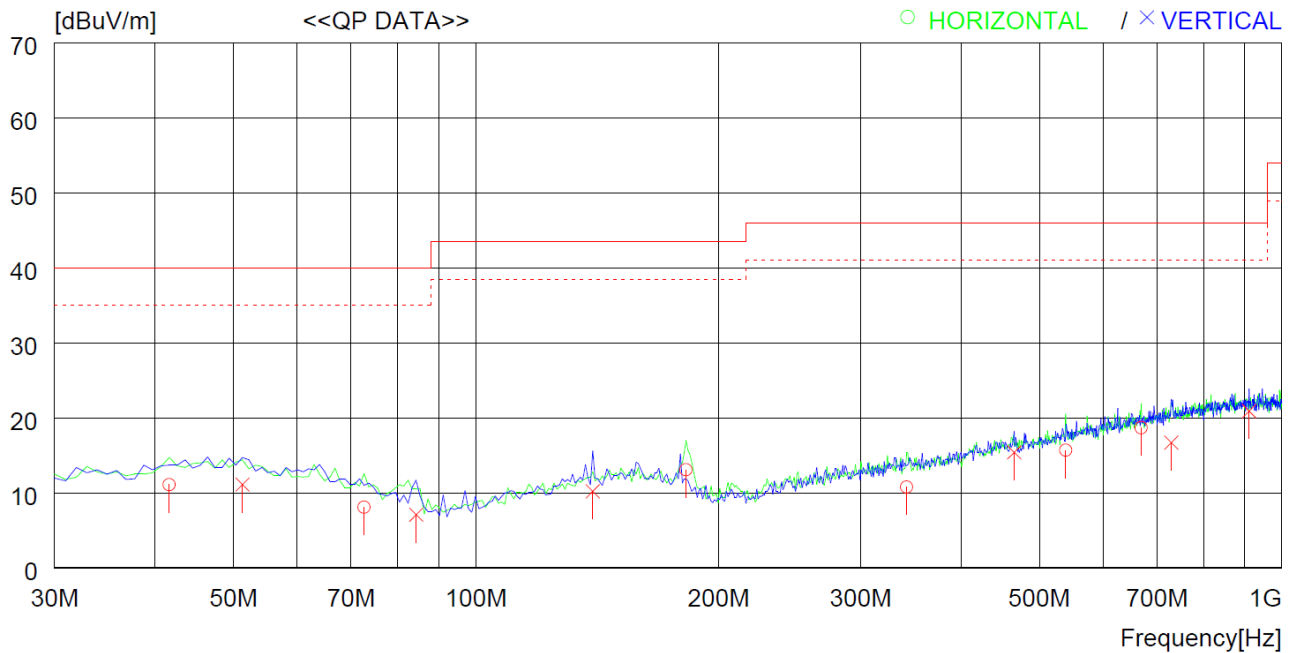

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	41.640	32.6	10.6	0.6	32.7	11.1	40.0	28.9	300	86
2	72.680	31.4	8.6	0.8	32.7	8.1	40.0	31.9	100	0
3	182.290	31.4	13.0	1.3	32.6	13.1	43.5	30.4	200	1
4	342.340	26.9	14.8	1.8	32.7	10.8	46.0	35.2	300	324
5	539.250	27.7	18.6	2.3	32.9	15.7	46.0	30.3	300	239
6	669.226	28.5	20.6	2.5	32.9	18.7	46.0	27.3	300	146
----- Vertical -----										
7	51.340	33.5	9.7	0.6	32.7	11.1	40.0	28.9	300	359
8	84.320	31.2	7.8	0.8	32.7	7.1	40.0	32.9	200	0
9	139.610	31.0	10.8	1.1	32.7	10.2	43.5	33.3	100	122
10	465.531	28.8	17.3	2.1	32.8	15.4	46.0	30.6	400	0
11	729.364	25.9	21.2	2.4	32.8	16.7	46.0	29.3	300	359
12	910.749	26.6	23.3	2.9	31.9	20.9	46.0	25.1	400	62

11.5 Test data for Below 30 MHz

- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

11.6 Test data for above 1 GHz

- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
1 MHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

12. CONDUCTED EMISSION TEST

12.1 Operating environment

Temperature : 23 °C
Relative humidity : 46 % R.H.

12.2 Test set-up


The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μ H + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

12.3 Test Date

April 01, 2021 ~ April 06, 2021

12.4 Test data


- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : LIVE LINE

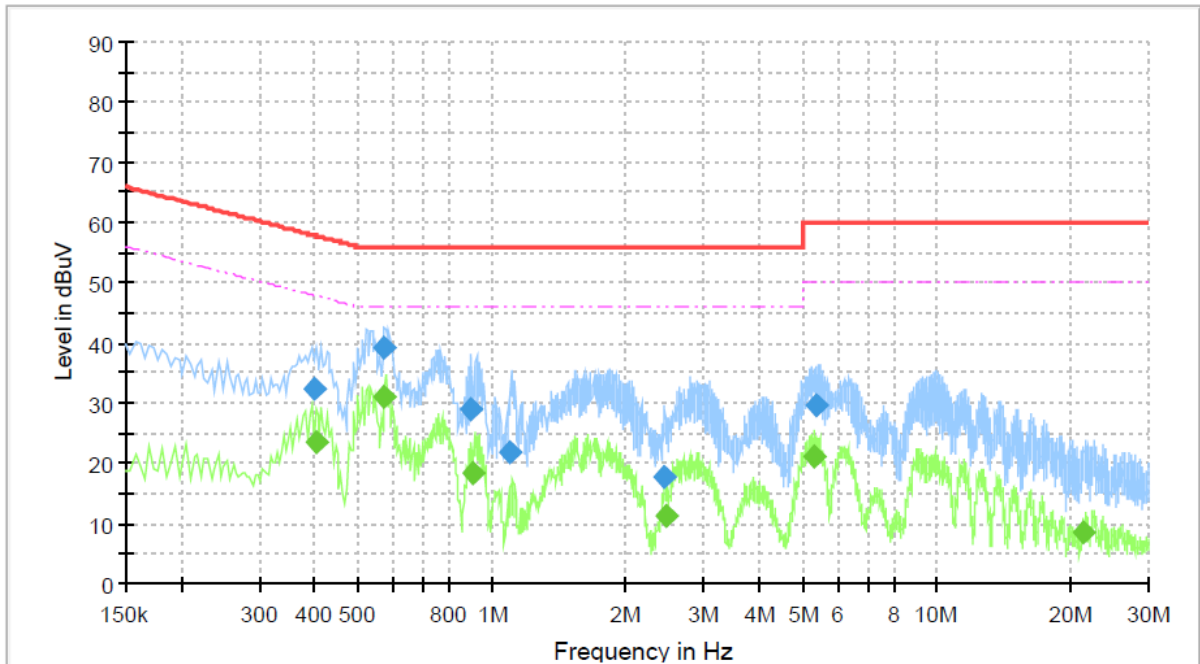

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.397	32.27	---	57.91	25.63	3000.0	9.0	N	9.94
0.405	---	23.65	47.74	24.09	3000.0	9.0	N	9.94
0.572	---	30.99	46.00	15.01	3000.0	9.0	N	9.95
0.572	39.19	---	56.00	16.81	3000.0	9.0	N	9.95
0.897	29.12	---	56.00	26.88	3000.0	9.0	N	9.97
0.905	---	18.42	46.00	27.58	3000.0	9.0	N	9.97
1.095	21.94	---	56.00	34.06	3000.0	9.0	N	9.99
2.450	17.69	---	56.00	38.31	3000.0	9.0	N	10.03
2.466	---	11.09	46.00	34.91	3000.0	9.0	N	10.03
5.309	---	21.14	50.00	28.86	3000.0	9.0	N	10.11
5.380	29.61	---	60.00	30.39	3000.0	9.0	N	10.11
21.358	---	8.61	50.00	41.39	3000.0	9.0	N	10.79

-. Tested Line : NEUTRAL LINE

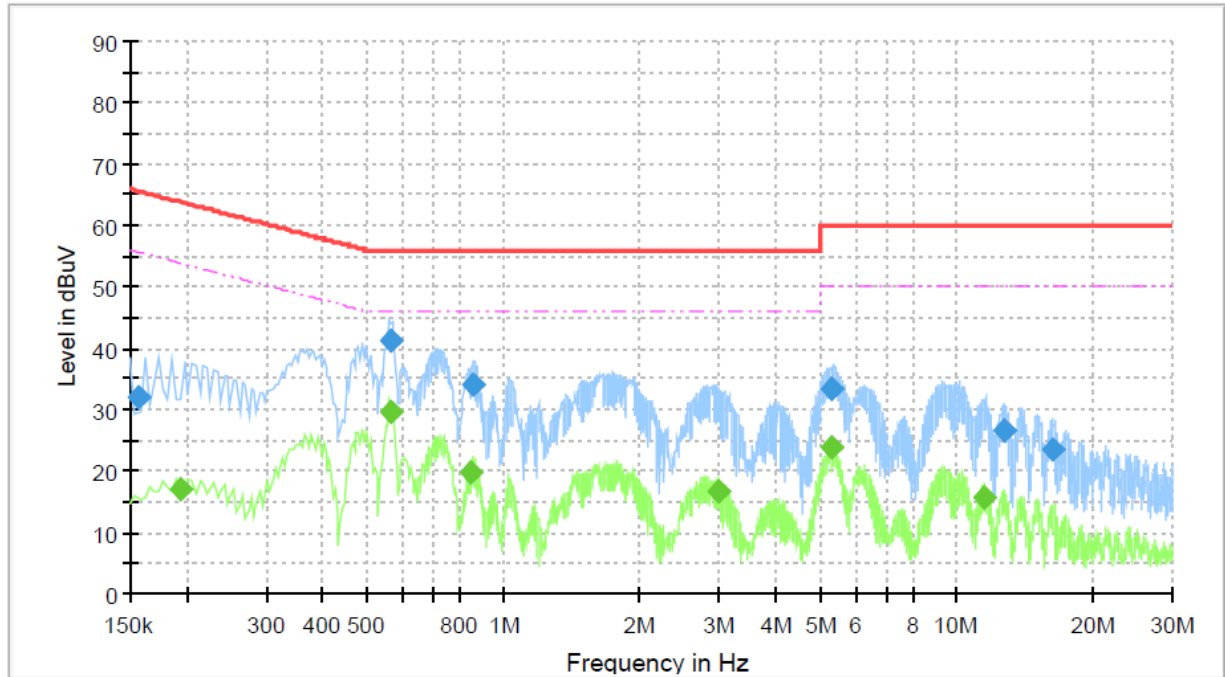

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.157	31.93	---	65.60	33.66	3000.0	9.0	L1	9.93
0.194	---	16.97	53.89	36.91	3000.0	9.0	L1	9.92
0.564	41.42	---	56.00	14.58	3000.0	9.0	L1	9.94
0.564	---	29.82	46.00	16.18	3000.0	9.0	L1	9.94
0.849	---	19.78	46.00	26.22	3000.0	9.0	L1	9.96
0.853	34.08	---	56.00	21.92	3000.0	9.0	L1	9.96
2.976	---	16.87	46.00	29.13	3000.0	9.0	L1	10.02
5.313	---	23.96	50.00	26.04	3000.0	9.0	L1	10.08
5.320	33.48	---	60.00	26.52	3000.0	9.0	L1	10.09
11.519	---	15.79	50.00	34.21	3000.0	9.0	L1	10.39
12.704	26.68	---	60.00	33.32	3000.0	9.0	L1	10.44
16.262	23.54	---	60.00	36.46	3000.0	9.0	L1	10.55

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

13. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	Signal Analyzer	101546	Jun. 24, 2020 (1Y)
ESW	Rohde & Schwarz	EMI Test Receiver	101851	Mar. 22, 2021 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	392756	Oct. 16, 2020 (1Y)
SCU18	Rohde & Schwarz	Signal Conditioning unit	102266	Jul. 15, 2020 (1Y)
SCU18	Rohde & Schwarz	Signal Conditioning unit	102266	Jul. 15, 2020 (1Y)
SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Feb. 08, 2021 (1Y)
DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
CO3000	Innco Systems GmbH	Controller	N/A	N/A
VULB9168	Schwarzbeck	Hybrid Antenna	01088	Dec. 09, 2019 (2Y)
AH-118	Com-Power	Horn Antenna	10050061	Oct. 15, 2020 (1Y)
VULB9163	Schwarzbeck	TRILOG Broadband Antenna	777	Apr. 08, 2020 (2Y)
BBHA 9120D	Schwarzbeck	Horn Antenna	9120D-1366	Jul. 23, 2020 (1Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 07, 2021 (1Y)
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 24, 2020 (2Y)
ESR3	Rohde & Schwarz	EMI TEST RECEIVER	102602	Mar. 15, 2021 (1Y)
NSLK8126	Schwarzbeck	AMN	8126-404	Mar. 15, 2021 (1Y)
ESH3Z2	Rohde & Schwarz	PULSE LIMITER	357.8810.52	Mar. 15, 2021 (1Y)