

# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

**Test Report No.** : OT-196-RWD-007  
**AGR No.** : A194A-065  
**Applicant** : AMOSENSE  
**Address** : 56 Naruteo-ro, Seocho-gu, SEOUL, South Korea  
**Manufacturer** : AMOSENSE  
**Address** : 56 Naruteo-ro, Seocho-gu, SEOUL, South Korea  
**Type of Equipment** : ATOZ  
**FCC ID.** : 2AS9T-SB52SW  
**Model Name** : SB52-SW  
**Multiple Model Name** : N/A  
**Serial number** : N/A  
**Total page of Report** : 55 pages (including this page)  
**Date of Incoming** : May 21, 2019  
**Date of issue** : June 05, 2019

## SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*  
 This test report only contains the result of a single test of the sample supplied for the examination.  
 It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:   
 \_\_\_\_\_  
 Tae-Ho, Kim / Senior Manager  
 ONETECH Corp.

Approved by:   
 \_\_\_\_\_  
 Ki-Hong, Nam / Chief Engineer  
 ONETECH Corp.

## CONTENTS

	PAGE
<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>5</b>
<b>2. TEST SUMMARY .....</b>	<b>6</b>
<b>2.1 TEST ITEMS AND RESULTS .....</b>	<b>6</b>
<b>2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS .....</b>	<b>6</b>
<b>2.3 RELATED SUBMITTAL(S) / GRANT(S) .....</b>	<b>6</b>
<b>2.4 PURPOSE OF THE TEST .....</b>	<b>6</b>
<b>2.5 TEST METHODOLOGY .....</b>	<b>6</b>
<b>2.6 TEST FACILITY .....</b>	<b>6</b>
<b>3. GENERAL INFORMATION .....</b>	<b>7</b>
<b>3.1 PRODUCT DESCRIPTION .....</b>	<b>7</b>
<b>3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT .....</b>	<b>7</b>
<b>4. EUT MODIFICATIONS .....</b>	<b>7</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>8</b>
<b>5.1 JUSTIFICATION .....</b>	<b>8</b>
<b>5.2 PERIPHERAL EQUIPMENT .....</b>	<b>8</b>
<b>5.3 MODE OF OPERATION DURING THE TEST .....</b>	<b>8</b>
<b>5.4 CONFIGURATION OF TEST SYSTEM .....</b>	<b>10</b>
<b>5.5 ANTENNA REQUIREMENT .....</b>	<b>10</b>
<b>6. PRELIMINARY TEST .....</b>	<b>11</b>
<b>6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS .....</b>	<b>11</b>
<b>6.2 GENERAL RADIATED EMISSIONS TESTS .....</b>	<b>11</b>
<b>7. MAXIMUM PEAK OUTPUT POWER .....</b>	<b>12</b>
<b>7.1 OPERATING ENVIRONMENT .....</b>	<b>12</b>
<b>7.2 TEST SET-UP .....</b>	<b>12</b>
<b>7.3 TEST EQUIPMENT USED .....</b>	<b>12</b>
<b>7.4 TEST DATA .....</b>	<b>13</b>
<b>8. BAND EDGES .....</b>	<b>15</b>
<b>8.1 OPERATING ENVIRONMENT .....</b>	<b>15</b>
<b>8.2 TEST SET-UP .....</b>	<b>15</b>
<b>8.3 TEST EQUIPMENT USED .....</b>	<b>15</b>
<b>8.4 TEST DATA .....</b>	<b>16</b>

<b>9. FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (20 DB BANDWIDTH)</b> .....	<b>20</b>
<b>9.1 OPERATING ENVIRONMENT</b> .....	20
<b>9.2 TEST SET-UP</b> .....	20
<b>9.3 TEST EQUIPMENT USED</b> .....	20
<b>9.4 TEST DATA</b> .....	21
<b>10. NUMBER OF HOPPING FREQUENCY</b> .....	<b>24</b>
<b>10.1 OPERATING ENVIRONMENT</b> .....	24
<b>10.2 TEST SET-UP</b> .....	24
<b>10.3 TEST EQUIPMENT USED</b> .....	24
<b>10.4 TEST DATA</b> .....	25
<b>11. TIME OF OCCUPANCY(DWELL TIME)</b> .....	<b>28</b>
<b>11.1 OPERATING ENVIRONMENT</b> .....	28
<b>11.2 TEST SET-UP</b> .....	28
<b>11.3 TEST EQUIPMENT USED</b> .....	28
<b>11.4 TEST DATA</b> .....	29
<b>12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND</b> .....	<b>31</b>
<b>12.1 OPERATING ENVIRONMENT</b> .....	31
<b>12.2 TEST SET-UP FOR CONDUCTED / RADIATED MEASUREMENT</b> .....	31
<b>12.3 TEST EQUIPMENT USED</b> .....	32
<b>12.4 TEST DATA FOR CONDUCTED EMISSION</b> .....	33
<b>12.5 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION</b> .....	39
<i>12.5.1 Spurious &amp; Harmonic Radiated Emission above 1 GHz</i> .....	39
<b>13. RADIATED EMISSION TEST</b> .....	<b>50</b>
<b>13.1 OPERATING ENVIRONMENT</b> .....	50
<b>13.2 TEST SET-UP</b> .....	50
<b>13.3 TEST EQUIPMENT USED</b> .....	50
<b>13.4 TEST DATA</b> .....	51
<i>13.4.1 Test data for 30 MHz ~ 1 000 MHz</i> .....	51
<i>13.4.2 Test data for Below 30 MHz</i> .....	52
<i>13.4.3 Test data for above 1 GHz</i> .....	52
<b>14. CONDUCTED EMISSION TEST</b> .....	<b>53</b>
<b>14.1 OPERATING ENVIRONMENT</b> .....	53
<b>14.2 TEST SET-UP</b> .....	53
<b>14.3 TEST EQUIPMENT USED</b> .....	53
<b>14.4 TEST DATA</b> .....	54

**Revision History**

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-196-RWD-007	June 05, 2019	Initial Release	All

## 1. VERIFICATION OF COMPLIANCE

Applicant : AMOSENSE  
 Address : 56 Naruteo-ro, Seocho-gu, SEOUL, South Korea  
 Manufacturer : AMOSENSE  
 Address : 56 Naruteo-ro, Seocho-gu, SEOUL, South Korea  
 Factory : AMO VINA CO.,LTD  
 Address : Lot CN12, Khai Quang industrial Park, Khai Quang Ward, Vinh Yen City, Vinh Phuc Province, Vietnam  
 Contact Person : UIHAN JEONG/Research Engineer  
 Telephone No. : +82-010-4948-5676  
 FCC ID : 2AS9T-SB52SW  
 Model Name : SB52-SW  
 Brand Name : -  
 Serial Number : N/A  
 Date : June 05, 2019

EQUIPMENT CLASS	DSS – PART 15 SPREAD SPECTRUM TRANSMITTER
E.U.T. DESCRIPTION	ATOZ
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. TEST SUMMARY

### 2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247(a)(1)(i)	20 dB Bandwidth	Met the Limit / PASS
15.247(b)(2)	Conducted Maximum Peak Output Power	Met the Limit / PASS
15.247(a)(1)	Carrier Frequency Separation	Met the Limit / PASS
15.247(a)(1)(i)	Number of Hopping Frequencies	Met the Limit / PASS
15.247(a)(1)(i)	Time of Occupancy	Met the Limit / PASS
15.247(d)	Conducted Spurious Emissions	Met the Limit / PASS
15.247(d)	Band Edge(Out of Band Emissions)	Met the Limit / PASS
15.207(a)	AC Power line Conducted Emissions	Met the Limit / PASS
15.247(d), 15.205, 15.209	Radiated Spurious Emissions	Met the Limit / PASS
15.247(d), 15.205, 15.209	Radiated Restricted Band Edge	Met the Limit / PASS

### 2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

### 2.3 Related Submittal(s) / Grant(s)

Original submittal only

### 2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

### 2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

### 2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

It should not be reproduced except in full, without the written approval of ONETECH Corp.

EMC-003 (Rev.2)

### 3. GENERAL INFORMATION

#### 3.1 Product Description

The AMOSENSE, Model SB52-SW (referred to as the EUT in this report) is a ATOZ. Product specification information described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	ATOZ	
Temperature Range	-20 °C ~ 50 °C	
OPERATING FREQUENCY	NFC	13.56 MHz
	Sig Fox	902.137 5 MHz ~ 904.662 5 MHz
	Bluetooth LE	2 402 MHz ~ 2 480 MHz
	WLAN 2.4 GHz	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))
MODULATION TYPE	NFC	ASK
	Sig Fox	DBPSK
	Bluetooth LE	GFSK
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK) 802.11g/n(HT20): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
RF OUTPUT POWER'	NFC	38.11 dBμV/m
	Sig Fox	21.04 dBm
	Bluetooth LE	0.18 dBm
	WLAN 2.4 GHz	2.52 dBm(802.11b) 1.02 dBm(802.11g) 0.84 dBm(802.11n_HT20)
ANTENNA TYPE	NFC: PCB Antenna Sig Fox : Chip Antenna WLAN 2.4 GHz / Bluetooth LE : Chip Antenna	
ANTENNA GAIN	WLAN 2.4 GHz / Bluetooth LE : 3.3 dBi Sig Fox : 0.4 dBi	
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	26 MHz, 32 MHz, 50 MHz	

#### 3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

### 4. EUT MODIFICATIONS

-. None

## 5. SYSTEM TEST CONFIGURATION

### 5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	AMONSENSE	ATOZ Rev1.0 / N/A	N/A
Sub Board	AMONSENSE	N/A	N/A
DC Battery	N/A	N/A	N/A

### 5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
SB52-SW	AMONSENSE	ATOZ (EUT)	-
N/A	N/A	Jig Board	EUT
HP Pavilion g series	HP	Notebook PC	-
PPP009C	LIE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	AC Adapter	-
MCS-01KT	Ten Pao Electronics Co., Ltd	DC Adapter	-

### 5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 902.137 5 MHz, 903.387 5 MHz, and 904.662 5 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XZ” axis, but the worst data was recorded in this report.




- Duty Cycle

Mode	Tx On Time [ ms ]	Tx Off Time [ ms ]	Duty Cycle [ % ]	Correction Factor [ dB ]
Sig Fox	242.167	516.170	31.93	4.96

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) \* 100

Correction Factor : 10 \* Log(1 / (Duty Cycle / 100))

- Test Plot

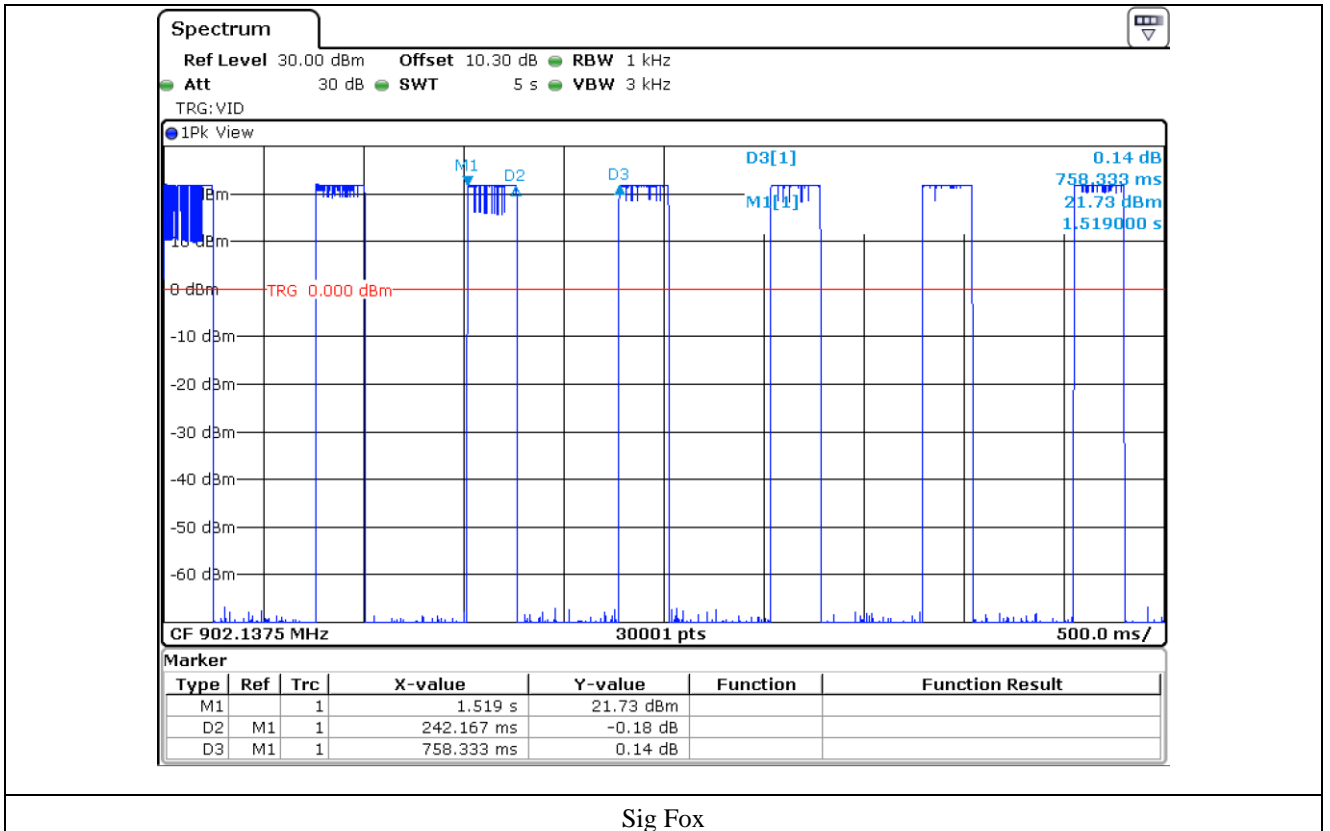

## 5.4 Configuration of Test System

**Line Conducted Test:** The EUT was tested in a Charging mode. The EUT was connected to USB and the Power of USB was Connected to DC Adaptor. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

**Radiated Emission Test:** Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

## 5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**Antenna Construction:**

The antenna of the EUT is Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

## 6. PRELIMINARY TEST

### 6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

### 6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

## 7. MAXIMUM PEAK OUTPUT POWER


### 7.1 Operating environment

Temperature : 24.3 °C  
 Relative humidity : 43.9 % R.H.

### 7.2 Test set-up

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For frequency hopping systems operating in the 902-928 MHz band: 1 watt (30 dBm) for systems employing at least 50 hopping channels; and, 0.25 watts (24 dBm) for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.
2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.
3. The e.i.r.p of this module not exceed 4 W because the antenna gain not exceed not 6 dBi.

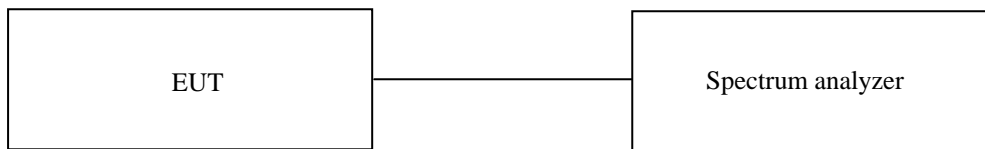

### 7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.


**7.4 Test data**


- Test Date : May 22, 2019 ~ May 30, 2019

- Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE		LIMIT (mW)	MARGIN (dB)
		(dBm)	(mW)		
LOW	902.137 5	21.04	127.06	1 000.00	872.94
MIDDLE	903.387 5	20.72	118.03	1 000.00	881.97
HIGH	904.662 5	20.91	123.31	1 000.00	876.69

**Tested by: Hyung-Kwon, Oh / Assistant Manager**

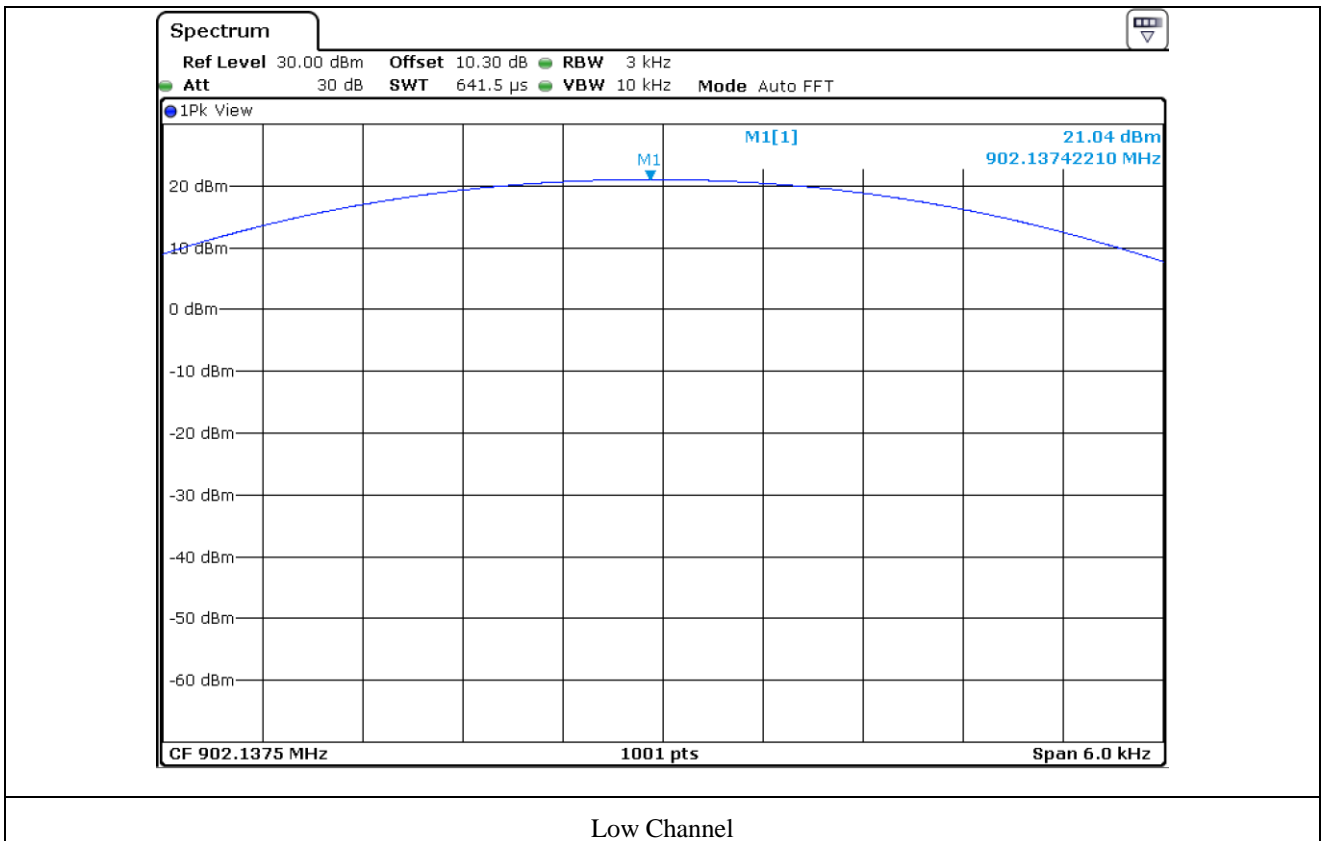

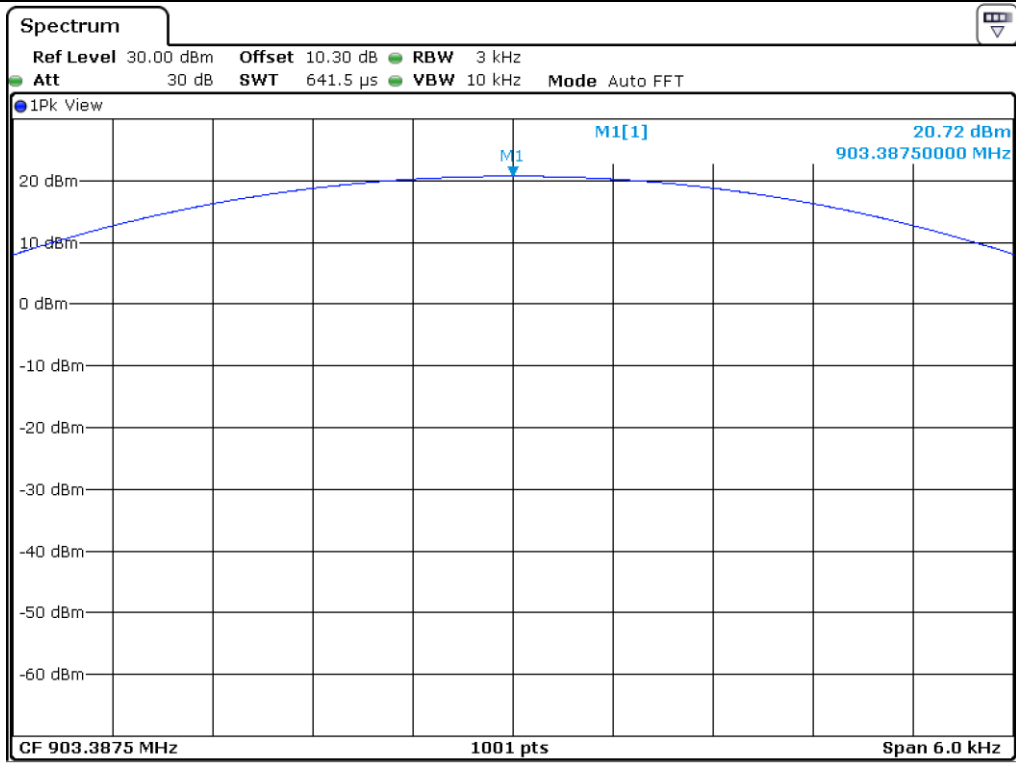

Middle Channel

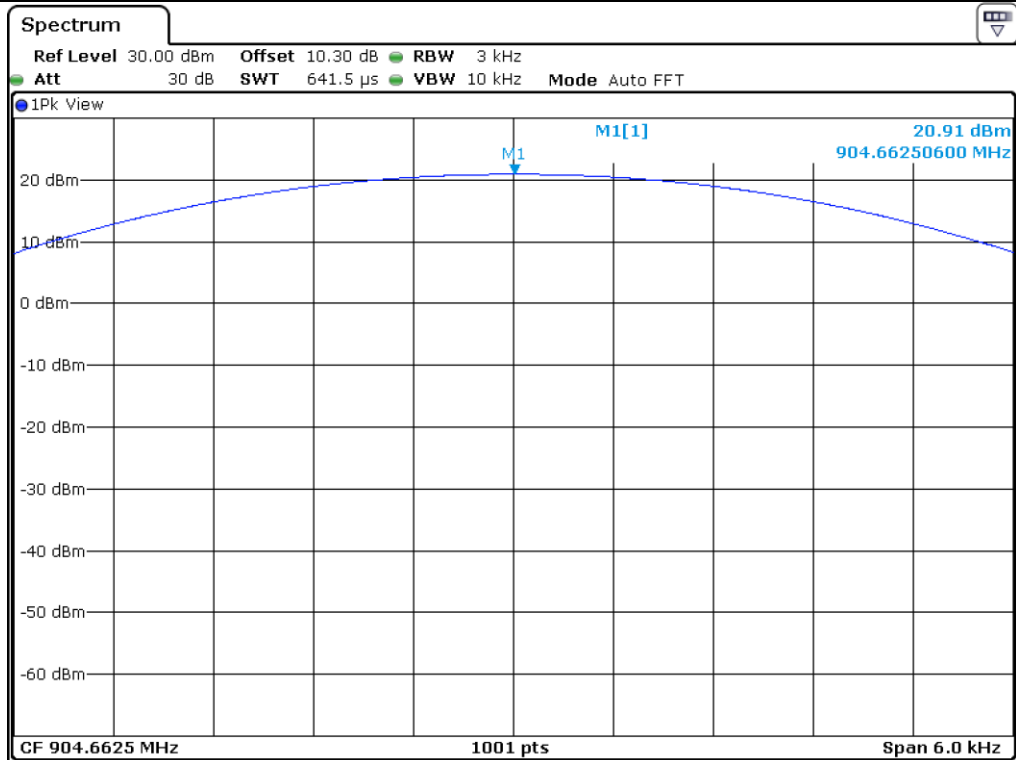

High Channel

## 8. BAND EDGES

### 8.1 Operating environment

Temperature : 24.3 °C  
 Relative humidity : 43.9 % R.H.

### 8.2 Test set-up

According to §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.



### 8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

**8.4 Test data**

- Test Date : May 22, 2019 ~ May 30, 2019  
 - Test Result : Pass

**- Without hopping**

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dB)	LIMIT (dBc)	MARGIN (dB)
LOW	902.137 5	24.56 (21.88 + 2.68)	20.00	4.56
HIGH	904.662 5	72.75 (21.82 + 50.93)	20.00	52.75


**- With Hopping**

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dB)	LIMIT (dBc)	MARGIN (dB)
LOW	902.137 5	22.54 (21.89 + 0.65)	20.00	2.54
HIGH	904.662 5	70.36 (21.89 + 48.47)	20.00	50.36




Tested by: Hyung-Kwon, Oh / Assistant Manager




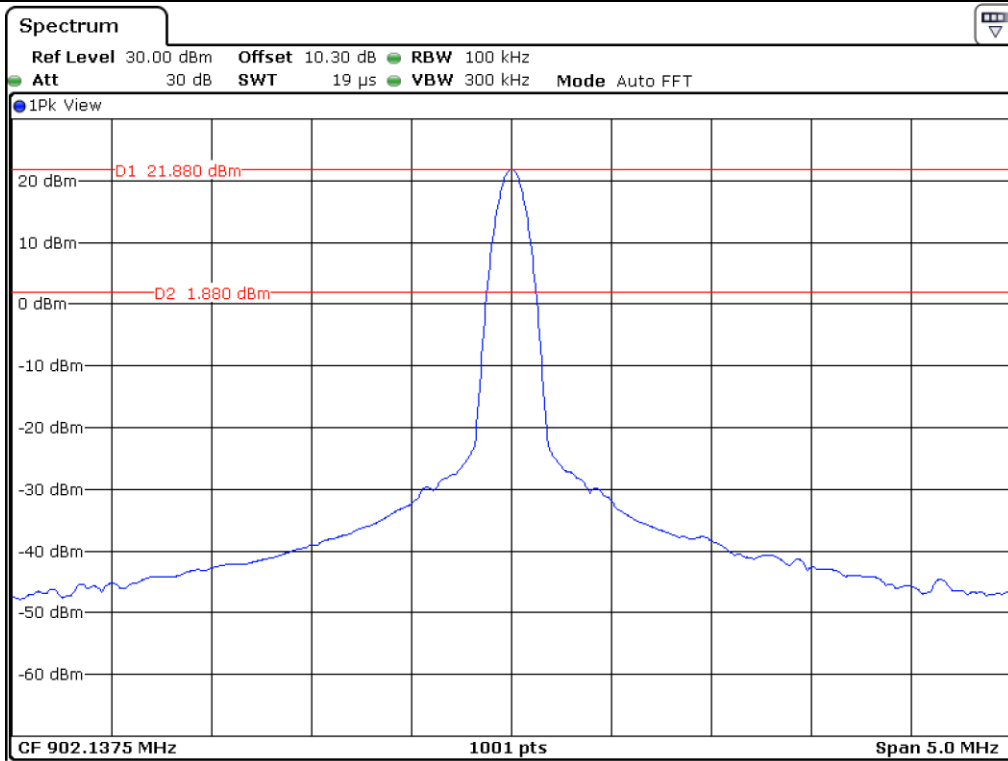


Without hopping\_Low Channel\_1

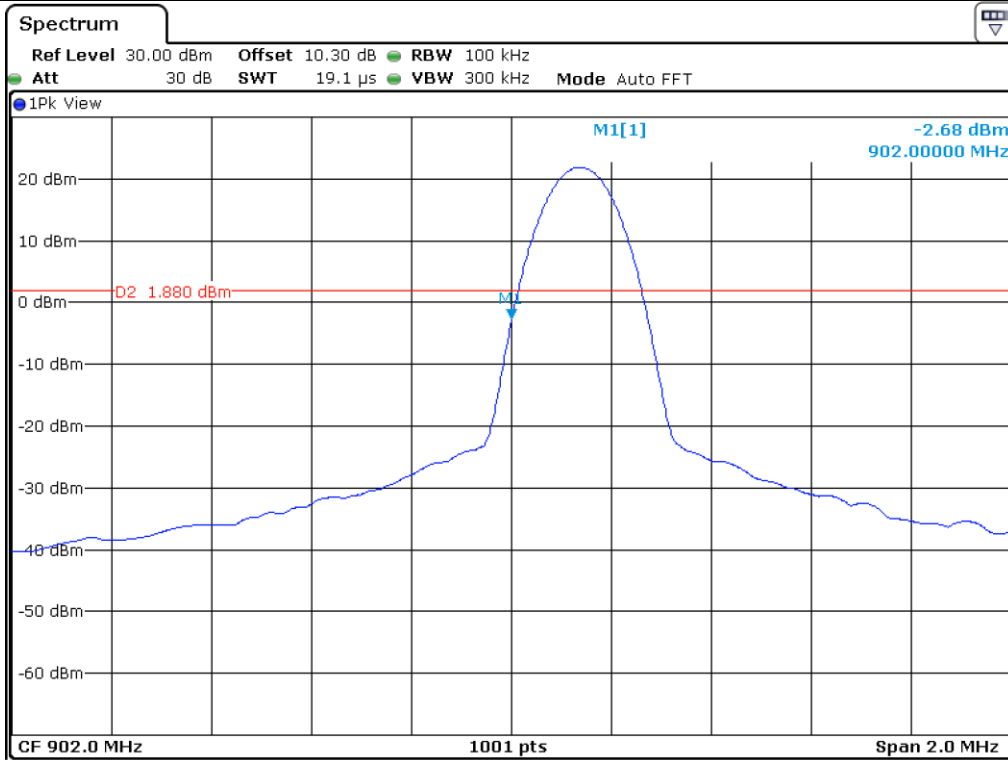


Without hopping\_Low Channel\_2

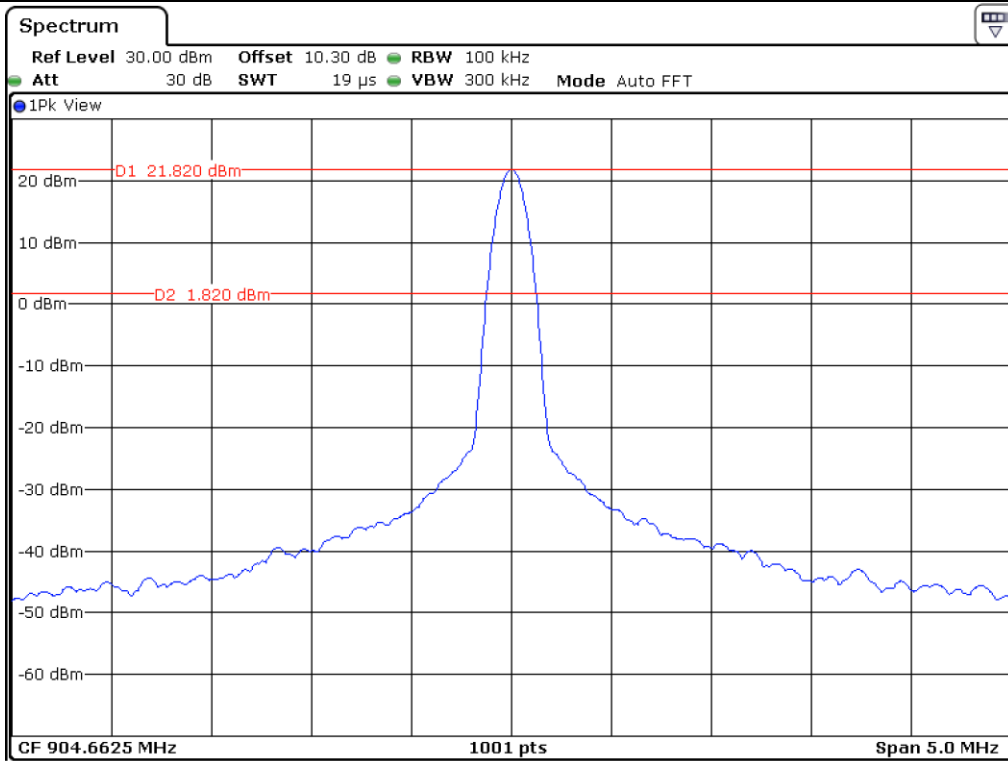


Without hopping\_High Channel\_1

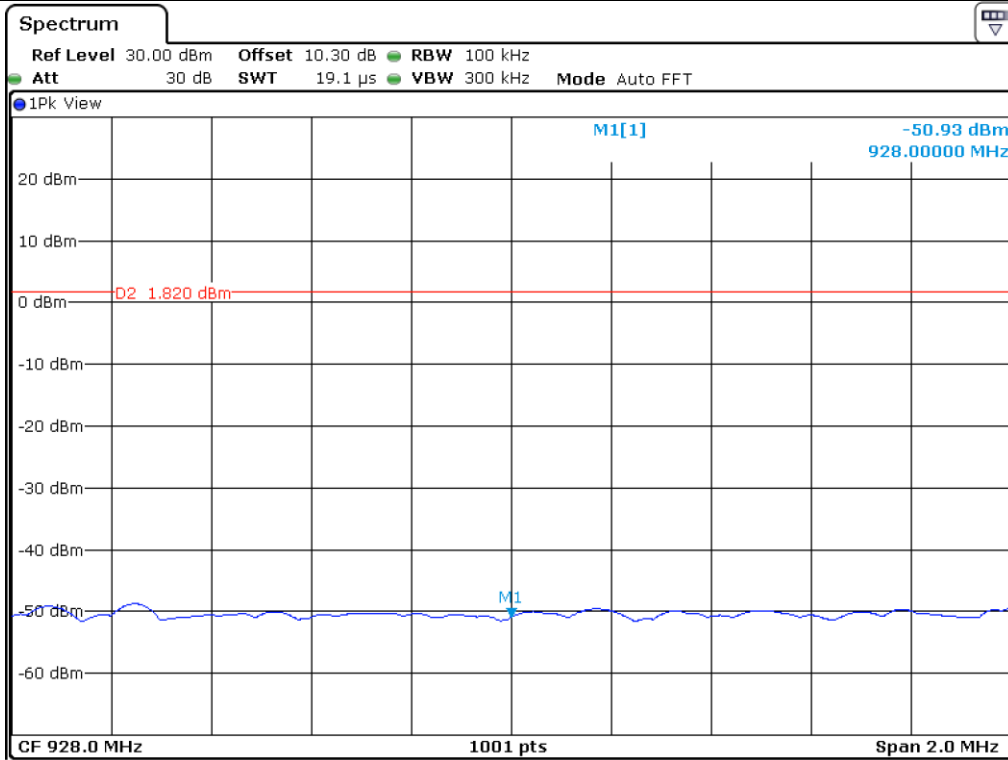

Without hopping\_High Channel\_2

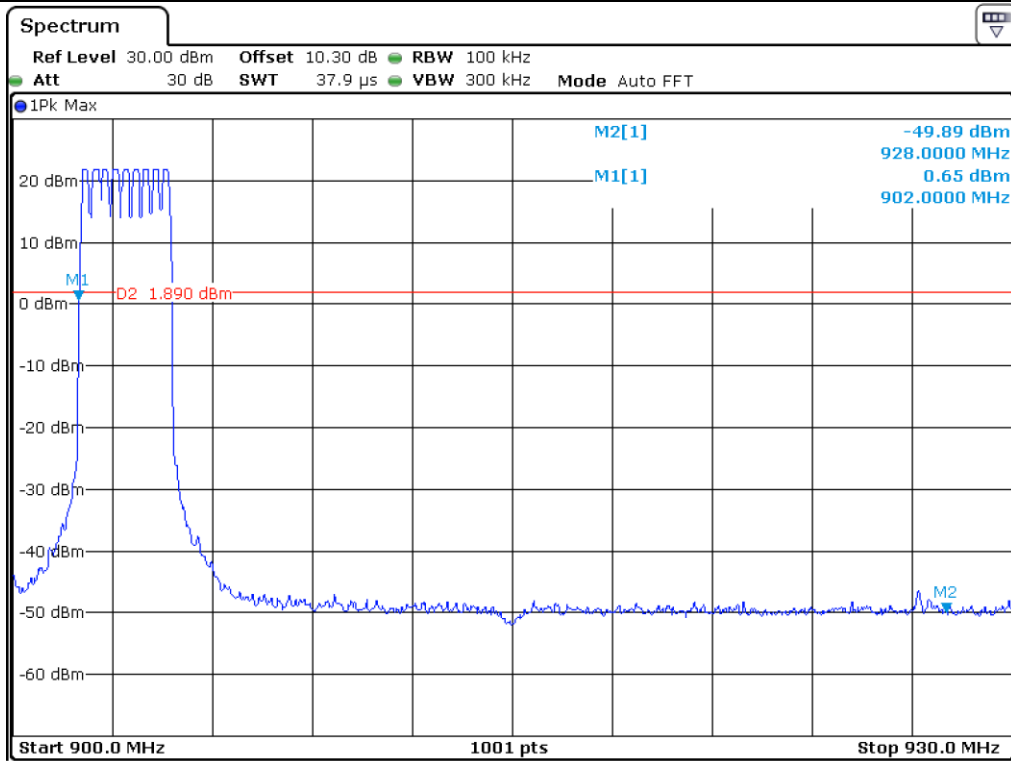

With Hopping\_Low Channel

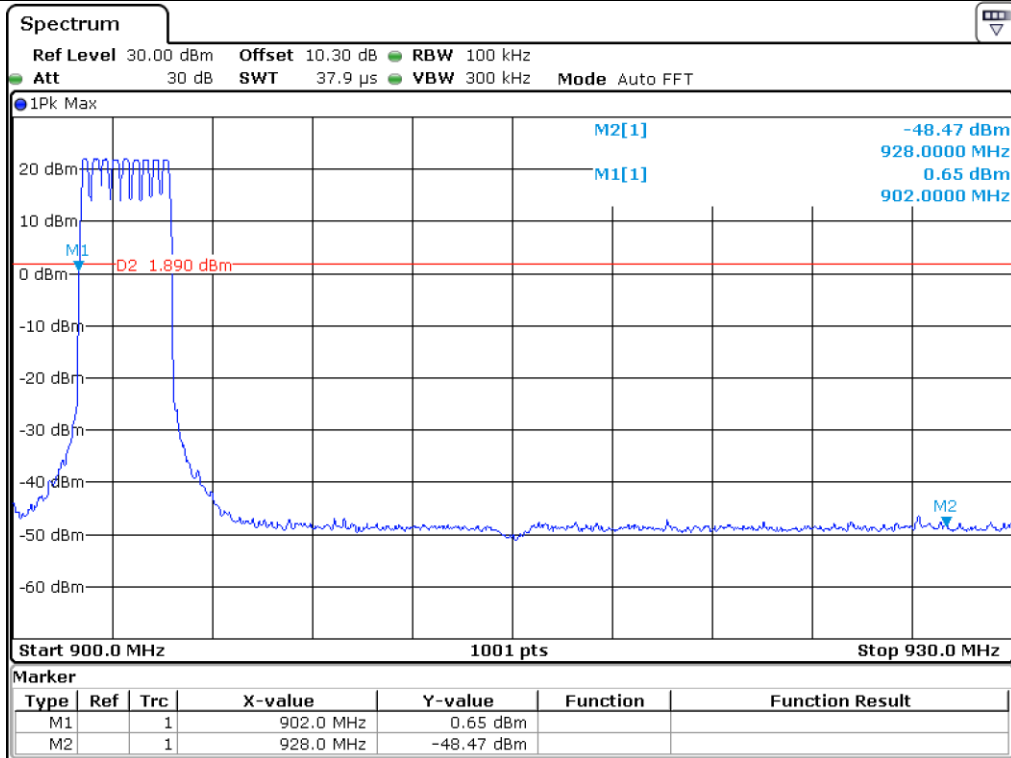

With Hopping\_High Channel


## 9. FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (20 dB BANDWIDTH)

### 9.1 Operating environment

Temperature : 24.3 °C  
 Relative humidity : 43.9 % R.H.

### 9.2 Test set-up

According to §15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

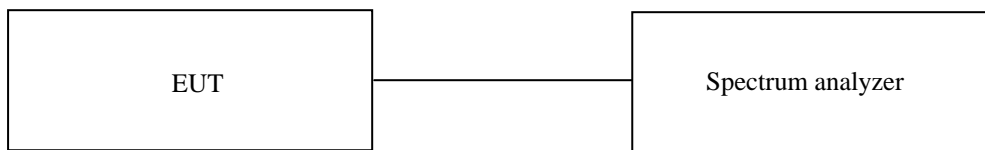

### 9.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.


**9.4 Test data**


- Test Date : May 22, 2019 ~ May 30, 2019

- Test Result : Pass


Channel Separation (kHz)	20 dB Bandwidth		Limit (kHz)	Result
	Channel	Measured Value (kHz)		
16.78	LOW	1.32	> 25 Or <b>&gt; 20 dB B.W. of</b> <b>Hopping Channel</b>	Pass
	MIDDLE	1.40		
	HIGH	1.32		

Tested by: Hyung-Kwon, Oh / Assistant Manager

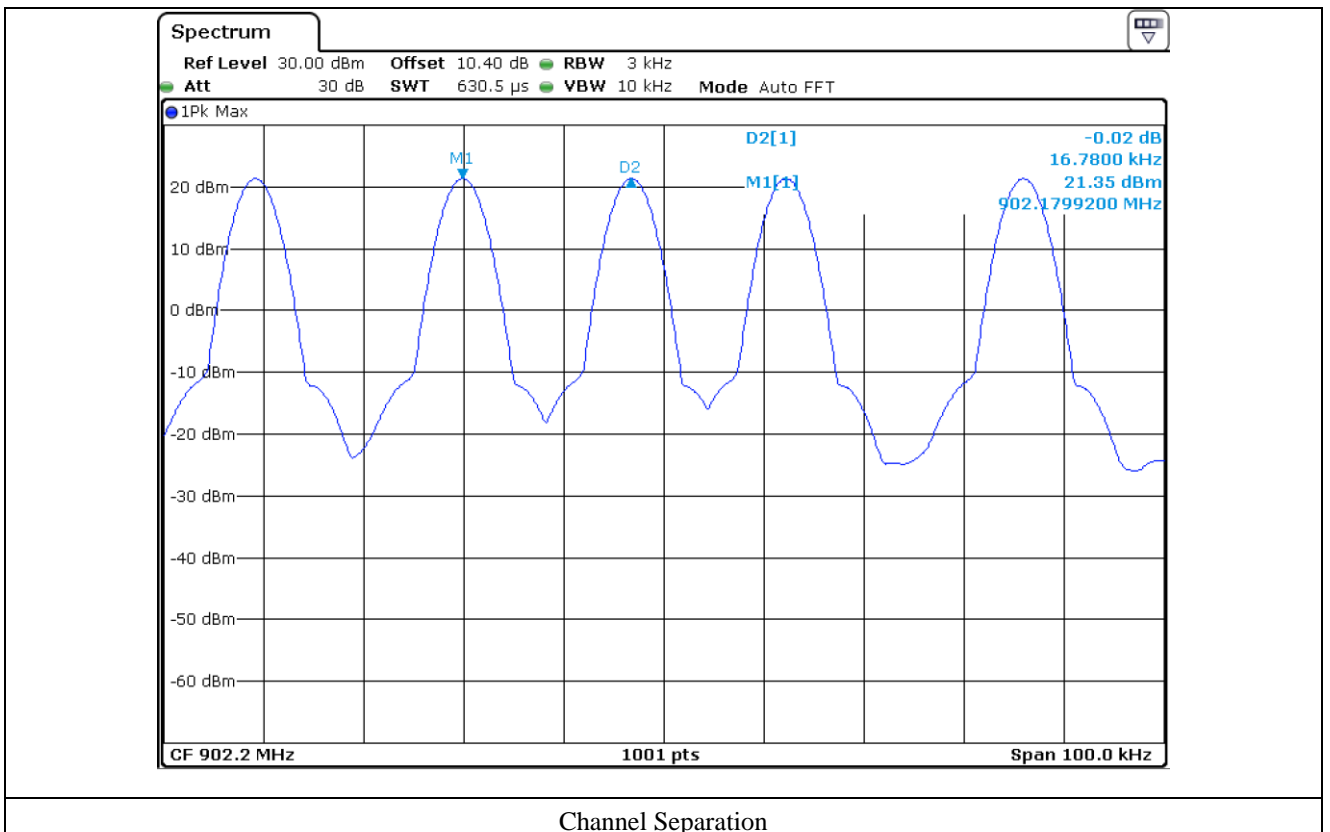


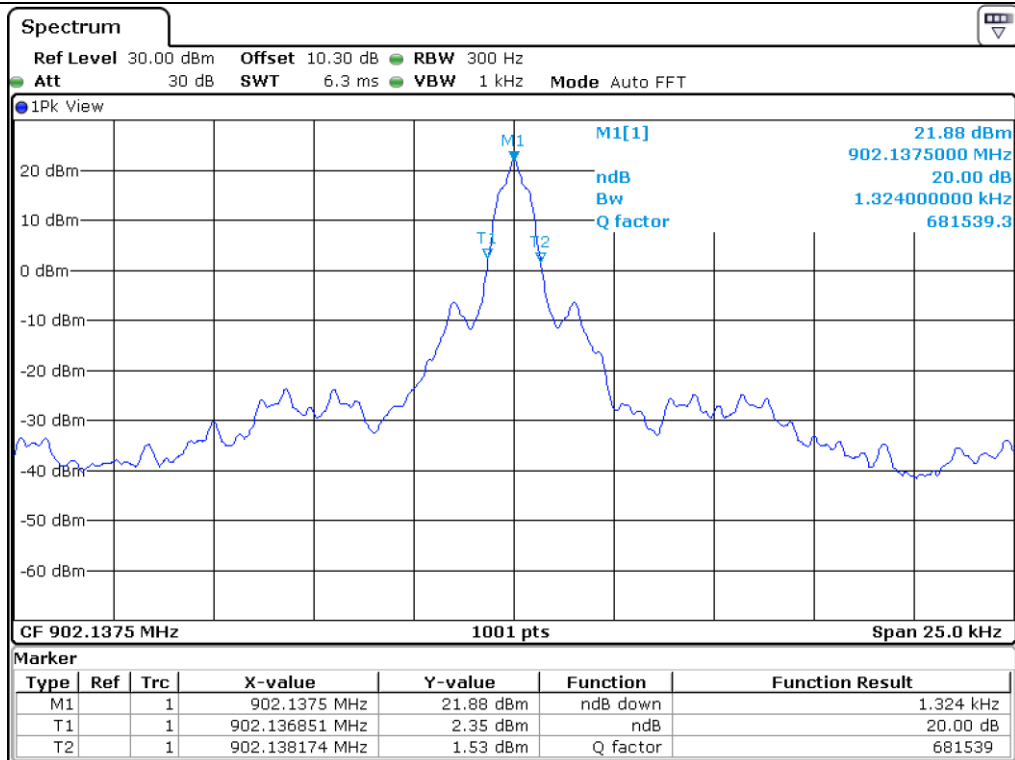

Low Channel

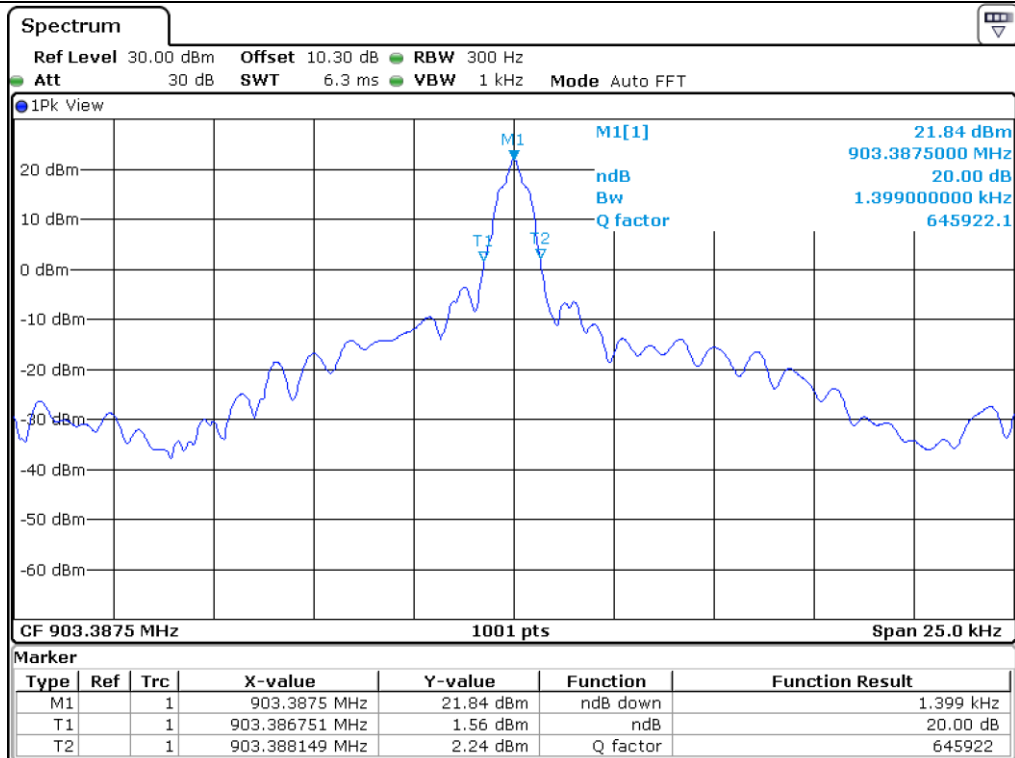

Middle Channel

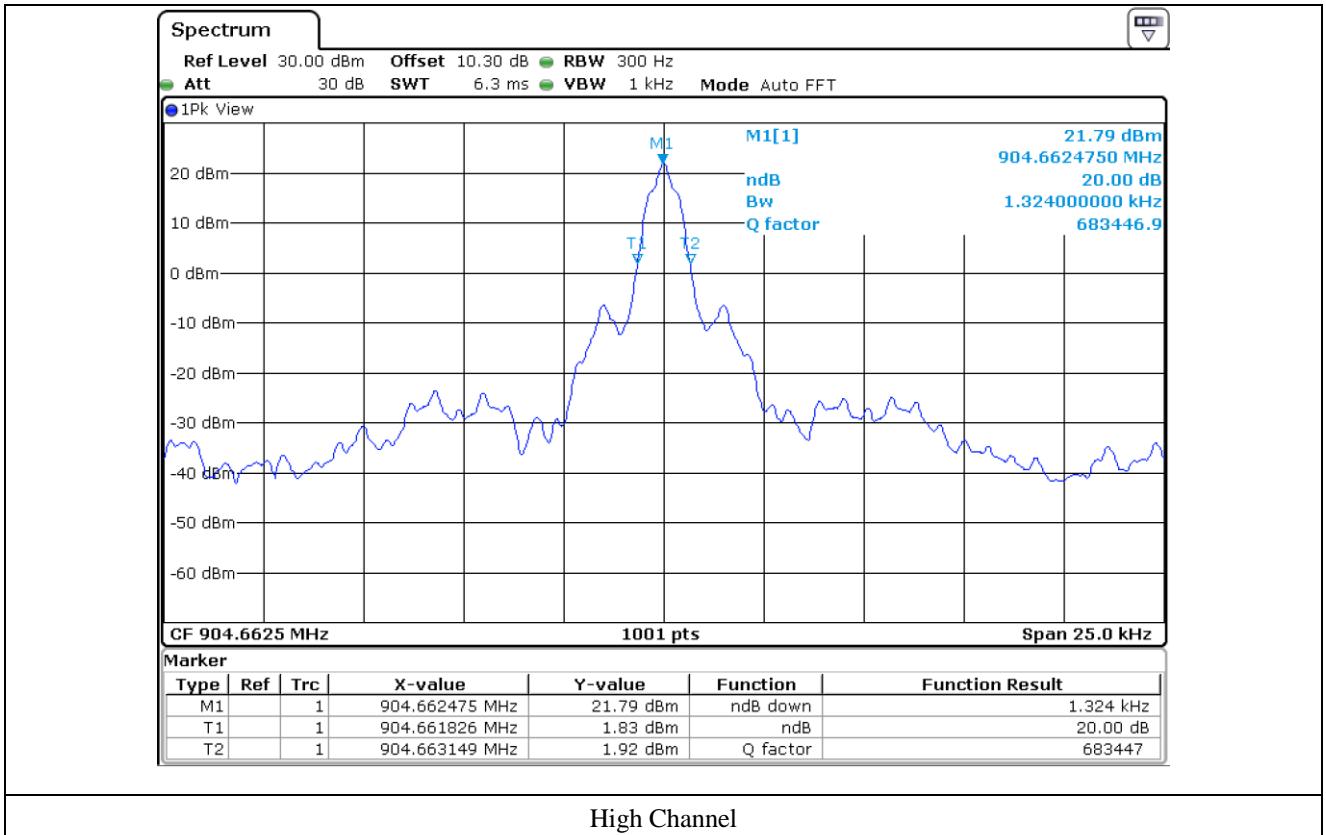

## 10. NUMBER OF HOPPING FREQUENCY

### 10.1 Operating environment

Temperature : 24.3 °C  
 Relative humidity : 43.9 % R.H.

### 10.2 Test set-up

According to §15.247(a)(1)(i) if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20-second period. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10-second period. The maximum 20 dB bandwidth of the hopping channel shall be 500 kHz..



### 10.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.




**10.4 Test data**


- Test Date : May 22, 2019 ~ May 30, 2019

- Test Result : Pass


Number of Macro Channels	One Single Macro Channel	Number of Hopping Frequencies	Limit (EA)
9	6	54.00	50.00

Tested by: Hyung-Kwon, Oh / Assistant Manager

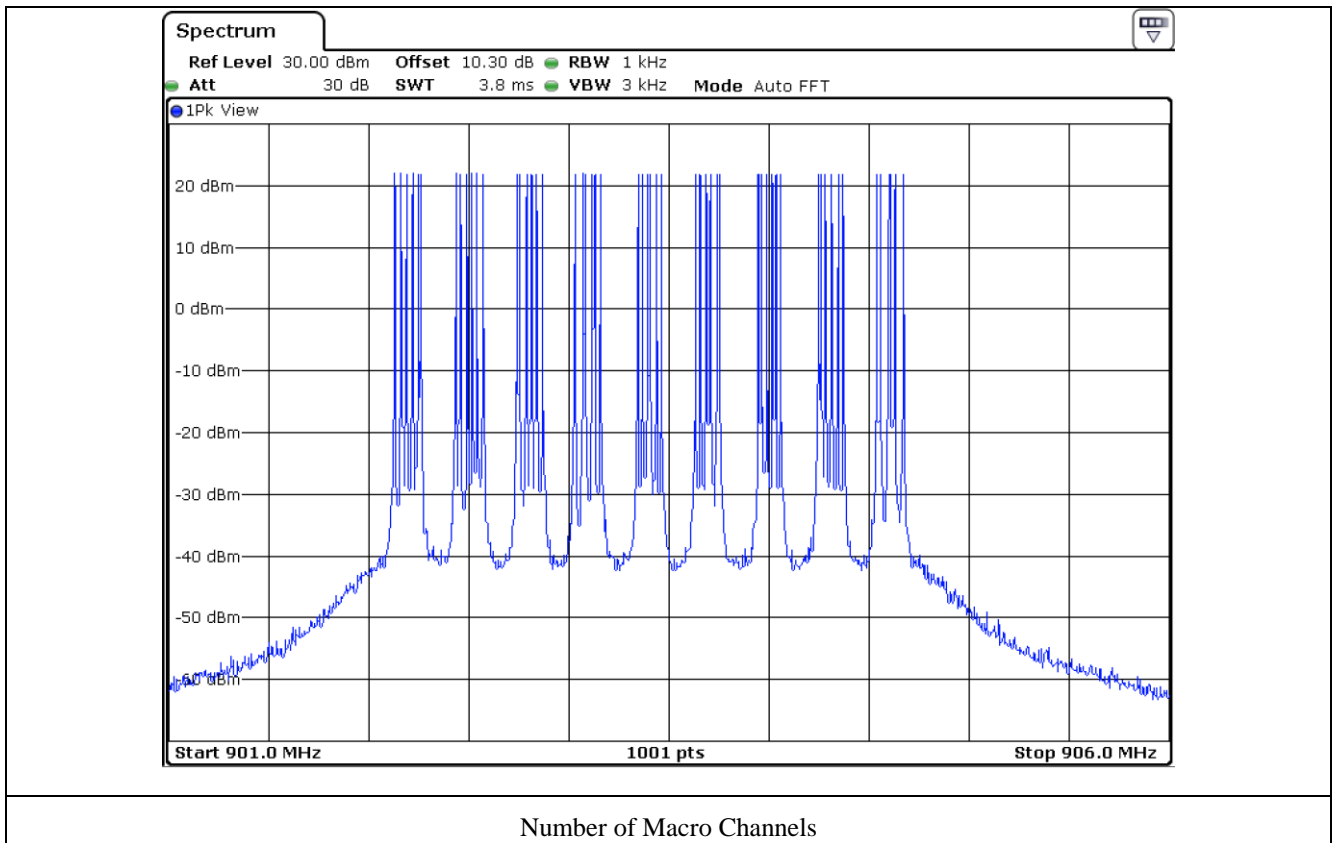


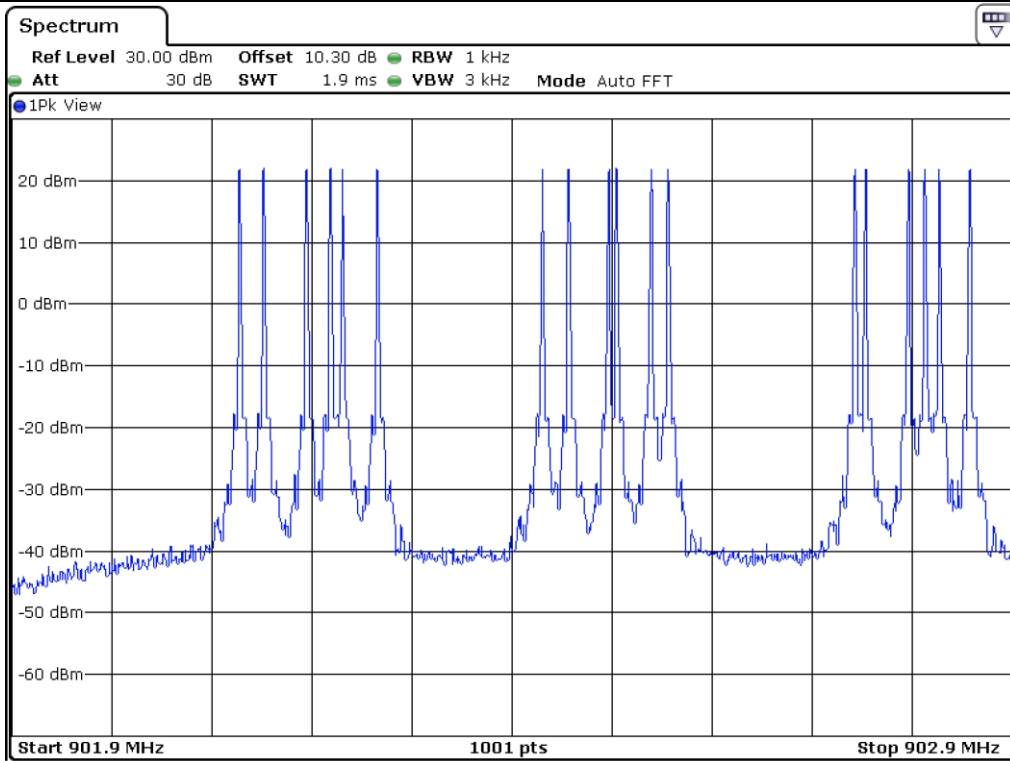

One Single Macro Channel\_1

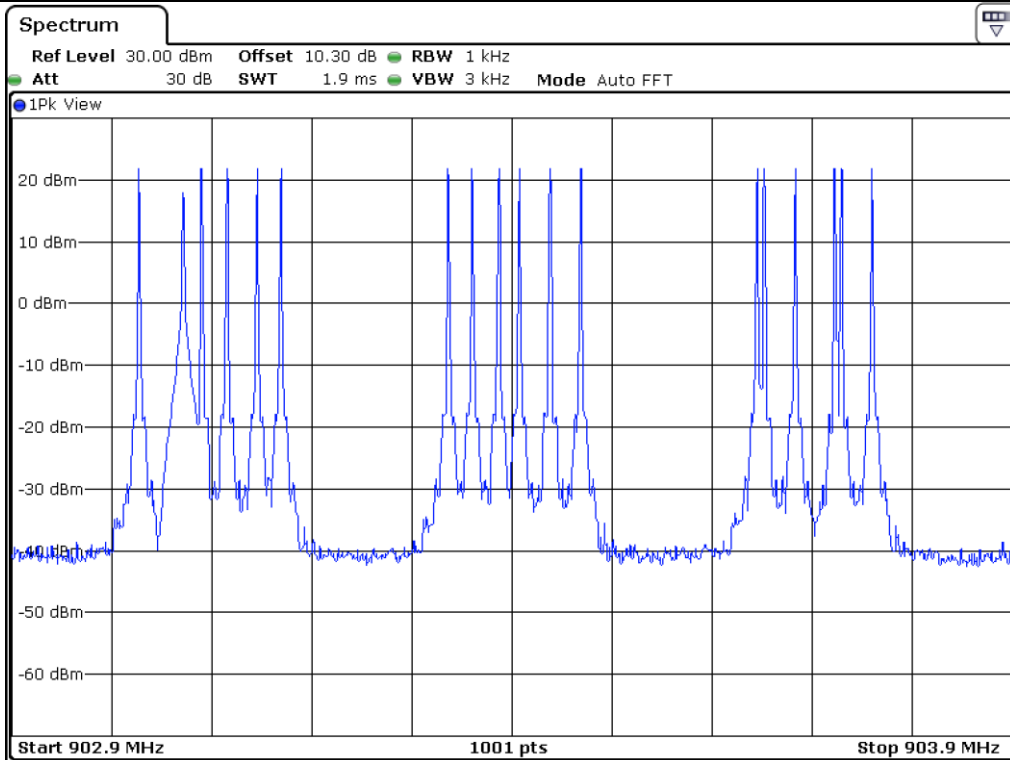

One Single Macro Channel\_2

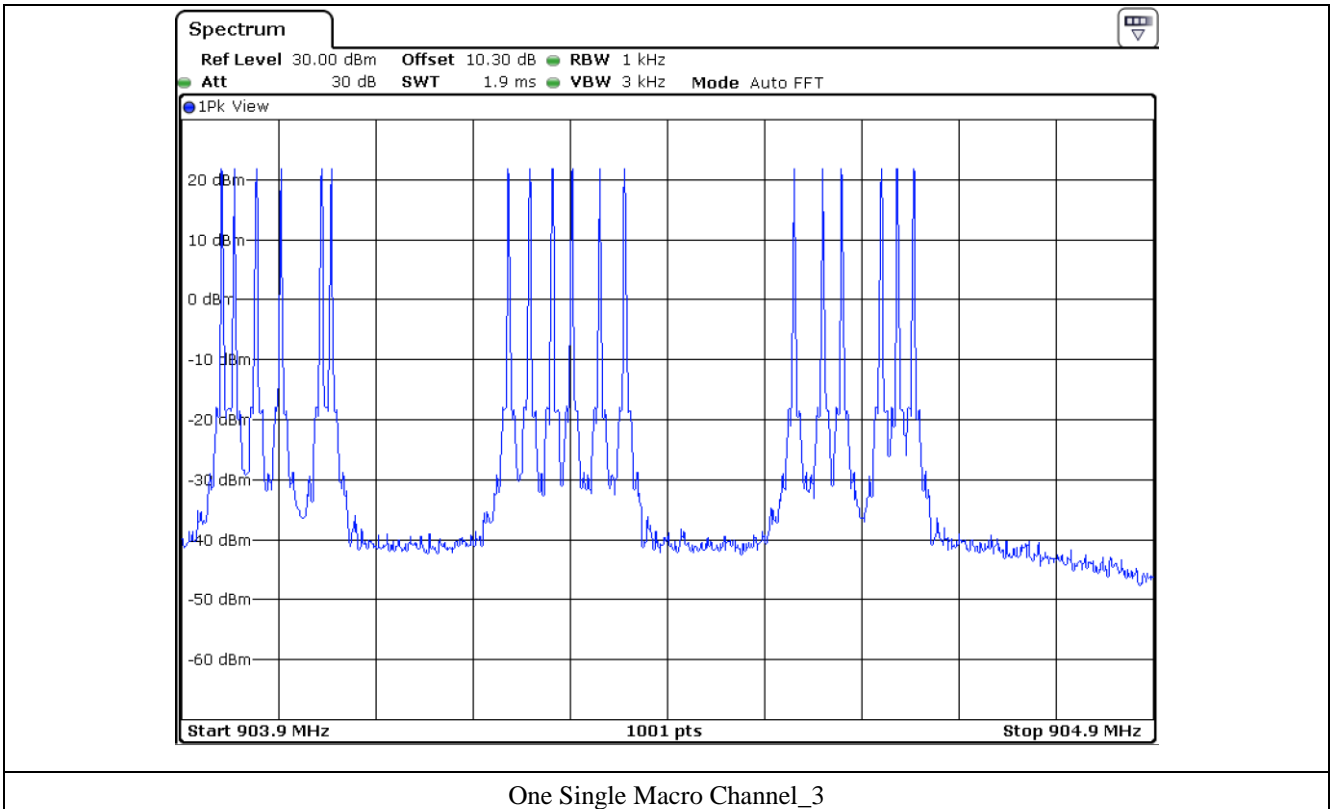


## 11. TIME OF OCCUPANCY(DWELL TIME)

### 11.1 Operating environment

Temperature : 24.3 °C  
 Relative humidity : 43.9 % R.H.

### 11.2 Test set-up

According to §15.247(a)(1)(i) / RSS-247 5.1.3, Frequency hopping systems operating in the 902 MHz ~ 928 MHz bands. if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

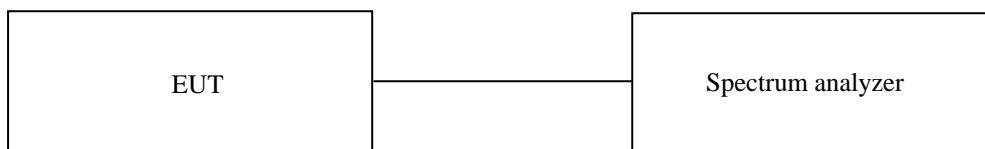

### 11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.


11.4 Test data

- Test Date : May 22, 2019 ~ May 30, 2019
- Test Result : Pass


	Channel	Measured Value(ms)	Limit(ms)	Result
Pulse Time (ms)	LOW	242.167	400.00	Pass
	MIDDLE	246.667		
	HIGH	246.833		




Tested by: Hyung-Kwon, Oh / Assistant Manager

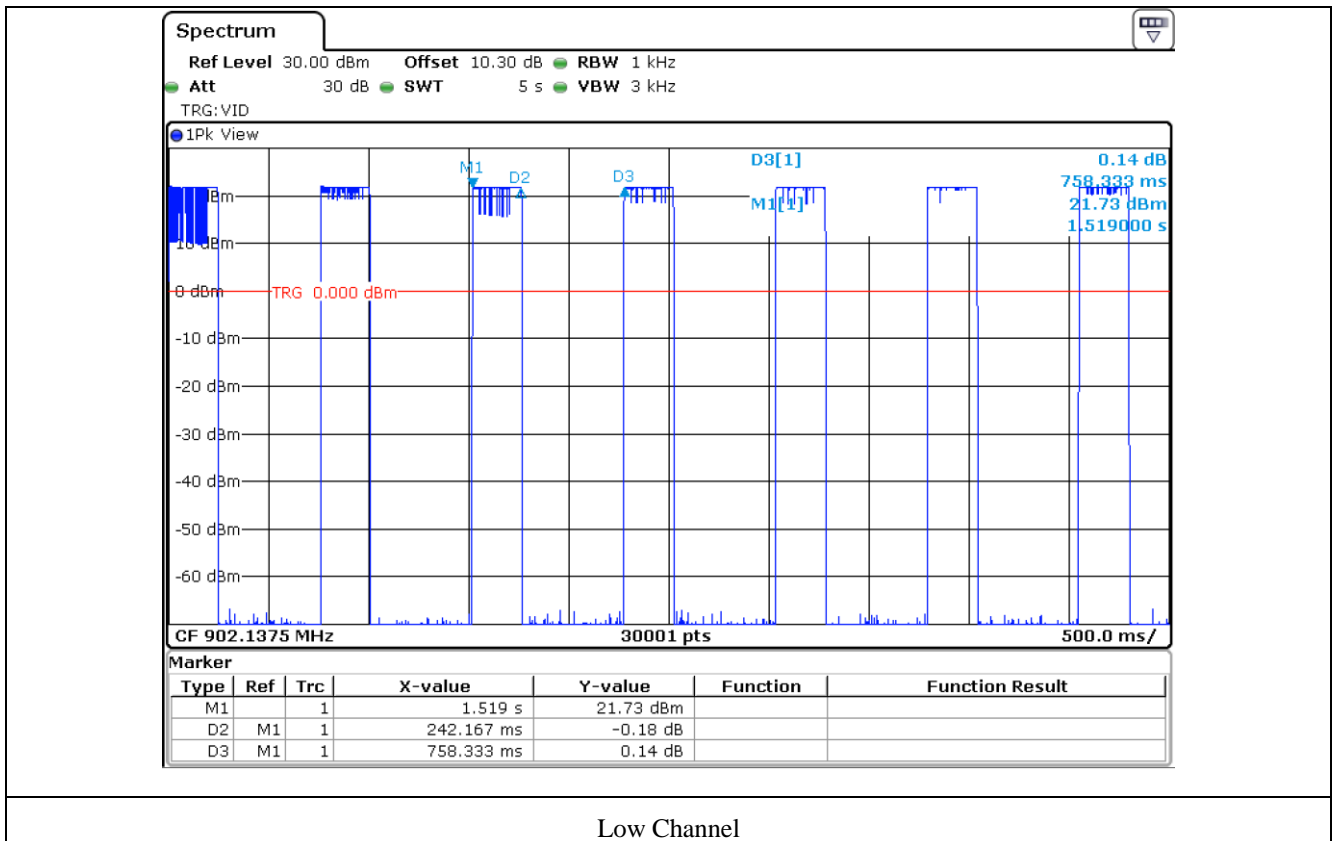

Low Channel

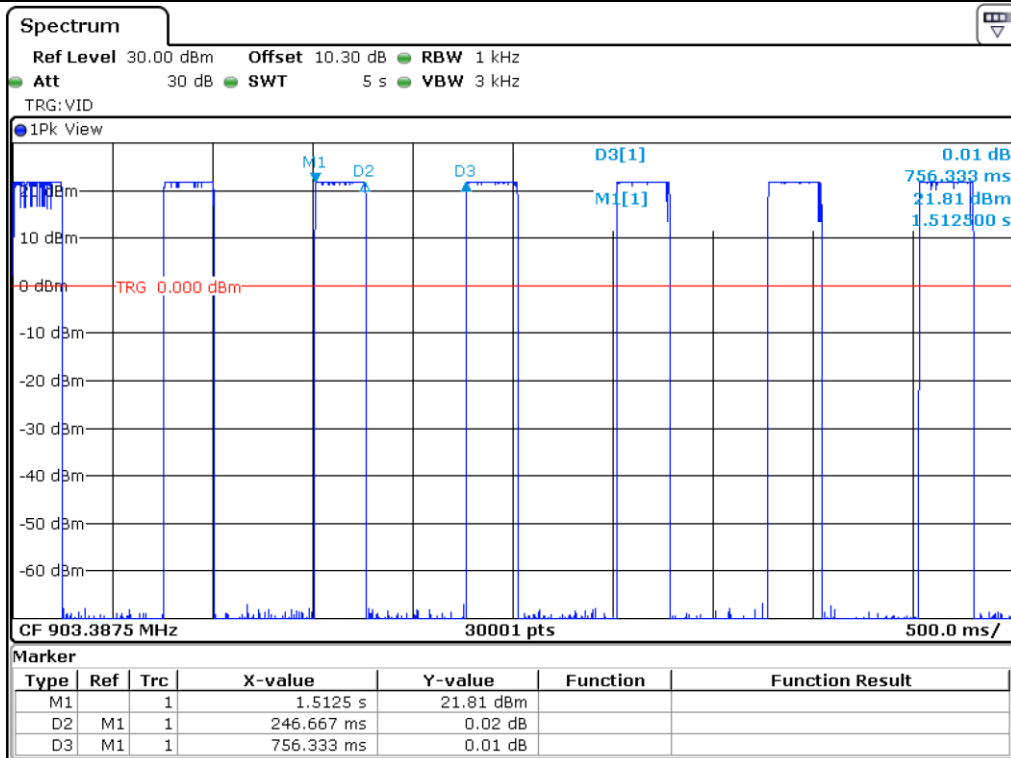

Middle Channel

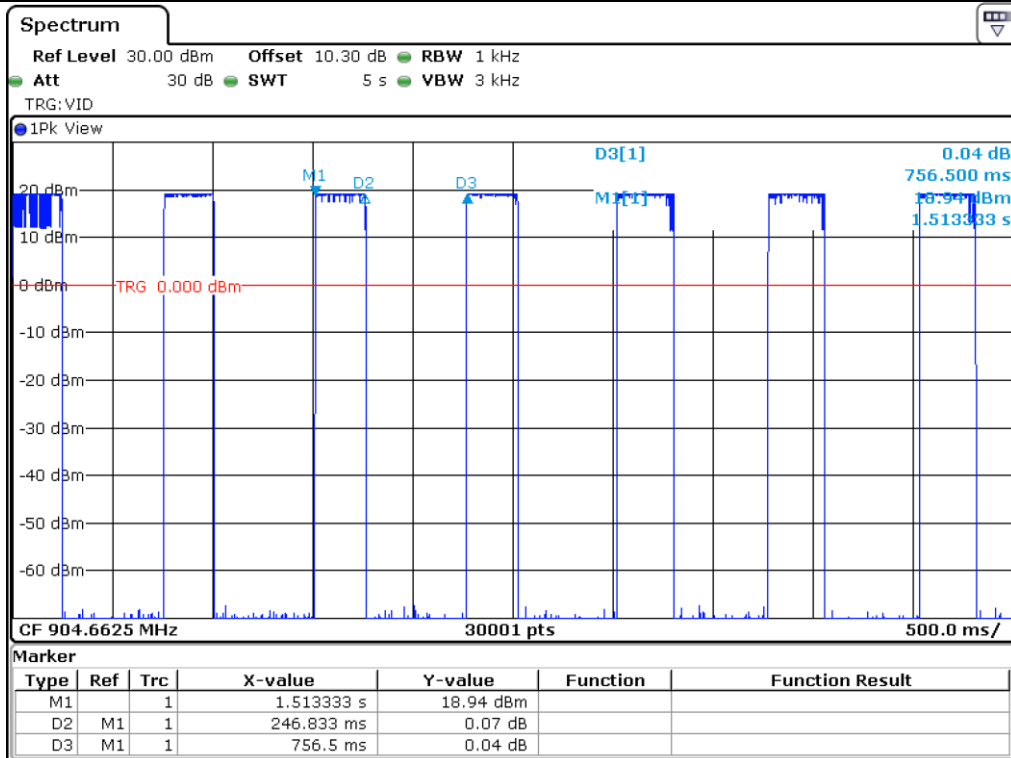

High Channel

**12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND**


**12.1 Operating environment**

Temperature : 24.3 °C  
 Relative humidity : 43.9 % R.H.

**12.2 Test set-up for conducted / radiated measurement**


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

**- Conducted Configuration**

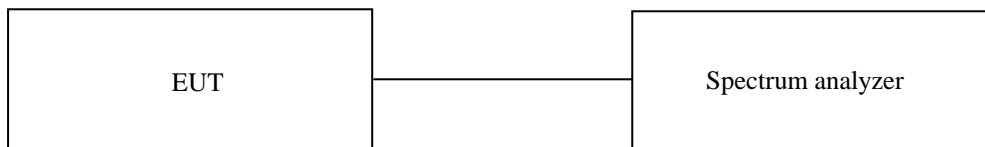


**- Radiated Configuration**


1. Below 30 MHz

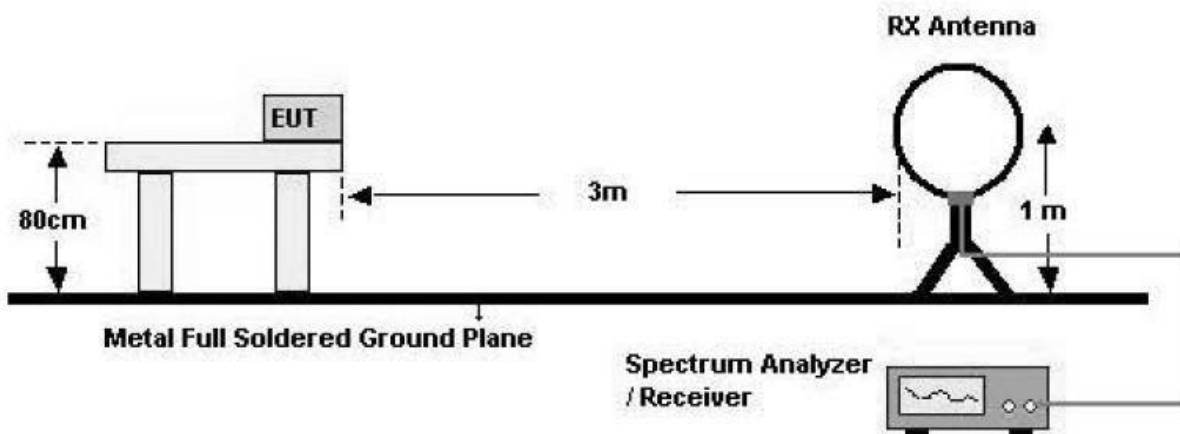

2. 30 MHz - 1 GHz

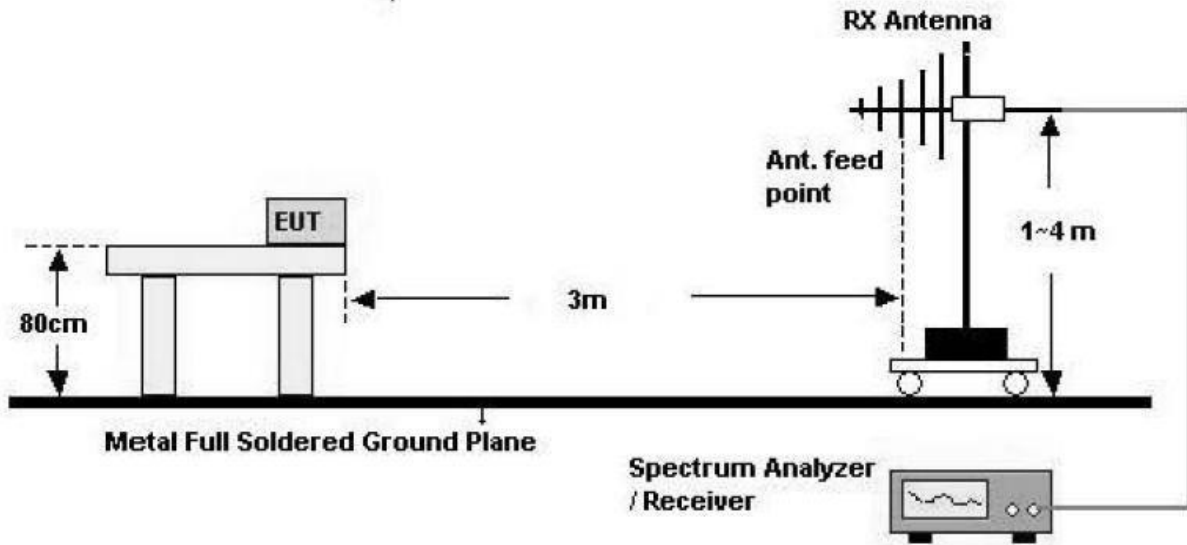

3. Above 1 GHz

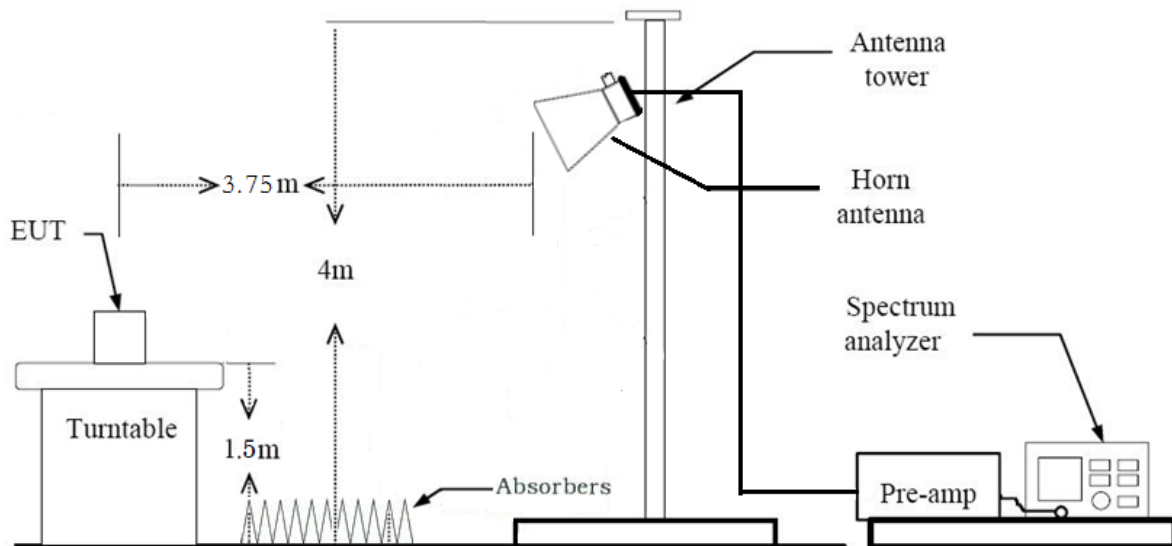

**12.3 Test equipment used**

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Mar. 28, 2019 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312545	Mar. 18, 2019 (1Y)
■ - BBV9718	Schwarzbeck	Amplifier	310	Mar. 28, 2019 (1Y)
■ - SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Mar. 11, 2019 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	777	Apr. 13, 2018 (2Y)
■ - BBHA 9120D	Schwarzbeck	Horn Antenna	9120D-1366	Aug. 02, 2017 (2Y)
■ - BBHA 9170	Schwarzbeck	Horn Antenna	BBHA9170179	Jan. 16, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

It should not be reproduced except in full, without the written approval of ONETECH Corp.

EMC-003 (Rev.2)



**12.4 Test data for conducted emission**

- . Test Date : May 22, 2019 ~ May 30, 2019
- . Resolution bandwidth : 100 kHz
- . Video bandwidth : 300 kHz
- . Detector : Peak
- . Result : PASSED


Channel	Frequency Range	Measured Value(dBm)	Limit(dBm)	Margin(dB)
Low	Fundamental	21.89	1.89	-
	30 M ~ 1 GHz	-47.93	1.89	49.82
	1 GHz ~ 10 GHz	-12.08	1.89	13.97
Middle	Fundamental	21.86	1.86	-
	30 M ~ 1 GHz	-48.11	1.86	49.97
	1 GHz ~ 10 GHz	-12.42	1.86	14.28
High	Fundamental	21.82	1.82	-
	30 M ~ 1 GHz	-49.15	1.82	50.97
	1 GHz ~ 10 GHz	-12.44	1.82	14.26

Tabulated test data for Restricted Band


Remark: “H”: Horizontal, “V”: Vertical




**Tested by: Hyung-Kwon, Oh / Assistant Manager**

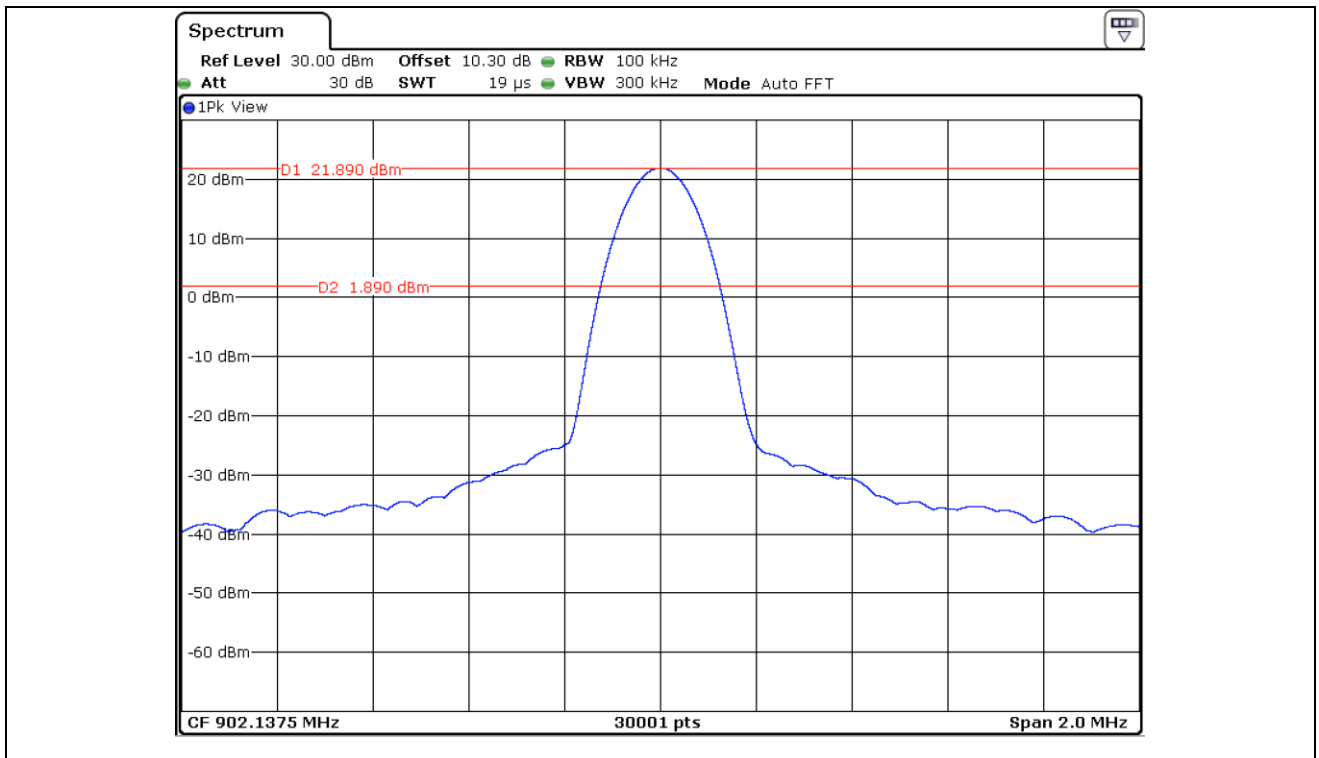


Low Channel

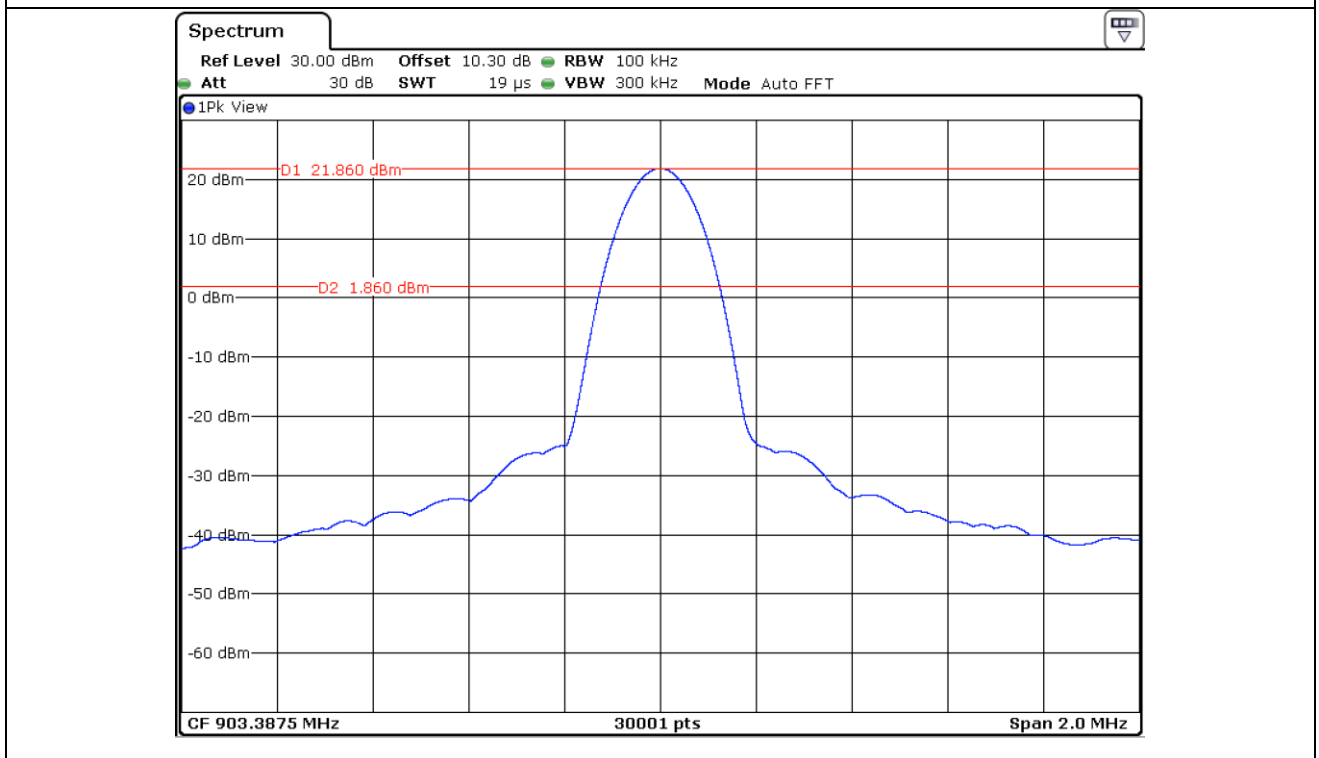


Middle Channel

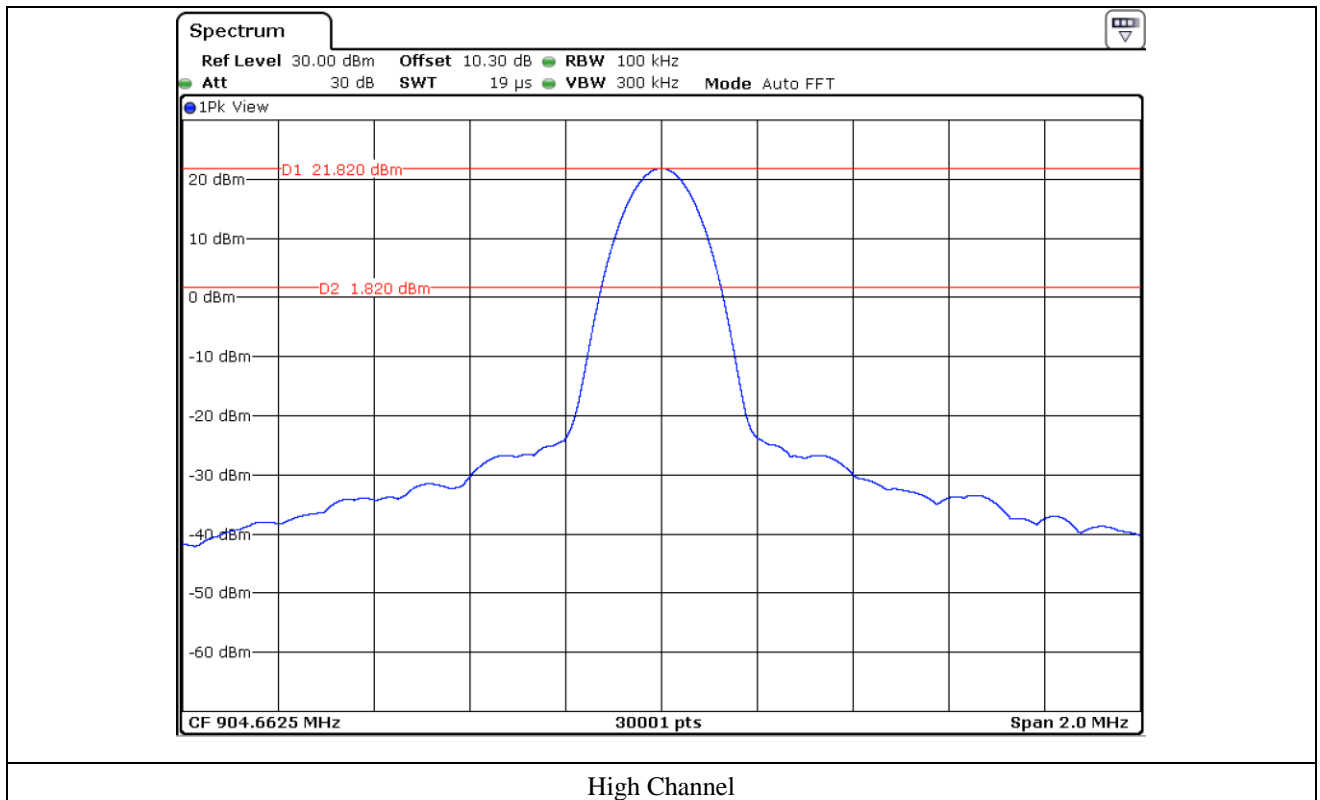


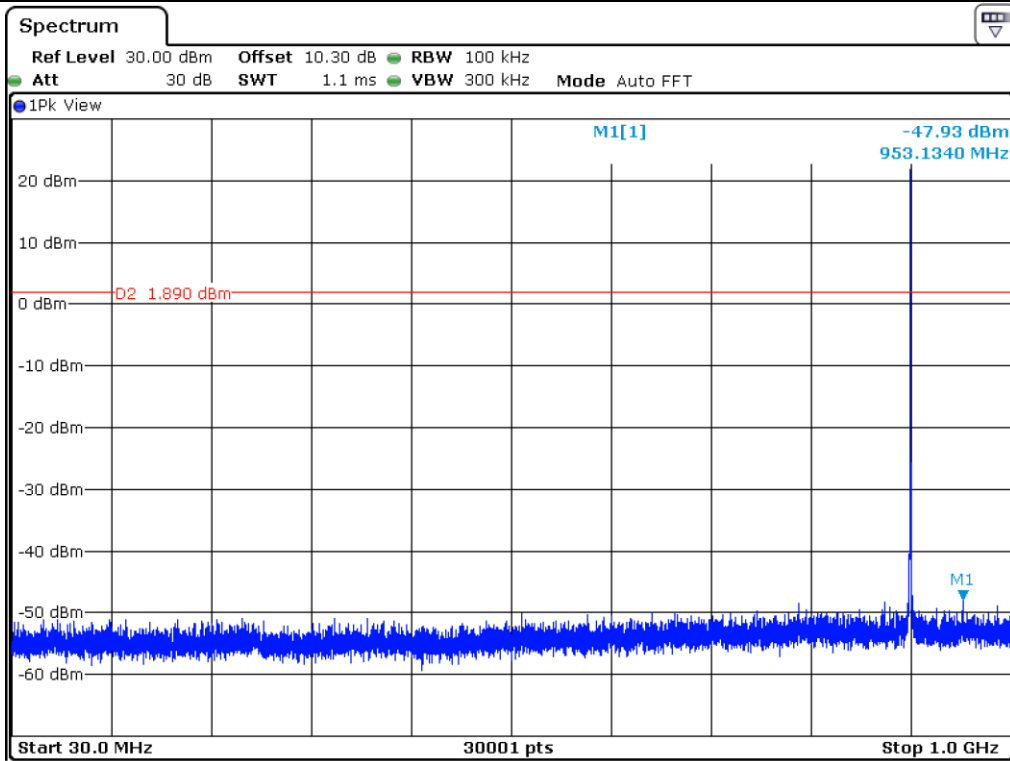


Low Channel

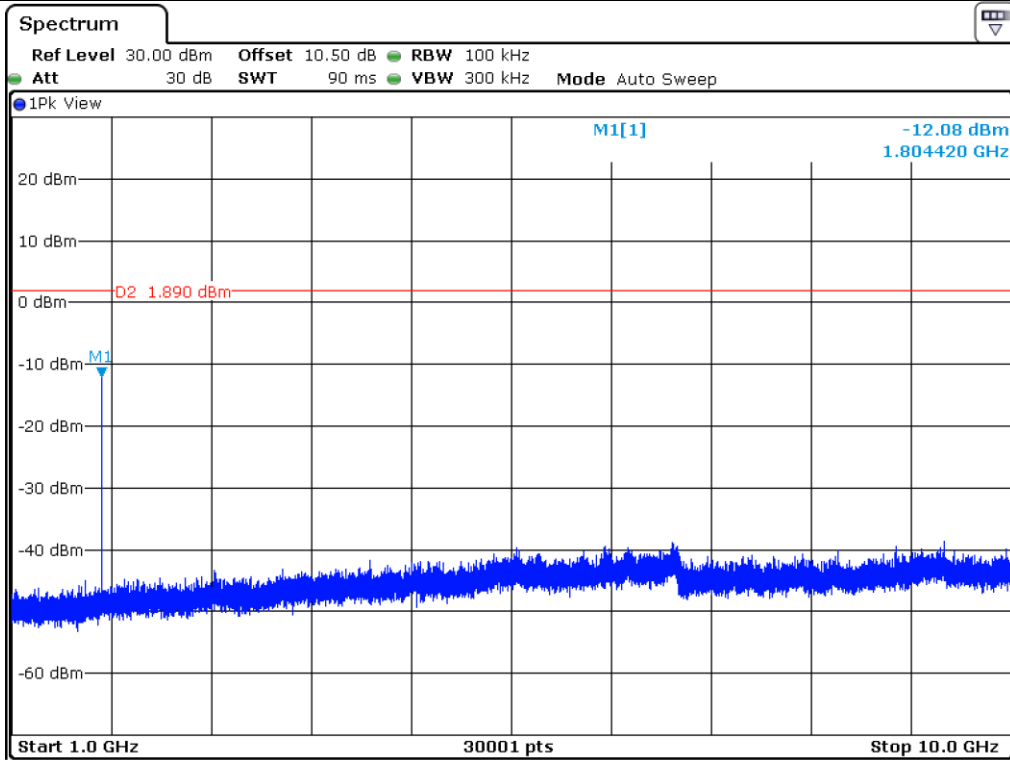


Low Channel

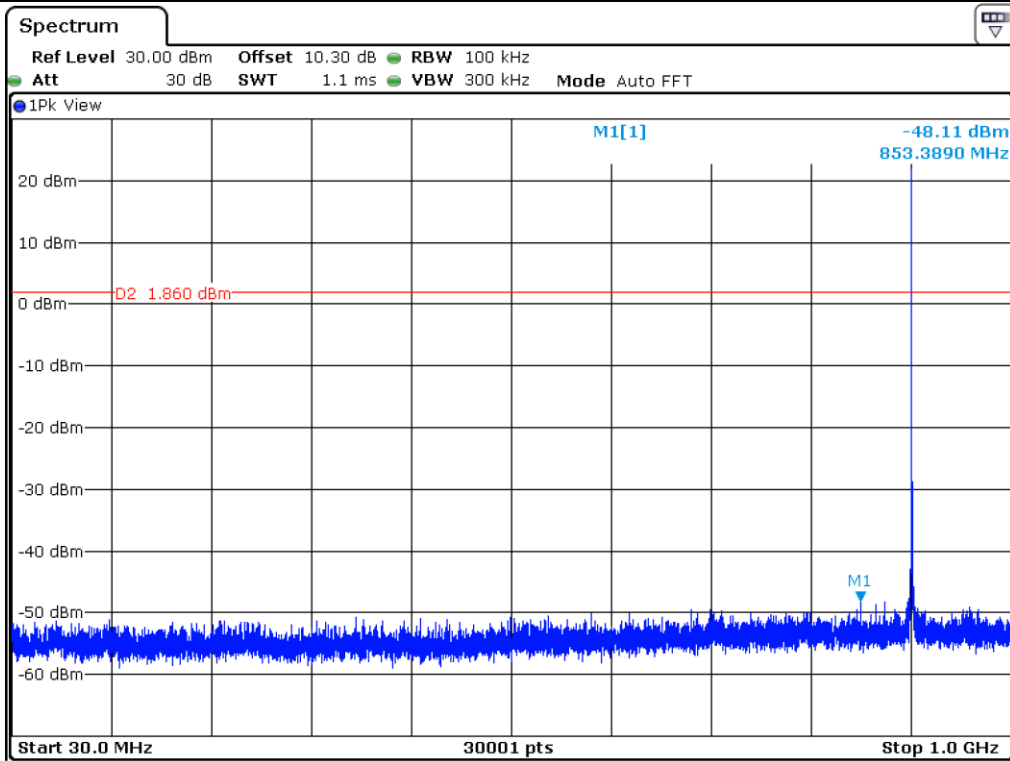


Middle Channel

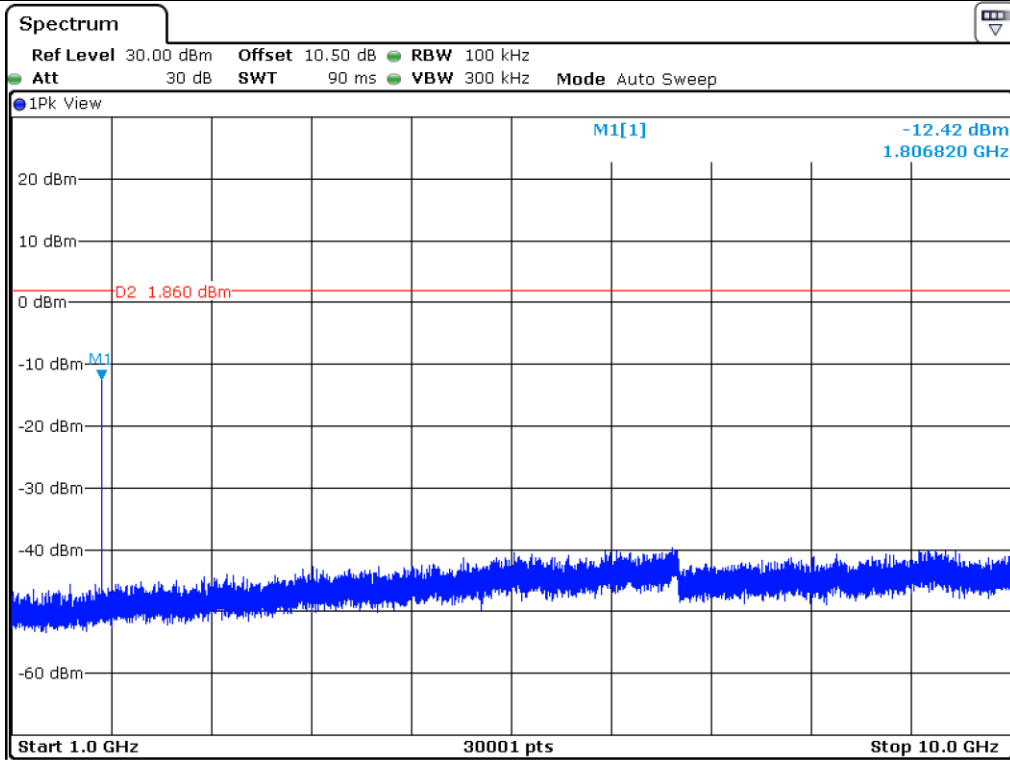

Middle Channel

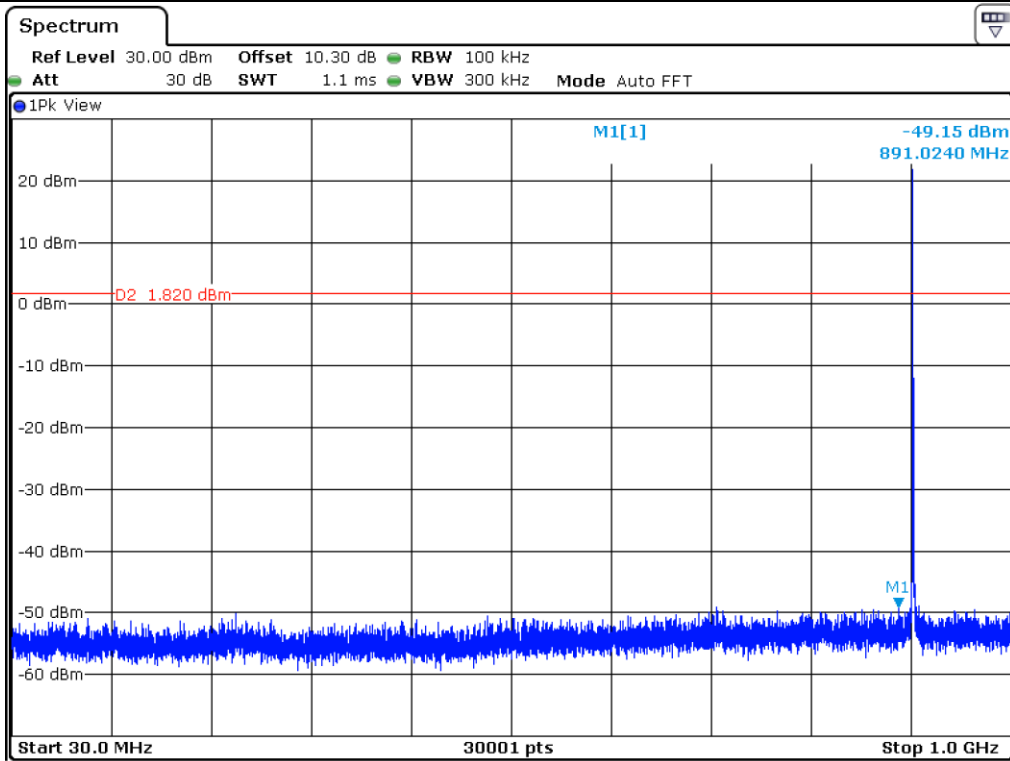

High Channel

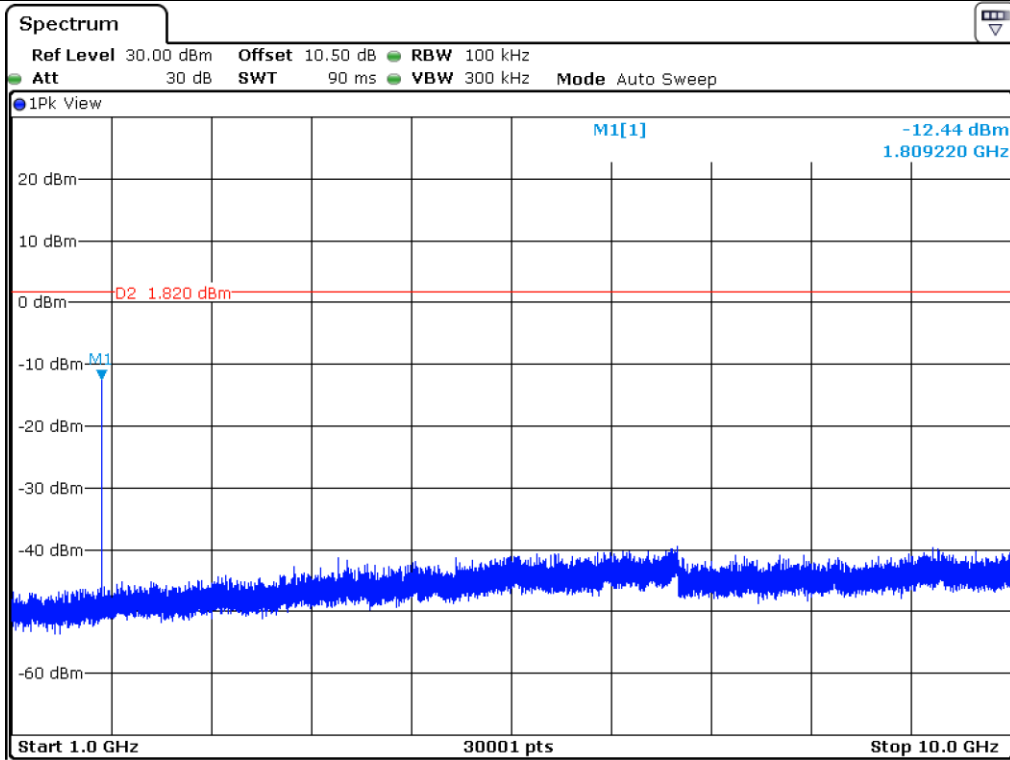

High Channel

## 12.5 Test data for Transmitting mode radiated emission

### 12.5.1 Spurious & Harmonic Radiated Emission above 1 GHz

- Test Date : May 22, 2019 ~ May 30, 2019
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak Mode(Peak Detector), 3 MHz for Average Mode(RMS Detector)
- Frequency range : 1 GHz ~ 10.0 GHz
- Measurement distance : 3 m
- Result : PASSED

Channel	Frequency (MHz)	Reading (dBUV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Correction Factor (dB)	Total (dBUV/m)	Limits (dBUV/m)	Margin (dB)
Low	1 804.25	37.74	Peak	H	24.90	1.59	-	64.23	68.20	3.97
	1 804.21	33.86	Peak	V	24.90	1.59	-	60.35	68.20	7.85
	2 706.20	19.69	Peak	H	28.00	1.28	-	48.97	74.00	25.03
	2 706.40	13.37	Average	H	28.00	1.28	4.96	47.61	54.00	6.39
	2 708.99	18.91	Peak	V	28.00	1.28	-	48.19	74.00	25.81
	2 706.40	8.83	Average	V	28.00	1.28	4.96	43.07	54.00	10.93
	3 612.62	19.73	Peak	H	29.40	1.57	-	50.70	74.00	23.30
	3 604.14	7.80	Average	H	29.40	1.57	4.96	43.73	54.00	10.27
	3 605.54	20.02	Peak	V	29.40	1.57	-	50.99	74.00	23.01
	3 611.28	7.80	Average	V	29.40	1.57	4.96	43.73	54.00	10.27
Middle	1 806.76	38.51	Peak	H	24.90	1.59	-	65.00	68.20	3.20
	1 806.86	32.81	Peak	V	24.90	1.59	-	59.30	68.20	8.90
	2 710.09	20.16	Peak	H	28.00	1.28	-	49.44	74.00	24.56
	2 710.16	13.40	Average	H	28.00	1.28	4.96	47.64	54.00	6.36
	2 706.36	19.13	Peak	V	28.00	1.28	-	48.41	74.00	25.59
	2 710.16	8.04	Average	V	28.00	1.28	4.96	42.28	54.00	11.72
	3 609.29	19.86	Peak	H	29.40	1.57	-	50.83	74.00	23.17
	3 618.38	7.87	Average	H	29.40	1.57	4.96	43.80	54.00	10.20
	3 614.90	20.04	Peak	V	29.40	1.57	-	51.01	74.00	22.99
	3 613.40	7.92	Average	V	29.40	1.57	4.96	43.85	54.00	10.15

High	1 809.34	38.89	Peak	H	24.90	1.59	-	65.38	68.20	2.82
	1 809.32	32.20	Peak	V	24.90	1.59	-	58.69	68.20	9.51
	2 713.85	20.35	Peak	H	28.00	1.28	-	49.63	74.00	24.37
	2 713.99	15.02	Average	H	28.00	1.28	4.96	49.26	54.00	4.74
	2 710.49	18.98	Peak	V	28.00	1.28	-	48.26	74.00	25.74
	2 713.98	9.03	Average	V	28.00	1.28	4.96	43.27	54.00	10.73
	3 622.23	20.16	Peak	H	29.40	1.57	-	51.13	74.00	22.87
	3 618.46	8.09	Average	H	29.40	1.57	4.96	44.02	54.00	9.98
	3 617.82	20.00	Peak	V	29.40	1.57	-	50.97	74.00	23.03
	3 619.05	8.20	Average	V	29.40	1.57	4.96	44.13	54.00	9.87


Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "\*" Frequency fall in restricted band




**Tested by: Hyung-Kwon, Oh / Assistant Manager**




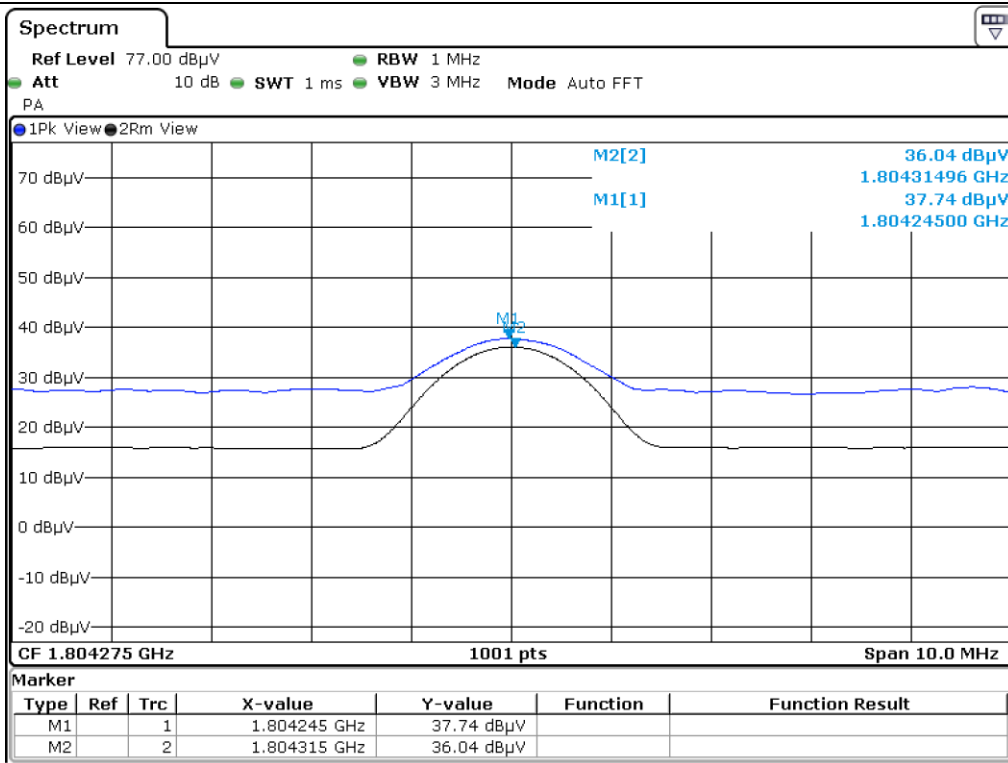


Low Channel\_H

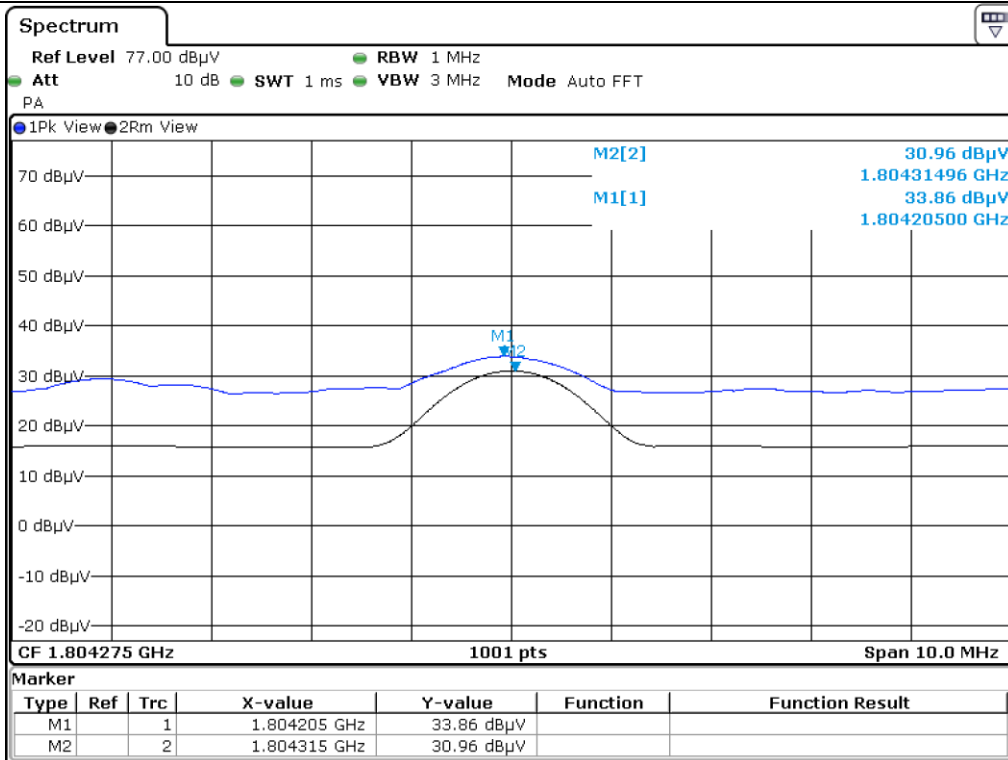


Low Channel\_V

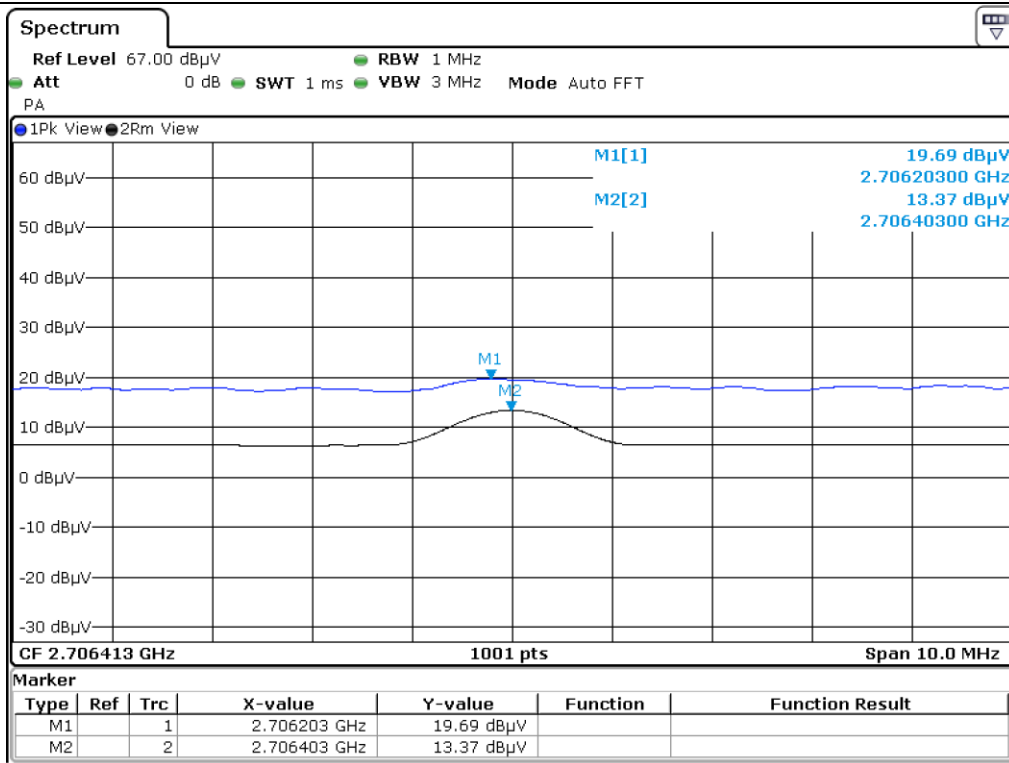


Low Channel\_H

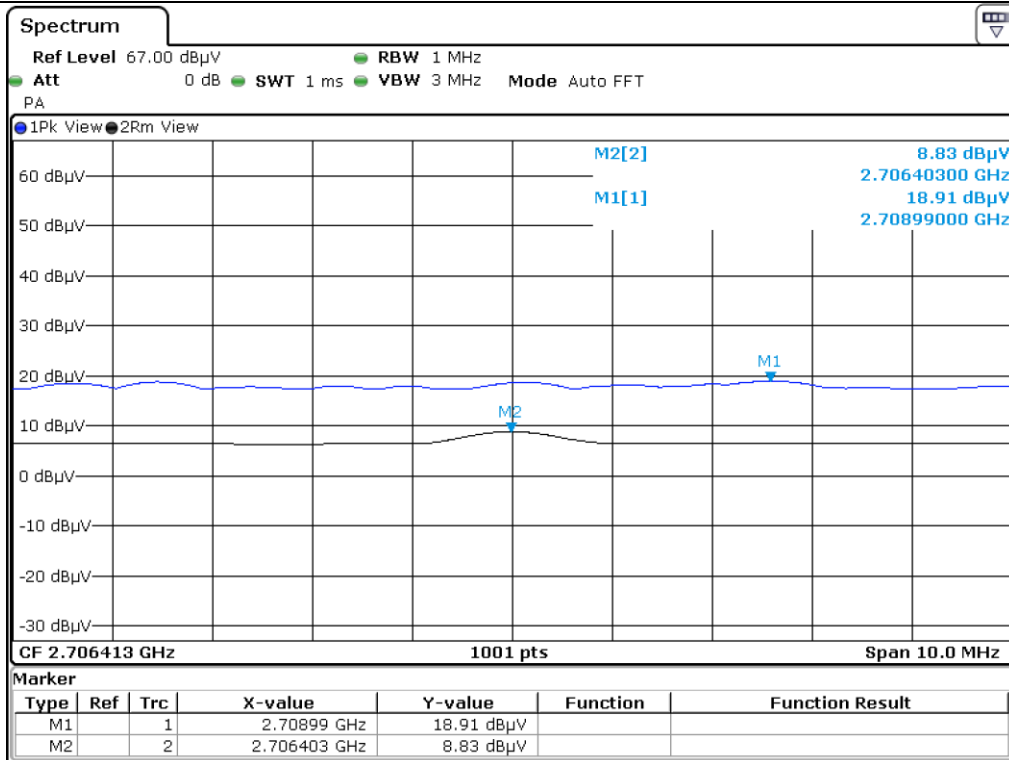


Low Channel\_V

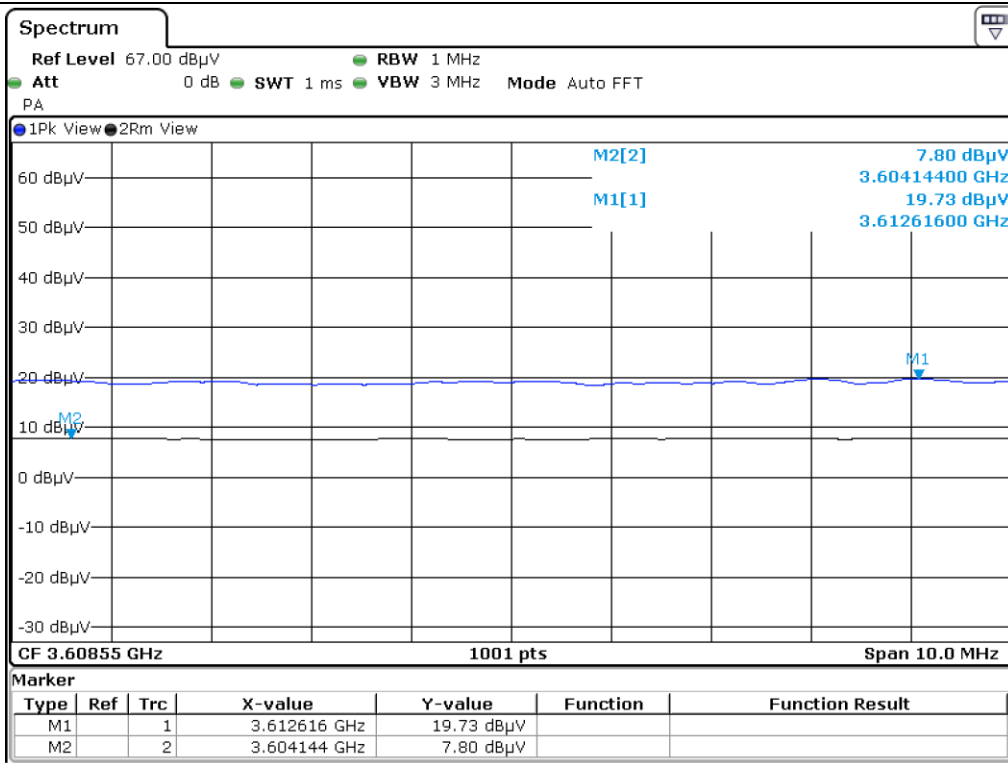


Low Channel\_H

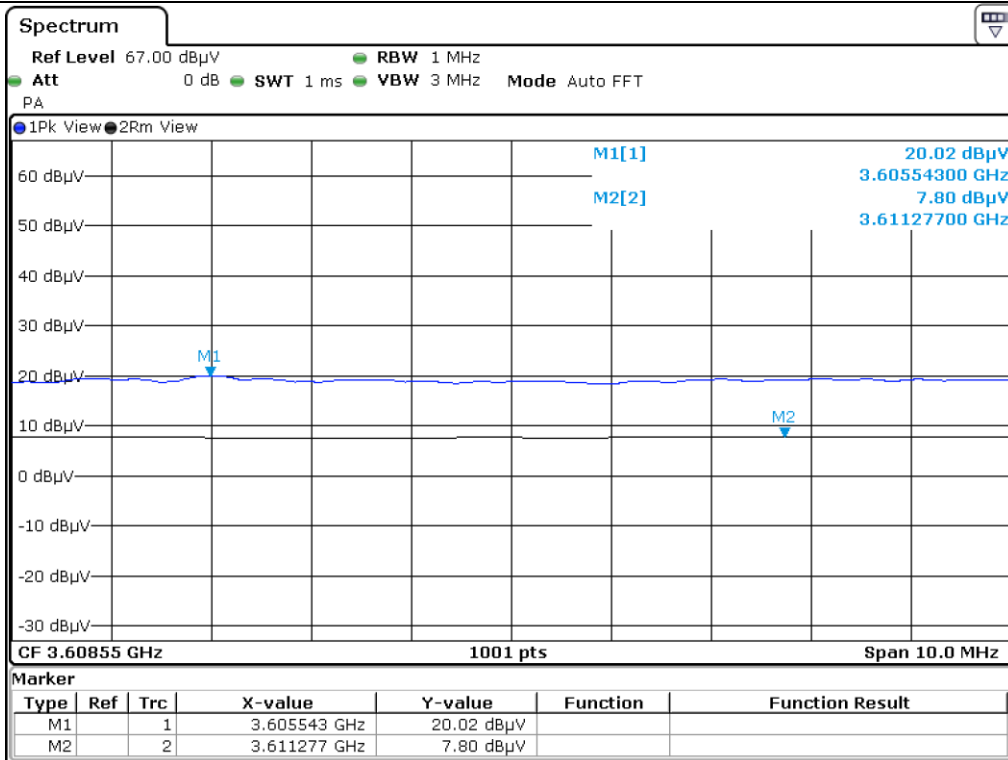


Low Channel\_V

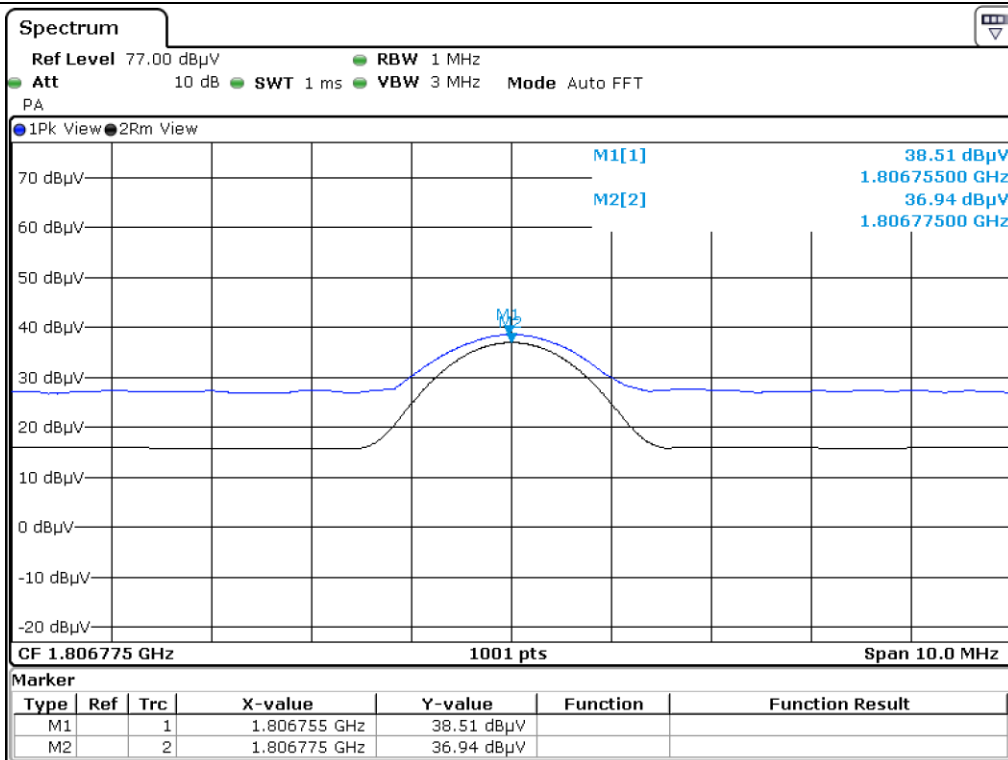


Middle Channel\_H

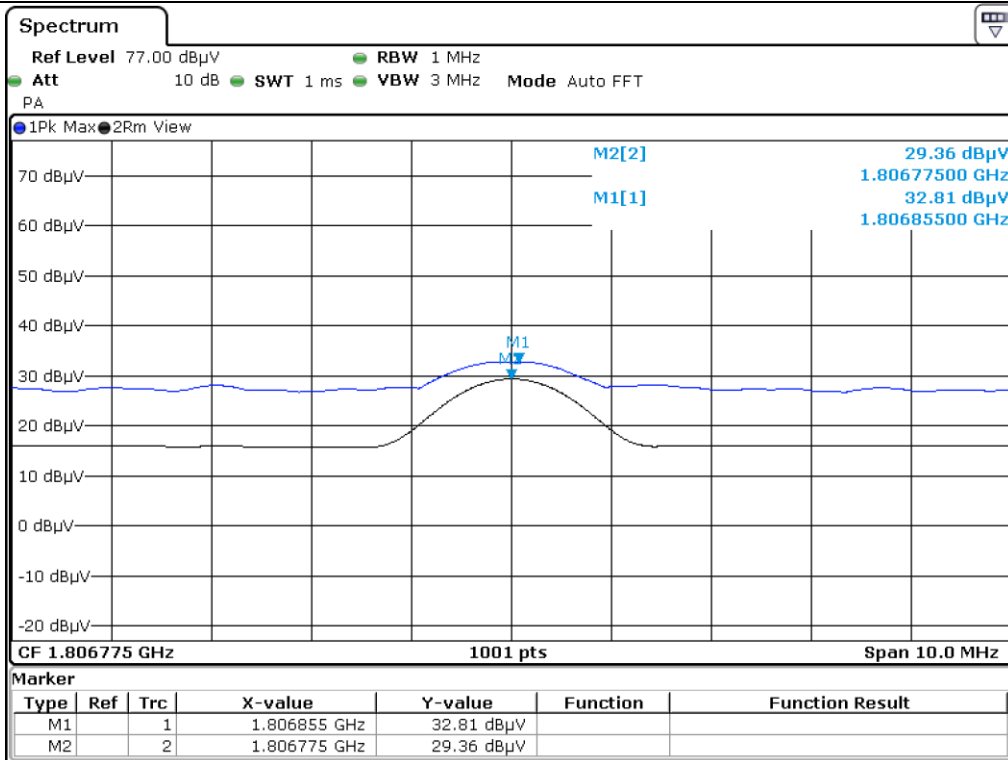


Middle Channel\_V

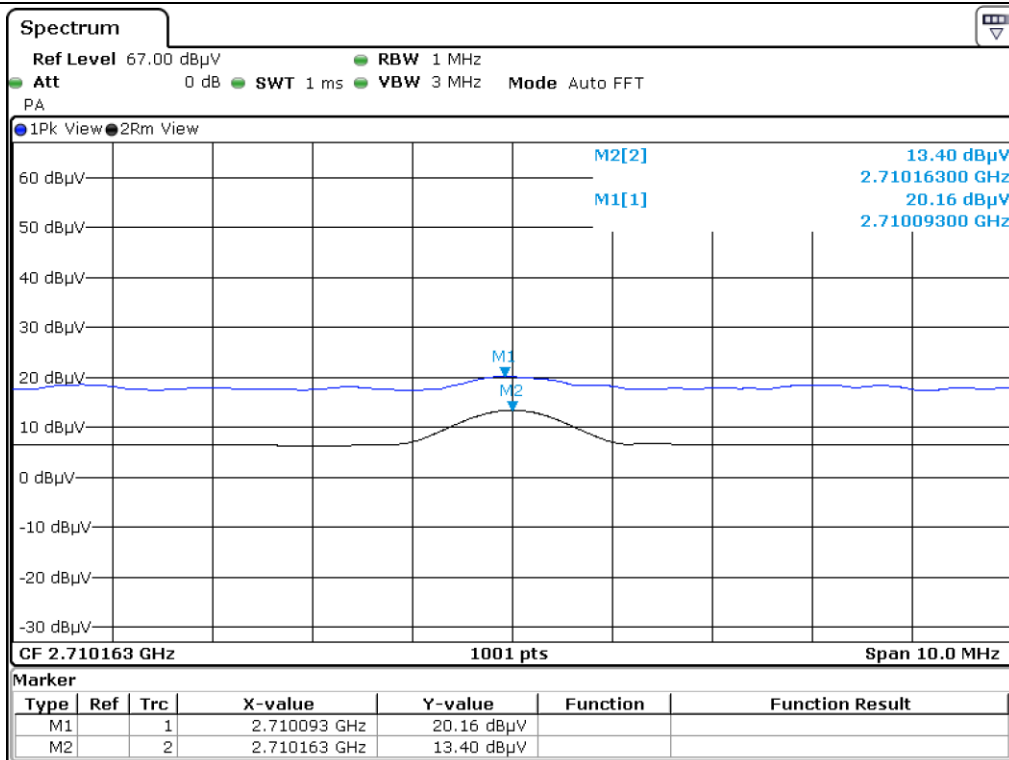


Middle Channel\_H

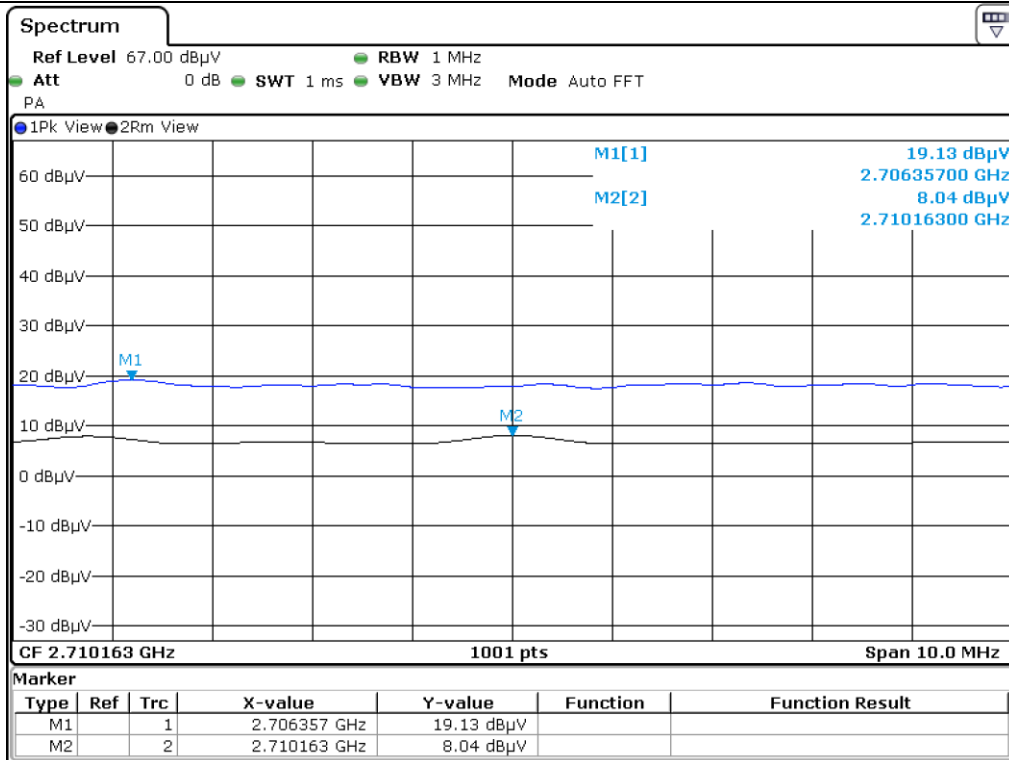


Middle Channel\_V

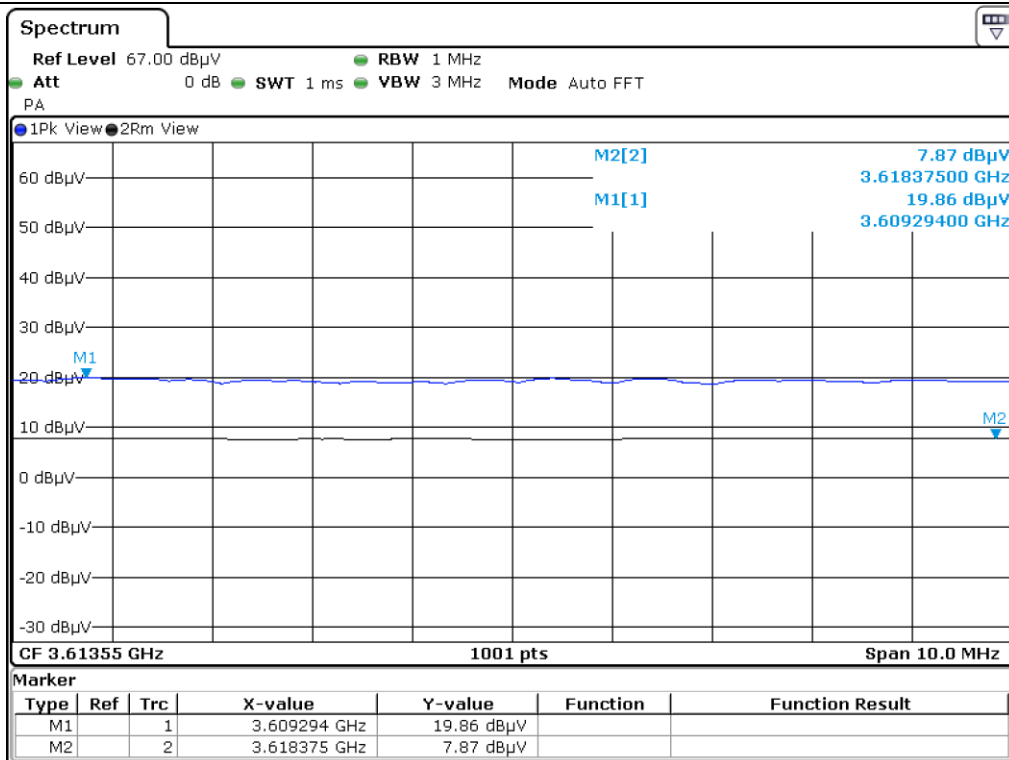


Middle Channel\_H

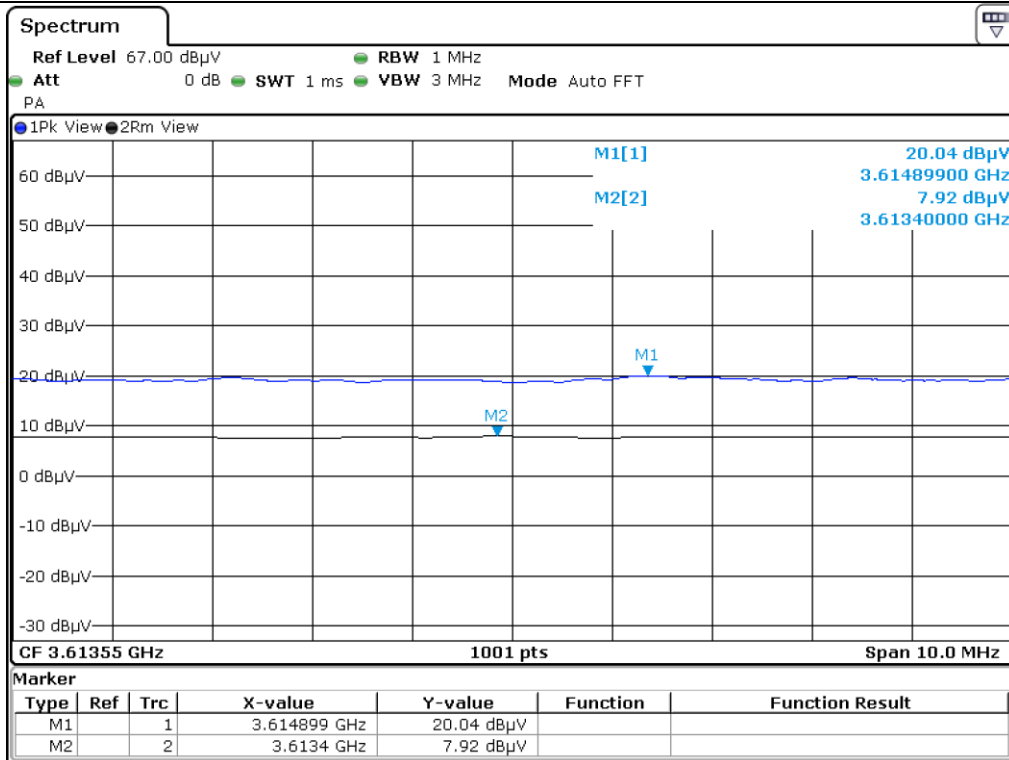


Middle Channel\_V

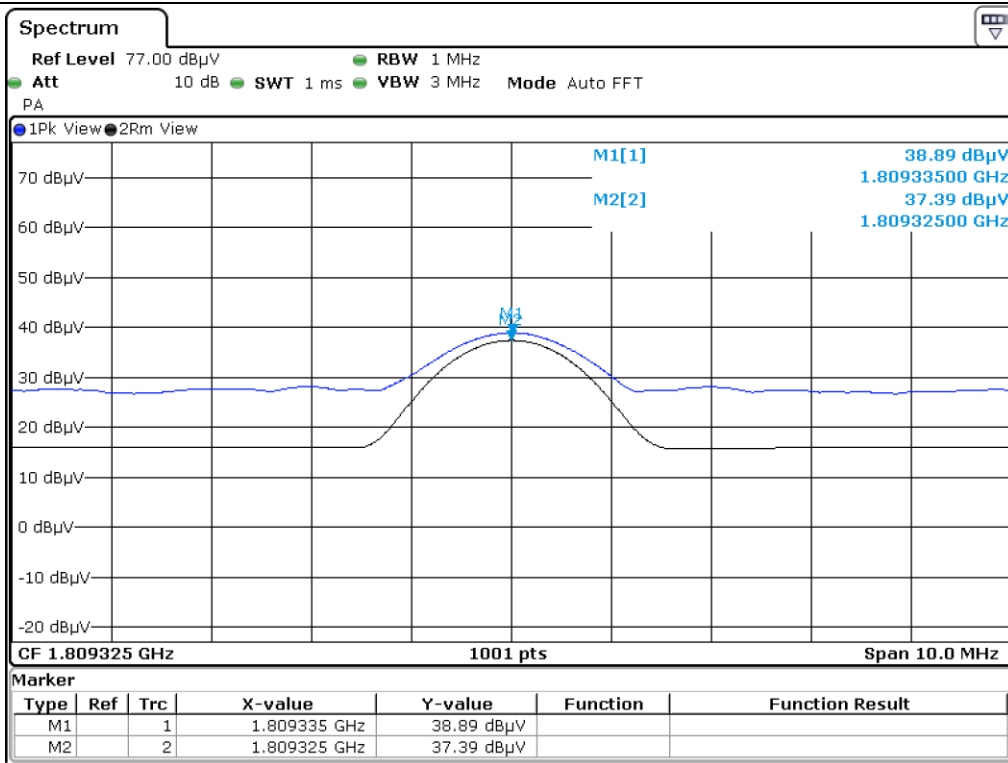


High Channel\_H

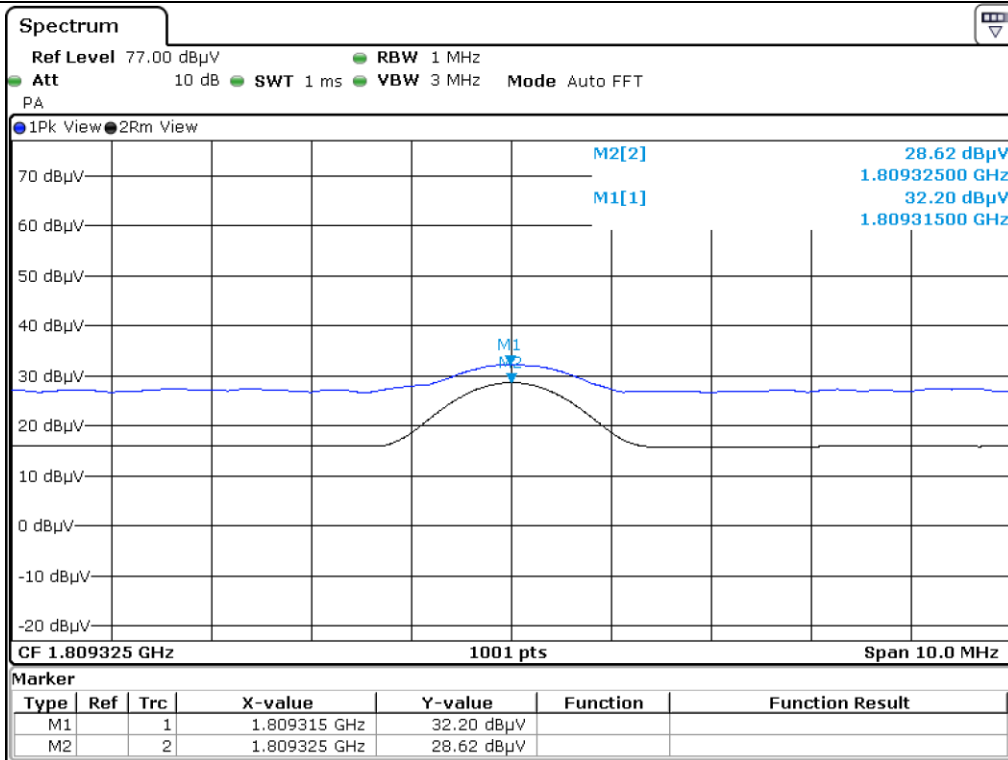

High Channel\_V

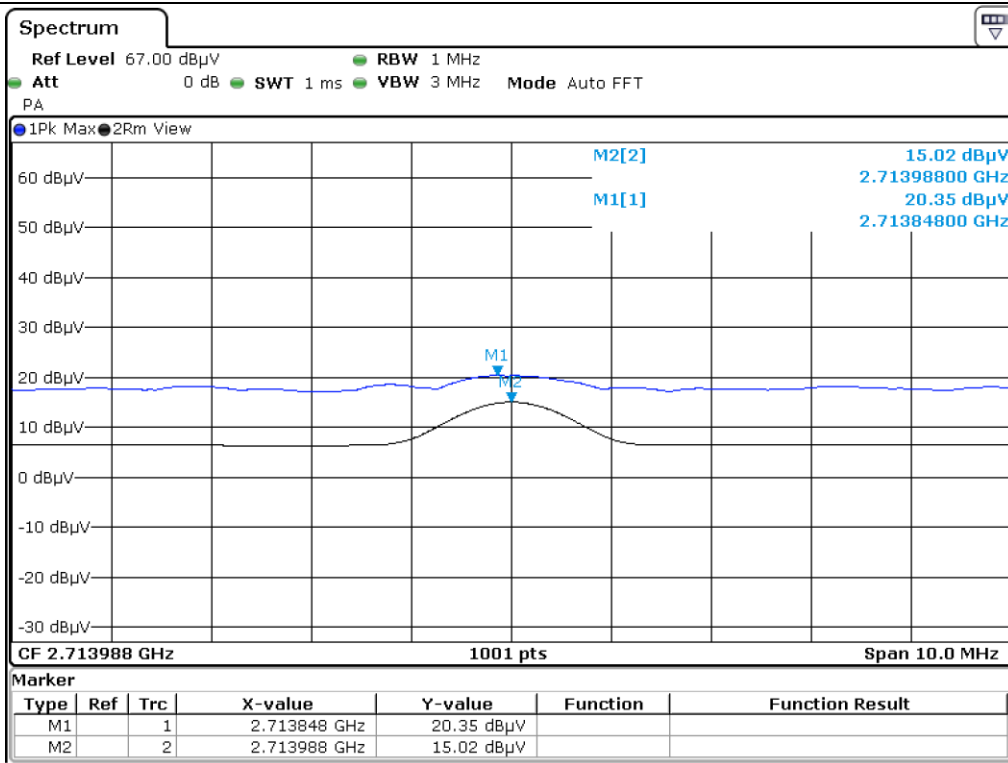


High Channel\_H

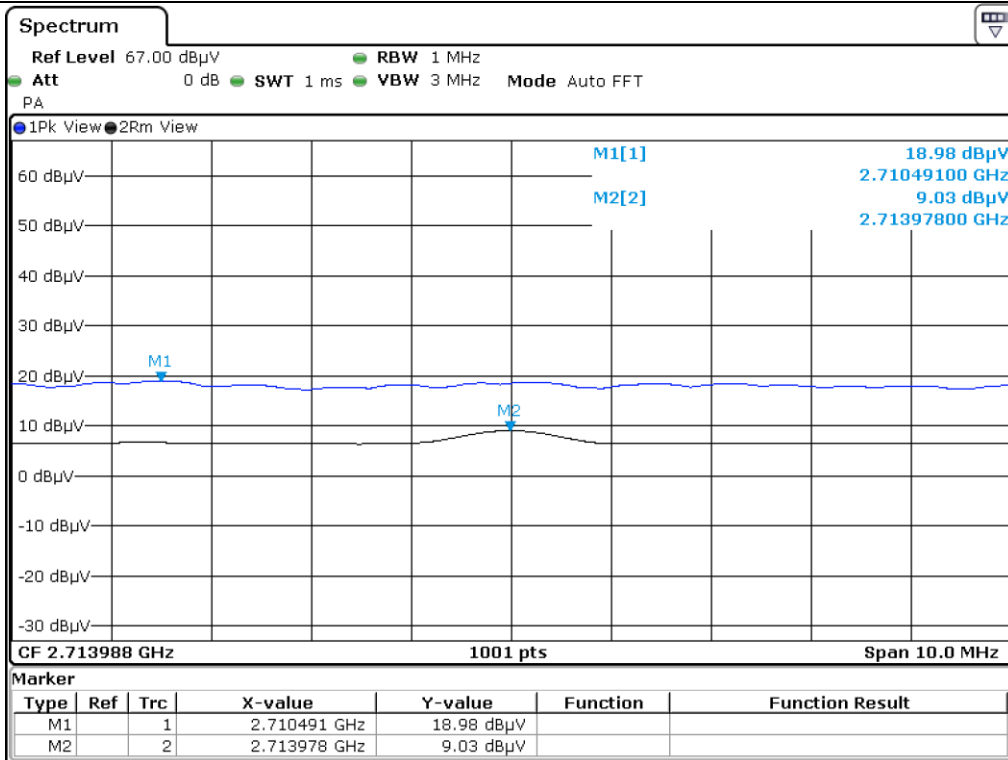


High Channel\_V



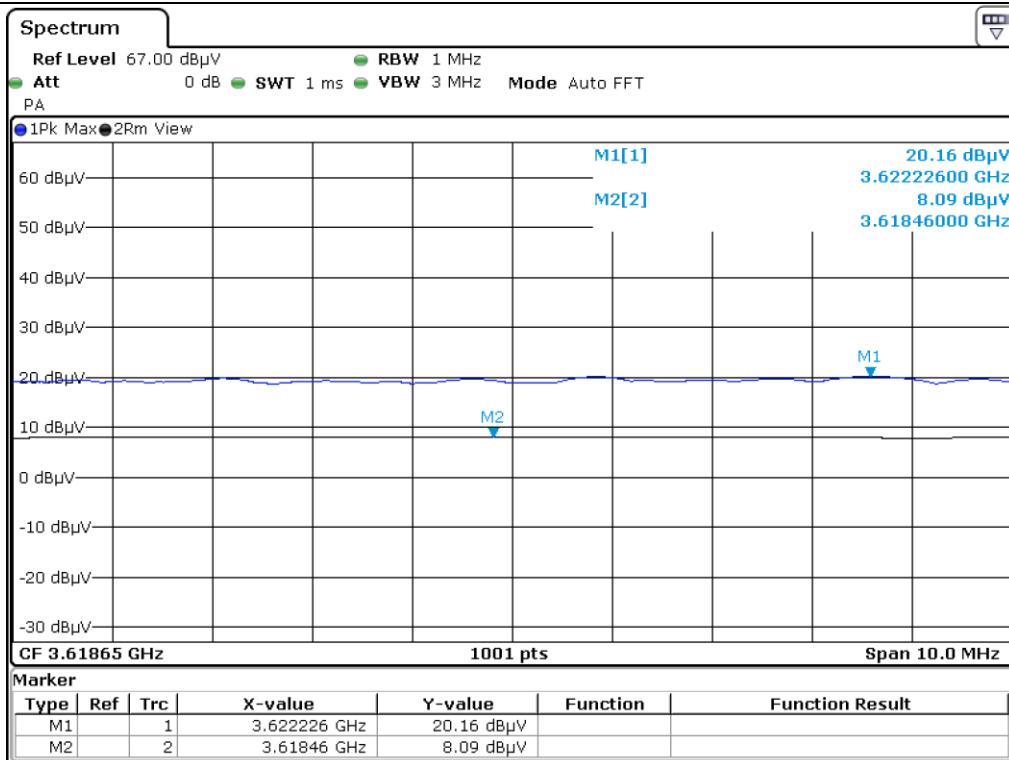

High Channel\_H

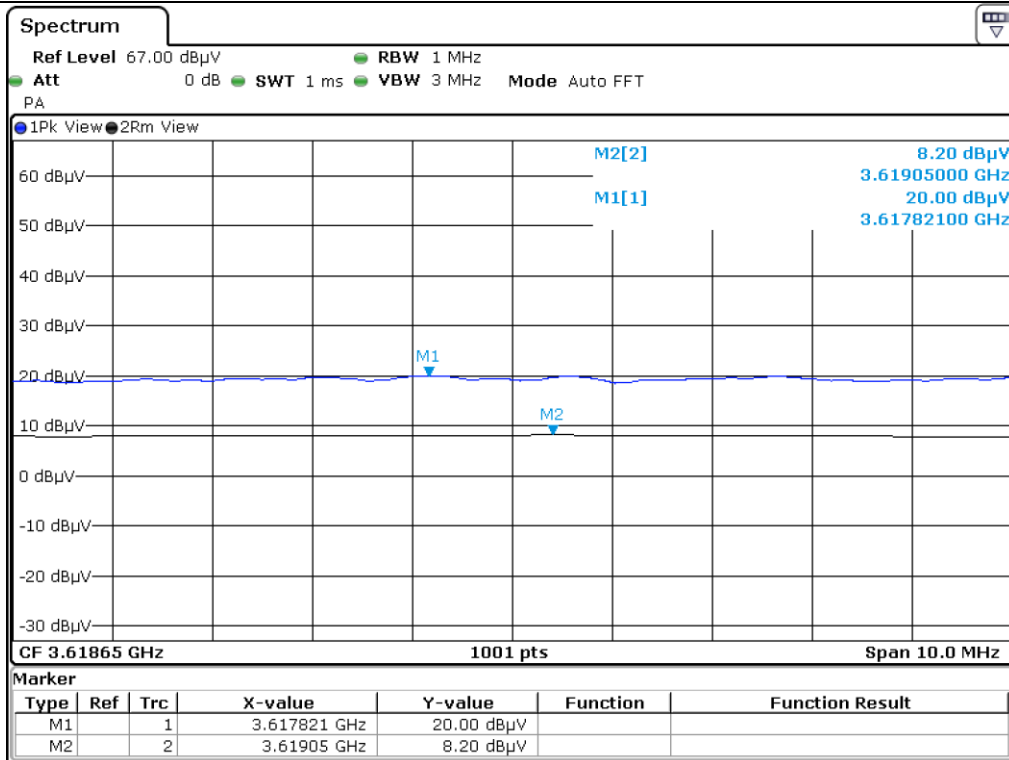

High Channel\_V

### 13. RADIATED EMISSION TEST

#### 13.1 Operating environment

Temperature : 24 °C  
 Relative humidity : 43 % R.H.

#### 13.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 9 kHz to 10.0 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

#### 13.3 Test equipment used


Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Mar. 28, 2019 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312545	Mar. 18, 2019 (1Y)
■ - BBV9718	Schwarzbeck	Amplifier	310	Mar. 28, 2019 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	777	Apr. 13, 2018 (2Y)
■ - BBHA 9120D	Schwarzbeck	Horn Antenna	9120D-1366	Aug. 02, 2017 (2Y)
■ - BBHA 9170	Schwarzbeck	Horn Antenna	BBHA9170179	Jan. 16, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

13.4 Test data

13.4.1 Test data for 30 MHz ~ 1 000 MHz

- . Test Date : May 22, 2019 ~ May 30, 2019
- . Resolution bandwidth : 120 kHz
- . Frequency range : 30 MHz ~ 1 000 MHz
- . Measurement distance : 3 m

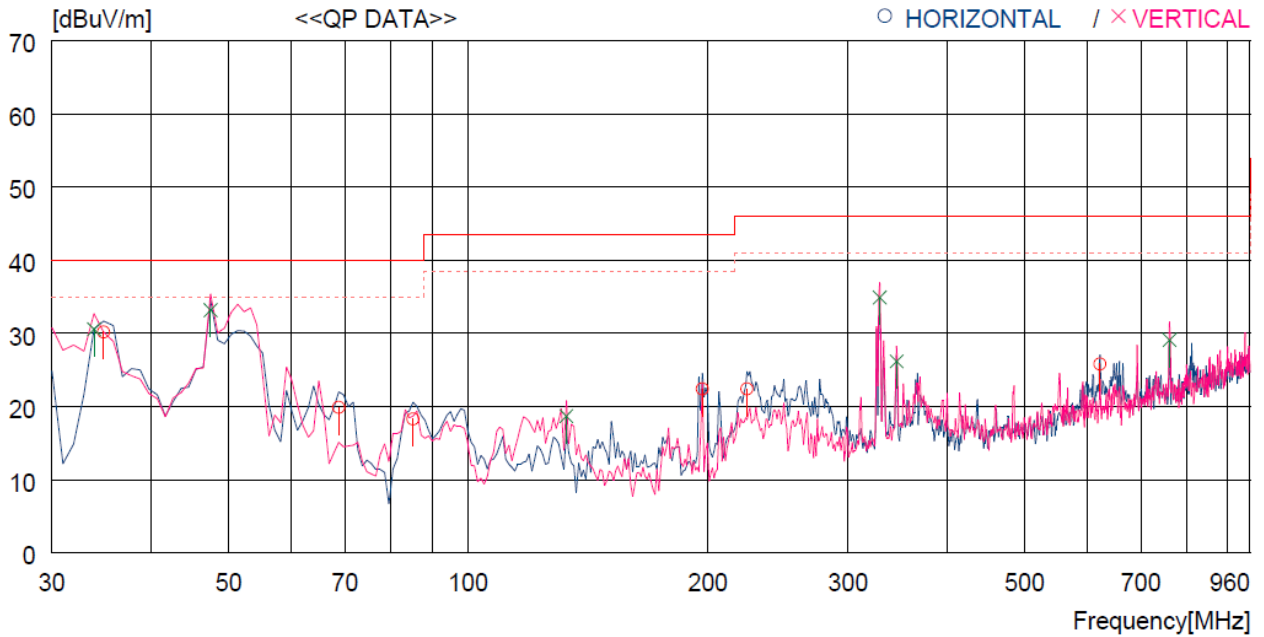

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	34.850	48.6	13.3	1.4	33.1	30.2	40.0	9.8	100	252
2	68.800	41.2	9.8	2.0	33.1	19.9	40.0	20.1	100	268
3	85.290	39.7	9.5	2.1	33.0	18.3	40.0	21.7	100	202
4	196.840	41.3	10.8	3.3	33.0	22.4	43.5	21.1	100	268
5	224.000	40.3	11.6	3.4	32.9	22.4	46.0	23.6	100	268
6	621.697	33.8	19.6	5.7	33.3	25.8	46.0	20.2	100	212
----- Vertical -----										
7	33.880	49.2	13.1	1.4	33.1	30.6	40.0	9.4	100	202
8	47.460	50.4	14.3	1.6	33.1	33.2	40.0	6.8	100	202
9	132.820	40.2	8.9	2.6	33.0	18.7	43.5	24.8	100	251
10	328.760	49.5	14.2	4.2	33.0	34.9	46.0	11.1	100	202
11	345.250	40.2	14.7	4.3	33.0	26.2	46.0	19.8	100	202
12	760.403	35.1	20.8	6.4	33.2	29.1	46.0	16.9	100	243

Tested by: Hyung-Kwon, Oh / Assistant Manager

**13.4.2 Test data for Below 30 MHz**

- . Test Date : May 22, 2019 ~ May 30, 2019
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dB $\mu$ V)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
It was not observed any emissions from the EUT.								

**13.4.3 Test data for above 1 GHz**

- . Test Date : May 22, 2019 ~ May 30, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 10.0 GHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dB $\mu$ V)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
It was not observed any emissions from the EUT.								



Tested by: Hyung-Kwon, Oh / Assistant Manager

## 14. CONDUCTED EMISSION TEST

### 14.1 Operating environment

Temperature : 24 °C  
 Relative humidity : 43 % R.H.

### 14.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μH + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.


### 14.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ -	ESCI	Rohde & Schwarz	Test Receiver	101012	Oct. 22, 2018 (1Y)
□ -	NSLK8128	Schwarzbeck	AMN	8128-216	Mar. 20, 2019 (1Y)
■ -	NSLK8126	Schwarzbeck	AMN	8126-404	Mar. 19, 2019 (1Y)
□ -	3825/2	EMCO	AMN	9109-1869	Mar. 19, 2019 (1Y)
■ -	3825/2	EMCO	AMN	9109-1867	Mar. 27, 2019 (1Y)

All test equipment used is calibrated on a regular basis.


14.4 Test data

- Test Date : May 22, 2019 ~ May 30, 2019
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

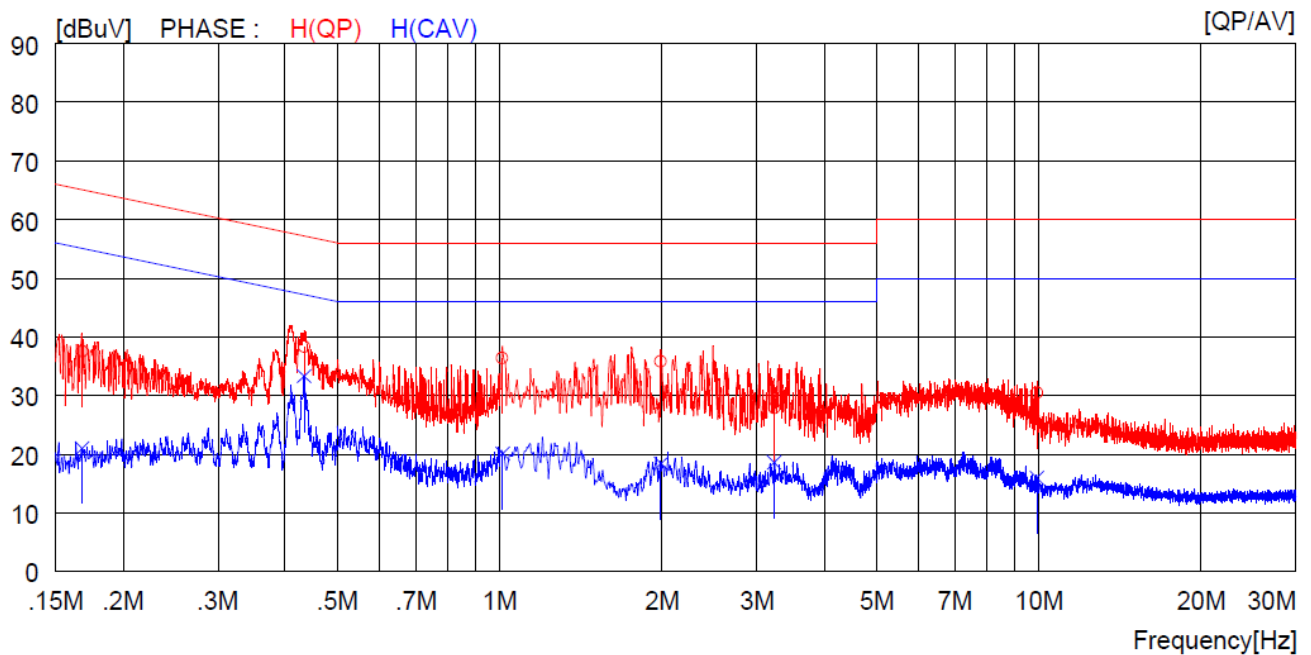

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16800	27.4	----	10.1	37.5	----	65.1	----	27.6	----	H (QP)
2	0.43400	28.2	----	10.1	38.3	----	57.2	----	18.9	----	H (QP)
3	1.01200	26.3	----	10.1	36.4	----	56.0	----	19.6	----	H (QP)
4	1.99200	25.7	----	10.1	35.8	----	56.0	----	20.2	----	H (QP)
5	3.22800	17.7	----	10.1	27.8	----	56.0	----	28.2	----	H (QP)
6	9.92500	20.1	----	10.3	30.4	----	60.0	----	29.6	----	H (QP)
7	0.16800	----	10.9	10.1	----	21.0	----	55.1	----	34.1	H (CAV)
8	0.43400	----	23.2	10.1	----	33.3	----	47.2	----	13.9	H (CAV)
9	1.01200	----	10.0	10.1	----	20.1	----	46.0	----	25.9	H (CAV)
10	1.99200	----	8.3	10.1	----	18.4	----	46.0	----	27.6	H (CAV)
11	3.22800	----	8.5	10.1	----	18.6	----	46.0	----	27.4	H (CAV)
12	9.92500	----	5.7	10.3	----	16.0	----	50.0	----	34.0	H (CAV)

-. Tested Line : NEUTRAL LINE

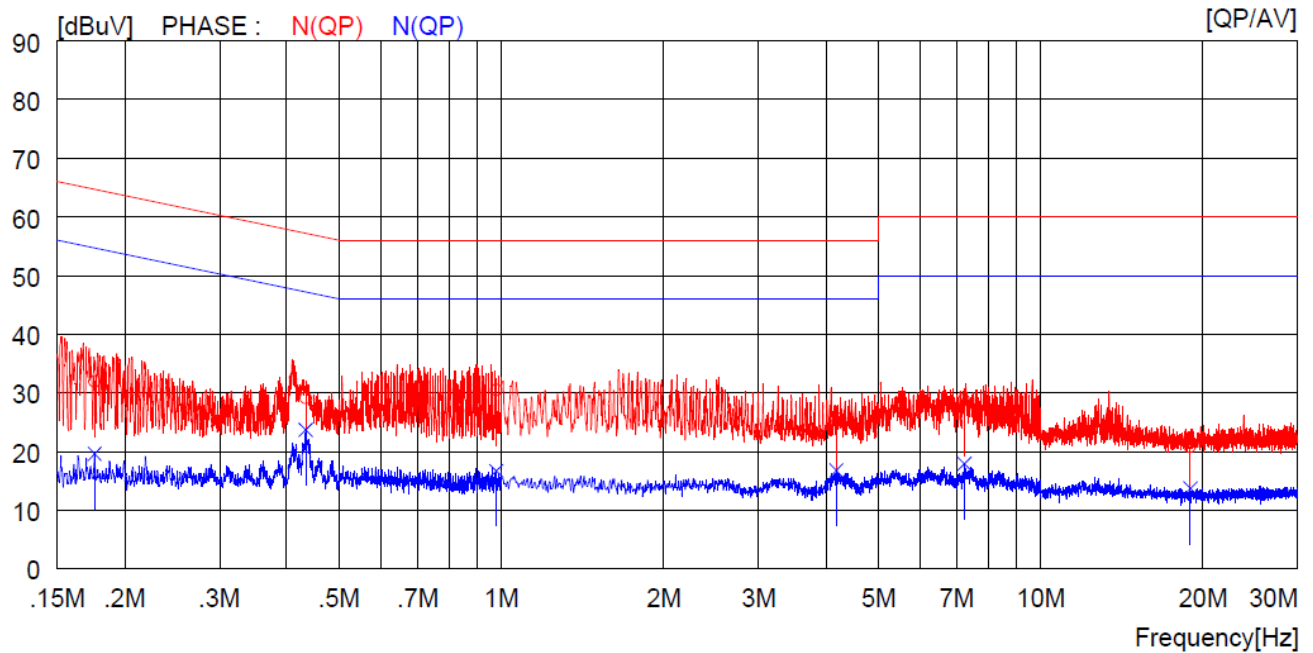

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.17600	21.8	----	10.1	31.9	----	64.7	----	32.8	----	N (QP)
2	0.43400	19.0	----	10.1	29.1	----	57.2	----	28.1	----	N (QP)
3	0.97900	20.4	----	10.1	30.5	----	56.0	----	25.5	----	N (QP)
4	4.18000	15.6	----	10.1	25.7	----	56.0	----	30.3	----	N (QP)
5	7.22000	18.6	----	10.2	28.8	----	60.0	----	31.2	----	N (QP)
6	18.95000	10.4	----	10.4	20.8	----	60.0	----	39.2	----	N (QP)
7	0.17600	----	9.5	10.1	----	19.6	----	54.7	----	35.1	NCAV)
8	0.43400	----	13.6	10.1	----	23.7	----	47.2	----	23.5	NCAV)
9	0.97900	----	6.6	10.1	----	16.7	----	46.0	----	29.3	NCAV)
10	4.18000	----	6.7	10.1	----	16.8	----	46.0	----	29.2	NCAV)
11	7.22000	----	7.7	10.2	----	17.9	----	50.0	----	32.1	NCAV)
12	18.95000	----	3.3	10.4	----	13.7	----	50.0	----	36.3	NCAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Tested by: Hyung-Kwon, Oh / Assistant Manager