

# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

**Test Report No.** : OT-202-RWD-027  
**AGR No.** : A202A-006  
**Applicant** : AMOSENSE  
**Address** : 56 Naruteo-ro, Seocho-gu, SEOUL, South Korea  
**Manufacturer** : AMOSENSE  
**Address** : 56 Naruteo-ro, Seocho-gu, SEOUL, South Korea  
**Type of Equipment** : ATOZ  
**FCC ID.** : 2AS9T-SB52SW2  
**Model Name** : SB52-SW  
**Multiple Model Name** : N/A  
**Serial number** : N/A  
**Total page of Report** : 84 pages (including this page)  
**Date of Incoming** : February 03, 2020  
**Date of issue** : February 13, 2020

## SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.


It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:



Tae-Ho, Kim / Senior Manager  
ONETECH Corp.

Approved by:



Ki-Hong, Nam / General Manager  
ONETECH Corp.

## CONTENTS

	PAGE
<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>5</b>
<b>2. TEST SUMMARY.....</b>	<b>6</b>
<b>2.1 TEST ITEMS AND RESULTS .....</b>	<b>6</b>
<b>2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....</b>	<b>6</b>
<b>2.3 RELATED SUBMITTAL(S) / GRANT(S) .....</b>	<b>6</b>
<b>2.4 PURPOSE OF THE TEST .....</b>	<b>6</b>
<b>2.5 TEST METHODOLOGY.....</b>	<b>6</b>
<b>2.6 TEST FACILITY.....</b>	<b>6</b>
<b>3. GENERAL INFORMATION.....</b>	<b>7</b>
<b>3.1 PRODUCT DESCRIPTION.....</b>	<b>7</b>
<b>3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....</b>	<b>8</b>
<b>4. EUT MODIFICATIONS.....</b>	<b>8</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>9</b>
<b>5.1 JUSTIFICATION .....</b>	<b>9</b>
<b>5.2 PERIPHERAL EQUIPMENT .....</b>	<b>9</b>
<b>5.4 CONFIGURATION OF TEST SYSTEM .....</b>	<b>19</b>
<b>5.5 ANTENNA REQUIREMENT .....</b>	<b>19</b>
<b>6. PRELIMINARY TEST .....</b>	<b>20</b>
<b>6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....</b>	<b>20</b>
<b>6.2 GENERAL RADIATED EMISSIONS TESTS .....</b>	<b>20</b>
<b>7. MINIMUM 6 DB BANDWIDTH .....</b>	<b>21</b>
<b>7.1 OPERATING ENVIRONMENT .....</b>	<b>21</b>
<b>7.2 TEST SET-UP .....</b>	<b>21</b>
<b>7.3 TEST EQUIPMENT USED.....</b>	<b>21</b>
<b>7.4 TEST DATA FOR 802.11B WLAN MODE.....</b>	<b>22</b>
<b>7.5 TEST DATA FOR 802.11G WLAN MODE .....</b>	<b>24</b>
<b>7.6 TEST DATA FOR 802.11N_HT20 WLAN MODE.....</b>	<b>26</b>
<b>8. MAXIMUM CONDUCTED (AVERAGE) OUTPUT POWER .....</b>	<b>28</b>
<b>8.1 OPERATING ENVIRONMENT .....</b>	<b>28</b>
<b>8.2 TEST SET-UP .....</b>	<b>28</b>
<b>8.3 TEST EQUIPMENT USED.....</b>	<b>28</b>

<b>8.4 TEST DATA FOR 802.11B WLAN MODE.....</b>	29
<b>8.5 TEST DATA FOR 802.11G WLAN MODE .....</b>	31
<b>9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....</b>	35
<b>9.1 OPERATING ENVIRONMENT .....</b>	35
<b>9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT .....</b>	35
<b>9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....</b>	35
<b>9.4 TEST EQUIPMENT USED.....</b>	35
<b>9.5 TEST DATA FOR CONDUCTED EMISSION .....</b>	36
<i>9.5.1 Test data for 802.11b WLAN Mode.....</i>	36
<i>9.5.2 Test data for 802.11g WLAN Mode.....</i>	41
<i>9.5.3 Test data for 802.11n_HT20 WLAN Mode .....</i>	46
<b>9.6 TEST DATA FOR RADIATED EMISSION.....</b>	51
<i>9.6.1 Radiated Emission which fall in the Restricted Band.....</i>	51
<b>10. PEAK POWER SPECTRUL DENSITY .....</b>	72
<b>10.1 OPERATING ENVIRONMENT .....</b>	72
<b>10.2 TEST SET-UP .....</b>	72
<b>10.3 TEST EQUIPMENT USED.....</b>	72
<b>10.4 TEST DATA FOR 802.11B WLAN MODE.....</b>	73
<b>10.5 TEST DATA FOR 802.11G WLAN MODE .....</b>	75
<b>10.6 TEST DATA FOR 802.11N_HT20 WLAN MODE .....</b>	77
<b>11. RADIATED EMISSION TEST .....</b>	79
<b>11.1 OPERATING ENVIRONMENT .....</b>	79
<b>11.2 TEST SET-UP .....</b>	79
<b>11.3 TEST EQUIPMENT USED.....</b>	79
<b>11.4 TEST DATA FOR 30 MHZ ~ 1 GHZ.....</b>	80
<b>11.5 TEST DATA FOR BELOW 30 MHZ .....</b>	81
<b>11.6 TEST DATA FOR ABOVE 1 GHZ .....</b>	81
<b>12. CONDUCTED EMISSION TEST.....</b>	82
<b>12.1 OPERATING ENVIRONMENT .....</b>	82
<b>12.2 TEST SET-UP .....</b>	82
<b>12.3 TEST EQUIPMENT USED.....</b>	82
<b>12.4 TEST DATA.....</b>	83

**Revision History**

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-202-RWD-027	February 13, 2020	Initial Release	All

## 1. VERIFICATION OF COMPLIANCE

Applicant : AMOSENSE  
Address : 56 Naruteo-ro, Seocho-gu, SEOUL, South Korea  
Manufacturer : AMOSENSE  
Address : 56 Naruteo-ro, Seocho-gu, SEOUL, South Korea  
Factory : AMO VINA CO.,LTD  
Address : Lot CN12, Khai Quang industrial Park, Khai Quang Ward, Vinh Yen City, Vinh Phuc Province, Vietnam  
Contact Person : UIHAN JEONG/Research Engineer  
Telephone No. : +82-010-4948-5676  
FCC ID : 2AS9T-SB52SW2  
Model Name : SB52-SW  
Brand Name : -  
Serial Number : N/A  
Date : February 13, 2020

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	ATOZ
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT	Certification
AUTHORIZATION REQUESTED	
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. TEST SUMMARY

### 2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

### 2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

### 2.3 Related Submittal(s) / Grant(s)

Original submittal only

### 2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

### 2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

### 2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

- Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

- Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

### 3. GENERAL INFORMATION

#### 3.1 Product Description

The AMOSENSE, Model SB52-SW (referred to as the EUT in this report) is an ATOZ, Product specification information described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	ATOZ	
Temperature Range	-20 °C ~ 60 °C	
OPERATING FREQUENCY	NFC	13.56 MHz
	Sig Fox	902.137 5 MHz ~ 904.662 5 MHz
	Bluetooth LE	2 402 MHz ~ 2 480 MHz
	WLAN 2.4 GHz	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))
MODULATION TYPE	NFC	ASK
	Sig Fox	DBPSK
	Bluetooth LE	GFSK
	WLAN 2.4 GHz	802.11b: DSSS Modulation (DBPSK/DQPSK/CCK) 802.11g/n(HT20): OFDM Modulation (BPSK/QPSK/16QAM/64QAM)
RF OUTPUT POWER'	NFC	39.11 dB $\mu$ V/m at 3 m
	Sig Fox	21.59 dBm
	Bluetooth LE	-1.37 dBm
	WLAN 2.4 GHz	-1.17 dBm(802.11b) -3.02 dBm(802.11g) -3.25 dBm(802.11n_HT20)
ANTENNA TYPE	NFC: FPCB Antenna Sig Fox: Chip Antenna Bluetooth LE: Chip Antenna WLAN 2.4 GHz: Chip Antenna	
ANTENNA GAIN	Sig Fox: 1.66 dBi Bluetooth LE / WLAN 2.4 GHz: 2.36 dBi	
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	26 MHz, 32 MHz, 50 MHz	

**3.2 Alternative type(s)/model(s); also covered by this test report.**

- . None

**4. EUT MODIFICATIONS**

- . None

## 5. SYSTEM TEST CONFIGURATION

### 5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	AMOSENSE	ATOZ Rev2.0 / N/A	N/A
Sub Board	AMOSENSE	N/A	N/A
DC Battery	N/A	UFX303055 / N/A	N/A
Speaker	N/A	N/A	N/A

### 5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
SB52-SW	AMOSENSE	ATOZ(EUT)	-
N/A	N/A	Jig Board	EUT
ACR1251U	Advanced Card Systems Ltd.	Card Reader	EUT
G6-1121TU	HP	Notebook PC	-
PPP009C	LIE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	AC Adapter	-

### 5.3 Mode of operation during the test


For the testing, software used to control the EUT for staying in continuous transmitting mode is programmed.



Modulation	DATA RATE	OUTPUT POWER[dBm]
802.11 b (Middle Channel)	1 Mbps	-1.67
	2 Mbps	-1.73
	5.5 Mbps	-1.78
	11 Mbps	-1.79
802.11g (Middle Channel)	6 Mbps	-3.62
	9 Mbps	-3.91
	12 Mbps	-3.96
	18 Mbps	-4.06
	24 Mbps	-4.10
	36 Mbps	-3.91
	48 Mbps	-5.33
	54 Mbps	-6.23
802.11n (HT 20) (Middle Channel)	6.5 Mbps	-3.88
	13 Mbps	-3.93
	19.5 Mbps	-4.06
	26 Mbps	-4.09
	39 Mbps	-3.81
	52 Mbps	-5.07
	58.5 Mbps	-6.16
	65 Mbps	-8.07

- The worse case data rate for each modulation is determined 1 Mbps for IEEE 802.11b, 6 Mbps for IEEE 802.11g, 6.5 Mbps for HT20.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.
- The worst case for each modulation is in IEEE 802.11b. So the plot for Radiated Emission which fall in the Restricted Band is provided only in IEEE 802.11b.


## -. Occupied Bandwidth (99 %)



Modulation	CHANNEL	FREQUENCY (MHz)	Occupied Bandwidth (MHz)
802.11 b	Low	2 412.00	11.39
	Middle	2 442.00	11.34
	High	2 462.00	11.49

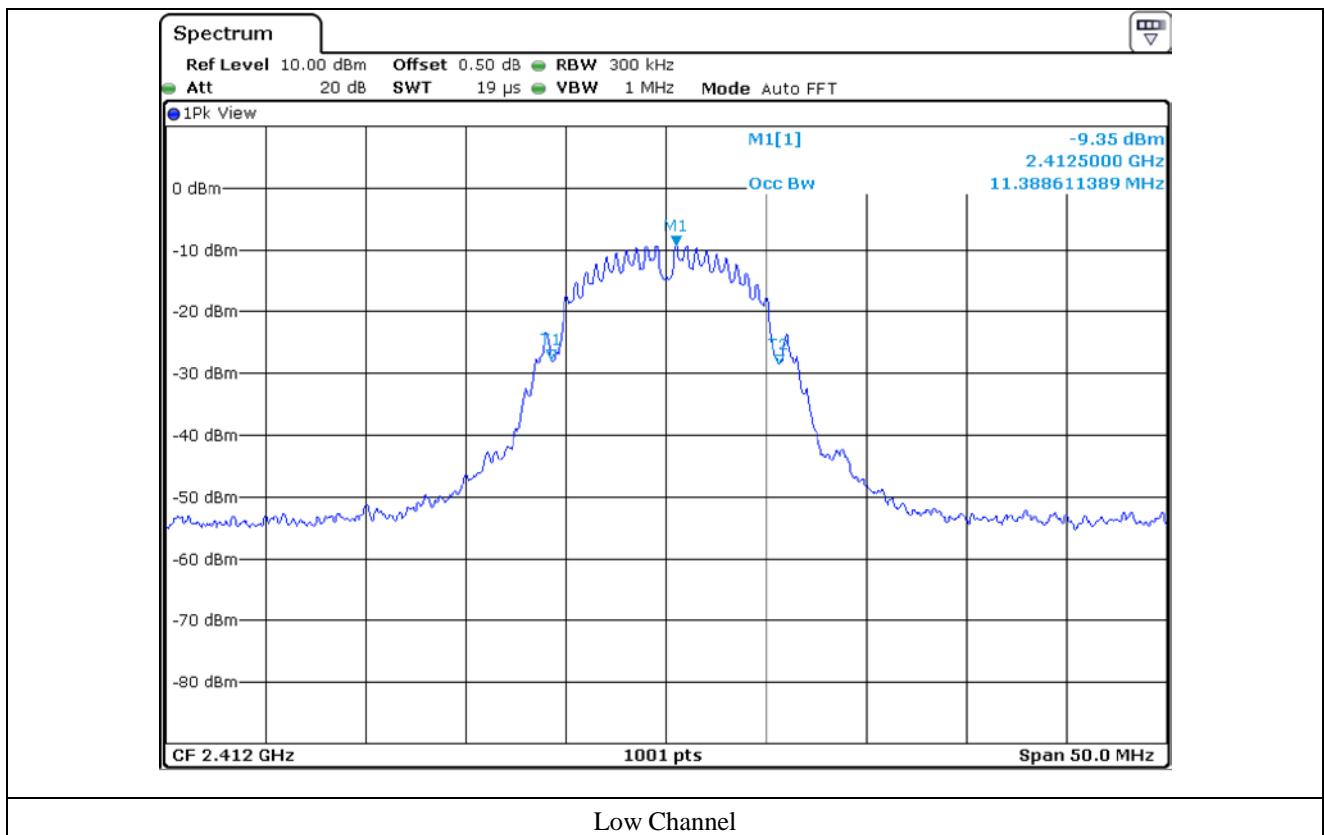

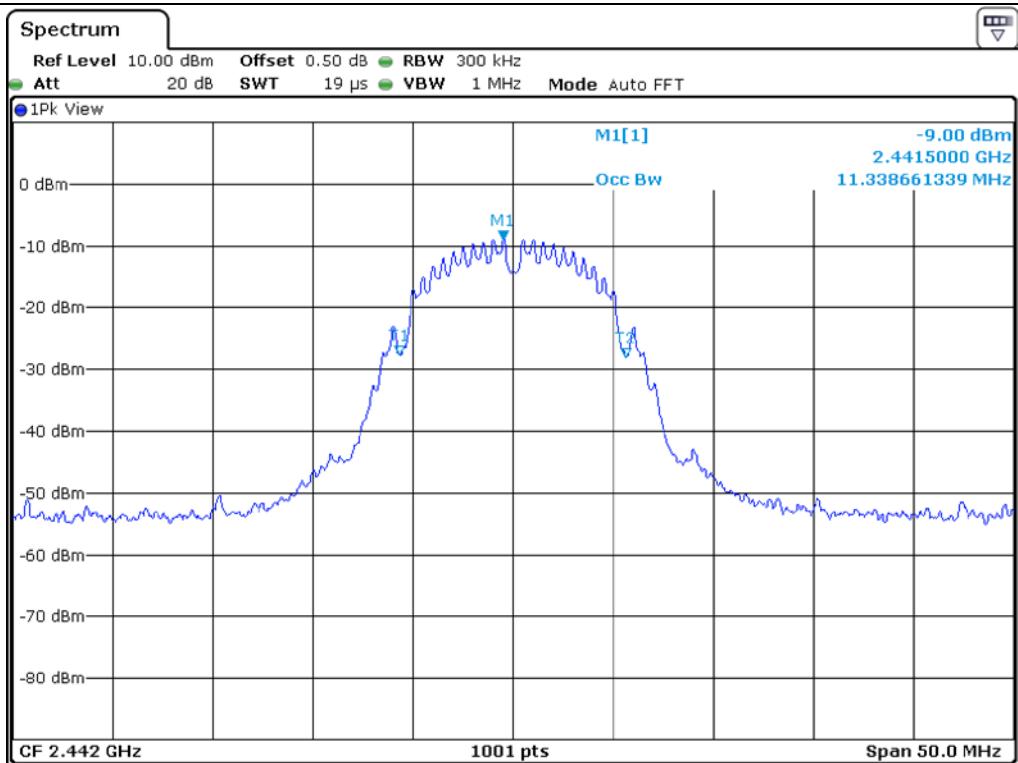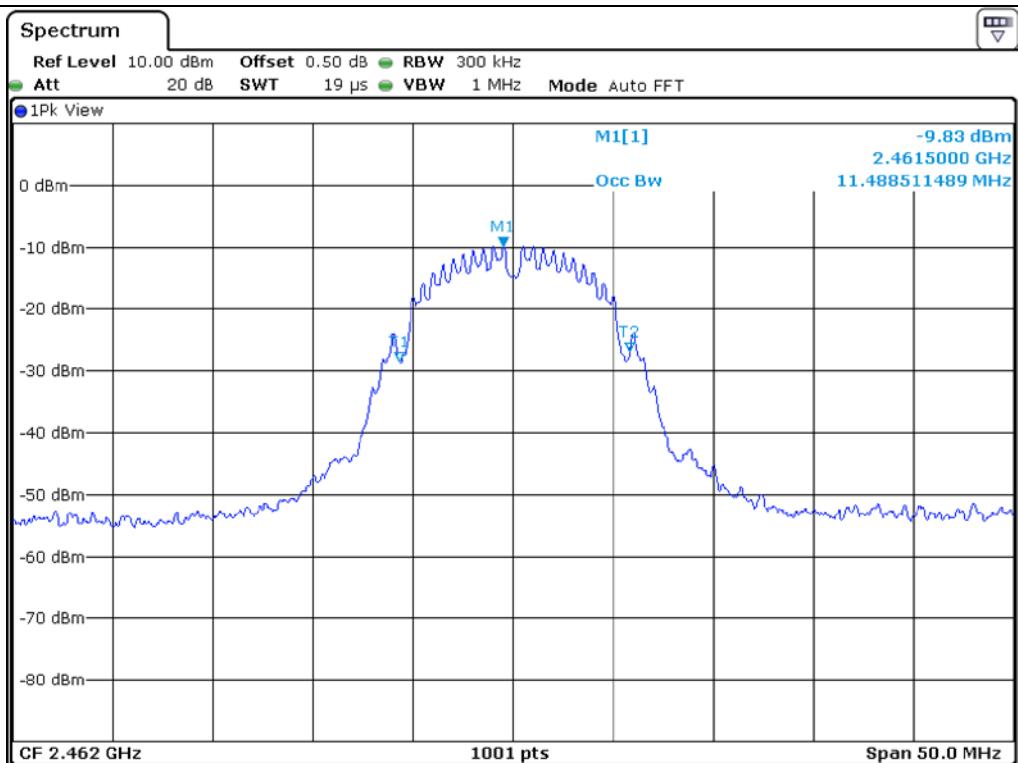
**Middle Channel****High Channel**



Modulation	CHANNEL	FREQUENCY (MHz)	Occupied Bandwidth (MHz)
802.11 g	Low	2 412.00	16.33
	Middle	2 442.00	16.38
	High	2 462.00	16.33

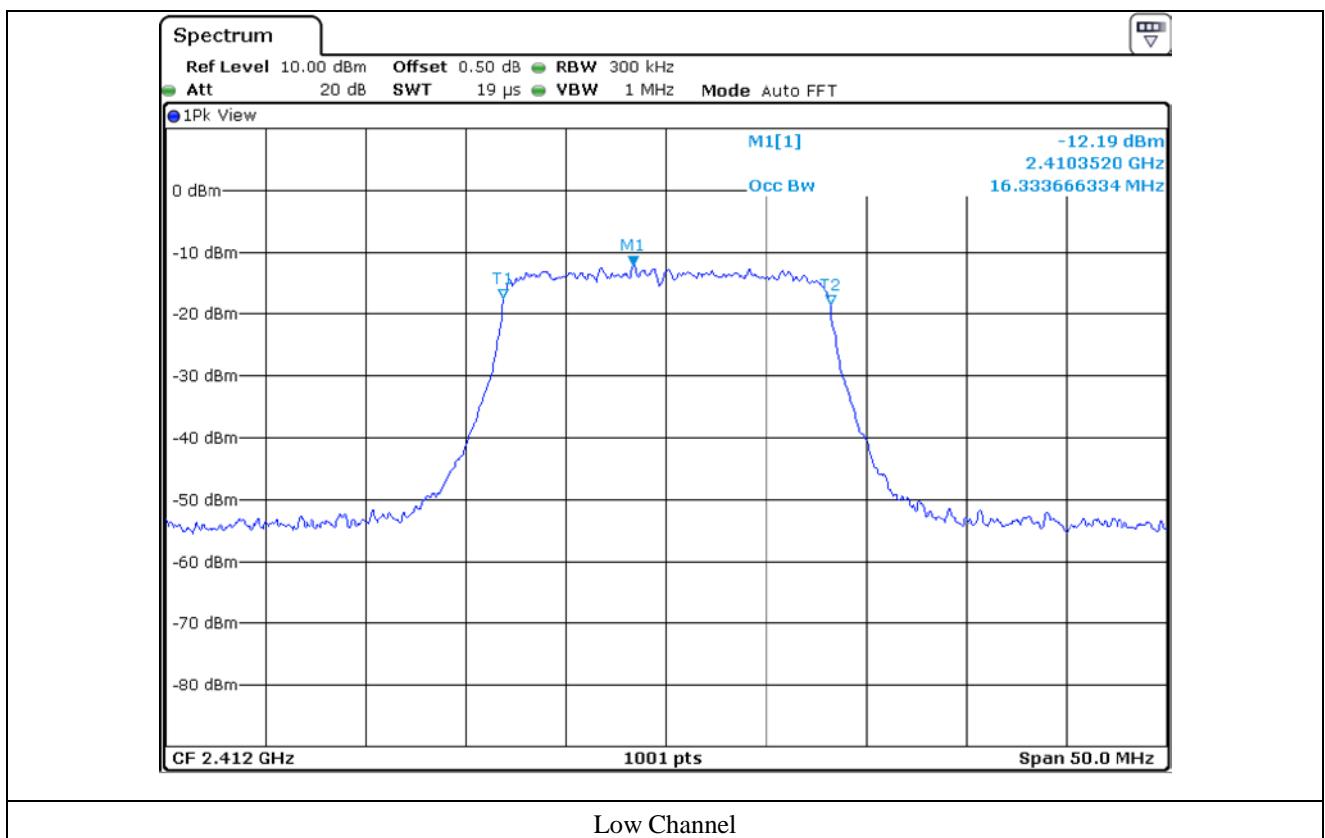

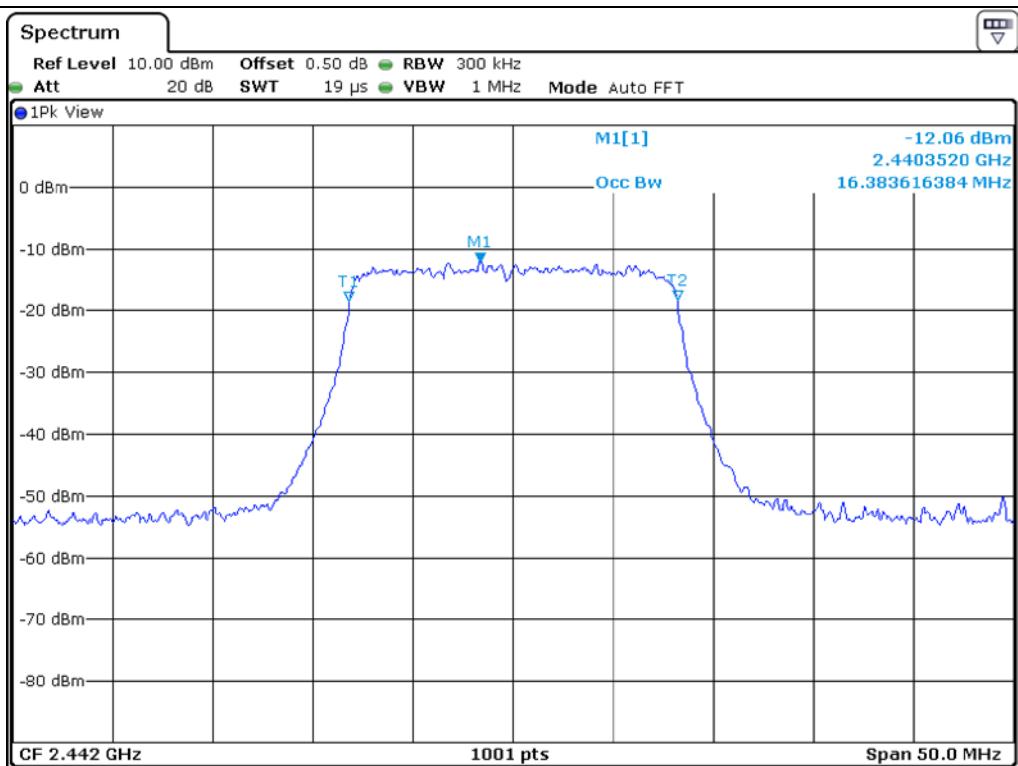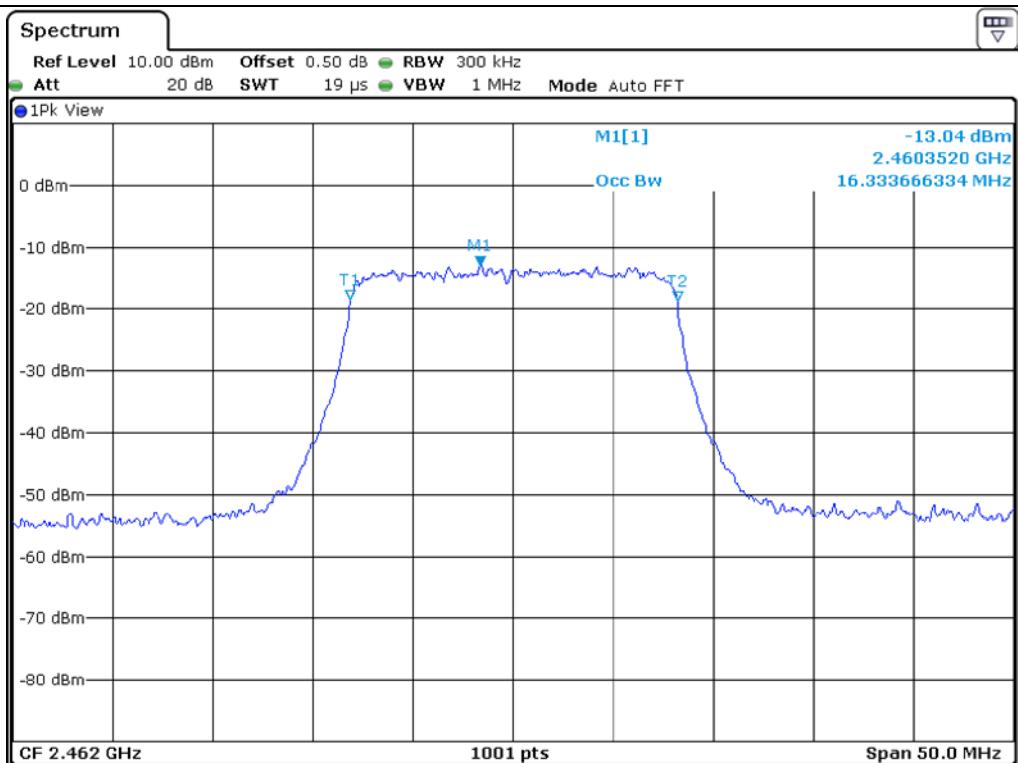**Middle Channel****High Channel**

Modulation	CHANNEL	FREQUENCY (MHz)	Occupied Bandwidth (MHz)
802.11n (HT 20)	Low	2 412.00	17.38
	Middle	2 442.00	17.43
	High	2 462.00	17.38

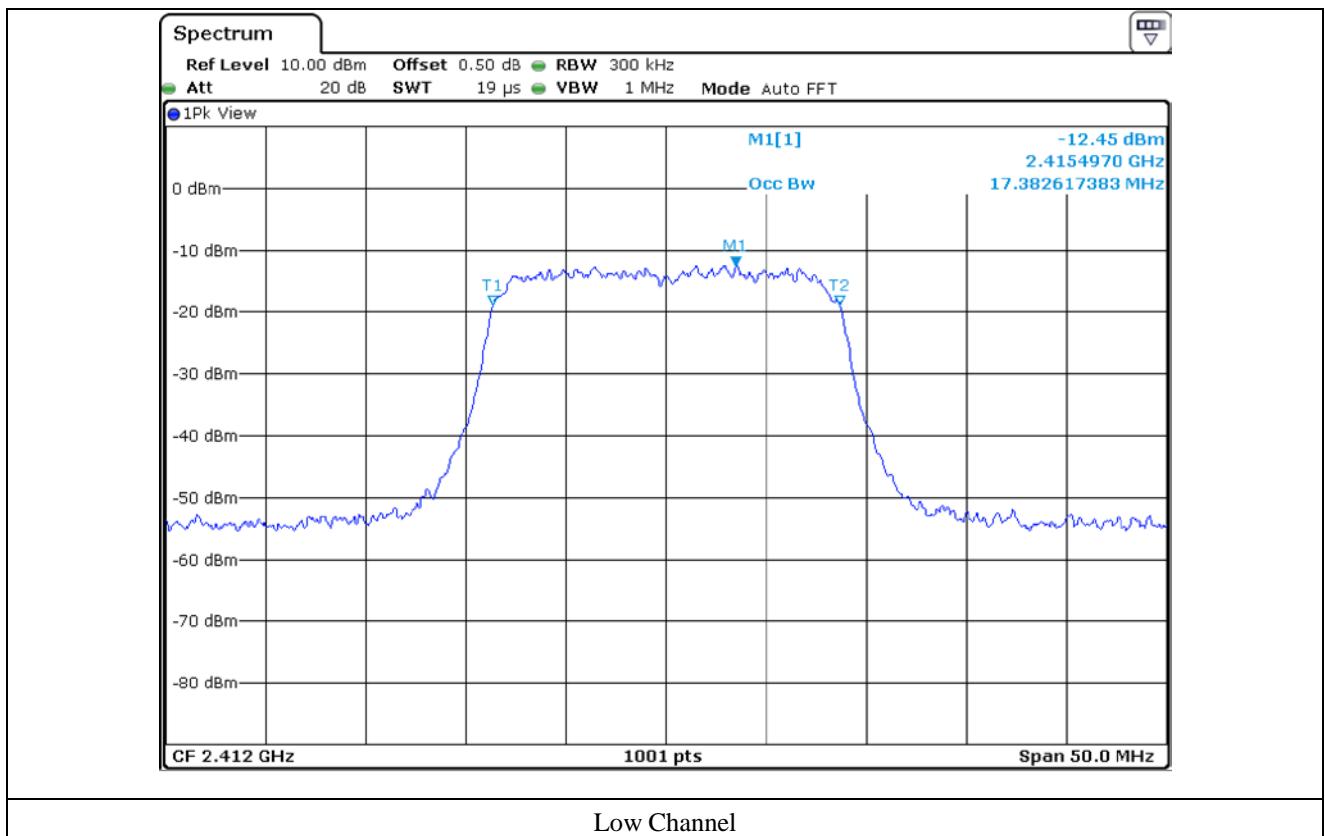

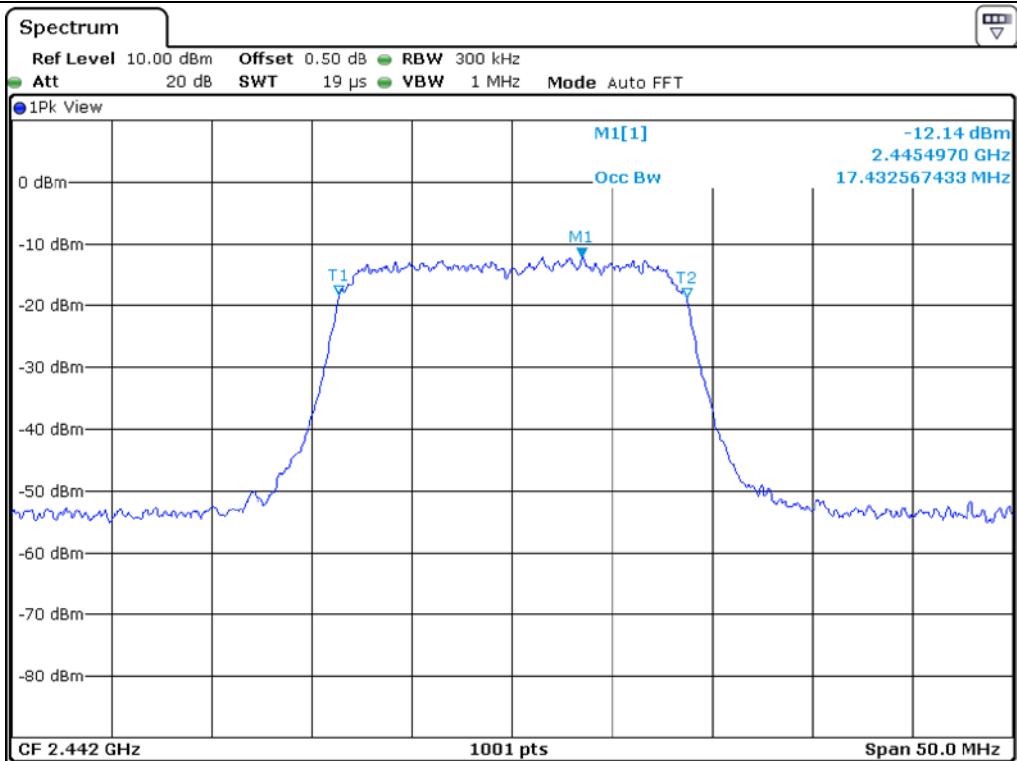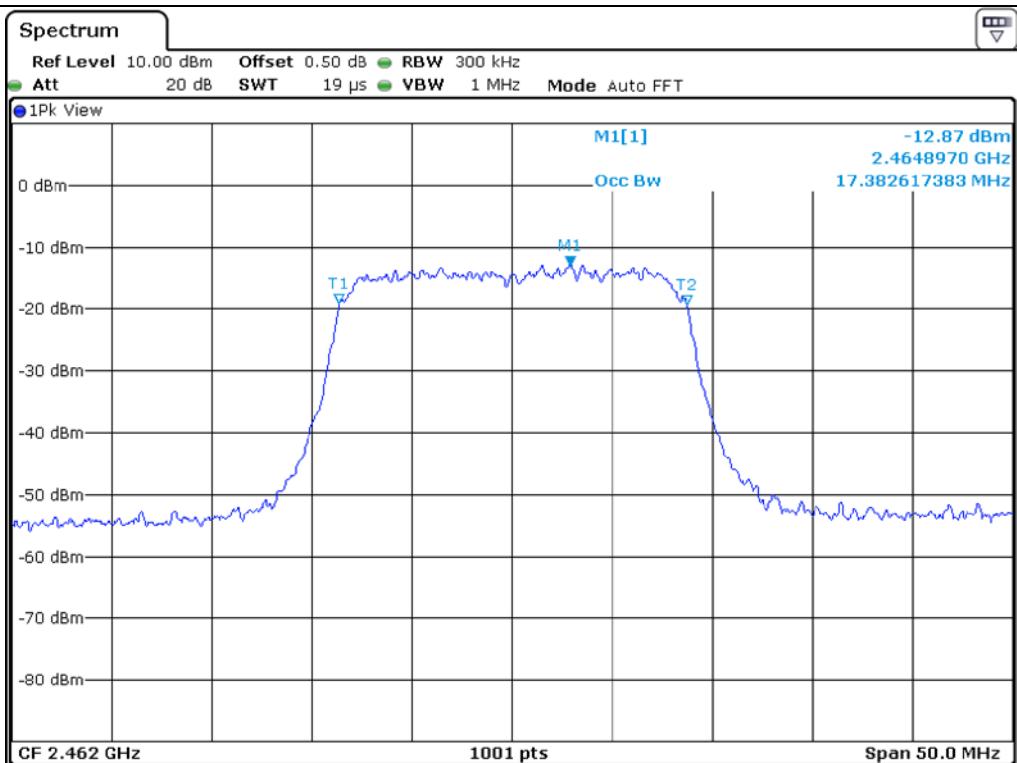**Middle Channel****High Channel**


## - Duty Cycle


Mode	Tx On Time [ ms ]	Tx Off Time [ ms ]	Duty Cycle [ % ]	Correction Factor [ dB ]
802.11 b	4.16	0.51	89.08	0.50
802.11 g	0.659	0.098	87.11	0.60
802.11 n(HT20)	0.624	0.098	86.47	0.63

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) \* 100

Correction Factor :  $10 \times \log(1 / (\text{Duty Cycle} / 100))$

## - Test Plot

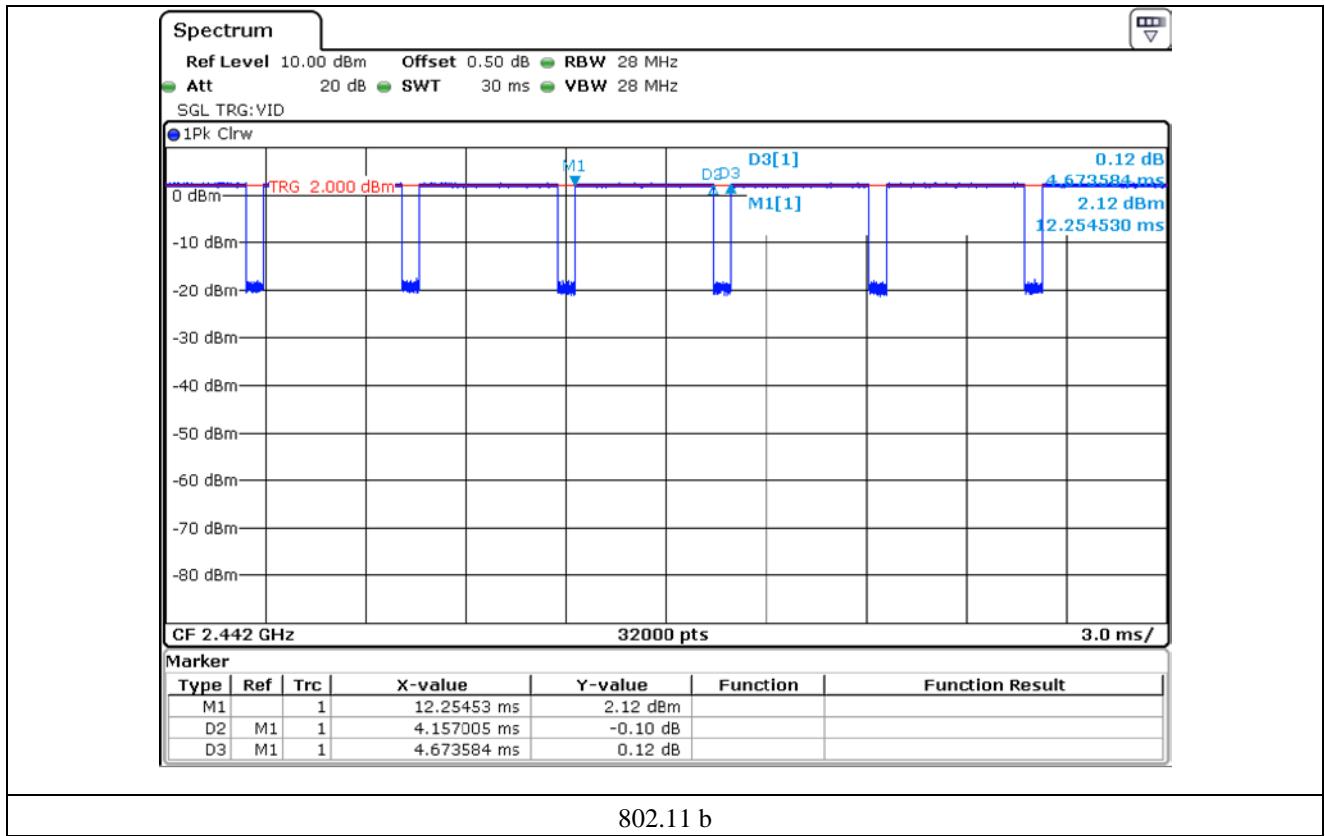

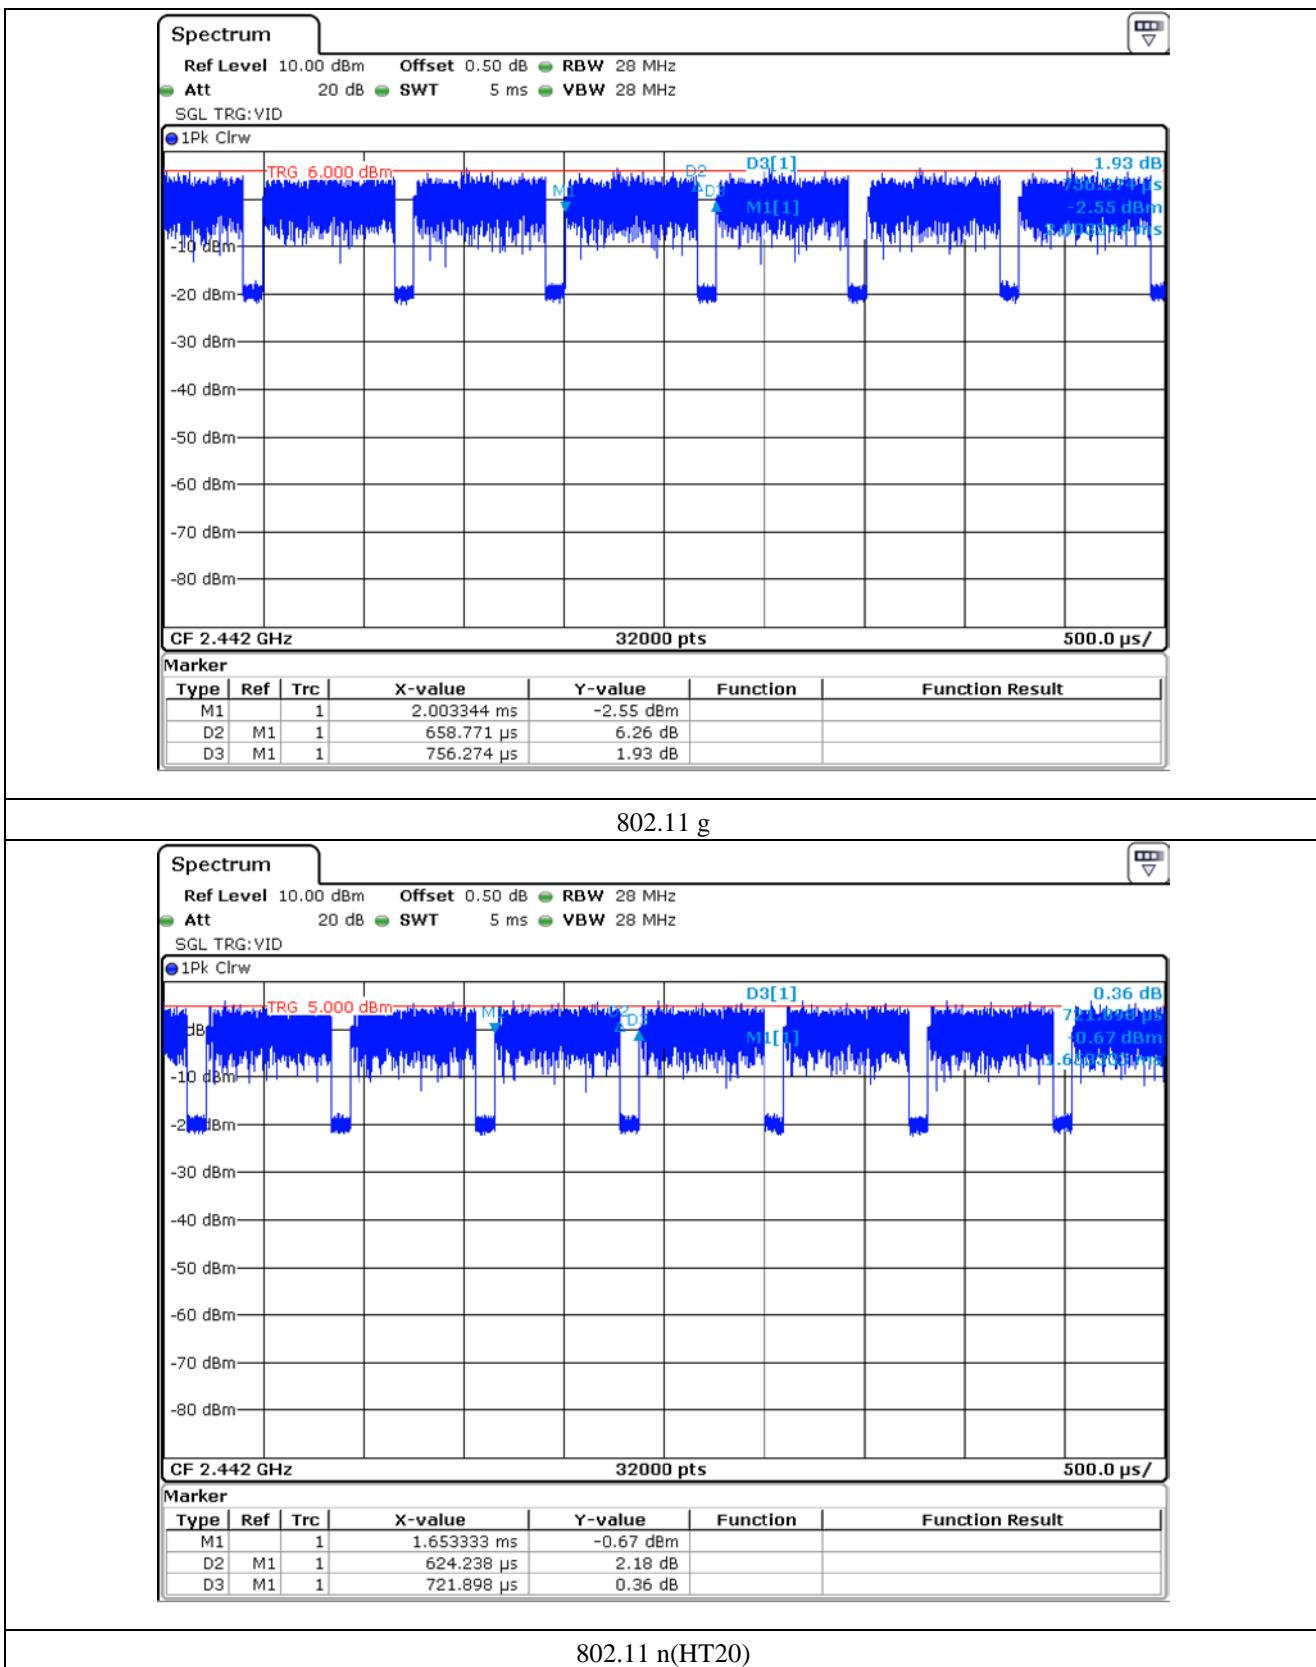

## 5.4 Configuration of Test System

- Line Conducted Test:** The EUT was tested in a Charging & Transmitting mode. The EUT was connected to USB and the Power of USB was Connected to DC Adaptor. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.
- Radiated Emission Test:** Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber. The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

## 5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### Antenna Construction:

The antenna of the EUT is Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

## 6. PRELIMINARY TEST

### 6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Charging & Transmitting Mode	X

### 6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

## 7. MINIMUM 6 dB BANDWIDTH

### 7.1 Operating environment

Temperature : 23 °C

Relative humidity : 46 % R.H.

### 7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.



### 7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

#### 7.4 Test data for 802.11b WLAN Mode


- Test Date : February 04, 2020 ~ February 07, 2020



- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
LOW	2 412.00	8.99	0.50	8.49
MIDDLE	2 442.00	8.99	0.50	8.49
HIGH	2 462.00	8.99	0.50	8.49

Remark. Margin = Measured Value - Limit

Tested by: Hyung-Kwon, Oh / Manager

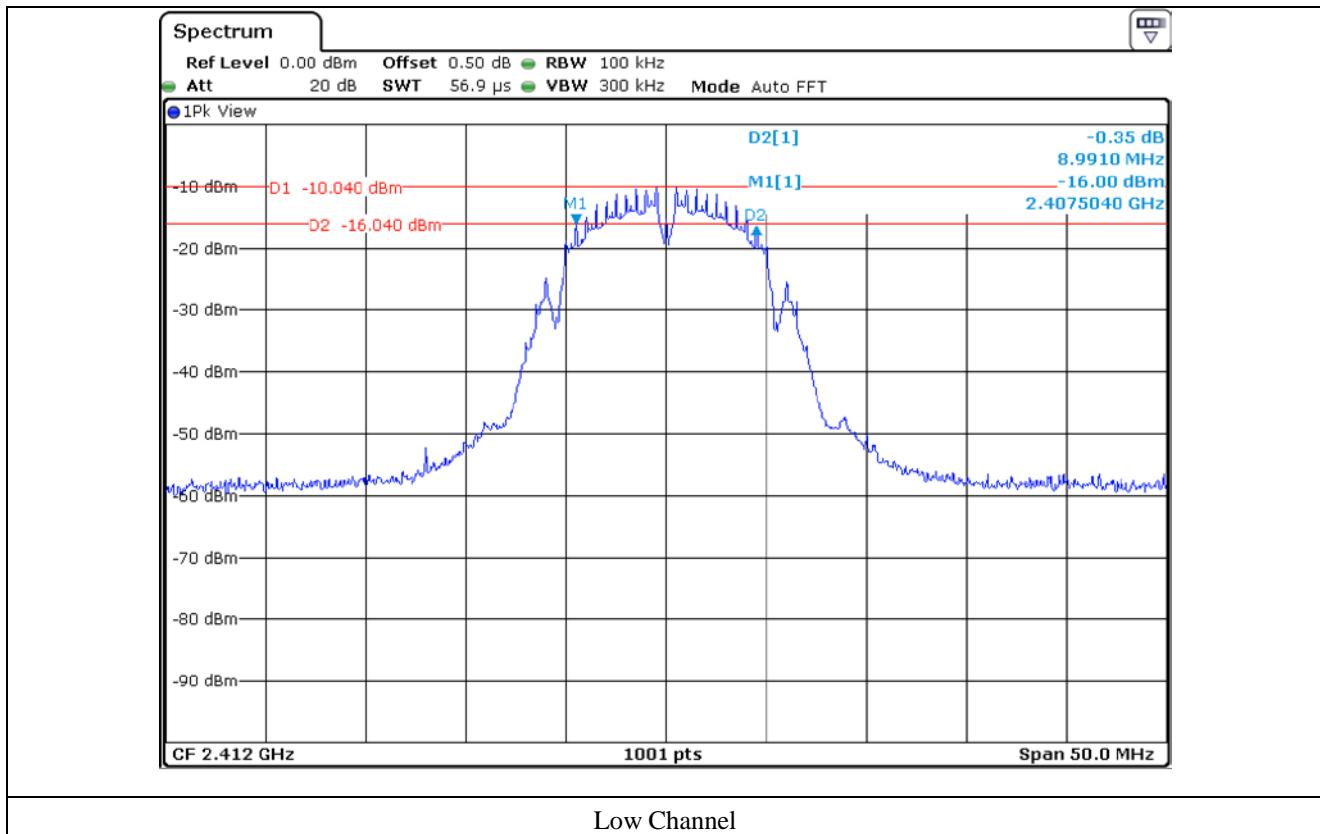

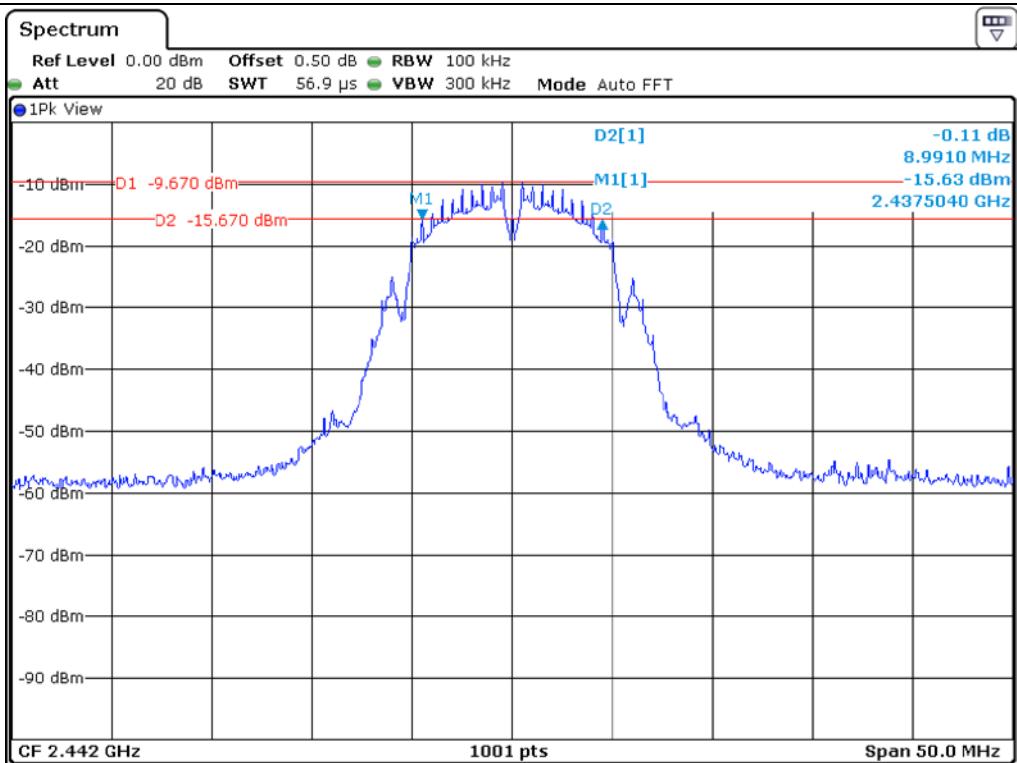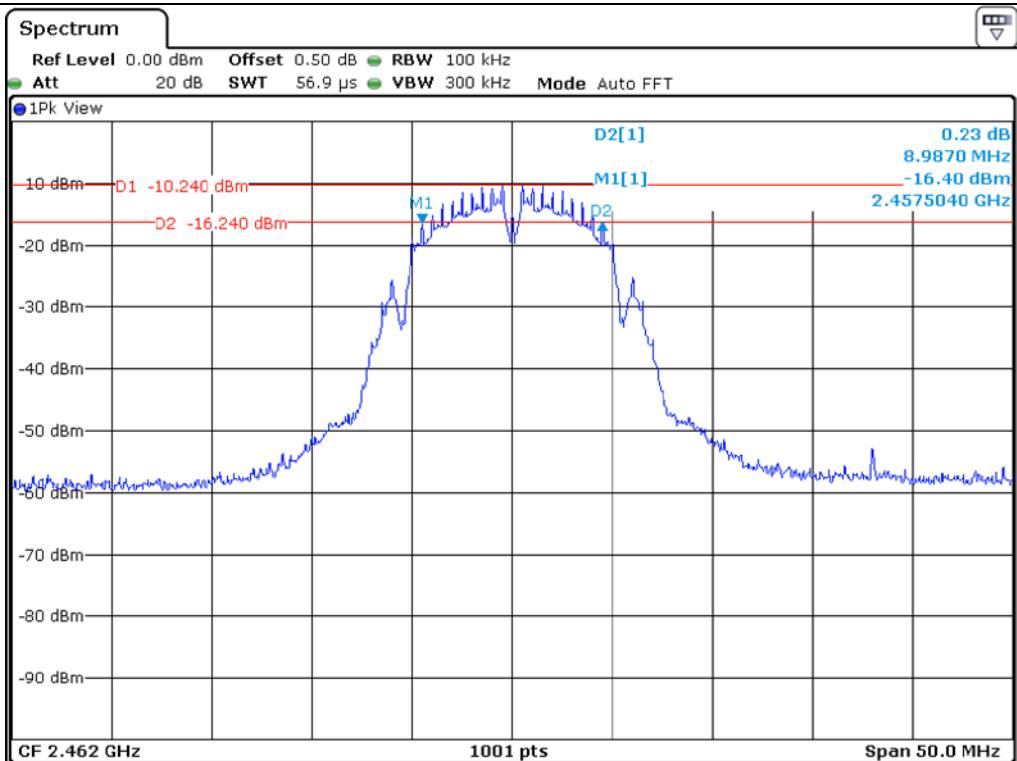**Middle Channel****High Channel**

## 7.5 Test data for 802.11g WLAN Mode


- Test Date : February 04, 2020 ~ February 07, 2020



- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
LOW	2 412.00	16.28	0.50	15.78
MIDDLE	2 442.00	16.28	0.50	15.78
HIGH	2 462.00	16.23	0.50	15.73

Remark. Margin = Measured Value - Limit

Tested by: Hyung-Kwon, Oh / Manager

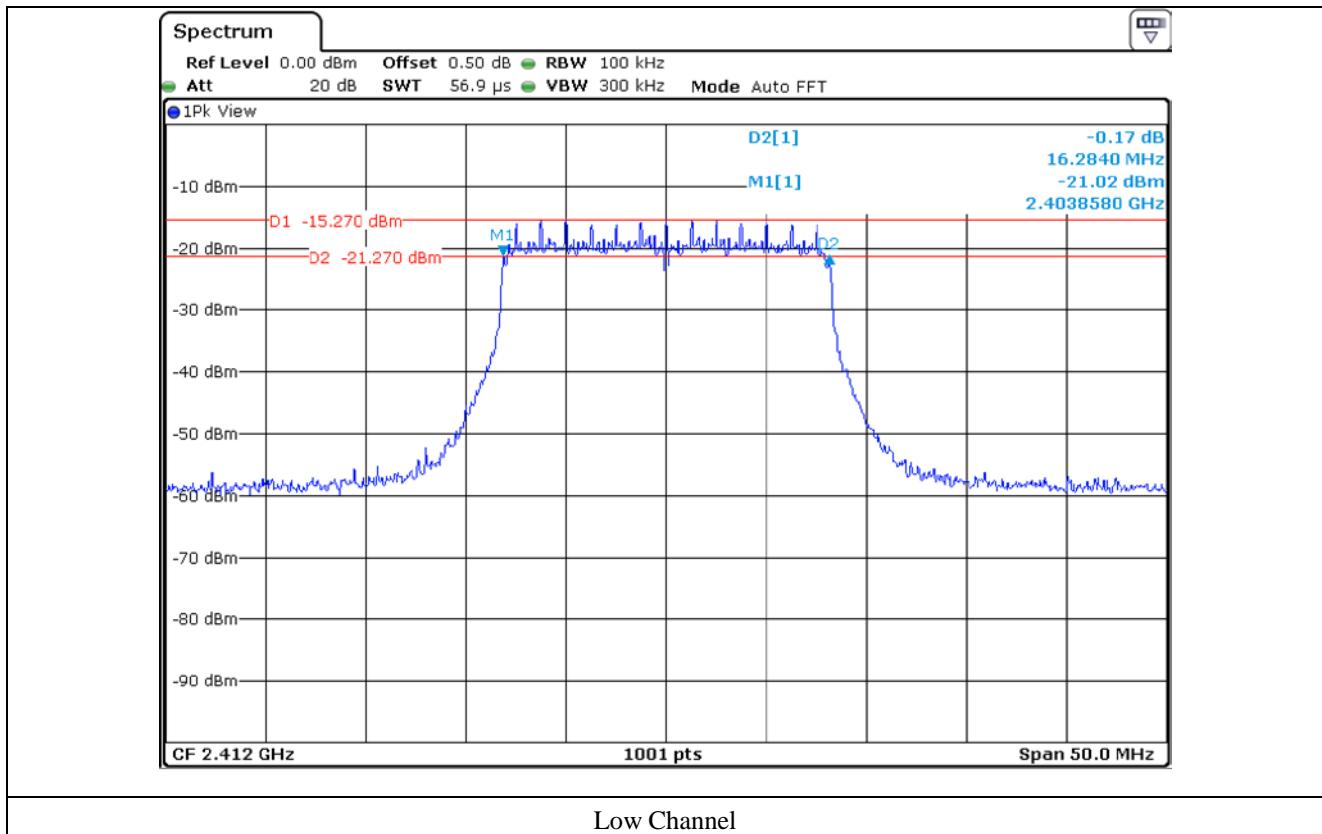

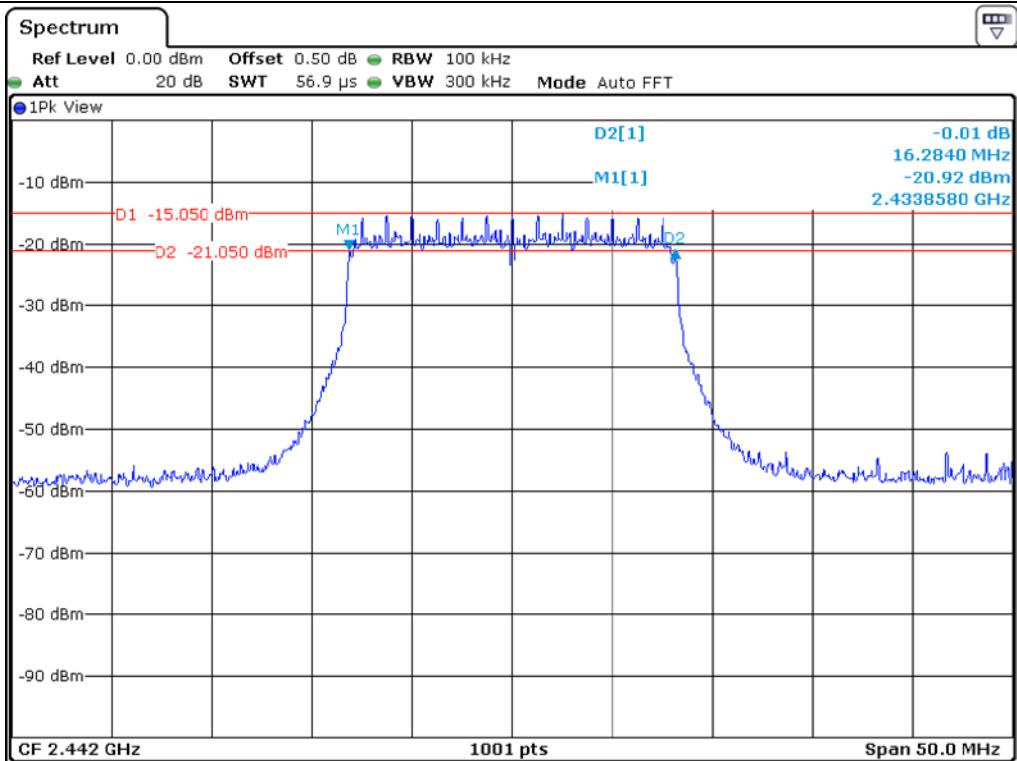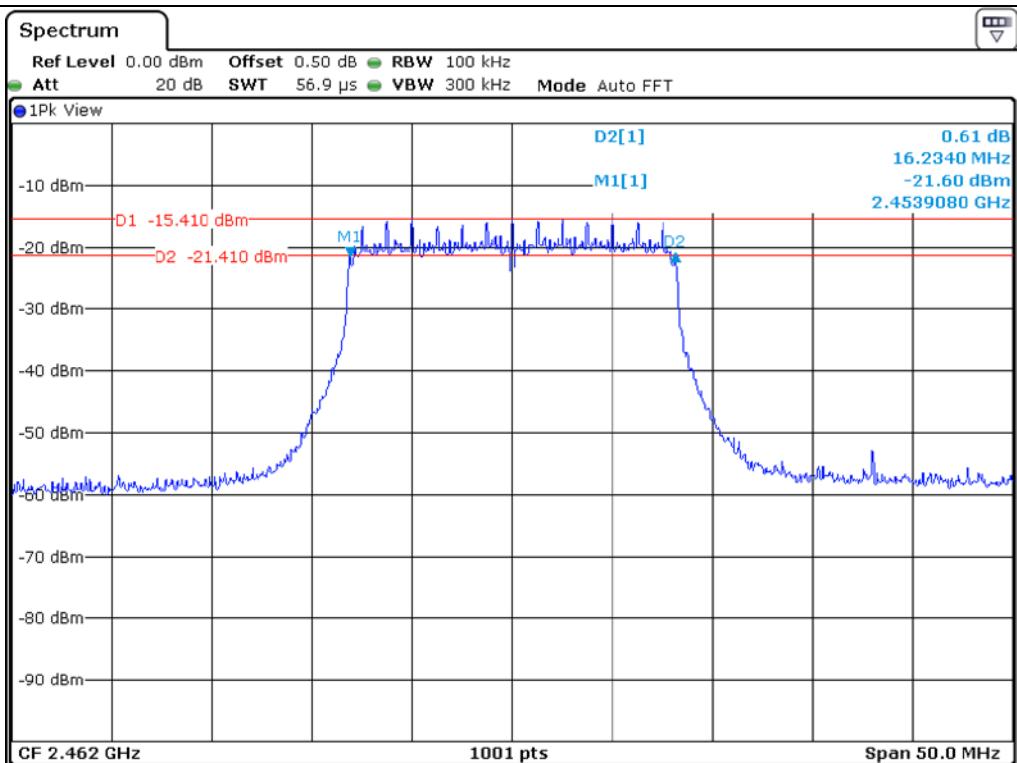**Middle Channel****High Channel**

## 7.6 Test data for 802.11n\_HT20 WLAN Mode


- Test Date : February 04, 2020 ~ February 07, 2020



- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
LOW	2 412.00	16.23	0.50	15.73
MIDDLE	2 442.00	16.28	0.50	15.78
HIGH	2 462.00	16.28	0.50	15.78

Remark. Margin = Measured Value - Limit

Tested by: Hyung-Kwon, Oh / Manager

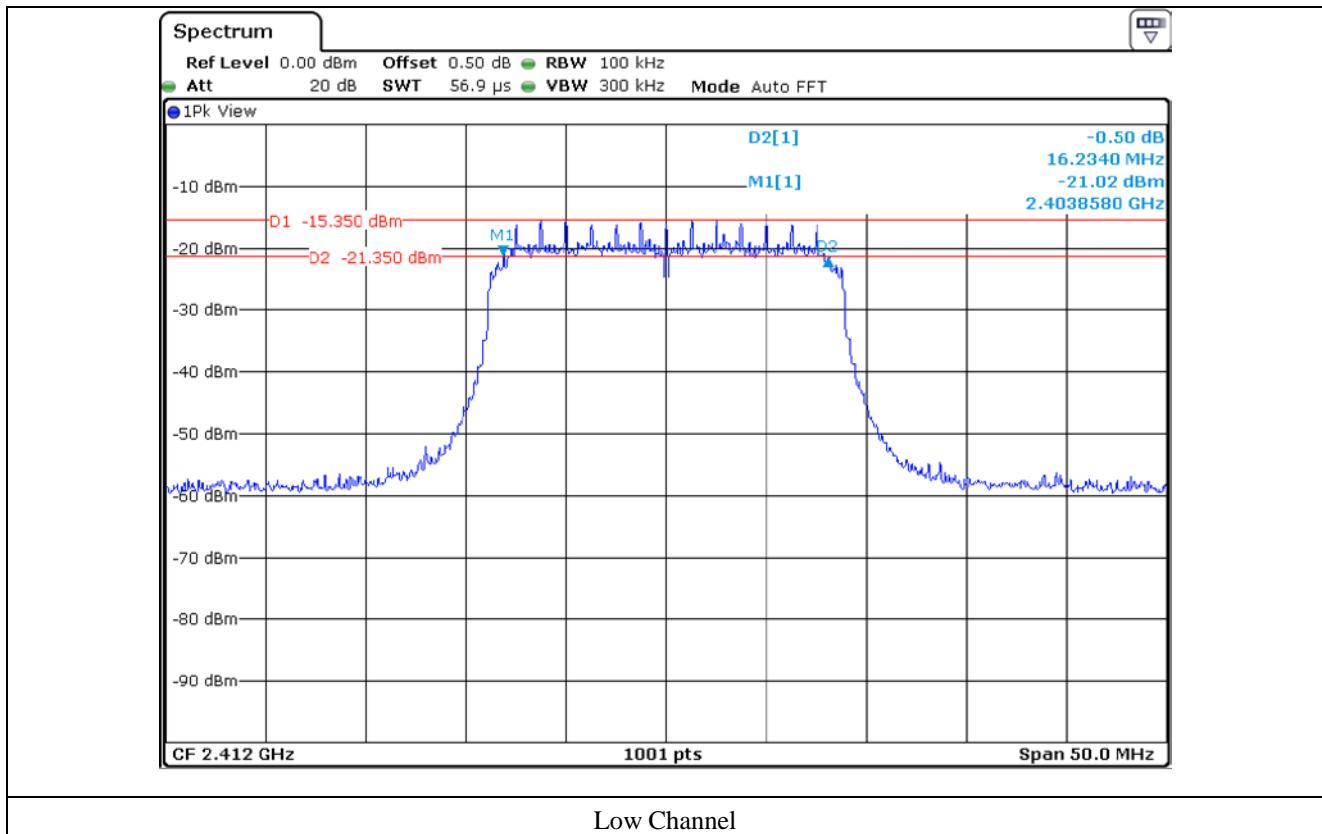

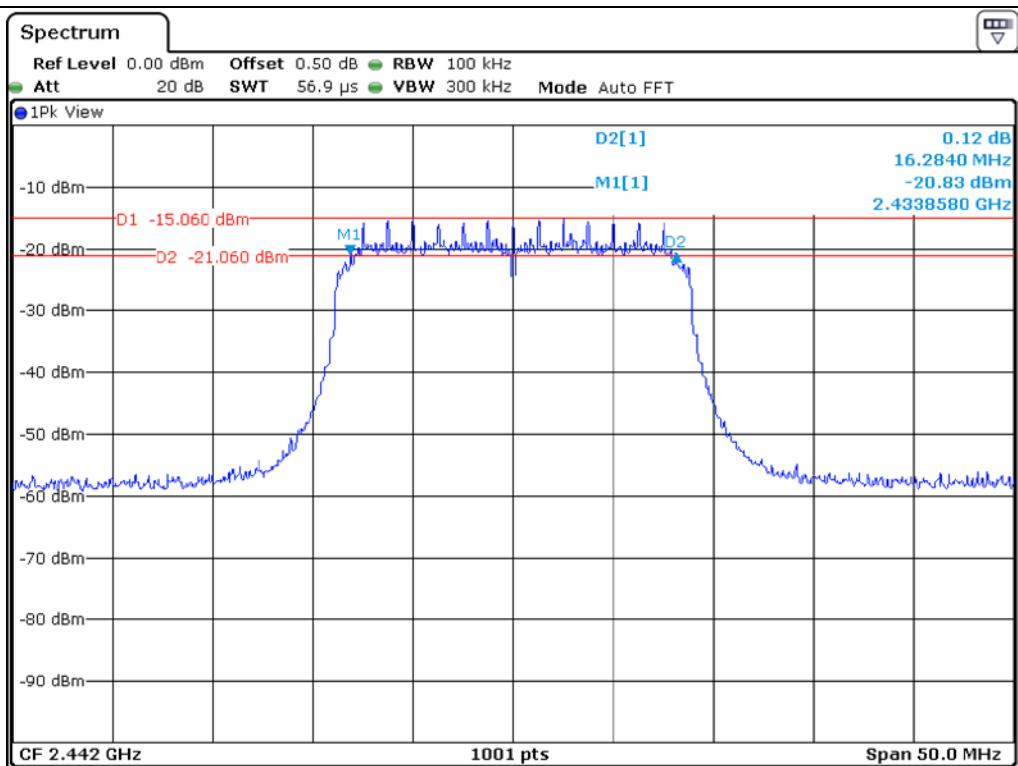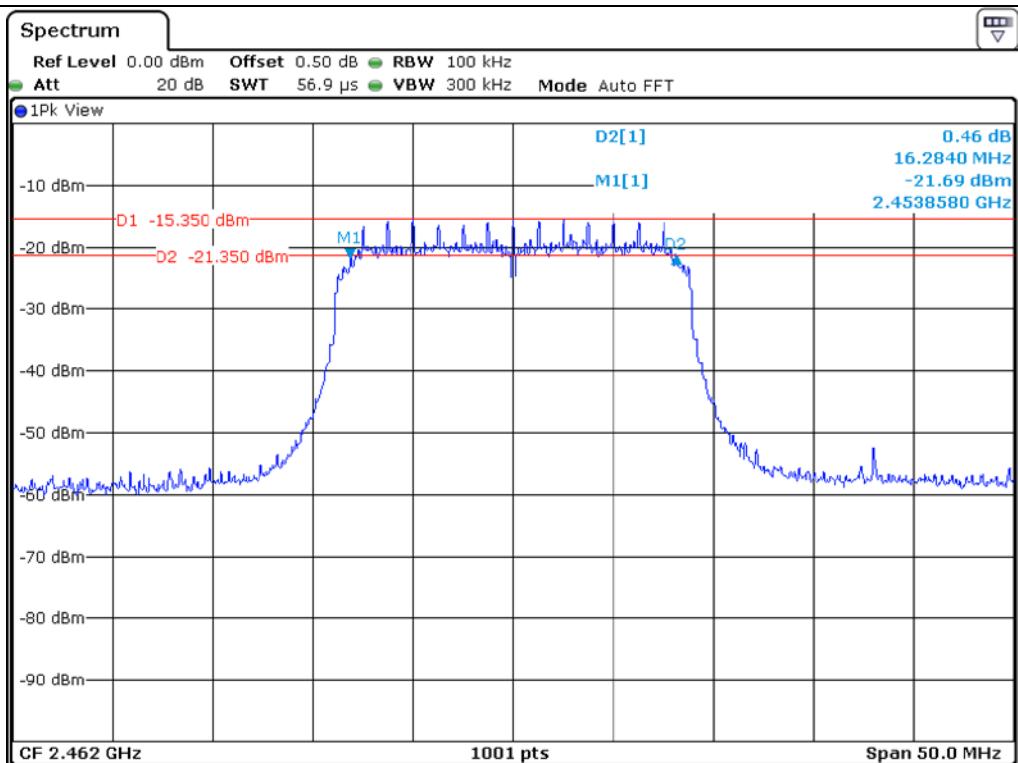**Middle Channel****High Channel**

## 8. MAXIMUM CONDUCTED (AVERAGE) OUTPUT POWER

### 8.1 Operating environment


Temperature : 23 °C

Relative humidity : 46 % R.H.

### 8.2 Test set-up

The maximum Conducted (Average) output power was measured with the Spectrum Analyzer connected to the antenna output of the EUT.

Section 15.247 permits the maximum conducted (average) output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth (see ANSI C63.10 for measurement guidance).

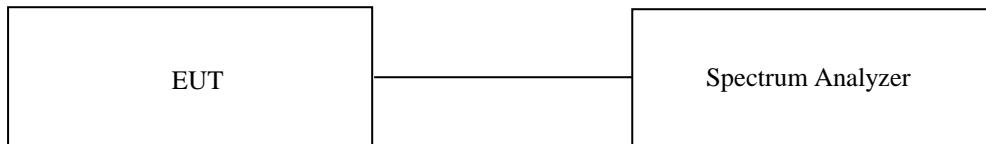

### 8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.


#### 8.4 Test data for 802.11b WLAN Mode


- Test Date : February 04, 2020 ~ February 07, 2020
- Test Result : Pass
- Duty Cycle : 89.08 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	Correction Factor (dB)	Result (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	-2.03	0.50	-1.53	30.00	31.53
MIDDLE	2 442.00	-1.67	0.50	-1.17	30.00	31.17
HIGH	2 462.00	-2.28	0.50	-1.78	30.00	31.78

Remark : Margin = Limit – Result (= Measured Vlaue + Correction Factor)

Tested by: Hyung-Kwon, Oh / Manager

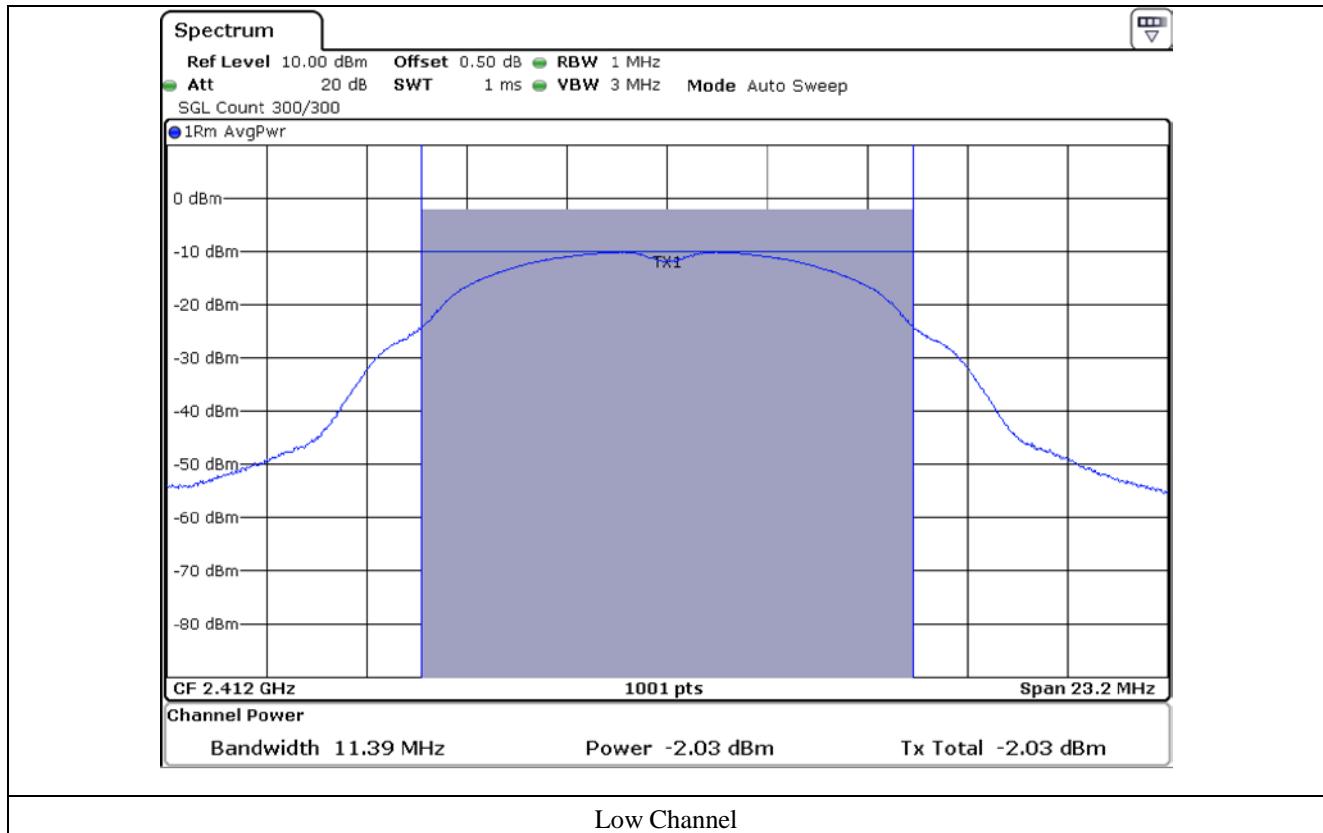

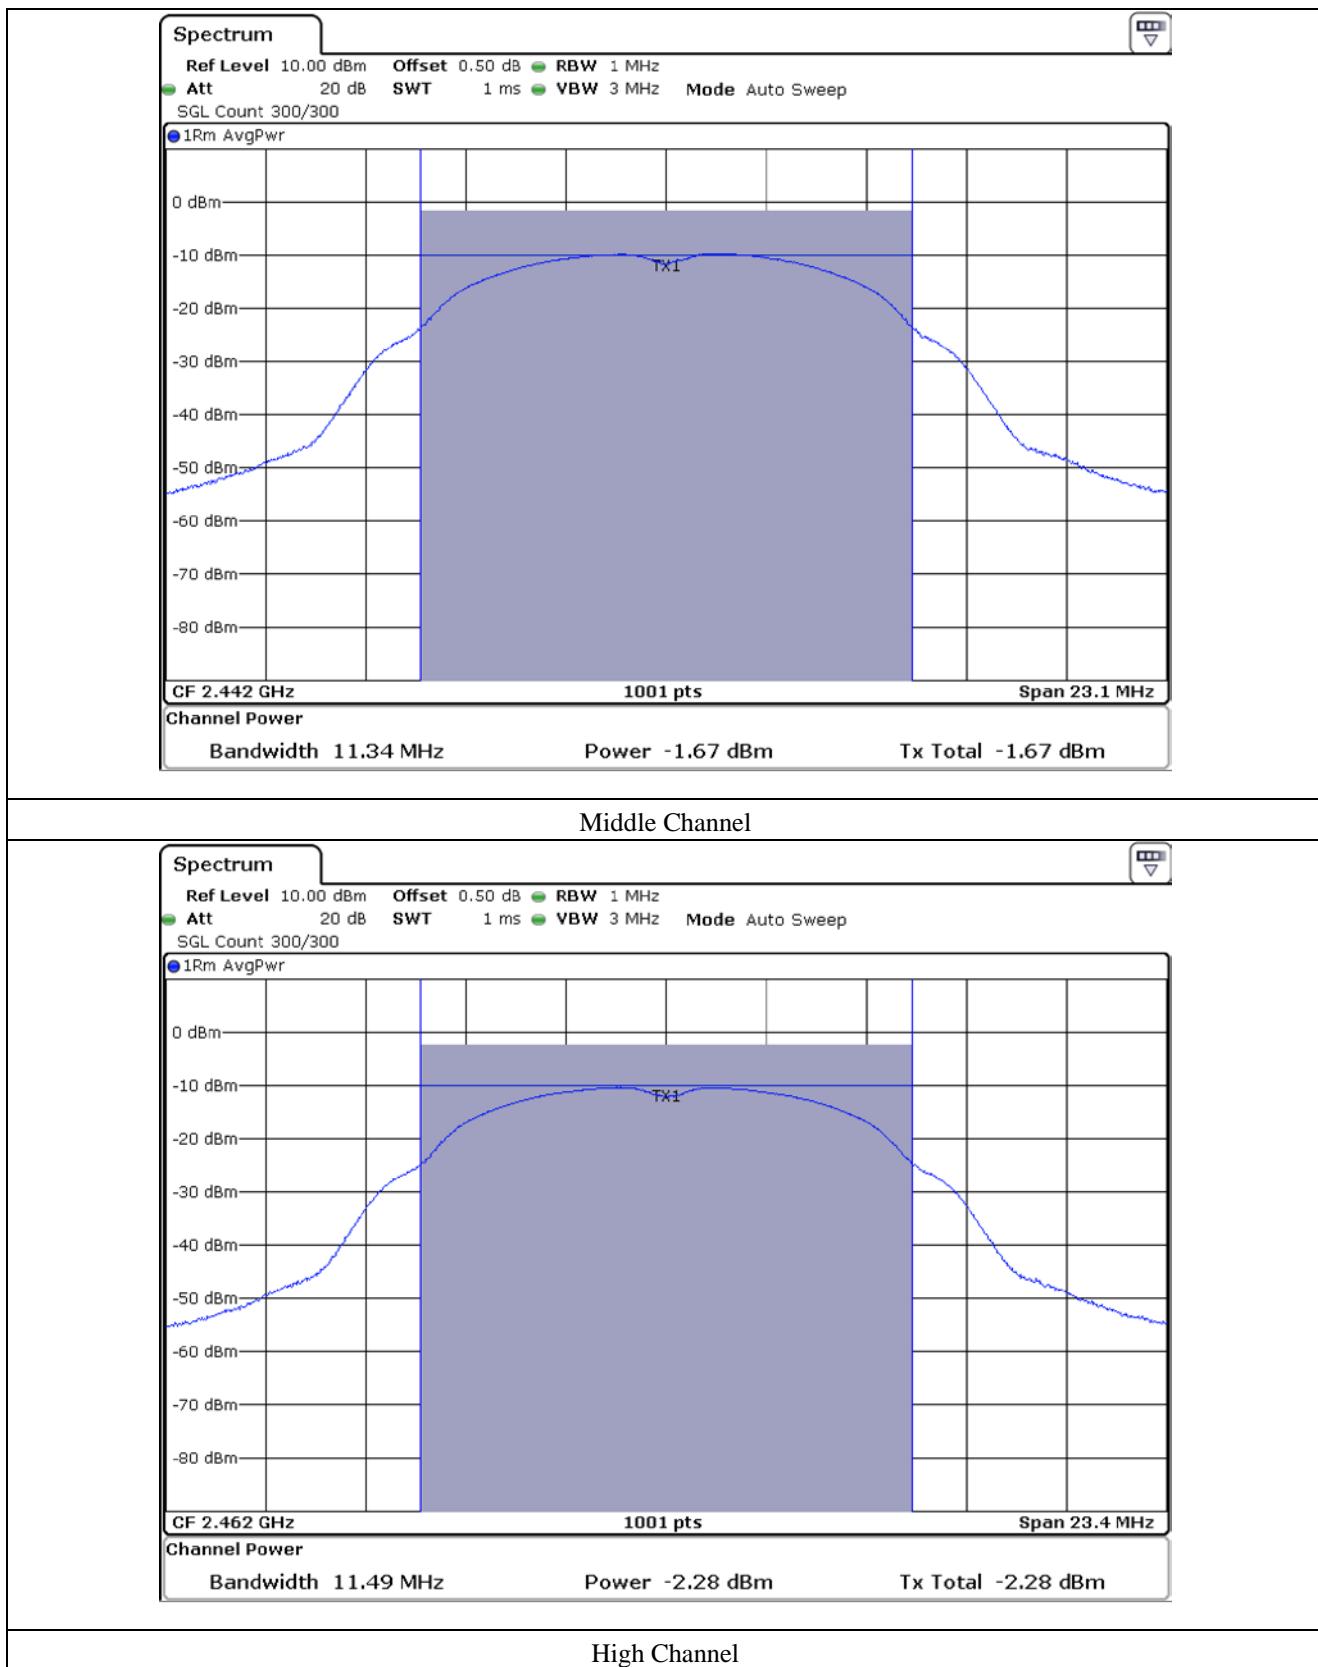


### 8.5 Test data for 802.11g WLAN Mode


- Test Date : February 04, 2020 ~ February 07, 2020
- Test Result : Pass
- Duty Cycle : 87.11 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	Correction Factor (dB)	Result (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	-3.92	0.60	-3.32	30.00	33.32
MIDDLE	2 442.00	-3.62	0.60	-3.02	30.00	33.02
HIGH	2 462.00	-4.42	0.60	-3.82	30.00	33.82

Remark : Margin = Limit – Result (= Measured Vlaue + Correction Factor)

Tested by: Hyung-Kwon, Oh / Manager

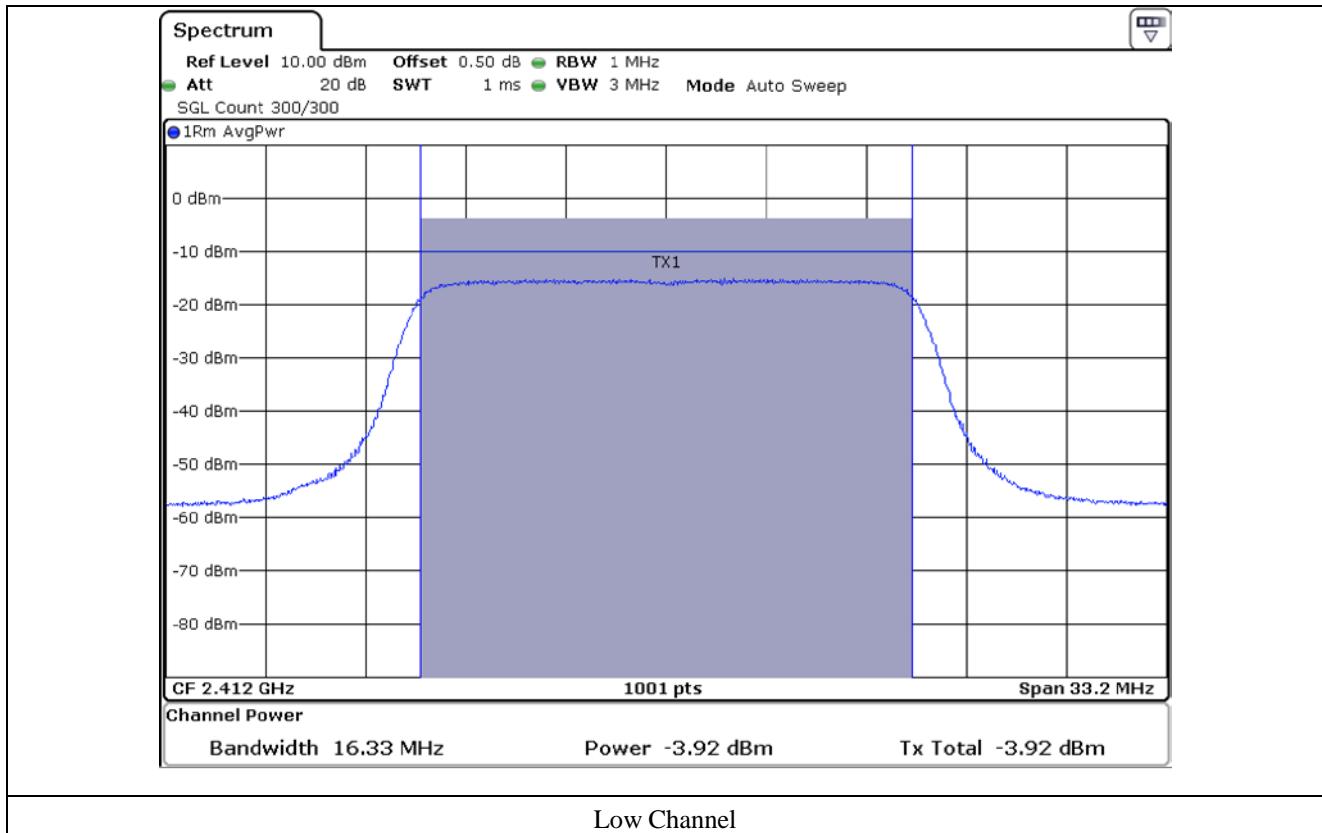

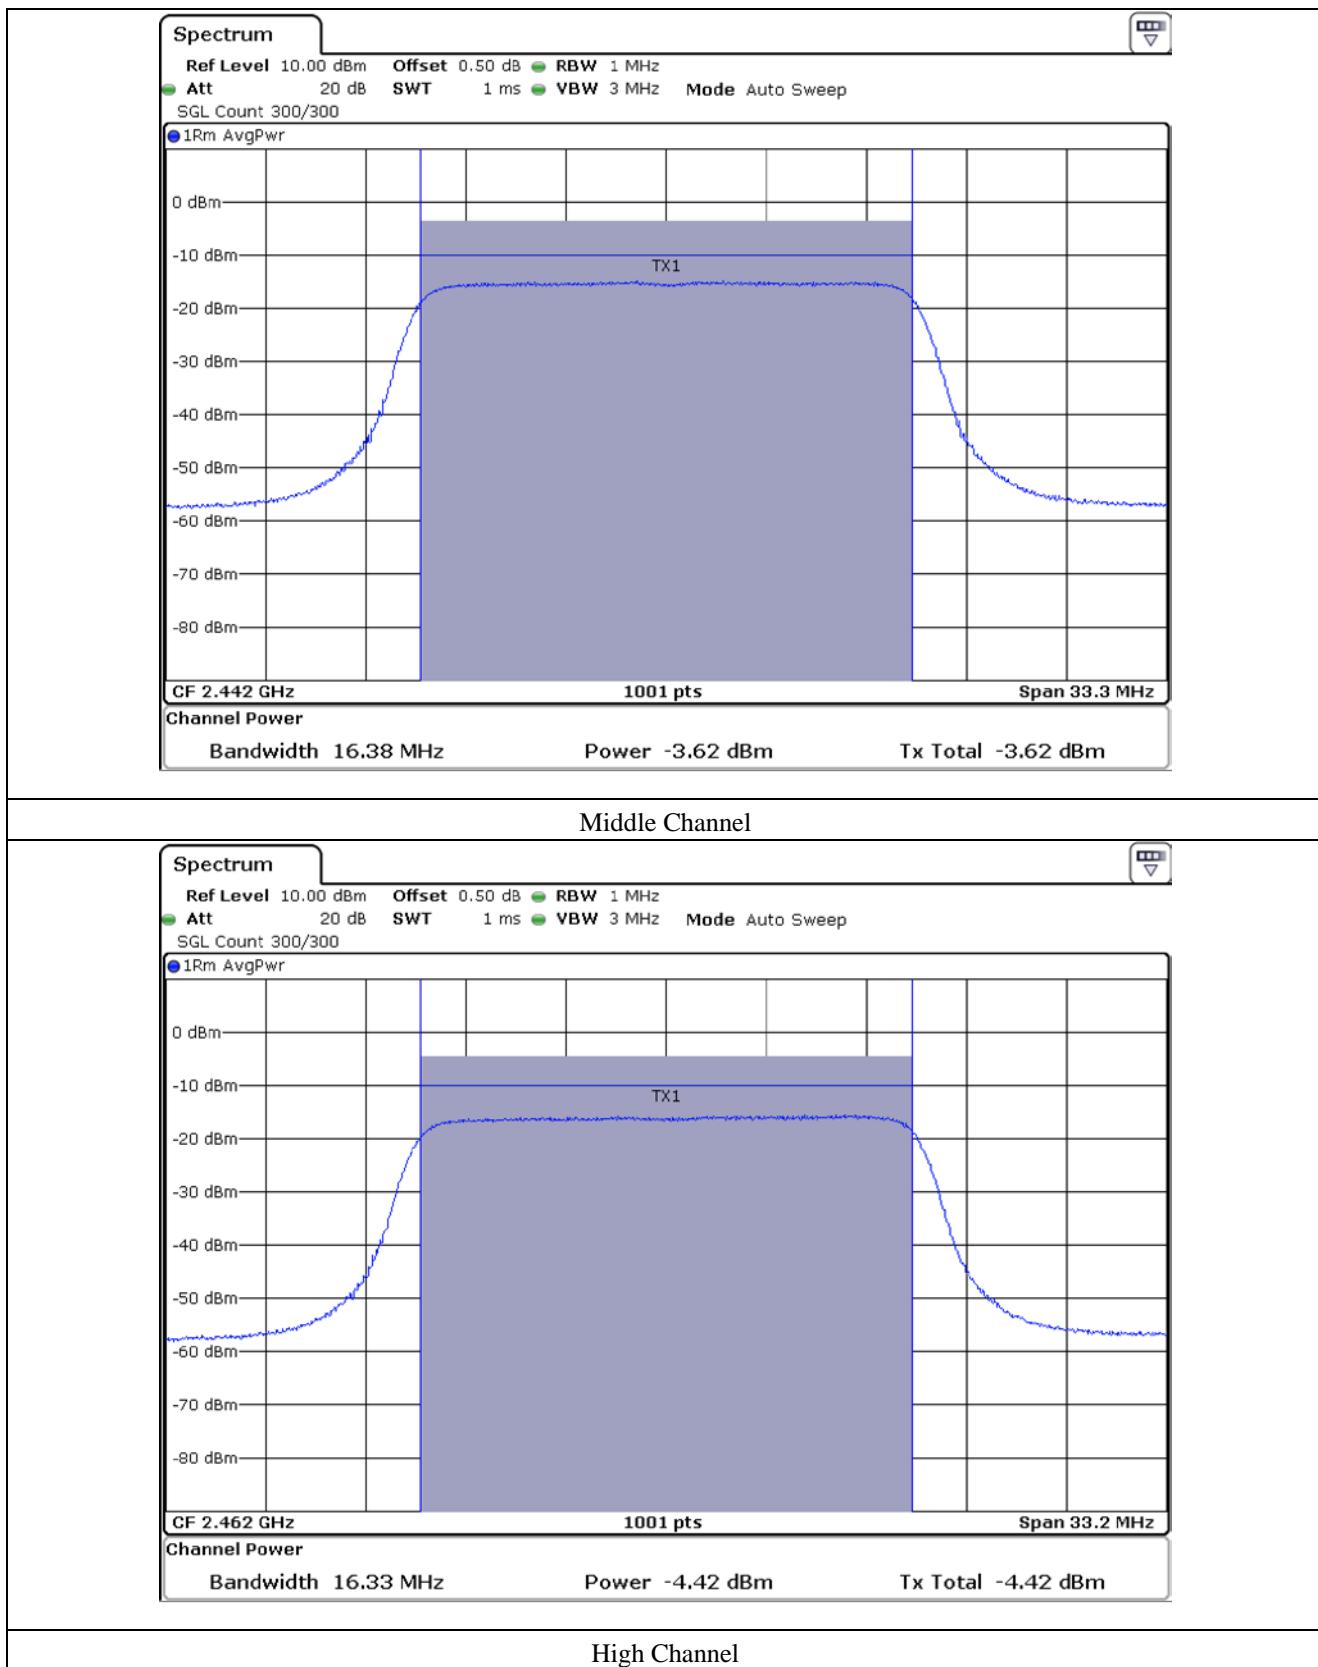


### 8.6 Test data for 802.11n\_HT20 WLAN Mode



- Test Date : February 04, 2020 ~ February 07, 2020
- Test Result : Pass
- Duty Cycle : 86.47 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	Correction Factor (dB)	Result (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	-4.17	0.63	-3.54	30.00	33.54
MIDDLE	2 442.00	-3.88	0.63	-3.25	30.00	33.25
HIGH	2 462.00	-4.62	0.63	-3.99	30.00	33.99

Remark : Margin = Limit – Result (= Measured Vlaue + Correction Factor)

Tested by: Hyung-Kwon, Oh / Manager

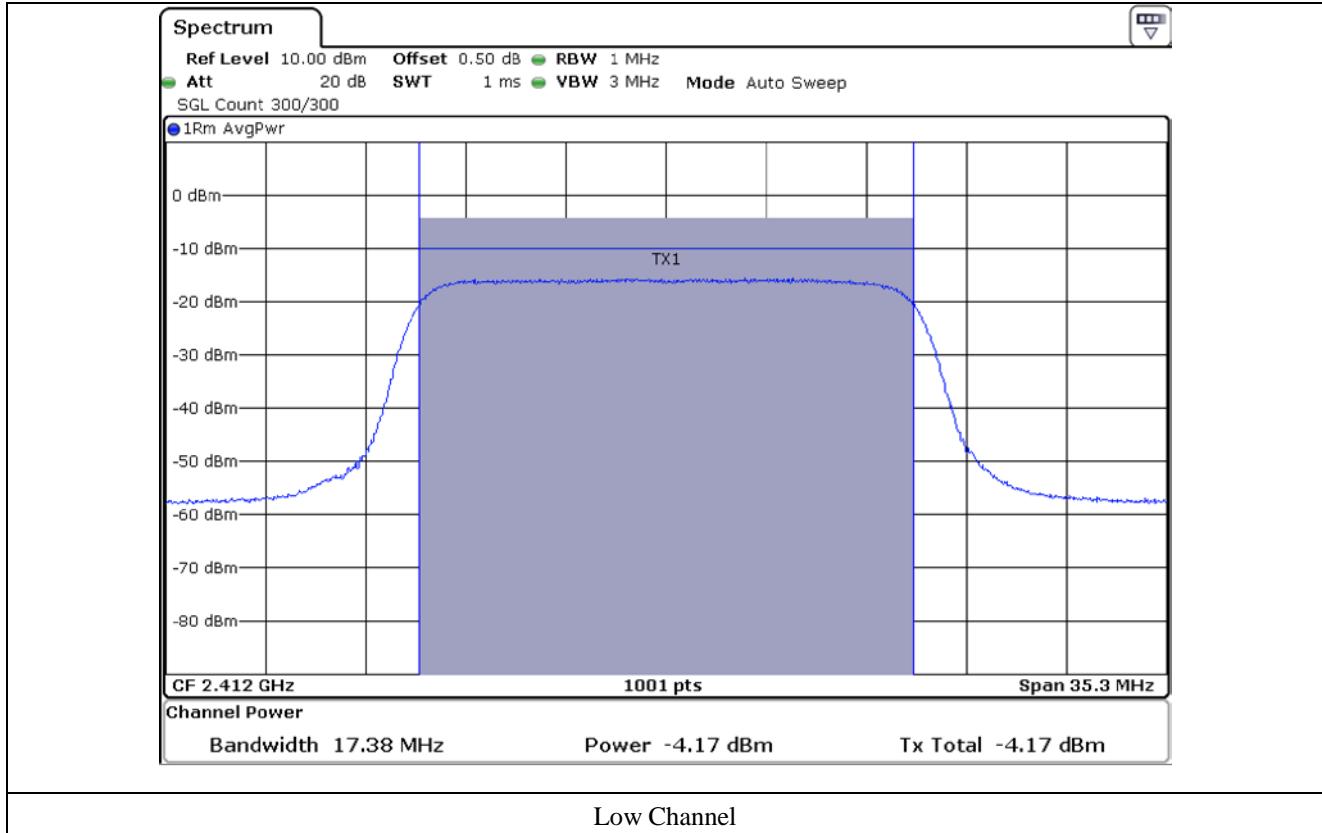

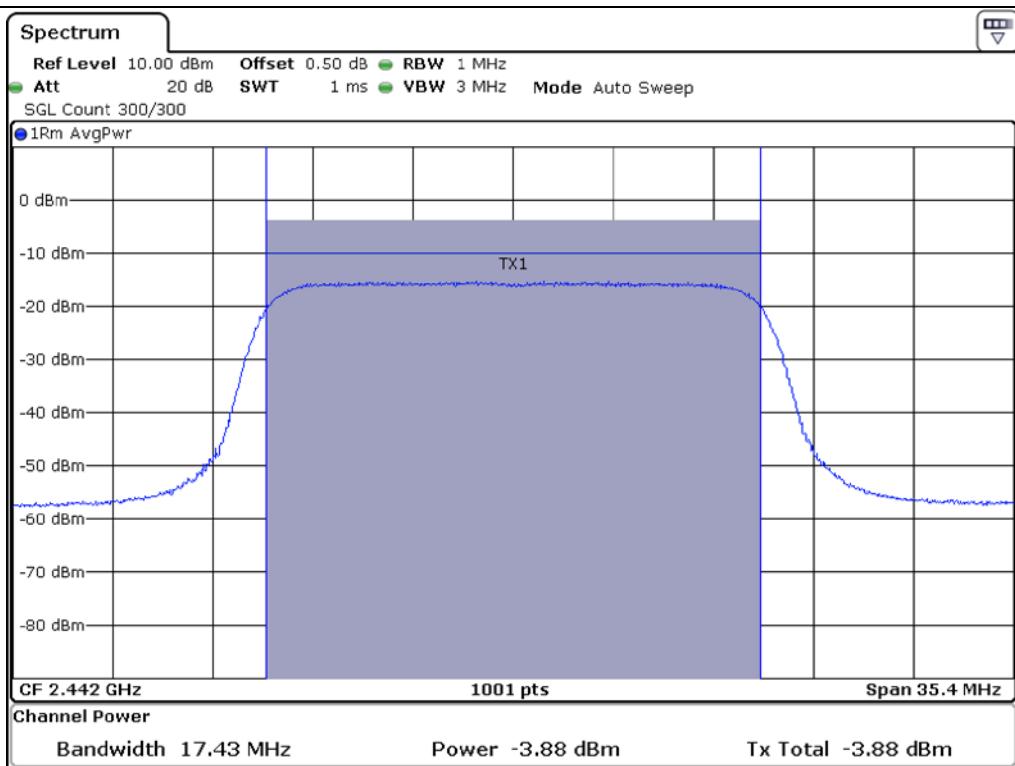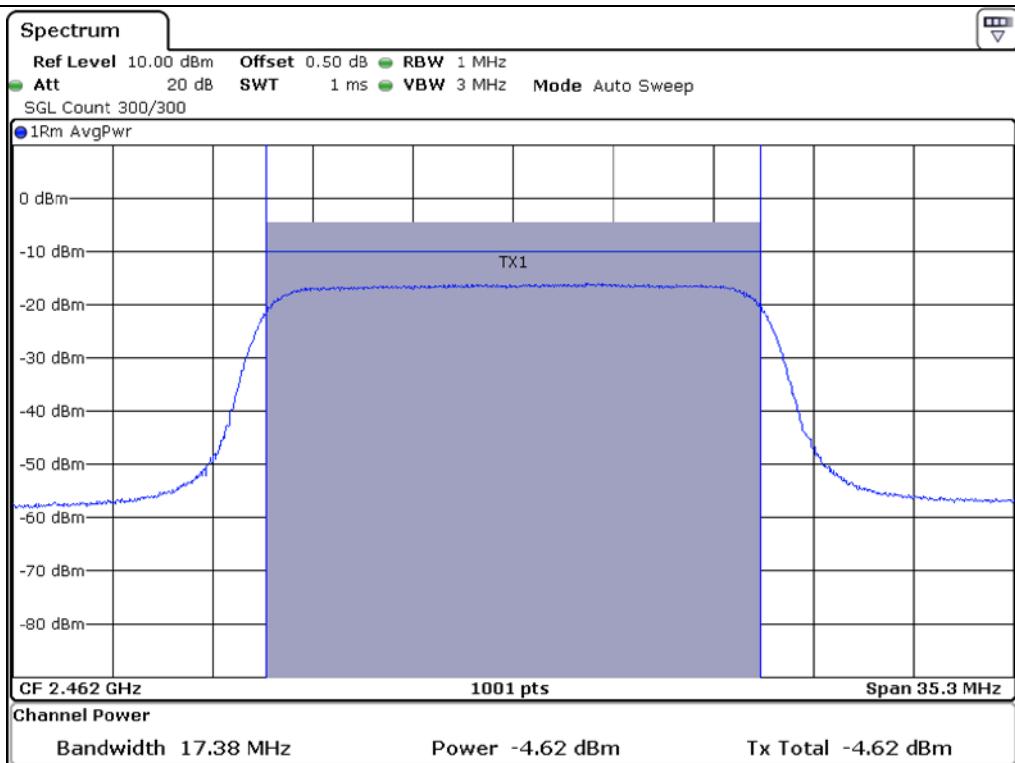**Middle Channel****High Channel**


## 9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

### 9.1 Operating environment

Temperature : 23 °C  
Relative humidity : 46 % R.H.

### 9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

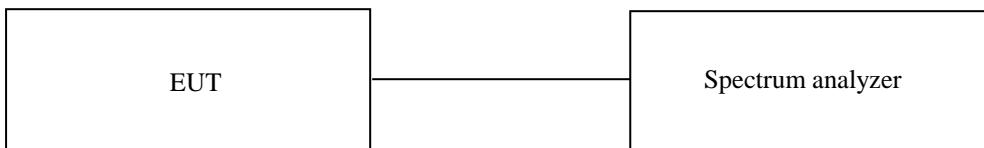

### 9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


### 9.4 Test equipment used


Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Mar. 28, 2019 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312545	Mar. 18, 2019 (1Y)
■ - BBV9718	Schwarzbeck	Amplifier	310	Mar. 28, 2019 (1Y)
■ - SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Mar. 11, 2019 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	777	Apr. 13, 2018 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	9120D-1366	Jul. 16, 2019 (1Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 07, 2020 (1Y)


All test equipment used is calibrated on a regular basis.

## 9.5 Test data for conducted emission


### 9.5.1 Test data for 802.11b WLAN Mode

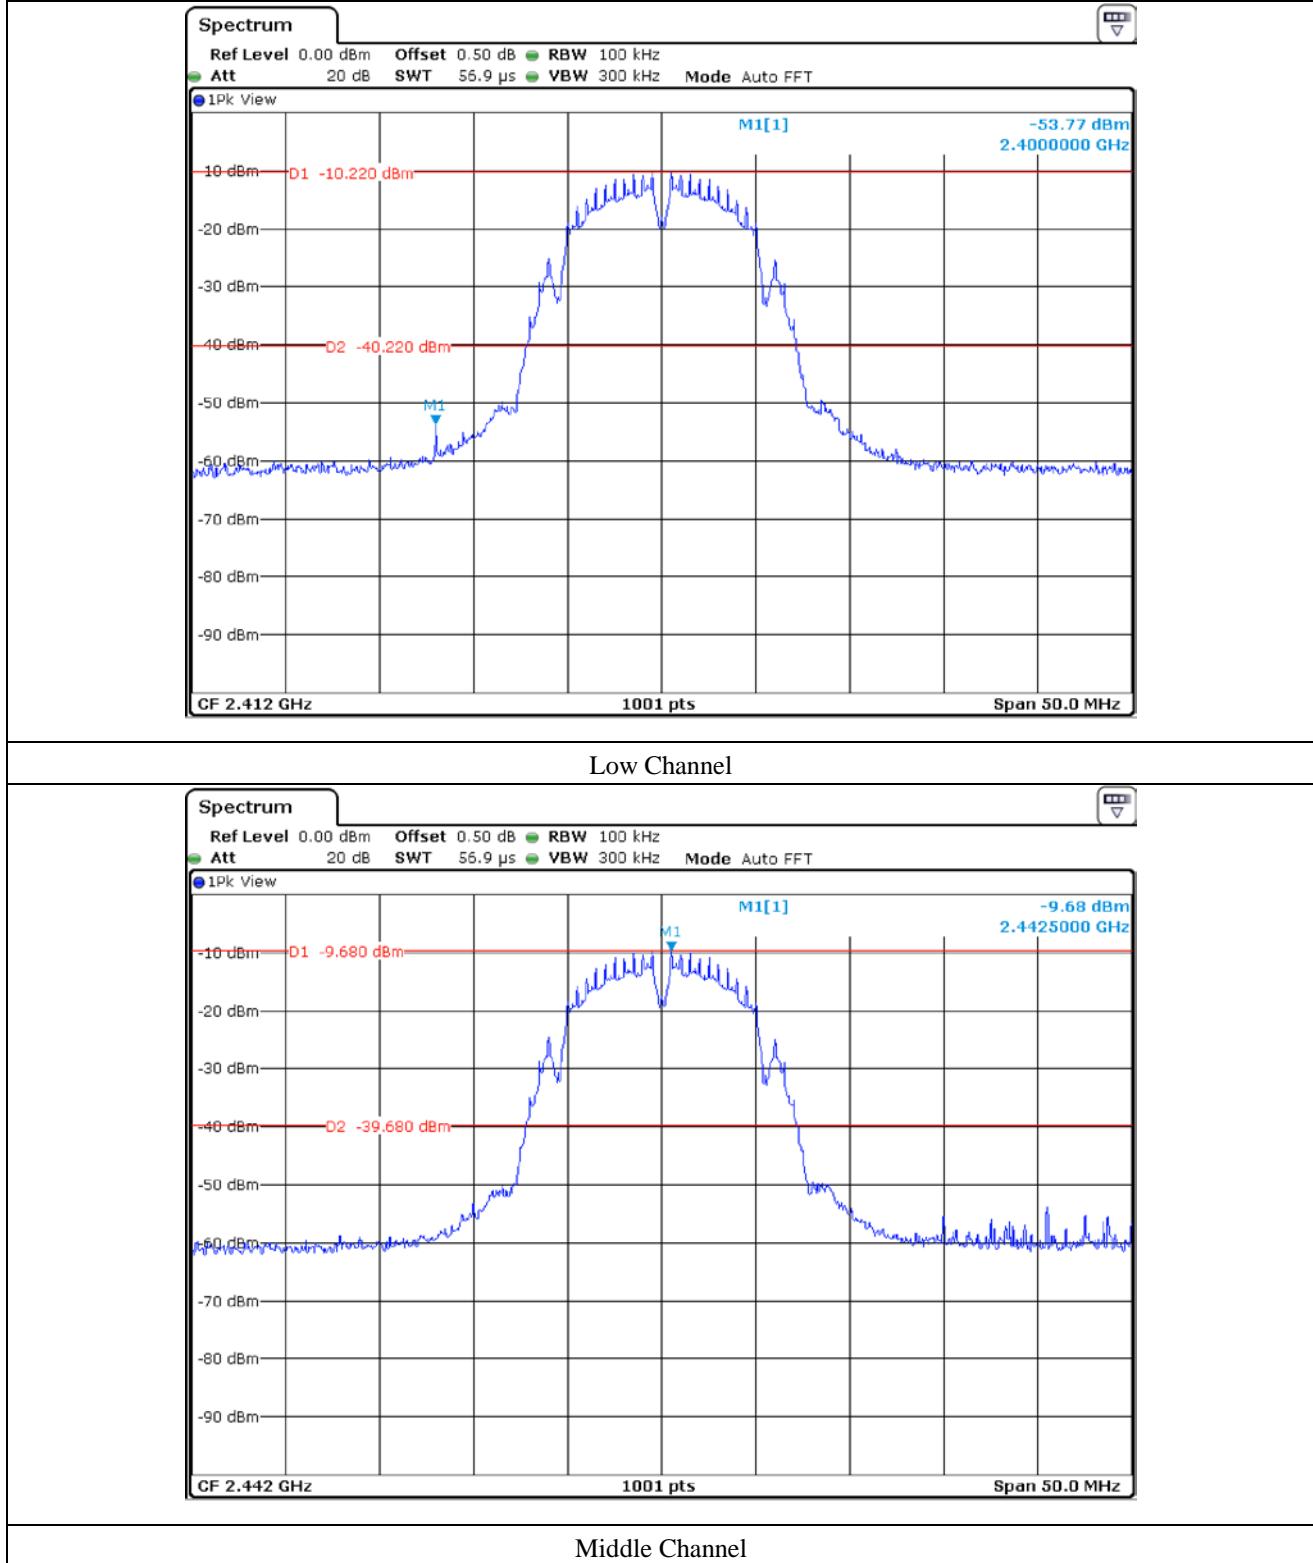

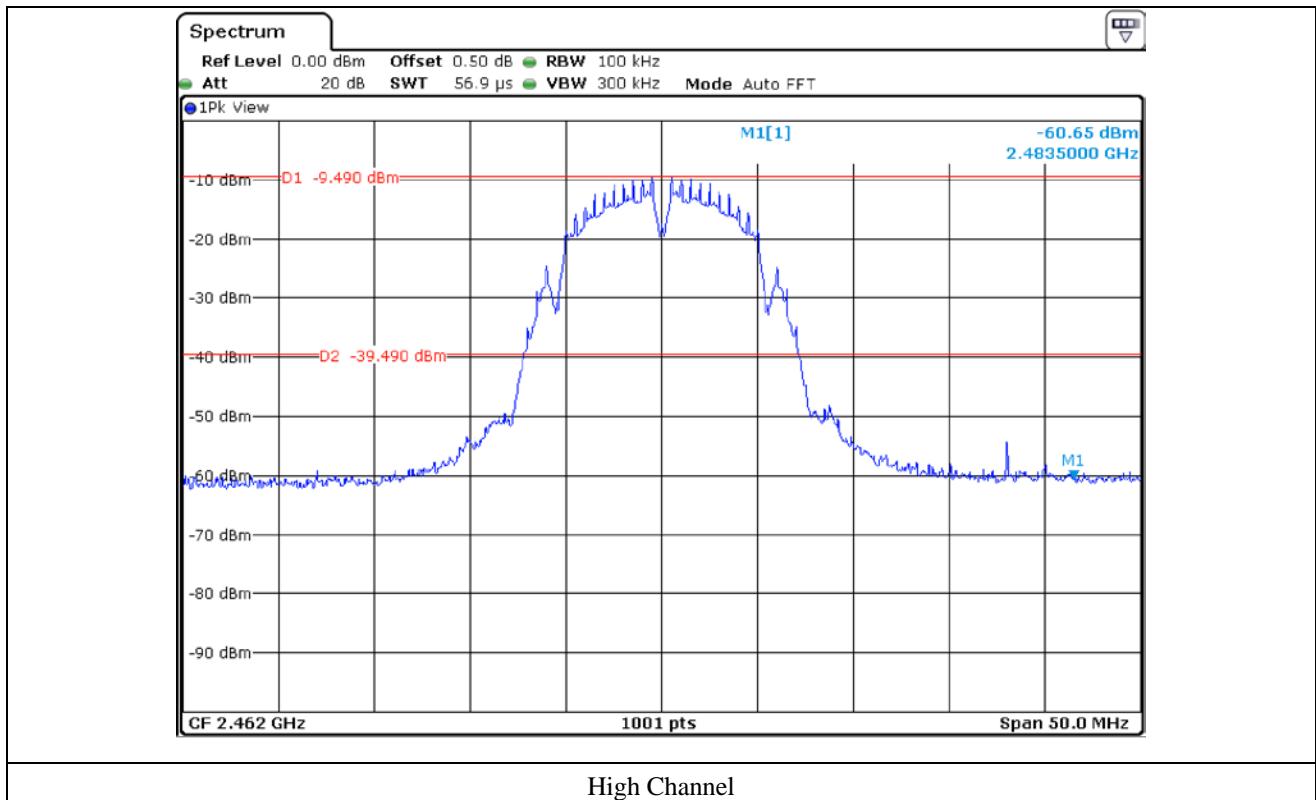


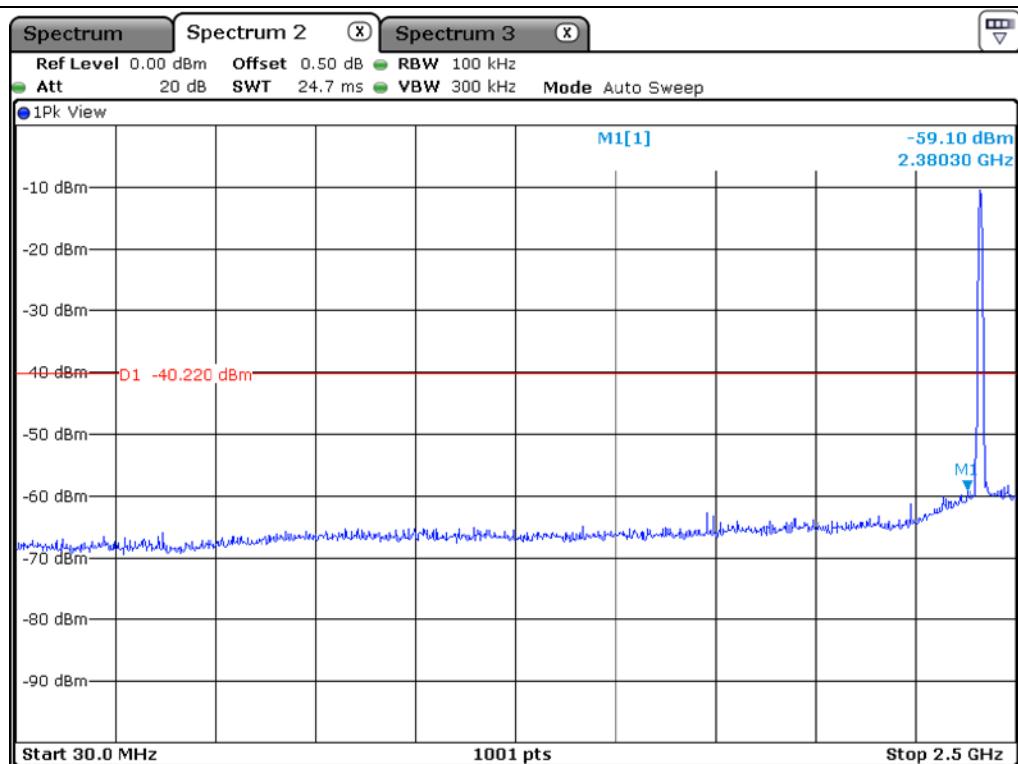


## Low Channel

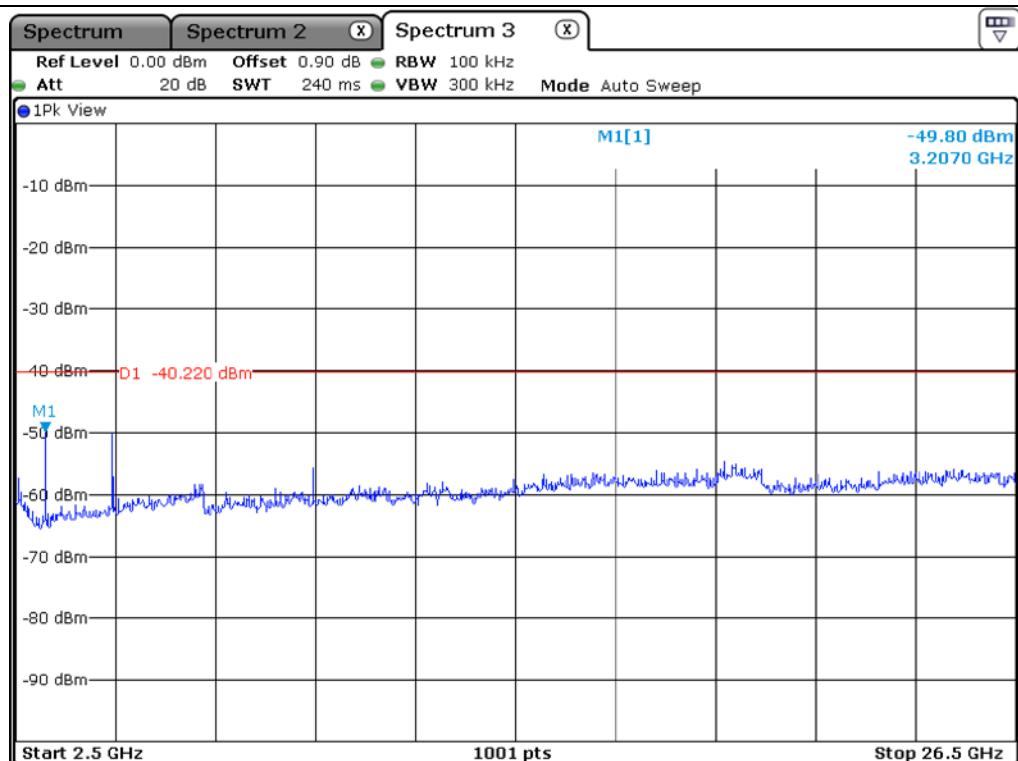


## Low Channel

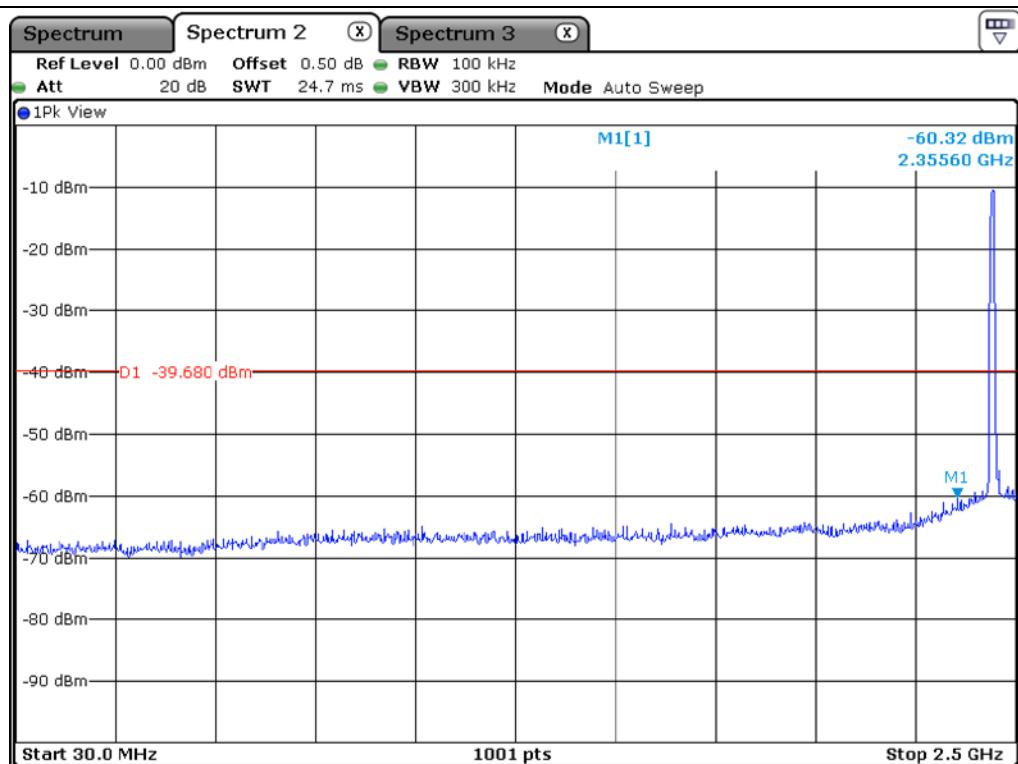


## Middle Channel

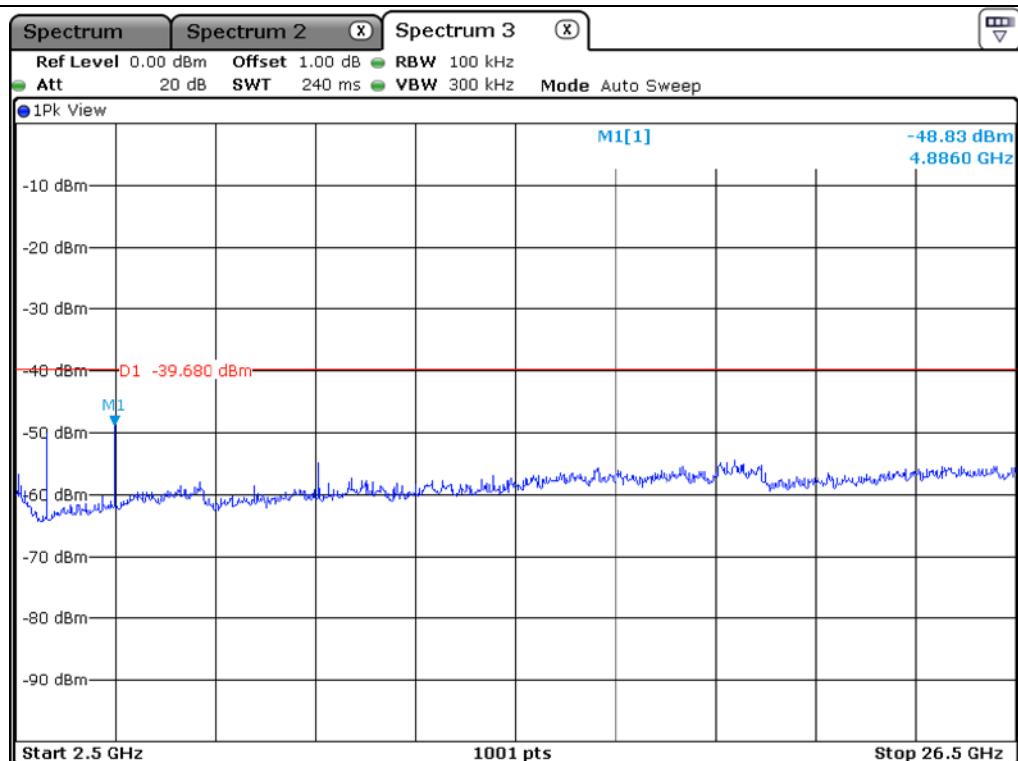

## Middle Channel

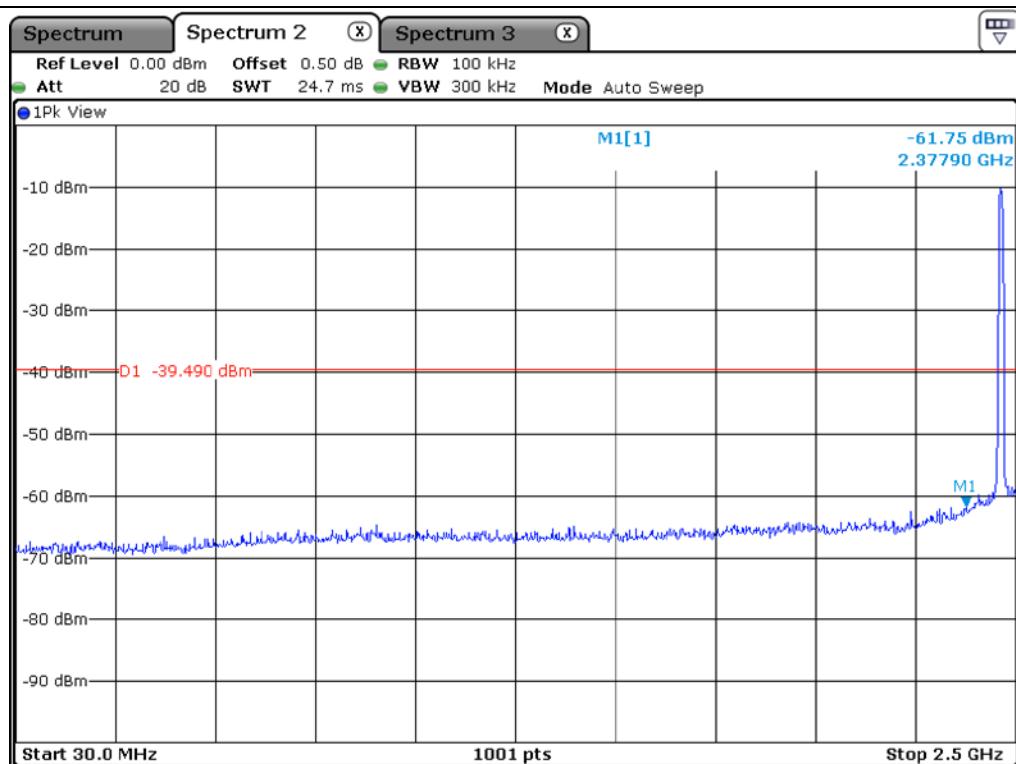


High Channel

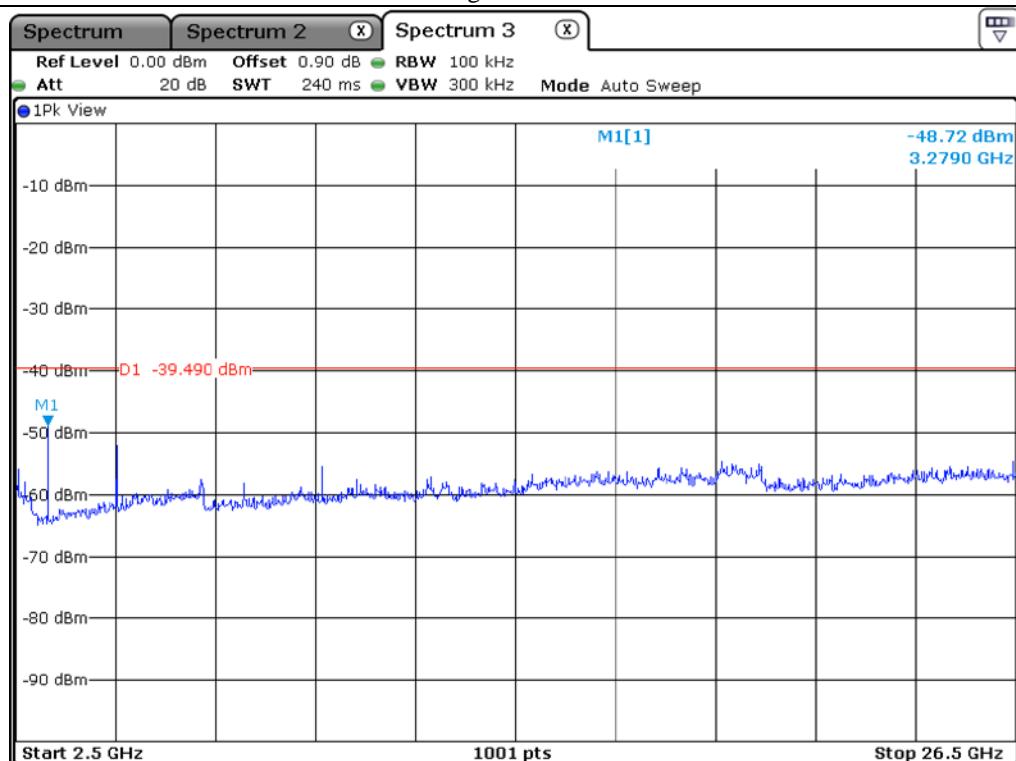


High Channel


### 9.5.2 Test data for 802.11g WLAN Mode

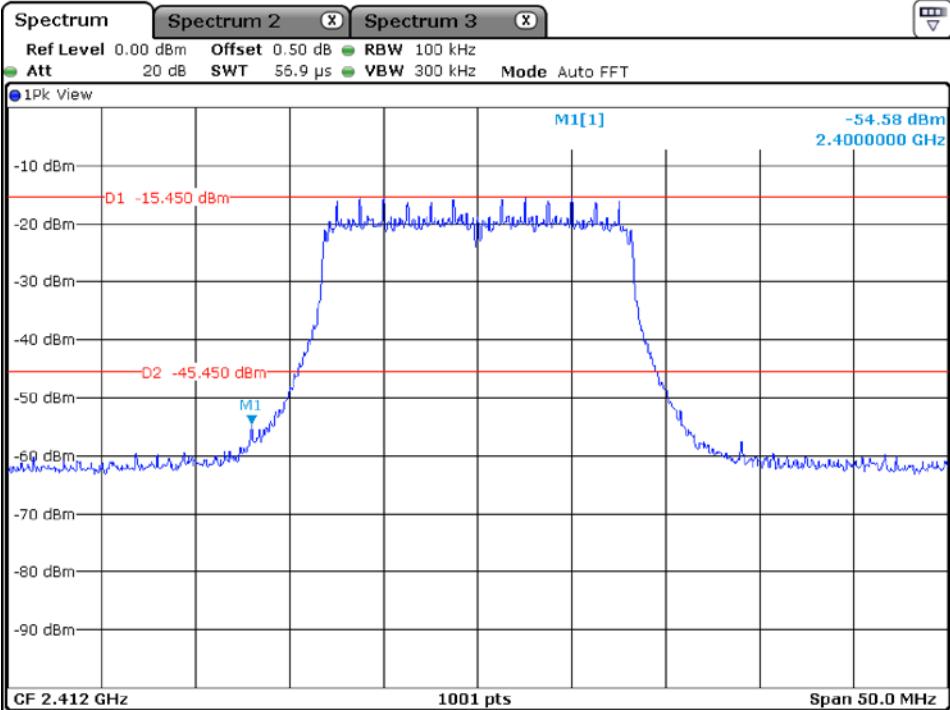


Low Channel

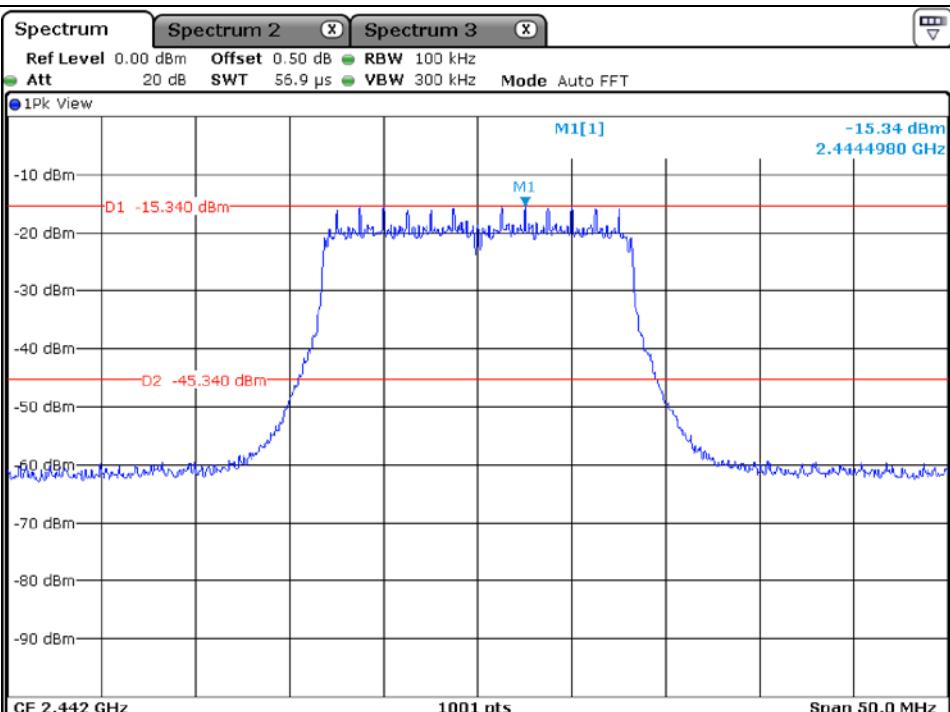


Middle Channel

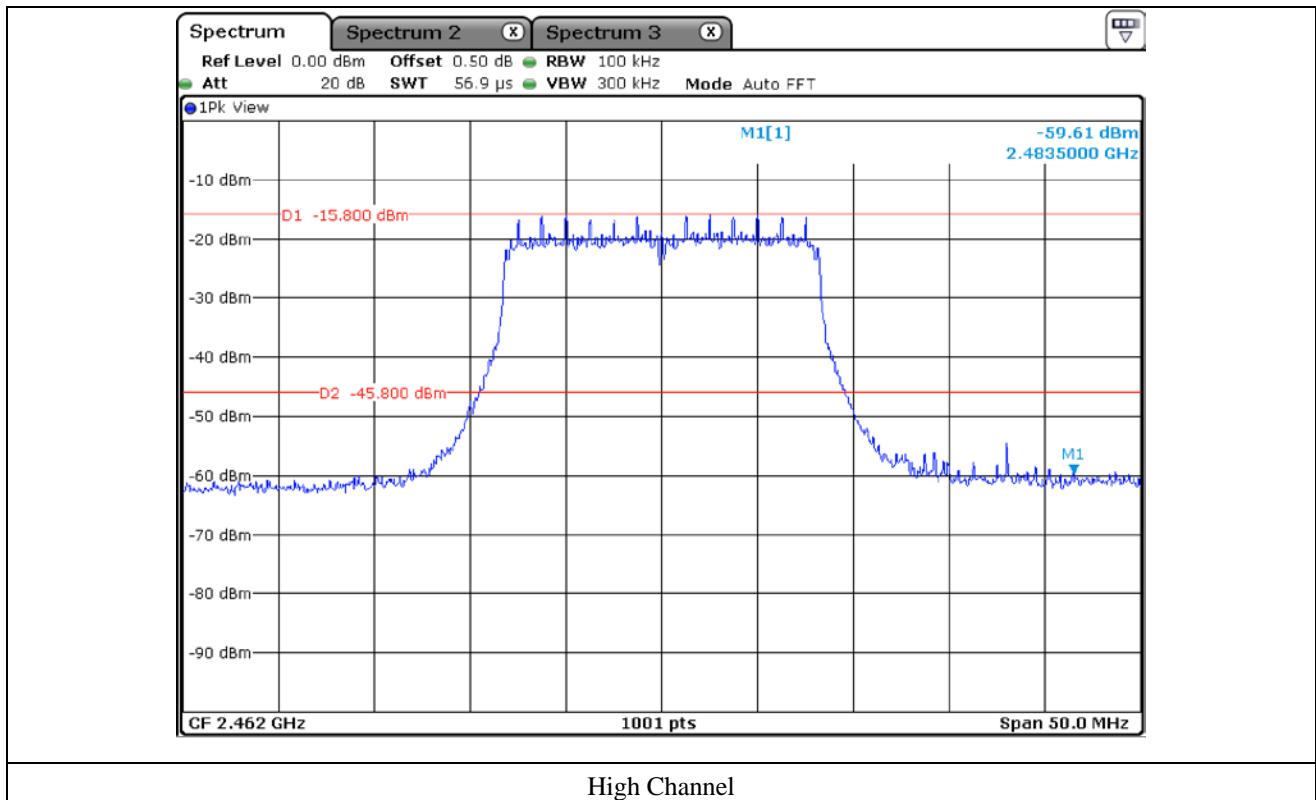


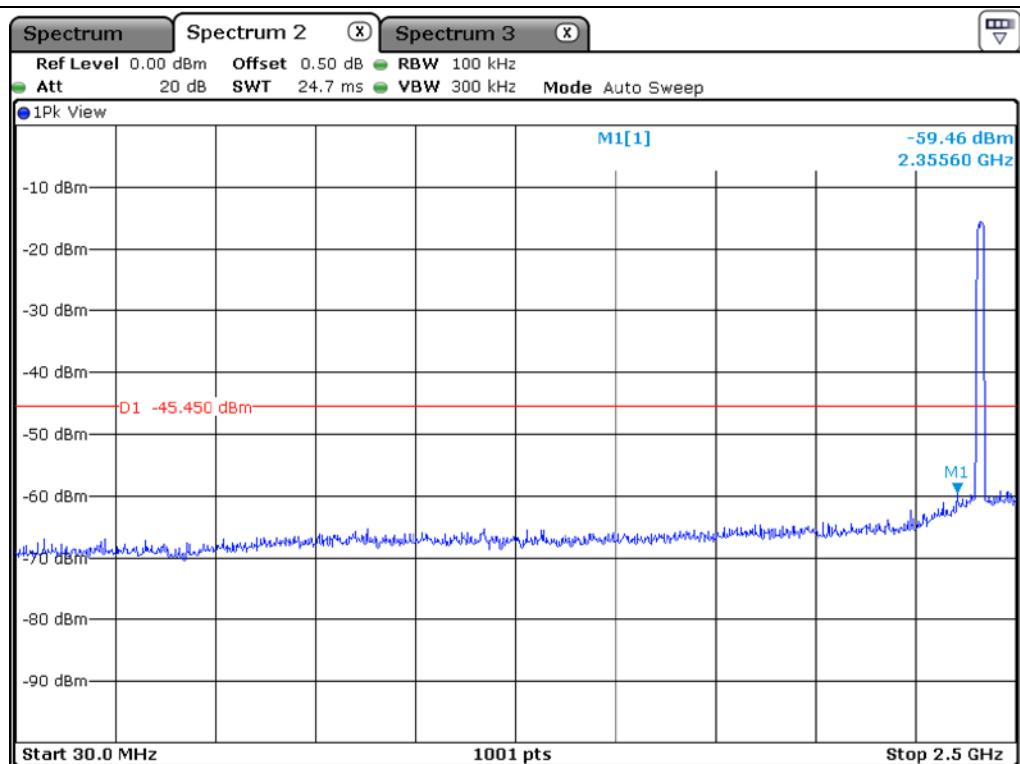


### Low Channel

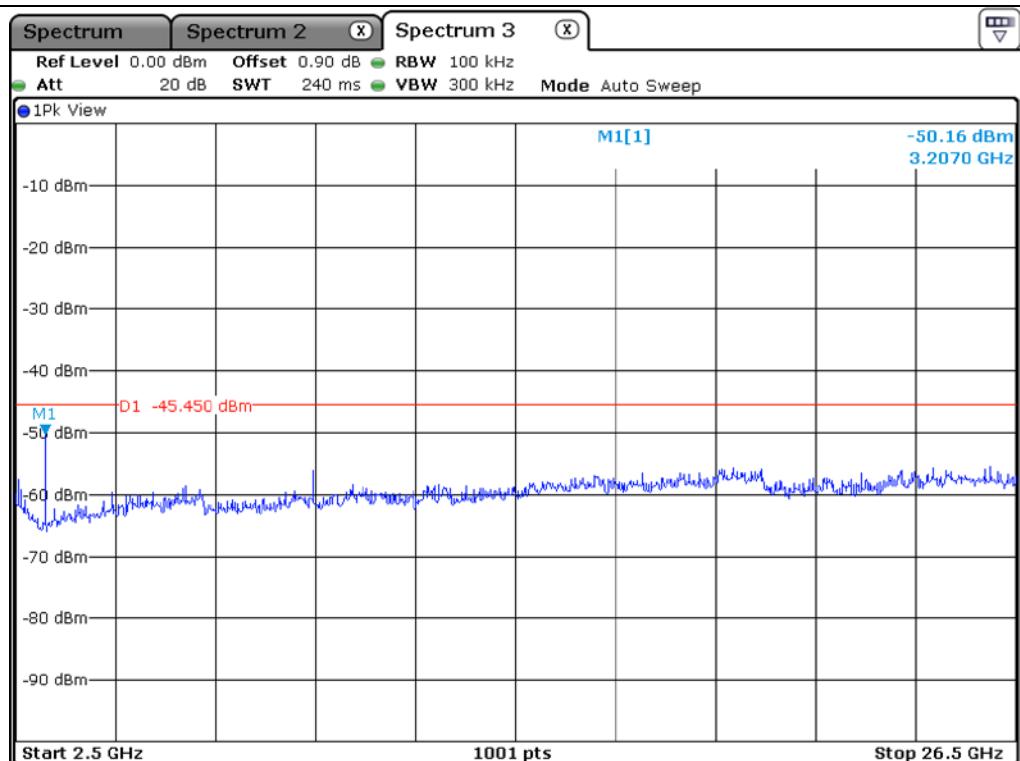


### Low Channel

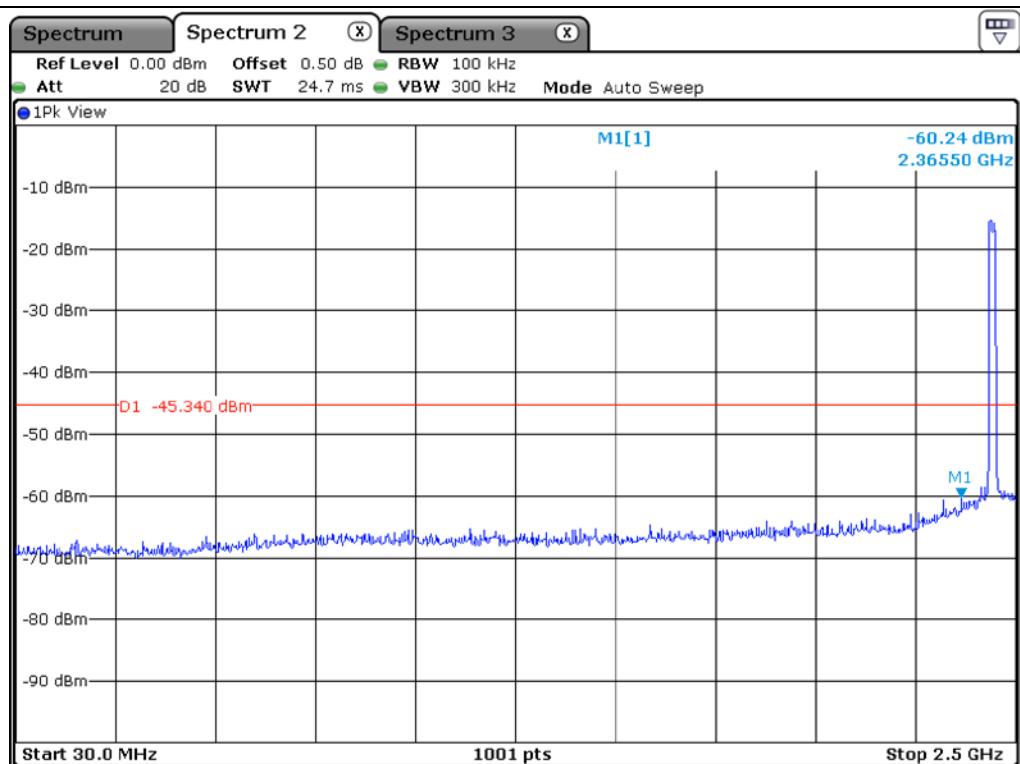


Middle Channel

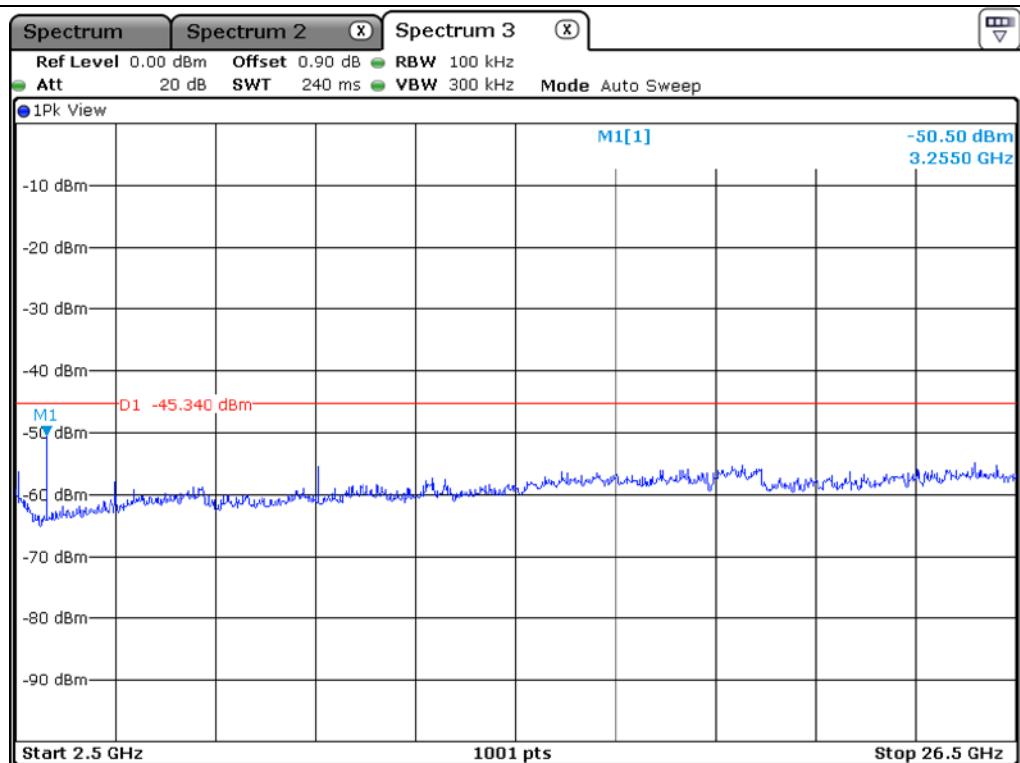

Middle Channel

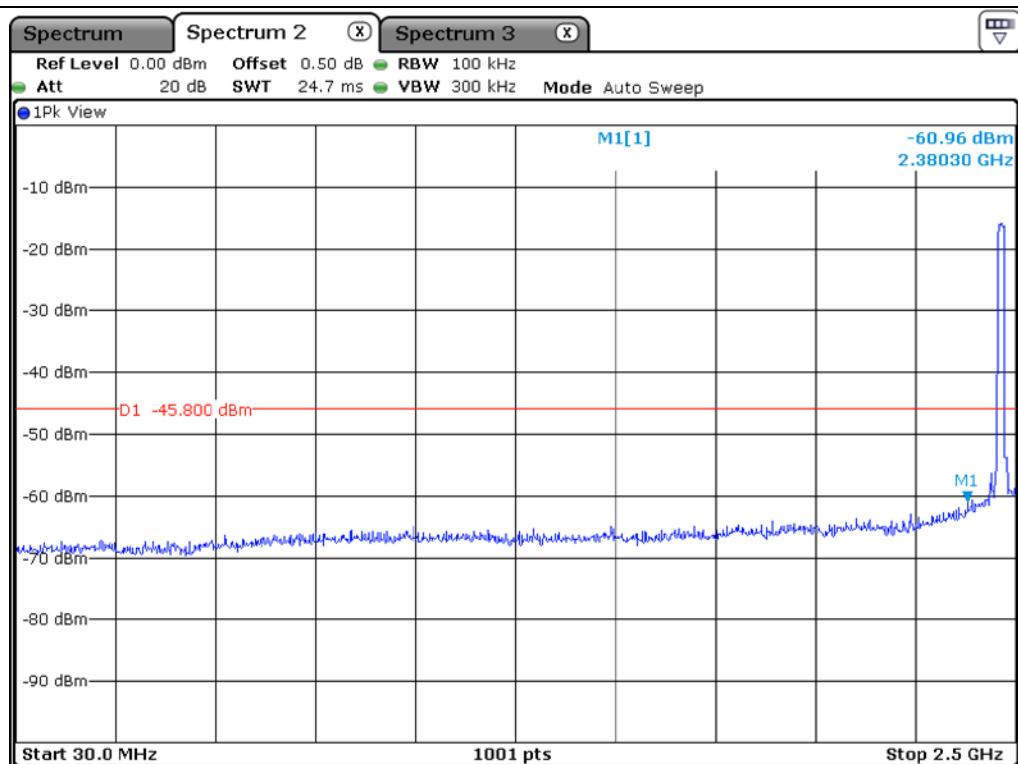



## High Channel

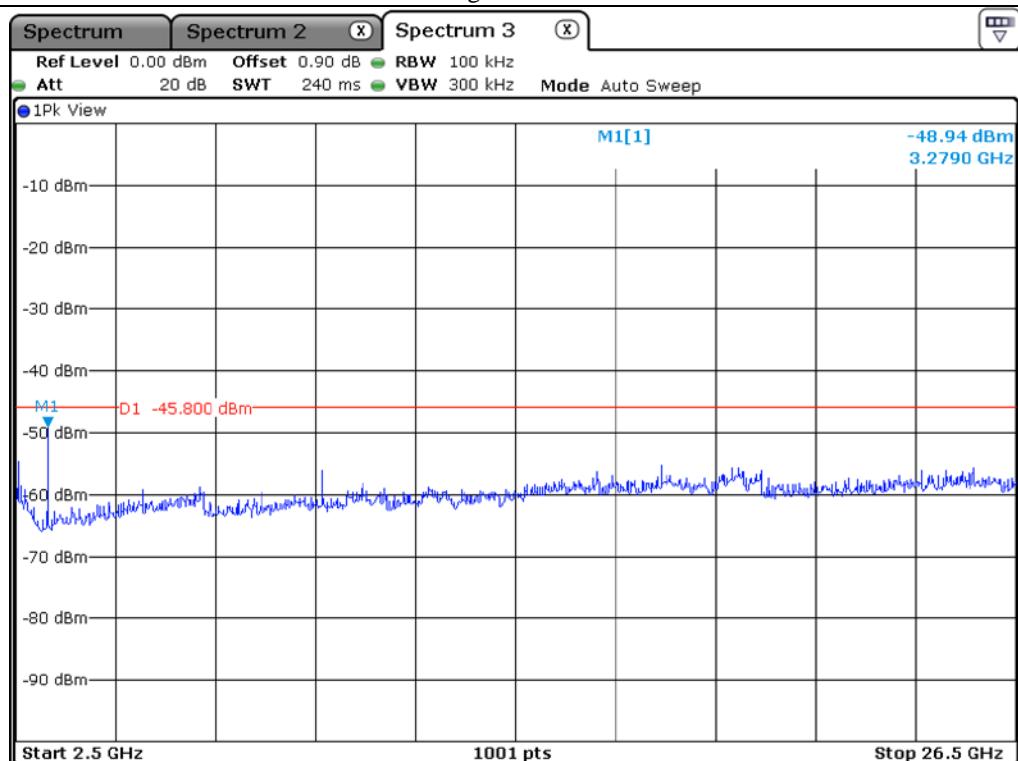


## High Channel


### 9.5.3 Test data for 802.11n\_HT20 WLAN Mode

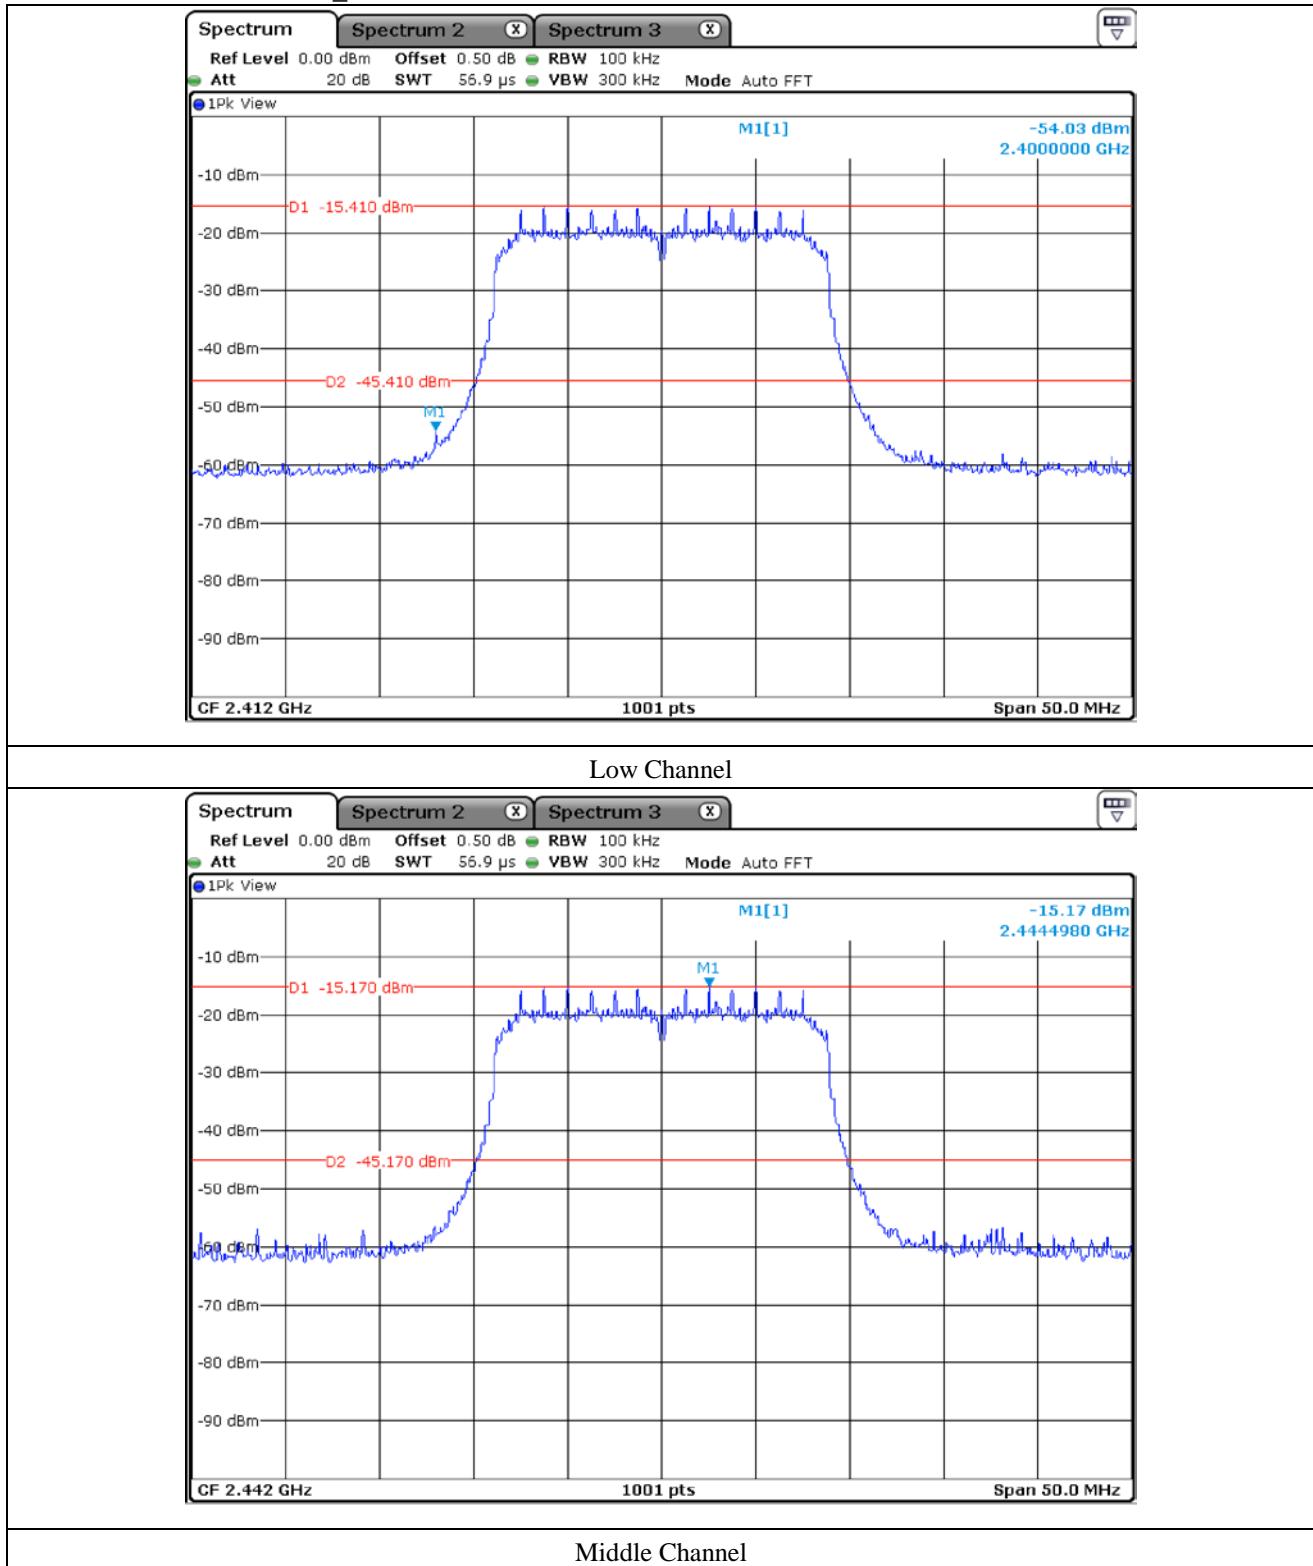

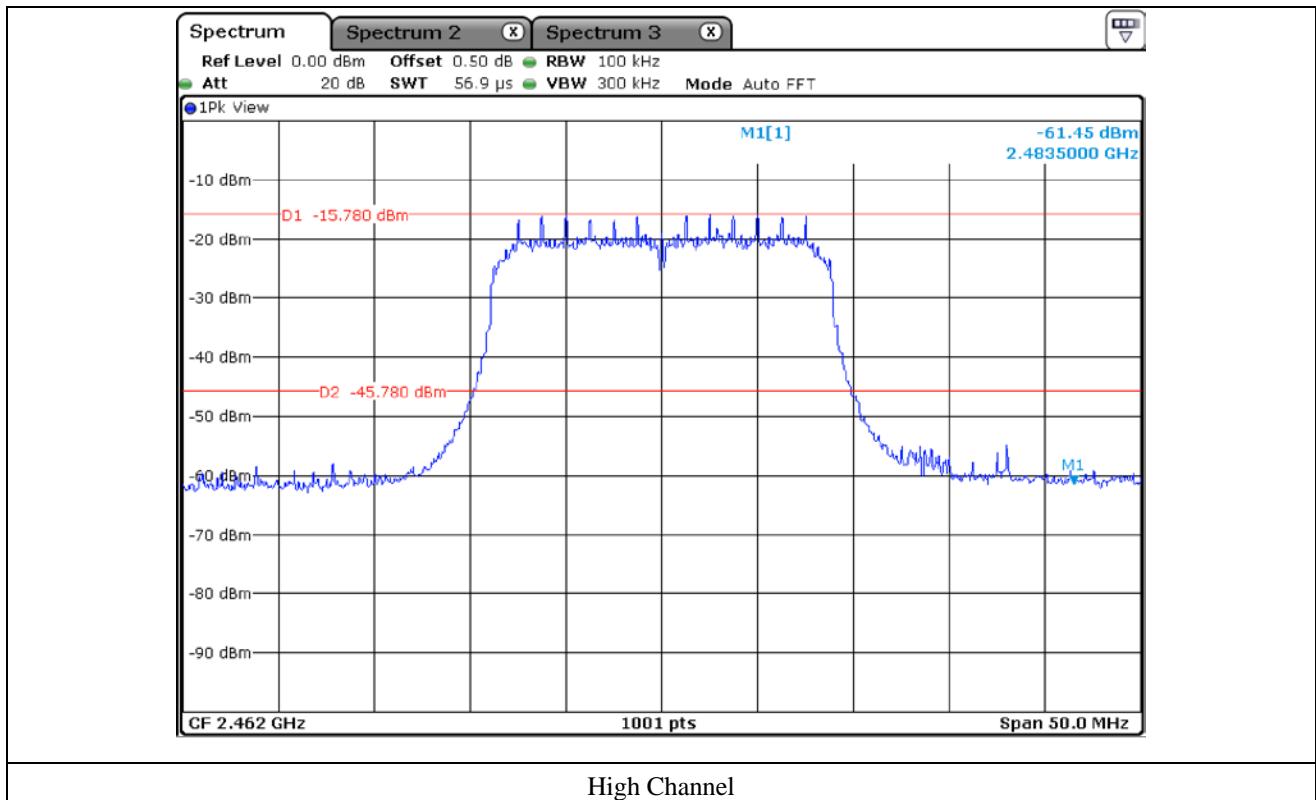


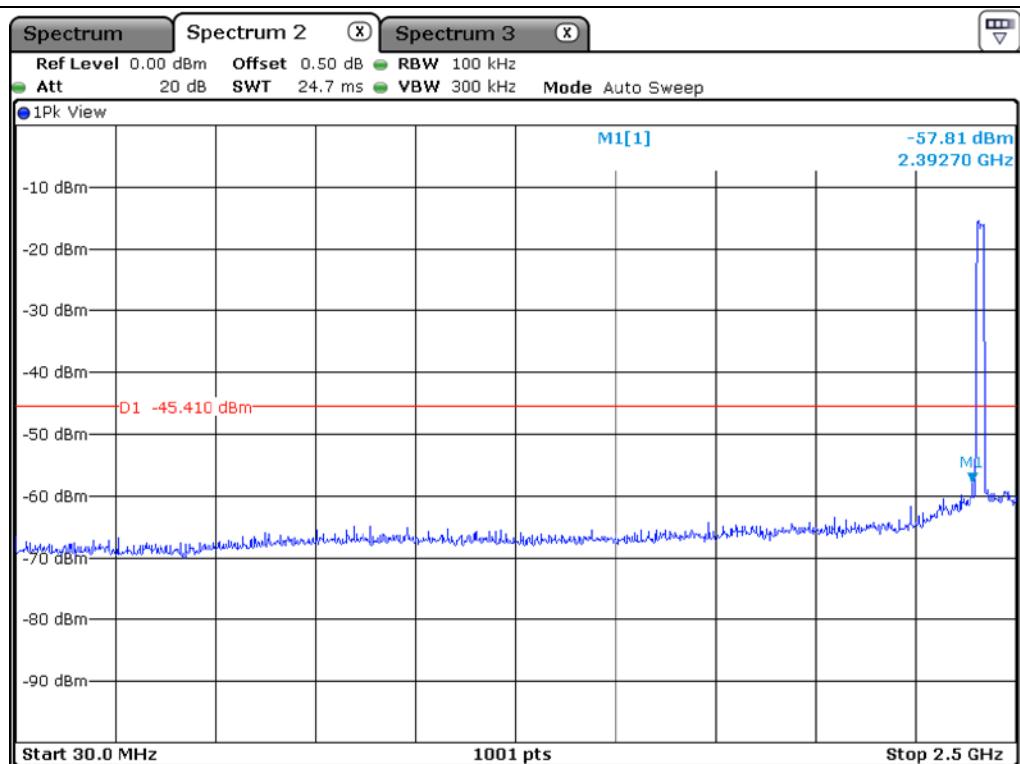


### Low Channel

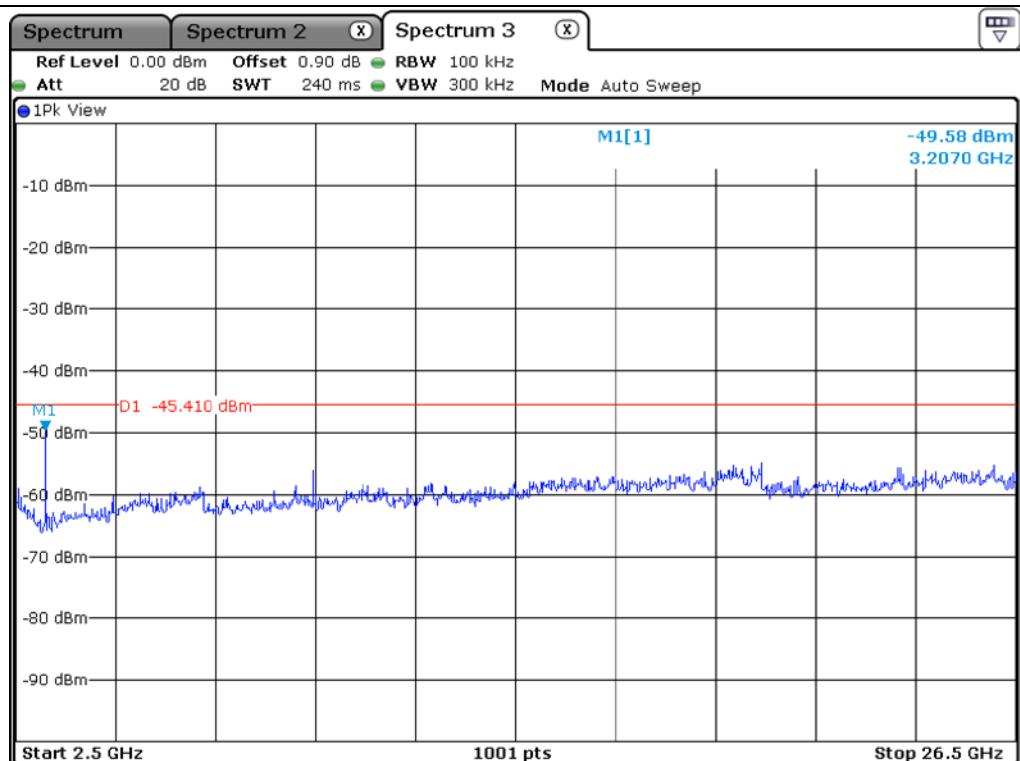


### Low Channel

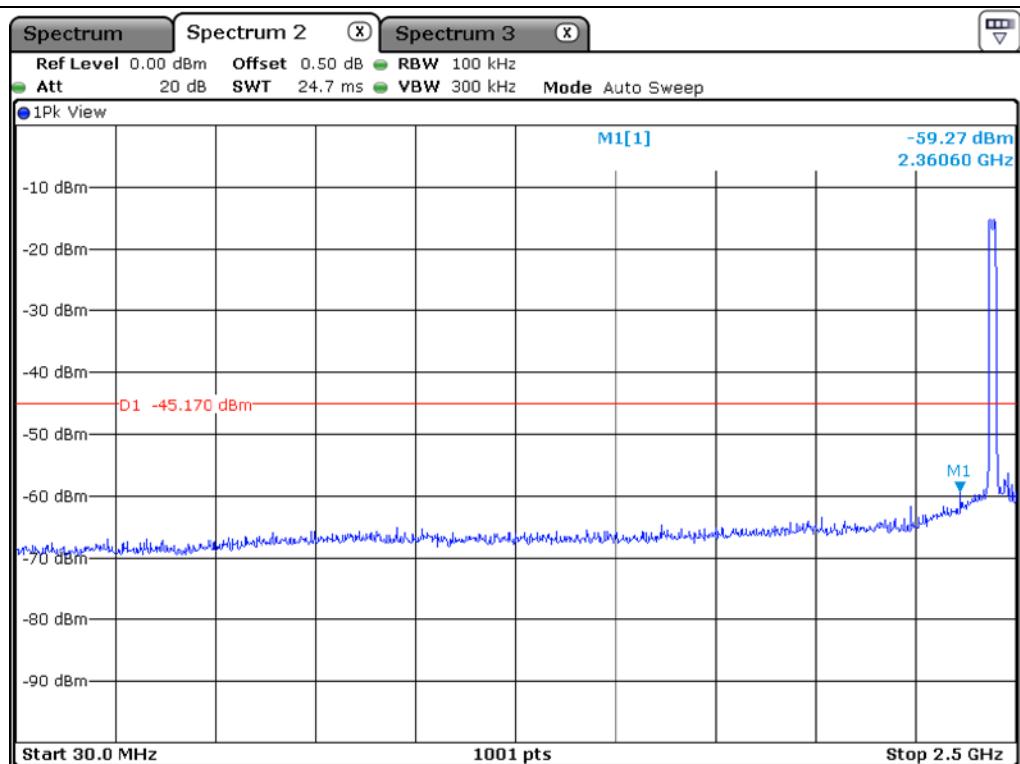


## Middle Channel

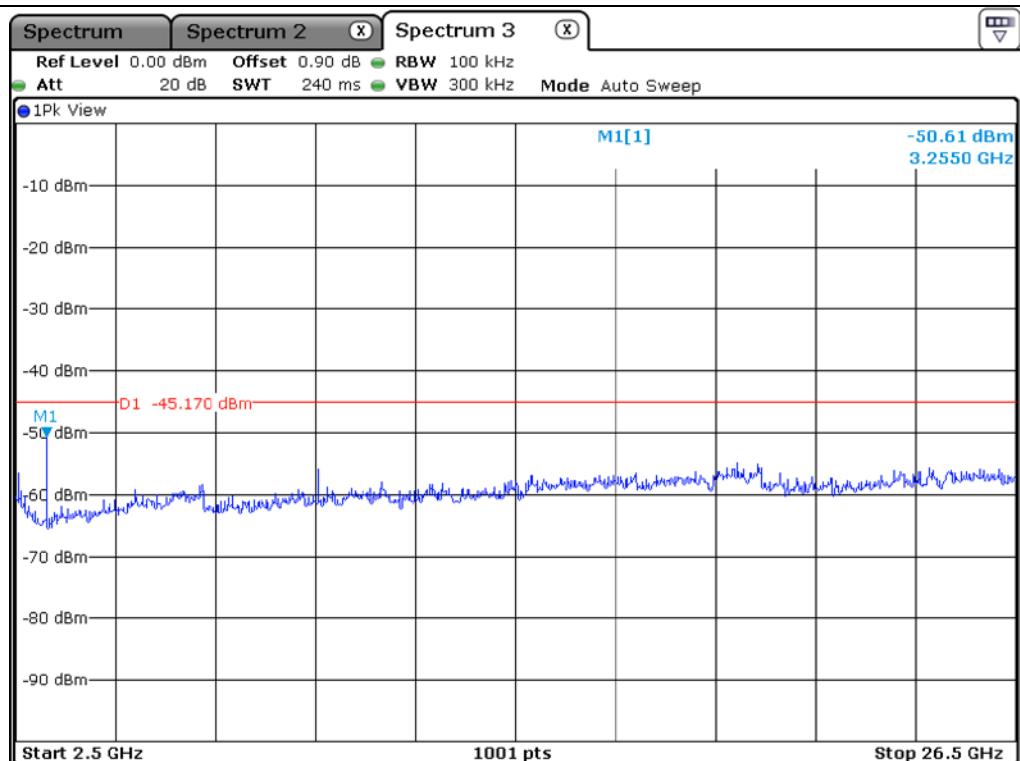

## Middle Channel

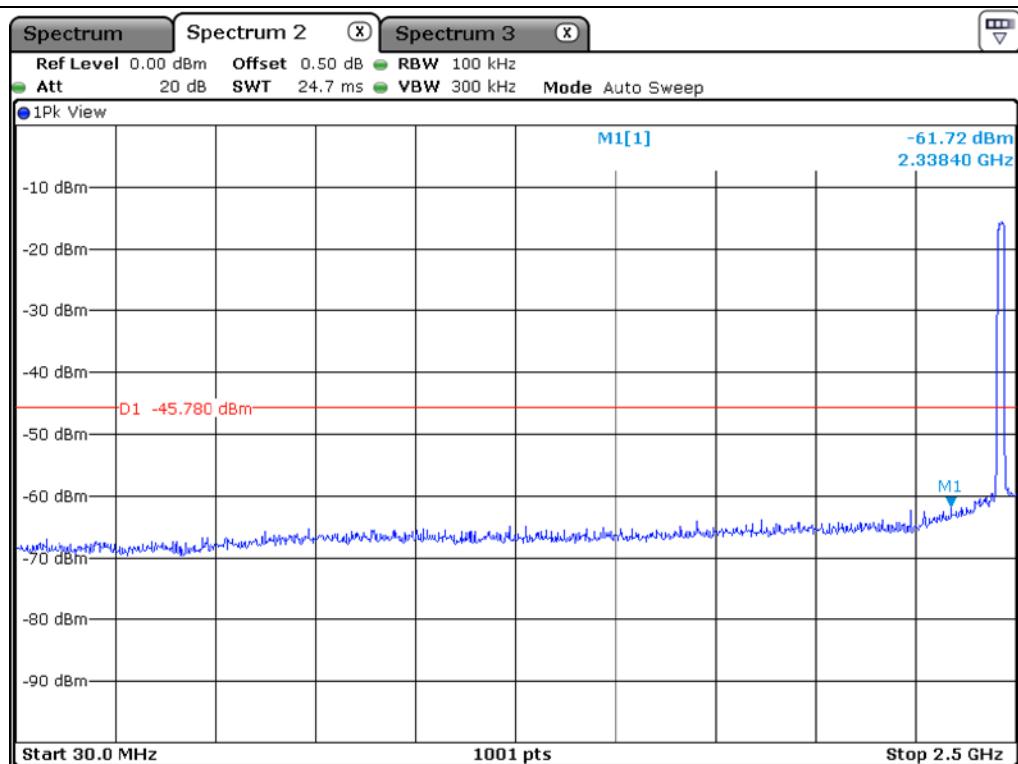

### High Channel

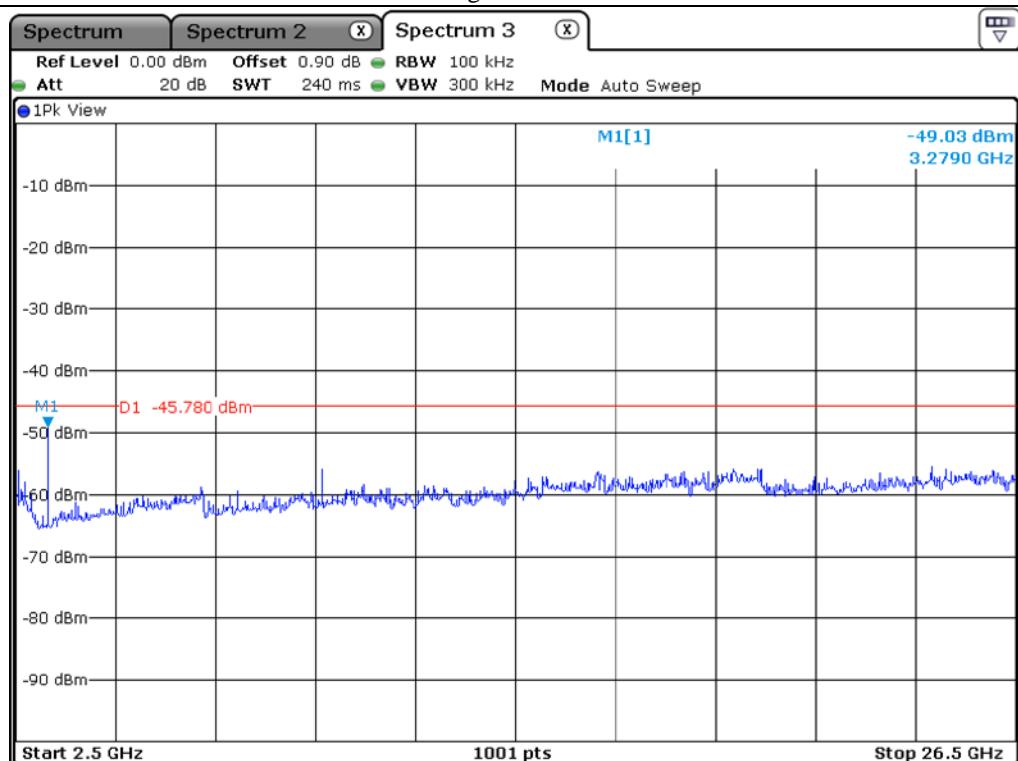

### High Channel

## 9.6 Test data for radiated emission

### 9.6.1 Radiated Emission which fall in the Restricted Band

#### 9.6.1.1 Test data for 802.11b WLAN Mode

- Test Date : February 04, 2020 ~ February 07, 2020
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode  
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 89.08 %
- Result : PASSED

Frequency (MHz)	Reading (dB $\mu$ V)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Correction Factor	Total (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
-----------------	----------------------	---------------	-----------------	-------------	------------	-------------------	----------------------	-----------------------	-------------

#### Test Data for Low Channel

2 312.278	17.54	Peak	H	26.94	9.20	-	53.68	74.00	20.32
2 310.440	6.43	Average	H			0.50	43.07	54.00	10.93
2 325.385	17.60	Peak	V			-	53.74	74.00	20.26
2 310.200	6.55	Average	V			0.50	43.19	54.00	10.81

#### Test Data for High Channel

2 491.255	18.80	Peak	H	27.47	9.49	-	55.76	74.00	18.24
2 483.541	6.33	Average	H			0.50	43.79	54.00	10.21
2 484.398	18.54	Peak	V			-	55.50	74.00	18.50
2 483.508	6.24	Average	V			0.50	43.70	54.00	10.30


Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical


$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$


Tested by: Hyung-Kwon Oh / Manager

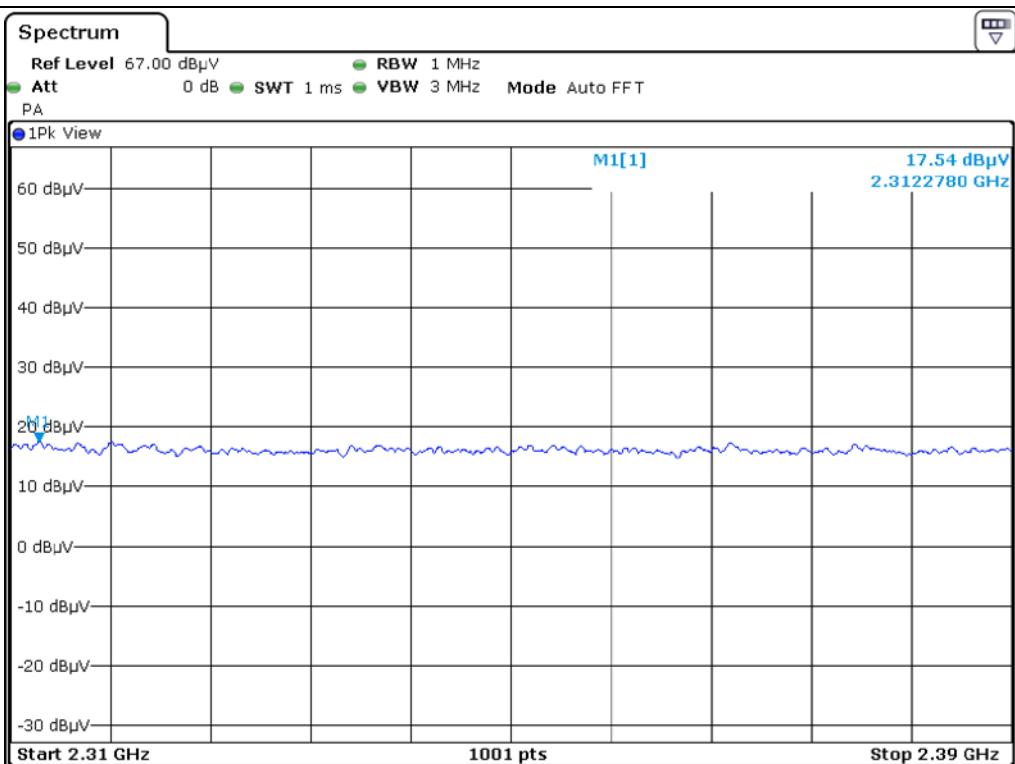


Low Channel\_Peak\_H

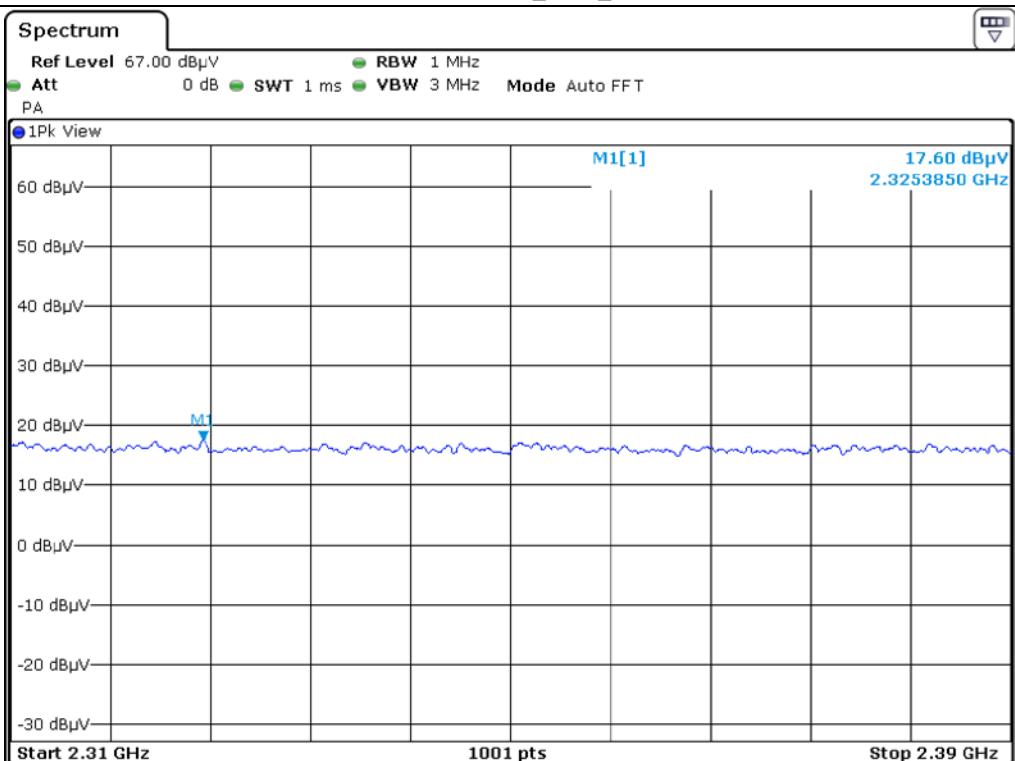


Low Channel\_Peak\_V

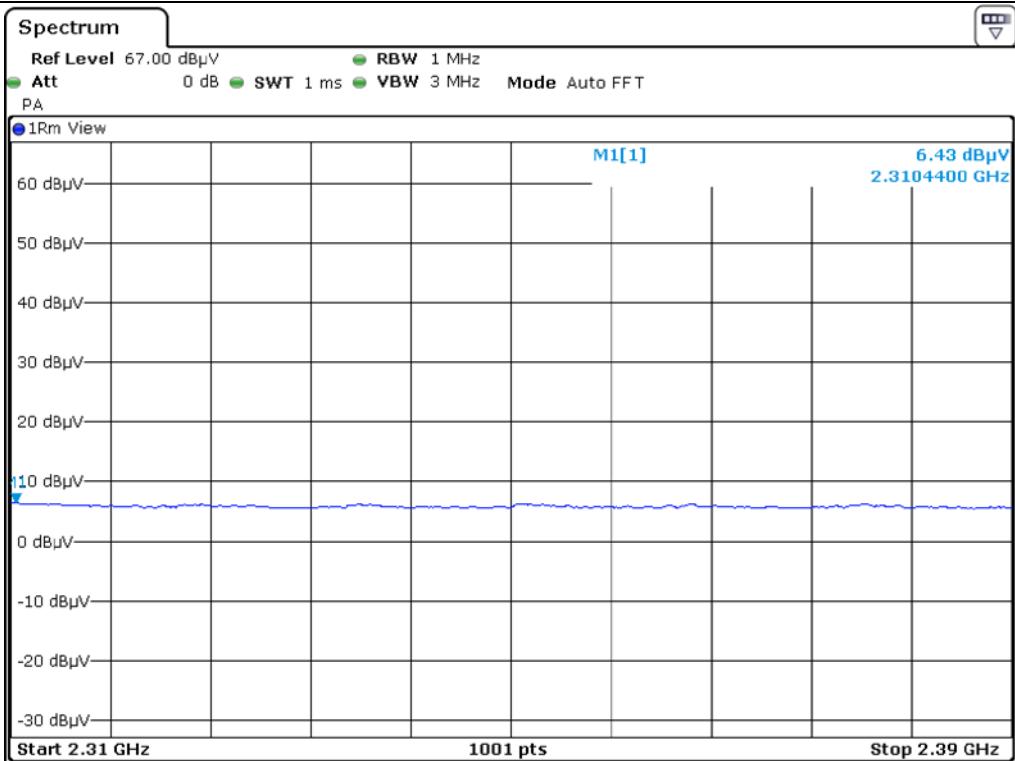


Low Channel\_Average\_H

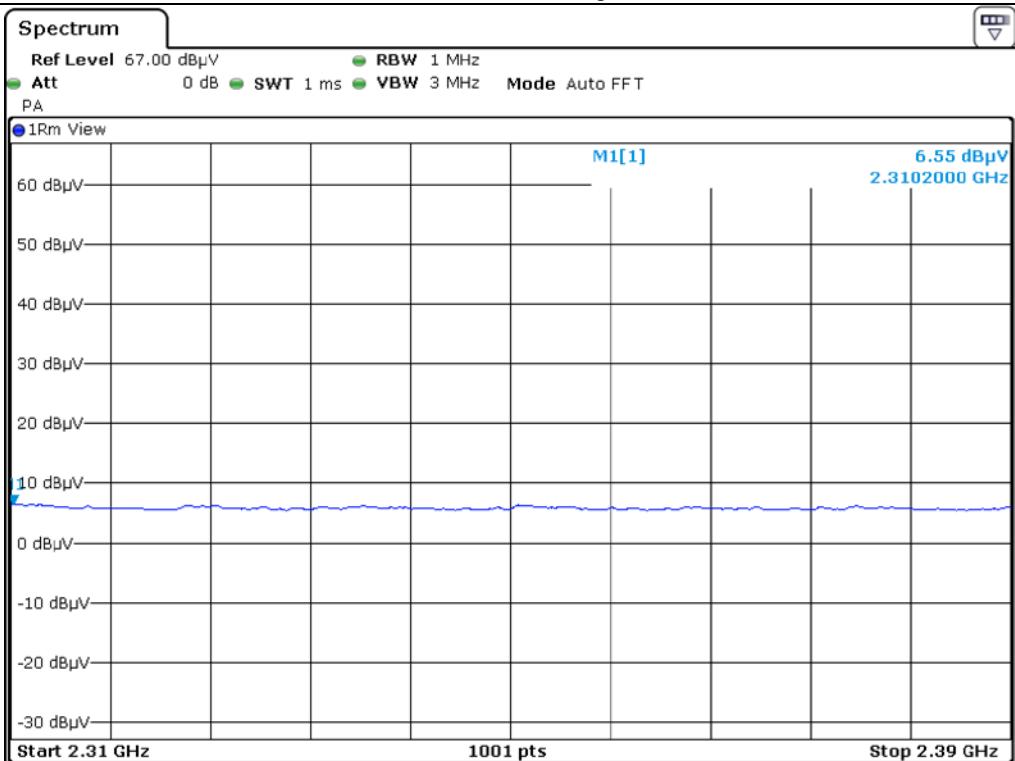


Low Channel\_Average\_V

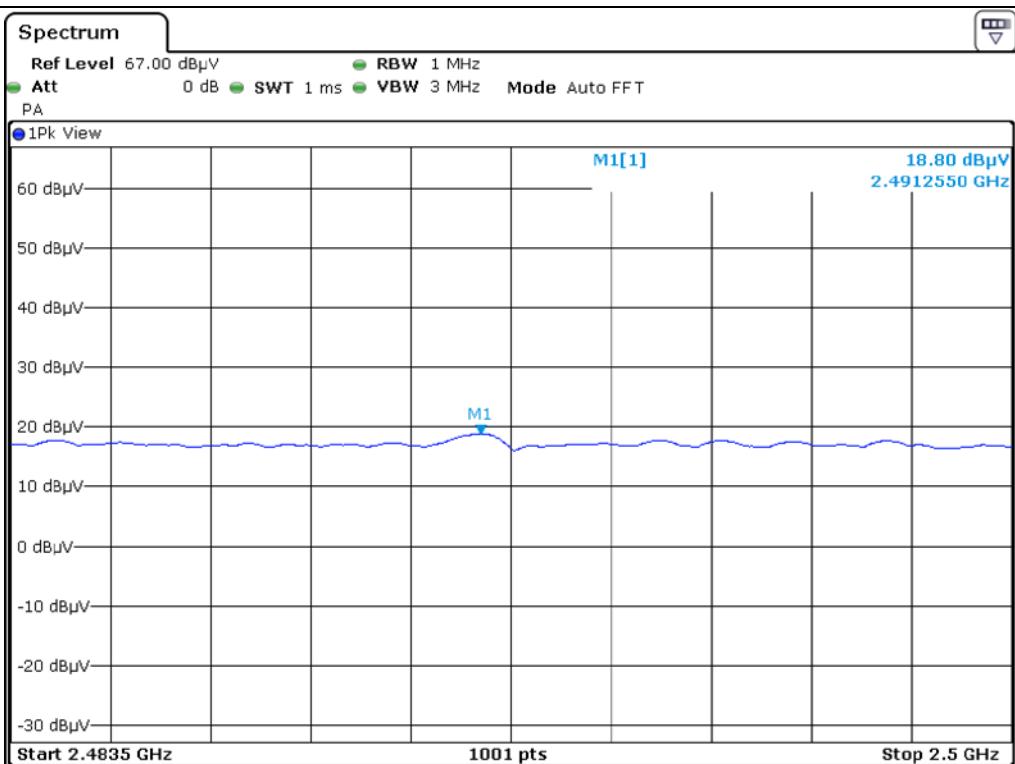


High Channel\_Peak\_H

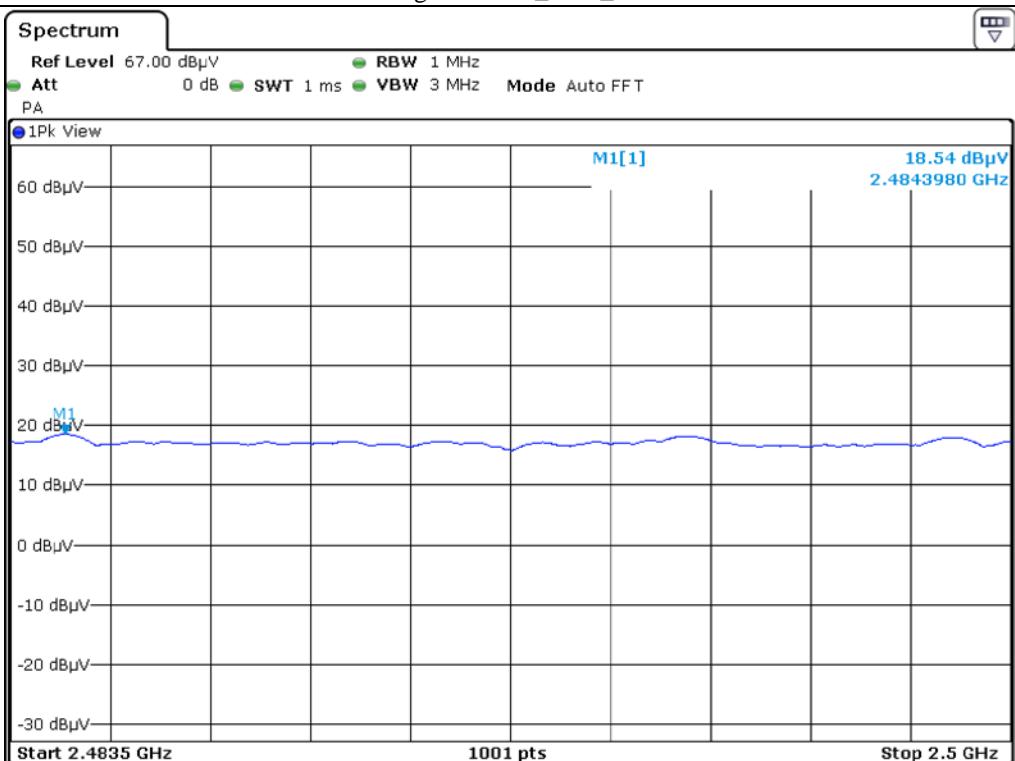

High Channel\_Peak\_V

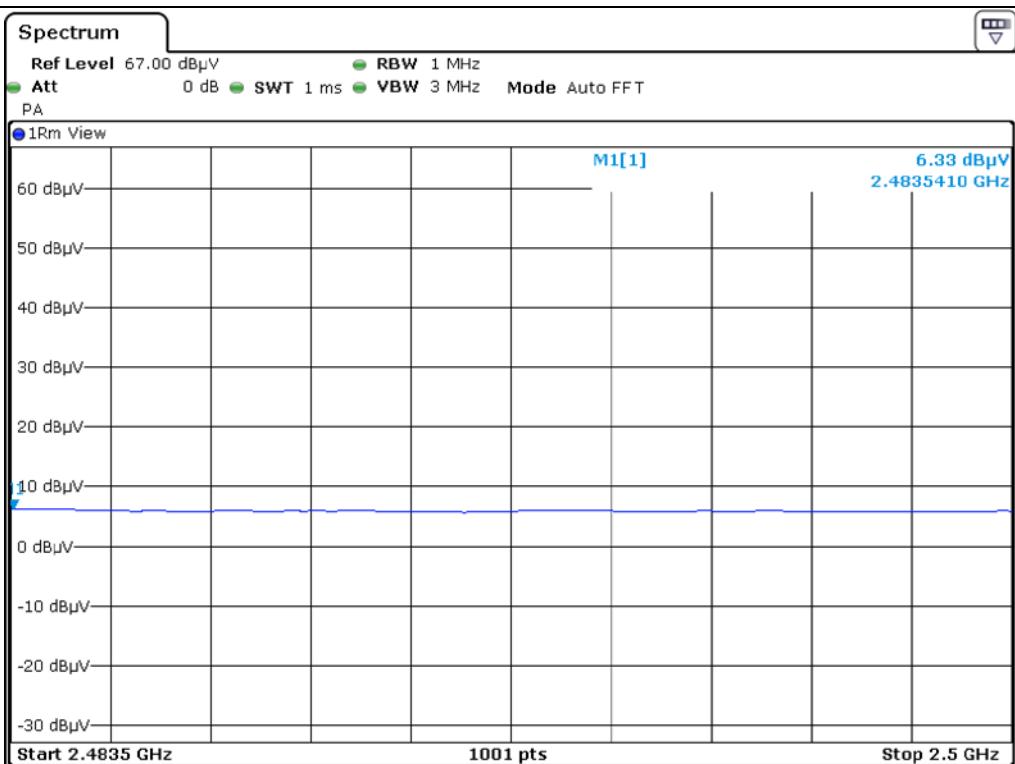

High Channel\_Average\_H

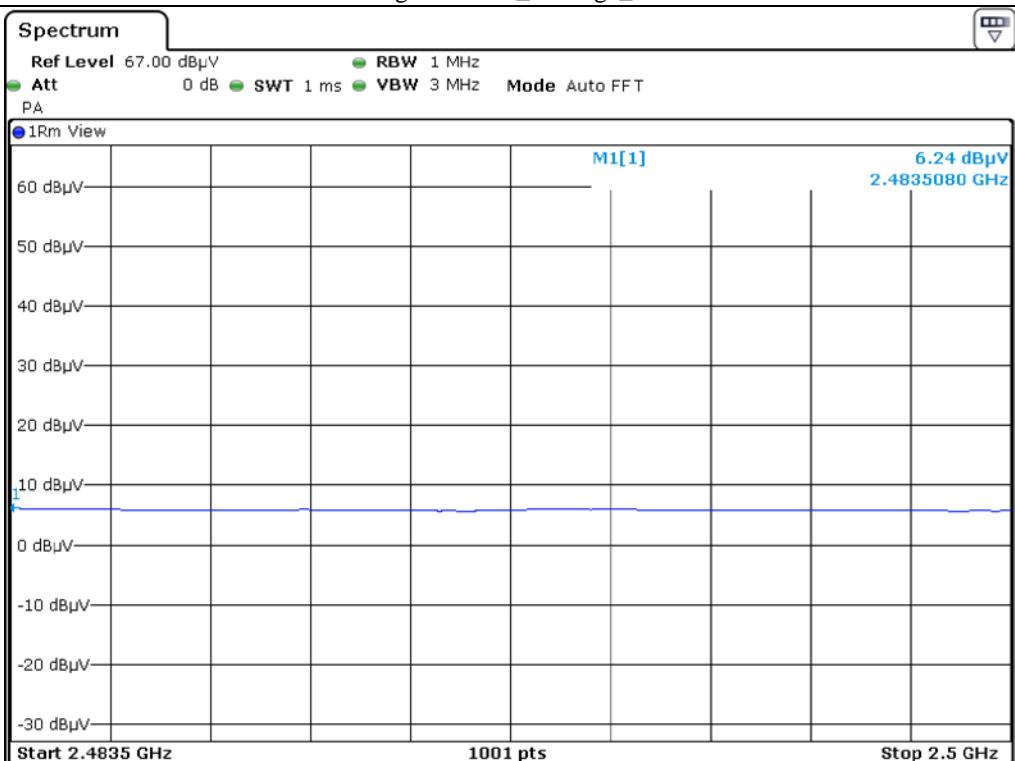

High Channel\_Average\_V

### 9.6.1.2 Test data for 802.11b Edge WLAN Mode

- . Test Date : February 04, 2020 ~ February 07, 2020
- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode  
1 MHz and RMS Detector for Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : 89.08 %
- . Result : PASSED

Frequency (MHz)	Reading (dB $\mu$ V)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Correction Factor	Total (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
--------------------	-------------------------	------------------	--------------------	----------------	---------------	----------------------	-------------------------	--------------------------	----------------

#### Test Data for Low Channel

2 388.459	17.21	Peak	H	26.94	9.20	-	53.35	74.00	20.65
2 385.047	5.22	Average	H			0.50	41.86	54.00	12.14
2 389.043	16.83	Peak	V			-	52.97	74.00	21.03
2 385.002	5.18	Average	V			0.50	41.82	54.00	12.18

#### Test Data for High Channel

2 483.502	17.37	Peak	H	27.47	9.49	-	54.33	74.00	19.67
2 484.156	5.81	Average	H			0.50	43.27	54.00	10.73
2 488.497	17.50	Peak	V			-	54.46	74.00	19.54
2 483.562	5.75	Average	V			0.50	43.21	54.00	10.79


Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical


Margin (dB) = Limits (dB $\mu$ V/m) - Total Level (dB $\mu$ V/m)

Total Level = Reading + Antenna Factor + Cable Loss + Correction Factor


Tested by: Hyung-Kwon, Oh / Manager

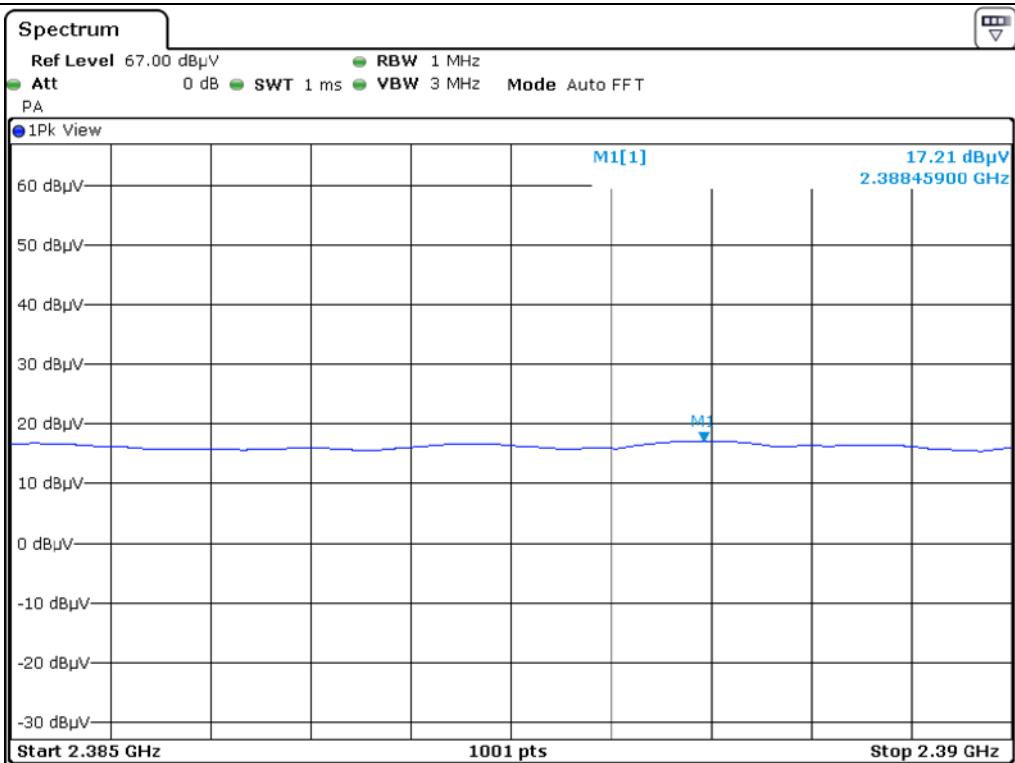


Low Channel\_Peak\_H

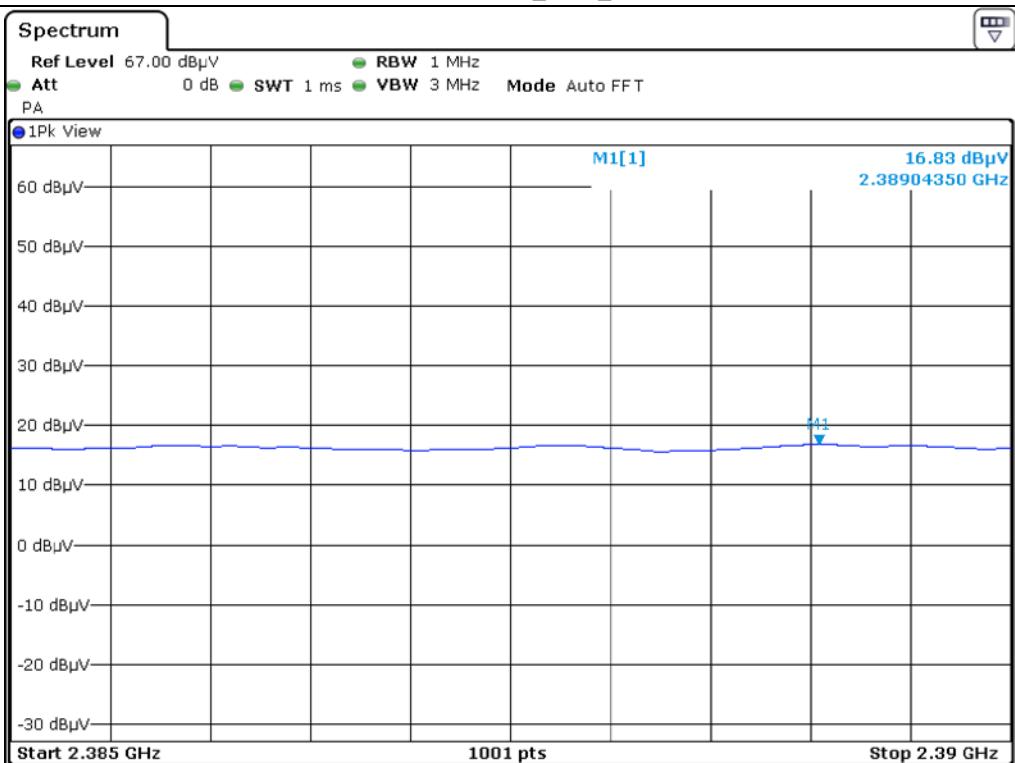


Low Channel\_Peak\_V

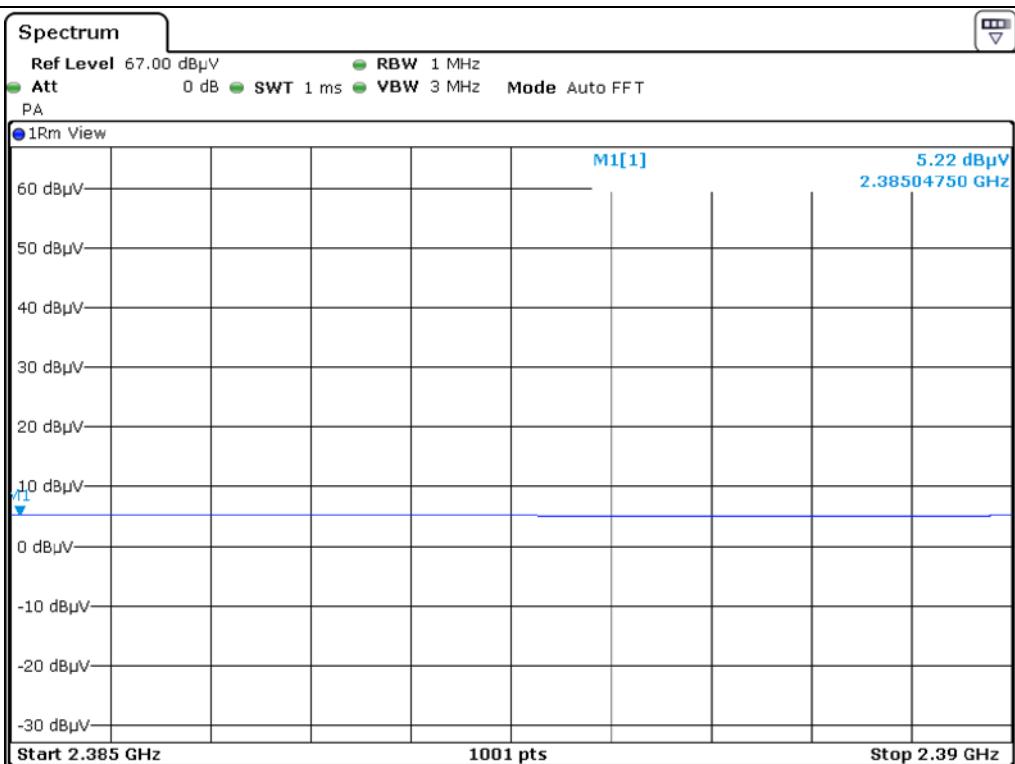


#### Low Channel\_Average\_H

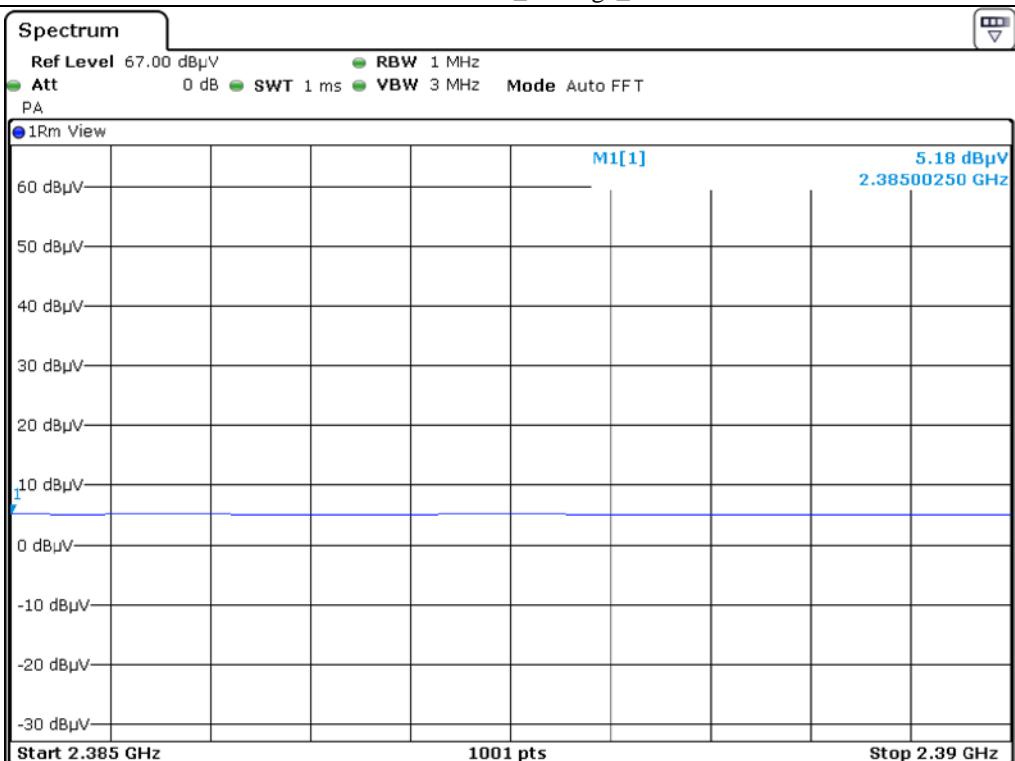


#### Low Channel\_Average\_V

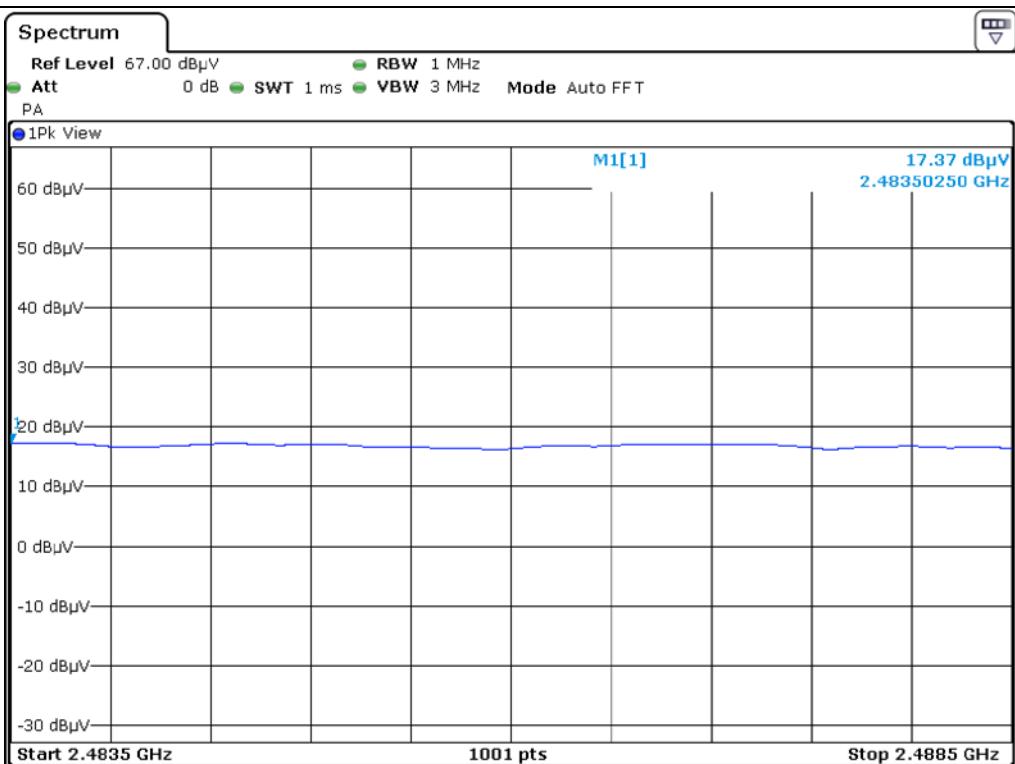


High Channel\_Peak\_H

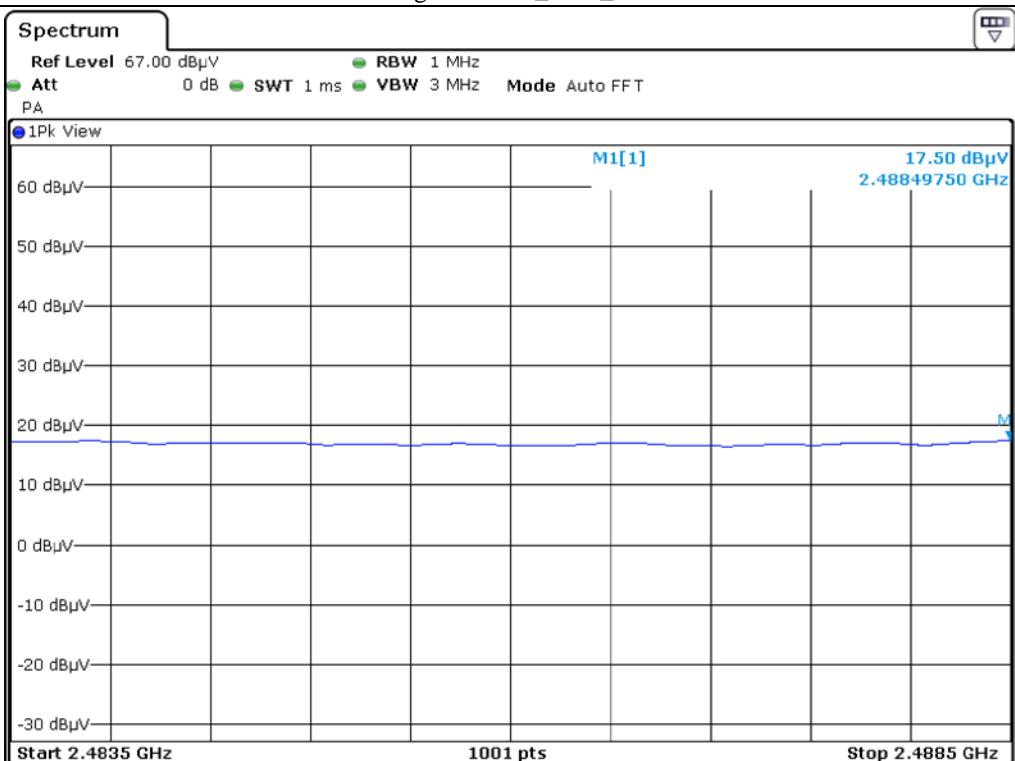

High Channel\_Peak\_V

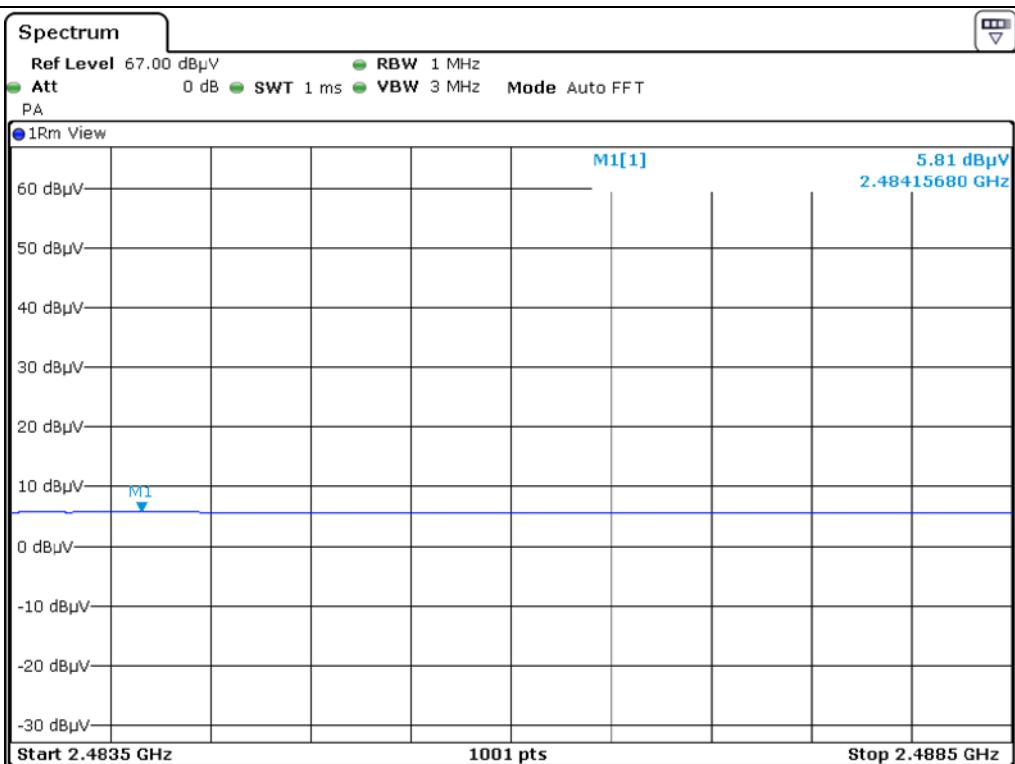

High Channel\_Average\_H

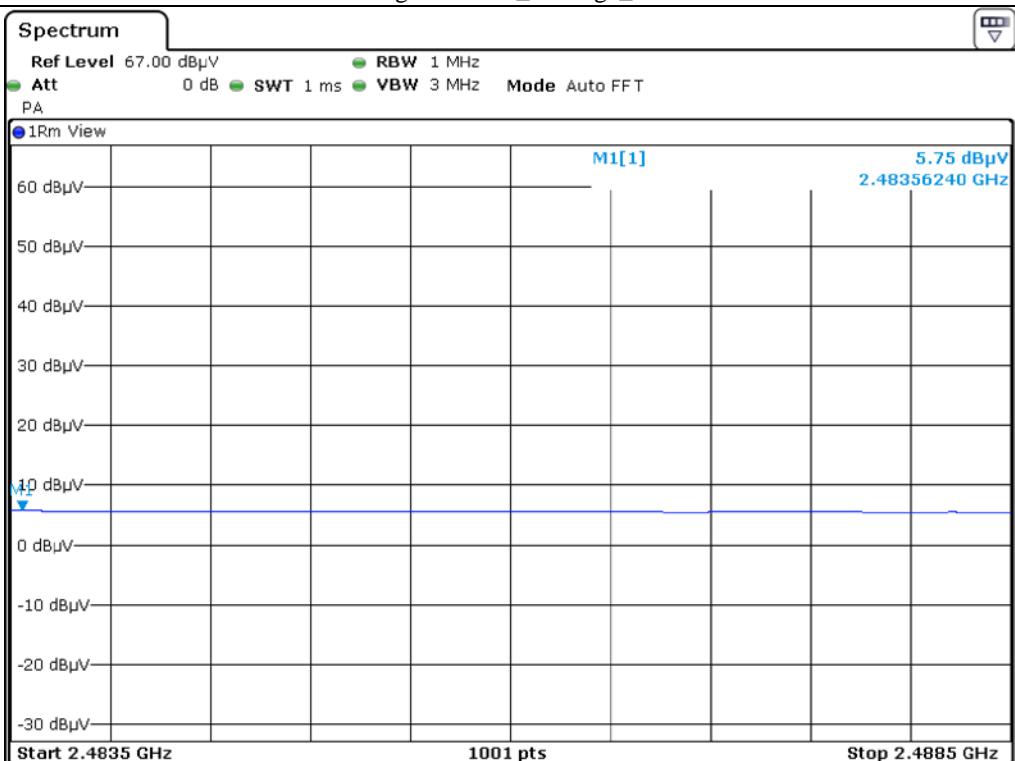

High Channel\_Average\_V

### 9.6.1.3 Test data for 802.11g WLAN Mode

- Test Date : February 04, 2020 ~ February 07, 2020
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode  
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 87.11 %
- Result : PASSED

Frequency (MHz)	Reading (dB $\mu$ V)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Correction Factor	Total (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
2 312.280	18.14	Peak	H	26.94	9.20	-	54.28	74.00	19.72
2 310.440	6.81	Average	H			0.60	43.55	54.00	10.45
2 325.411	18.07	Peak	V			-	54.21	74.00	19.79
2 310.217	6.77	Average	V			0.60	43.51	54.00	10.49
<b>Test Data for High Channel</b>									
2 491.260	19.34	Peak	H	27.47	9.49	-	56.30	74.00	17.70
2 483.541	6.89	Average	H			0.60	44.45	54.00	9.55
2 484.398	19.01	Peak	V			-	55.97	74.00	18.03
2 483.508	6.56	Average	V			0.60	44.12	54.00	9.88

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

Tested by: Hyung-Kwon, Oh / Manager

#### 9.6.1.4 Test data for 802.11n\_HT20 WLAN Mode

- Test Date : February 04, 2020 ~ February 07, 2020
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode  
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 86.47 %
- Result : PASSED

Frequency (MHz)	Reading (dB $\mu$ V)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Correction Factor	Total (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
2 312.277	18.72	Peak	H	26.94	9.20	-	54.86	74.00	19.14
2 310.480	7.03	Average	H			0.63	43.80	54.00	10.20
2 325.380	18.34	Peak	V			-	54.48	74.00	19.52
2 310.277	6.97	Average	V			0.63	43.74	54.00	10.26
<b>Test Data for High Channel</b>									
2 491.260	19.40	Peak	H	27.47	9.49	-	56.36	74.00	17.64
2 483.541	6.91	Average	H			0.63	44.50	54.00	9.50
2 484.330	19.21	Peak	V			-	56.17	74.00	17.83
2 483.510	6.77	Average	V			0.63	44.36	54.00	9.64

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

Tested by: Hyung-Kwon, Oh / Manager

## 9.6.2 Spurious & Harmonic Radiated Emission

### 9.6.2.1 Test data for 802.11b WLAN Mode

- Test Date : February 04, 2020 ~ February 07, 2020
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,  
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band  
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 89.08 %
- Result : PASSED

Frequency (MHz)	Reading (dB $\mu$ V)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Correction Factor	Total (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
4 824.00	15.07	Peak	H	28.84	10.31	-	54.22	74.00	19.78
	2.89	Average	H			0.50	42.54	54.00	11.46
	15.16	Peak	V			-	54.31	74.00	19.69
	2.90	Average	V			0.50	42.55	54.00	11.45
<b>Test Data for Middle Channel</b>									
4 884.00	14.88	Peak	H	28.01	10.43	-	53.32	74.00	20.68
	3.10	Average	H			0.50	42.04	54.00	11.96
	14.79	Peak	V			-	53.23	74.00	20.77
	3.09	Average	V			0.50	42.03	54.00	11.97
<b>Test Data for High Channel</b>									
4 924.00	15.31	Peak	H	29.15	10.81	-	55.27	74.00	18.73
	3.07	Average	H			0.50	43.53	54.00	10.47
	14.90	Peak	V			-	54.86	74.00	19.14
	3.18	Average	V			0.50	43.64	54.00	10.36


Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical


Margin (dB) = Limits (dB $\mu$ V/m) - Total Level (dB $\mu$ V/m)

Total Level = Reading + Antenna Factor + Cable Loss + Correction Factor


Tested by: Hyung-Kwon, Oh / Manager

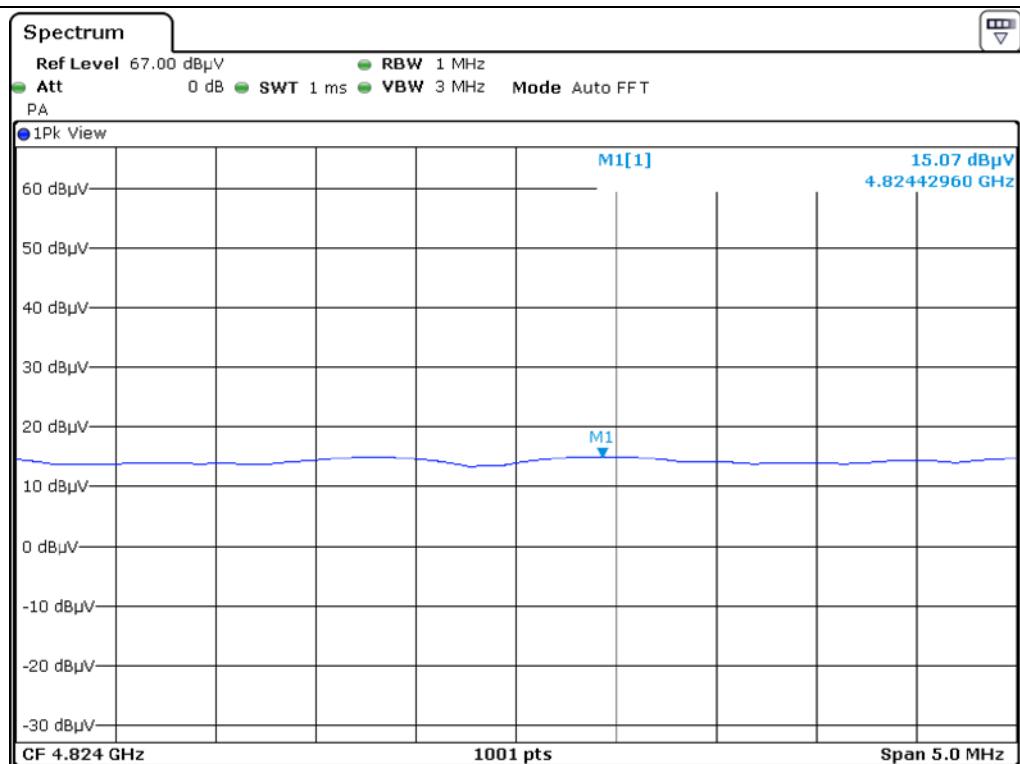


Low Channel\_Peak\_H

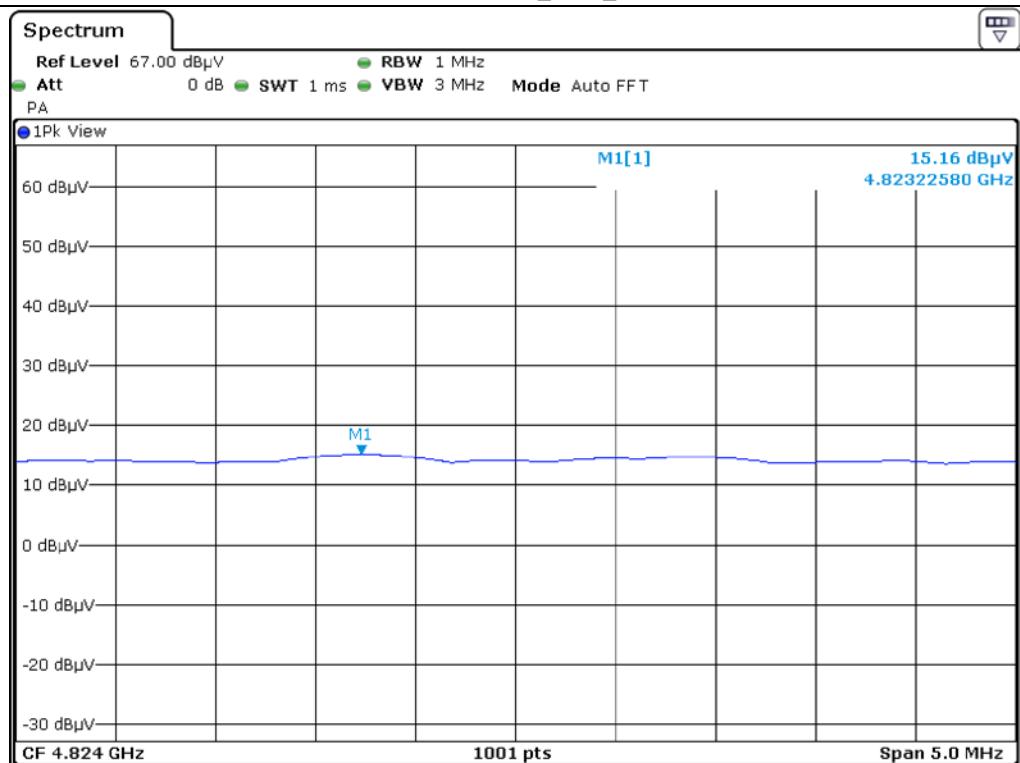


Low Channel\_Peak\_V

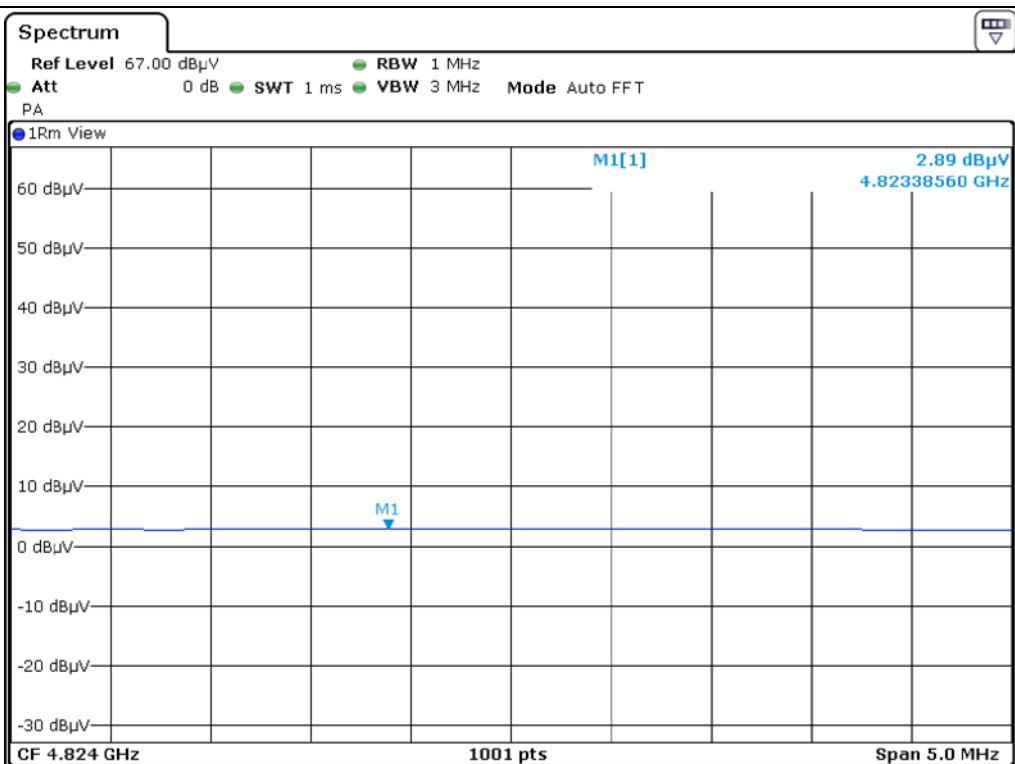


Low Channel\_Average\_H

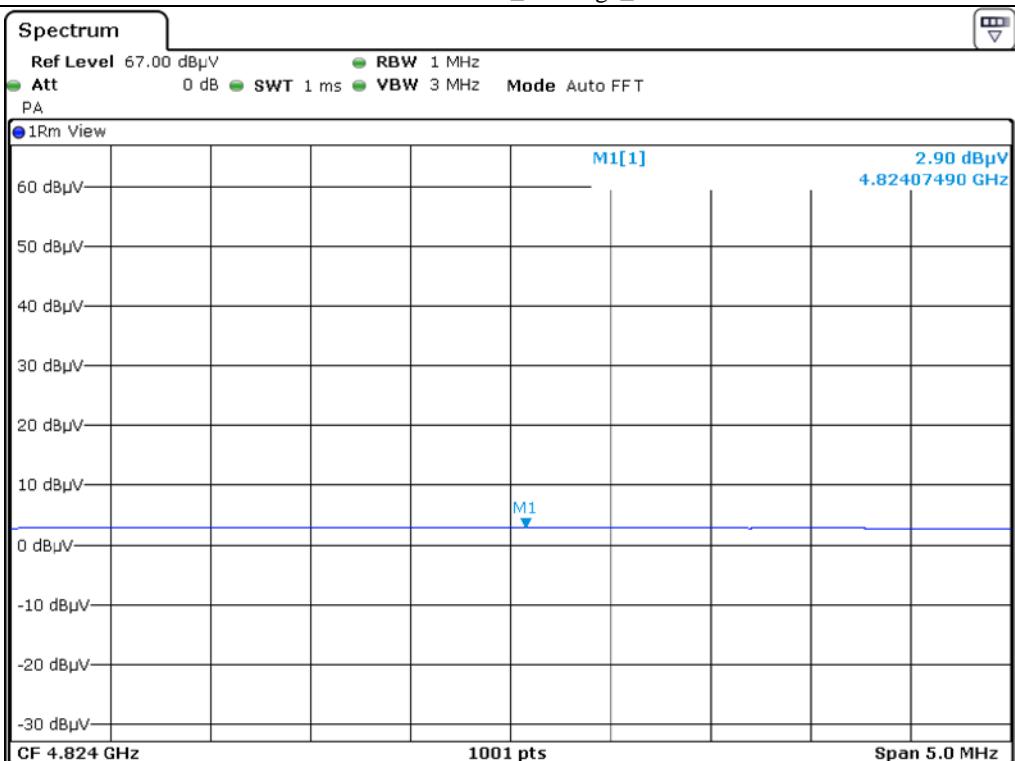


Low Channel\_Average\_V

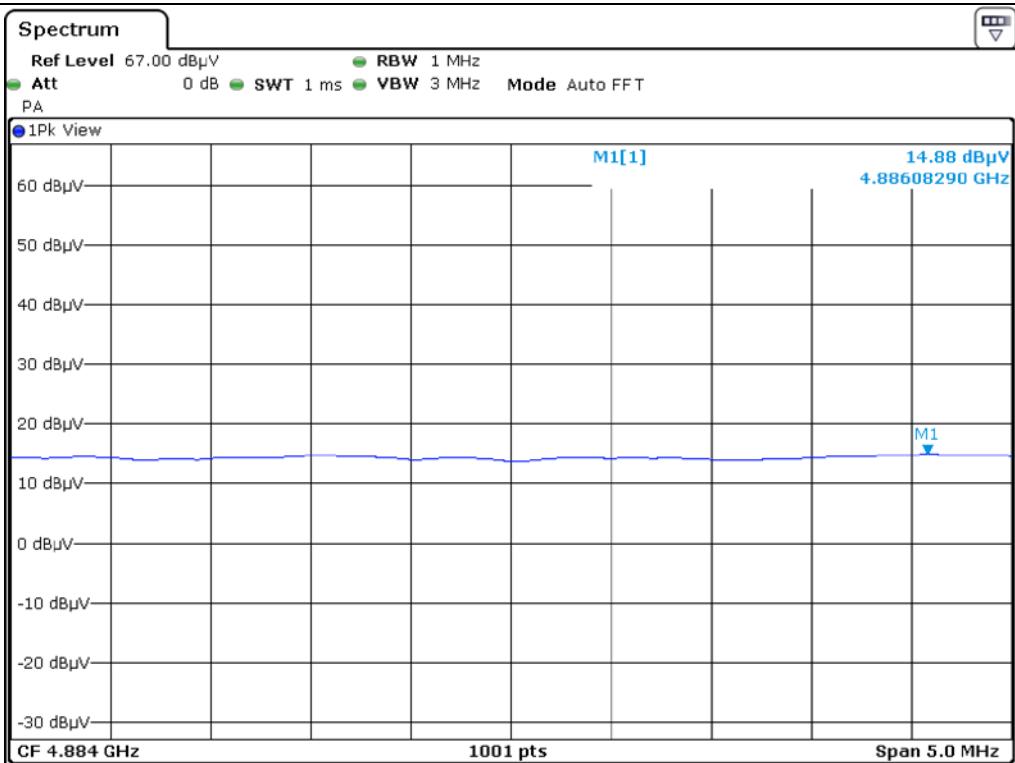


Middle Channel\_Peak\_H

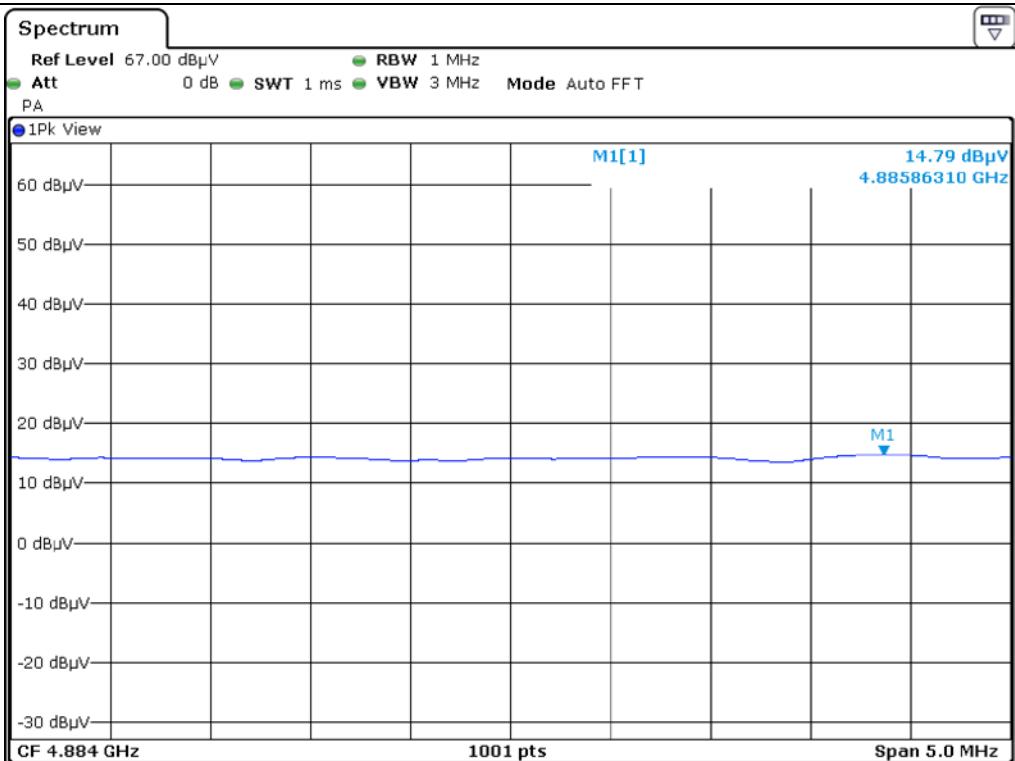


Middle Channel\_Peak\_V

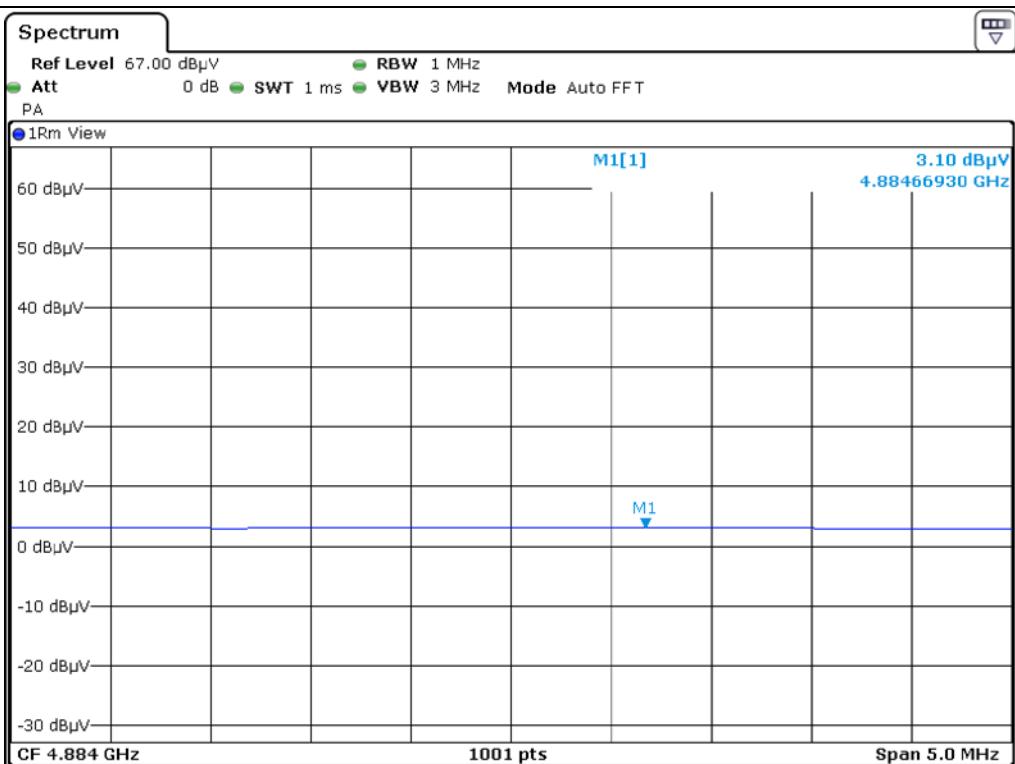


Middle Channel\_Average\_H

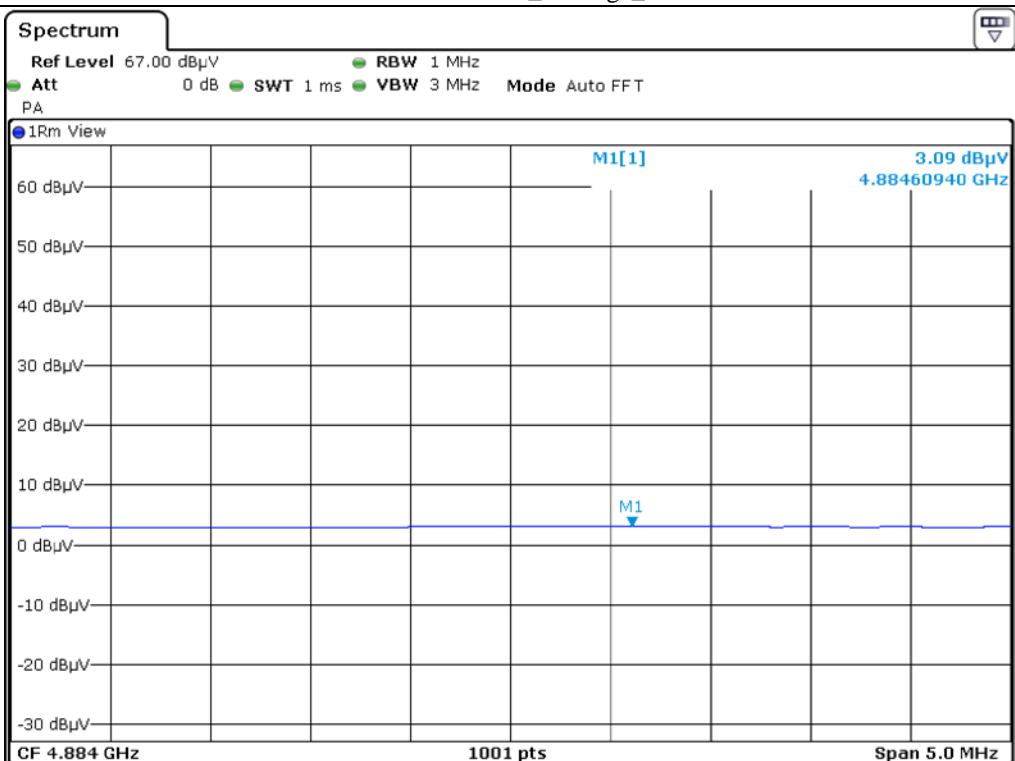


Middle Channel\_Average\_V

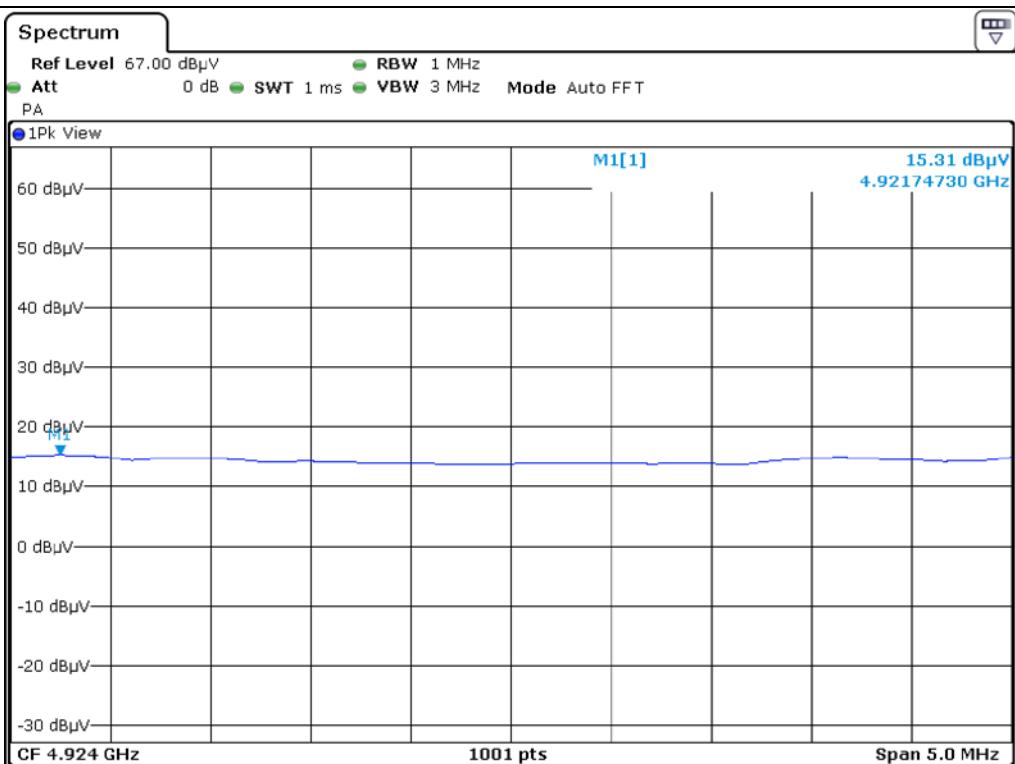


High Channel\_Peak\_H

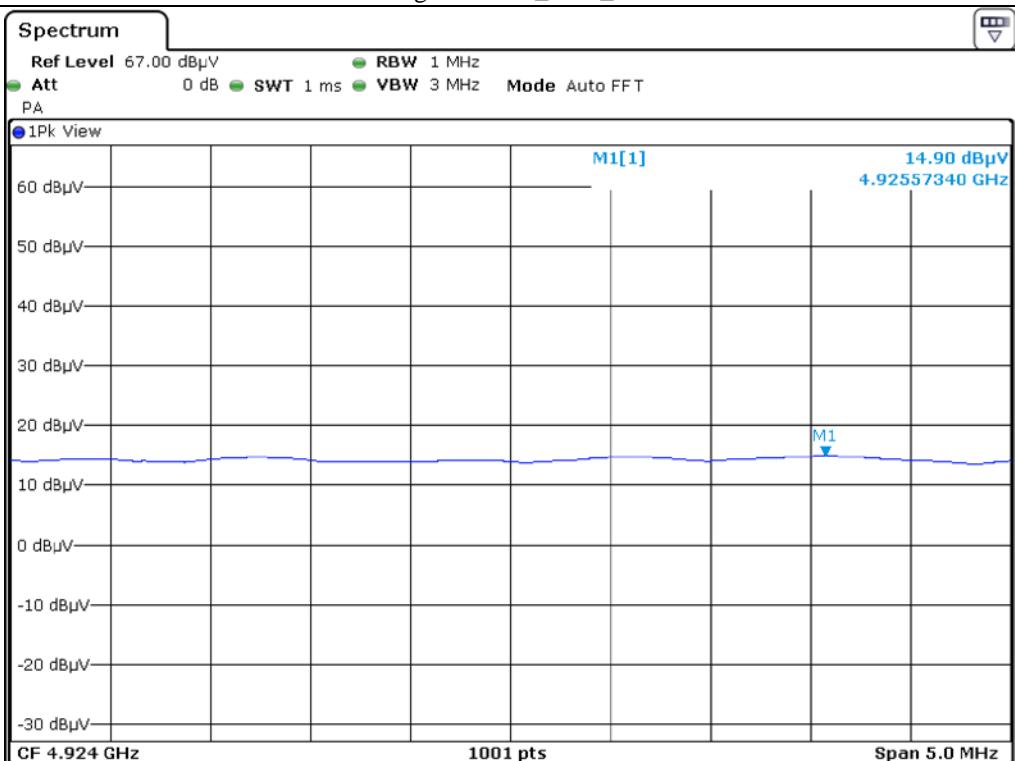

High Channel\_Peak\_V

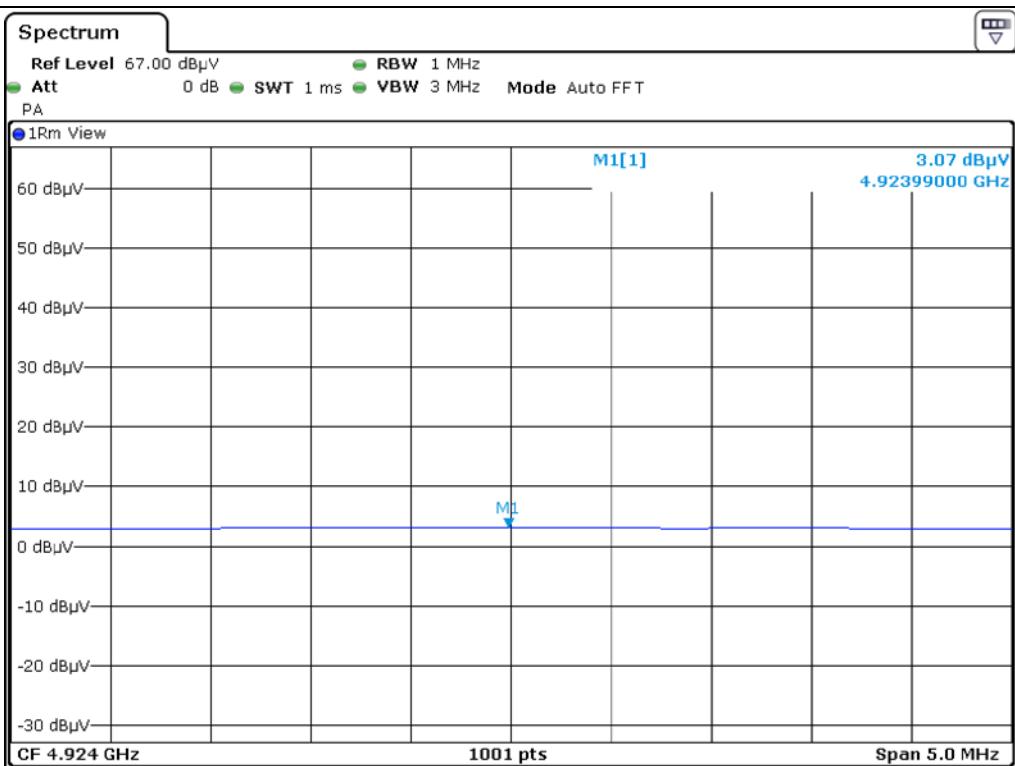

High Channel\_Average\_H

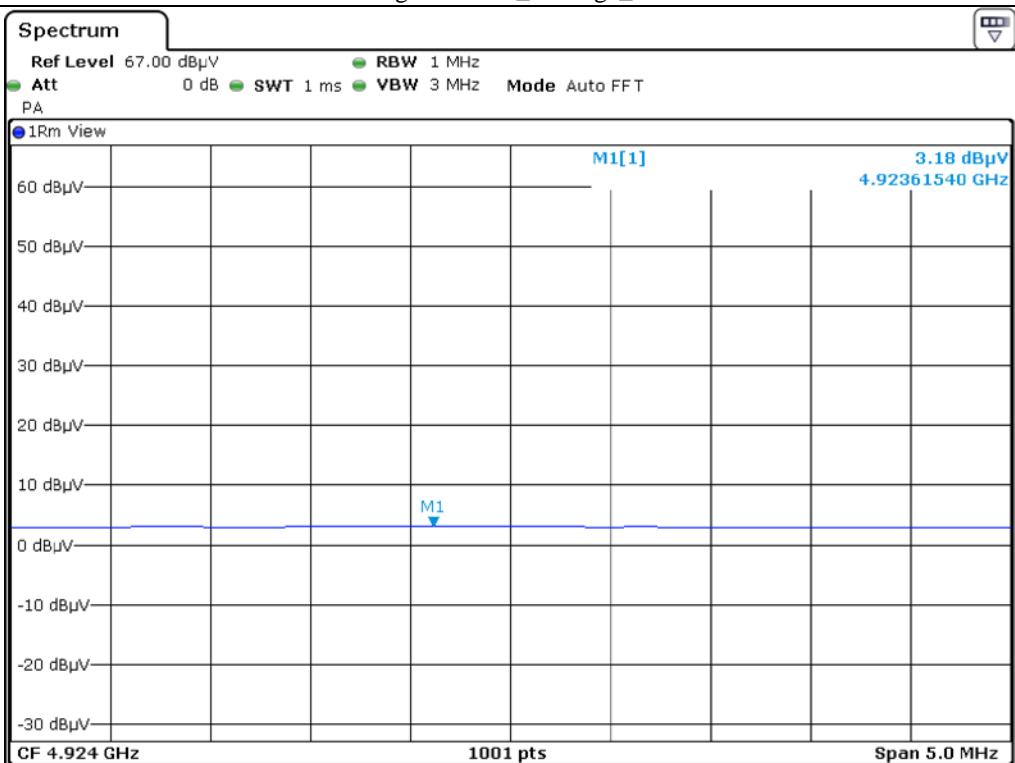

High Channel\_Average\_V

### 9.6.2.2 Test data for 802.11g WLAN Mode

- Test Date : February 04, 2020 ~ February 07, 2020
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,  
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band  
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 87.11 %
- Result : PASSED

Frequency (MHz)	Reading (dB $\mu$ V)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Correction Factor	Total (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
4 824.00	15.50	Peak	H	28.84	10.31	-	54.65	74.00	19.35
	3.81	Average	H			0.60	43.56	54.00	10.44
	15.47	Peak	V			-	54.62	74.00	19.38
	3.08	Average	V			0.60	42.83	54.00	11.17
<b>Test Data for Middle Channel</b>									
4 884.00	15.25	Peak	H	28.01	10.43	-	53.69	74.00	20.31
	3.52	Average	H			0.60	42.56	54.00	11.44
	14.88	Peak	V			-	53.32	74.00	20.68
	2.51	Average	V			0.60	41.55	54.00	12.45
<b>Test Data for High Channel</b>									
4 924.00	15.80	Peak	H	29.15	10.81	-	55.76	74.00	18.24
	3.34	Average	H			0.60	43.90	54.00	10.10
	15.83	Peak	V			-	55.79	74.00	18.21
	3.73	Average	V			0.60	44.29	54.00	9.71

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

Tested by: Hyung-Kwon, Oh / Manager

### 9.6.2.3 Test data for 802.11n\_HT20 WLAN Mode

- Test Date : February 04, 2020 ~ February 07, 2020
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,  
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band  
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 86.47 %
- Result : PASSED

Frequency (MHz)	Reading (dB $\mu$ V)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Correction Factor	Total (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
4 824.00	15.49	Peak	H	28.84	10.31	-	54.64	74.00	19.36
	3.77	Average	H			0.63	43.55	54.00	10.45
	14.74	Peak	V			-	53.89	74.00	20.11
	3.19	Average	V			0.63	42.97	54.00	11.03
<b>Test Data for Middle Channel</b>									
4 884.00	15.11	Peak	H	28.01	10.43	-	53.55	74.00	20.45
	3.41	Average	H			0.63	42.48	54.00	11.52
	15.08	Peak	V			-	53.52	74.00	20.48
	3.71	Average	V			0.63	42.78	54.00	11.22
<b>Test Data for High Channel</b>									
4 924.00	15.50	Peak	H	29.15	10.81	-	55.46	74.00	18.54
	3.91	Average	H			0.63	44.50	54.00	9.50
	15.39	Peak	V			-	55.35	74.00	18.65
	3.34	Average	V			0.63	43.93	54.00	10.07

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

**Tested by: Hyung-Kwon, Oh / Manager**

## 10. PEAK POWER SPECTRUL DENSITY

### 10.1 Operating environment

Temperature : 23 °C

Relative humidity : 46 % R.H.

### 10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ , the video bandwidth is set to 3 times the resolution bandwidth.



### 10.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

#### 10.4 Test data for 802.11b WLAN Mode

- Test Date : February 04, 2020 ~ February 07, 2020


- Test Result : Pass

- Operating Condition : Continuous transmitting mode


CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 412.00	-23.49	8.00	31.49
Middle	2 442.00	-23.59	8.00	31.59
High	2 462.00	-24.16	8.00	32.16

Remark. Margin = Limit – Measured value


Tested by: Hyung-Kwon, Oh / Manager

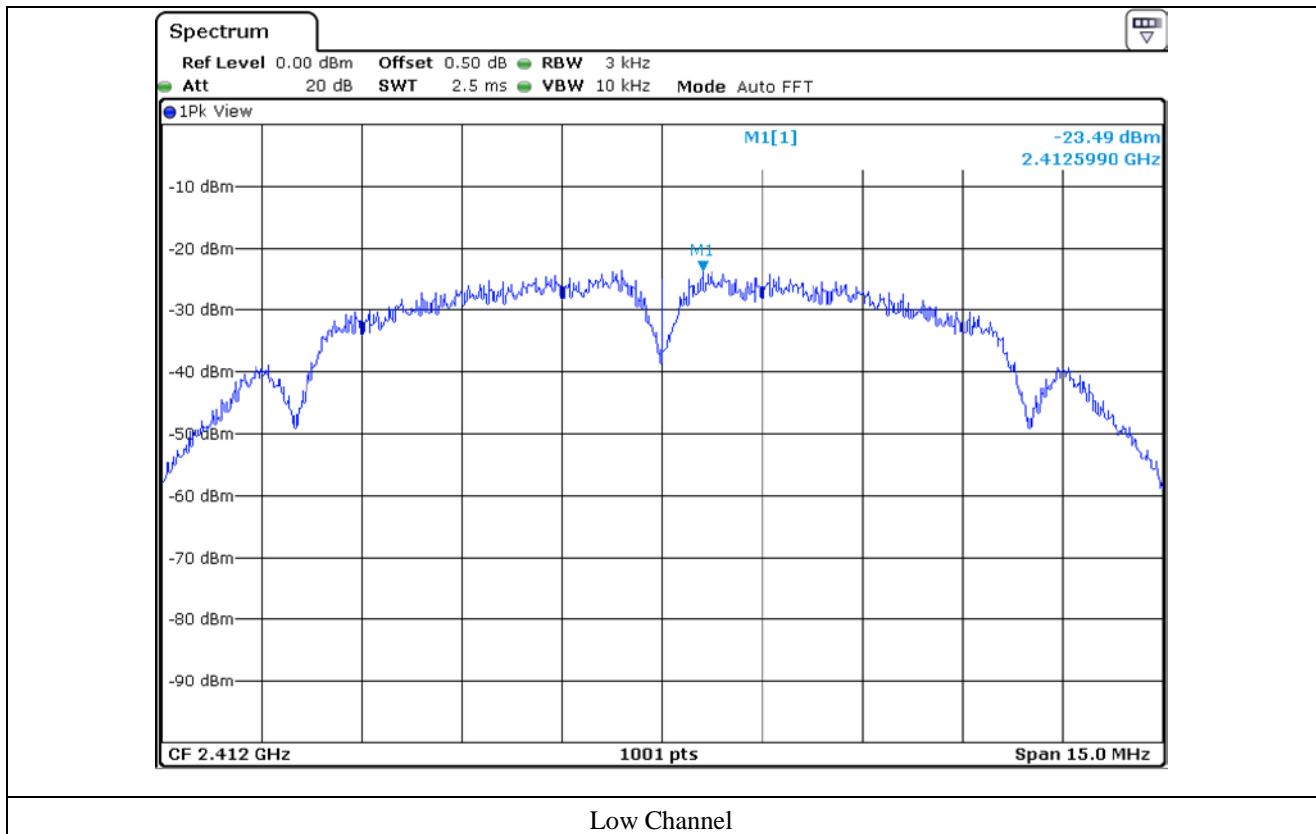

Low Channel

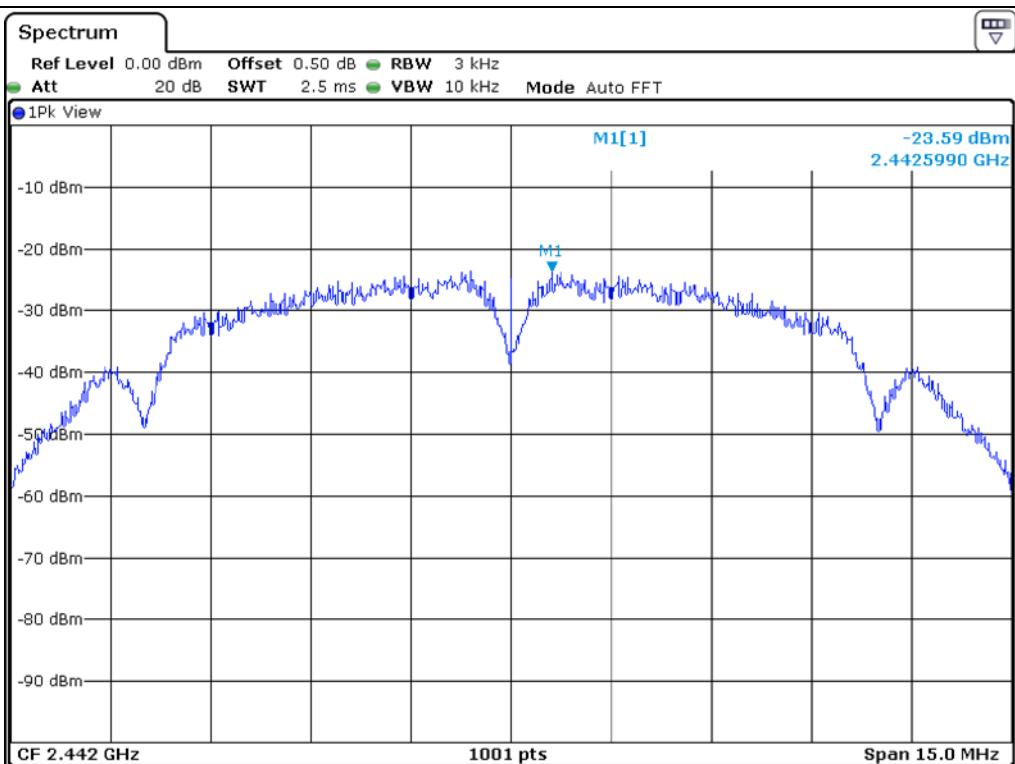

## Middle Channel

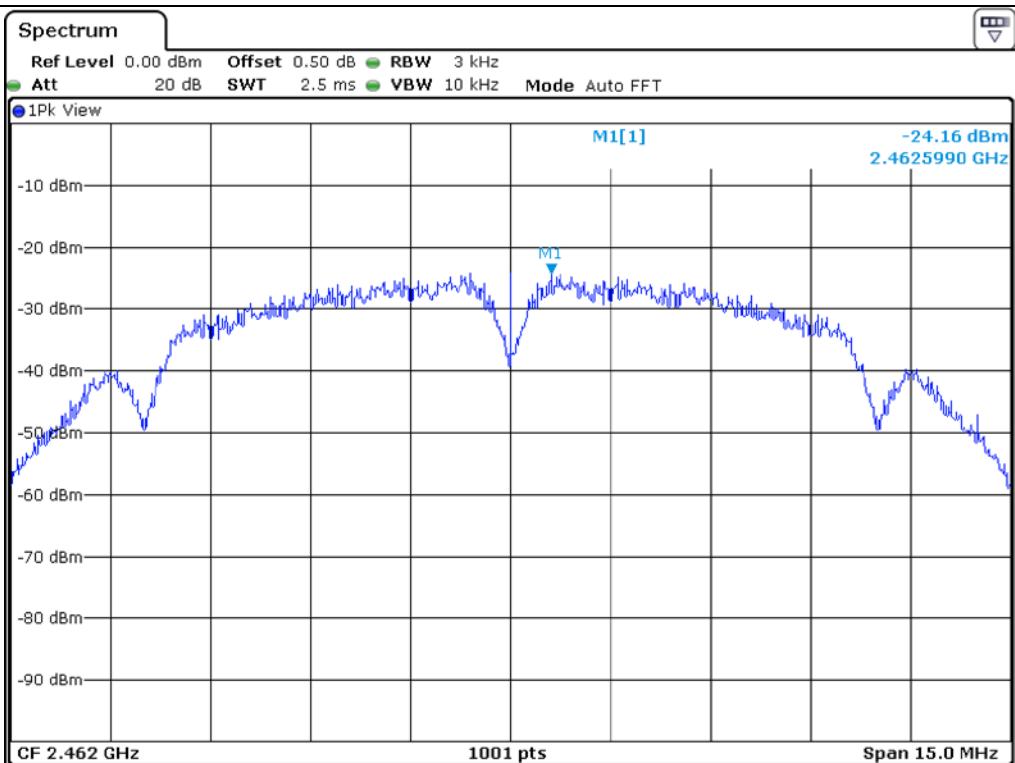

## High Channel

### 10.5 Test data for 802.11g WLAN Mode

- Test Date : February 04, 2020 ~ February 07, 2020


- Test Result : Pass


- Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 412.00	-24.53	8.00	32.53
Middle	2 442.00	-24.33	8.00	32.33
High	2 462.00	-24.49	8.00	32.49


Remark. Margin = Limit – Measured value

Tested by: Hyung-Kwon, Oh / Manager

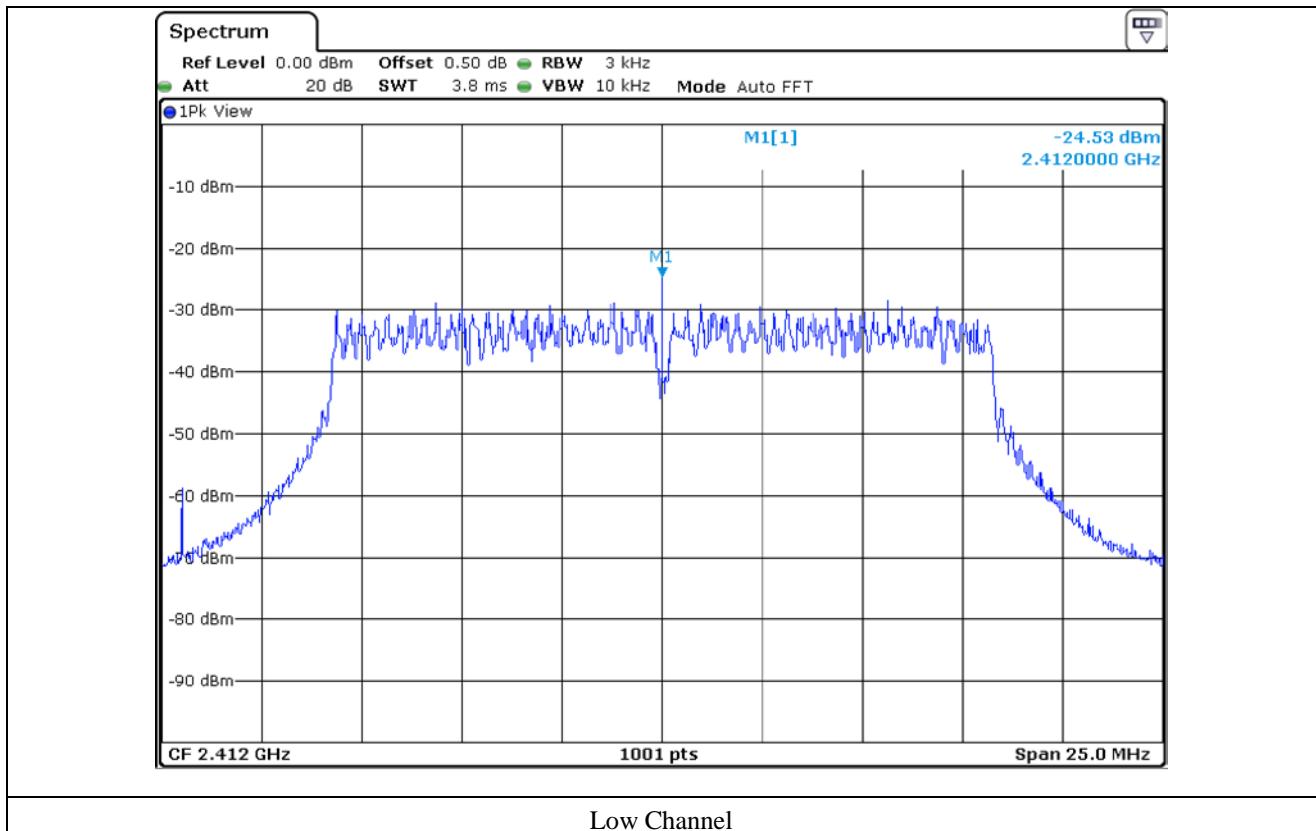

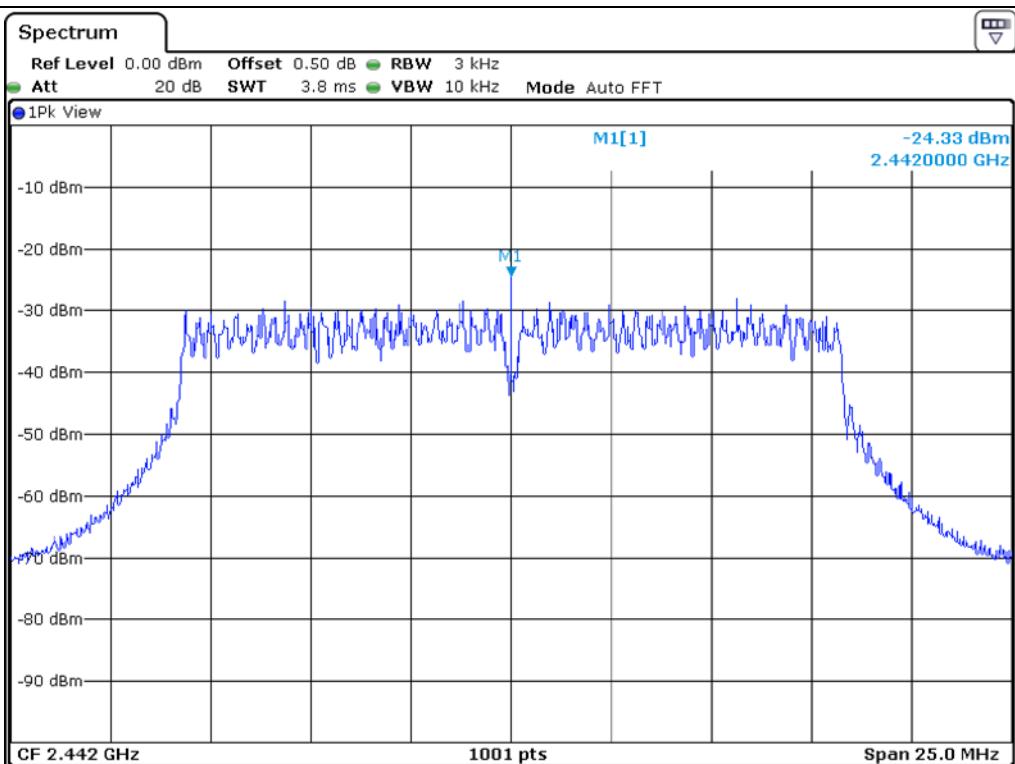

## Middle Channel

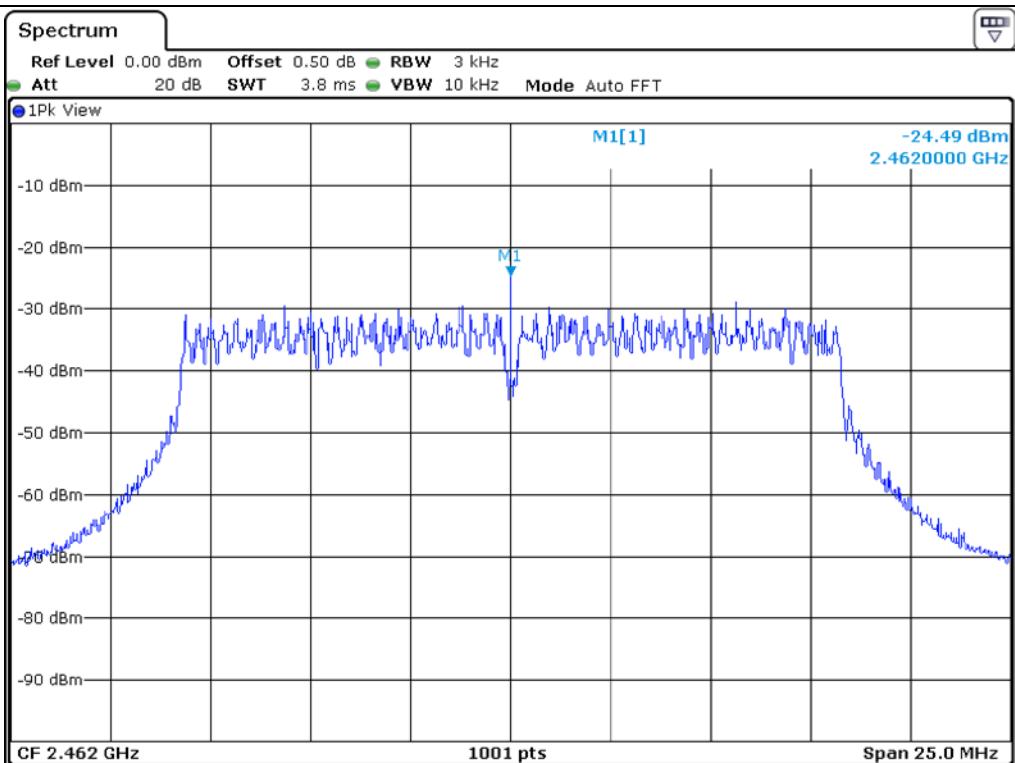

## High Channel

### 10.6 Test data for 802.11n\_HT20 WLAN Mode

- Test Date : February 04, 2020 ~ February 07, 2020


- Test Result : Pass


- Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 412.00	-24.54	8.00	32.54
Middle	2 442.00	-24.13	8.00	32.13
High	2 462.00	-24.31	8.00	32.31


Remark. Margin = Limit – Measured value

Tested by: Hyung-Kwon, Oh / Manager

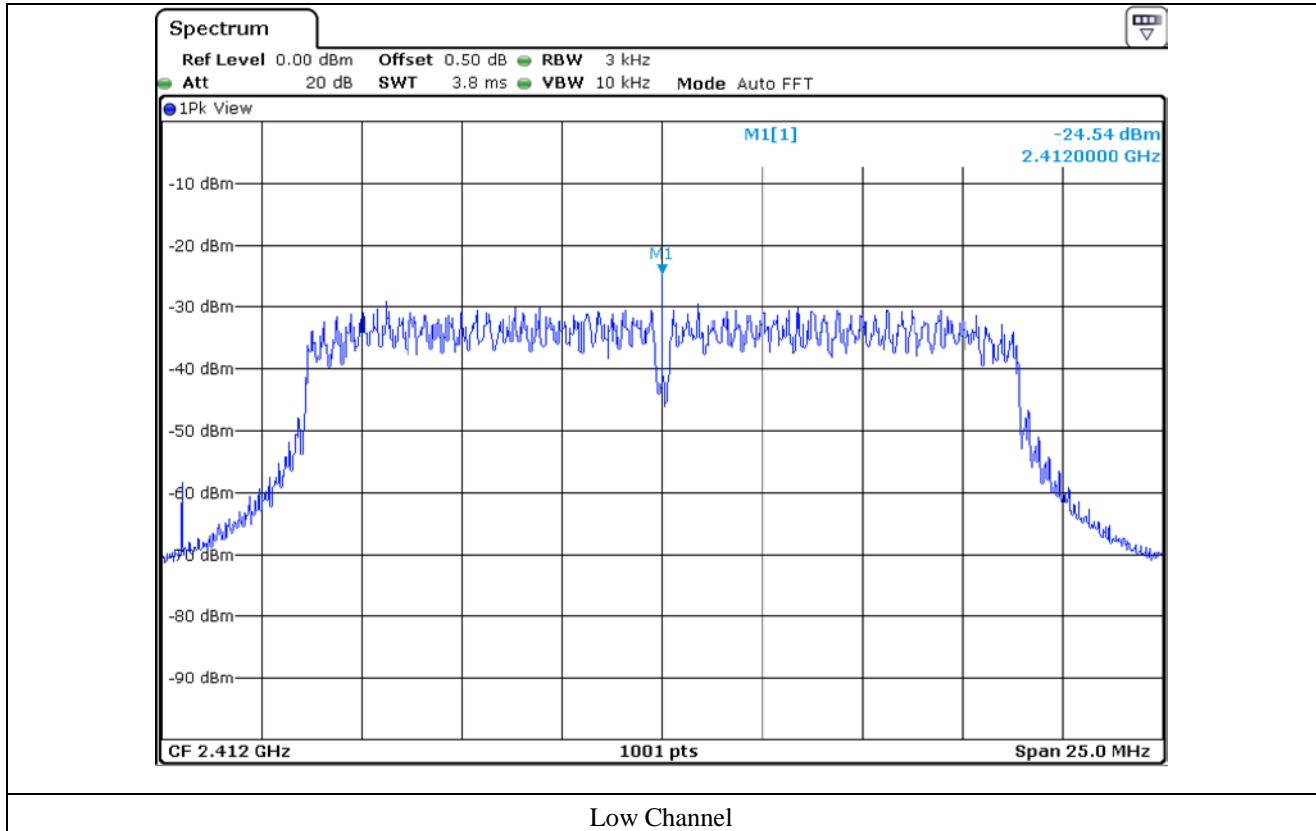

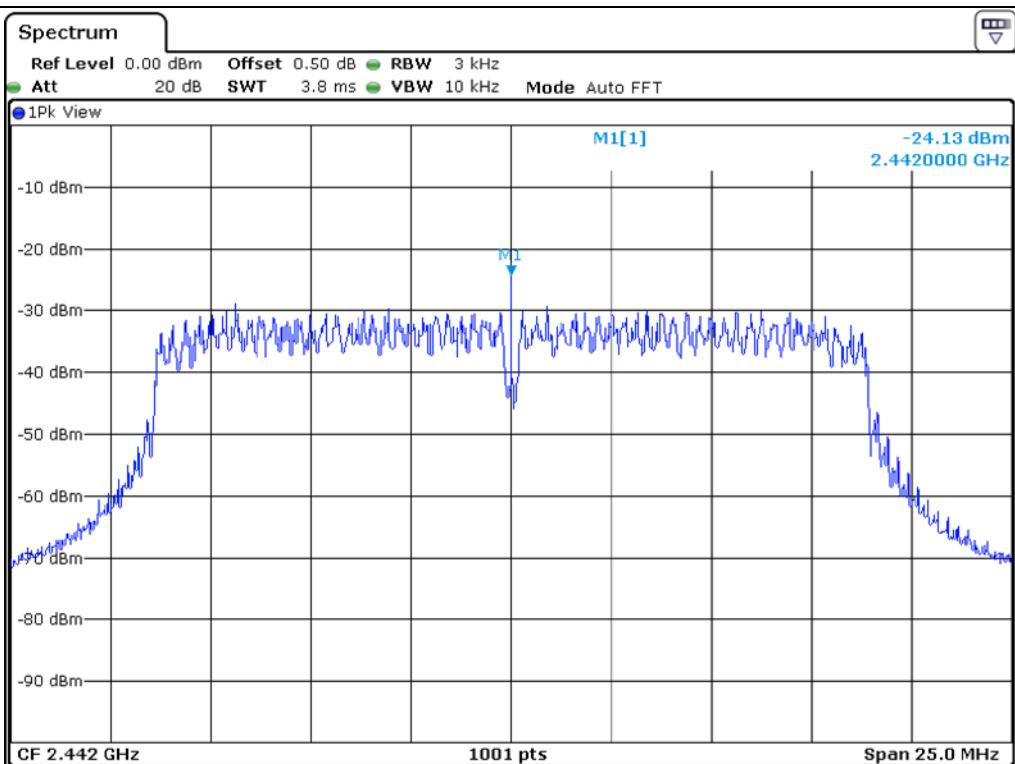

## Middle Channel

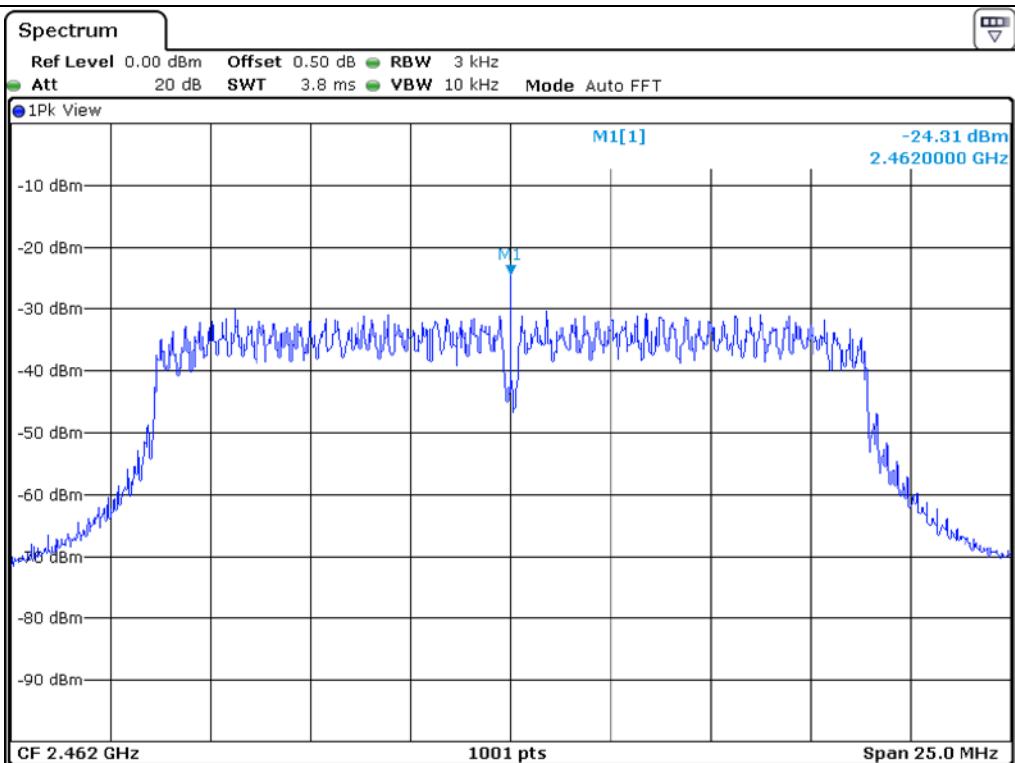

## High Channel

## 11. RADIATED EMISSION TEST

### 11.1 Operating environment

Temperature : 23 °C

Relative humidity : 46 % R.H.

### 11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

### 11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Mar. 28, 2019 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312545	Mar. 18, 2019 (1Y)
■ - BBV9718	Schwarzbeck	Amplifier	310	Mar. 28, 2019 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	777	Apr. 13, 2018 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	9120D-1366	Jul. 16, 2019 (1Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 07, 2020 (1Y)


All test equipment used is calibrated on a regular basis.

**11.4 Test data for 30 MHz ~ 1 GHz**

Humidity Level : 46 % R.H. Temperature: 23 °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247  
 Result : PASSED

EUT : ATOZ Date: February 04, 2020 ~ February 07, 2020

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

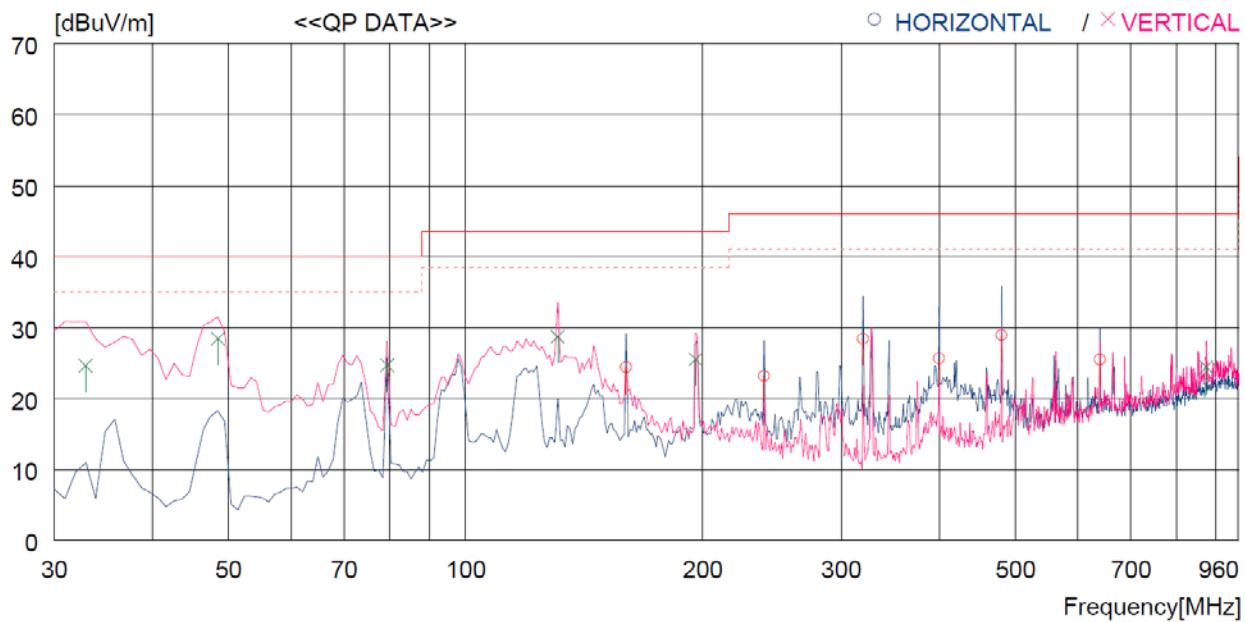

No.	FREQ [MHz]	READING QP	ANT FACTOR	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA TABLE	
									[dBuV]	[cm]
<b>----- Horizontal -----</b>										
1	159.980	45.7	8.7	3.0	33.0	24.4	43.5	19.1	100	196
2	239.520	40.2	12.3	3.6	32.9	23.2	46.0	22.8	110	0
3	320.030	43.3	14.0	4.1	33.0	28.4	46.0	17.6	100	214
4	399.570	38.2	15.9	4.6	33.1	25.6	46.0	20.4	110	0
5	480.081	40.0	17.0	5.1	33.2	28.9	46.0	17.1	100	278
6	640.127	33.3	19.7	5.8	33.3	25.5	46.0	20.5	110	0
<b>----- Vertical -----</b>										
7	32.910	43.4	12.9	1.4	33.1	24.6	40.0	15.4	100	202
8	48.430	45.7	14.2	1.6	33.1	28.4	40.0	11.6	100	359
9	79.470	48.0	7.7	2.0	33.0	24.7	40.0	15.3	100	359
10	130.880	50.1	9.0	2.6	33.0	28.7	43.5	14.8	100	359
11	195.870	44.4	10.8	3.3	33.0	25.5	43.5	18.0	100	359
12	872.920	27.9	22.1	7.0	32.6	24.4	46.0	21.6	100	219

Tested by: Hyung-Kwon, Oh / Manager

### 11.5 Test data for Below 30 MHz

- Test Date : February 04, 2020 ~ February 07, 2020
- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dB $\mu$ V)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
It was not observed any emissions from the EUT.									

### 11.6 Test data for above 1 GHz

- Test Date : February 04, 2020 ~ February 07, 2020
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dB $\mu$ V)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
It was not observed any emissions from the EUT.									

Tested by: Hyung-Kwon, Oh / Manager

## 12. CONDUCTED EMISSION TEST

### 12.1 Operating environment

Temperature : 23 °C

Relative humidity : 46 % R.H.

### 12.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a  $50 \Omega / 50 \mu\text{H} + 5 \Omega$  Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

### 12.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - ESCI	Rohde & Schwarz	Test Receiver	101012	Oct. 22, 2019 (1Y)
□ - ESU	Rohde & Schwarz	Test Receiver	100261	Mar. 28, 2019 (1Y)
□ - NSLK8128	Schwarzbeck	AMN	8128-216	Mar. 20, 2019 (1Y)
■ - NSLK8126	Schwarzbeck	AMN	8126-404	Mar. 19, 2019 (1Y)
□ - 3825/2	EMCO	AMN	9109-1869	Mar. 19, 2019 (1Y)
■ - 3825/2	EMCO	AMN	9109-1867	Mar. 27, 2019 (1Y)

All test equipment used is calibrated on a regular basis.


## 12.4 Test data

- Test Date : February 04, 2020 ~ February 07, 2020

- Resolution bandwidth : 9 kHz


- Frequency range : 0.15 MHz ~ 30 MHz

- Tested Line : HOT LINE

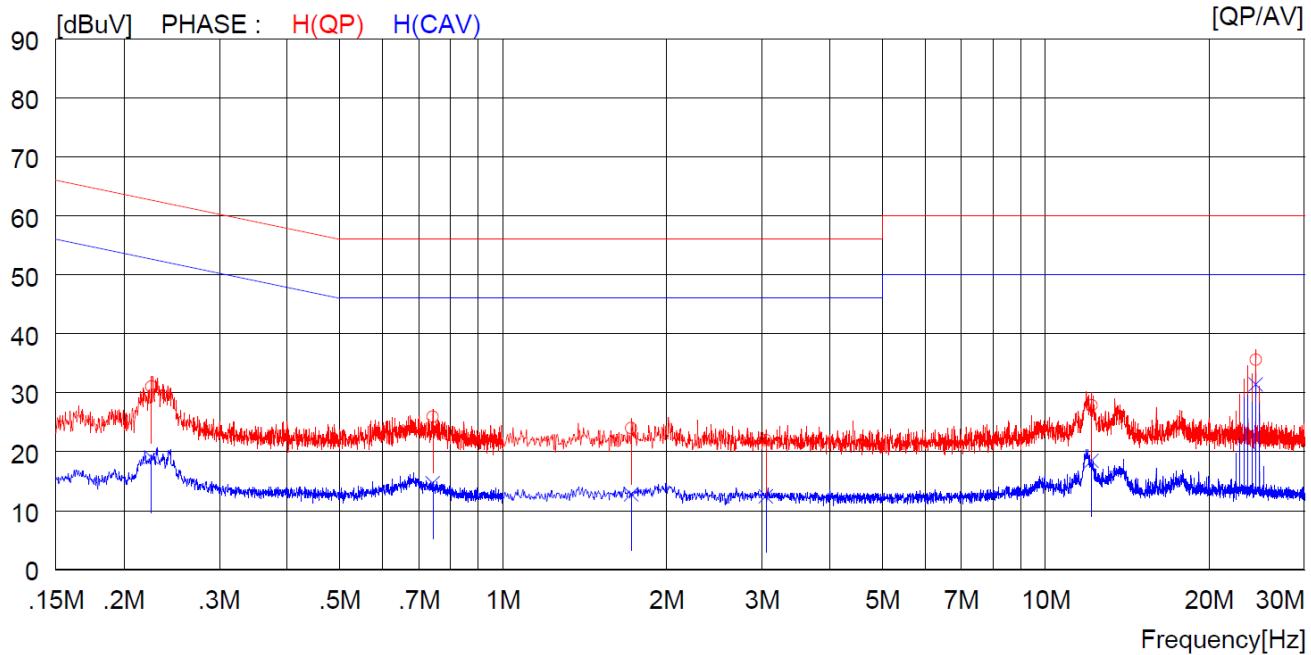

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.22500	20.9	----	10.1	31.0	----	62.6	----	31.6	----	H (QP)
2	0.74200	15.8	----	10.1	25.9	----	56.0	----	30.1	----	H (QP)
3	1.72400	13.9	----	10.1	24.0	----	56.0	----	32.0	----	H (QP)
4	3.05200	11.8	----	10.1	21.9	----	56.0	----	34.1	----	H (QP)
5	12.15000	17.6	----	10.3	27.9	----	60.0	----	32.1	----	H (QP)
6	24.40000	25.2	----	10.4	35.6	----	60.0	----	24.4	----	H (QP)
7	0.22500	---	9.0	10.1	---	19.1	----	52.6	----	33.5	H (CAV)
8	0.74200	---	4.6	10.1	---	14.7	----	46.0	----	31.3	H (CAV)
9	1.72400	---	2.7	10.1	---	12.8	----	46.0	----	33.2	H (CAV)
10	3.05200	---	2.3	10.1	---	12.4	----	46.0	----	33.6	H (CAV)
11	12.15000	---	8.2	10.3	---	18.5	----	50.0	----	31.5	H (CAV)
12	24.40000	---	21.0	10.4	---	31.4	----	50.0	----	18.6	H (CAV)

- Tested Line : NEUTRAL LINE

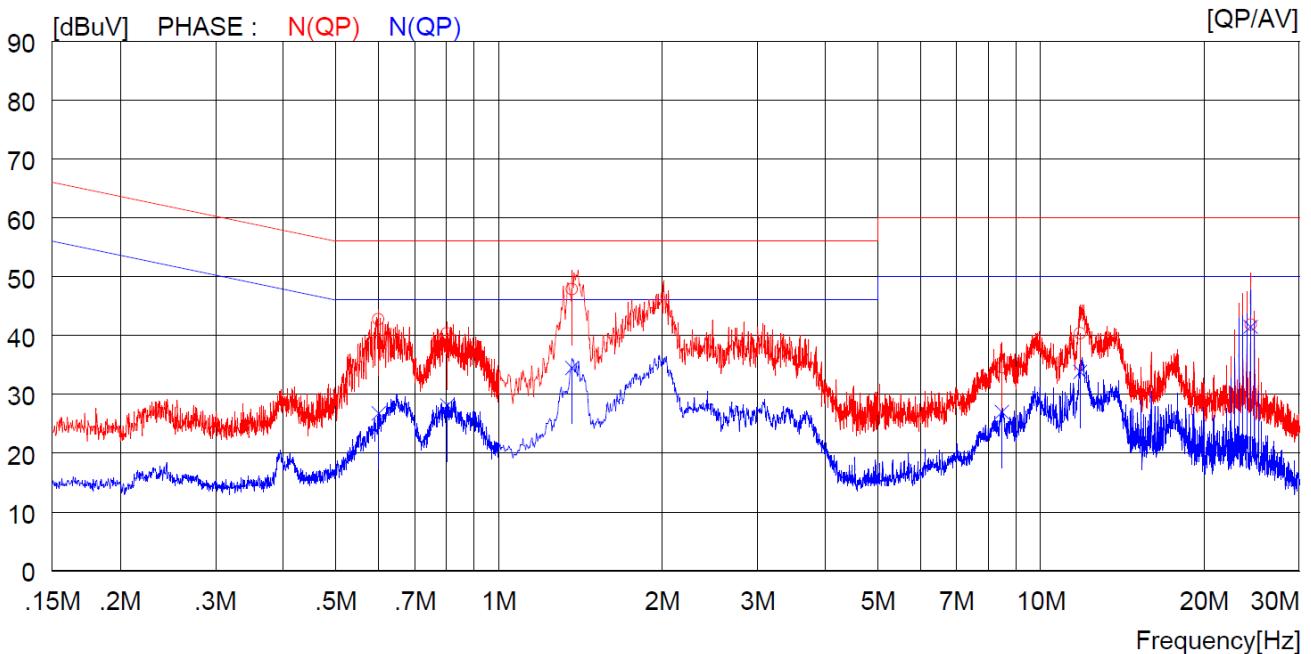

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.60000	32.6	----	10.1	42.7	----	56.0	----	13.3	----	N (QP)
2	0.80300	30.2	----	10.1	40.3	----	56.0	----	15.7	----	N (QP)
3	1.36400	37.8	----	10.1	47.9	----	56.0	----	8.1	----	N (QP)
4	8.48000	24.4	----	10.2	34.6	----	60.0	----	25.4	----	N (QP)
5	11.82000	30.1	----	10.3	40.4	----	60.0	----	19.6	----	N (QP)
6	24.40000	31.4	----	10.4	41.8	----	60.0	----	18.2	----	N (QP)
7	0.60000	----	16.7	10.1	----	26.8	----	46.0	----	19.2	N (CAV)
8	0.80300	----	18.0	10.1	----	28.1	----	46.0	----	17.9	N (CAV)
9	1.36400	----	24.4	10.1	----	34.5	----	46.0	----	11.5	N (CAV)
10	8.48000	----	16.8	10.2	----	27.0	----	50.0	----	23.0	N (CAV)
11	11.82000	----	23.5	10.3	----	33.8	----	50.0	----	16.2	N (CAV)
12	24.40000	----	31.1	10.4	----	41.5	----	50.0	----	8.5	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Tested by: Hyung-Kwon, Oh / Manager