



FCC TEST REPORT

Report No.: B XK-19AP1353DTSHPB-3

Test Model: LY0204A

Received: Apr.12, 2019

ISSUED: May.15, 2019

Applicant: Shaoxing Shangyu North Electron Manufacture Co.,Ltd

Address: Xingyue Industry Zone, Xiaoyue Town, Shangyu District, Shaoxing City,Zhejiang, CHINA

Issued By: BUREAU VERITAS ADT (Shanghai) Corporation

Lab Location: No. 829, Xinzhuan Road, Shanghai, P.R.China (201612)

This test report consists of 21 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by A2LA, CNAS, or any government agency. The test results in the report only apply to the tested item. The test results in this report are traceable to the national or international standards.



1. TEST PROGRAM.....	3
2. Summary of Test Procedure and Test Results	4
3. Test Configuration of Equipment under Test	5
3.1. Manufacturer information.....	5
3.2. Feature of Equipment under Test.....	5
3.3. Measurement Uncertainty	5
4. Test of Conducted Emission	6
4.1. Test Limit	6
4.2. Test Procedures	7
4.3. Typical Test Setup	7
4.4. Measurement Equipment	8
4.5. Test Result and Data	9
4.6. Test Photographs	11
5. Test of Radiated Emission	12
5.1. Test Limit	12
5.2. Test Procedures	13
5.3. Typical Test Setup	13
5.4. Measurement Equipment	14
5.5. Test Result and Data (30MHz ~ 1GHz).....	15
5.6. Test Result and Data (1GHz ~ 18GHz).....	17
5.7. Test Photographs (30MHz ~ 1000MHz).....	19
5.8. Test Photographs (1000MHz ~ 18000MHz)	20
6. Photographs of EUT	21



1. TEST PROGRAM

PRODUCT: BT SPEAKER MINI FRIDGE

TEST MODEL: LY0204A

SERIES MODEL: LY0204A, EFMIS151-PINK, EFMIS151-BLACK, KWC-4 BT

APPLICANT: Shaoxing Shangyu North Electron Manufacture Co.,Ltd

TESTED: Apr.15 to Apr.30, 2019

STANDARDS: 47 CFR FCC Part15, Subpart B, Class B


ANSI C63.4:2014

We, BUREAU VERITAS ADT (Shanghai) Corporation, declare that the equipment above has been tested and found compliance with the requirement limits of applicable standards. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate under the standards herein specified.

PREPARED BY : Will Yan, **DATE:** May.24, 2019
Will YAN

Project Engineer

APPROVED BY : Daniel Sun, **DATE:** May.24, 2019
Daniel Sun
RF Supervisor



2. Summary of Test Procedure and Test Results

EMISSION (47 CFR FCC Part15, Subpart B)		
Test Item	Normative References	Test Result
Conducted Emission	47 CFR FCC Part15, Subpart B 15.107	Meets the Class B requirements
Radiated Emission	47 CFR FCC Part15, Subpart B 15.109	Meets the Class B requirements



3. Test Configuration of Equipment under Test

3.1. Manufacturer information

Manufacturer : Shaoxing Shangyu North Electron Manufacture Co.,Ltd

Address : Xingyue Industry Zone, Xiaoyue Town, Shangyu District, Shaoxing
City,Zhejiang, CHINA

3.2.Feature of Equipment under Test

Product Name:	BT SPEAKER MINI FRIDGE
Test Model:	LY0204A
Series Model:	LY0204A, EFMIS151-PINK, EFMIS151-BLACK, KWC-4 BT
Model Discrepancy:	These four models are the same product, just for different market and sale purpose.
EUT Power Rating:	120V,60Hz

Note: Please refer to user manual.

3.3.Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement		Value
Conducted emissions		2.55 dB
Radiated emissions	30 MHz ~ 1GHz	3.22 dB
	Above 1GHz	2.89 dB

4. Test of Conducted Emission

4.1. Test Limit

TEST STANDARD:

CFR 47 FCC Part 15, Subpart B (Section: 15.107)

FREQUENCY (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTES:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



4.4. Measurement Equipment

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	E1R1001	Mar.04, 2020
LISN ROHDE & SCHWARZ	ENV216	E1L1011	Jul.18, 2019
Software ADT	ADT_Cond_V7.3.0	N/A	N/A

4.5. Test Result and Data

4.5.1 Conducted Emission Test Data

Phase : LINE

Location: Conduction 1

Date: 5/21/2019


Time: 10:51:44 AM

Phase L1

Temperatuer (C): 22

Humidity (%): 48

Approved by:

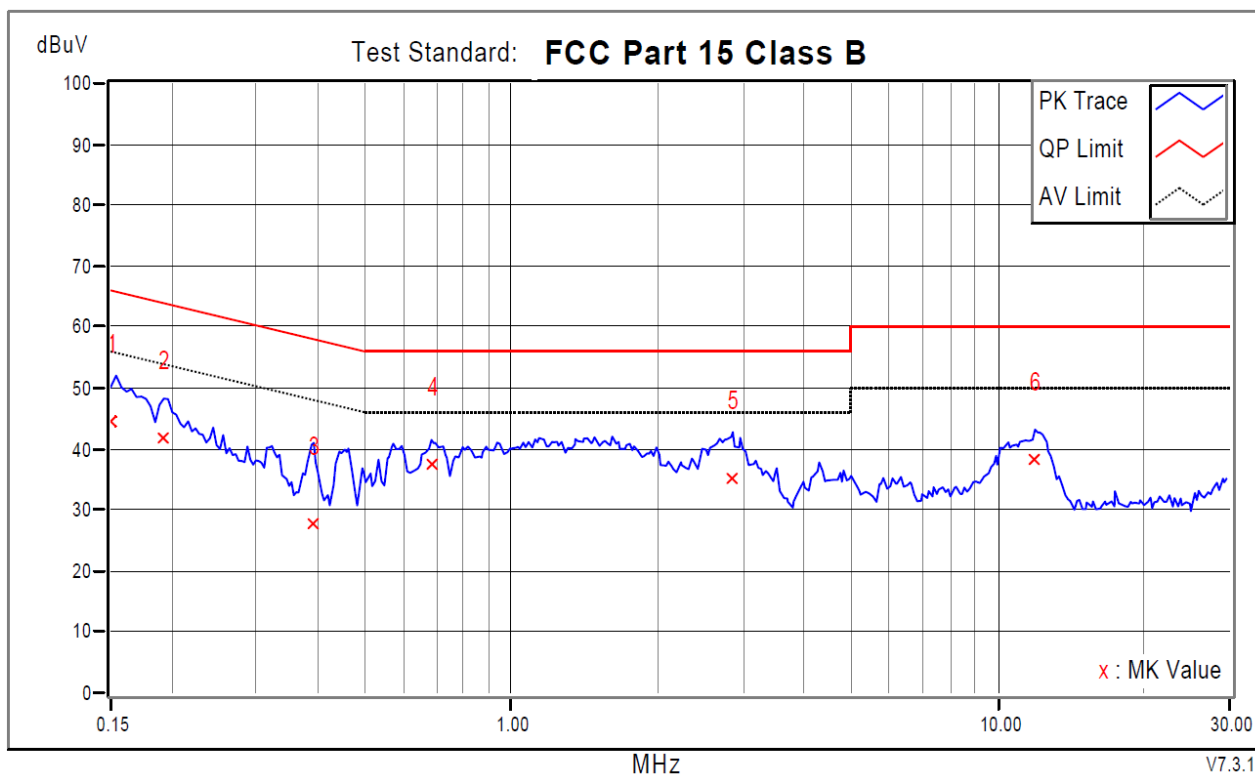

	Frequency	Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
No.	MHz	dB	QP	AV	QP	AV	QP	AV	QP	AV	
1	0.15000	9.86	34.58	7.46	44.44	17.32	66.00	56.00	-21.56	-38.68	
2	0.19301	9.88	32.10	24.30	41.98	34.18	63.91	53.91	-21.93	-19.73	
3	0.39242	9.73	17.84	16.61	27.57	26.34	58.01	48.01	-30.44	-21.67	
4	0.68567	9.63	28.06	13.47	37.69	23.10	56.00	46.00	-18.31	-22.90	
5	2.85725	9.81	25.46	16.61	35.27	26.42	56.00	46.00	-20.73	-19.58	
+6	11.95500	10.16	28.18	22.58	38.34	32.74	60.00	50.00	-21.66	-17.26	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase : NEUTRAL

Location: Conduction 1

Date: 5/21/2019


Time: 10:49:30 AM

Phase N

Temperatuer (C): 22

Humidity (%): 48

Approved by:

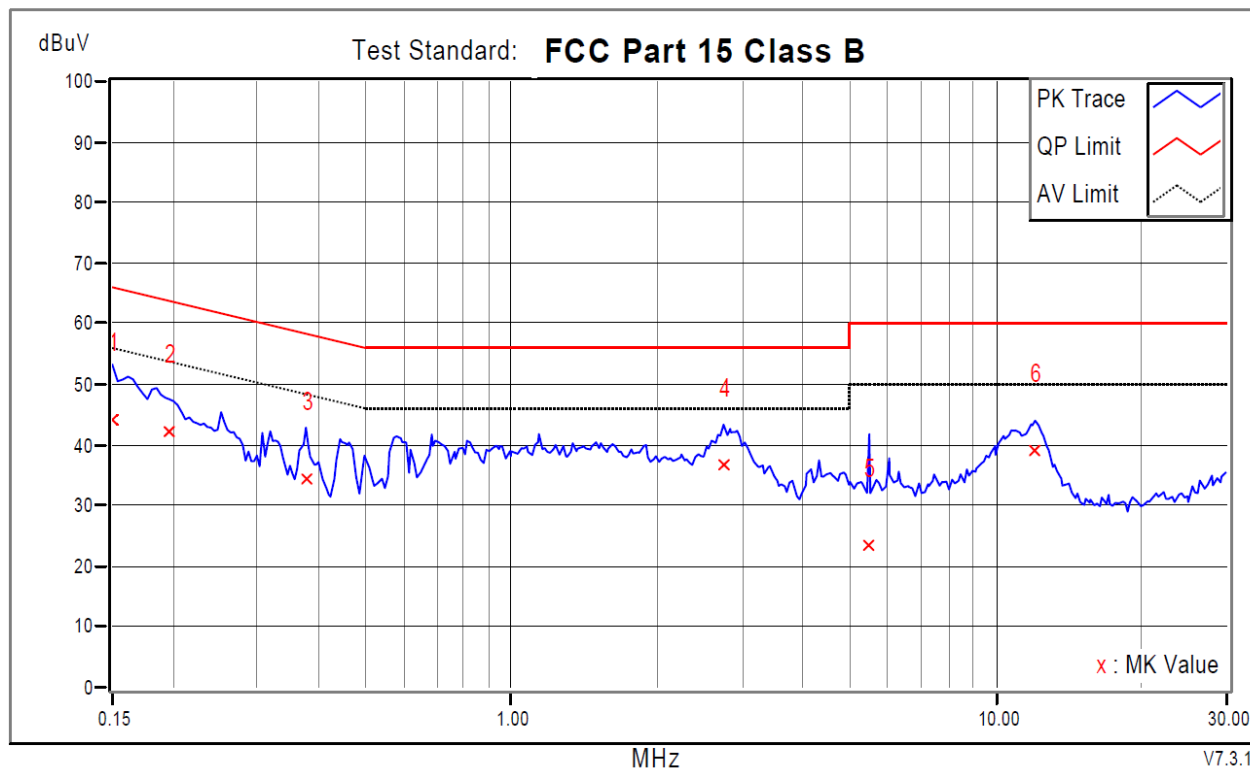

No.	Frequency	Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
	MHz	dB	QP	AV	QP	AV	QP	AV	QP	AV	
1	0.15000	9.87	34.42	9.26	44.29	19.13	66.00	56.00	-21.71	-36.87	
2	0.19564	9.82	32.54	26.38	42.36	36.20	63.79	53.79	-21.43	-17.59	
3	0.37678	9.88	24.34	16.12	34.22	26.00	58.35	48.35	-24.13	-22.35	
4	2.74386	9.97	26.68	16.61	36.65	26.58	56.00	46.00	-19.35	-19.42	
5	5.48868	9.62	13.66	7.22	23.28	16.84	60.00	50.00	-36.72	-33.16	
+6	12.07621	10.31	28.78	23.39	39.09	33.70	60.00	50.00	-20.91	-16.30	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

4.6. Test Photographs





5. Test of Radiated Emission

5.1. Test Limit

TEST STANDARD:

CFR 47 FCC Part 15, Subpart B (Section: 15.109)

FOR FREQUENCY BELOW 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 3m)	
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 – 88	90	39.1	100	40.0
88 – 216	150	43.5	150	43.5
216 – 960	210	46.4	200	46.0
960 – 1000	300	49.5	500	54.0

FOR FREQUENCY ABOVE 1000 MHz


FREQUENCY (MHz)	Class A ($\text{dB}\mu\text{V/m}$) (at 3m)		Class B ($\text{dB}\mu\text{V/m}$) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

- Note:** (1) The lower limit shall apply at the transition frequencies.
 (2) Emission level ($\text{dB}\mu\text{V/m}$) = $20 \log$ Emission level ($\mu\text{V/m}$).
 (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.2. Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3/10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.

5.3. Typical Test Setup

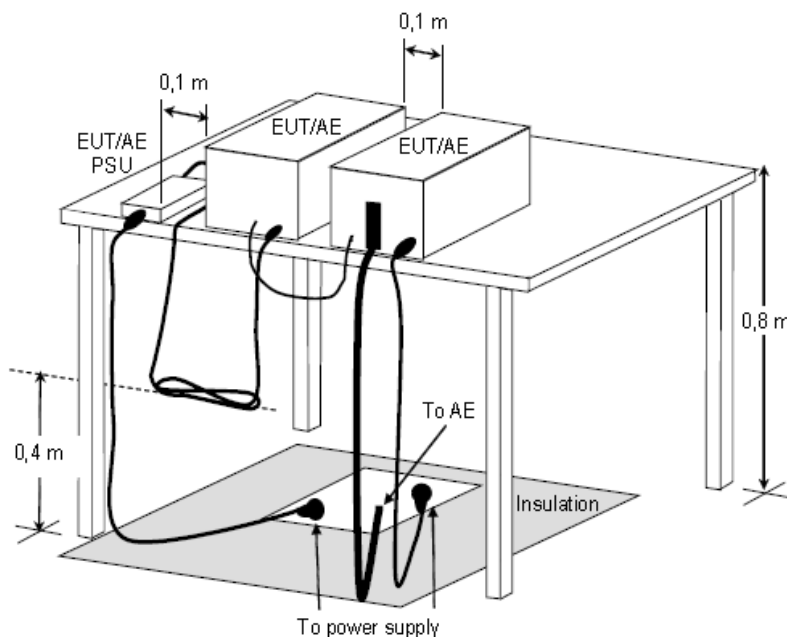


**Figure D.8 – Example measurement arrangement for table-top EUT
(Radiated emission measurement)**

5.4. Measurement Equipment

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
EMI Test Spectrum ROHDE & SCHWARZ	ESR7	E1R1005	Dec.03, 2019
Spectrum Analyzer Keysight	N9030B	E1S1003	Jul.23, 2019
Broad-Band Antenna Schwarzbeck	VULB9168	E1A1001	Feb.27, 2020
Double Riaged Vroadband Horn Antenna Schwarzbeck	BBHA9120D	E1A1017	Aug.26, 2019
Preamplifier Agilent	8447D	E1A2001	Oct.17, 2019
Preamplifier Agilent	EMC051845SE	E1A2009	Jul.23, 2019

5.5. Test Result and Data (30MHz ~ 1GHz)

Position: Horizontal

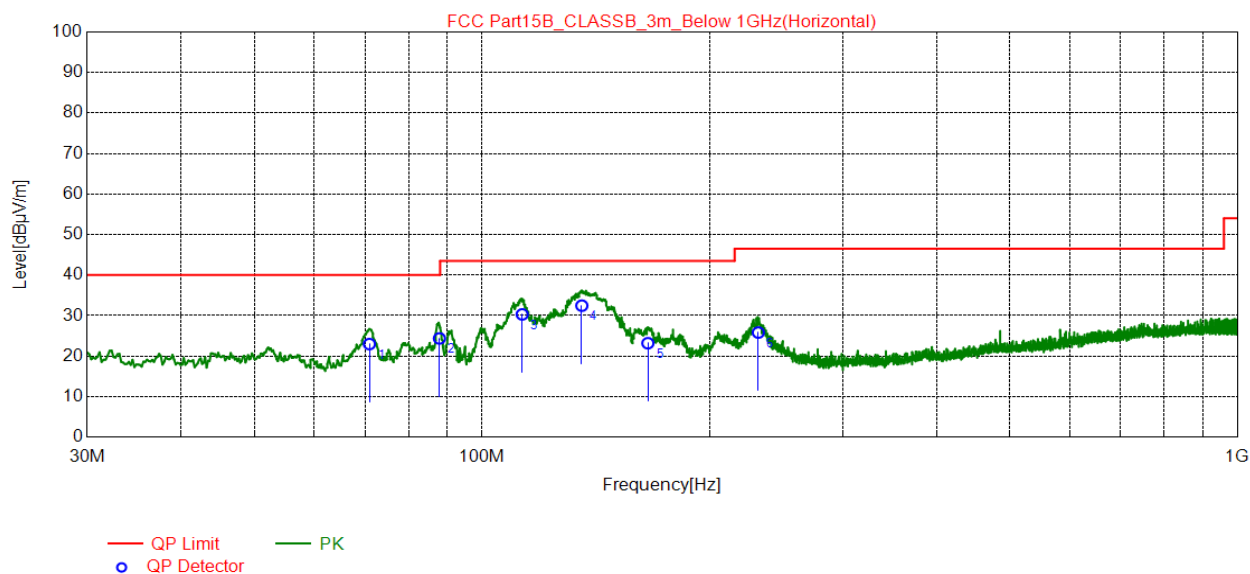


NO.	Freq. [MHz]	QP Reading [dB μ V/m]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	70.93	35.24	-12.26	22.98	40.00	17.02	200	264	Horizontal
2	87.81	38.71	-14.34	24.37	40.00	15.63	200	258	Horizontal
3	113.0	42.27	-11.98	30.29	43.50	13.21	200	258	Horizontal
4	135.5	42.89	-10.43	32.46	43.50	11.04	200	276	Horizontal
5	165.8	32.37	-9.18	23.19	43.50	20.31	100	74	Horizontal
6	232.1	36.86	-11.05	25.81	46.50	20.69	100	46	Horizontal

REMARKS:

1. Q.P. is abbreviation of quasi-peak individually.
2. The emission levels of other frequencies were very low against the limit.
3. QP Margin value = QP Limit value – QP value
4. Factor = Antenna Factor + Amplifier Factor + Cable loss
5. QP value = Factor + Reading Value.

Position: Vertical

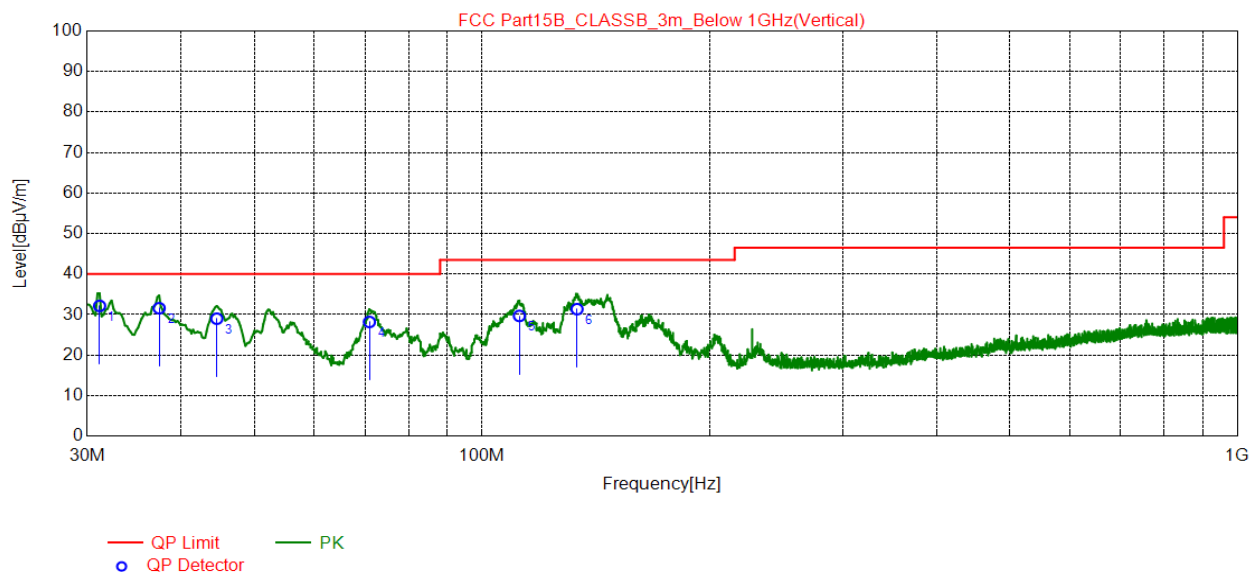


NO.	Freq. [MHz]	QP Reading [dB μ V/m]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	31.16	42.71	-10.57	32.14	40.00	7.86	100	49	Vertical
2	37.37	41.37	-9.79	31.58	40.00	8.42	100	43	Vertical
3	44.55	38.56	-9.57	28.99	40.00	11.01	100	52	Vertical
4	70.93	40.45	-12.26	28.19	40.00	11.81	100	147	Vertical
5	112.0	41.69	-12.01	29.68	43.50	13.82	100	238	Vertical
6	133.5	41.88	-10.54	31.34	43.50	12.16	100	159	Vertical

REMARKS:

1. Q.P. is abbreviation of quasi-peak individually.
2. The emission levels of other frequencies were very low against the limit.
3. QP Margin value = QP Limit value – QP value
4. Factor = Antenna Factor + Amplifier Factor + Cable loss
5. QP value = Factor + Reading Value.

5.6. Test Result and Data (1GHz ~ 18GHz)

Position: Horizontal

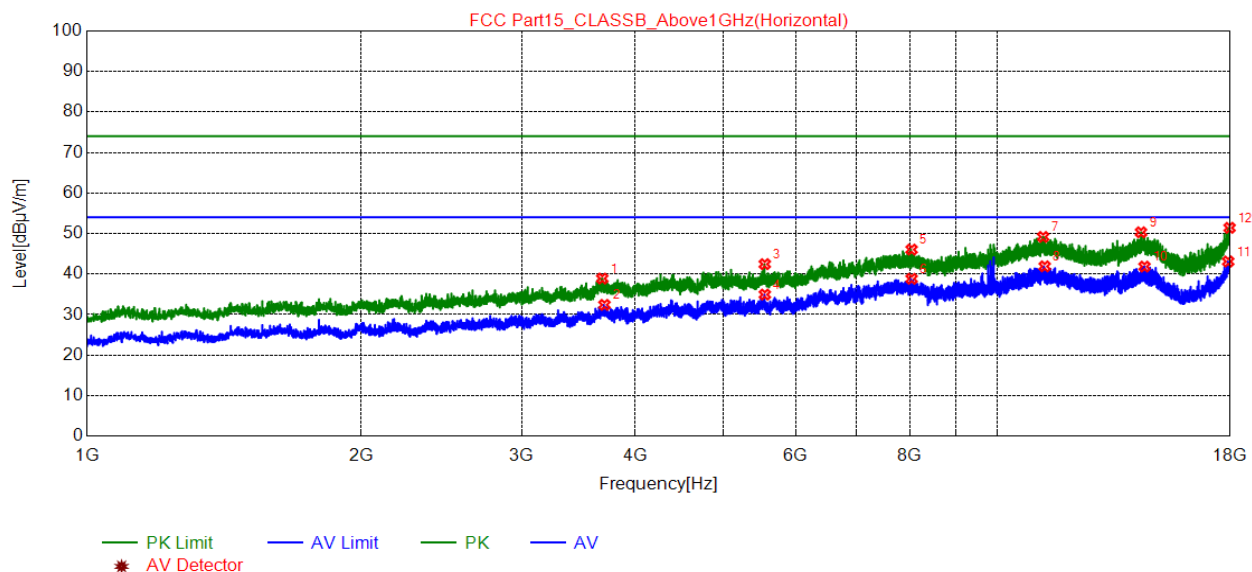


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	3679.2000	51.18	38.89	74.00	35.11	100	69	Horizontal	PK
2	3699.6000	44.65	32.40	54.00	21.60	100	301	Horizontal	AV
3	5548.3500	51.18	42.45	74.00	31.55	100	185	Horizontal	PK
4	5549.2000	43.67	34.94	54.00	19.06	100	185	Horizontal	AV
5	8042.2500	49.07	46.05	74.00	27.95	100	340	Horizontal	PK
6	8043.1000	41.84	38.82	54.00	15.18	100	340	Horizontal	AV
7	11215.3000	47.51	49.17	74.00	24.83	100	31	Horizontal	PK
8	11259.5000	40.23	41.90	54.00	12.10	100	185	Horizontal	AV
9	14364.5500	46.73	50.31	74.00	23.69	100	262	Horizontal	PK
10	14491.2000	38.03	41.84	54.00	12.16	100	147	Horizontal	AV
11	17905.6500	31.96	43.10	54.00	10.90	100	224	Horizontal	AV
12	17969.4000	39.72	51.41	74.00	22.59	100	301	Horizontal	PK

REMARKS:

1. The emission levels of other frequencies were very low against the limit.
2. Margin = Limit – Level

Position: Vertical

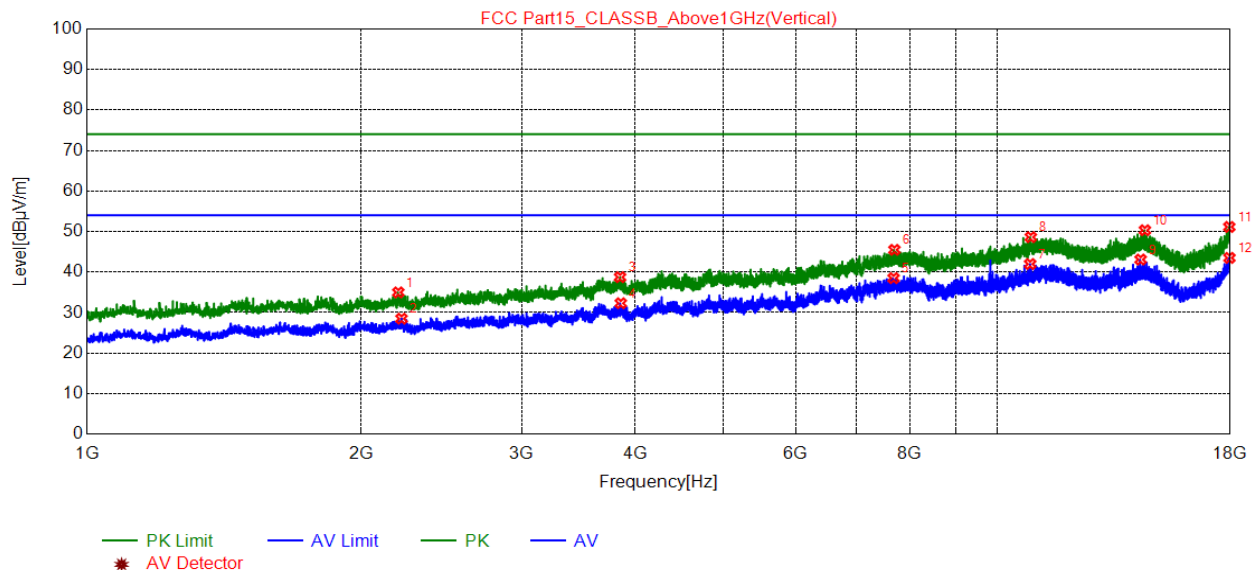

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2196.8000	51.35	34.98	74.00	39.02	100	340	Vertical	PK
2	2214.6500	44.82	28.49	54.00	25.51	100	222	Vertical	AV
3	3848.3500	50.64	38.74	74.00	35.26	100	302	Vertical	PK
4	3855.1500	44.19	32.30	54.00	21.70	100	98	Vertical	AV
5	7684.4000	41.99	38.50	54.00	15.50	100	179	Vertical	AV
6	7699.7000	48.95	45.49	74.00	28.51	100	59	Vertical	PK
7	10853.2000	40.95	41.98	54.00	12.02	100	340	Vertical	AV
8	10871.0500	47.54	48.61	74.00	25.39	100	98	Vertical	PK
9	14349.2500	39.54	43.09	54.00	10.91	100	136	Vertical	AV
10	14506.5000	46.52	50.33	74.00	23.67	100	98	Vertical	PK
11	17957.5000	39.56	51.14	74.00	22.86	100	59	Vertical	PK
12	17963.4500	31.86	43.50	54.00	10.50	100	340	Vertical	AV


REMARKS:

1. The emission levels of other frequencies were very low against the limit.
2. Margin = Limit –Level

5.7. Test Photographs (30MHz ~ 1000MHz)



5.8. Test Photographs (1000MHz ~ 18000MHz)

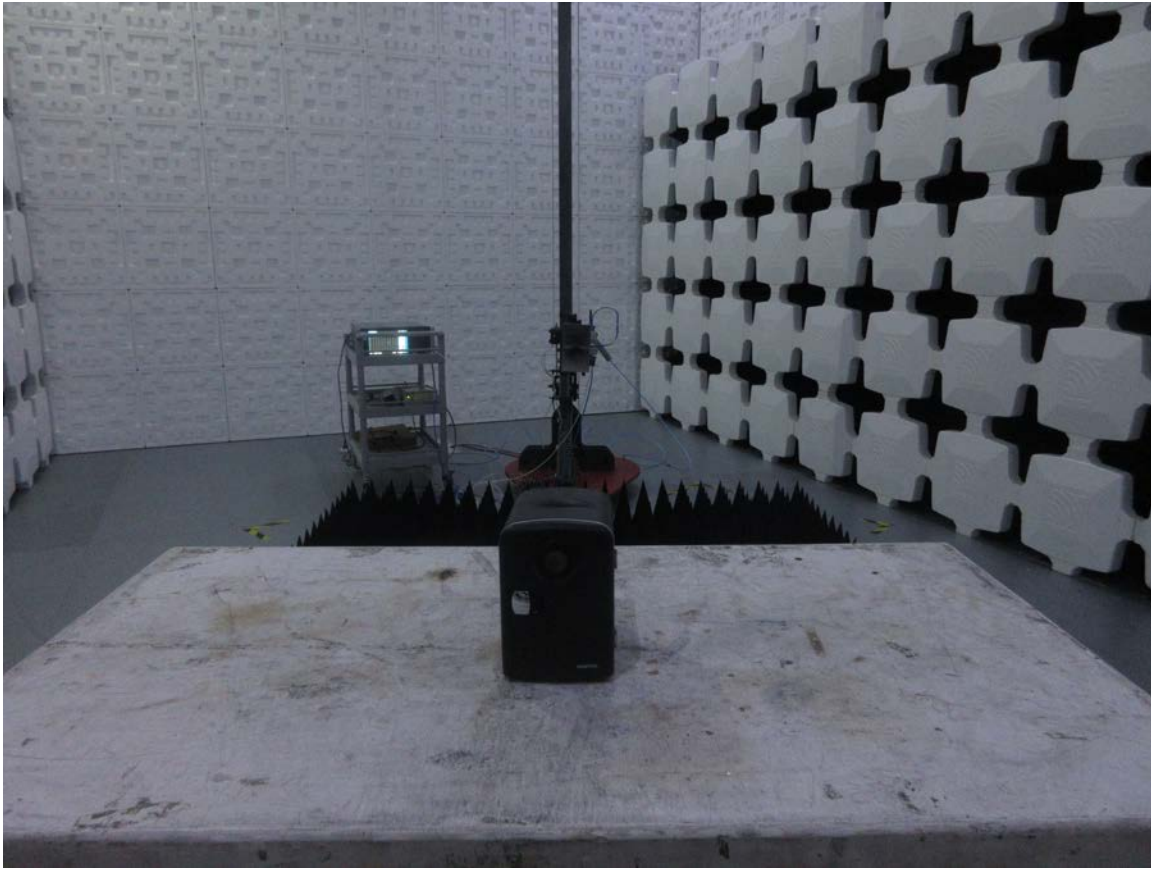

6. Photographs of EUT



--- END ---