



# RF EXPOSURE REPORT

**Equipment under test** SlowJec plus (Cradle)

**Model name** DSD-PLA-0100C

**FCC ID** 2ASB7PLA-0100C

**Applicant** OSSTEM IMPLANT Co., Ltd. Chair Business

**Manufacturer** OSSTEM IMPLANT Co., Ltd. Chair Business

**Date of test(s)** 2022.04.11 ~ 2022.04.18

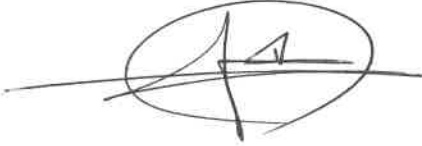

**Date of issue** 2022.06.21

**Issued to**

**OSSTEM IMPLANT Co., Ltd.. Chair Business**  
 192, Haebong-ro Danwon-gu, Ansan-si, Gyeonggi-do, Korea  
 Tel: +82-70-4626-0882, Fax: +82-2-830-6733

**Issued by**

**KES Co., Ltd.**  
 3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,  
 Gyeonggi-do, 14057, Korea  
 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea  
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
	
Bong-Seok, Kim Test engineer	Young-Jun, Cho Technical manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-RF1-22T0068  
Page ( 2 ) of ( 12 )

---

**Revision history**

Revision	Date of issue	Test report No.	Description
-	2022.06.21	KES-RF1-22T0068	Initial

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



---

## TABLE OF CONTENTS

1.	General information .....	4
1.1.	EUT description .....	4
1.2.	Test configuration .....	4
1.3.	Test frequency.....	4
1.4.	Test mode.....	5
1.6.	Accessory information .....	5
1.7.	Measurement Uncertainty .....	5
2.	Environmental evaluation and exposure limit.....	6
2.1.	Test Setup.....	7
2.2.	Test results .....	9
	E-Field Strength from each edges the EUT .....	9
	H-Field Strength from each edges the EUT.....	9
	Appendix A. Measurement equipment .....	10
	Appendix B. Test setup photo .....	11

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-RF1-22T0068  
Page ( 4 ) of ( 12 )

**1. General information**

Applicant OSSTEM IMPLANT Co., Ltd.. Chair Business  
Applicant address 192, Haebong-ro Danwon-gu, Ansan-si, Gyeonggi-do, Korea  
Test site KES Co., Ltd.  
Test site address  3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
 473-29, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea  
Test Facility FCC Accreditation Designation No.: KR0100, Registration No.: 444148  
FCC rule part(s): Part 15C  
FCC ID: 2ASB7PLA-0100C  
Test device serial No.  Production  Pre-production  Engineering

**1.1. EUT description**

Equipment under test SlowJec plus (Cradle)  
Frequency 0.234 MHz  
Inductive charging technique Magnetic Induction  
Model: DSD-PLA-0100C  
Antenna specification Internal type (Coil antenna)  
Power source AC 120 V(Adapter DC output 5 V)  
S/W Version 1.0  
H/W version 1.0

**1.2. Test configuration**

The **OSSTEM IMPLANT Co., Ltd.. Chair Business / SlowJec plus (Cradle) / DSD-PLA-0100C / FCC ID: 2ASB7PLA-0100C** was tested according to the specification of EUT, the EUT must comply with following standards.

FCC Part 15C  
ANSI C63.10-2013  
KDB 680106 D01 V03

**1.3. Test frequency**

		Frequency Range
Power source	AC 120 V (Adapter DC output 5 V)	0.234 MHz

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

**1.4. Test mode**

Mode	Charging current	Description
Charging mode With load	90%	Using Max load
	50%	Using Mid load
	10%	Using Min load

**1.6. Accessory information**

Equipment	Manufacturer	Model	Serial No.	Power source
AC/DC MEDICAL Adapter	MEAN WELL	GEM12I05	-	AC 120 V
SlowJec plus (Main Body)	OSSTEM IMPLANT Co., Ltd.	DSD-PLA-0100	-	DC 3.7 V (Battery)

**1.7. Measurement Uncertainty**

Test Item	Uncertainty	
Uncertainty for Conduction emission test	2.46 dB	
Uncertainty for Radiation emission test (include Fundamental emission)	Below 1GHz	4.40 dB
	Above 1GHz	5.94 dB
Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## 2. Environmental evaluation and exposure limit

### Limits for Maximum Permissible Exposure (MPE)

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

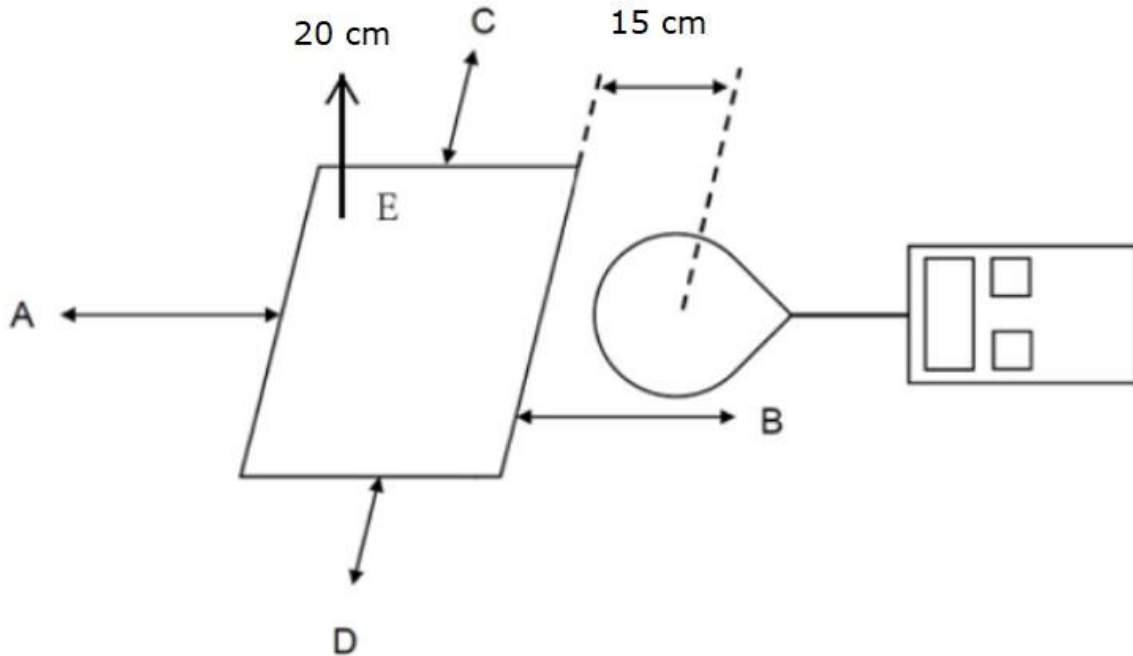
TABLE 1 - Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (minutes)
(A) Limits for Occupational / Control Exposures				
0.3 - 3.0	614	1.63	*(100)	6
3.0 - 30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30 - 300	61.4	0.613	1.0	6
300 - 1 500			f/300	6
1 500 - 100 000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
<b>0.3-1.34</b>	<b>614</b>	<b>1.63</b>	*(100)	30
1.34 - 30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30 - 300	27.5	0.073	0.2	30
300 - 1 500			f/1 500	30
1 500 - 100 000			1.0	30

**Note.**

1. f= frequency in MHz
2. “\*” means Plane-wave equivalent power density

## 2.1. Test Setup



1. The test was performed on 360° turn table in anechoic chamber.
2. The probe was placed at distance 15 cm or 20 cm which is between the edge of the charger and the geometric center of the probe.
3. The highest emission level was recorded and compared with limit as soon as measurement of each point ; A, B, C, D, E were completed.
4. Point F is highest measured field from moving the probe around the device at distance 15 cm.
5. The EUT was measured according to the KDB 680106 D01v03.

**Note.**

Equipment Approval Considerations item 5.b) of KDB 680106 D01 v03.

a) Power transfer frequency is less than 1 MHz.

- The device operates at a frequency of 234 kHz.

b) Output power from each primary coil is less than or equal to 15 watts.

- Output power from each primary coil : 5 watts.

c) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.

- The transfer system including a charging system with single coil. .

d) Client device is placed directly in contact with the transmitter.

- Client device is placed directly.

e) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

- The device is not a mobile device.

f) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50 % of the MPE limit.

- Refer to following test results.

The EUT H-Field Strength levels at 15 cm < 50 % of the MPE H-Field Strength limit 1.63 A/m  
0.340 A/m (Max) < 0.815 A/m





## 2.2. Test results

Test mode : 5 W

### E-Field Strength from each edges the EUT

Test Mode		Point A (V/m)	Point B (V/m)	Point C (V/m)	Point D (V/m)	Point E (V/m)
5W Charging mode	10 % load	1.425	1.407	1.992	1.369	1.098
	50 % load	1.435	1.412	1.989	1.365	1.105
	90 % load	1.429	1.410	1.996	1.381	1.103

### H-Field Strength from each edges the EUT

Test Mode		Point A (A/m)	Point B (A/m)	Point C (A/m)	Point D (A/m)	Point E (A/m)
5W Charging mode	10 % load	0.315	0.331	0.298	0.318	0.275
	50 % load	0.320	0.328	0.304	0.322	0.279
	90 % load	0.312	0.340	0.310	0.314	0.276

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-RF1-22T0068  
Page ( 10 ) of ( 12 )

**Appendix A. Measurement equipment**

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Electric Field Probe	ETS LINDGREN	HI-6105	00151770	1 year	2022.06.24
Magnetic Field Hitester	HIOKI	FT3470-50	120429926	1 year	2022.10.12

**Peripheral device**

Device	Manufacturer	Model No.	S/N	Note
-	-	-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr