

Note: The peak emissions without marker on the above plots are fundamental wave and need not to compare with the limit.




TEST RESULT FOR BAND EDGE--1M

GFSK MODULATION IN LOW CHANNEL



GFSK MODULATION IN HIGH CHANNEL

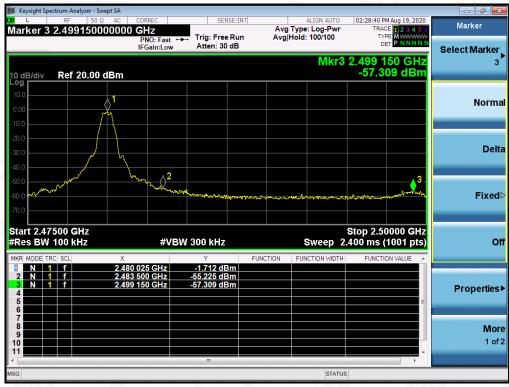



TEST RESULT FOR BAND EDGE--2M

GFSK MODULATION IN LOW CHANNEL



GFSK MODULATION IN HIGH CHANNEL



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 37 of 67

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 10.2 was used in this testing.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 7.2.

10.3. MEASUREMENT EQUIPMENT USED

Refer to Section 6.


10.4. LIMITS AND MEASUREMENT RESULT

1M

Channel No.	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	-16.510	8	Pass
Middle Channel	-16.377	8	Pass
High Channel	-16.429	8	Pass

TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL







TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL



TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL





Page 39 of 67

2M

Channel No.	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	-19.711	8	Pass
Middle Channel	-19.652	8	Pass
High Channel	-19.675	8	Pass

TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL





TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL



TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL






Page 41 of 67

11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE


- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.






11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

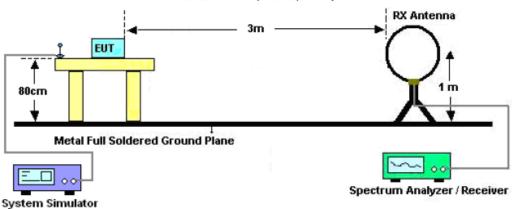

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

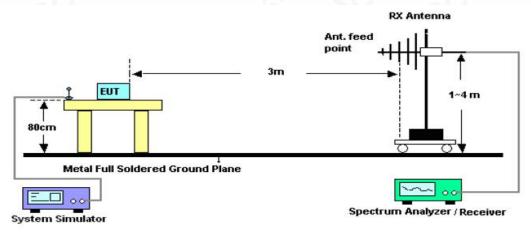

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

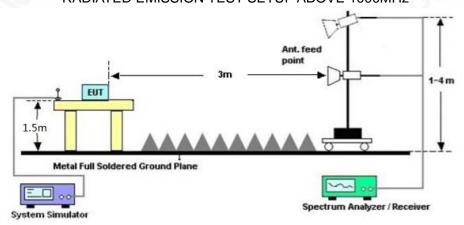

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Coedicated Postuagina Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written pathorization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 43 of 67

11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)	
0.009~0.490	2400/F(kHz)	300	
0.490~1.705	24000/F(kHz)	30	
1.705~30.0	30	30	
30~88	100	3	
88~216	150	3	
216~960	200	3	
Above 960	500	3	

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

RADIATED EMISSION BELOW 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Page 44 of 67

RADIATED EMISSION BELOW 1GHZ

EUT Bluetooth Low Energy Data Transmission Module		Model Name	HM-BT2204
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna	Horizontal

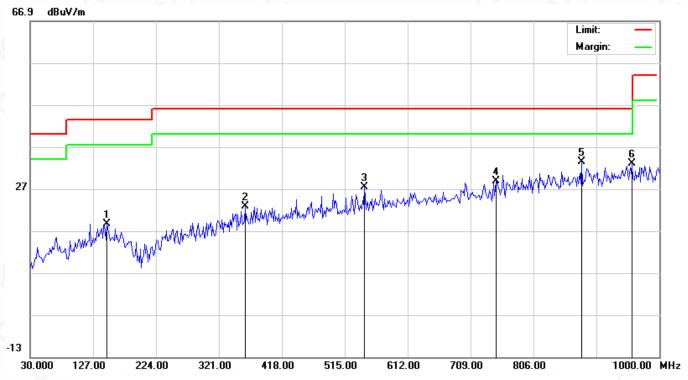


No.	М	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		148.0167	-0.64	19.21	18.57	43.50	-24.93	peak
2		361.4166	1.08	21.63	22.71	46.00	-23.29	peak
3		545.7167	1.52	25.89	27.41	46.00	-18.59	peak
4		747.8000	-0.43	29.23	28.80	46.00	-17.20	peak
5	*	880.3667	1.96	31.45	33.41	46.00	-12.59	peak
6		957.9667	0.72	32.20	32.92	46.00	-13.08	peak

RESULT: PASS



Page 45 of 67

EUT	Bluetooth Low Energy Data Transmission Module	Model Name	HM-BT2204
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna	Vertical

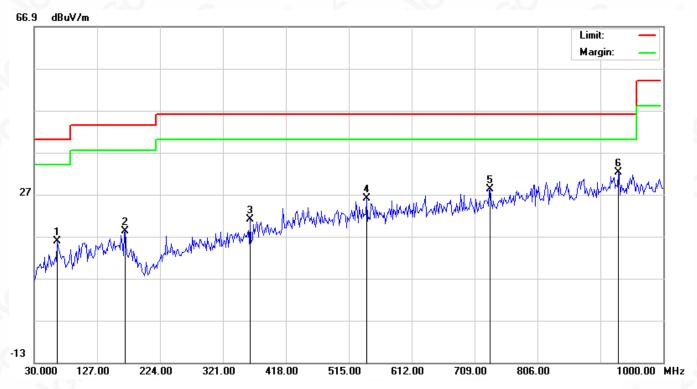

No.	Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		65.5667	-0.83	16.56	15.73	40.00	-24.27	peak
2		170.6500	0.14	18.09	18.23	43.50	-25.27	peak
3		363.0333	-0.61	21.68	21.07	46.00	-24.93	peak
4		542.4833	0.18	25.82	26.00	46.00	-20.00	peak
5		733.2500	-0.65	28.90	28.25	46.00	-17.75	peak
6	*	930.4833	0.19	31.96	32.15	46.00	-13.85	peak

RESULT: PASS Note:

- 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
- 2. All test modes had been tested. The mode 5 is the worst case and recorded in the report.



Page 46 of 67

g/Inspection The test results

RADIATED EMISSION ABOVE 1GHZ

EUT	Bluetooth Low Energy Data Transmission Module	Model Name	HM-BT2204
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	45.29	0.08	45.37	74	-28.63	peak 🦠
4804.000	36.47	0.08	36.55	54	-17.45	AVG
7206.000	39.74	2.21	41.95	74	-32.05	peak
7206.000	32.05	2.21	34.26	54	-19.74	AVG
an order	60			100	-GO	
emark:			8			

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	Bluetooth Low Energy Data Transmission Module	Model Name	HM-BT2204
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	44.95	0.08	45.03	74	-28.97	peak
4804.000	35.76	0.08	35.84	54	-18.16	AVG
7206.000	38.94	2.21	41.15	74	-32.85	o peak
7206.000	33.26	2.21	35.47	54	-18.53	AVG
0			-C	0		- C
emark:	@					
ctor = Anter	nna Factor + Cab	le Loss – Pre-	amplifier.			

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pest Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exphorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issue of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 47 of 67

g/Inspection
The test results
the test report.

EUT	Bluetooth Low Energy Data Transmission Module Model Name		HM-BT2204
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	44.62	0.14	44.76	74	-29.24	peak
4880.000	35.21	0.14	35.35	54	-18.65	AVG
7320.000	39.85	2.36	42.21	74	-31.79	peak
7320.000	31.53	2.36	33.89	54	-20.11	AVG
G	· ·			-G	©	
emark:						
actor = Anter	nna Factor + Cable	Loss - Pre-	-amplifier.			

EUT	Bluetooth Low Energy Data Transmission Module	Model Name	HM-BT2204
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	47.28	0.14	47.42	74	-26.58	peak
4880.000	38.14	0.14	38.28	54	-15.72	AVG
7320.000	40.67	2.36	43.03	74	-30.97	peak
7320.000	33.51	2.36	35.87	54	-18.13	AVG
<u> </u>			a.C			
emark:	8					3
actor = Anter	nna Factor + Cab	le Loss – Pre-ar	mplifier.			<u> </u>



Page 48 of 67

EUT	Bluetooth Low Energy Data Transmission Module	Model Name	HM-BT2204
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	44.17	0.22	44.39	74	-29.61	peak
4960.000	34.73	0.22	34.95	54	-19.05	AVG
7440.000	38.44	2.64	41.08	74	-32.92	peak
7440.000	29.62	2.64	32.26	54	-21.74	AVG
ے ت			3 30	-6	<u> </u>	
mark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	Bluetooth Low Energy Data Transmission Module	Model Name	HM-BT2204
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	42.03	0.22	42.25	74	-31.75	peak
4960.000	33.47	0.22	33.69	54	-20.31	AVG
7440.000	38.19	2.64	40.83	74	-33.17	peak
7440.000	28.75	2.64	31.39	54	-22.61	AVG
0		-60	*			
emark:	8					
actor = Anter	nna Factor + Cabl	le Loss – Pre-	amplifier.			9


RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.







TEST RESULT FOR RESTRICTED BANDS REQUIREMENTS--1M

EUT	Bluetooth Low Energy Data Transmission Module	Model Name	HM-BT2204
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

| Name |

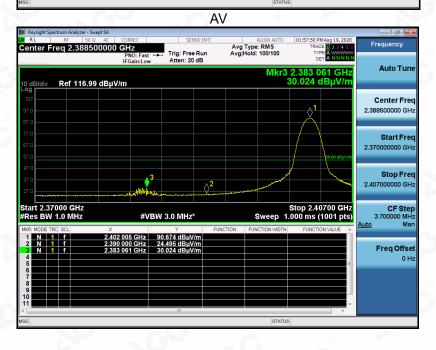


RESULT: PASS







Bluetooth Low Energy Data HM-BT2204 **EUT Model Name** Transmission Module 25° C **Temperature Relative Humidity** 55.4% 960hPa **Pressure Test Voltage** Normal Voltage **Test Mode** Mode 1 **Antenna** Vertical



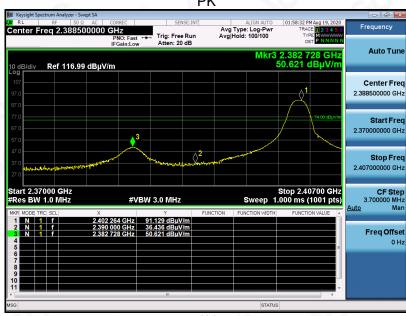

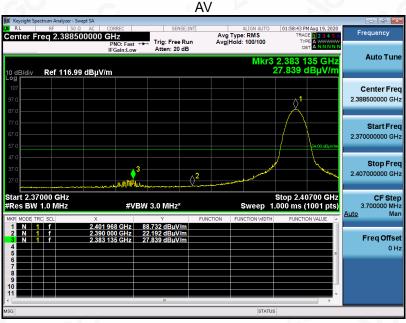

RESULT: PASS







EUT	Bluetooth Low Energy Data Transmission Module	Model Name	HM-BT2204
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal





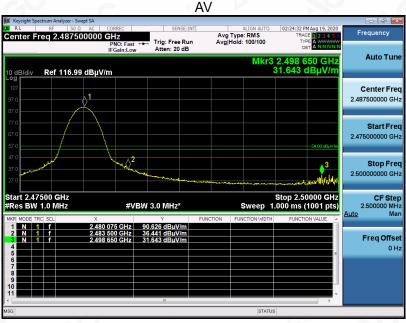



RESULT: PASS






EUT	Bluetooth Low Energy Data Transmission Module	Model Name	HM-BT2204
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

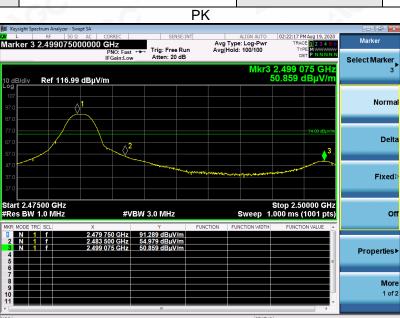

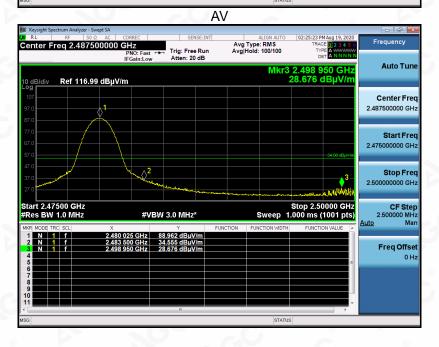

RESULT: PASS


Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.






TEST RESULT FOR RESTRICTED BANDS REQUIREMENTS--2M

EUT	Bluetooth Low Energy Data Transmission Module	Model Name	HM-BT2204
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Horizontal

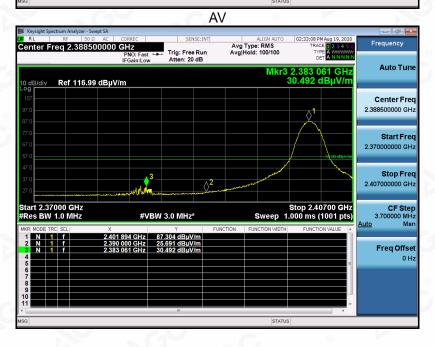

RESULT: PASS







Bluetooth Low Energy Data HM-BT2204 **EUT Model Name** Transmission Module 25° C **Temperature Relative Humidity** 55.4% 960hPa **Pressure Test Voltage** Normal Voltage **Test Mode** Mode 4 **Antenna** Vertical





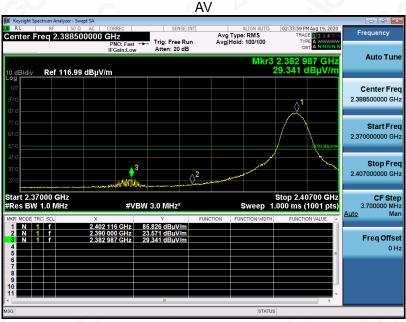


RESULT: PASS







EUT	Bluetooth Low Energy Data Transmission Module	Model Name	HM-BT2204
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Horizontal



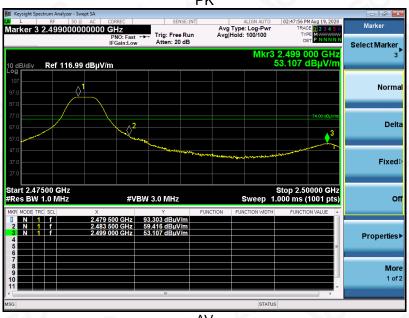

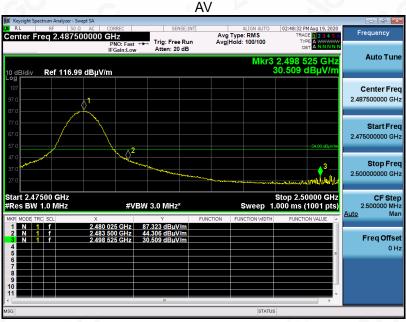



RESULT: PASS





EUT	Bluetooth Low Energy Data Transmission Module	Model Name	HM-BT2204
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Vertical

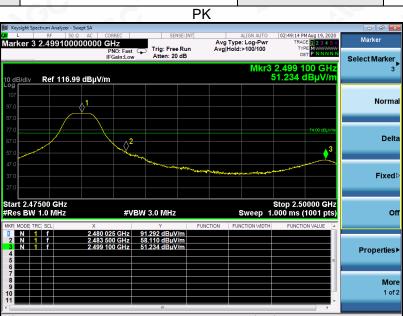

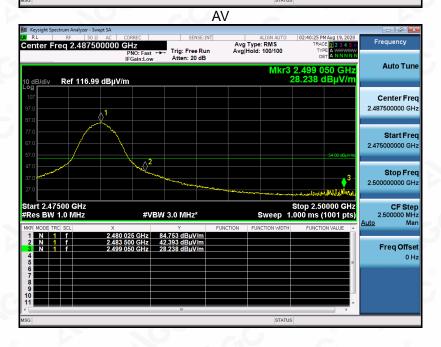

RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



Page 57 of 67

/Inspection The test results

he test report.

12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage				
Frequency	Q.P.(dBuV)	Average(dBuV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

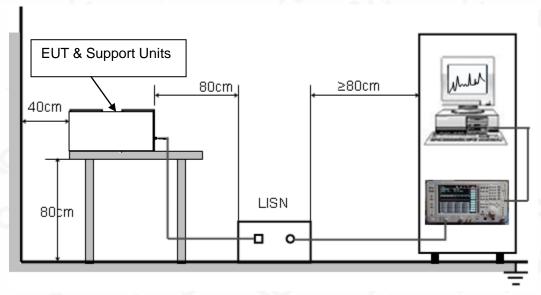



Page 58 of 67

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 3.3V power from control board which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Page 59 of 67

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

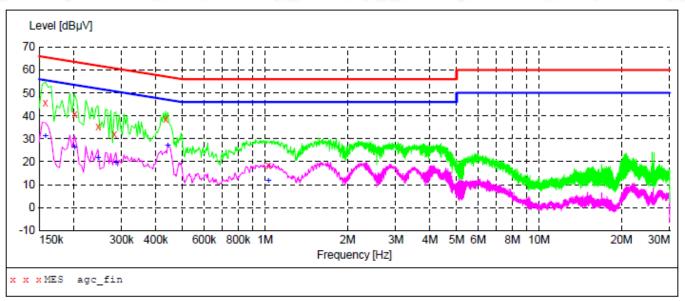

MEASUREMENT RESULT: "agc fin"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.158000	45.70	9.3	66	19.9	QP	L1	FLO
0.202000	40.70	9.3	64	22.8	QP	L1	FLO
0.246000	35.40	9.3	62	26.5	QP	L1	FLO
0.282000	31.80	9.3	61	29.0	QP	L1	FLO
0.434000	38.60	9.3	57	18.6	QP	L1	FLO
1.030000	18.30	9.3	56	37.7	QP	L1	FLO


MEASUREMENT RESULT: "agc fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.158000	31.20	9.3	56	24.4	AV	L1	FLO
0.202000	26.30	9.3	54	27.2	AV	L1	FLO
0.246000	21.50	9.3	52	30.4	AV	L1	FLO
0.286000	19.60	9.3	51	31.0	AV	L1	FLO
0.442000	27.00	9.3	47	20.0	AV	L1	FLO
1.030000	11.60	9.3	46	34.4	AV	L1	FLO

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condition of Pestino/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Line Conducted Emission Test Line 2-N

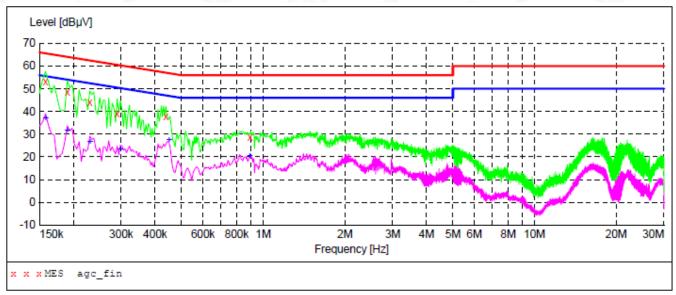

MEASUREMENT RESULT: "agc_fin"


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.158000	53.20	9.3	66	12.4	QP	N	FLO
0.190000	48.50	9.3	64	15.5	QP	N	FLO
0.230000	43.90	9.3	62	18.5	QP	N	FLO
0.290000	39.10	9.3	61	21.4	QP	N	FLO
0.438000	37.80	9.3	57	19.3	QP	N	FLO
0.894000	28.50	9.3	56	27.5	QP	N	FLO

MEASUREMENT RESULT: "agc fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.158000	37.00	9.3	56	18.6	AV	N	FLO
0.190000	31.60	9.3	54	22.4	AV	N	FLO
0.230000	26.60	9.3	52	25.8	AV	N	FLO
0.298000	23.30	9.3	50	27.0	AV	N	FLO
0.450000	27.60	9.3	47	19.3	AV	N	FLO
0.894000	20.20	9.3	46	25.8	AV	N	FLO

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





APPENDIX A: PHOTOGRAPHS OF TEST SETUP

RADIATED EMISSION TEST SETUP BELOW 1GHZ







Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





Page 62 of 67

CONDUCTED EMISSION TEST SETUP




CONDUCTED TEST SETUP

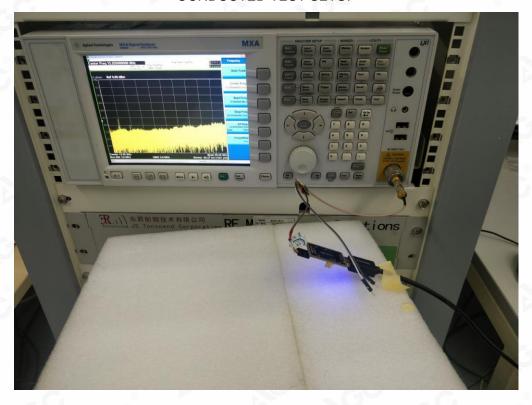







APPENDIX B: PHOTOGRAPHS OF EUT
TOP VIEW OF EUT

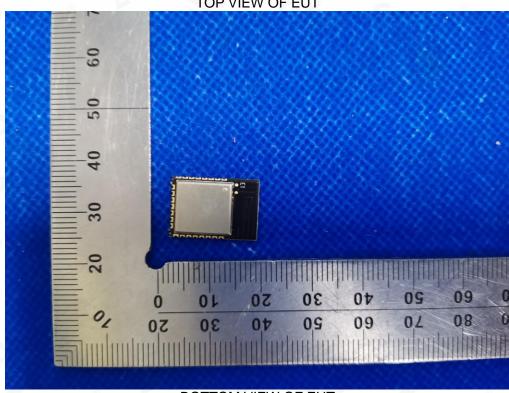

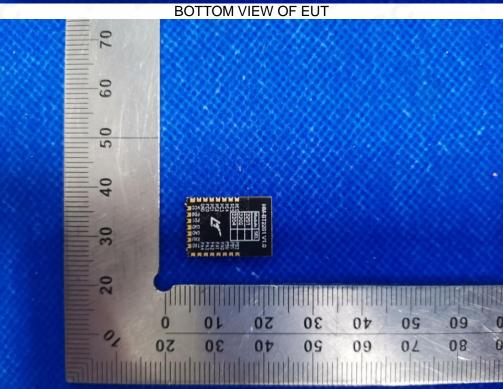


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.









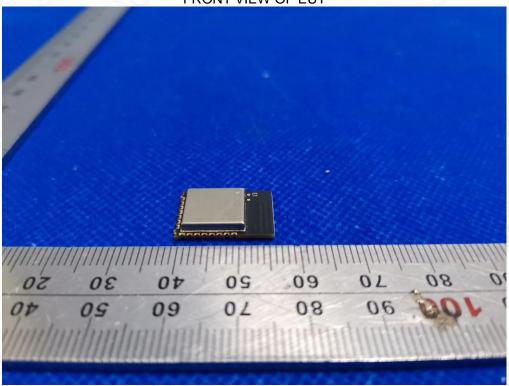


BACK VIEW OF EUT

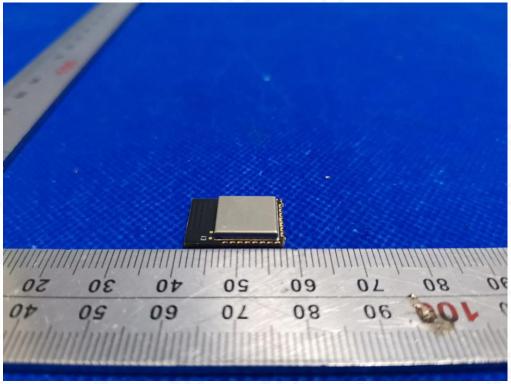









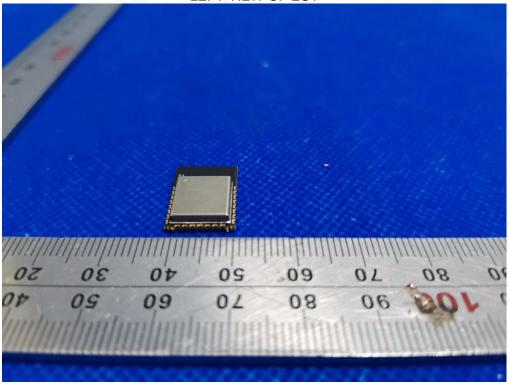


RIGHT VIEW OF EUT

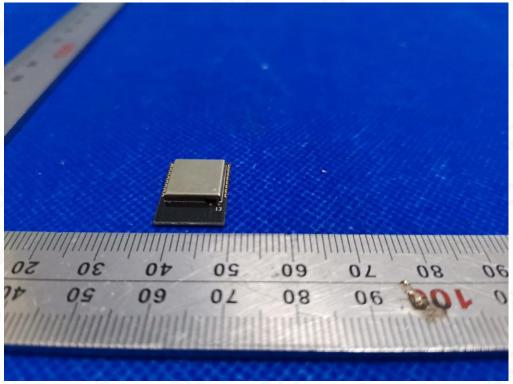



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the special dead results from the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





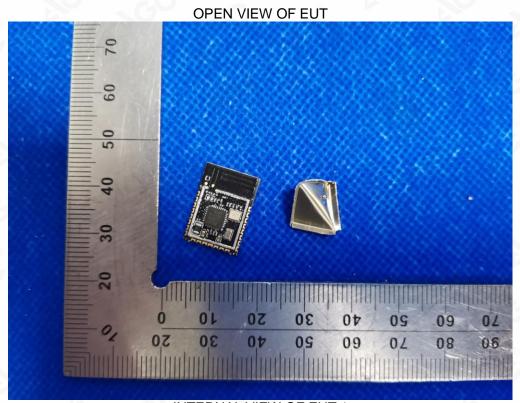


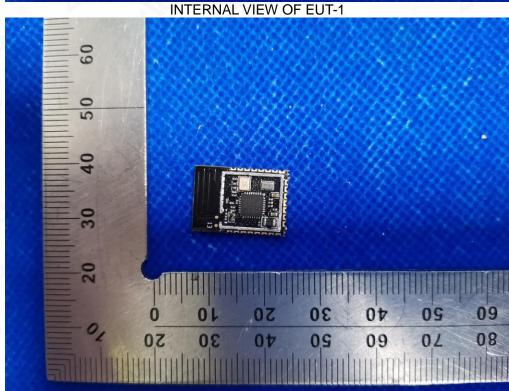





INTERNAL VIEW OF EUT-2

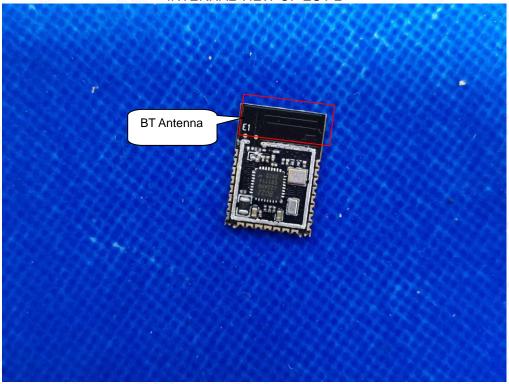

----END OF REPORT----