

RADIO TEST REPORT

FCC ID: 2ASEORFM97C

Product: LoRa Wireless module
Trade Mark: HopeRF
Model No.: RFM97C
Family Model: N/A
Report No.: S19072600701001
Issue Date: 12 Sep. 2019

Prepared for

Shenzhen HOPE Microelectronics Co., Ltd
2/F, 3 Building, Minqi Technology Park, Pingshan Village, Xili
Town, Nanshan District, Shenzhen, Guangdong, China.

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China
Tel.: +86-755-6115 6588
Fax.: +86-755-6115 6599
Website:<http://www.ntek.org.cn>

TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION 3

2 SUMMARY OF TEST RESULTS..... 4

3 FACILITIES AND ACCREDITATIONS 5

3.1 FACILITIES..... 5

3.2 LABORATORY ACCREDITATIONS AND LISTINGS 5

3.3 MEASUREMENT UNCERTAINTY 5

4 GENERAL DESCRIPTION OF EUT 6

5 DESCRIPTION OF TEST MODES 8

6 SETUP OF EQUIPMENT UNDER TEST 9

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM..... 9

6.2 SUPPORT EQUIPMENT..... 10

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS..... 11

7 TEST REQUIREMENTS 13

7.1 CONDUCTED EMISSIONS TEST 13

7.2 RADIATED SPURIOUS EMISSION 18

7.3 6DB BANDWIDTH..... 29

7.4 PEAK OUTPUT POWER 32

7.5 POWER SPECTRAL DENSITY 36

7.6 CONDUCTED BAND EDGE MEASUREMENT..... 39

7.7 SPURIOUS RF CONDUCTED EMISSIONS..... 41

7.8 ANTENNA APPLICATION 45

1 TEST RESULT CERTIFICATION

| | |
|-----------------------------------|--|
| Applicant's name | Shenzhen HOPE Microelectronics Co., Ltd |
| Address | 2/F, 3 Building, Minqi Technology Park, Pingshan Village, Xili Town, Nanshan District, Shenzhen, Guangdong, China. |
| Manufacturer's Name | Shenzhen HOPE Microelectronics Co., Ltd |
| Address | 2/F, 3 Building, Minqi Technology Park, Pingshan Village, Xili Town, Nanshan District, Shenzhen, Guangdong, China. |
| Product description | |
| Product name | LoRa Wireless module |
| Model and/or type reference | RFM97C |
| Family Model | N/A |

Measurement Procedure Used:

| APPLICABLE STANDARDS | |
|---|-------------|
| APPLICABLE STANDARD/ TEST PROCEDURE | TEST RESULT |
| FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C KDB 174176 D01 Line Conducted FAQ v01r01 ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02 | Complied |

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : Jul 26, 2019 ~ Sep 10, 2019

Testing Engineer : Mary Hu
(Mary Hu)

Technical Manager : Jason Chen
(Jason Chen)

Authorized Signatory : Sam Chen
(Sam Chen)

2 SUMMARY OF TEST RESULTS

| FCC Part15 (15.247), Subpart C | | | |
|--------------------------------|--------------------------------|---------|--------|
| Standard Section | Test Item | Verdict | Remark |
| 15.207 | Conducted Emission | PASS | |
| 15.247 (a)(2) | 6dB Bandwidth | PASS | |
| 15.247 (b) | Peak Output Power | PASS | |
| 15.209 (a) 15.205 (a) | Radiated Spurious Emission | PASS | |
| 15.247 (e) | Power Spectral Density | PASS | |
| 15.247 (d) | Band Edge Emission | PASS | |
| 15.247 (d) | Spurious RF Conducted Emission | PASS | |
| 15.203 | Antenna Requirement | PASS | |

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L5516.

IC-Registration The Certificate Registration Number is 9270A-1.

FCC- Accredited Test Firm Registration Number: 463705.

Designation Number: CN1184

A2LA-Lab. The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.

This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

| No. | Item | Uncertainty |
|-----|-------------------------------------|-------------------------|
| 1 | Conducted Emission Test | $\pm 2.80\text{dB}$ |
| 2 | RF power, conducted | $\pm 0.16\text{dB}$ |
| 3 | Spurious emissions, conducted | $\pm 0.21\text{dB}$ |
| 4 | All emissions, radiated(30MHz~1GHz) | $\pm 2.64\text{dB}$ |
| 5 | All emissions, radiated(1GHz~6GHz) | $\pm 2.40\text{dB}$ |
| 6 | All emissions, radiated(>6GHz) | $\pm 2.52\text{dB}$ |
| 7 | Temperature | $\pm 0.5^\circ\text{C}$ |
| 8 | Humidity | $\pm 2\%$ |

4 GENERAL DESCRIPTION OF EUT

| Product Feature and Specification | |
|-----------------------------------|--|
| Equipment | LoRa Wireless module |
| Trade Mark | HopeRF |
| FCC ID | 2ASEORFM97C |
| Model No. | RFM97C |
| Family Model | N/A |
| Model Difference | N/A |
| Operating Frequency | 903.0MHz~927.5MHz |
| Modulation | LoRa |
| Number of Channels | 16 |
| Antenna Type | ANT1:Reverse SMA interface Rubber Bar antenna ANT2:Spring antenna |
| Antenna Gain | ANT1:2.15dBi ANT2:2.15dBi |
| Power supply | <input checked="" type="checkbox"/> DC supply: DC 3.3V |
| | <input checked="" type="checkbox"/> Adapter supply: |
| HW Version | 1.0 |
| SW Version | 1.0 |

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

Revision History

| Report No. | Version | Description | Issued Date |
|-----------------|---------|-------------------------|--------------|
| S19072600701001 | Rev.01 | Initial issue of report | 20 Aug. 2019 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Data rate of the EUT:

| System mode | Data rate(DR) | Configuration | Byte rate(bit/s) |
|-------------|---------------|----------------|------------------|
| DTS | 4 | SF=8/BW=500KHz | 12500 |

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

Carrier Frequency and Channel list:

| DTS Mode | | | |
|-----------|----------------|---------|----------------|
| BW=500KHz | | | |
| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
| CH64 | 903.0 | CH72 | 923.3 |
| CH65 | 904.6 | CH73 | 923.9 |
| CH66 | 906.2 | CH74 | 924.5 |
| CH67 | 907.8 | CH75 | 925.1 |
| CH68 | 909.4 | CH76 | 925.7 |
| CH69 | 911.0 | CH77 | 926.3 |
| CH70 | 912.6 | CH78 | 926.9 |
| CH71 | 914.2 | CH79 | 927.5 |

The following summary table is showing all test modes to demonstrate in compliance with the standard.

| Test Cases | |
|-----------------------|--------------------------|
| Test Item | Data Rate/ Modulation |
| | LoRa |
| AC Conducted Emission | Mode 1: normal link mode |
| Radiated Test Cases | Mode 1: normal link mode |
| | Mode 2: CH64(903.0MHz) |
| | Mode 3: CH72(923.3MHz) |
| | Mode 4: CH79(927.5MHz) |


Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. AC power line Conducted Emission was tested under maximum output power.
3. EUT is set to continuous transmission mode. duty cycle greater than 98%.


6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM


For AC Conducted Emission Mode

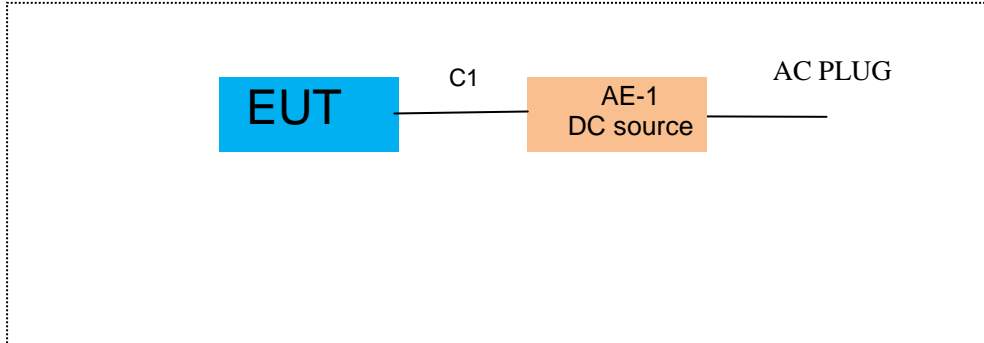

For Radiated Test Cases

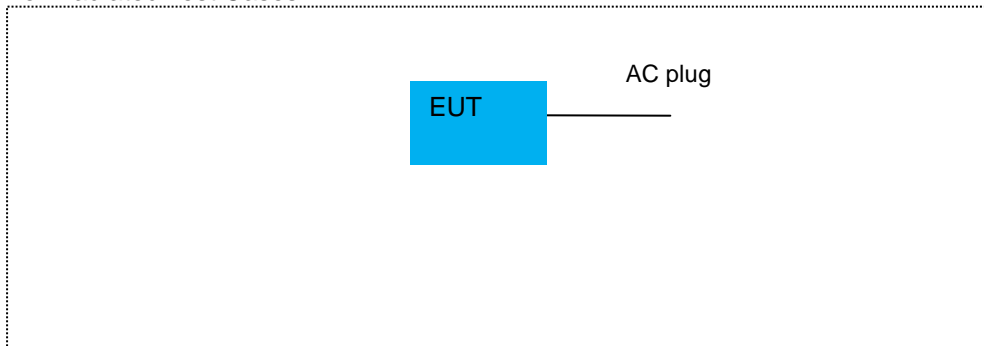

For Conducted Test Cases

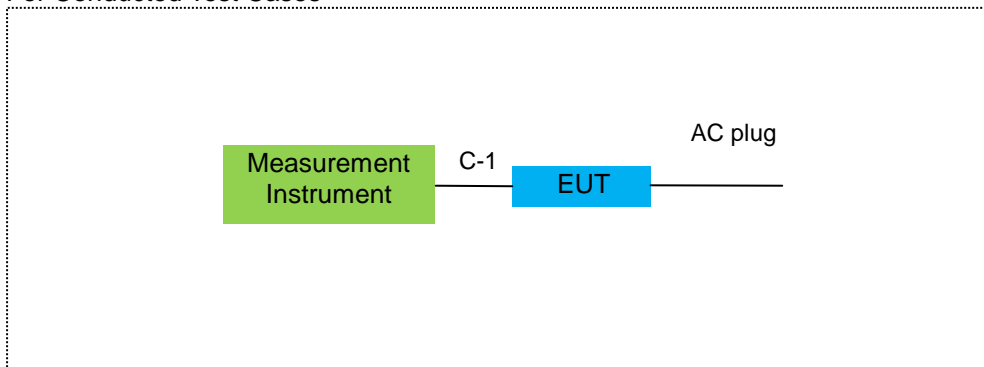

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|-----------|-----------|----------------|-------------|-------------|
| AE-1 | DC power | ZHAOXIN | PS-6005D | 20170402923 | Peripherals |
| | | | | | |
| | | | | | |

| Item | Cable Type | Shielded Type | Ferrite Core | Length |
|------|-------------|---------------|--------------|--------|
| C-1 | Power Cable | NO | NO | 0.1m |
| C-2 | RF Cable | NO | NO | 0.1m |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation & Conducted Test equipment

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until | Calibration period |
|------|------------------------------------|--------------|-------------|---------------|------------------|------------------|--------------------|
| 1 | Spectrum Analyzer | Agilent | E4407B | MY45108040 | 2019.05.13 | 2020.05.12 | 1 year |
| 2 | Spectrum Analyzer | Agilent | N9020A | MY49100060 | 2018.10.08 | 2019.10.07 | 1 year |
| 3 | Spectrum Analyzer | R&S | FSV40 | 101417 | 2018.10.08 | 2019.10.07 | 1 year |
| 4 | Test Receiver | R&S | ESPI7 | 101318 | 2019.05.13 | 2020.05.12 | 1 year |
| 5 | Bilog Antenna | TESEQ | CBL6111D | 31216 | 2019.04.15 | 2020.04.14 | 1 year |
| 6 | 50Ω Coaxial Switch | Anritsu | MP59B | 6200983705 | 2018.05.19 | 2020.05.18 | 2 year |
| 7 | Horn Antenna | EM | EM-AH-10180 | 2011071402 | 2019.04.15 | 2020.04.14 | 1 year |
| 8 | Broadband Horn Antenna | SCHWARZBECK | BBHA 9170 | 803 | 2018.12.11 | 2019.12.10 | 1 year |
| 9 | Amplifier | EMC | EMC051835SE | 980246 | 2019.05.13 | 2020.05.12 | 1 year |
| 10 | Active Loop Antenna | SCHWARZBECK | FMZB 1519B | 055 | 2018.12.11 | 2019.12.10 | 1 year |
| 11 | Power Meter | DARE | RPR3006W | 15I00041SN084 | 2019.05.13 | 2020.05.12 | 1 year |
| 12 | Test Cable (9KHz-30MHz) | N/A | R-01 | N/A | 2017.04.21 | 2020.04.20 | 3 year |
| 13 | Test Cable (30MHz-1GHz) | N/A | R-02 | N/A | 2017.04.21 | 2020.04.20 | 3 year |
| 14 | High Test Cable(1G-40G Hz) | N/A | R-03 | N/A | 2017.04.21 | 2020.04.20 | 3 year |
| 15 | High Test Cable(1G-40G Hz) | N/A | R-04 | N/A | 2017.04.21 | 2020.04.20 | 3 year |
| 16 | Filter | TRILTHIC | 2400MHz | 29 | 2017.04.19 | 2020.04.18 | 3 year |
| 17 | temporary antenna connector (Note) | NTS | R001 | N/A | N/A | N/A | N/A |

Note:

We will use the temporary antenna connector (soldered on the FPCB board) When conducted test
 And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until | Calibration period |
|------|-------------------------|--------------|-----------|------------|------------------|------------------|--------------------|
| 1 | Test Receiver | R&S | ESCI | 101160 | 2019.05.13 | 2020.05.12 | 1 year |
| 2 | LISN | R&S | ENV216 | 101313 | 2019.04.15 | 2020.04.14 | 1 year |
| 3 | LISN | SCHWARZBECK | NNLK 8129 | 8129245 | 2019.05.13 | 2020.05.12 | 1 year |
| 4 | 50Ω Coaxial Switch | ANRITSU CORP | MP59B | 6200983704 | 2018.05.19 | 2020.05.18 | 2 year |
| 5 | Test Cable (9KHz-30MHz) | N/A | C01 | N/A | 2017.04.21 | 2020.04.20 | 3 year |
| 6 | Test Cable (9KHz-30MHz) | N/A | C02 | N/A | 2017.04.21 | 2020.04.20 | 3 year |
| 7 | Test Cable (9KHz-30MHz) | N/A | C03 | N/A | 2017.04.21 | 2020.04.20 | 3 year |

Note: Each piece of equipment is scheduled for calibration once a year except the Aux Equipment & Test Cable which is scheduled for calibration every 2 or 3 years.

7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC Part 15.207(a) and KDB 174176 D01 Line Conducted FAQ v01r01

7.1.2 Conformance Limit


| Frequency(MHz) | Conducted Emission Limit | |
|----------------|--------------------------|---------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66-56* | 56-46* |
| 0.5-5.0 | 56 | 46 |
| 5.0-30.0 | 60 | 50 |

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

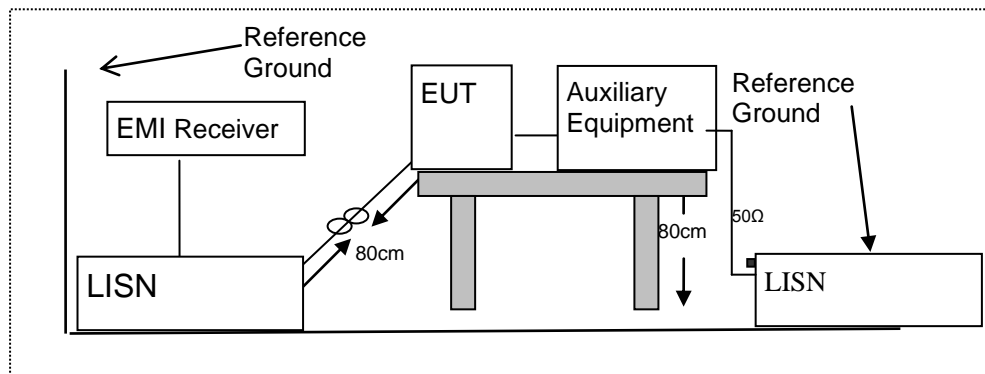

7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

7.1.6 Test Results

| | | | |
|----------------|---------------------------------------|--------------------|-------------|
| EUT: | LoRa Wireless module | Model Name : | RFM97C |
| Temperature: | 26 °C | Relative Humidity: | 54% |
| Pressure: | 1010hPa | Phase : | L |
| Test Voltage : | DC 4.5V from DC power AC 120V/60Hz | Test Mode: | Normal Link |

| Frequency (MHz) | Reading Level (dBμV) | Correct Factor (dB) | Measure-ment (dBμV) | Limits (dBμV) | Margin (dB) | Remark |
|--------------------|-------------------------|------------------------|------------------------|------------------|----------------|--------|
| 0.1539 | 29.91 | 9.82 | 39.73 | 65.78 | -26.05 | QP |
| 0.1539 | 14.90 | 9.82 | 24.72 | 55.78 | -31.06 | AVG |
| 0.5460 | 28.67 | 9.83 | 38.50 | 56.00 | -17.50 | QP |
| 0.5460 | 19.16 | 9.83 | 28.99 | 46.00 | -17.01 | AVG |
| 1.0060 | 26.76 | 9.93 | 36.69 | 56.00 | -19.31 | QP |
| 1.0060 | 16.17 | 9.93 | 26.10 | 46.00 | -19.90 | AVG |
| 1.7137 | 23.89 | 9.87 | 33.76 | 56.00 | -22.24 | QP |
| 1.7137 | 14.09 | 9.87 | 23.96 | 46.00 | -22.04 | AVG |
| 2.3699 | 23.01 | 9.91 | 32.92 | 56.00 | -23.08 | QP |
| 2.3699 | 12.56 | 9.91 | 22.47 | 46.00 | -23.53 | AVG |
| 3.0019 | 21.25 | 10.05 | 31.30 | 56.00 | -24.70 | QP |
| 3.0019 | 11.60 | 10.05 | 21.65 | 46.00 | -24.35 | AVG |

Remark:
 1. All readings are Quasi-Peak and Average values.
 2. Factor = Insertion Loss + Cable Loss.

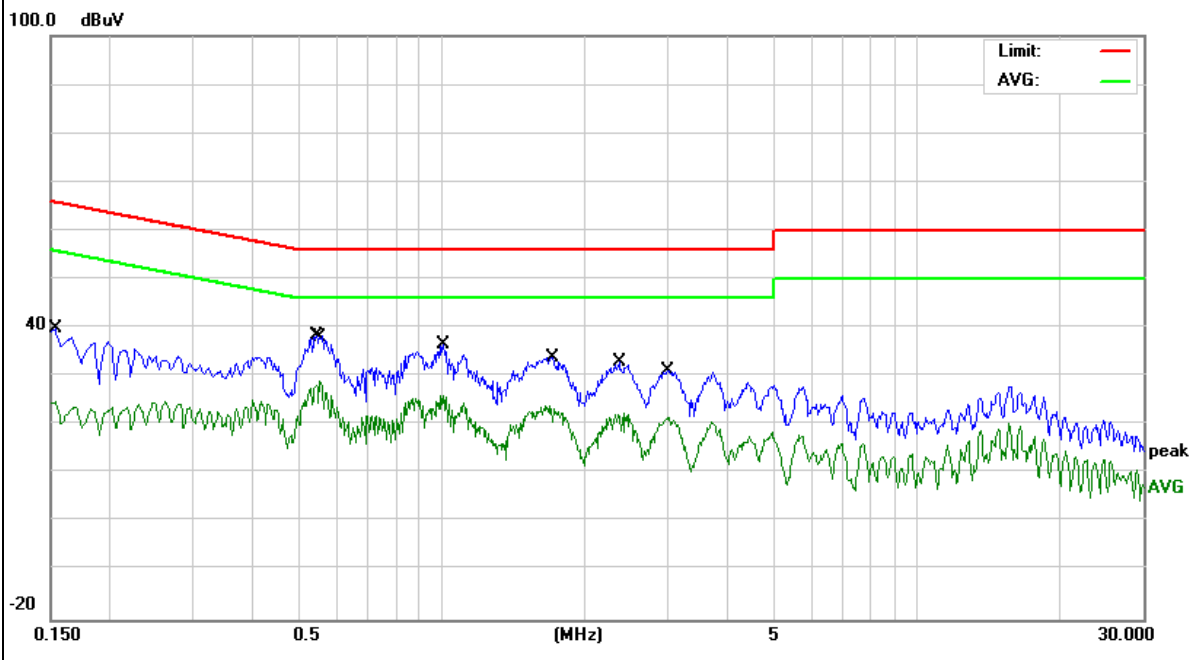


| | | | |
|----------------|---------------------------------------|--------------------|-------------|
| EUT: | LoRa Wireless module | Model Name : | RFM97C |
| Temperature: | 26 °C | Relative Humidity: | 54% |
| Pressure: | 1010hPa | Phase : | N |
| Test Voltage : | DC 4.5V from DC power AC 120V/60Hz | Test Mode: | Normal Link |

| Frequency (MHz) | Reading Level (dBμV) | Correct Factor (dB) | Measure-ment (dBμV) | Limits (dBμV) | Margin (dB) | Remark |
|--------------------|-------------------------|------------------------|------------------------|------------------|----------------|--------|
| 0.5611 | 27.50 | 9.93 | 37.43 | 56.00 | -18.57 | QP |
| 0.5611 | 16.02 | 9.93 | 25.95 | 46.00 | -20.05 | AVG |
| 1.0045 | 25.26 | 9.93 | 35.19 | 56.00 | -20.81 | QP |
| 1.0045 | 14.67 | 9.93 | 24.60 | 46.00 | -21.40 | AVG |
| 1.7071 | 21.89 | 9.94 | 31.83 | 56.00 | -24.17 | QP |
| 1.7071 | 12.09 | 9.94 | 22.03 | 46.00 | -23.97 | AVG |
| 2.3584 | 20.51 | 9.94 | 30.45 | 56.00 | -25.55 | QP |
| 2.3584 | 10.04 | 9.94 | 19.98 | 46.00 | -26.02 | AVG |
| 2.9933 | 18.75 | 9.95 | 28.70 | 56.00 | -27.30 | QP |
| 2.9933 | 9.10 | 9.95 | 19.05 | 46.00 | -26.95 | AVG |
| 3.7197 | 18.80 | 9.95 | 28.75 | 56.00 | -27.25 | QP |
| 3.7197 | 8.51 | 9.95 | 18.46 | 46.00 | -27.54 | AVG |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

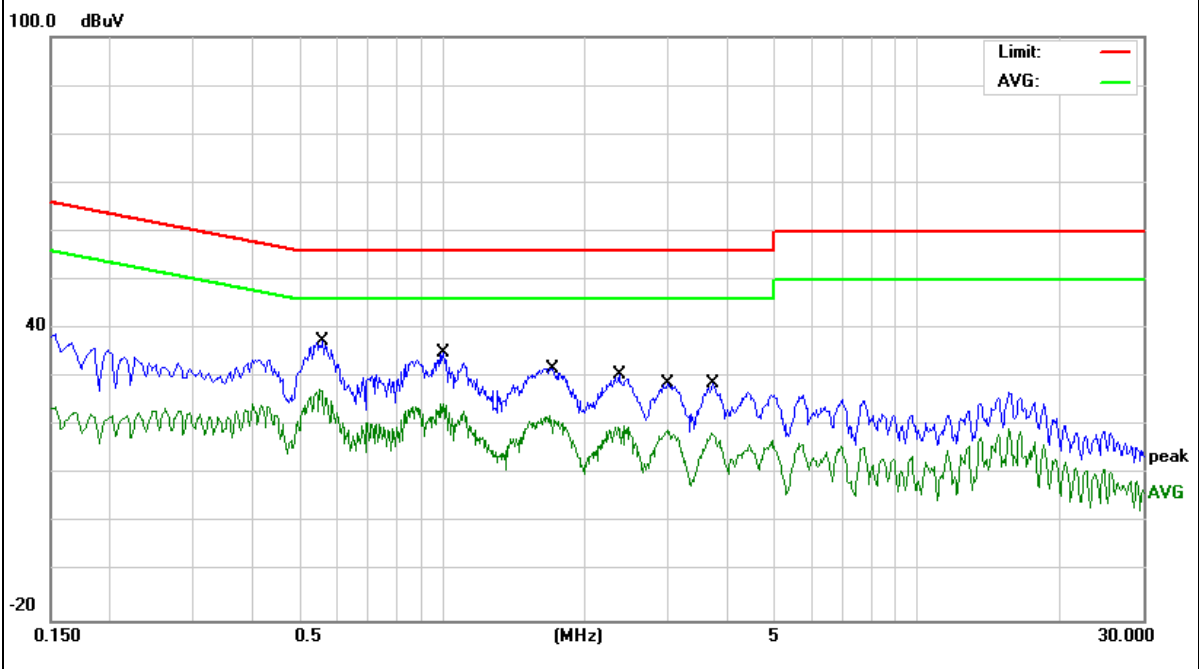


| | | | |
|----------------|---------------------------------------|--------------------|-------------|
| EUT: | LoRa Wireless module | Model Name : | RFM97C |
| Temperature: | 26 °C | Relative Humidity: | 54% |
| Pressure: | 1010hPa | Phase : | L |
| Test Voltage : | DC 4.5V from DC power AC 240V/60Hz | Test Mode: | Normal Link |

| Frequency (MHz) | Reading Level (dBμV) | Correct Factor (dB) | Measure-ment (dBμV) | Limits (dBμV) | Margin (dB) | Remark |
|--------------------|-------------------------|------------------------|------------------------|------------------|----------------|--------|
| 0.5611 | 29.00 | 9.93 | 38.93 | 56.00 | -17.07 | QP |
| 0.5611 | 19.16 | 9.93 | 29.09 | 46.00 | -16.91 | AVG |
| 0.8659 | 25.34 | 9.93 | 35.27 | 56.00 | -20.73 | QP |
| 0.8659 | 16.09 | 9.93 | 26.02 | 46.00 | -19.98 | AVG |
| 0.9889 | 26.41 | 9.93 | 36.34 | 56.00 | -19.66 | QP |
| 0.9889 | 16.17 | 9.93 | 26.10 | 46.00 | -19.90 | AVG |
| 1.7071 | 22.89 | 9.94 | 32.83 | 56.00 | -23.17 | QP |
| 1.7071 | 13.09 | 9.94 | 23.03 | 46.00 | -22.97 | AVG |
| 2.3584 | 21.51 | 9.94 | 31.45 | 56.00 | -24.55 | QP |
| 2.3584 | 11.04 | 9.94 | 20.98 | 46.00 | -25.02 | AVG |
| 3.7197 | 19.80 | 9.95 | 29.75 | 56.00 | -26.25 | QP |
| 3.7197 | 9.51 | 9.95 | 19.46 | 46.00 | -26.54 | AVG |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

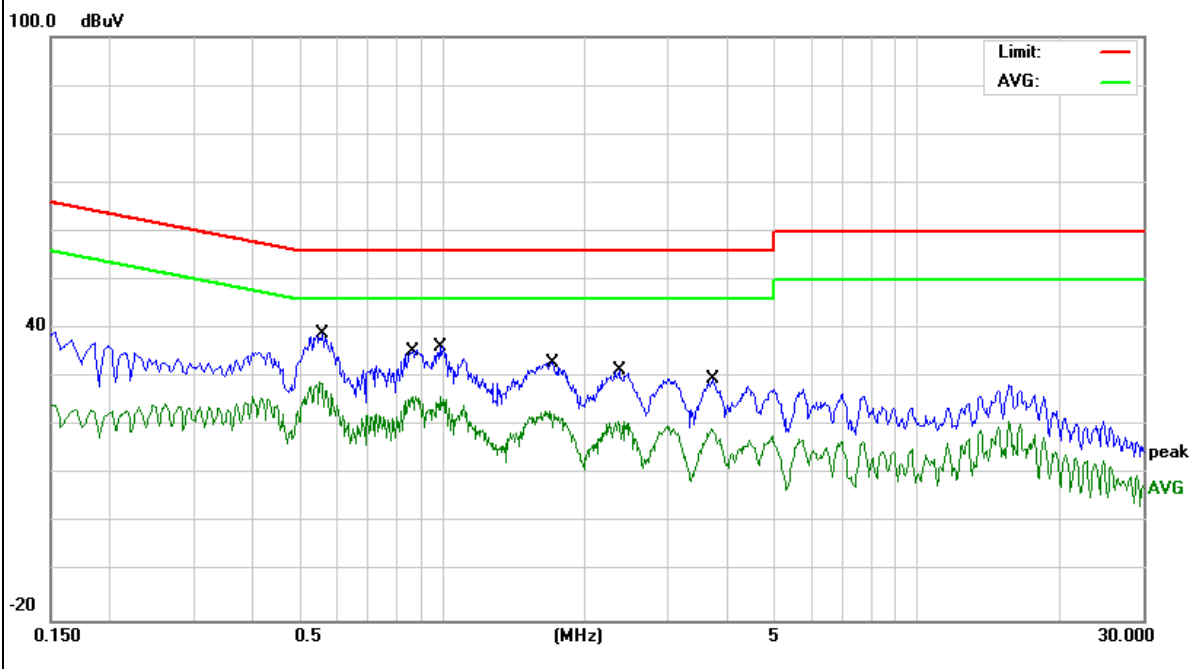


| | | | |
|----------------|---------------------------------------|--------------------|-------------|
| EUT: | LoRa Wireless module | Model Name : | RFM97C |
| Temperature: | 26 °C | Relative Humidity: | 54% |
| Pressure: | 1010hPa | Phase : | N |
| Test Voltage : | DC 4.5V from DC power AC 240V/60Hz | Test Mode: | Normal Link |

| Frequency (MHz) | Reading Level (dBμV) | Correct Factor (dB) | Measure-ment (dBμV) | Limits (dBμV) | Margin (dB) | Remark |
|--------------------|-------------------------|------------------------|------------------------|------------------|----------------|--------|
| 0.5580 | 28.69 | 9.93 | 38.62 | 56.00 | -17.38 | QP |
| 0.5580 | 22.21 | 9.93 | 32.14 | 46.00 | -13.86 | AVG |
| 0.9940 | 25.11 | 9.93 | 35.04 | 56.00 | -20.96 | QP |
| 0.9940 | 19.53 | 9.93 | 29.46 | 46.00 | -16.54 | AVG |
| 1.6700 | 22.49 | 9.94 | 32.43 | 56.00 | -23.57 | QP |
| 1.6700 | 16.39 | 9.94 | 26.33 | 46.00 | -19.67 | AVG |
| 2.3820 | 22.32 | 9.94 | 32.26 | 56.00 | -23.74 | QP |
| 2.3820 | 16.58 | 9.94 | 26.52 | 46.00 | -19.48 | AVG |
| 3.1099 | 21.20 | 9.95 | 31.15 | 56.00 | -24.85 | QP |
| 3.1099 | 14.78 | 9.95 | 24.73 | 46.00 | -21.27 | AVG |
| 4.3605 | 20.09 | 9.96 | 30.05 | 56.00 | -25.95 | QP |
| 4.3605 | 14.18 | 9.96 | 24.14 | 46.00 | -21.86 | AVG |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

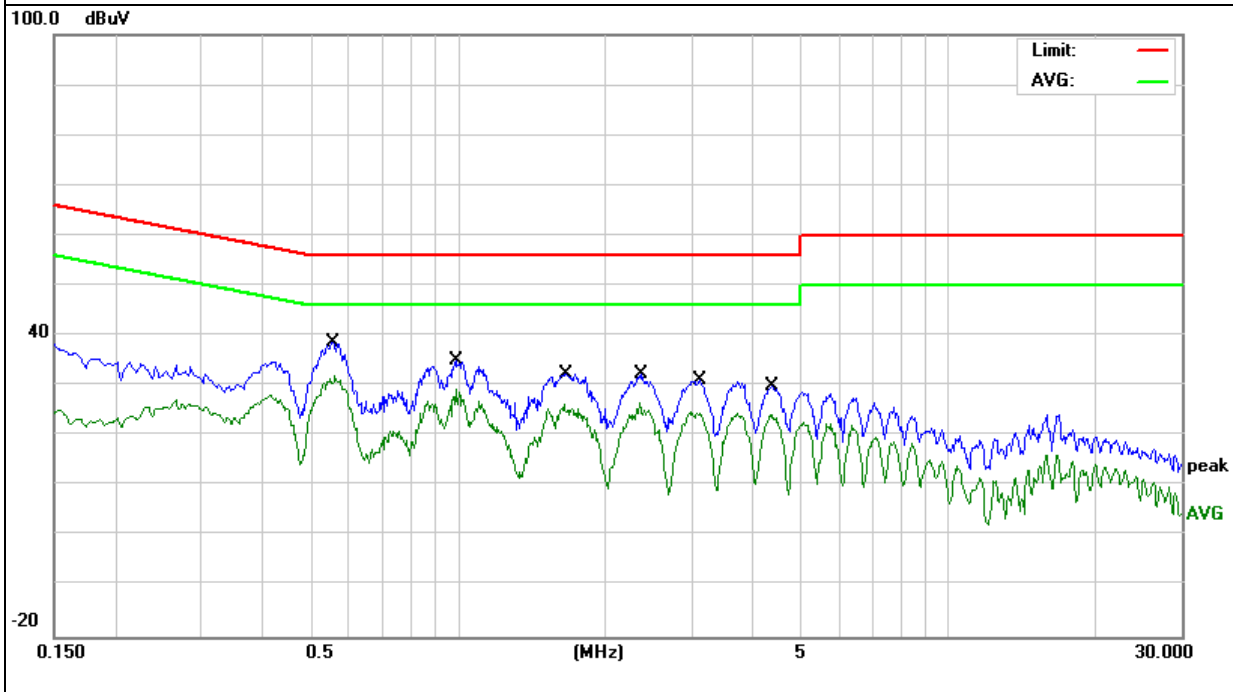

7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (2) |
| 13.36-13.41 | | | |

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Restricted Frequency(MHz) | Field Strength (μV/m) | Field Strength (dBμV/m) | Measurement Distance |
|---------------------------|-----------------------|-------------------------|----------------------|
| 0.009~0.490 | 2400/F(KHz) | 20 log (uV/m) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 20 log (uV/m) | 30 |
| 1.705~30.0 | 30 | 29.5 | 30 |
| 30-88 | 100 | 40 | 3 |
| 88-216 | 150 | 43.5 | 3 |
| 216-960 | 200 | 46 | 3 |
| Above 960 | 500 | 54 | 3 |

Limits of Radiated Emission Measurement(Above 1000MHz)

| Frequency(MHz) | Class B (dBuV/m) (at 3M) | |
|----------------|--------------------------|---------|
| | PEAK | AVERAGE |
| Above 1000 | 74 | 54 |


Remark: 1. Emission level in dBuV/m=20 log (uV/m)
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. For Frequency 9kHz~30MHz: Distance extrapolation factor =40log(Specific distance/ test distance)(dB); Limit line=Specific limits(dBuV) + distance extrapolation factor.
For Frequency above 30MHz: Distance extrapolation factor =20log(Specific distance/ test distance)(dB);
Limit line=Specific limits(dBuV) + distance extrapolation factor.

7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

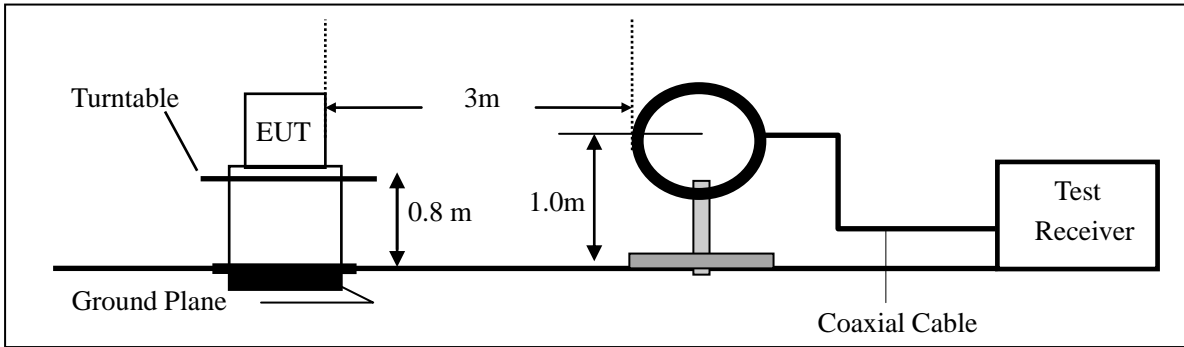

(b) For radiated emissions from 30MHz to 1000MHz

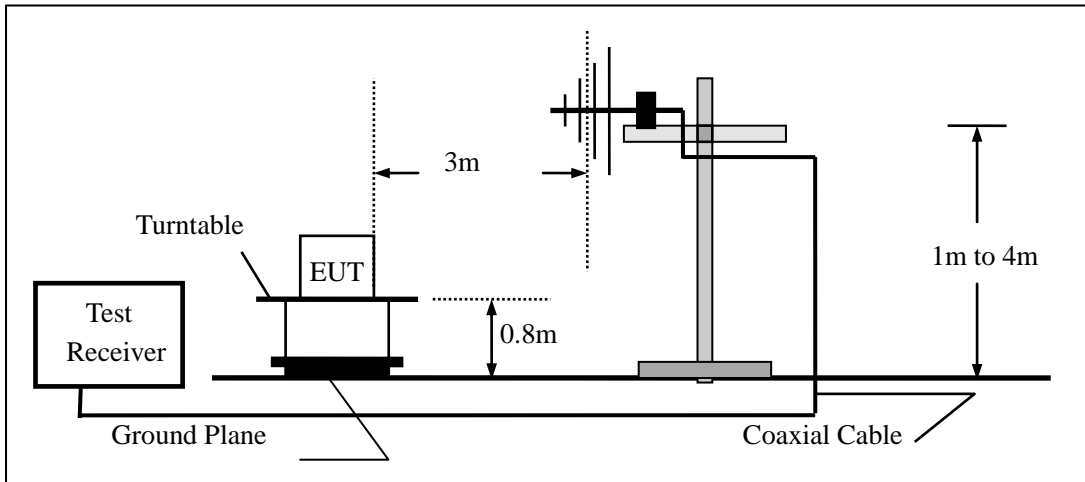

(c) For radiated emissions above 1000MHz

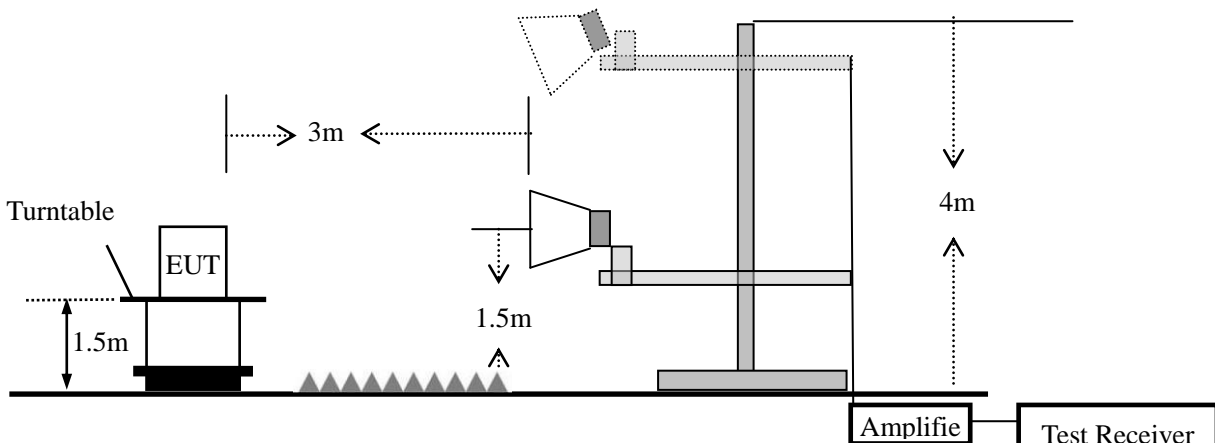

7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

| Spectrum Parameter | Setting |
|---------------------------------------|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter | Setting |
|------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- e. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- f. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

| Frequency Band (MHz) | Function | Resolution bandwidth | Video Bandwidth |
|----------------------|----------|----------------------|-----------------|
| 30 to 1000 | QP | 120 kHz | 300 kHz |
| Above 1000 | Peak | 1 MHz | 1 MHz |
| | Average | 1 MHz | 10 Hz |

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 * \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.2.6 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

| | | | |
|--------------|----------------------|--------------------|---------|
| EUT: | LoRa Wireless module | Model No.: | RFM97C |
| Temperature: | 20 °C | Relative Humidity: | 48% |
| Test Mode: | Mode2/3/4 | Test By: | Mary Hu |

| Freq. (MHz) | Ant.Pol. H/V | Emission Level(dBuV/m) | | Limit 3m(dBuV/m) | | Over(dB) | |
|-------------|--------------|------------------------|----|------------------|----|----------|----|
| | | PK | AV | PK | AV | PK | AV |
| -- | -- | -- | -- | -- | -- | -- | -- |

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

- Spurious Emission below 1GHz (30MHz to 1GHz) & Spurious Emission in Restricted Band
All the modulation modes have been tested, and the worst result was report as below:

| | | | |
|----------------|----------------------|--------------------|--------|
| EUT: | LoRa Wireless module | Model Name : | RFM97C |
| Temperature: | 20 °C | Relative Humidity: | 48% |
| Pressure: | 1010hPa | Test Mode: | Mode 1 |
| Test Voltage : | DC 3.3V | | |


ANT1

| Polar (H/V) | Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Remark |
|-------------|-----------|---------------|--------|----------------|----------|--------|--------|
| | (MHz) | (dBuV) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| V | 552.8831 | 6.70 | 24.51 | 31.21 | 46.00 | -14.79 | QP |
| V | 620.7096 | 7.83 | 24.84 | 32.67 | 46.00 | -13.33 | QP |
| V | 670.4891 | 7.76 | 25.05 | 32.81 | 46.00 | -13.19 | QP |
| V | 755.3872 | 7.72 | 27.54 | 35.26 | 46.00 | -10.74 | QP |
| V | 845.0878 | 8.73 | 28.60 | 37.33 | 46.00 | -8.67 | QP |
| V | 960.0000 | 7.15 | 31.15 | 38.30 | 46.00 | -7.70 | QP |

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit


72.0 dBuV/m

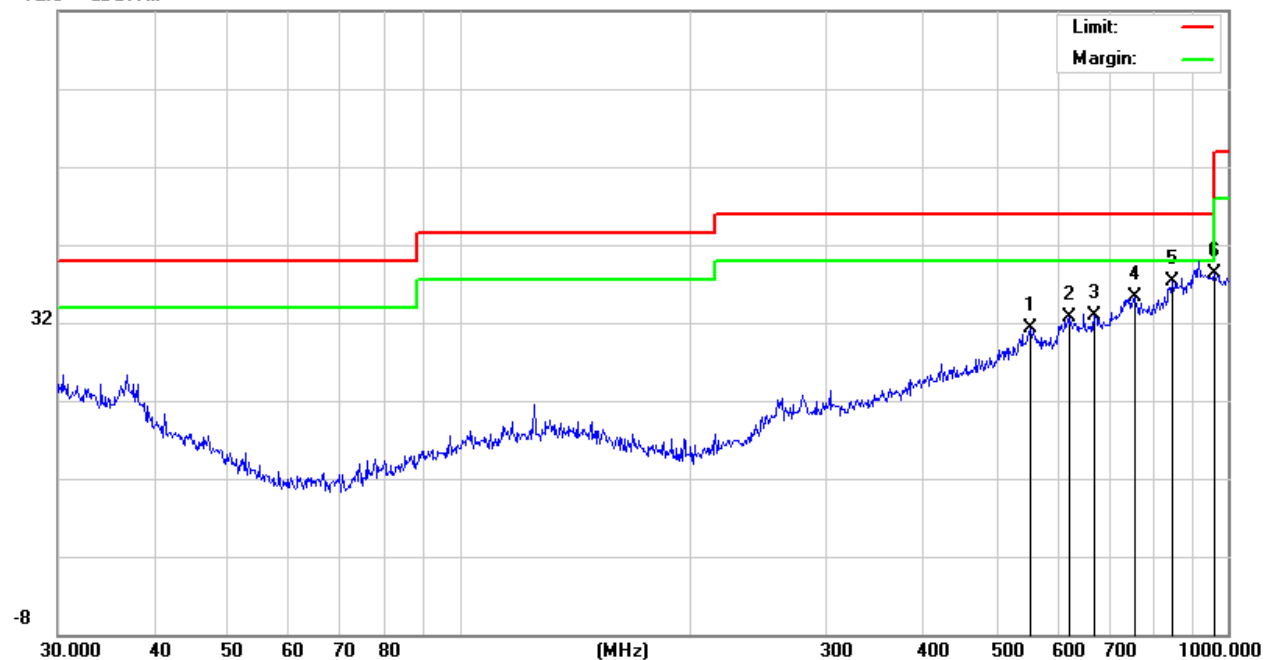

| Polar (H/V) | Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Remark |
|-------------|-----------|---------------|--------|----------------|----------|--------|--------|
| | (MHz) | (dBuV) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| H | 622.8899 | 9.54 | 24.80 | 34.34 | 46.00 | -11.66 | QP |
| H | 742.2586 | 7.20 | 27.58 | 34.78 | 46.00 | -11.22 | QP |
| H | 798.9796 | 9.99 | 27.24 | 37.23 | 46.00 | -8.77 | QP |
| H | 872.1832 | 9.94 | 28.56 | 38.50 | 46.00 | -7.50 | QP |
| H | 916.0687 | 10.35 | 29.82 | 40.17 | 46.00 | -5.83 | QP |
| H | 960.0000 | 6.43 | 31.15 | 37.58 | 46.00 | -8.42 | QP |

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

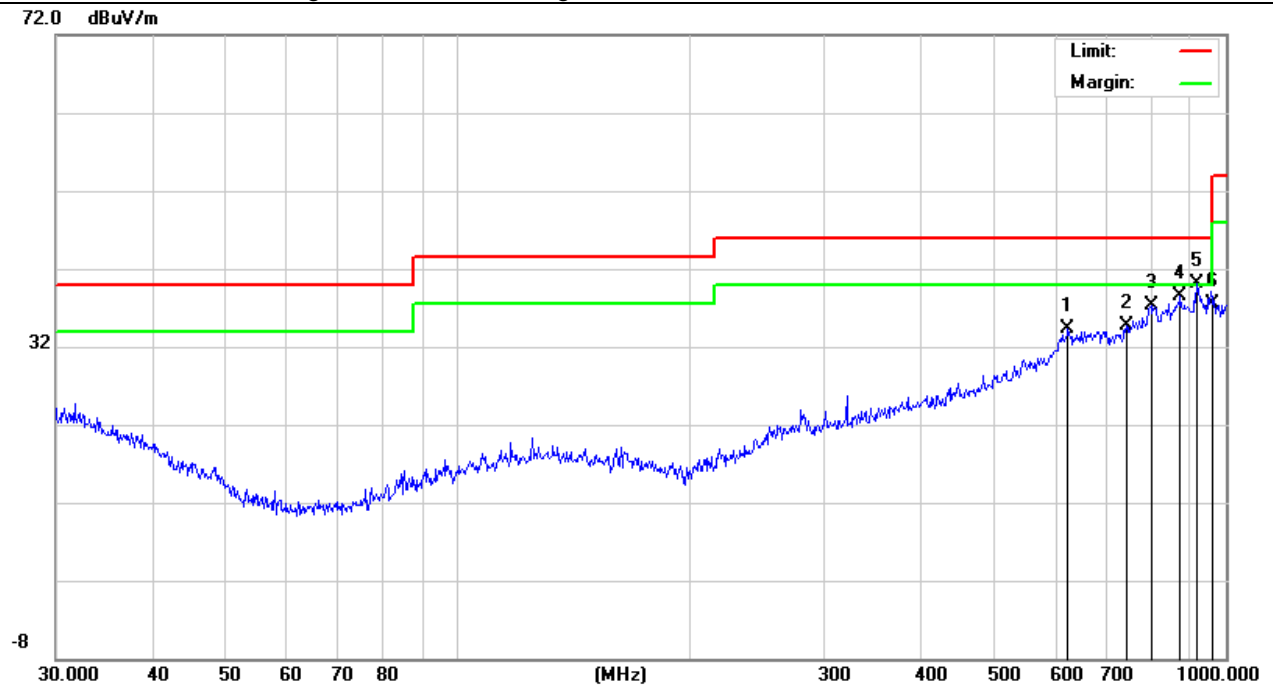


ANT2

| Polar (H/V) | Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Remark |
|-------------|-----------|---------------|--------|----------------|----------|--------|--------|
| | (MHz) | (dBuV) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| V | 552.8831 | 6.20 | 24.51 | 30.71 | 46.00 | -15.29 | QP |
| V | 649.6597 | 7.94 | 24.68 | 32.62 | 46.00 | -13.38 | QP |
| V | 771.4486 | 7.07 | 27.44 | 34.51 | 46.00 | -11.49 | QP |
| V | 872.1832 | 7.17 | 28.56 | 35.73 | 46.00 | -10.27 | QP |
| V | 916.0687 | 8.65 | 29.82 | 38.47 | 46.00 | -7.53 | QP |
| V | 960.0000 | 6.65 | 31.15 | 37.80 | 46.00 | -8.20 | QP |

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

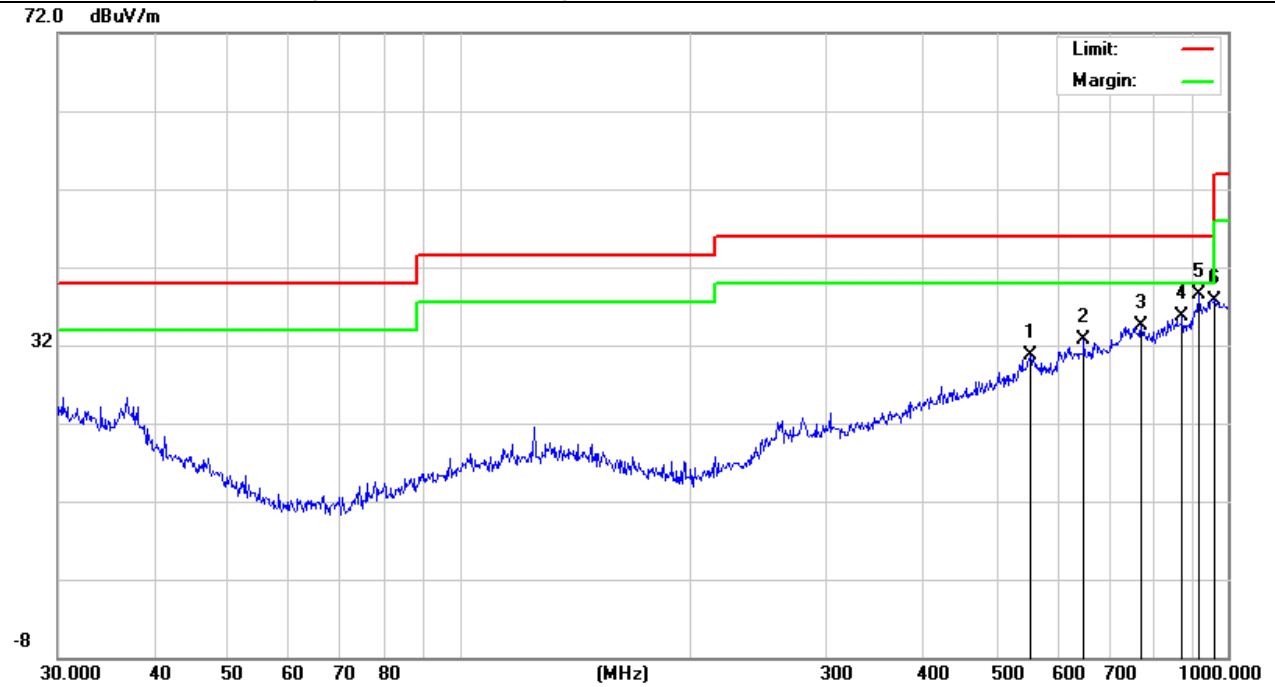

| Polar (H/V) | Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Remark |
|-------------|-----------|---------------|--------|----------------|----------|--------|--------|
| | (MHz) | (dBuV) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| H | 622.8899 | 7.54 | 24.80 | 32.34 | 46.00 | -13.66 | QP |
| H | 706.6997 | 7.52 | 25.67 | 33.19 | 46.00 | -12.81 | QP |
| H | 742.2586 | 6.20 | 27.58 | 33.78 | 46.00 | -12.22 | QP |
| H | 866.0878 | 6.47 | 28.65 | 35.12 | 46.00 | -10.88 | QP |
| H | 916.0687 | 8.35 | 29.82 | 38.17 | 46.00 | -7.83 | QP |
| H | 960.0000 | 5.93 | 31.15 | 37.08 | 46.00 | -8.92 | QP |

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

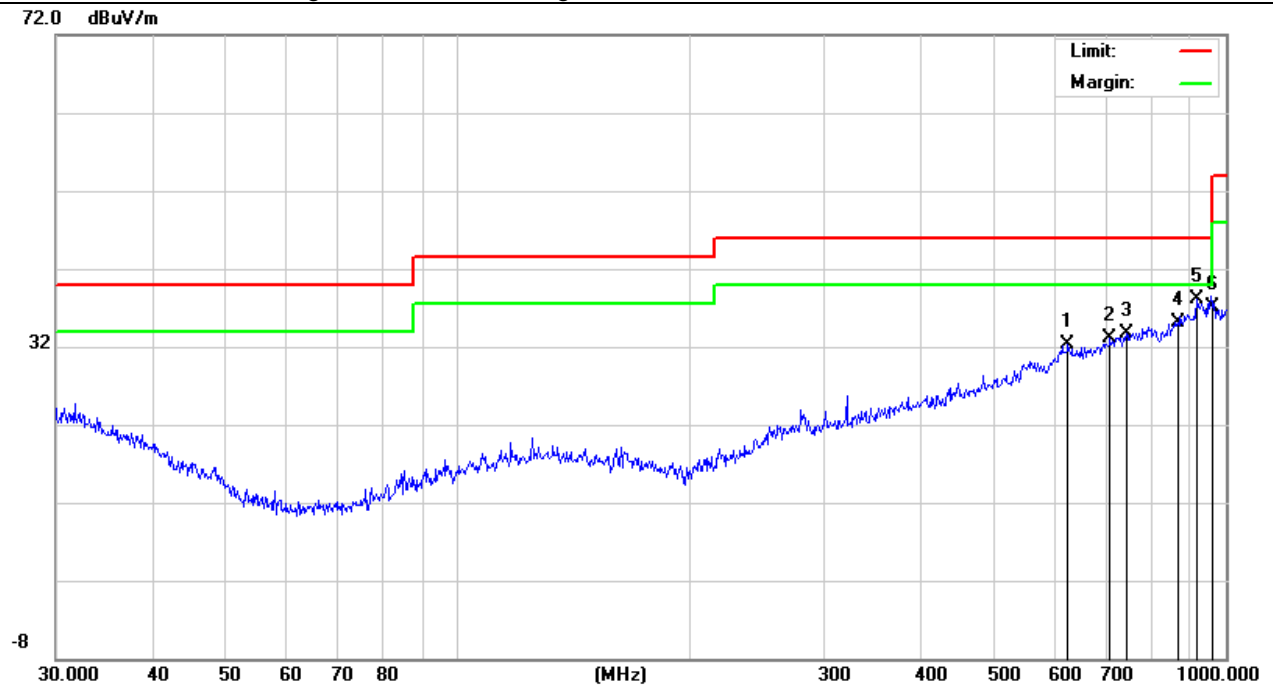

■ Spurious Emission Above 1GHz (1GHz to 10GHz)

| | | | |
|--------------|----------------------|--------------------|---------|
| EUT: | LoRa Wireless module | Model No.: | RFM97C |
| Temperature: | 20 °C | Relative Humidity: | 48% |
| Test Mode: | Mode2/Mode3/Mode4 | Test By: | Mary Hu |

All the modulation modes have been tested, and the worst result was report as below:

ANT 1

| Frequency (MHz) | Read Level (dBμV) | Cable loss (dB) | Antenna Factor dB/m | Preamp Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark | Comment |
|-----------------------------------|----------------------|--------------------|------------------------|-----------------------|----------------------------|--------------------|----------------|--------|------------|
| Low Channel (902.3MHz)--Above 1G | | | | | | | | | |
| 1806.00 | 82.90 | 5.21 | 26.50 | 55.35 | 59.26 | 74.00 | -14.74 | Pk | Vertical |
| 1806.00 | 62.35 | 5.21 | 26.50 | 55.35 | 38.71 | 54.00 | -15.29 | AV | Vertical |
| 2709.00 | 84.70 | 6.48 | 28.49 | 55.11 | 64.56 | 74.00 | -9.44 | Pk | Vertical |
| 2709.00 | 64.48 | 6.48 | 28.49 | 55.11 | 44.34 | 54.00 | -9.66 | AV | Vertical |
| 1806.00 | 80.95 | 5.21 | 26.50 | 55.35 | 57.31 | 74.00 | -16.69 | Pk | Horizontal |
| 1806.00 | 65.60 | 5.21 | 26.50 | 55.35 | 41.96 | 54.00 | -12.04 | AV | Horizontal |
| 2709.00 | 84.61 | 6.48 | 28.49 | 55.11 | 64.47 | 74.00 | -9.53 | Pk | Horizontal |
| 2709.00 | 65.70 | 6.48 | 28.49 | 55.11 | 45.56 | 54.00 | -8.44 | AV | Horizontal |
| Mid Channel (923.3MHz)--Above 1G | | | | | | | | | |
| 1846.60 | 77.55 | 5.21 | 26.50 | 55.35 | 53.91 | 74.00 | -20.09 | Pk | Vertical |
| 1846.60 | 62.35 | 5.21 | 26.50 | 55.35 | 38.71 | 54.00 | -15.29 | AV | Vertical |
| 2769.90 | 77.59 | 7.10 | 28.49 | 55.11 | 58.07 | 74.00 | -15.93 | Pk | Vertical |
| 2769.90 | 64.48 | 7.10 | 28.49 | 55.11 | 44.96 | 54.00 | -9.04 | AV | Vertical |
| 1846.60 | 75.58 | 5.21 | 26.50 | 55.35 | 51.94 | 74.00 | -22.06 | Pk | Horizontal |
| 1846.60 | 65.60 | 5.21 | 26.50 | 55.35 | 41.96 | 54.00 | -12.04 | AV | Horizontal |
| 2769.90 | 77.13 | 7.10 | 28.49 | 55.11 | 57.61 | 74.00 | -16.39 | Pk | Horizontal |
| 2769.90 | 60.11 | 7.10 | 28.49 | 55.11 | 40.59 | 54.00 | -13.41 | AV | Horizontal |
| High Channel (927.5MHz)--Above 1G | | | | | | | | | |
| 1855.00 | 79.90 | 5.21 | 26.50 | 55.35 | 56.26 | 74.00 | -17.74 | Pk | Vertical |
| 1855.00 | 62.35 | 5.21 | 26.50 | 55.35 | 38.71 | 54.00 | -15.29 | AV | Vertical |
| 2782.50 | 72.08 | 7.10 | 28.49 | 55.11 | 52.56 | 74.00 | -21.44 | Pk | Vertical |
| 2782.50 | 53.20 | 7.10 | 28.49 | 55.11 | 33.68 | 54.00 | -20.32 | AV | Vertical |
| 1855.00 | 82.61 | 5.21 | 26.50 | 55.35 | 58.97 | 74.00 | -15.03 | Pk | Horizontal |
| 1855.00 | 65.28 | 5.21 | 26.50 | 55.35 | 41.64 | 54.00 | -12.36 | AV | Horizontal |
| 2782.50 | 80.17 | 7.10 | 28.49 | 55.11 | 60.65 | 74.00 | -13.35 | Pk | Horizontal |
| 2782.50 | 60.20 | 7.10 | 28.49 | 55.11 | 40.68 | 54.00 | -13.32 | AV | Horizontal |

ANT2

| Frequency (MHz) | Read Level (dBμV) | Cable loss (dB) | Antenna Factor dB/m | Preamp Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Remark | Comment |
|-----------------------------------|----------------------|--------------------|------------------------|-----------------------|----------------------------|--------------------|----------------|--------|------------|
| Low Channel (902.3MHz)--Above 1G | | | | | | | | | |
| 1806.00 | 81.94 | 5.21 | 26.50 | 55.35 | 58.30 | 74.00 | -15.70 | Pk | Vertical |
| 1806.00 | 61.39 | 5.21 | 26.50 | 55.35 | 37.75 | 54.00 | -16.25 | AV | Vertical |
| 2709.00 | 83.74 | 6.48 | 28.49 | 55.11 | 63.60 | 74.00 | -10.40 | Pk | Vertical |
| 2709.00 | 63.52 | 6.48 | 28.49 | 55.11 | 43.38 | 54.00 | -10.62 | AV | Vertical |
| 1806.00 | 79.99 | 5.21 | 26.50 | 55.35 | 56.35 | 74.00 | -17.65 | Pk | Horizontal |
| 1806.00 | 64.64 | 5.21 | 26.50 | 55.35 | 41.00 | 54.00 | -13.00 | AV | Horizontal |
| 2709.00 | 83.65 | 6.48 | 28.49 | 55.11 | 63.51 | 74.00 | -10.49 | Pk | Horizontal |
| 2709.00 | 64.65 | 6.48 | 28.49 | 55.11 | 44.51 | 54.00 | -9.49 | AV | Horizontal |
| Mid Channel (923.3MHz)--Above 1G | | | | | | | | | |
| 1846.60 | 76.59 | 5.21 | 26.50 | 55.35 | 52.95 | 74.00 | -21.05 | Pk | Vertical |
| 1846.60 | 61.39 | 5.21 | 26.50 | 55.35 | 37.75 | 54.00 | -16.25 | AV | Vertical |
| 2769.90 | 76.63 | 7.10 | 28.49 | 55.11 | 57.11 | 74.00 | -16.89 | Pk | Vertical |
| 2769.90 | 63.52 | 7.10 | 28.49 | 55.11 | 44.00 | 54.00 | -10.00 | AV | Vertical |
| 1846.60 | 74.62 | 5.21 | 26.50 | 55.35 | 50.98 | 74.00 | -23.02 | Pk | Vertical |
| 1846.60 | 64.64 | 5.21 | 26.50 | 55.35 | 41.00 | 54.00 | -13.00 | AV | Horizontal |
| 2769.90 | 76.17 | 7.10 | 28.49 | 55.11 | 56.65 | 74.00 | -17.35 | Pk | Horizontal |
| 2769.90 | 59.15 | 7.10 | 28.49 | 55.11 | 39.63 | 54.00 | -14.37 | AV | Horizontal |
| High Channel (927.5MHz)--Above 1G | | | | | | | | | |
| 1855.00 | 78.94 | 5.21 | 26.50 | 55.35 | 55.30 | 74.00 | -18.70 | Pk | Vertical |
| 1855.00 | 61.39 | 5.21 | 26.50 | 55.35 | 37.75 | 54.00 | -16.25 | AV | Vertical |
| 2782.50 | 71.12 | 7.10 | 28.49 | 55.11 | 51.60 | 74.00 | -22.40 | Pk | Vertical |
| 2782.50 | 52.24 | 7.10 | 28.49 | 55.11 | 32.72 | 54.00 | -21.28 | AV | Vertical |
| 1855.00 | 81.65 | 5.21 | 26.50 | 55.35 | 58.01 | 74.00 | -15.99 | Pk | Vertical |
| 1855.00 | 64.32 | 5.21 | 26.50 | 55.35 | 40.68 | 54.00 | -13.32 | AV | Horizontal |
| 2782.50 | 79.21 | 7.10 | 28.49 | 55.11 | 59.69 | 74.00 | -14.31 | Pk | Horizontal |
| 2782.50 | 59.24 | 7.10 | 28.49 | 55.11 | 39.72 | 54.00 | -14.28 | AV | Horizontal |

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
 (2) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
 (3) All other emissions more than 20dB below the limit.

■ Spurious Emission in Restricted
ANT1

| Frequency (MHz) | Reading Level (dB μ V) | Cable Loss (dB) | Antenna (dB/m) | Preamp Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type | Comment |
|--------------------|-------------------------------|--------------------|-------------------|-----------------------|----------------------------------|--------------------------|----------------|------------------|------------|
| 1240 | 59.32 | 4.26 | 25.41 | 54.17 | 34.82 | 74 | -39.18 | Pk | Vertical |
| 1240 | 41.26 | 4.26 | 25.41 | 54.17 | 16.76 | 54 | -37.24 | AV | Vertical |
| 1240 | 58.63 | 4.26 | 25.41 | 54.17 | 34.13 | 74 | -39.87 | Pk | Horizontal |
| 1240 | 43.65 | 4.26 | 25.41 | 54.17 | 19.15 | 54 | -34.85 | AV | Horizontal |

ANT2

| Frequency (MHz) | Reading Level (dB μ V) | Cable Loss (dB) | Antenna (dB/m) | Preamp Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type | Comment |
|--------------------|-------------------------------|--------------------|-------------------|-----------------------|----------------------------------|--------------------------|----------------|------------------|------------|
| 1240 | 57.17 | 4.26 | 25.41 | 54.17 | 32.67 | 74 | -41.33 | Pk | Vertical |
| 1240 | 42.12 | 4.26 | 25.41 | 54.17 | 17.62 | 54 | -36.38 | AV | Vertical |
| 1240 | 56.83 | 4.26 | 25.41 | 54.17 | 32.33 | 74 | -41.67 | Pk | Horizontal |
| 1240 | 44.34 | 4.26 | 25.41 | 54.17 | 19.84 | 54 | -34.16 | AV | Horizontal |

Note: (1) All other emissions more than 20dB below the limit.

7.3 6DB BANDWIDTH

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.2.

7.3.2 Conformance Limit

The minimum permissible 6dB bandwidth is 500 kHz.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows Subclause 11.8 of ANSI C63.10

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.


g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.6 Test Results


| | | | |
|--------------|----------------------|--------------------|---------|
| EUT: | LoRa Wireless module | Model No.: | RFM97C |
| Temperature: | 20 °C | Relative Humidity: | 48% |
| Test Mode: | Mode2/Mode3/Mode4 | Test By: | Mary Hu |

| Channel | Frequency (MHz) | 6dB bandwidth (kHz) | Limit (kHz) | Result |
|---------|-----------------|---------------------|-------------|--------|
| Low | 903.0 | 766.3 | ≥ 500 | Pass |
| Middle | 923.3 | 765.0 | ≥ 500 | Pass |
| High | 927.5 | 761.4 | ≥ 500 | Pass |


6dB Bandwidth plot on 903.0MHz

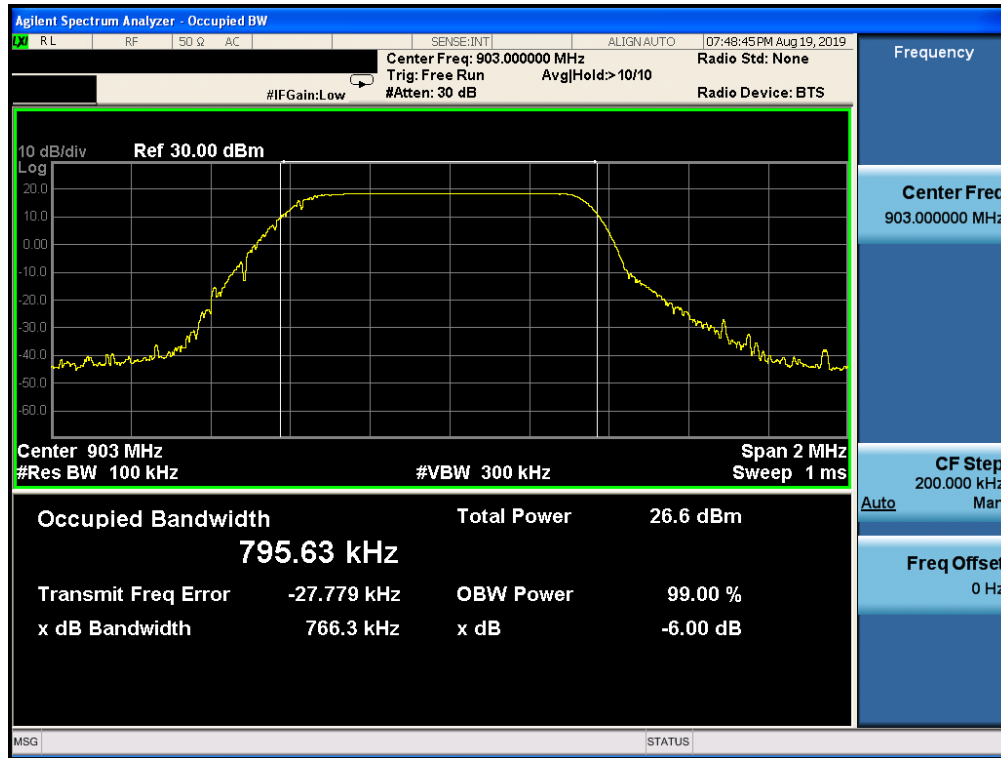

6dB Bandwidth plot on 923.3MHz

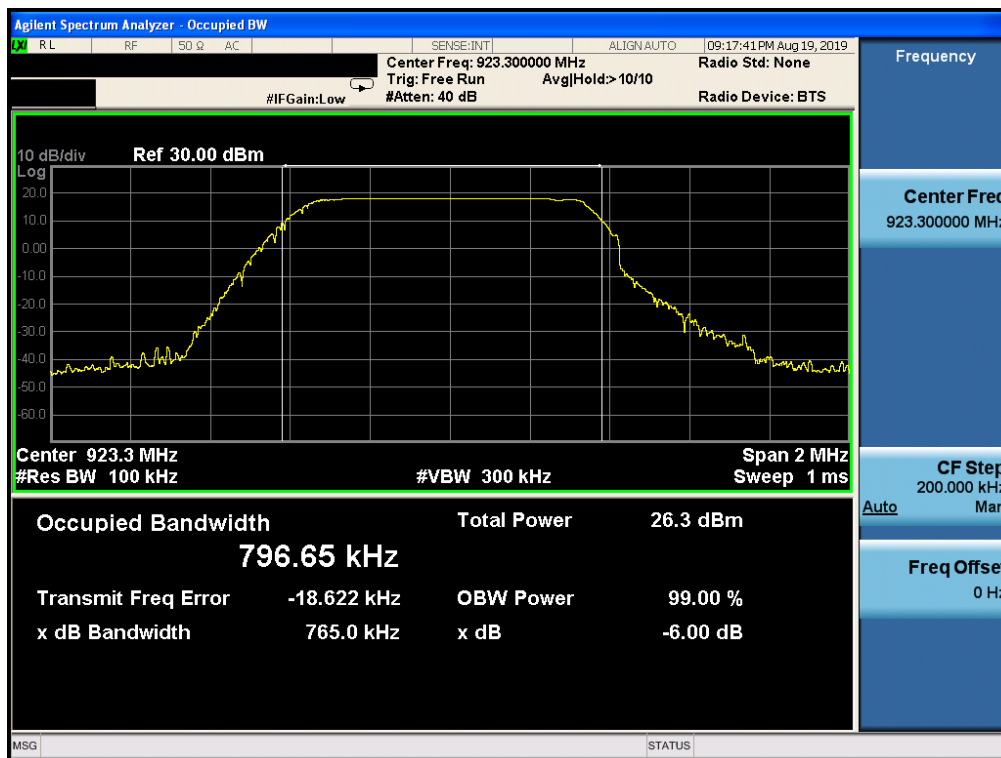

6dB Bandwidth plot on 927.5MHz

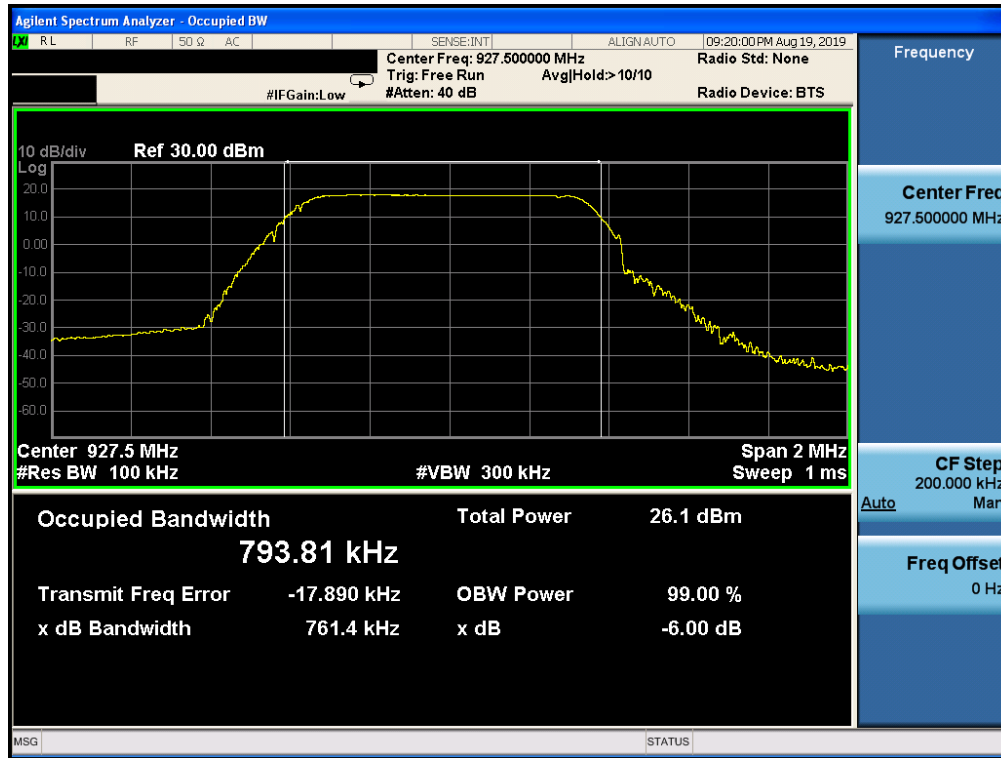

7.4 PEAK OUTPUT POWER

7.4.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.3.1.

7.4.2 Conformance Limit

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

7.4.3 Measuring Instruments

The following table is the setting of the power meter.

| Power Meter Parameter | Setting |
|-----------------------|---------|
| Detector | Average |

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure


The testing follows Subclause 11.9.1.1 of ANSI C63.10
 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
 Set to the maximum power setting and enable the EUT transmit continuously.
 The EUT was operating in controlled its channel.
 Use the following spectrum analyzer settings:
 Set the RBW \cong DTS bandwidth.
 Set VBW =3*RBW.
 Set the span \cong 3*RBW
 Set Sweep time = auto couple.
 Set Detector = peak.
 Set Trace mode = max hold.
 Allow trace to fully stabilize.
 Use peak marker function to determine the peak amplitude level.

7.4.6 Test Results


| | | | |
|--------------|----------------------|--------------------|---------|
| EUT: | LoRa Wireless module | Model No.: | RFM97C |
| Temperature: | 20 °C | Relative Humidity: | 48% |
| Test Mode: | Mode2/Mode3/Mode4 | Test By: | Mary Hu |

| Test Channel | Frequency (MHz) | Power Setting | Average Output Power (dBm) | LIMIT (dBm) | Verdict |
|--------------|-----------------|---------------|----------------------------|-------------|---------|
| 64 | 903.0 | Default | 13.868 | 30 | PASS |
| 72 | 923.3 | Default | 13.297 | 30 | PASS |
| 79 | 927.5 | Default | 13.211 | 30 | PASS |


Output Power plot on 903.0MHz

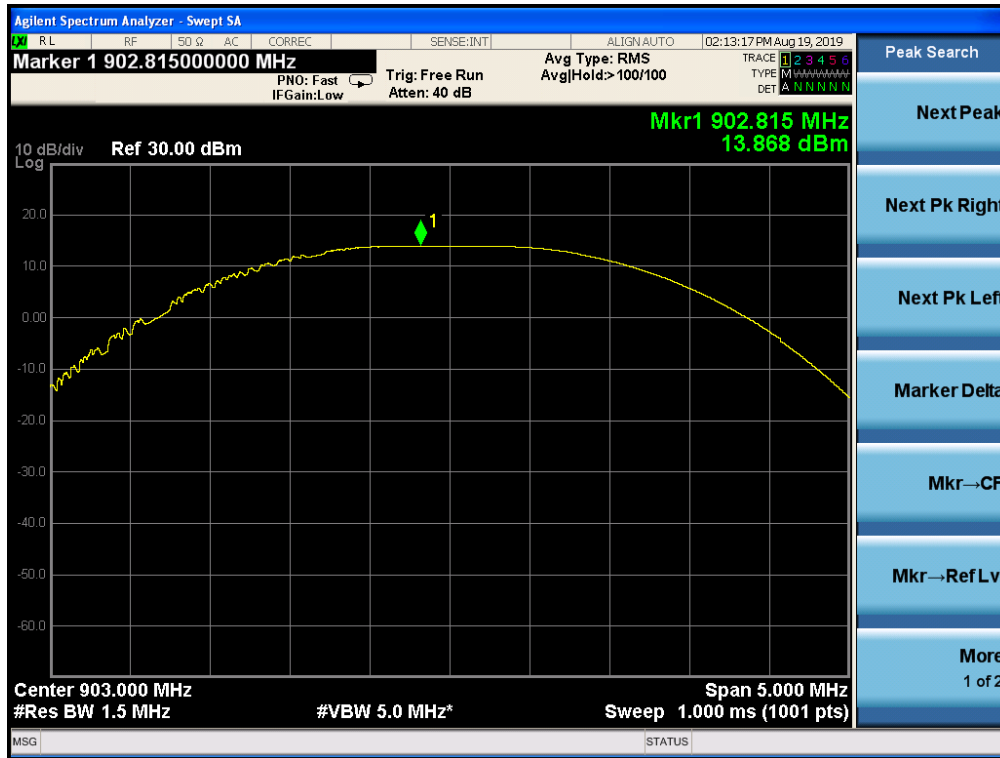

Output Power plot on 923.3MHz

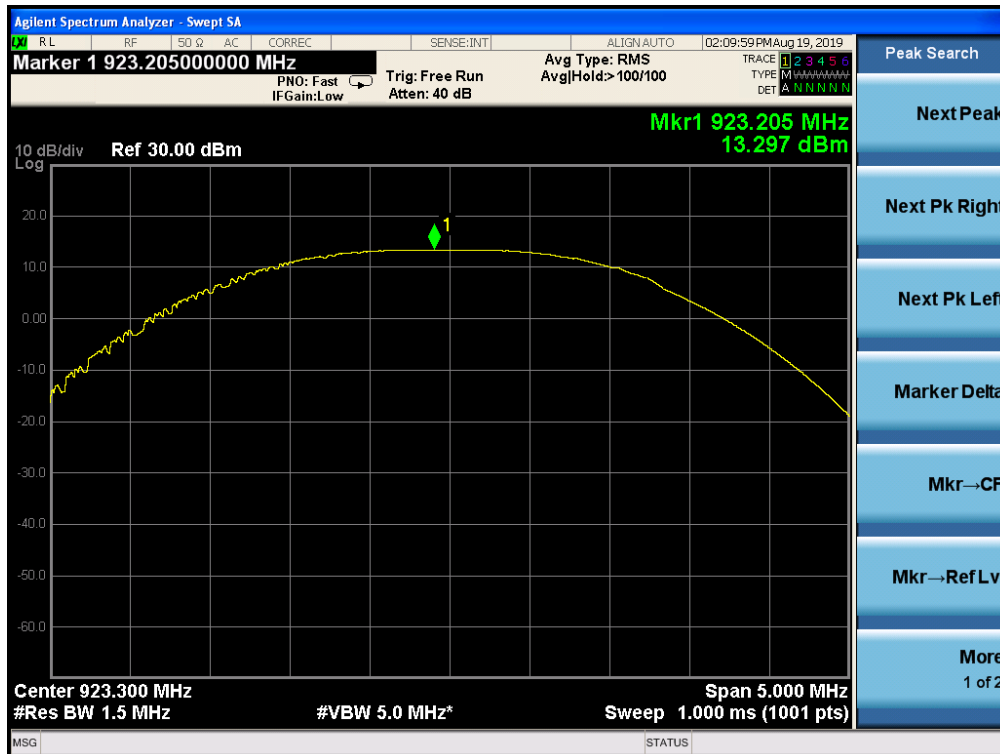

Output Power plot on 927.5MHz

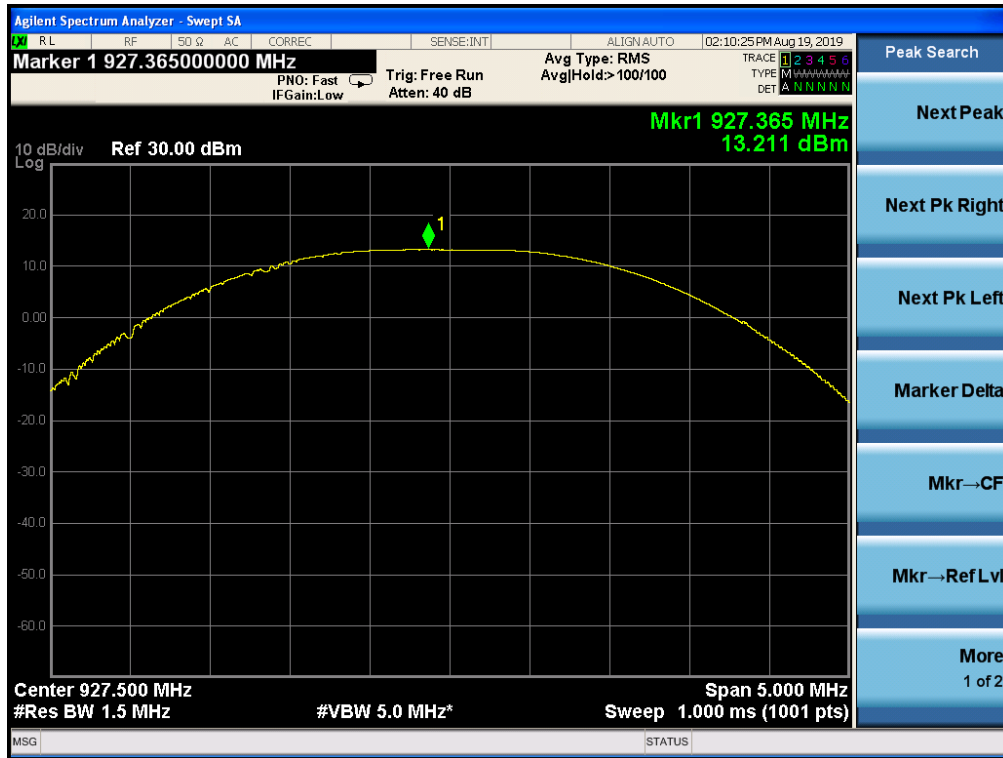

7.5 POWER SPECTRAL DENSITY

7.5.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.4.

7.5.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.10 of ANSI C63.10

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

7.5.6 Test Results


| | | | |
|--------------|----------------------|--------------------|---------|
| EUT: | LoRa Wireless module | Model No.: | RFM97C |
| Temperature: | 20 °C | Relative Humidity: | 48% |
| Test Mode: | Mode2/Mode3/Mode4 | Test By: | Mary Hu |

| Test Channel | Frequency (MHz) | Power Density (dBm/3KHz) | Limit (dBm/3KHz) | Verdict |
|--------------|-----------------|--------------------------|------------------|---------|
| 1Mbps | | | | |
| 64 | 903.0 | -0.19 | 8 | PASS |
| 72 | 923.3 | -1.46 | 8 | PASS |
| 79 | 927.5 | -1.65 | 8 | PASS |


Power spectral density plot on 903.0MHz

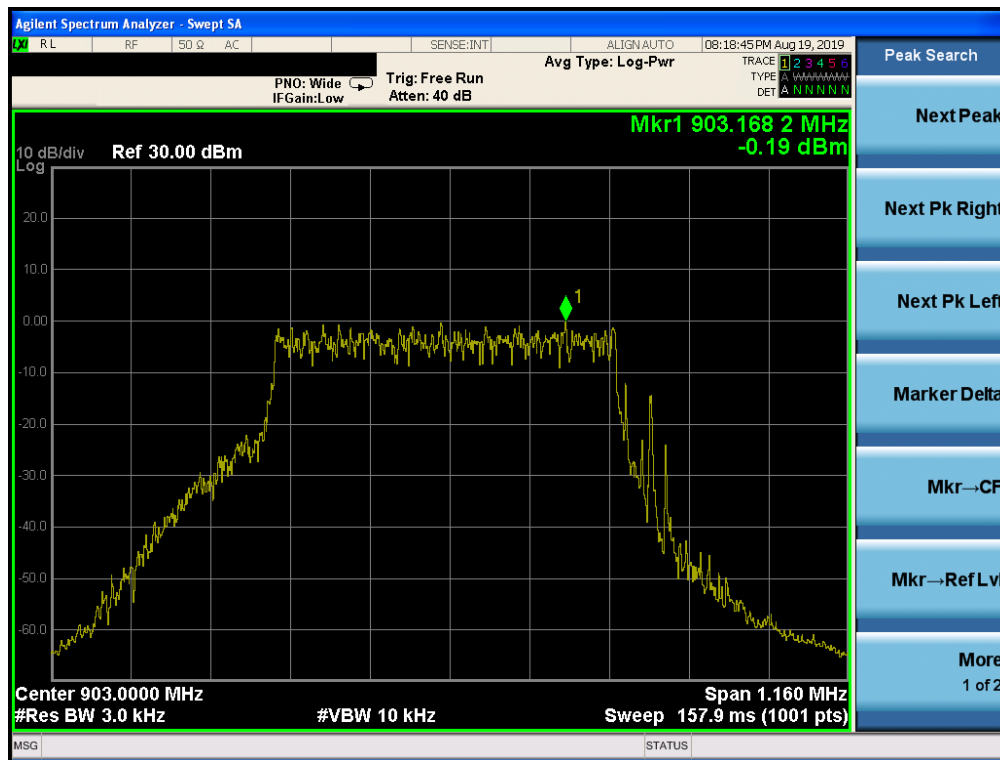

Power spectral density plot on 923.3MHz

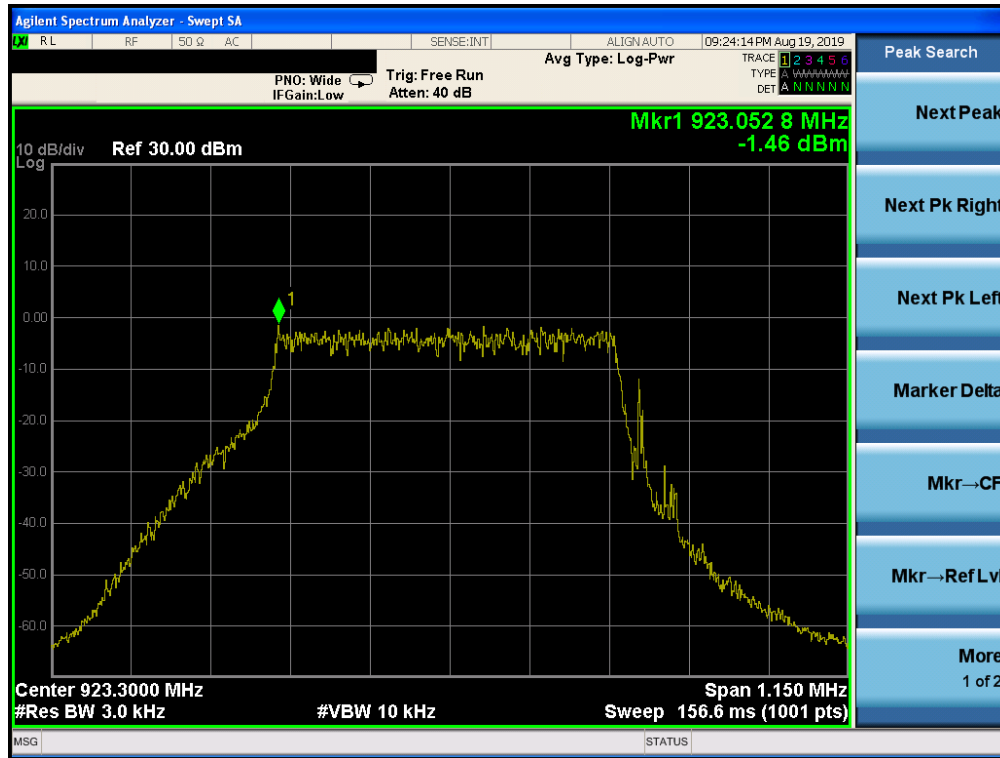

Power spectral density plot on 927.5MHz

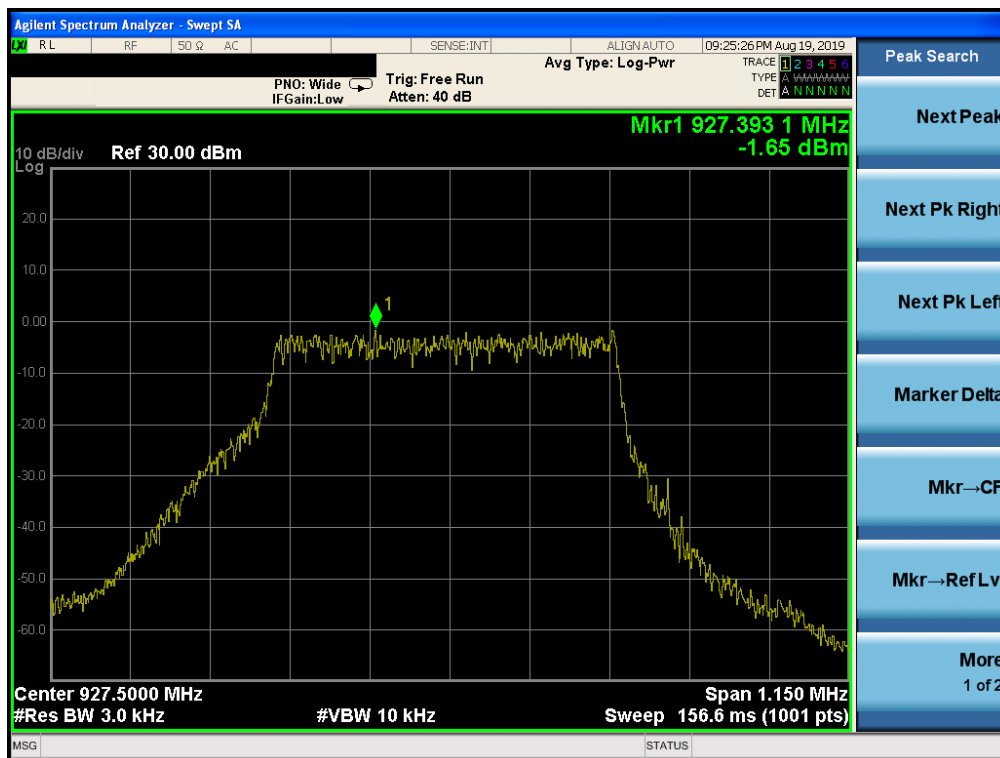

7.6 CONDUCTED BAND EDGE MEASUREMENT

7.6.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.7.

7.6.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.


7.6.5 Test Procedure

The testing follows FCC KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.7.
 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
 Set to the maximum power setting and enable the EUT transmit continuously.
 The EUT was operating in controlled its channel.
 Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
 Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
 Repeat above procedures until all measured frequencies were complete.


7.6.6 Test Results

| | | | |
|--------------|----------------------|--------------------|---------|
| EUT: | LoRa Wireless module | Model No.: | RFM97C |
| Temperature: | 20 °C | Relative Humidity: | 48% |
| Test Mode: | Mode2/Mode4 | Test By: | Mary Hu |

LoRa mode: Band Edge-Low Channel

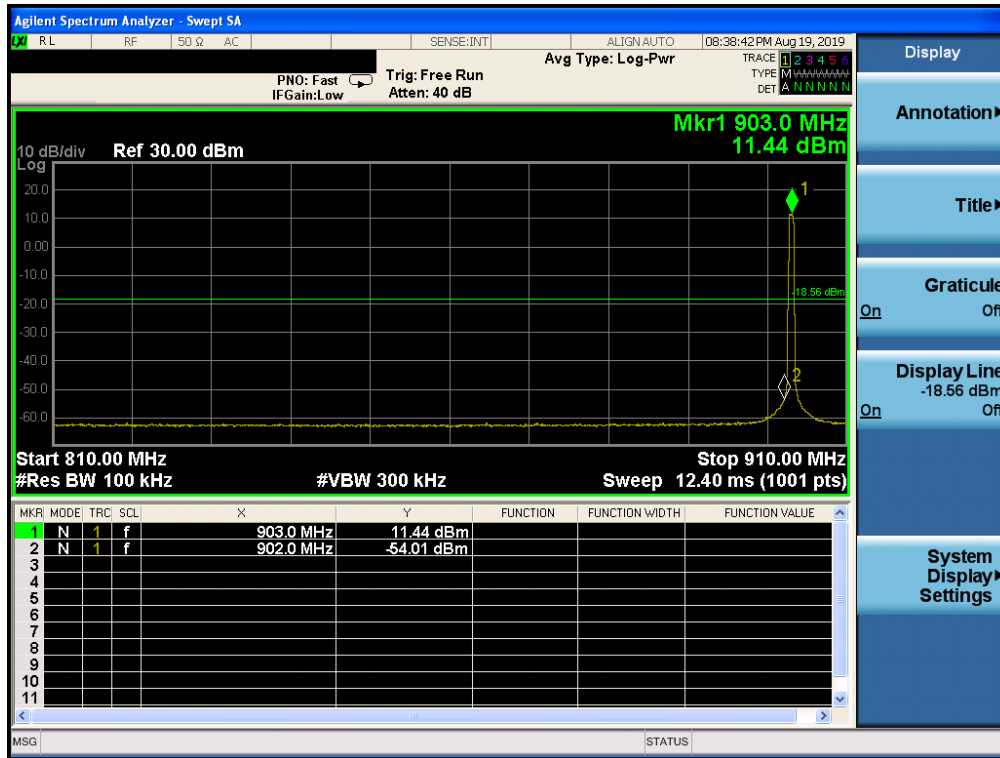

LoRa mode: Band Edge-High Channel

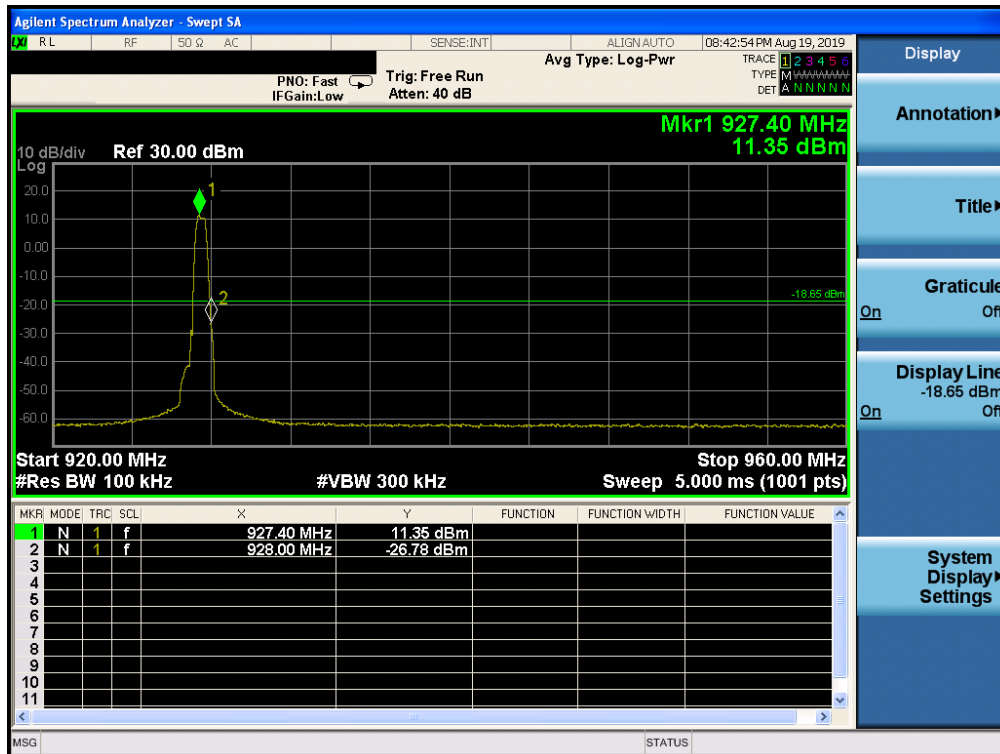

7.7 SPURIOUS RF CONDUCTED EMISSIONS

7.7.1 Conformance Limit

1. Below -30dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.7.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.3 Test Setup

Please refer to Section 6.1 of this test report.

7.7.4 Test Procedure


The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 9kHz to 26.5GHz.

7.7.5 Test Results


Remark: The measurement frequency range is from 9kHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

Test Plot


903.0MHz

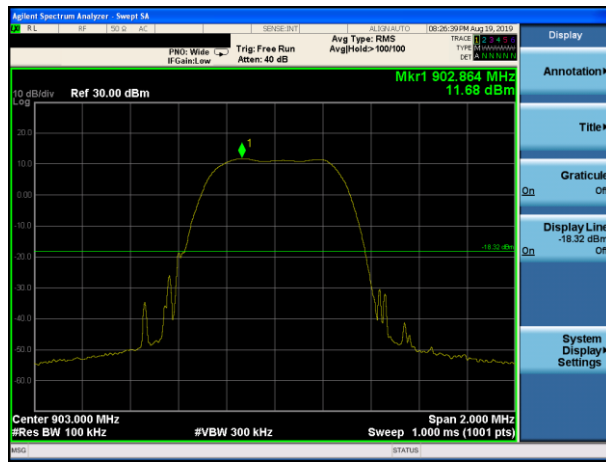


903.0MHz

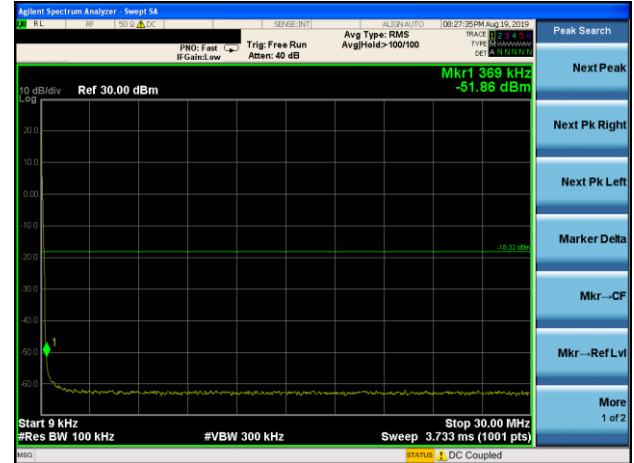

903.0MHz

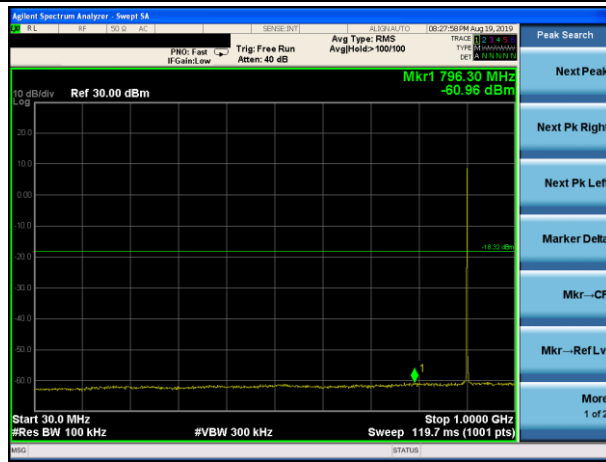


903.0MHz

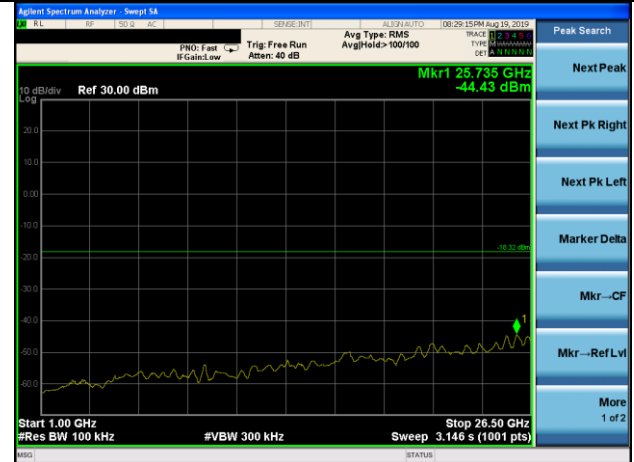


Test Plot


923.3MHz

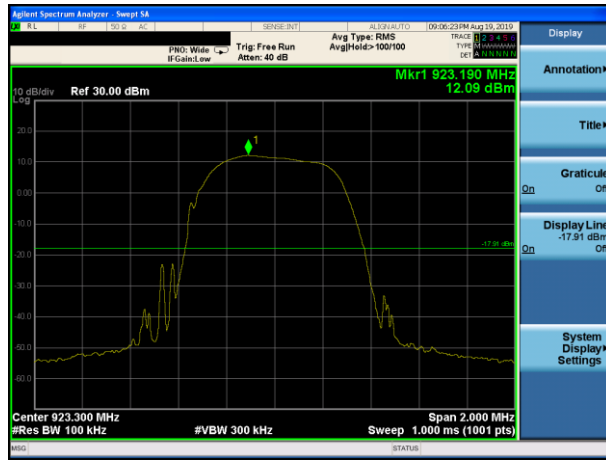


923.3MHz

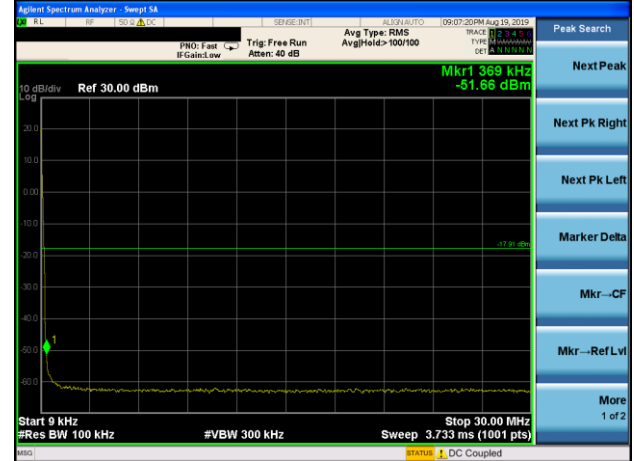

923.3MHz

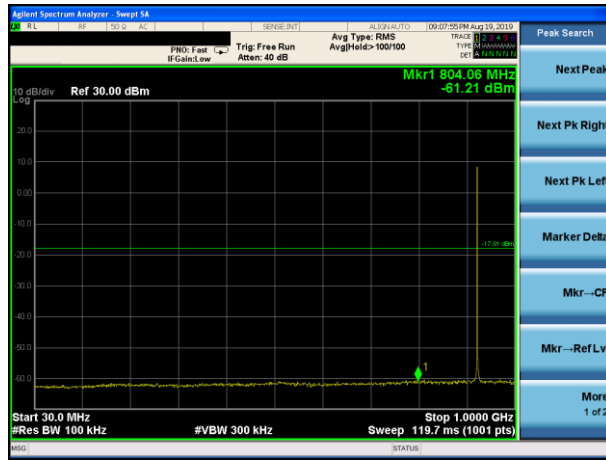

923.3MHz

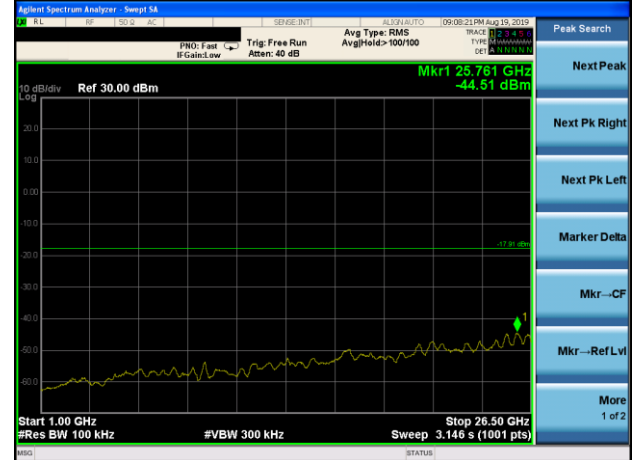


Test Plot


927.5MHz




927.5MHz

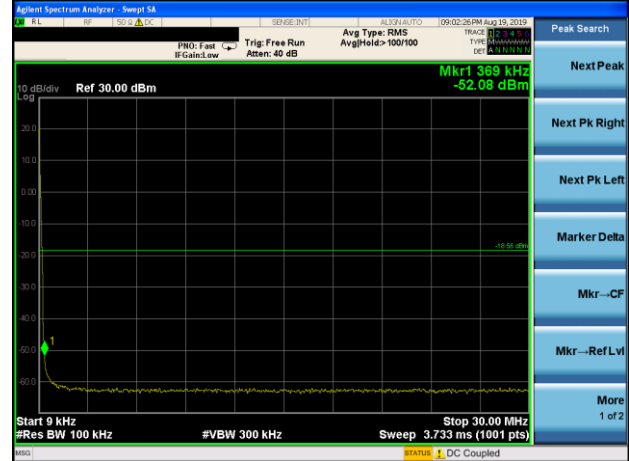

927.5MHz

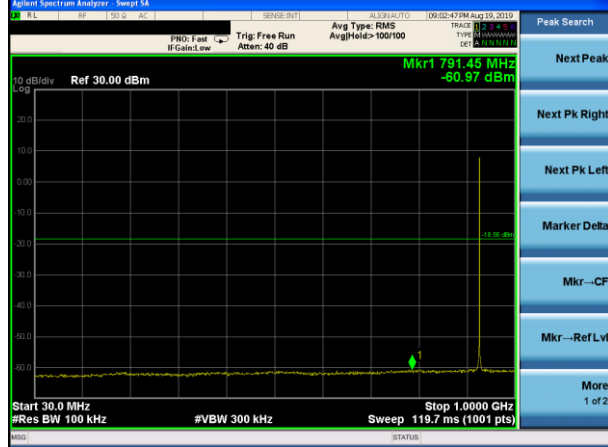

927.5MHz

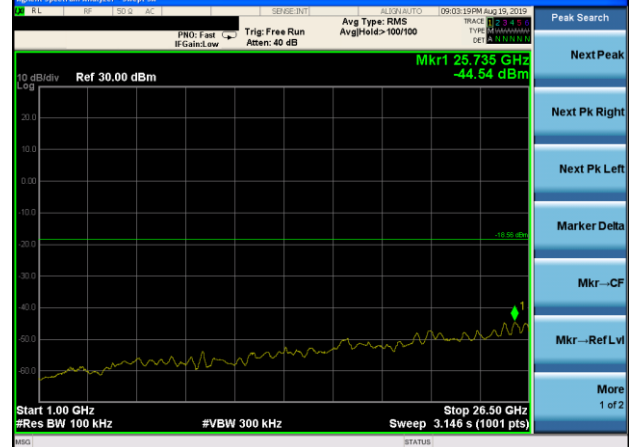

7.8 ANTENNA APPLICATION

7.8.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.8.2 Result

The EUT antenna is permanent attached Reverse SMA interface Rubber Bar antenna (Gain: 2.15dBi)/Spring Antenna(Gain:2.15). It comply with the standard requirement.

END OF REPORT