

FCC Test Report

Report No.: AGC12163230401FE05

FCC ID : 2ASF2KT-CR31B

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Strip Lights with HDMI Sync Box

BRAND NAME : Lumary, Linklite

MODEL NAME : KT-CR31B, L-HSB0A1

APPLICANT: Shenzhen Linklite Smart Lighting Co., Ltd

DATE OF ISSUE : May 10, 2023

STANDARD(S)

TEST PROCEDURE(S)

FCC Part 15.247

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Report No.: AGC12163230401FE05

Page 2 of 79


REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 10, 2023	Valid	Initial Release




TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. IEEE 802.11N MODULATION SCHEME	7
2.4. RELATED SUBMITTAL(S) / GRANT (S)	7
2.5. TEST METHODOLOGY	
2.6. SPECIAL ACCESSORIES	
2.7. EQUIPMENT MODIFICATIONS	
2.8. ANTENNA REQUIREMENT	8
3. MEASUREMENT UNCERTAINTY	9
4. DESCRIPTION OF TEST MODES	10
5. SYSTEM TEST CONFIGURATION	11
5.1. CONFIGURATION OF EUT SYSTEM	11
5.2. EQUIPMENT USED IN EUT SYSTEM	11
5.3. SUMMARY OF TEST RESULTS	11
6. TEST FACILITY	12
7. OUTPUT POWER	13
7.1. MEASUREMENT PROCEDURE	13
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	13
7.3. LIMITS AND MEASUREMENT RESULT	14
8. BANDWIDTH	15
8.1. MEASUREMENT PROCEDURE	15
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	15
8.3. LIMITS AND MEASUREMENT RESULTS	16
9. CONDUCTED SPURIOUS EMISSION	29
9.1. MEASUREMENT PROCEDURE	29
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT EQUIPMENT USEDJN	29
9.4 LIMITS AND MEASUREMENT RESULT	29





10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	44
10.1 MEASUREMENT PROCEDURE	44
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
10.3 MEASUREMENT EQUIPMENT USED	
10.4 LIMITS AND MEASUREMENT RESULT	44
11. RADIATED EMISSION	51
11.1. MEASUREMENT PROCEDURE	
11.2. TEST SETUP	52
11.3. LIMITS AND MEASUREMENT RESULT	53
11.4. TEST RESULT	53
12. LINE CONDUCTED EMISSION TEST	75
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	75
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	75
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	76
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	76
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	77
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	79
APPENDIX B: PHOTOGRAPHS OF EUT	79






1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen Linklite Smart Lighting Co., Ltd		
Address	302, Building 4, Rongcheng Scientific Research Town, Xinfeng Road, Sunshine Community, Xili Street, Nanshan District, Shenzhen, Guangdong Province, China		
Manufacturer	Shenzhen Linklite Smart Lighting Co., Ltd		
Address	302, Building 4, Rongcheng Scientific Research Town, Xinfeng Road, Sunshine Community, Xili Street, Nanshan District, Shenzhen, Guangdong Province, China		
Factory	Shenzhen Linklite Smart Lighting Co., Ltd		
Address	302, Building 4, Rongcheng Scientific Research Town, Xinfeng Road, Sunshine Community, Xili Street, Nanshan District, Shenzhen, Guangdong Province, China		
Product Designation	Strip Lights with HDMI Sync Box		
Brand Name	Lumary, Linklite		
Test Model	KT-CR31B		
Series Model	L-HSB0A1		
Declaration of Difference	All the same except for the model name and brand name		
Date of receipt of test item	Apr. 06, 2023		
Date of test	Apr. 06, 2023 to May 10, 2023		
Deviation	No any deviation from the test method		
Condition of Test Sample	Normal		
Test Result	Pass		
Report Template	AGCRT-US-BGN/RF		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By	Bibo thay	
	Bibo Zhang (Project Engineer)	May 10, 2023
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	May 10, 2023
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	May 10, 2023





2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as "Strip Lights with HDMI Sync Box". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Attriajor teorificar description of Let 1 is described as following				
Operation Frequency	2.412GHz ~ 2.462GHz			
Output Power (Average)	IEEE 802.11b:13.11dBm; IEEE 802.11g:12.61dBm;			
Output Fower (Average)	IEEE 802.11n(20):12.77dBm; IEEE 802.11n(40):12.91dBm			
Output Bower (Book)	IEEE 802.11b:19.18dBm; IEEE 802.11g:18.47dBm;			
Output Power (Peak)	IEEE 802.11n(20):18.67dBm; IEEE 802.11n(40):18.34dBm			
Modulation	DSSS(DBPSK/DQPSK/CCK); OFDM(BPSK/QPSK/16-QAM/64-QAM)			
Number of channels	11			
Hardware Version	V1.1.4			
Software Version	V1.1.2			
Antenna Designation	PCB antenna (Comply with requirements of the FCC part 15.203)			
Antenna Gain	1.5dBi			
Power Supply	DC 12V by adapter			

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	
	1	2412 MHZ	
	2	2417 MHZ	
	3	2422 MHZ	
	4	2427 MHZ	
	5	2432 MHZ	
2400~2483.5MHZ	6	2437 MHZ	
	7	2442 MHZ	
	8	2447 MHZ	
	9	2452 MHZ	
	10	2457 MHZ	
	11	2462 MHZ	

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11. For 40MHZ bandwidth system use Channel 3 to Channel 9



Report No.: AGC12163230401FE05 Page 7 of 79

2.3. IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R	NBPSC	NCI	NCBPS NDBPS			nta Mbps) nsGl	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation	
NSS	Number of spatial streams	
R	Code rate	
NBPSC	Number of coded bits per single carrier	
NCBPS	Number of coded bits per symbol	
NDBPS	Number of data bits per symbol	
GI	Guard interval	

2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ASF2KT-CR31B** filing to comply with the FCC Part 15 requirements.

2.5. TEST METHODOLOGY

KDB 558074 D01 15.247 Meas Guidance v05: Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

2.7. EQUIPMENT MODIFICATIONS



Report No.: AGC12163230401FE05 Page 8 of 79

2.8. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.




Report No.: AGC12163230401FE05

Page 9 of 79

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.8 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2.7 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$





4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel transmitting (TX)
2	Middle channel transmitting (TX)
3	High channel transmitting (TX)

Note:

Transmit by 802.11b with Date rate (1/2/5.5/11)

Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)

Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65)

Transmit by 802.11n (40MHz) with Date rate (13.5/27/40.5/54/81/108/121.5/135)

The test channel for 20MHZ bandwidth system is channel 1, 6 and 11.

The test channel for 40MHZ bandwidth system is channel 3, 6 and 9.

Note:

- 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the EUT is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.

M HTMCS0 HTMCS1 HTMCS2 HTMC53 HTMC54 HTMC55 HTMC56 HTMC57 HTMC58 MC59 HTMC510 HTMC511 HTMC512 HTMC513 HTMC514 HTMC515 HTMC516 HTMC517 HTMC518 MCS19 HTMC520 HTMC521 HTMC522 HTMC523 HTMC524 HTMC525 HTMC526 HTMC527 HTMC528 MC529 HTMC530 HTMC531 VHT1MC50 VHT1MC51 VHT1MC52 VHT1MC53 VHT1MC54 VHT1MC55 VH VHT2MCS6 VHT2MCS9 VHT2MCS9 VHT2MCS0 VHT2MCS1 VHT2MCS2 VHT2MCS3 VHT2MCS4 VHT2MCS5 VHT3MCS7 VHT2MCS8 VHT2MCS9 VHT3MCS0 VHT3MCS1 VHT3MCS2 VHT3MCS3 VHT3MCS4 VHT3MCS5 VHT3MCS6 VHT3MCS7 VHT3MCS8 VHT3MCS9 VHT4MCS0 VHT3MCS1 VHT1MCS7 VHT1MCS8 VHT1MCS9 VHT2MCS0 VHT2MCS1 VHT2MCS2 VHT2MCS3 VHT2MCS4 VHT2MCS5 VHT3MCS8 VHT3MCS9 VHT4MCS0 VHT4MCS1 VHT4MCS2 VHT4MCS3 VHT4MCS4 VHT4MCS5 VHT4MCS7 VHT4MCS8 VHT4MCS9 Wlan0 mp_rate:Set data rate to 135 index 19 wlan0 mp_ctx: Start continuous DA=fffffffffffff len=1500 count=0 ak3918. : ak3918. s # akotg_usbhc_hub_status_data call akotg_usbhc_irg return IRQ_HANDLED ./tx_test_ak3918.sh stop 11 11n 40 ht40 stop test now wlan0 mp_ctx:Stop continuous Tx ak3918. ak3918. s Default - 1 2 3 4 5 5 6 7 reset show reboot ak3918. ak3918. 重启设备 式命令: ./ /rx_test_a /rx_test_a Serial: COM2, 115200 24, 3 24行, 80列 VT100 BEDD

Software Setting




Report No.: AGC12163230401FE05

Page 11 of 79

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure:




5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Equipment Model No. ID or Specification		Remark
1	Strip Lights with HDMI Sync Box	KT-CR31B	2ASF2KT-CR31B	EUT
2	Adapter	CW1203500US	Input:AC 100-240V, 50/60Hz, 1.2A MAX Output:DC 12V, 3500mA	Accessories

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Output Power	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247	Maximum Conducted Output Power Spectral Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant





6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESPI	101206	Aug. 04, 2022	Aug. 03, 2023
Artificial power network	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
Test Software	R&S	V1.71	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	RS	ESCI	100034	Aug. 03, 2022	Aug. 02, 2023
EXA Signal Analyzer	Agilent	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
Signal Analyzer	Aglient	N9020A	MY52090123	Aug. 04, 2022	Aug. 03, 2023
2.4GHz Filter	EM Electronics	N/A	N/A	Mar. 18, 2022	Mar. 19, 2024
Attenuator	ZHINAN	E-002	N/A	Aug. 04, 2022	Aug. 03, 2024
Horn Antenna	SCHWARZBEC	BBHA9170	768	Oct. 31, 2021	Oct. 30, 2023
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS	3117	00154520	Sep. 06, 2021	Sep. 05, 2023
Double-Ridged Waveguide Horn	ETS	3117	00034609	Mar. 23, 2023	Mar. 22, 2024
Preamplifer	ETS	3117-PA	00246148	Aug. 04, 2022	Aug. 03, 2024
Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 05, 2023	Jan. 04, 2024
Test Software	FARA	V.RA-03A	N/A	N/A	N/A



Report No.: AGC12163230401FE05

Page 13 of 79

7. OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For average power test:

- 1. Connect EUT RF output port to power sensor through an RF attenuator.
- 2. Connect the power sensor to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.

Note: The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)





Report No.: AGC12163230401FE05

Page 14 of 79

7.3. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail
	2412	13.11	19.18	≤30	Pass
802.11b	2437	11.93	17.87	≤30	Pass
	2462	11.64	17.19	≤30	Pass
	2412	12.61	18.47	≤30	Pass
802.11g	2437	11.79	17.60	≤30	Pass
	2462	11.74	17.04	≤30	Pass
	2412	12.77	18.67	≤30	Pass
802.11n20	2437	12.77	17.86	≤30	Pass
	2462	12.38	17.02	≤30	Pass
802.11n40	2422	12.91	18.34	≤30	Pass
	2437	12.27	17.84	≤30	Pass
	2452	11.44	17.50	≤30	Pass



8. BANDWIDTH

8.1. MEASUREMENT PROCEDURE

6dB bandwidth:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW≥3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

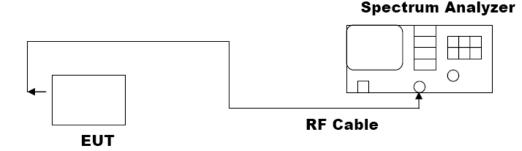



Report No.: AGC12163230401FE05


Page 16 of 79

8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and DTS Bandwidth					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	2412	13.335	8.987	≥0.5	Pass
802.11b	2437	13.399	8.802	≥0.5	Pass
	2462	13.352	8.824	≥0.5	Pass
	2412	16.527	16.427	≥0.5	Pass
802.11g	2437	16.564	16.451	≥0.5	Pass
	2462	16.528	16.425	≥0.5	Pass
	2412	17.711	17.667	≥0.5	Pass
802.11n20	2437	17.671	17.678	≥0.5	Pass
	2462	17.731	17.658	≥0.5	Pass
802.11n40	2422	36.182	35.749	≥0.5	Pass
	2437	36.037	35.752	≥0.5	Pass
	2452	36.129	36.038	≥0.5	Pass



Test Graphs of Occupied Bandwidth

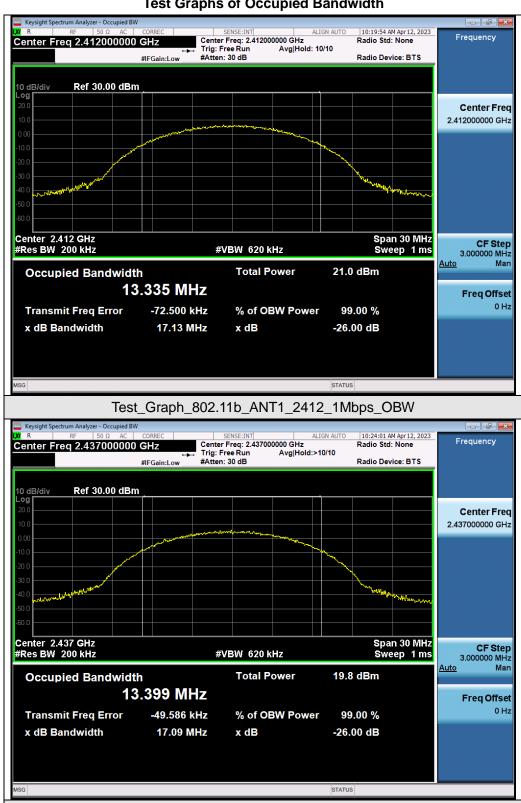


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11b_ANT1_2437_1Mbps_OBW

Web: http://www.agccert.com/

Freq Offset



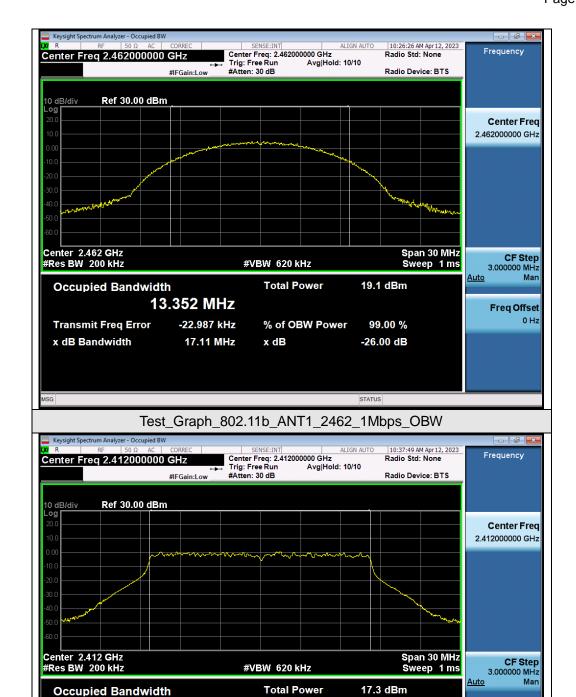

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11g_ANT1_2412_6Mbps_OBW

% of OBW Power

x dB

99.00 %

-26.00 dB

STATUS


Transmit Freq Error x dB Bandwidth

16.527 MHz

-39.926 kHz

20.33 MHz



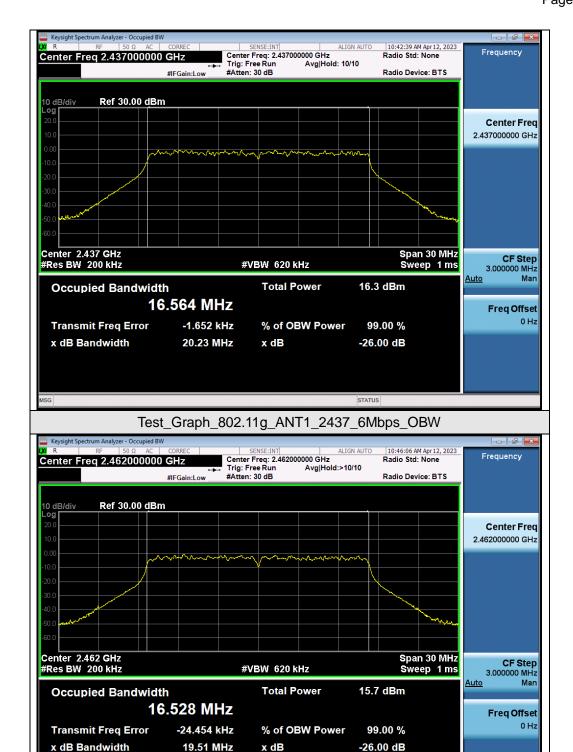

Test_Graph_802.11g_ANT1_2462_6Mbps_OBW


STATUS







Center 2.437 GHz #Res BW 200 kHz Span 30 MHz Sweep 1 ms **CF Step** 3.000000 MHz #VBW 620 kHz <u>Auto</u> Mar **Total Power** 16.5 dBm Occupied Bandwidth 17.671 MHz Freq Offset 0 Hz -39.302 kHz % of OBW Power 99.00 % **Transmit Freq Error** x dB Bandwidth 20.73 MHz x dB -26.00 dB Test_Graph_802.11n20_ANT1_2437_MCS0_OBW



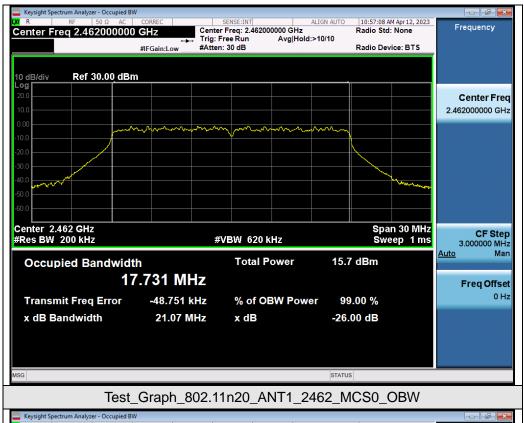

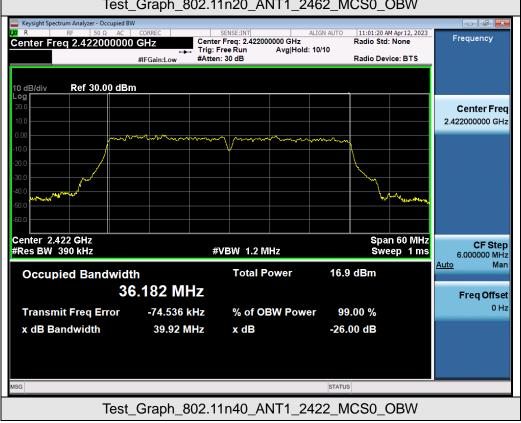




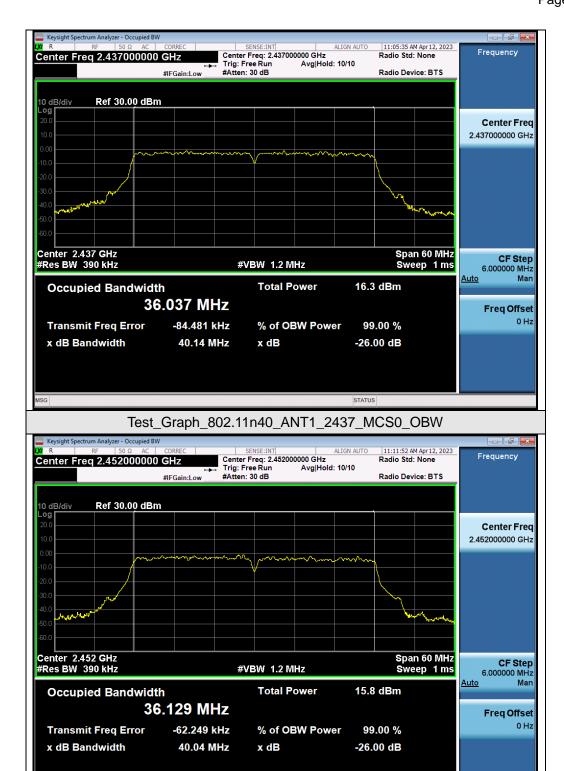

Test_Graph_802.11n40_ANT1_2452_MCS0_OBW




Test Graphs of DTS Bandwidth

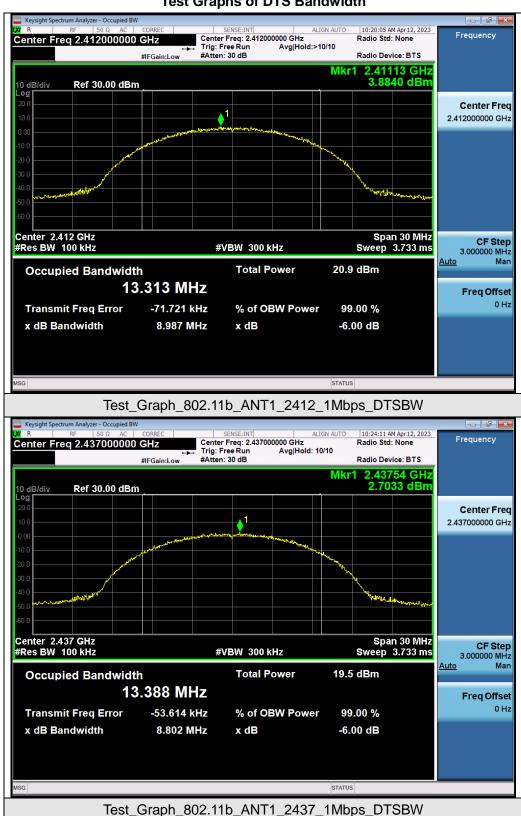

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Web: http://www.agccert.com/




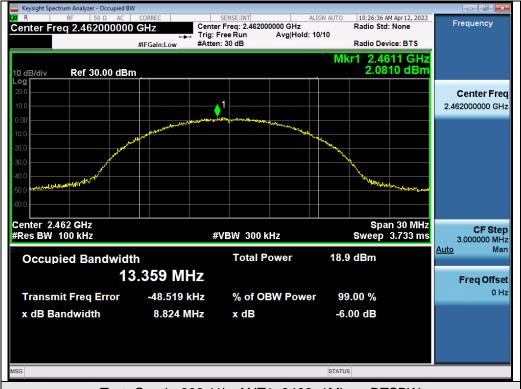






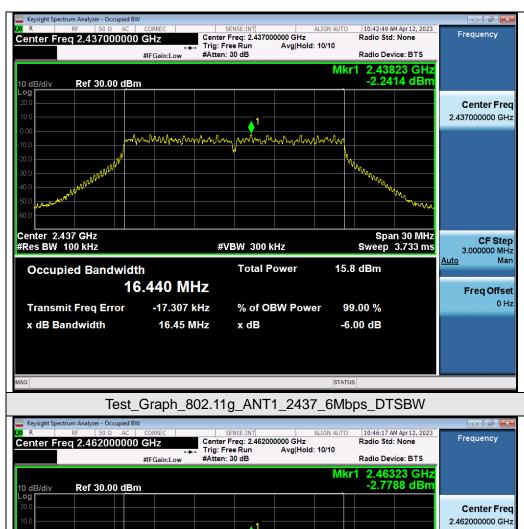

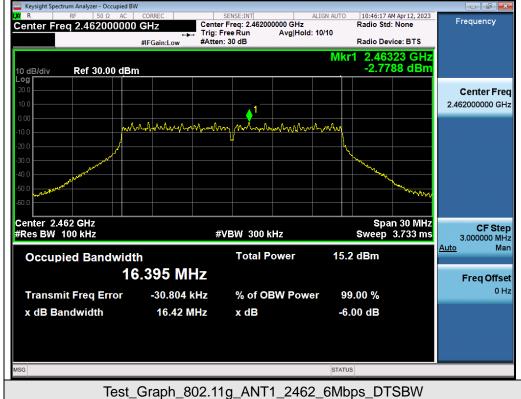

Freq Offset



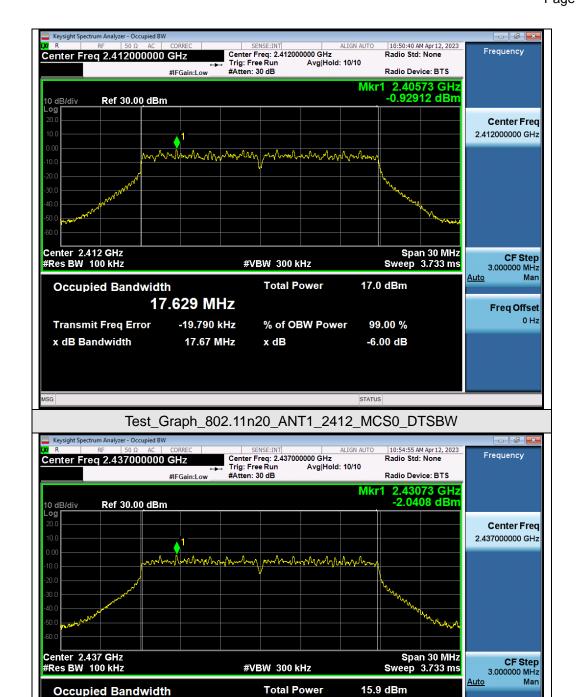

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n20_ANT1_2437_MCS0_DTSBW

% of OBW Power

x dB

99.00 %

-6.00 dB


Transmit Freq Error x dB Bandwidth


17.621 MHz

-35.973 kHz

17.68 MHz




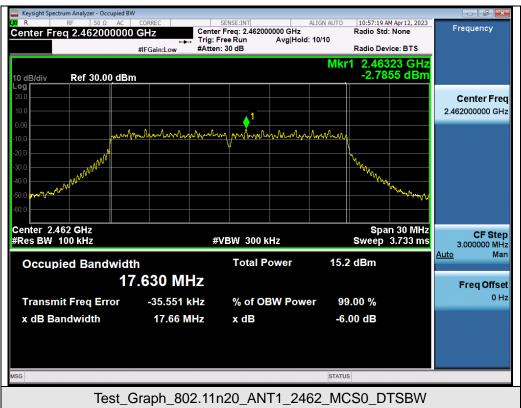

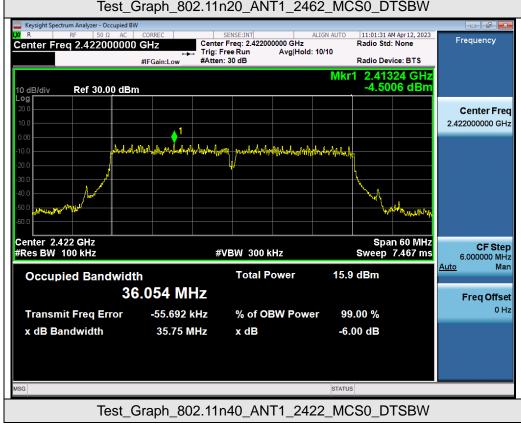





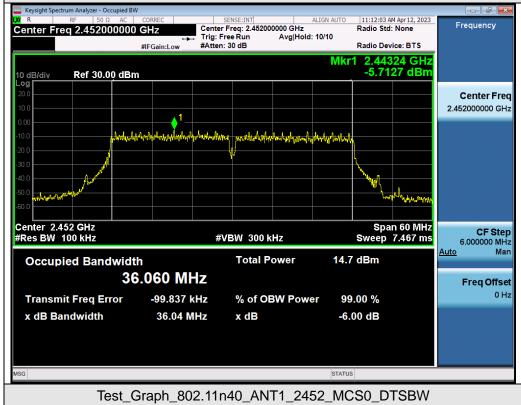



Report No.: AGC12163230401FE05

Page 29 of 79

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW > RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW > RBW) are conform to the requirement.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.

9.3. MEASUREMENT EQUIPMENT USEDJN

The same as described in section 6.


9.4. LIMITS AND MEASUREMENT RESULT


LIMITS AND MEASUREMENT RESULT				
Applicable Limite	Measurement Result			
Applicable Limits	Test Data	Criteria		
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit			
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS		
intentional radiator is operating, the radio frequency	Channel			
power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS		

Note: The limits reference level is according to the test plot of -6dB bandwidth.




Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

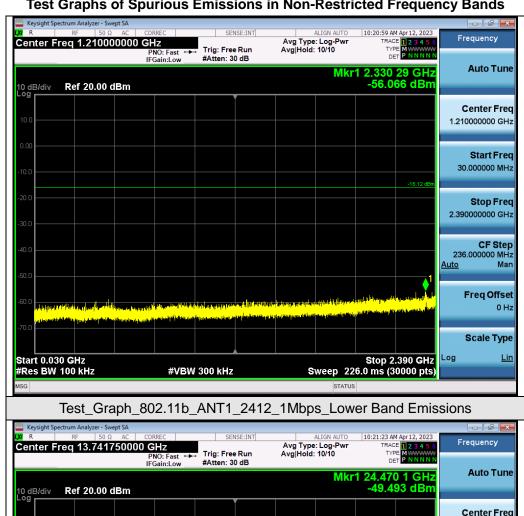

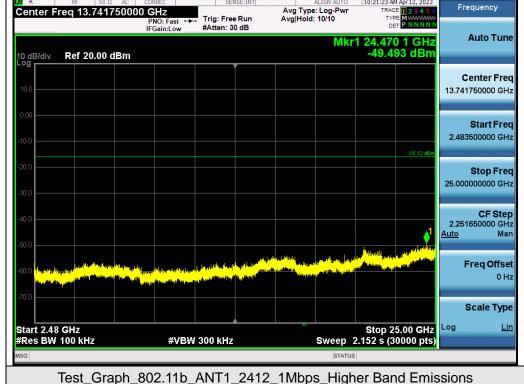





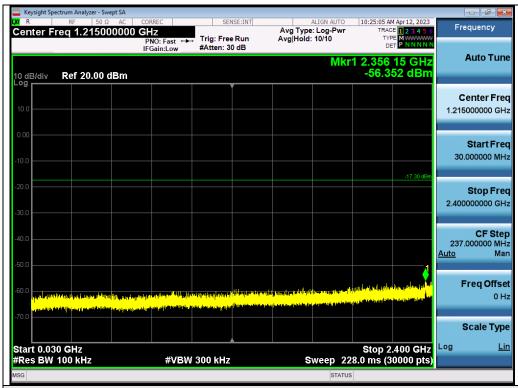







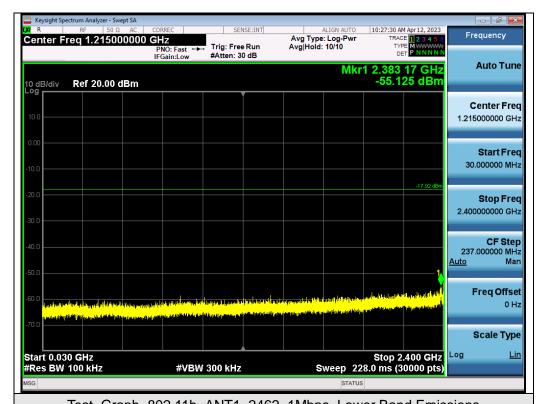

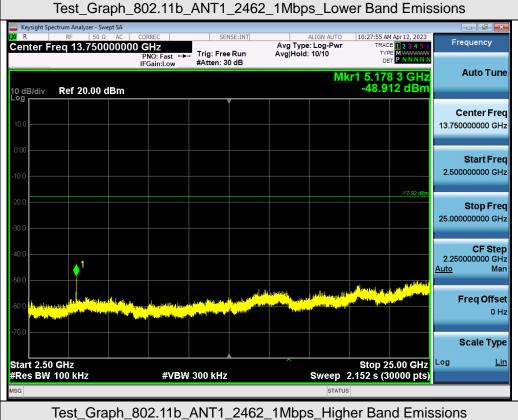




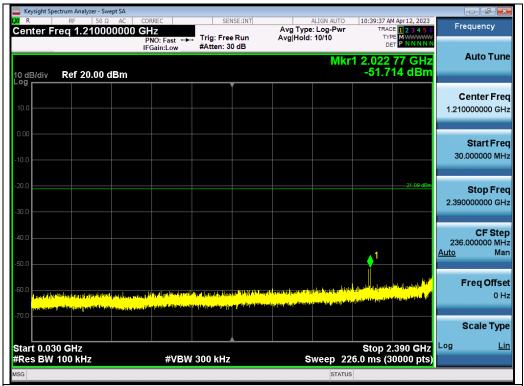

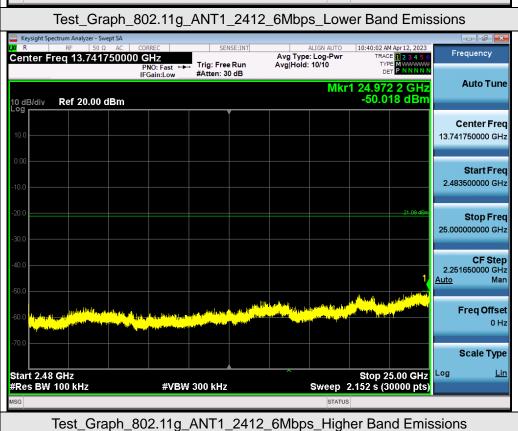




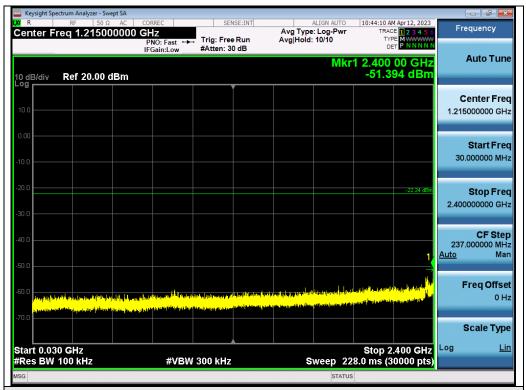





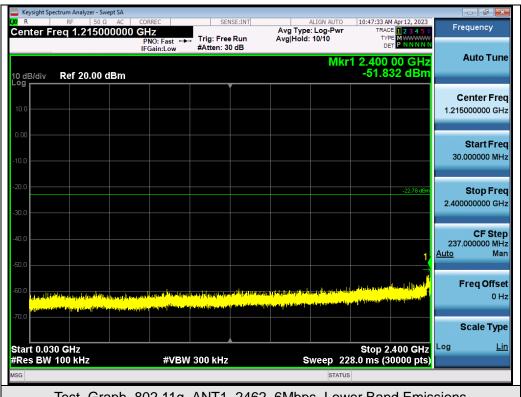














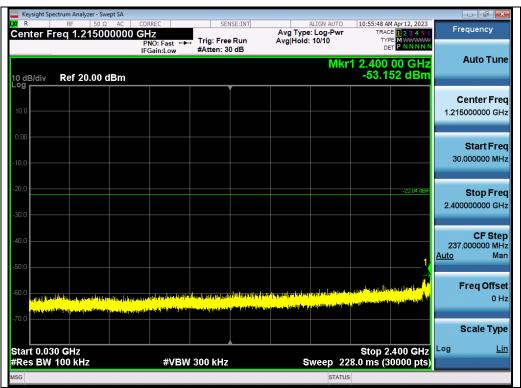






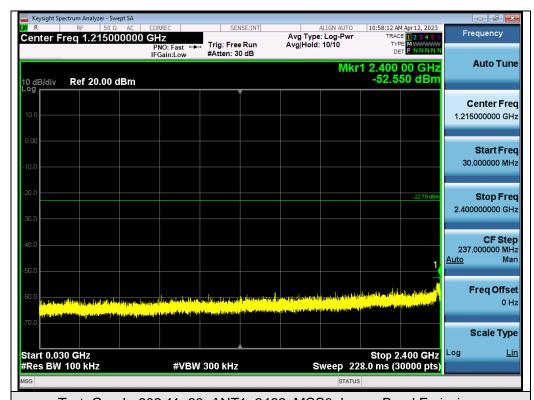

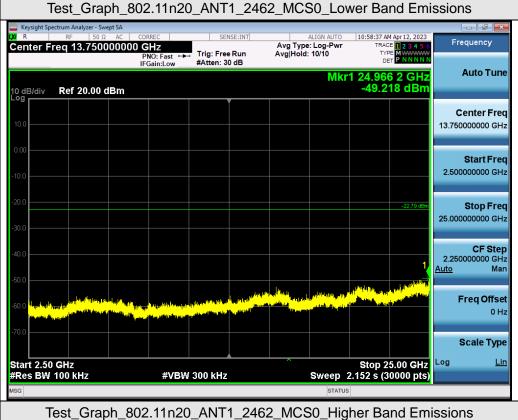




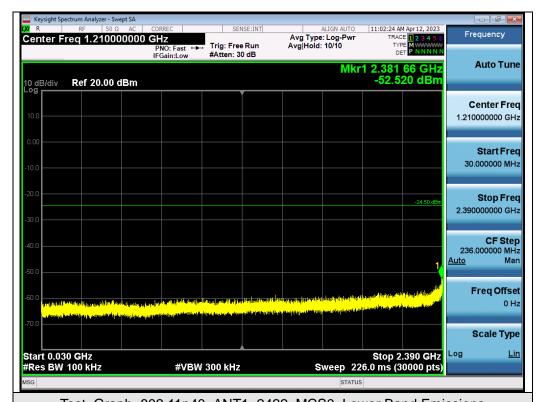







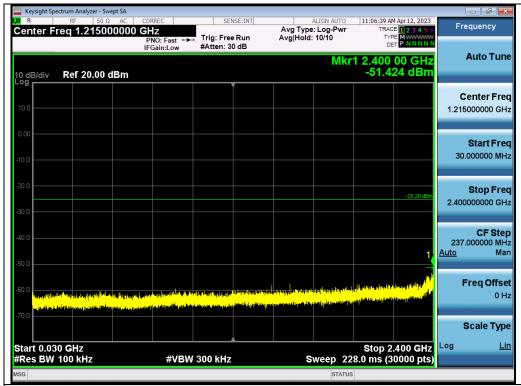






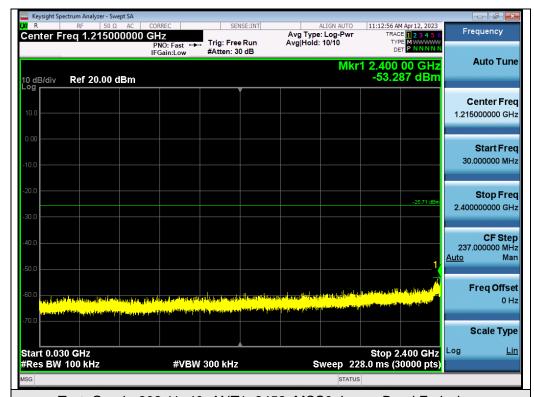

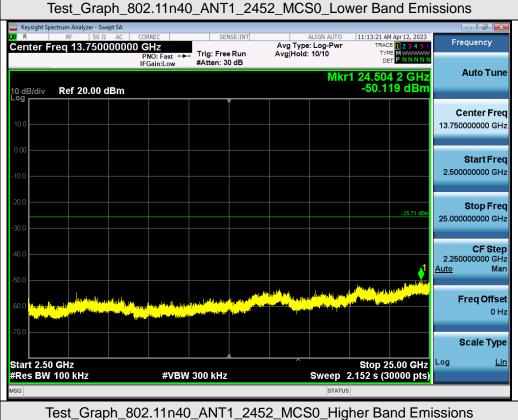




Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

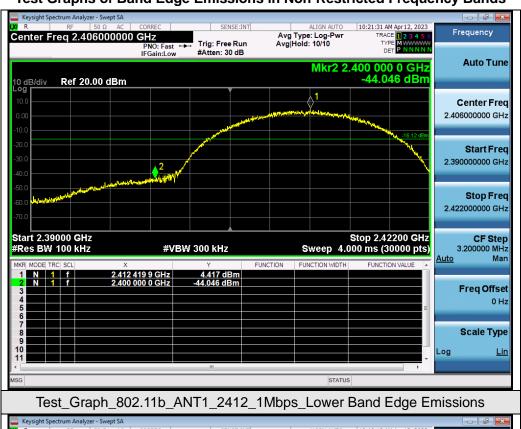





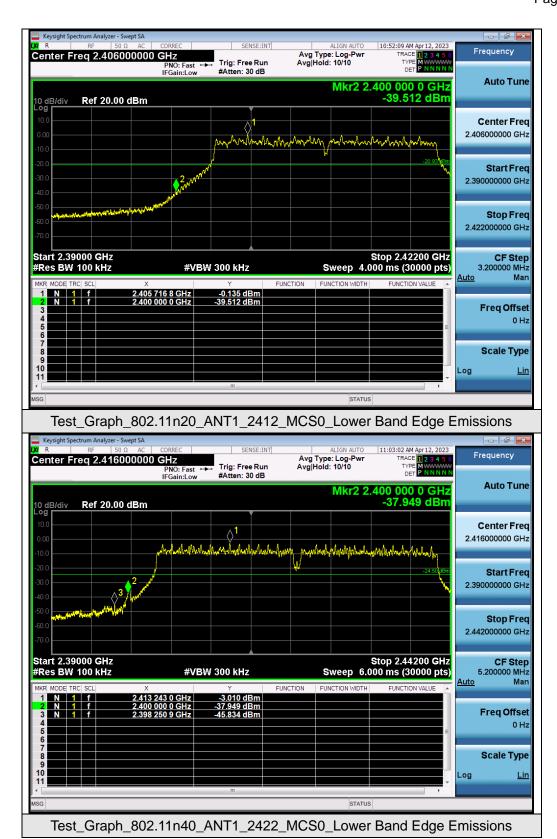

Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Report No.: AGC12163230401FE05

Page 44 of 79

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the ANSI C63.10 (2013) item 11.10 was used in this testing.

10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 8.2.

10.3 MEASUREMENT EQUIPMENT USED

Refer to Section 6.

10.4 LIMITS AND MEASUREMENT RESULT

	Test Data of Conducted Output Power Spectral Density							
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail			
	2412	-1.015	-9.254	≤8	Pass			
802.11b	2437	-2.276	-10.515	≤8	Pass			
	2462	-3.276	-11.515	≤8	Pass			
	2412	-6.945	-15.184	≤8	Pass			
802.11g	2437	-7.882	-16.121	≤8	Pass			
	2462	-9.089	-17.328	≤8	Pass			
	2412	-6.802	-15.041	≤8	Pass			
802.11n20	2437	-7.672	-15.911	≤8	Pass			
	2462	-8.566	-16.805	≤8	Pass			
	2422	-10.084	-18.323	≤8	Pass			
802.11n40	2437	-10.681	-18.92	≤8	Pass			
	2452	-11.149	-19.388	≤8	Pass			

Note: Power density(dBm/3kHz) = Power density(dBm/20kHz) - 10*log(20/3).



Test Graphs of Conducted Output Power Spectral Density




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11b_ANT1_2437_1Mbps_PSD





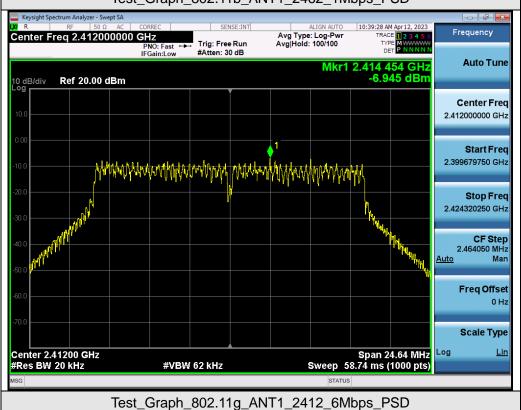


Freq Offset 0 Hz

Scale Type

Log

Span 24.64 MHz Sweep 58.74 ms (1000 pts)



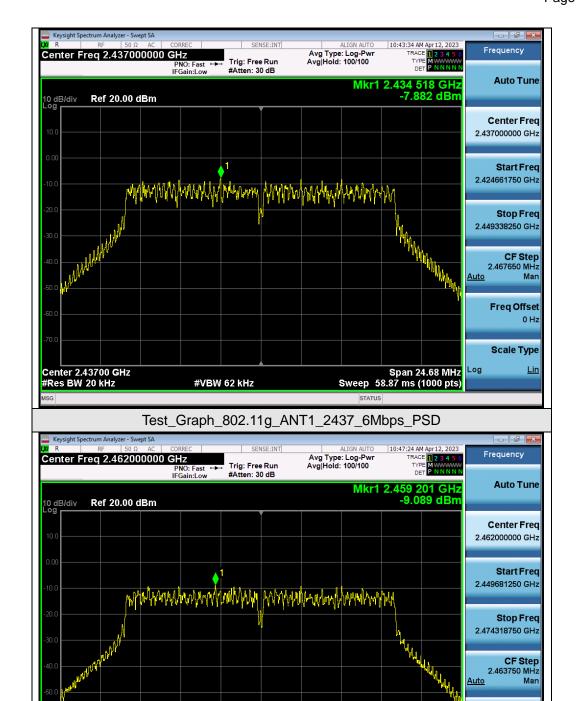


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11g_ANT1_2462_6Mbps_PSD

#VBW 62 kHz


Center 2.46200 GHz #Res BW 20 kHz



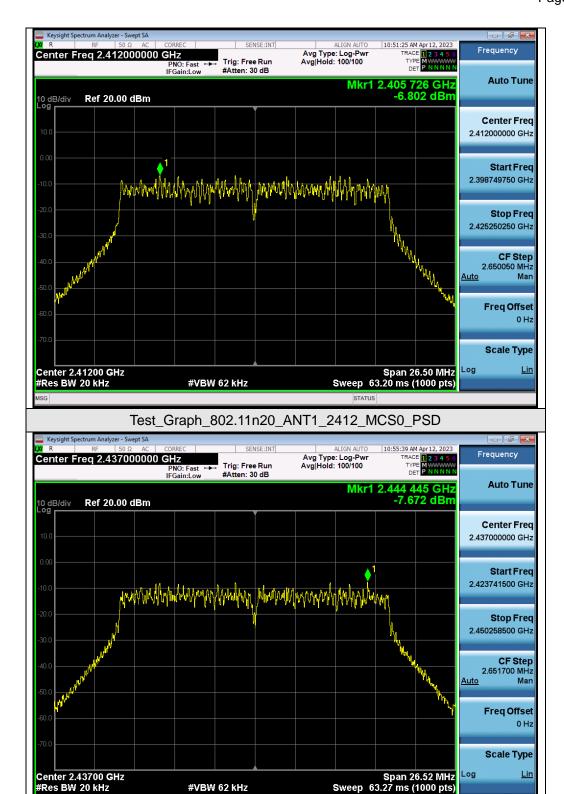


Test_Graph_802.11n20_ANT1_2437_MCS0_PSD



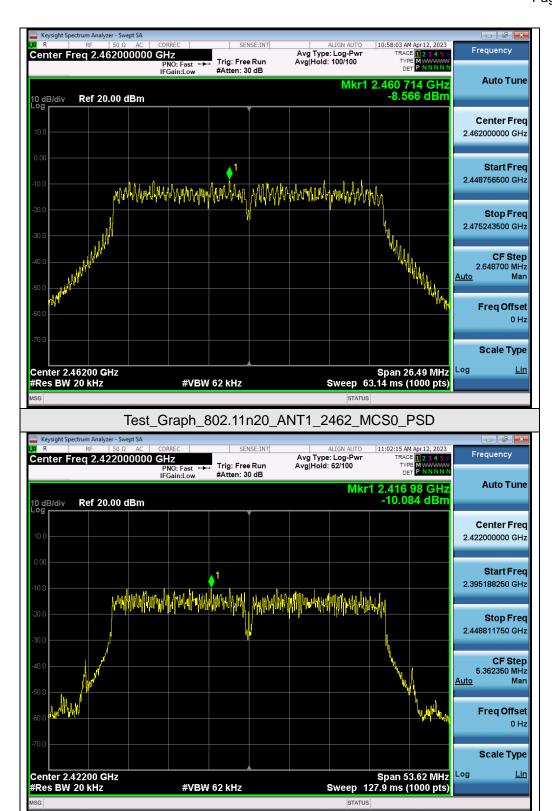

Test_Graph_802.11n40_ANT1_2422_MCS0_PSD



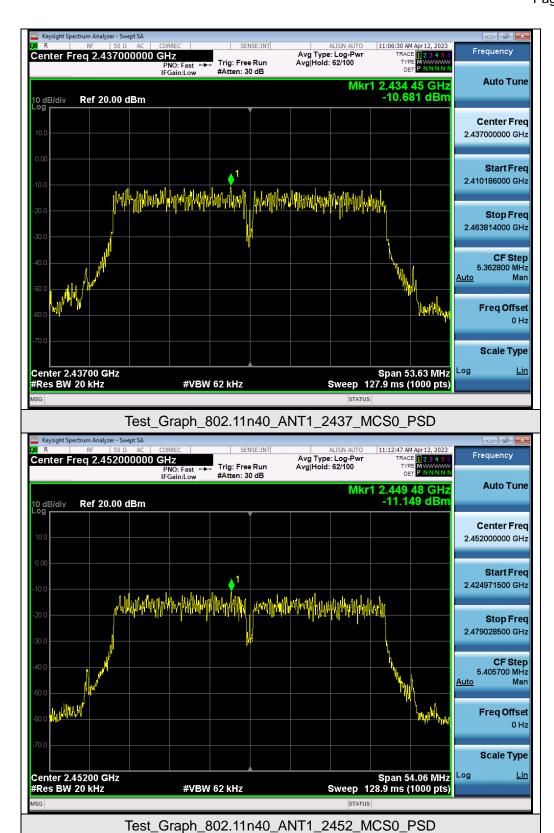



Report No.: AGC12163230401FE05 Page 51 of 79

11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

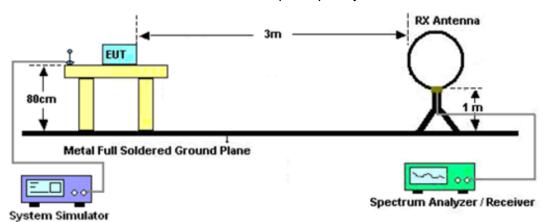

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

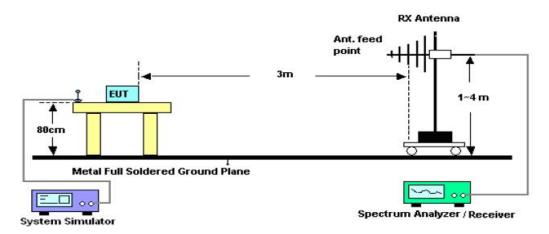

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

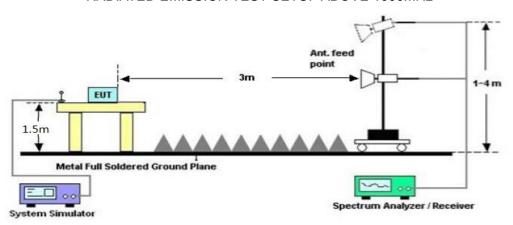

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Report No.: AGC12163230401FE05

Page 53 of 79

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT


Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Radiated emission from 30MHz to 1000MHz

EUT	Strip Lights with HDMI Sync Box	Model Name	KT-CR31B
Temperature	23.2°C	Relative Humidity	57.9%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

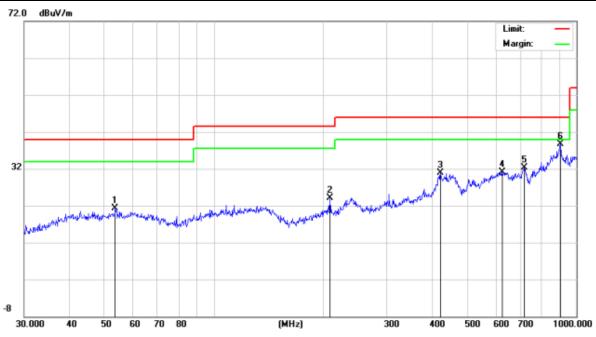


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		53.5052	7.03	14.31	21.34	40.00	-18.66	peak
2		209.3129	8.64	15.45	24.09	43.50	-19.41	peak
3		422.0577	6.16	24.73	30.89	46.00	-15.11	peak
4		625.0780	5.96	25.23	31.19	46.00	-14.81	peak
5		719.1995	5.55	26.69	32.24	46.00	-13.76	peak
6	*	903.3094	7.28	31.34	38.62	46.00	-7.38	peak

RESULT: PASS



EUT	Strip Lights with HDMI Sync Box	Model Name	KT-CR31B
Temperature	23.2°C	Relative Humidity	57.9%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

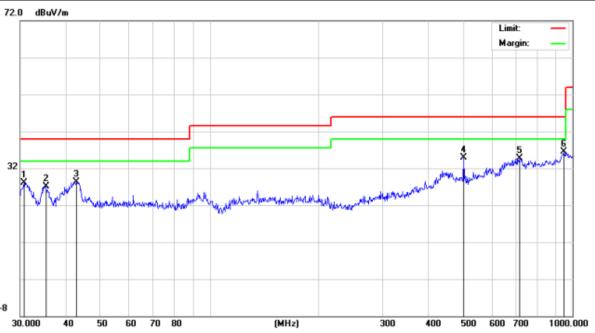

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		30.7454	14.24	13.85	28.09	40.00	-11.91	peak
2		35.3750	11.74	15.37	27.11	40.00	-12.89	peak
3		42.8997	11.45	16.93	28.38	40.00	-11.62	peak
4		501.1789	10.86	24.05	34.91	46.00	-11.09	peak
5		714.1734	6.19	28.60	34.79	46.00	-11.21	peak
6	*	948.7609	5.82	30.65	36.47	46.00	-9.53	peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.





Report No.: AGC12163230401FE05 Page 56 of 79

Radiated emission above 1GHz

EUT	Strip Lights with HDMI Sync Box	Model Name	KT-CR31B
Temperature	25°C	Relative Humidity	58%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4824.000	52.87	0.08	52.95	74	-21.05	peak	
4824.000	39.45	0.08	39.53	54	-14.47	AVG	
7236.000	50.71	2.21	52.92	74	-21.08	peak	
7236.000	37.67	2.21	39.88	54	-14.12	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

EUT	Strip Lights with HDMI Sync Box	Model Name	KT-CR31B
Temperature	25°C	Relative Humidity	58%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type	
4824.000	53.91	0.08	53.99	74	-20.01	peak	
4824.000	40.76	0.08	40.84	54	-13.16	AVG	
7236.000	50.48	2.21	52.69	74	-21.31	peak	
7236.000	38.81	2.21	41.02	54	-12.98	AVG	
emark:							





EUT	Strip Lights with HDMI Sync Box	Model Name	KT-CR31B
Temperature	25°C	Relative Humidity	58%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	51.85	0.14	51.99	74	-22.01	peak
4874.000	38.54	0.14	38.68	54	-15.32	AVG
7311.000	48.39	2.36	50.75	74	-23.25	peak
7311.000	36.98	2.36	39.34	54	-14.66	AVG
Remark:						
actor = Anter	nna Factor + Cable	Loss - Pre-	amplifier.			

EUT	Strip Lights with HDMI Sync Box	Model Name	KT-CR31B
Temperature	25°C	Relative Humidity	58%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	53.02	0.14	53.16	74	-20.84	peak
4874.000	38.74	0.14	38.88	54	-15.12	AVG
7311.000	51.35	2.36	53.71	74	-20.29	peak
7311.000	37.23	2.36	39.59	54	-14.41	AVG
Remark:						
actor = Anter	nna Factor + Cable	Loss – Pre-	-amplifier.			





EUT	Strip Lights with HDMI Sync Box	Model Name	KT-CR31B
Temperature	25°C	Relative Humidity	58%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	53.67	0.22	53.89	74	-20.11	peak
4924.000	39.05	0.22	39.27	54	-14.73	AVG
7386.000	50.53	2.64	53.17	74	-20.83	peak
7386.000	37.85	2.64	40.49	54	-13.51	AVG
lomork:						
emark:						
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			

EUT	Strip Lights with HDMI Sync Box	Model Name	KT-CR31B
Temperature	25°C	Relative Humidity	58%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	50.96	0.22	51.18	74	-22.82	peak
4924.000	38.67	0.22	38.89	54	-15.11	AVG
7386.000	48.72	2.64	51.36	74	-22.64	peak
7386.000	35.89	2.64	38.53	54	-15.47	AVG
Remark:	1		1			L
Factor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report. Any report having not been signed by authorized approver, of naving been affected without authorization, or having not been stamped by the "Decicated resting/Inspection"

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Test result for band edge emission at restricted bands

EUT	Strip Lights with HDMI Sync Box	Model Name	KT-CR31B
Temperature	23°C	Relative Humidity	54%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




EUT	Strip Lights with HDMI Sync Box	Model Name	KT-CR31B
Temperature	23°C	Relative Humidity	54%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement

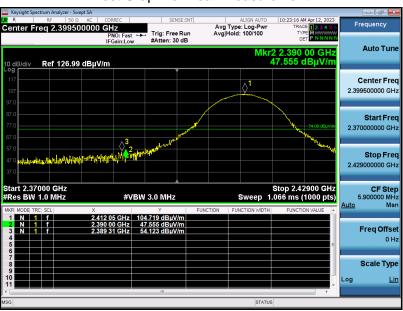

Test Graph for Average Measurement

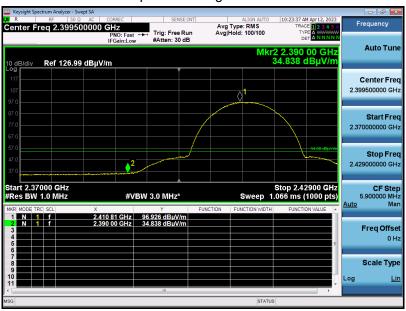

RESULT: PASS




EUT	Strip Lights with HDMI Sync Box	Model Name	KT-CR31B
Temperature	23°C	Relative Humidity	54%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

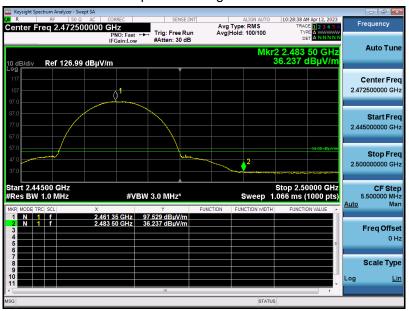

RESULT: PASS