

RF Exposure Lab

802 N. Twin Oaks Valley Road, Suite 105 • San Marcos, CA 92069 • U.S.A.

TEL (760) 471-2100 • FAX (760) 471-2121

<http://www.rfexposurelab.com>

CERTIFICATE OF COMPLIANCE SAR EVALUATION

Haivision
2600 Blvd. Alfred-Nobel, 5th Floor
Montreal, QC H4S0A9
Canada

Dates of Test: August 31 – September 16, 2023

Test Report Number: SAR.20230905

Revision A


Lab Designation Number: US1195 (FCC); US0194 (ISED)

FCC ID:	2ASIK-EM91 & 2ASIK-CB178NF
IC Certificate:	21415-EM91 & 21415-CB178NF
HVIN/Model(s):	Pro460
Contains Cellular Module:	Aviwest Model EM9191
Contain WiFi Module:	Aviwest Model AW-CB178NF
Test Sample:	Engineering Unit Same as Production
Serial Number:	AVWPRO40523008993 & AVWPRO40523008992
Equipment Type:	Wireless Video Transceiver
Classification:	Portable Transmitter Next to Body
TX Frequency Range:	663 – 698 MHz, 699 – 716 MHz, 777 – 787 MHz, 788 – 798 MHz, 814 – 849 MHz, 1710 – 1780 MHz, 1850 – 1915 MHz, 2496 – 2690 MHz, 3550 – 3700 MHz, 2412 – 2462 MHz, 5150 – 5350 MHz, 5500 – 5700 MHz, 5745 – 5825 MHz, 2402 – 2480 MHz
Frequency Tolerance:	± 2.5 ppm
Maximum RF Output:	600 MHz (LTE) – 24.0 dBm, 750 MHz (LTE) – 24.0 dBm, 850 MHz (WCDMA) – 24.5 dBm, 850 MHz (LTE) – 24.0 dBm, 1750 MHz (WCDMA) – 24.5 dBm, 1750 MHz (LTE) – 24.0 dBm, 1900 MHz (WCDMA) – 24.5 dBm, 1900 MHz (LTE) – 24.0 dBm, 2550 MHz (LTE) – 26.0 dBm, 3600 MHz (LTE) – 24.0 dBm, 2450 MHz (b) – 18.0 dBm, 2450 MHz (g) – 16.0 dBm, 2450 MHz (n20) – 15.0 dBm, 2450 MHz (n40) – 13.0 dBm, 5250 MHz (a) – 15.0 dBm, 5250 MHz (n20) – 14.0 dBm, 5250 MHz (n40) – 12.0 dBm, 5250 MHz (ac80) – 10.0 dBm, 5600 MHz (a) – 15.0 dBm, 5600 MHz (n20) – 14.0 dBm, 5600 MHz (n40) – 12.0 dBm, 5600 MHz (ac80) – 10.0 dBm, 5800 MHz (a) – 15.0 dBm, 5800 MHz (n20) – 14.0 dBm, 5800 MHz (n40) – 12.0 dBm, 5800 MHz (ac80) – 10.0 dBm, 2450 MHz (BT) – 4.0 dBm Conducted
Signal Modulation:	WCDMA, QPSK, 16QAM, DSSS, OFDM
Antenna Type:	Internal
Application Type:	Certification
FCC Rule Parts:	Part 2, 15, 22, 24, 27, 90
KDB Test Methodology:	KDB 447498 D01 v06, KDB 248227 v02r02, KDB 941225 D01 v03r01, D02 v02r01 & D05 v02r05
Industry Canada:	RSS-102 Issue 6, Safety Code 6
Max. Stand Alone SAR Value:	0.90 W/kg Reported
Max. Simultaneous Value:	1.50 W/kg Reported
Separation Distance:	15 mm

This wireless mobile and/or portable device has been shown to be compliant for localized specific absorption rate (SAR) for uncontrolled environment/general exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and IEC 62209-1528:2020 (See test report).

I attest to the accuracy of the data. All measurements were performed by myself or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RF Exposure Lab, LLC certifies that no party to this application is subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).



Jay M. Moulton
Vice President



Testing Cert. # 2387.01

Table of Contents

1. Introduction.....	4
SAR Definition [5]	6
2. SAR Measurement Setup	7
Robotic System	7
System Hardware	7
System Electronics	8
Probe Measurement System	8
3. Probe and Dipole Calibration	15
4. Phantom & Simulating Tissue Specifications	16
Head & Body Simulating Mixture Characterization.....	16
5. ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2]	17
Uncontrolled Environment.....	17
Controlled Environment	17
6. Measurement Uncertainty	18
7. System Validation	19
Tissue Verification	19
Test System Verification	19
8. LTE Document Checklist	20
9. SAR Test Data Summary.....	24
Procedures Used To Establish Test Signal.....	24
Device Test Condition.....	24
WCDMA Conducted Power	25
10. SAR Test Results.....	72
11. Simultaneous Transmission Analysis	79
12. Test Equipment List	89
13. Conclusion	90
14. References	91
Appendix A – System Validation Plots and Data.....	92
Appendix B – SAR Test Data Plots.....	108
Appendix C – SAR Test Setup Photos.....	126
Appendix D – Probe Calibration Data Sheets	130
Appendix E – Dipole Calibration Data Sheets.....	149
Appendix F – DAE Calibration Data Sheets.....	200
Appendix G – Phantom Calibration Data Sheets	206
Appendix H – Validation Summary	208

Comment/Revision	Date
Original Release	October 9, 2023
Revision A – Replace Sierra Wireless & Azureware with Aviwest on page 1, evaluated report to RSS-102 Issue 6, add 'The 15 mm gap is the thickness of the backpack' on page 24, add exclusion of BT testing on page 24 and correct type of Extremity to Body on page 80	June 13, 2024

Note: The latest version supersedes all previous versions listed in the above table. The latest version shall be used.

1. Introduction

This measurement report shows compliance of the Haivision Model Pro460 FCC ID: 2ASIK-EM91 & 2ASIK-CB178NF with FCC Part 2, 1093, ET Docket 93-62 Rules for mobile and portable devices and IC Certificate: 21415-EM91 & 21415-CB178NF with RSS102 Issue 6 & Safety Code 6. The FCC/ISED have adopted the guidelines for evaluating the environmental effects of radio frequency radiation to protect the public and workers from the potential hazards of RF emissions due to FCC/ISED regulated portable devices. [1], [6]

The test results recorded herein are based on a single type test of Haivision Model Pro460 and therefore apply only to the tested sample.

The testing in this report was conducted on two transmit antennas. One in each plane of the device. The two remaining antennas on the same plane with the same distance were spot checked to verify the values were similar. Antenna M2 and M6 were chosen to do a full evaluation. Antennas M1, M3, M4 and M5 were spot checked. Both of the WiFi antennas had a full evaluation conducted on each antenna.

The test procedures and limits, as described in ANSI C95.1 – 1999 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [2], ANSI C95.3 – 2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields [3], IEEE Std.1528 – 2013 Recommended Practice [4], and Industry Canada Safety Code 6 Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz were employed.

The following table indicates all the wireless technologies operating in the Pro460 Wireless Video Transceiver. The table also shows the tolerance for the power level for each mode.

Band	Technology	3GPP Nominal Power dBm	Calibrated Nominal Power dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
Band 2 – 1900 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 4 – 1750 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 5 – 850 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 7 – 2550 MHz	LTE	23.0	23.0	+1.8/-1.0	22.0	24.8
Band 12 – 750 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 13 – 750 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 14 – 750 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 17 – 750 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 25 – 1900 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 26 – 850 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 38 – 2550 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 41 – 2550 MHz PC3	LTE	23.0	23.0	+1.8/-1.0	22.0	24.8
Band 41 – 2550 MHz PC2	LTE	25.0	25.0	+1.0/-1.0	24.0	26.0
Band 48 – 3600 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 66 – 1750 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 71 – 600 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 5 – 850 MHz	WCDMA/HSPA	23.5	23.5	+1.0/-1.0	22.5	24.5
Band 4 – 1750 MHz	WCDMA/HSPA	23.5	23.5	+1.0/-1.0	22.5	24.5
Band 2 – 1900 MHz	WCDMA/HSPA	23.5	23.5	+1.0/-1.0	22.5	24.5
WLAN – 2.4 GHz	802.11b	N/A	N/A	N/A	N/A	18.0
WLAN – 2.4 GHz	802.11g	N/A	N/A	N/A	N/A	16.0
WLAN – 2.4 GHz	802.11n20	N/A	N/A	N/A	N/A	15.0
WLAN – 2.4 GHz	802.11n40	N/A	N/A	N/A	N/A	13.0
WLAN – 5 GHz UNII Band I,IIA,IIC,III	802.11a	N/A	N/A	N/A	N/A	15.0
WLAN – 5 GHz UNII Band I,IIA,IIC,III	802.11n20	N/A	N/A	N/A	N/A	14.0
WLAN – 5 GHz UNII Band I,IIA,IIC,III	802.11n40	N/A	N/A	N/A	N/A	12.0
WLAN – 5 GHz UNII Band I,IIA,IIC,III	802.11ac80	N/A	N/A	N/A	N/A	10.0
BT – 2.4 GHz	Bluetooth	N/A	N/A	N/A	N/A	4.0

LTE UL CA Combinations (Aggregate Power)

Band UL 2CA Combination	Technology	Class	Nominal dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
12A-4A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
12A-2A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
13A-2A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
13A-4A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
5A-2A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
5A-4A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
66A-2A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
66A-5A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
7A-5A	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0

FR1 NSA UL ENDC Combinations (Aggregate Power)

Band UL ENDC Combination	Technology	Class	Nominal dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
12A-n66A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
12A-n2A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
13A-n66A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
13A-n2A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
2A-n5A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
2A-n71A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
41A-n77A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
5A-n66A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
5A-n2A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
66A-n5A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
66A-n71A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
7A-n5A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5
7A-n71A	LTE+FR1	3	23.0	+1.5/-1.5	21.5	24.5

SAR Definition [5]

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = rms electric field strength (V/m)

2. SAR Measurement Setup

Robotic System

These measurements are performed using the DASY52 automated dosimetric assessment system. The DASY52 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 2.1).

System Hardware

A cell controller system contains the power supply, robot controller teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the HP Intel Core2 computer with Windows XP system and SAR Measurement Software DASY52, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

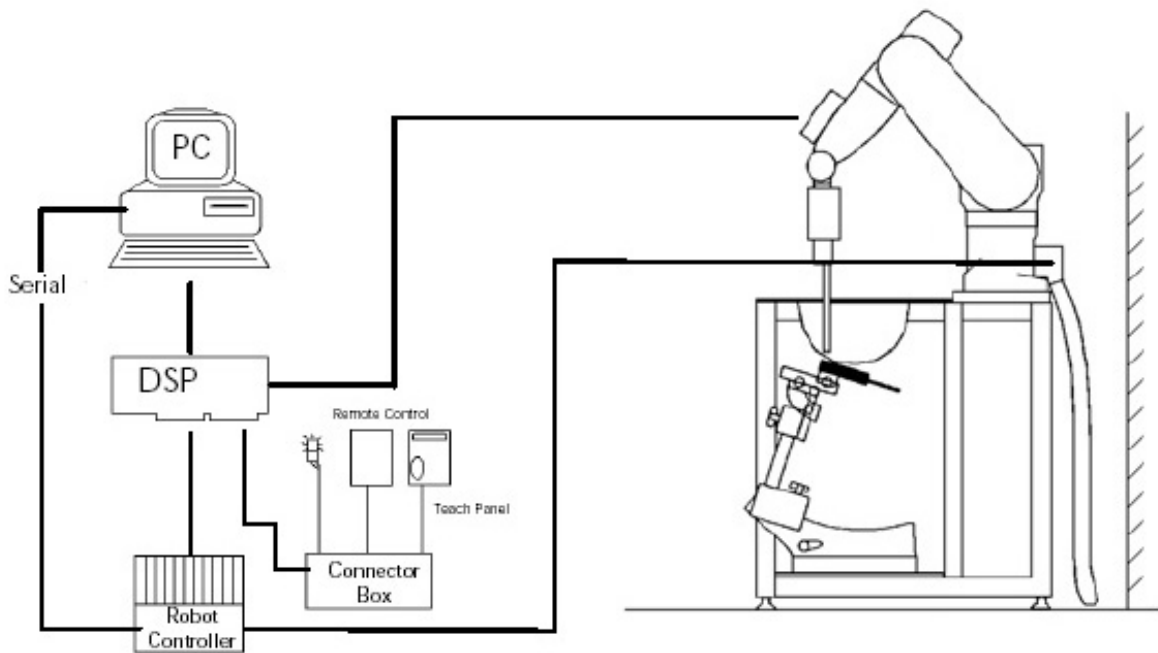


Figure 2.1 SAR Measurement System Setup

System Electronics

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in.

Probe Measurement System

The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration (see Fig. 2.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi fiber line ending at the front of the probe tip. (see Fig. 2.3) It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY52 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.



DAE System

Probe Specifications

Calibration: In air from 10 MHz to 6.0 GHz
In brain and muscle simulating tissue at Frequencies of 450 MHz, 835 MHz, 1750 MHz, 1900 MHz, 2450 MHz, 2600 MHz, 3500 MHz, 5200 MHz, 5300 MHz, 5600 MHz, 5800 MHz

Frequency: 10 MHz to 6 GHz

Linearity: ± 0.2 dB (30 MHz to 6 GHz)

Dynamic: 10 mW/kg to 100 W/kg

Range: Linearity: ± 0.2 dB

Dimensions: Overall length: 330 mm

Tip length: 20 mm

Body diameter: 12 mm

Tip diameter: 2.5 mm

Distance from probe tip to sensor center: 1 mm

Application: SAR Dosimetry Testing
Compliance tests of wireless device




Figure 2.2 Triangular Probe Configurations



Figure 2.3 Probe Thick-Film Technique

Probe Calibration Process

Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure described in with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in and found to be better than +/-0.25dB. The sensitivity parameters (Norm X, Norm Y, Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe is tested.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

Temperature Assessment *

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor based temperature probe is used in conjunction with the E-field probe

$$SAR = C \frac{\Delta T}{\Delta t}$$

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

where:

Δt = exposure time (30 seconds),

σ = simulated tissue conductivity,

C = heat capacity of tissue (brain or muscle),

ρ = Tissue density (1.25 g/cm³ for brain tissue)

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place.

Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

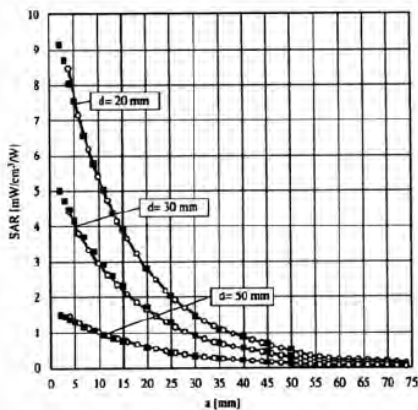


Figure 2.4 E-Field and Temperature Measurements at 900MHz

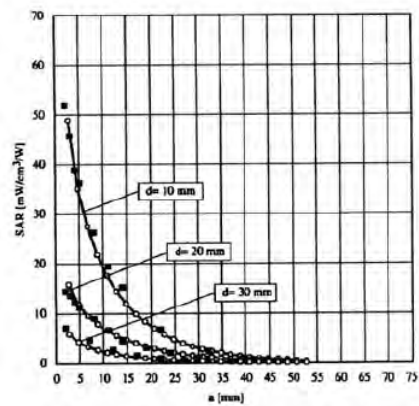


Figure 2.5 E-Field and Temperature Measurements at 1800MHz

Data Extrapolation

The DASY52 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i (i=x,y,z)
 U_i = input signal of channel i (i=x,y,z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with V_i = compensated signal of channel i (i = x,y,z)
 $Norm_i$ = sensor sensitivity of channel i (i = x,y,z)
 $\mu V/(V/m)^2$ for E-field probes
 $ConvF$ = sensitivity of enhancement in solution
 E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{free} = \frac{E_{tot}^2}{3770}$$

with P_{pwe} = equivalent power density of a plane wave in W/cm²
 E_{tot} = total electric field strength in V/m

Scanning procedure

- The DASYS installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.
- The „reference“ and „drift“ measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- The highest integrated SAR value is the main concern in compliance test applications. These values can mostly be found at the inner surface of the phantom and cannot be measured directly due to the sensor offset in the probe. To extrapolate the surface values, the measurement distances to the surface must be known accurately. A distance error of 0.5mm could produce SAR errors of 6% at 1800 MHz. Using predefined locations for measurements is not accurate enough. Any shift of the phantom (e.g., slight deformations after filling it with liquid) would produce high uncertainties. For an automatic and accurate detection of the phantom surface, the DASYS5 system uses the mechanical surface detection. The detection is always at touch, but the probe will move backward from the surface the indicated distance before starting the measurement.
- The „area scan“ measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The scan uses different grid spacings for different frequency measurements. Standard grid spacing for head measurements in frequency ranges ≤ 2GHz is 15 mm in x - and y- dimension. For higher frequencies a finer resolution is needed, thus for the grid spacing is reduced according the following table:

Area scan grid spacing for different frequency ranges	
Frequency range	Grid spacing
≤ 2 GHz	≤ 15 mm
2 – 4 GHz	≤ 12 mm
4 – 6 GHz	≤ 10 mm

Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in annex B.

- A „zoom scan“ measures the field in a volume around the 2D peak SAR value acquired in the previous „coarse“ scan. It uses a fine meshed grid where the robot moves the probe in steps along all the 3 axis (x,y and z-axis) starting at the bottom of the Phantom. The grid spacing for the cube measurement is varied according to the measured frequency range, the dimensions are given in the following table:

Zoom scan grid spacing and volume for different frequency ranges			
Frequency range	Grid spacing for x, y axis	Grid spacing for z axis	Minimum zoom scan volume
≤ 2 GHz	≤ 8 mm	≤ 5 mm	≥ 30 mm
2 – 3 GHz	≤ 5 mm	≤ 5 mm	≥ 28 mm
3 – 4 GHz	≤ 5 mm	≤ 4 mm	≥ 28 mm
4 – 5 GHz	≤ 4 mm	≤ 3 mm	≥ 25 mm
5 – 6 GHz	≤ 4 mm	≤ 2 mm	≥ 22 mm

DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in annex B. Test results relevant for the specified standard (see section 3) are shown in table form in section 7.

Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of all points in the three directions x, y and z. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 1 to 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

SAM PHANTOM

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 2.6)

Phantom Specification

Phantom: SAM Twin Phantom (V4.0)
Shell Material: Vivac Composite
Thickness: 2.0 ± 0.2 mm

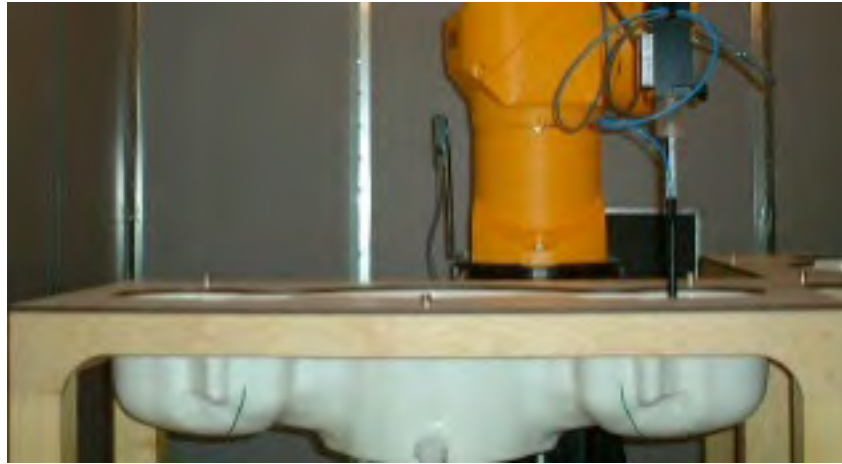


Figure 2.6 SAM Twin Phantom

Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0 the Mounting Device (see Fig. 2.7), enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately, and repeat ably be positioned according to the FCC, CENELEC, IEC and IEEE specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Figure 2.7 Mounting Device

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

3. Probe and Dipole Calibration

See Appendix D and E.

4. Phantom & Simulating Tissue Specifications

Head & Body Simulating Mixture Characterization

The head mixture consist of the material based on the table listed below. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue.

Table 4.1 Typical Composition of Ingredients for Tissue

Ingredients		Simulating Tissue					
		750 MHz Head	900 MHz Head	1750 MHz Head	1900 MHz Head	2550 MHz Head	3600 MHz Head
Mixing Percentage							
Water		Proprietary Purchased From Speag					
Sugar							
Salt							
HEC							
Bactericide							
DGBE							
Dielectric Constant	Target	41.94	41.50	40.08	40.00	39.07	37.10
Conductivity (S/m)	Target	0.89	0.97	1.37	1.40	1.91	3.04

Ingredients		Simulating Tissue			
		2450 MHz Head	5250 MHz Head	5600 MHz Head	5750 MHz Head
Mixing Percentage					
Water		Proprietary Purchased From Speag			
Sugar					
Salt					
HEC					
Bactericide					
DGBE					
Dielectric Constant	Target	39.20	35.93	35.53	35.36
Conductivity (S/m)	Target	1.80	4.71	5.07	5.22

5. ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2]

Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 5.1 Human Exposure Limits

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIROMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR ¹ Head	1.60	8.00
SPATIAL AVERAGE SAR ² Whole Body	0.08	0.40
SPATIAL PEAK SAR ³ Hands, Feet, Ankles, Wrists	4.00	20.00

¹ The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

² The Spatial Average value of the SAR averaged over the whole body.

³ The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

6. Measurement Uncertainty

Measurement uncertainty table is not required per KDB 865664 D01 v01 section 2.8.2 page 12. SAR measurement uncertainty analysis is required in the SAR report only when the highest measured SAR in a frequency band is ≥ 1.5 W/kg for 1-g SAR. The equivalent ratio (1.5/1.6) should be applied to extremity and occupational exposure conditions. The highest reported value is less than 1.5 W/kg. Therefore, the measurement uncertainty table is not required.

7. System Validation

Tissue Verification

Table 7.1 Measured Tissue Parameters

		750 MHz Head		900 MHz Head		1750 MHz Head	
Date(s)		Sep. 6, 2023		Sep. 5, 2023		Sep. 7, 2023	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: ϵ		41.94	41.19	41.50	40.78	40.08	39.35
Conductivity: σ		0.89	0.92	0.97	0.99	1.37	1.38
		1900 MHz Head		2550 MHz Head		3600 MHz Head	
Date(s)		Aug. 31, 2023		Sep. 1, 2023		Sep. 6, 2023	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: ϵ		40.00	39.44	39.07	38.88	37.81	37.10
Conductivity: σ		1.40	1.43	1.91	1.94	3.02	3.04
		2450 MHz Head		5250 MHz Head		5600 MHz Head	
Date(s)		Sep. 15, 2023		Sep. 15, 2023		Sep. 15, 2023	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: ϵ		39.20	38.63	35.93	35.15	35.53	34.73
Conductivity: σ		1.80	1.83	4.71	4.74	5.07	5.12
		5750 MHz Head					
Date(s)		Sep. 15, 2023					
Liquid Temperature (°C)	20.0	Target	Measured				
Dielectric Constant: ϵ		35.36	34.55				
Conductivity: σ		5.22	5.29				

See Appendix A for data printout.

Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at the test frequency by using the system kit. Power is normalized to 1 watt. (Graphic Plots Attached)

Table 7.2 System Dipole Validation Target & Measured

	Test Frequency	Targeted SAR _{1g} (W/kg)	Measure SAR _{1g} (W/kg)	Tissue Used for Verification	Deviation (%)	Plot Number
06-Sep-2023	750 MHz	8.57	8.61	Head	+ 0.47	1
05-Sep-2023	900 MHz	11.20	11.80	Head	+ 5.36	2
07-Sep-2023	1750 MHz	37.70	38.20	Head	+ 1.33	3
31-Aug-2023	1900 MHz	40.40	41.50	Head	+ 2.72	4
01-Sep-2023	2550 MHz	55.30	56.90	Head	+ 2.89	5
06-Sep-2023	3700 MHz	68.30	69.40	Head	+ 1.61	6
15-Sep-2023	2450 MHz	54.10	54.90	Head	+ 1.48	7
15-Sep-2023	5250 MHz	79.50	80.80	Head	+ 1.64	8
15-Sep-2023	5600 MHz	83.20	84.10	Head	+ 1.08	9
15-Sep-2023	5750 MHz	80.50	81.20	Head	+ 0.87	10

See Appendix A for data plots.

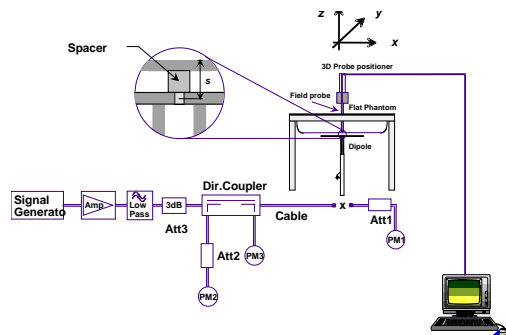


Figure 7.1 Dipole Validation Test Setup

8. LTE Document Checklist

- 1) Identify the operating frequency range of each LTE transmission band used by the device

LTE Operating Band	Uplink (transmit)	Downlink (Receive)	Duplex mode (FDD/TDD)
	Low - high	Low - high	
2	1850-1910	1930-1990	FDD
4	1710-1755	2110-2155	FDD
5	824-849	869-894	FDD
7	2500-2570	2620-2690	FDD
12	699-716	729-746	FDD
13	777-787	746-756	FDD
14	788-798	758-768	FDD
17	704-716	734-746	FDD
25	1850-1915	1930-1995	FDD
26	814-849	859-894	FDD
38	2570-2620	2570-2620	TDD
41	2496-2690	2496-2690	TDD
48	3550-3700	3550-3700	TDD
66	1710-1780	2110-2200	FDD
71	663-698	617-652	FDD

- 2) Identify the channel bandwidths used in each frequency band; 1.4, 3, 5, 10, 15, 20 MHz etc

LTE Band Class	Bandwidth (MHz)	Frequency or Freq. Band (MHz)
2	1.4, 3, 5, 10, 15, 20	1850-1910 MHz
4	1.4, 3, 5, 10, 15, 20	1710-1755 MHz
5	1.4, 3, 5, 10	824-849 MHz
7	5, 10, 15, 20	2500-2570 MHz
12	1.4, 3, 5, 10	699-716 MHz
13	5, 10	777-787 MHz
14	5, 10	788-798 MHz
17	5, 10	704-716 MHz
25	1.4, 3, 5, 10, 15, 20	1850-1915 MHz
26	1.4, 3, 5, 10, 15	814-849 MHz
38	5, 10, 15, 20	2570-2620 MHz
41	5, 10, 15, 20	2496-2690 MHz
48	5, 10, 15, 20	3550-3700 MHz
66	1.4, 3, 5, 10, 15, 20	1710-1780 MHz
71	5, 10, 15, 20	663-698 MHz

3) Identify the high, middle and low (H, M, L) channel numbers and frequencies in each LTE frequency band

LTE Band Class	Bandwidth (MHz)	Frequency (MHz)/Channel #					
		Low		Mid		High	
2	1.4	1850.7	18607	1880.0	18900	1909.3	19193
2	3	1851.5	18615	1880.0	18900	1908.5	19185
2	5	1852.5	18625	1880.0	18900	1907.5	19175
2	10	1855.0	18650	1880.0	18900	1905.0	19150
2	15	1857.5	18675	1880.0	18900	1902.5	19125
2	20	1860.0	18700	1880.0	18900	1900.0	19100
4	1.4	1710.7	19957	1732.5	20175	1754.3	20393
4	3	1711.5	19965	1732.5	20175	1753.5	20385
4	5	1712.5	19975	1732.5	20175	1752.5	20375
4	10	1715.0	20000	1732.5	20175	1750.0	20350
4	15	1717.5	20025	1732.5	20175	1747.5	20325
4	20	1720.0	20050	1732.5	20175	1745.0	20300
5	1.4	824.7	20407	836.5	20525	848.3	20643
5	3	825.5	20415	836.5	20525	847.5	20635
5	5	826.5	20425	836.5	20525	846.5	20625
5	10	829.0	20450	836.5	20525	844.0	20600
7	5	2502.5	20775	2535.0	21100	2567.5	21425
7	10	2505.0	20800	2535.0	21100	2565.0	21400
7	15	2507.5	20825	2535.0	21100	2562.5	21375
7	20	2510.0	20850	2535.0	21100	2560.0	21350
12	1.4	699.7	23017	707.5	23095	715.3	23173
12	3	700.5	23025	707.5	23095	714.5	23165
12	5	701.5	23035	707.5	23095	713.5	23155
12	10	704.0	23060	707.5	23095	711.0	23130
13	5	779.5	23205	782.0	23230	784.5	23225
13	10	-----	-----	782.0	23230	-----	-----
14	5	790.5	23305	793.0	23330	795.5	23355
14	10	-----	-----	793.0	23330	-----	-----
17	5	706.5	23755	710.0	23790	713.5	23825
17	10	709.0	23780	710.0	23790	711.0	23790
25	1.4	1850.7	26047	1882.5	26365	1914.3	26683
25	3	1851.5	26055	1882.5	26365	1913.5	26675
25	5	1852.5	26065	1882.5	26365	1912.5	26665
25	10	1855.0	26090	1882.5	26365	1910.0	26640
25	15	1857.5	26115	1882.5	26365	1907.5	26615
25	20	1860.0	26140	1882.5	26365	1905.0	26590
26	1.4	814.7	26697	831.5	26865	848.3	27033
26	3	815.5	26705	831.5	26865	847.5	27025
26	5	816.5	26715	831.5	26865	846.5	27015
26	10	819.0	26740	831.5	26865	844.0	26990
26	15	821.5	26765	831.5	26865	841.5	26995
38	5	2572.5	37775	2595.0	38000	2602.5	38075
38	10	2575.0	37800	2595.0	38000	2605.0	38100
38	15	2577.5	37825	2595.0	38000	2607.5	38125
38	20	2580.0	37850	2595.0	38000	2610.0	38150
41	5	2498.5	39675	2593	40620	2687.5	41565
41	10	2501.0	39700	2593	40620	2685.0	41540
41	15	2503.5	39725	2593	40620	2682.5	41515
41	20	2506.0	39750	2593	40620	2680.0	41490
48	5	3552.5	55265	3526.0	55990	3697.5	56715
48	10	3555.0	55290	3526.0	55990	3695.0	56690
48	15	3557.5	55315	3526.0	55990	3692.5	56665
48	20	3560.0	55340	3526.0	55990	3690.0	56640
66	1.4	1710.7	131979	1755.0	132422	1779.3	132665
66	3	1711.5	131987	1755.0	132422	1778.5	132657
66	5	1712.5	131997	1755.0	132422	1777.4	132646
66	10	1716.1	132033	1755.0	132422	1774.9	132621
66	15	1717.5	132047	1755.0	132422	1772.4	132596
66	20	1720.0	132072	1755.0	132422	1769.9	132571
71	5	665.5	133147	680.5	133297	695.5	133447
71	10	668.0	133172	680.5	133297	693.0	133422
71	15	670.5	133197	680.5	133297	690.5	133397
71	20	673.0	133222	680.5	133297	688.0	133372

- 4) Specify the UE category and uplink modulations used:
 - UE Category: 3
 - Uplink modulations: QPSK and 16QAM
- 5) Include descriptions of the LTE transmitter and antenna implementation; and also identify whether it is a standalone transmitter operating independently of other wireless transmitters in the device or sharing hardware components and/or antenna(s) with other transmitters etc

The device has 8 antennas:

- 6 – 3G, 4G, FR1 (Transmit and Receive) Antennas
- 2 – WiFi (Transmit and Receive) Antennas

- 6) Identify the LTE voice/data requirements in each operating mode and exposure condition with respect to head and body test configurations, antenna locations, handset flip-cover or slide positions, antenna diversity conditions etc

The device is a data only. Data mode was tested in each operating mode and exposure condition in the body configuration. See test setup photos to see all configurations tested.

- 7) Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design:
 - a) Only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards

MPR is mandatory, built-in by design on all production units. It was enabled during testing.

Modulation	Channel Bandwidth/transmission Bandwidth Configuration (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

- b) A-MPR (additional MPR) must be disabled
- c) A-MPR was disabled during testing.

- 8) Include the maximum average conducted output power measured on the required test channels for each channel bandwidth and UL modulation used in each frequency band:

The maximum average conducted output power measured for the testing is listed on pages 32-68 of this report. The below table shows the factory set point with the allowable tolerance.

Band	Technology	3GPP Nominal Power dBm	Calibrated Nominal Power dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
Band 2 – 1900 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 4 – 1750 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 5 – 850 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 7 – 2550 MHz	LTE	23.0	23.0	+1.8/-1.0	22.0	24.8
Band 12 – 750 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 13 – 750 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 14 – 750 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 17 – 750 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 25 – 1900 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 26 – 850 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 38 – 2550 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 41 – 2550 MHz PC3	LTE	23.0	23.0	+1.8/-1.0	22.0	24.8
Band 41 – 2550 MHz PC2	LTE	25.0	25.0	+1.0/-1.0	24.0	26.0
Band 48 – 3600 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 66 – 1750 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0
Band 71 – 600 MHz	LTE	23.0	23.0	+1.0/-1.0	22.0	24.0

- 9) Identify all other U.S. wireless operating modes (3G, Wi-Fi, WiMax, Bluetooth etc), device/exposure configurations (head and body, antenna and handset flip-cover or slide positions, antenna diversity conditions etc.) and frequency bands used for these modes

Other wireless modes:

Band	Technology	3GPP Nominal Power dBm	Calibrated Nominal Power dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
Band 5 – 850 MHz	WCDMA/HSPA	23.5	23.5	+1.0/-1.0	22.5	24.5
Band 4 – 1750 MHz	WCDMA/HSPA	23.5	23.5	+1.0/-1.0	22.5	24.5
Band 2 – 1900 MHz	WCDMA/HSPA	23.5	23.5	+1.0/-1.0	22.5	24.5
WLAN – 2.4 GHz	802.11b	N/A	N/A	N/A	N/A	18.0
WLAN – 2.4 GHz	802.11g	N/A	N/A	N/A	N/A	16.0
WLAN – 2.4 GHz	802.11n20	N/A	N/A	N/A	N/A	15.0
WLAN – 2.4 GHz	802.11n40	N/A	N/A	N/A	N/A	13.0
WLAN – 5 GHz UNII Band I,IIA,IIC,III	802.11a	N/A	N/A	N/A	N/A	15.0
WLAN – 5 GHz UNII Band I,IIA,IIC,III	802.11n20	N/A	N/A	N/A	N/A	14.0
WLAN – 5 GHz UNII Band I,IIA,IIC,III	802.11n40	N/A	N/A	N/A	N/A	12.0
WLAN – 5 GHz UNII Band I,IIA,IIC,III	802.11ac80	N/A	N/A	N/A	N/A	10.0
BT – 2.4 GHz	Bluetooth	N/A	N/A	N/A	N/A	4.0

- 10) Include the maximum average conducted output power measured for the other wireless modes and frequency bands.

The maximum average conducted output power measured for the testing is listed on pages 28 and 69-71 of this report. The table in item 9 shows the factory set point with the allowable tolerance.

- 11) When power reduction is applied to certain wireless modes to satisfy SAR compliance for simultaneous transmission conditions, other equipment certification or operating requirements, include the maximum average conducted output power measured in each power reduction mode applicable to the simultaneous voice/data transmission configurations for such wireless configurations and frequency bands; and also include details of the power reduction implementation and measurement setup

Power reduction is not required to satisfy SAR compliance.

- 12) Include descriptions of the test equipment, test software, built-in test firmware etc. required to support testing the device when power reduction is applied to one or more transmitters/antennas for simultaneous voice/data transmission

Power reduction is not required to satisfy SAR compliance.

- 13) When appropriate, include a SAR test plan proposal with respect to the above

Power reduction is not required to satisfy SAR compliance.

- 14) If applicable, include preliminary SAR test data and/or supporting information in laboratory testing inquiries to address specific issues and concerns or for requesting further test reduction considerations appropriate for the device; for example, simultaneous transmission configurations.

Not applicable.

9. SAR Test Data Summary

See Measurement Result Data Pages

See Appendix B for SAR Test Data Plots.
See Appendix C for SAR Test Setup Photos.

Procedures Used To Establish Test Signal

The device was either placed into simulated transmit mode using the manufacturer’s test codes or the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

Device Test Condition

In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power unless otherwise noted. If a conducted power deviation of more than 5% occurred, the test was repeated. The power drift of each test is measured at the start of the test and again at the end of the test. The drift percentage is calculated by the formula $((end/start)-1)*100$ and rounded to three decimal places. The drift percentage is calculated into the resultant SAR value on the data sheet for each test.

Required Test Positions						
Antenna	Top	Back	Front	Left	Right	Bottom
Ant M1	No	Yes	No	No	No	No
Ant M3	No	Yes	No	No	No	No
Ant M2	No	Yes	No	No	No	No
Ant M4	No	Yes	No	No	No	No
Ant M5	No	Yes	No	No	No	No
Ant M6	No	Yes	No	No	No	No
WiFi W1	No	Yes	No	No	No	No
WiFi W2	No	Yes	No	No	No	No

All testing was conducted with a 15 mm gap. The 15 mm gap was used to simulate the case the device is carried in when in use by the user. The 15 mm gap is the thickness of the backpack.

The Bluetooth testing was excluded from SAR testing due to the low power of the transmitter. The maximum power of the Bluetooth transmitter is 4 dBm (2.5 mW).

For the FCC, the exclusion was based on the calculation in KDB447498 v06 section 4.3.1 a). The following is the formula for the Bluetooth transmitter.

$$[(2.5 \text{ mW})/(5 \text{ mm})]^{\sqrt{2.48}}=0.79 \text{ which is equal to or less than } 3.0$$

For ISED, the exclusion is based on RSS-102 Issue 6 section 6.3 table 11. Therefore, for a separation distance of 5 mm in the table, the exclusion limit is 3 mW. The Bluetooth transmitter have a maximum transmit power of 2.5 mW which is below the 3 mW threshold. Therefore, the Bluetooth transmitter is excluded from SAR testing.

WCDMA Conducted Power

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA SETUP CONFIGURATION:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

SETUP CONFIGURATION

HSUPA SETUP CONFIGURATION:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{COI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{COI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

SETUP CONFIGURATION

DC-HSDPA 3GPP RELEASE 8 SETUP CONFIGURATION:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table,
C10.1.4, quoted from the TS
34.121 a). Subtest 1:
 $\beta_c/\beta_d=2/15$
b). Subtest 2:
 $\beta_c/\beta_d=12/15$ c).
Subtest 3: $\beta_c/\beta_d=15/8$
d). Subtest 4:
 $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{inf})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

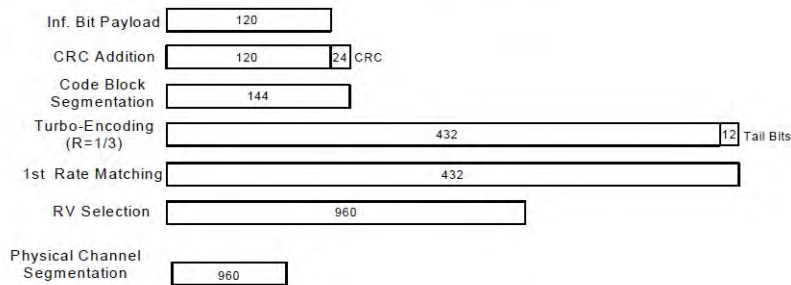


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

SETUP CONFIGURATION

<WCDMA Conducted Power>

GENERAL NOTE:

- Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
- Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.


Full Power

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938	1537	1638	1738	4357	4407	4458			
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	AMR 12.2Kbps	23.65	23.55	23.92	24.50	23.74	23.87	23.97	24.50	23.57	23.88	23.75	24.50
3GPP Rel 99	RMC 12.2Kbps	23.75	23.87	23.74	24.50	23.68	23.83	23.62	24.50	23.97	23.58	24.00	24.50
3GPP Rel 6	HSDPA Subtest-1	22.55	22.71	22.60	23.50	22.59	22.73	22.70	23.50	22.93	22.88	22.83	23.50
3GPP Rel 6	HSDPA Subtest-2	22.58	22.58	22.53	23.50	22.79	22.52	22.53	23.50	22.60	22.61	22.91	23.50
3GPP Rel 6	HSDPA Subtest-3	23.36	23.06	23.11	24.00	23.48	23.45	23.17	24.00	23.50	23.32	23.26	24.00
3GPP Rel 6	HSDPA Subtest-4	23.20	23.31	23.13	24.00	23.06	23.07	23.04	24.00	23.14	23.44	23.03	24.00
3GPP Rel 8	DC-HSDPA Subtest-1	22.71	22.50	22.55	23.50	22.67	22.56	22.91	23.50	22.54	22.52	22.60	23.50
3GPP Rel 8	DC-HSDPA Subtest-2	22.54	22.68	22.60	23.50	22.64	22.95	22.92	23.50	22.79	22.96	22.84	23.50
3GPP Rel 8	DC-HSDPA Subtest-3	23.26	23.45	23.41	24.00	23.20	23.27	23.20	24.00	23.26	23.28	23.00	24.00
3GPP Rel 8	DC-HSDPA Subtest-4	23.28	23.14	23.50	24.00	23.21	23.10	23.45	24.00	23.12	23.19	23.25	24.00
3GPP Rel 6	HSUPA Subtest-1	22.54	22.63	22.97	23.50	22.91	22.95	22.81	23.50	22.77	22.99	22.95	23.50
3GPP Rel 6	HSUPA Subtest-2	20.65	20.79	20.73	21.50	20.54	20.57	20.98	21.50	20.79	20.64	20.53	21.50
3GPP Rel 6	HSUPA Subtest-3	21.62	21.91	21.67	22.50	21.51	21.93	21.99	22.50	21.56	21.83	21.82	22.50
3GPP Rel 6	HSUPA Subtest-4	20.89	20.75	20.97	21.50	20.54	20.70	20.68	21.50	20.99	20.73	20.94	21.50
3GPP Rel 6	HSUPA Subtest-5	22.98	22.86	22.76	23.50	22.64	22.77	22.98	23.50	22.93	22.73	22.52	23.50


LTE Conducted Power

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. LTE band 2/4/5/17/38 SAR test was covered by Band 25/66/26/12/41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
9. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

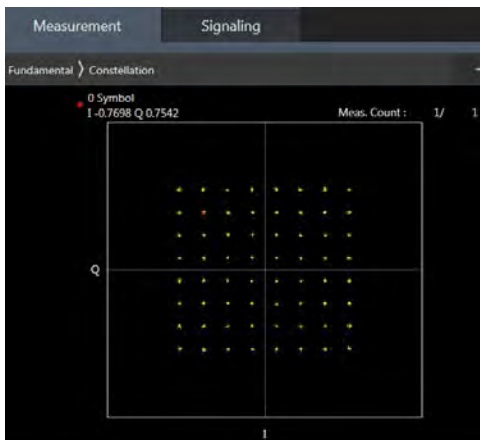

64QAM

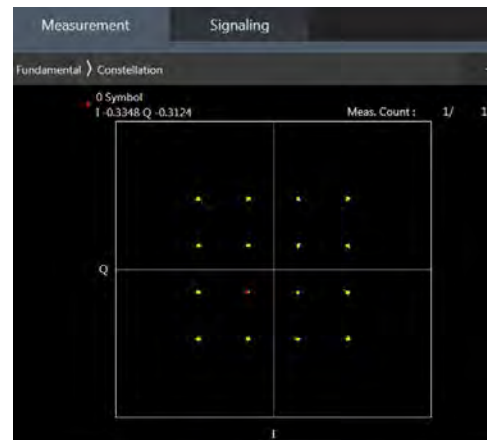

16QAM

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

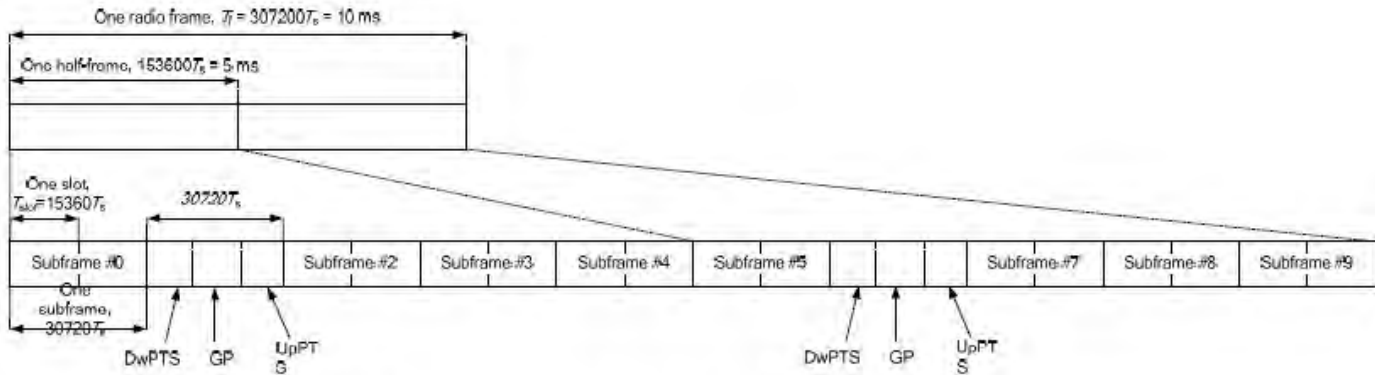


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$	-	-	-	-	-
9	$13168 \cdot T_s$	-	-	-	-	-

Special subframe (30720-T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720-T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
- vi. The device supports Power Class 3 uplink-downlink configurations 0 and 6, and Power Class 2 uplink-downlink configurations 1 to 5 operations for LTE Band 41.
- vii. The highest available duty cycle for Power Class 2 operation is 43.3% using UL-DL configuration 1, for Power Class 3 operation is 63.3% using UL-DL configuration 0. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR among all exposure condition.

Table 9.1 LTE Power Measurements

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM		
2	1.4 MHz	1	0	18607	1850.7	22.9	22.6		
				18900	1880.0	23.0	22.2		
				19193	1909.3	23.4	21.9		
			3	3	18607	1850.7	23.5	22.3	
					18900	1880.0	23.4	22.2	
					19193	1909.3	23.3	22.2	
				5	18607	1850.7	23.5	22.5	
					18900	1880.0	23.0	22.3	
					19193	1909.3	23.2	22.5	
		3	0	18607	1850.7	23.0	22.6		
				18900	1880.0	23.1	22.1		
				19193	1909.3	22.9	22.3		
			1	18607	1850.7	23.4	22.4		
				18900	1880.0	23.3	22.3		
				19193	1909.3	23.0	22.3		
			3	18607	1850.7	23.4	22.5		
				18900	1880.0	23.3	22.2		
				19193	1909.3	23.4	22.6		
		6	0	18607	1850.7	22.4	21.2		
				18900	1880.0	22.4	21.3		
				19193	1909.3	22.0	21.0		
		3 MHz	1	0	18615	1851.5	23.3	22.4	
					18900	1880.0	23.6	22.3	
					19185	1908.5	23.4	22.6	
	7				18615	1851.5	23.6	22.5	
					18900	1880.0	23.4	22.3	
					19185	1908.5	22.9	21.9	
	14			18615	1851.5	23.6	22.3		
				18900	1880.0	23.0	22.2		
				19185	1908.5	23.2	22.2		
				8	0	18615	1851.5	22.5	20.9
						18900	1880.0	22.0	21.2
						19185	1908.5	22.0	21.1
	7				18615	1851.5	22.1	21.1	
					18900	1880.0	22.0	21.0	
					19185	1908.5	22.6	21.5	
	14		18615	1851.5	22.2	21.3			
			18900	1880.0	22.1	21.5			
			19185	1908.5	22.3	21.2			
	15		0	18615	1851.5	22.1	21.3		
				18900	1880.0	22.3	20.9		
				19185	1908.5	22.4	21.1		

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
2	5 MHz	1	0	18625	1852.5	23.5	22.3	
				18900	1880.0	23.4	22.1	
				19175	1907.5	22.9	22.0	
			12	12	18625	1852.5	22.9	22.4
					18900	1880.0	23.2	22.0
					19175	1907.5	23.4	22.4
				24	18625	1852.5	23.1	22.4
					18900	1880.0	23.1	22.6
					19175	1907.5	23.2	22.5
		12	0	18625	1852.5	22.4	21.3	
				18900	1880.0	22.5	21.3	
				19175	1907.5	22.1	21.2	
			6	18625	1852.5	22.5	21.4	
				18900	1880.0	22.3	21.4	
				19175	1907.5	22.2	21.1	
				13	18625	1852.5	22.2	21.5
					18900	1880.0	22.0	21.0
					19175	1907.5	22.3	21.0
			25	0	18625	1852.5	22.1	21.4
					18900	1880.0	22.5	21.6
					19175	1907.5	22.5	21.2
		10 MHz	1	0	18650	1855.0	23.5	22.2
					18900	1880.0	23.0	22.4
					19150	1905.0	23.3	21.9
	24			18650	1855.0	23.3	22.3	
				18900	1880.0	23.3	22.0	
				19150	1905.0	23.3	22.2	
				49	18650	1855.0	23.3	22.2
					18900	1880.0	23.3	22.5
					19150	1905.0	23.4	22.4
	25			0	18650	1855.0	21.9	21.2
					18900	1880.0	22.0	21.2
					19150	1905.0	22.5	21.5
				13	18650	1855.0	22.1	21.3
					18900	1880.0	22.2	21.0
					19150	1905.0	22.3	21.4
			25		18650	1855.0	22.2	21.3
					18900	1880.0	22.0	21.6
					19150	1905.0	22.2	21.5
	50		0	18650	1855.0	22.5	21.3	
				18900	1880.0	22.2	20.9	
				19150	1905.0	22.4	21.3	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
2	15 MHz	1	0	18675	1857.5	23.0	22.6	
				18900	1880.0	23.5	22.3	
				19125	1902.5	23.3	22.1	
			37	18675	1857.5	23.3	22.5	
				18900	1880.0	23.6	22.0	
				19125	1902.5	23.1	22.3	
			74	18675	1857.5	23.3	22.5	
				18900	1880.0	22.9	22.0	
				19125	1902.5	23.2	22.3	
		36	0	18675	1857.5	22.4	21.2	
				18900	1880.0	22.1	21.1	
				19125	1902.5	22.0	21.3	
			19	18675	1857.5	21.9	21.6	
				18900	1880.0	22.5	20.9	
				19125	1902.5	22.1	21.2	
			39	18675	1857.5	22.0	21.5	
				18900	1880.0	22.3	21.5	
				19125	1902.5	22.0	21.4	
		75	0	18675	1857.5	21.9	20.9	
				18900	1880.0	22.4	21.6	
				19125	1902.5	22.2	21.4	
		20 MHz	1	0	18700	1860.0	23.0	22.3
					18900	1880.0	22.9	22.0
					19100	1900.0	23.2	22.1
	49			18700	1860.0	23.0	22.3	
				18900	1880.0	23.2	21.9	
				19100	1900.0	23.2	22.6	
	99			18700	1860.0	23.4	22.0	
				18900	1880.0	23.1	22.4	
				19100	1900.0	23.3	22.3	
	50			0	18700	1860.0	22.2	21.5
					18900	1880.0	22.1	21.6
					19100	1900.0	22.0	21.3
				24	18700	1860.0	22.3	21.5
					18900	1880.0	22.5	21.5
					19100	1900.0	22.3	21.4
			50	18700	1860.0	22.2	21.6	
				18900	1880.0	22.4	21.4	
				19100	1900.0	21.9	21.5	
	100		0	18700	1860.0	22.2	21.0	
				18900	1880.0	22.2	21.5	
				19100	1900.0	22.4	21.2	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
4	1.4 MHz	1	0	19957	1710.7	23.5	22.4	
				20175	1732.5	23.0	22.3	
				20393	1754.3	23.4	22.2	
			3	19957	1710.7	23.4	22.6	
				20175	1732.5	23.2	22.1	
				20393	1754.3	23.6	22.4	
			5	19957	1710.7	23.4	22.5	
				20175	1732.5	23.0	22.5	
				20393	1754.3	22.9	22.1	
		3	0	19957	1710.7	23.6	22.5	
				20175	1732.5	23.1	22.0	
				20393	1754.3	23.4	21.9	
			1	19957	1710.7	22.9	22.0	
				20175	1732.5	23.4	22.2	
				20393	1754.3	23.0	22.3	
			3	19957	1710.7	23.3	22.5	
				20175	1732.5	23.2	22.1	
				20393	1754.3	22.9	22.2	
		6	0	19957	1710.7	22.6	21.2	
				20175	1732.5	22.6	21.1	
				20393	1754.3	22.2	21.4	
		3 MHz	1	0	19965	1711.5	22.9	22.6
					20175	1732.5	23.0	22.2
					20385	1753.5	23.5	22.2
	7			19965	1711.5	23.0	22.1	
				20175	1732.5	23.4	22.1	
				20385	1753.5	23.2	22.2	
	14			19965	1711.5	23.5	22.2	
				20175	1732.5	23.6	22.5	
				20385	1753.5	23.1	22.1	
	8			0	19965	1711.5	22.4	21.6
					20175	1732.5	22.1	21.1
					20385	1753.5	22.6	21.6
			7	19965	1711.5	22.0	21.2	
				20175	1732.5	22.5	21.2	
				20385	1753.5	22.2	20.9	
			14	19965	1711.5	22.5	21.1	
				20175	1732.5	22.3	21.3	
				20385	1753.5	22.6	21.4	
	15		0	19965	1711.5	21.9	21.1	
				20175	1732.5	22.2	21.1	
				20385	1753.5	22.3	21.0	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
4	5 MHz	1	0	19975	1712.5	23.6	22.1	
				20175	1732.5	23.5	22.3	
				20375	1752.5	23.0	22.6	
			12	19975	1712.5	23.1	22.1	
				20175	1732.5	23.1	22.3	
				20375	1752.5	23.3	22.6	
			24	19975	1712.5	23.0	22.5	
				20175	1732.5	23.1	22.2	
				20375	1752.5	23.0	22.6	
		12	0	19975	1712.5	22.6	21.4	
				20175	1732.5	22.6	21.1	
				20375	1752.5	22.5	21.3	
			6	19975	1712.5	22.4	21.5	
				20175	1732.5	22.5	21.5	
				20375	1752.5	21.9	21.0	
			13	19975	1712.5	22.4	21.6	
				20175	1732.5	22.2	21.1	
				20375	1752.5	22.1	21.2	
			25	0	19975	1712.5	22.3	21.0
					20175	1732.5	22.5	21.0
					20375	1752.5	22.3	21.0
		10 MHz	1	0	20000	1715.0	23.1	22.1
					20175	1732.5	23.3	22.2
					20350	1750.0	23.4	22.5
	24			20000	1715.0	23.1	22.3	
				20175	1732.5	23.4	22.4	
				20350	1750.0	23.1	22.6	
	49			20000	1715.0	23.0	22.4	
				20175	1732.5	23.4	22.0	
				20350	1750.0	23.1	22.2	
	25			0	20000	1715.0	22.4	21.5
					20175	1732.5	22.2	21.4
					20350	1750.0	22.5	21.4
			13	20000	1715.0	22.1	21.3	
				20175	1732.5	22.1	21.4	
				20350	1750.0	22.1	21.1	
			25	20000	1715.0	22.3	21.2	
				20175	1732.5	22.2	21.0	
				20350	1750.0	22.5	21.3	
	50		0	20000	1715.0	22.1	21.5	
				20175	1732.5	22.1	21.0	
				20350	1750.0	22.2	21.0	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
4	15 MHz	1	0	20025	1717.5	23.3	22.4	
				20175	1732.5	23.5	22.1	
				20325	1747.5	23.1	22.2	
			37	20025	1717.5	23.5	22.3	
				20175	1732.5	23.3	22.3	
				20325	1747.5	23.0	22.6	
			74	20025	1717.5	23.1	22.6	
				20175	1732.5	23.1	22.3	
				20325	1747.5	23.1	22.1	
		36	0	20025	1717.5	22.1	21.4	
				20175	1732.5	22.4	21.2	
				20325	1747.5	22.2	21.2	
			19	20025	1717.5	22.3	21.5	
				20175	1732.5	21.9	20.9	
				20325	1747.5	22.4	21.2	
			39	20025	1717.5	22.3	20.9	
				20175	1732.5	22.4	21.2	
				20325	1747.5	22.5	21.3	
			75	0	20025	1717.5	22.5	21.2
					20175	1732.5	22.5	21.0
					20325	1747.5	22.4	21.2
		20 MHz	1	0	20050	1720.0	23.0	22.2
					20175	1732.5	23.3	22.5
					20300	1745.0	23.5	22.2
	49			20050	1720.0	23.6	22.2	
				20175	1732.5	23.3	22.1	
				20300	1745.0	23.0	22.4	
	99			20050	1720.0	23.4	22.4	
				20175	1732.5	23.3	22.5	
				20300	1745.0	23.2	22.3	
	50			0	20050	1720.0	22.0	21.2
					20175	1732.5	22.5	21.2
					20300	1745.0	22.2	21.0
			24	20050	1720.0	22.1	20.9	
				20175	1732.5	22.3	21.4	
				20300	1745.0	22.6	20.9	
			50	20050	1720.0	22.1	21.1	
				20175	1732.5	22.0	21.6	
				20300	1745.0	22.2	21.1	
	100		0	20050	1720.0	22.3	21.2	
				20175	1732.5	22.2	21.4	
				20300	1745.0	22.5	21.1	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
5	1.4 MHz	1	0	20407	824.7	23.0	22.2	
				20525	836.5	23.2	22.3	
				20643	848.3	23.5	22.1	
			3	20407	824.7	23.4	22.0	
					20525	836.5	23.0	22.1
					20643	848.3	23.3	22.6
			5	20407	824.7	23.4	22.0	
					20525	836.5	23.5	22.5
					20643	848.3	23.5	22.1
		3	0	20407	824.7	22.9	22.4	
				20525	836.5	23.4	22.1	
				20643	848.3	23.4	22.3	
			1	20407	824.7	23.0	22.5	
					20525	836.5	23.1	22.3
					20643	848.3	23.3	21.9
			3	20407	824.7	23.2	22.4	
					20525	836.5	23.0	22.3
					20643	848.3	23.5	22.1
		6	0	20407	824.7	22.2	21.4	
				20525	836.5	22.3	21.0	
				20643	848.3	22.3	21.2	
		3 MHz	1	0	20415	825.5	23.1	22.0
					20525	836.5	23.3	22.2
					20635	847.5	22.9	22.2
	7			20415	825.5	23.1	22.5	
					20525	836.5	23.0	22.4
					20635	847.5	23.4	22.1
	14			20415	825.5	23.3	22.3	
					20525	836.5	23.3	22.2
					20635	847.5	23.1	22.4
	8			0	20415	825.5	22.5	21.5
					20525	836.5	22.6	21.3
					20635	847.5	22.3	21.1
			7	20415	825.5	22.4	21.3	
					20525	836.5	22.5	21.0
					20635	847.5	22.0	20.9
			14	20415	825.5	22.1	21.2	
					20525	836.5	22.1	21.2
					20635	847.5	22.4	21.1
	15		0	20415	825.5	22.0	21.5	
				20525	836.5	22.6	21.5	
				20635	847.5	22.1	21.0	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
5	5 MHz	1	0	20425	826.5	23.4	22.4	
				20525	836.5	23.0	22.2	
				20625	846.5	23.0	22.3	
			12	20425	826.5	23.1	22.5	
				20525	836.5	23.2	22.5	
				20625	846.5	23.4	22.0	
			24	20425	826.5	23.0	22.0	
				20525	836.5	23.5	22.0	
				20625	846.5	23.4	22.0	
		12	0	20425	826.5	22.4	21.3	
				20525	836.5	22.1	21.2	
				20625	846.5	22.1	21.0	
			6	20425	826.5	22.3	21.4	
				20525	836.5	22.2	21.1	
				20625	846.5	21.9	21.4	
			13	20425	826.5	22.5	21.1	
				20525	836.5	22.3	21.3	
				20625	846.5	22.4	21.2	
		25	0	20425	826.5	22.3	21.1	
				20525	836.5	22.4	20.9	
				20625	846.5	22.0	21.2	
	10 MHz	1	0	20450	829.0	23.0	22.2	
				20525	836.5	23.1	22.6	
				20600	844.0	23.0	22.2	
			24	20450	829.0	23.1	22.3	
				20525	836.5	23.3	22.2	
				20600	844.0	23.6	21.9	
			49	20450	829.0	23.4	22.0	
				20525	836.5	23.0	22.6	
				20600	844.0	23.1	22.1	
			25	0	20450	829.0	22.5	21.2
					20525	836.5	22.2	21.0
					20600	844.0	22.0	21.0
		13		20450	829.0	22.5	21.2	
				20525	836.5	22.2	21.2	
				20600	844.0	22.4	21.0	
		25		20450	829.0	22.3	21.0	
				20525	836.5	22.2	21.5	
				20600	844.0	22.4	21.3	
		50	0	20450	829.0	22.1	21.6	
				20525	836.5	22.3	21.0	
				20600	844.0	22.5	20.9	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
7	5 MHz	1	0	20775	2502.5	23.3	22.3	
				21100	2535.0	22.9	22.1	
				21425	2567.5	23.1	22.3	
			12	20775	2502.5	23.3	22.1	
				21100	2535.0	23.4	22.0	
				21425	2567.5	23.4	22.0	
			24	20775	2502.5	23.4	22.2	
				21100	2535.0	23.2	22.2	
				21425	2567.5	23.0	22.6	
		12	0	20775	2502.5	22.5	21.5	
				21100	2535.0	22.6	21.1	
				21425	2567.5	22.2	21.3	
			6	20775	2502.5	22.4	21.5	
				21100	2535.0	22.2	21.3	
				21425	2567.5	22.3	20.9	
			13	20775	2502.5	22.3	20.9	
				21100	2535.0	21.9	21.4	
				21425	2567.5	22.5	21.5	
		25	0	20775	2502.5	22.5	21.1	
				21100	2535.0	22.3	21.3	
				21425	2567.5	22.4	21.0	
		10 MHz	1	0	20800	2505.0	23.3	22.2
					21100	2535.0	23.3	22.2
					21400	2565.0	23.3	22.0
	24			20800	2505.0	23.5	22.3	
				21100	2535.0	23.2	22.5	
				21400	2565.0	22.9	22.5	
	49			20800	2505.0	23.3	22.4	
				21100	2535.0	23.6	22.1	
				21400	2565.0	23.3	22.4	
	25			0	20800	2505.0	22.3	21.2
					21100	2535.0	22.4	21.2
					21400	2565.0	22.5	21.5
			13	20800	2505.0	22.2	21.3	
				21100	2535.0	22.4	21.1	
				21400	2565.0	22.0	21.2	
			25	20800	2505.0	21.9	20.9	
				21100	2535.0	22.3	21.3	
				21400	2565.0	22.4	21.5	
	50		0	20800	2505.0	22.2	21.1	
				21100	2535.0	22.6	21.6	
				21400	2565.0	22.5	21.2	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
7	15 MHz	1	0	20825	2507.5	23.4	22.2	
				21100	2535.0	23.3	22.3	
				21375	2562.5	23.2	22.5	
			37	20825	2507.5	23.0	22.1	
				21100	2535.0	23.1	22.0	
				21375	2562.5	23.4	22.4	
			74	20825	2507.5	23.5	21.9	
				21100	2535.0	23.1	22.0	
				21375	2562.5	23.6	22.6	
		36	0	20825	2507.5	22.4	21.2	
				21100	2535.0	22.3	21.4	
				21375	2562.5	22.2	21.0	
			19	20825	2507.5	22.0	21.3	
				21100	2535.0	22.2	21.3	
				21375	2562.5	22.0	21.5	
			39	20825	2507.5	22.1	21.1	
				21100	2535.0	22.3	21.3	
				21375	2562.5	22.4	20.9	
			75	0	20825	2507.5	22.3	21.1
					21100	2535.0	22.1	21.0
					21375	2562.5	22.0	21.1
		20 MHz	1	0	20850	2510.0	23.4	22.3
					21100	2535.0	23.1	22.4
					21350	2560.0	23.5	22.1
	49			20850	2510.0	23.4	22.3	
				21100	2535.0	23.5	22.5	
				21350	2560.0	23.4	22.3	
	99			20850	2510.0	23.0	22.1	
				21100	2535.0	23.4	22.2	
				21350	2560.0	23.4	21.9	
	50			0	20850	2510.0	22.3	21.4
					21100	2535.0	22.3	21.6
					21350	2560.0	22.2	21.0
			24	20850	2510.0	22.1	21.3	
				21100	2535.0	22.6	21.6	
				21350	2560.0	22.0	21.1	
			50	20850	2510.0	22.5	21.4	
				21100	2535.0	22.5	21.1	
				21350	2560.0	22.1	21.3	
	100		0	20850	2510.0	21.9	21.3	
				21100	2535.0	22.4	21.2	
				21350	2560.0	22.2	21.4	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
12	1.4 MHz	1	0	23017	699.7	23.3	22.5
				23095	707.5	23.4	22.4
				23173	715.3	23.2	22.4
			3	23017	699.7	23.3	22.1
				23095	707.5	23.4	22.5
				23173	715.3	23.3	22.2
		5	23017	699.7	23.4	22.4	
			23095	707.5	23.2	22.4	
			23173	715.3	23.5	21.9	
		3	0	23017	699.7	23.2	22.0
				23095	707.5	23.1	22.1
				23173	715.3	23.5	22.1
			1	23017	699.7	23.1	22.0
				23095	707.5	23.5	21.9
				23173	715.3	23.5	22.4
			3	23017	699.7	23.1	22.1
				23095	707.5	23.4	22.0
				23173	715.3	23.3	22.3
	6	0	23017	699.7	22.3	21.5	
			23095	707.5	22.2	21.5	
			23173	715.3	22.3	21.0	
	3 MHz	1	0	23025	700.5	23.6	22.4
				23095	707.5	23.1	22.0
				23165	714.5	23.2	22.1
			7	23025	700.5	23.0	22.4
				23095	707.5	23.0	22.1
				23165	714.5	23.4	22.4
			14	23025	700.5	23.4	22.4
				23095	707.5	23.4	22.2
				23165	714.5	23.0	22.5
		8	0	23025	700.5	22.1	21.4
				23095	707.5	22.3	21.4
				23165	714.5	22.0	20.9
			7	23025	700.5	22.5	21.5
				23095	707.5	22.3	21.1
				23165	714.5	22.5	21.5
		14	23025	700.5	22.0	21.0	
			23095	707.5	22.2	21.1	
			23165	714.5	22.5	21.5	
		15	0	23025	700.5	22.5	21.2
				23095	707.5	22.1	21.6
				23165	714.5	22.2	21.3

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM		
12	5 MHz	1	0	23035	701.5	23.5	22.0		
				23095	707.5	22.9	22.3		
				23155	713.5	22.9	22.6		
			12	23035	701.5	23.1	21.9		
					23095	707.5	22.9	22.6	
					23155	713.5	23.4	22.0	
			24	23035	701.5	23.5	22.1		
					23095	707.5	23.0	22.4	
					23155	713.5	22.9	22.1	
		12	0	23035	701.5	22.6	21.3		
					23095	707.5	21.9	21.5	
					23155	713.5	22.5	20.9	
				6	23035	701.5	22.3	21.2	
						23095	707.5	22.0	20.9
						23155	713.5	21.9	21.0
			13	23035	701.5	22.0	21.6		
					23095	707.5	22.5	21.3	
					23155	713.5	22.4	21.3	
			25	0	23035	701.5	22.3	21.6	
						23095	707.5	22.2	21.1
						23155	713.5	22.0	21.5
	10 MHz	1	0	23060	704.0	23.5	22.3		
					23095	707.5	23.6	22.5	
					23130	711.0	23.0	21.9	
				24	23060	704.0	22.9	21.9	
						23095	707.5	22.9	22.2
						23130	711.0	22.9	22.4
			49	23060	704.0	23.2	22.2		
					23095	707.5	23.2	21.9	
					23130	711.0	23.3	21.9	
			25	0	23060	704.0	22.1	21.1	
						23095	707.5	22.6	21.3
						23130	711.0	22.4	21.1
		13			23060	704.0	22.1	21.5	
						23095	707.5	22.4	21.1
						23130	711.0	22.1	21.4
		25		23060	704.0	21.9	21.4		
					23095	707.5	22.2	21.2	
					23130	711.0	22.4	21.4	
		50	0	23060	704.0	22.6	21.2		
					23095	707.5	22.5	21.6	
					23130	711.0	21.9	21.4	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
13	5 MHz	1	0	23205	779.5	23.2	22.6
				23230	782.0	23.4	22.1
				23129	784.5	23.3	22.4
			12	23205	779.5	23.5	22.0
				23230	782.0	23.3	22.1
				23129	784.5	23.6	21.9
			24	23205	779.5	23.5	22.4
				23230	782.0	23.3	22.1
				23129	784.5	23.6	22.3
		12	0	23205	779.5	22.4	21.2
				23230	782.0	22.0	21.5
				23129	784.5	22.5	21.4
			6	23205	779.5	22.1	21.3
				23230	782.0	22.0	21.5
				23129	784.5	22.1	21.5
			13	23205	779.5	22.0	21.5
				23230	782.0	22.3	21.4
				23129	784.5	22.0	21.2
	25	0	23205	779.5	22.0	21.6	
			23230	782.0	22.5	21.3	
			23129	784.5	22.5	20.9	
	10 MHz	1	0	23230	782.0	23.5	22.5
			24	23230	782.0	23.3	22.2
			49	23230	782.0	23.4	22.2
		25	0	23230	782.0	22.0	21.5
			13	23230	782.0	21.9	21.2
			25	23230	782.0	22.4	21.5
		50	0	23230	782.0	22.5	21.1

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
14	5 MHz	1	0	23305	790.5	23.0	21.9
				23330	793.0	23.5	22.0
				23355	795.5	23.5	22.5
			12	23305	790.5	23.2	22.5
				23330	793.0	23.5	21.9
				23355	795.5	23.2	22.0
		24	23305	790.5	22.9	22.4	
			23330	793.0	23.4	21.9	
			23355	795.5	23.3	22.0	
		12	0	23305	790.5	22.1	21.6
				23330	793.0	22.6	21.5
				23355	795.5	22.1	21.3
			6	23305	790.5	22.5	21.4
				23330	793.0	22.0	21.2
				23355	795.5	22.1	21.5
			13	23305	790.5	22.3	21.4
				23330	793.0	22.1	21.5
				23355	795.5	22.6	21.3
	25	0	23305	790.5	22.5	21.6	
			23330	793.0	22.1	20.9	
			23355	795.5	22.1	21.3	
	10 MHz	1	0	23330	793.0	23.5	22.1
			24	23330	793.0	23.0	22.6
			49	23330	793.0	23.4	22.6
		25	0	23330	793.0	22.5	21.2
			13	23330	793.0	21.9	21.0
			25	23330	793.0	22.1	20.9
		50	0	23330	793.0	22.1	21.0

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM		
25	1.4 MHz	1	0	26047	1850.7	23.5	22.0		
				26365	1882.5	23.5	22.6		
				26683	1914.3	23.5	22.4		
			3	26047	1850.7	23.2	22.2		
				26365	1882.5	23.0	22.2		
				26683	1914.3	23.0	22.5		
			5	26047	1850.7	22.9	22.4		
				26365	1882.5	23.3	22.2		
				26683	1914.3	23.3	22.0		
		3	0	26047	1850.7	23.6	22.0		
				26365	1882.5	23.4	22.2		
				26683	1914.3	23.1	22.3		
			1	26047	1850.7	23.4	22.2		
				26365	1882.5	23.3	22.2		
				26683	1914.3	23.1	22.3		
			3	26047	1850.7	23.3	22.2		
				26365	1882.5	23.2	22.1		
				26683	1914.3	23.3	22.1		
		6	0	26047	1850.7	22.3	21.1		
				26365	1882.5	22.1	21.4		
				26683	1914.3	22.5	20.9		
		3 MHz	1	0	26055	1851.5	23.0	21.9	
					26365	1882.5	23.1	22.1	
					26675	1913.5	23.0	22.0	
	7				26055	1851.5	23.5	21.9	
					26365	1882.5	23.1	22.4	
					26675	1913.5	23.0	22.1	
	14			26055	1851.5	23.6	22.1		
				26365	1882.5	23.5	21.9		
				26675	1913.5	23.4	22.3		
				8	0	26055	1851.5	22.6	21.0
						26365	1882.5	22.5	21.0
						26675	1913.5	22.2	21.0
	7				26055	1851.5	22.2	20.9	
					26365	1882.5	22.0	20.9	
					26675	1913.5	22.0	21.0	
	14		26055	1851.5	22.2	21.5			
			26365	1882.5	22.6	21.4			
			26675	1913.5	22.5	21.2			
			15	0	26055	1851.5	22.1	21.0	
					26365	1882.5	22.4	21.2	
					26675	1913.5	21.9	21.0	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
25	5 MHz	1	0	26065	1852.5	23.5	22.0	
				26365	1882.5	23.4	22.0	
				26665	1912.5	23.2	22.5	
			12	26065	1852.5	23.0	22.1	
				26365	1882.5	23.1	22.3	
				26665	1912.5	23.2	22.5	
		24	26065	1852.5	23.5	22.2		
			26365	1882.5	23.4	22.6		
			26665	1912.5	23.5	22.2		
		12	0	26065	1852.5	22.2	21.3	
				26365	1882.5	22.0	21.2	
				26665	1912.5	22.3	21.4	
			6	26065	1852.5	22.2	21.1	
				26365	1882.5	21.9	21.2	
				26665	1912.5	22.0	21.5	
			13	26065	1852.5	22.3	21.4	
				26365	1882.5	22.2	21.5	
				26665	1912.5	22.1	21.5	
			25	0	26065	1852.5	22.0	21.4
					26365	1882.5	22.6	21.0
					26665	1912.5	22.2	21.2
		10 MHz	1	0	26090	1855.0	23.0	22.1
					26365	1882.5	23.3	22.5
					26640	1910.0	23.1	22.0
	24			26090	1855.0	23.6	22.0	
				26365	1882.5	23.3	22.0	
				26640	1910.0	23.6	22.3	
	49			26090	1855.0	23.4	22.5	
				26365	1882.5	23.4	22.3	
				26640	1910.0	23.4	21.9	
	25			0	26090	1855.0	21.9	21.4
					26365	1882.5	22.2	21.1
					26640	1910.0	22.5	20.9
			13	26090	1855.0	22.2	21.0	
				26365	1882.5	21.9	21.2	
				26640	1910.0	22.6	21.1	
			25	26090	1855.0	22.2	21.0	
				26365	1882.5	22.5	21.2	
				26640	1910.0	22.0	21.3	
	50		0	26090	1855.0	22.0	21.1	
				26365	1882.5	22.5	21.5	
				26640	1910.0	22.0	21.5	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
25	15 MHz	1	0	26115	1857.5	23.5	22.0	
				26365	1882.5	23.5	22.3	
				26615	1907.5	23.6	22.3	
			37	26115	1857.5	23.1	22.1	
				26365	1882.5	23.3	22.6	
				26615	1907.5	23.4	22.3	
			74	26115	1857.5	23.4	22.6	
				26365	1882.5	23.4	22.4	
				26615	1907.5	23.0	22.1	
		36	0	26115	1857.5	22.3	20.9	
				26365	1882.5	22.5	21.6	
				26615	1907.5	22.0	21.3	
			19	26115	1857.5	22.2	21.3	
				26365	1882.5	22.6	21.5	
				26615	1907.5	22.0	21.0	
			39	26115	1857.5	22.3	21.2	
				26365	1882.5	22.6	21.2	
				26615	1907.5	22.2	21.0	
		75	0	26115	1857.5	22.4	21.5	
				26365	1882.5	22.1	21.1	
				26615	1907.5	21.9	21.6	
		20 MHz	1	0	26140	1860.0	23.5	22.5
					26365	1882.5	23.4	22.0
					26590	1905.0	23.2	22.1
	49			26140	1860.0	22.9	22.3	
				26365	1882.5	23.3	22.5	
				26590	1905.0	23.4	22.3	
	99			26140	1860.0	23.3	22.4	
				26365	1882.5	23.6	22.3	
				26590	1905.0	23.4	22.5	
	50			0	26140	1860.0	22.1	21.2
					26365	1882.5	22.1	21.4
					26590	1905.0	22.1	21.3
			24	26140	1860.0	22.1	21.1	
				26365	1882.5	22.3	21.1	
				26590	1905.0	22.5	21.2	
	50		26140	1860.0	22.3	21.1		
			26365	1882.5	22.1	21.3		
			26590	1905.0	22.2	21.0		
	100		0	26140	1860.0	22.2	21.4	
				26365	1882.5	22.2	21.3	
				26590	1905.0	22.1	21.0	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
26	1.4 MHz	1	0	26697	814.7	23.4	22.1	
				26865	831.5	23.2	22.3	
				27033	848.3	23.4	22.5	
			3	26697	814.7	23.4	22.1	
				26865	831.5	23.4	22.5	
				27033	848.3	23.0	22.1	
			5	26697	814.7	22.9	22.0	
				26865	831.5	23.0	22.0	
				27033	848.3	23.2	22.4	
		3	0	26697	814.7	23.5	22.1	
				26865	831.5	23.5	22.2	
				27033	848.3	23.2	22.6	
			1	26697	814.7	22.9	21.9	
				26865	831.5	23.5	22.1	
				27033	848.3	23.1	22.4	
			3	26697	814.7	23.4	22.2	
				26865	831.5	23.2	22.0	
				27033	848.3	23.2	22.3	
		6	0	26697	814.7	22.1	21.6	
				26865	831.5	22.4	21.5	
				27033	848.3	21.9	21.3	
		3 MHz	1	0	26705	815.5	23.0	22.4
					26865	831.5	23.5	22.6
					27025	847.5	23.6	22.4
	26705				815.5	23.2	22.2	
	26865				831.5	23.2	22.5	
	27025				847.5	22.9	22.0	
	7			26705	815.5	23.3	21.9	
				26865	831.5	22.9	22.0	
				27025	847.5	23.5	22.5	
				26705	815.5	22.0	21.0	
				26865	831.5	22.4	21.2	
				27025	847.5	22.5	21.5	
	14			26705	815.5	22.1	21.6	
				26865	831.5	22.6	21.4	
				27025	847.5	22.6	20.9	
				26705	815.5	22.3	21.0	
				26865	831.5	22.4	21.5	
				27025	847.5	22.2	21.3	
	8		0	26705	815.5	22.2	21.5	
				26865	831.5	22.4	21.3	
				27025	847.5	22.4	21.0	
			7	26705	815.5	22.2	21.5	
				26865	831.5	22.4	21.3	
				27025	847.5	22.4	21.0	
	15		0	26705	815.5	22.2	21.5	
				26865	831.5	22.4	21.3	
				27025	847.5	22.4	21.0	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM		
26	5 MHz	1	0	26715	816.5	23.1	22.4		
				26865	831.5	23.4	22.5		
				27015	846.5	23.5	21.9		
			12	12	26715	816.5	23.5	22.5	
					26865	831.5	23.6	21.9	
					27015	846.5	23.5	22.1	
				24	26715	816.5	23.6	22.0	
					26865	831.5	23.2	22.2	
					27015	846.5	23.2	22.4	
		12	0	26715	816.5	22.1	20.9		
				26865	831.5	22.2	21.0		
				27015	846.5	22.1	21.4		
			6	26715	816.5	22.3	21.4		
				26865	831.5	22.2	21.3		
				27015	846.5	21.9	21.1		
				13	26715	816.5	22.1	21.5	
					26865	831.5	22.1	21.3	
					27015	846.5	21.9	21.0	
			25	0	26715	816.5	22.5	21.2	
					26865	831.5	22.0	21.5	
					27015	846.5	22.0	21.6	
		10 MHz	1	0	26740	819.0	22.9	22.2	
					26865	831.5	23.2	22.6	
					26990	844.0	23.3	22.4	
					24	26740	819.0	23.1	22.3
						26865	831.5	23.6	21.9
						26990	844.0	23.3	22.0
	49			26740	819.0	23.2	22.1		
				26865	831.5	22.9	21.9		
				26990	844.0	23.4	22.3		
				25	0	26740	819.0	22.0	21.5
						26865	831.5	22.0	21.4
						26990	844.0	22.5	21.1
	13					26740	819.0	22.0	21.1
						26865	831.5	22.4	20.9
						26990	844.0	22.0	20.9
	25				26740	819.0	22.2	21.1	
					26865	831.5	22.2	21.3	
					26990	844.0	21.9	21.4	
			50		0	26740	819.0	22.4	21.5
						26865	831.5	22.3	21.6
						26990	844.0	22.4	21.5

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
26	15 MHz	1	0	26765	821.5	23.6	22.0
				26865	831.5	22.9	22.0
				26965	841.5	23.6	22.1
			37	26765	821.5	23.6	22.1
				26865	831.5	23.5	22.3
				26965	841.5	23.4	22.2
			74	26765	821.5	23.1	22.4
				26865	831.5	23.0	22.4
				26965	841.5	23.1	22.4
		36	0	26765	821.5	22.5	21.2
				26865	831.5	22.0	21.2
				26965	841.5	22.1	21.2
			19	26765	821.5	22.2	21.4
				26865	831.5	22.2	21.6
				26965	841.5	22.5	21.6
			39	26765	821.5	22.1	21.3
				26865	831.5	22.3	21.1
				26965	841.5	22.5	21.4
		75	0	26765	821.5	22.2	21.0
				26865	831.5	22.6	21.5
				26965	841.5	22.6	21.0

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
41 PC3	5 MHz	1	0	39675	2498.5	24.0	22.9
				40148	2545.8	23.8	22.8
				40620	2593.0	23.9	23.0
				41093	2640.3	24.3	23.2
				41565	2687.5	23.9	23.3
			12	39675	2498.5	24.0	23.1
				40148	2545.8	24.3	23.3
				40620	2593.0	24.0	22.8
				41093	2640.3	24.3	23.0
				41565	2687.5	23.9	23.1
			24	39675	2498.5	24.0	23.0
				40148	2545.8	24.3	23.4
		40620		2593.0	24.1	23.0	
		41093		2640.3	23.9	22.7	
		41565		2687.5	24.0	23.3	
		12	0	39675	2498.5	22.8	22.0
				40148	2545.8	23.0	21.9
				40620	2593.0	22.7	22.2
				41093	2640.3	23.0	22.2
				41565	2687.5	23.1	22.0
			6	39675	2498.5	23.2	21.9
				40148	2545.8	23.1	22.2
				40620	2593.0	23.3	21.8
				41093	2640.3	23.4	21.7
				41565	2687.5	23.2	21.9
			13	39675	2498.5	23.7	22.9
				40148	2545.8	23.8	23.0
				40620	2593.0	22.7	21.9
				41093	2640.3	23.1	22.1
				41565	2687.5	23.1	22.0
		25	0	39675	2498.5	23.2	21.9
				40148	2545.8	22.9	21.9
				40620	2593.0	23.3	22.3
				41093	2640.3	22.8	21.7
				41565	2687.5	23.0	22.1

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
41 PC3	10 MHz	1	0	39700	2501.0	24.2	22.8
				40160	2547.0	23.8	23.1
				40620	2593.0	23.8	22.9
				41080	2639.0	24.0	23.1
				41540	2685.0	24.2	22.7
			24	39700	2501.0	24.3	22.9
				40160	2547.0	23.7	23.3
				40620	2593.0	23.8	23.0
				41080	2639.0	24.2	22.9
				41540	2685.0	24.3	23.2
			49	39700	2501.0	24.0	23.3
				40160	2547.0	24.0	22.9
				40620	2593.0	24.0	23.3
				41080	2639.0	23.9	23.0
				41540	2685.0	24.3	23.0
		25	0	39700	2501.0	23.3	22.0
				40160	2547.0	22.7	21.9
				40620	2593.0	23.1	21.8
				41080	2639.0	23.0	22.0
				41540	2685.0	23.2	22.1
			13	39700	2501.0	23.3	22.2
				40160	2547.0	22.7	22.3
				40620	2593.0	22.9	22.0
				41080	2639.0	22.7	21.8
				41540	2685.0	23.0	22.2
			25	39700	2501.0	22.8	21.9
				40160	2547.0	23.2	22.0
				40620	2593.0	22.9	21.8
				41080	2639.0	23.3	22.3
				41540	2685.0	22.8	22.1
		50	0	39700	2501.0	22.7	22.0
				40160	2547.0	23.2	22.1
40620	2593.0			23.1	21.8		
41080	2639.0			23.4	21.9		
41540	2685.0			23.1	21.8		

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
41 PC3	15 MHz	1	0	39725	2503.5	23.8	23.2
				40173	2548.3	23.9	22.9
				40620	2593.0	23.9	23.2
				41068	2637.8	24.4	22.8
				41515	2682.5	24.1	23.1
			37	39725	2503.5	23.9	23.0
				40173	2548.3	24.3	22.7
				40620	2593.0	24.1	22.7
				41068	2637.8	23.9	23.0
				41515	2682.5	23.9	23.0
			74	39725	2503.5	23.8	22.8
				40173	2548.3	23.8	23.1
				40620	2593.0	23.8	22.7
				41068	2637.8	24.2	22.9
				41515	2682.5	23.8	23.2
		36	0	39725	2503.5	23.0	21.9
				40173	2548.3	23.0	22.0
				40620	2593.0	23.3	22.1
				41068	2637.8	23.3	22.0
				41515	2682.5	23.2	21.9
			19	39725	2503.5	22.9	22.2
				40173	2548.3	22.8	22.3
				40620	2593.0	23.0	22.4
				41068	2637.8	22.9	22.2
				41515	2682.5	23.0	22.1
			39	39725	2503.5	22.8	22.2
				40173	2548.3	23.0	21.8
				40620	2593.0	23.0	22.1
				41068	2637.8	22.8	22.3
				41515	2682.5	23.1	21.8
		75	0	39725	2503.5	23.0	21.8
				40173	2548.3	23.1	21.9
				40620	2593.0	23.3	21.8
				41068	2637.8	22.7	22.3
				41515	2682.5	22.7	22.2

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM		
41 PC3	20 MHz	1	0		39750	2506.0	23.9	23.0	
					40185	2549.5	24.2	22.8	
					40620	2593.0	23.9	23.4	
					41055	2636.5	23.8	23.1	
					41490	2680.0	23.7	23.2	
				49		39750	2506.0	24.1	22.9
					40185	2549.5	24.1	23.1	
					40620	2593.0	23.7	22.8	
					41055	2636.5	24.1	23.1	
					41490	2680.0	24.2	23.1	
				99		39750	2506.0	24.1	23.3
					40185	2549.5	24.0	23.1	
					40620	2593.0	24.0	23.1	
					41055	2636.5	24.1	22.9	
					41490	2680.0	24.1	23.1	
			50	0		39750	2506.0	23.0	22.4
					40185	2549.5	23.1	22.1	
					40620	2593.0	23.0	22.2	
					41055	2636.5	23.2	21.7	
					41490	2680.0	23.3	21.9	
				24		39750	2506.0	22.9	21.7
					40185	2549.5	22.8	21.9	
					40620	2593.0	23.4	22.4	
					41055	2636.5	23.0	21.9	
					41490	2680.0	22.8	22.2	
				50		39750	2506.0	23.4	22.3
					40185	2549.5	22.8	22.2	
					40620	2593.0	23.0	22.0	
					41055	2636.5	23.1	22.1	
					41490	2680.0	23.2	22.4	
			100	0		39750	2506.0	23.2	22.2
					40185	2549.5	22.8	22.3	
					40620	2593.0	23.4	22.4	
					41055	2636.5	23.0	22.3	
					41490	2680.0	23.3	21.7	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
41 PC2	5 MHz	1	0	39675	2498.5	25.2	24.4
				40148	2545.8	25.4	24.6
				40620	2593.0	25.1	24.3
				41093	2640.3	25.4	24.4
				41565	2687.5	25.6	24.5
			12	39675	2498.5	25.3	24.5
				40148	2545.8	25.0	24.5
				40620	2593.0	25.3	24.1
				41093	2640.3	25.2	24.4
			24	41565	2687.5	24.9	24.2
				39675	2498.5	25.0	24.0
				40148	2545.8	25.3	24.6
		40620		2593.0	25.1	24.5	
		12	0	41093	2640.3	25.5	24.1
				41565	2687.5	25.0	24.1
				39675	2498.5	24.4	23.2
				40148	2545.8	23.9	23.0
			6	40620	2593.0	24.5	23.5
				41093	2640.3	24.1	23.1
				41565	2687.5	24.5	23.4
				39675	2498.5	24.5	23.3
			13	40148	2545.8	24.6	23.4
				40620	2593.0	24.1	23.3
				41093	2640.3	24.0	23.6
				41565	2687.5	24.2	23.1
		25	0	39675	2498.5	24.1	23.2
				40148	2545.8	24.5	23.1
				40620	2593.0	24.2	23.5
				41093	2640.3	24.4	23.0
			0	41565	2687.5	24.3	23.1
				39675	2498.5	23.9	23.1
				40148	2545.8	24.0	23.4
40620	2593.0			24.4	23.5		
0	41093	2640.3	24.4	23.1			
	41565	2687.5	24.1	23.3			

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
41 PC2	10 MHz	1	0	39700	2501.0	25.1	24.1
				40160	2547.0	25.6	24.1
				40620	2593.0	25.1	24.4
				41080	2639.0	25.2	24.0
				41540	2685.0	25.1	24.3
			24	39700	2501.0	25.0	24.3
				40160	2547.0	25.1	24.3
				40620	2593.0	25.1	24.5
				41080	2639.0	25.3	24.1
				41540	2685.0	25.4	24.4
			49	39700	2501.0	25.5	24.6
				40160	2547.0	25.3	24.0
				40620	2593.0	25.2	24.0
				41080	2639.0	25.0	24.6
				41540	2685.0	25.4	24.0
		25	0	39700	2501.0	24.2	23.0
				40160	2547.0	24.0	23.1
				40620	2593.0	24.5	23.3
				41080	2639.0	24.2	23.1
				41540	2685.0	24.0	23.2
			13	39700	2501.0	24.6	23.0
				40160	2547.0	24.3	23.2
				40620	2593.0	24.5	23.3
				41080	2639.0	24.2	23.6
				41540	2685.0	24.2	23.2
			25	39700	2501.0	24.0	23.4
				40160	2547.0	24.6	23.3
				40620	2593.0	24.5	23.5
				41080	2639.0	24.4	23.4
				41540	2685.0	24.2	23.1
		50	0	39700	2501.0	24.4	23.1
				40160	2547.0	24.0	23.5
40620	2593.0			24.5	23.4		
41080	2639.0			24.2	23.1		
41540	2685.0			24.5	22.9		

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
41 PC2	15 MHz	1	0	39725	2503.5	25.0	24.6
				40173	2548.3	25.0	24.2
				40620	2593.0	25.4	24.1
				41068	2637.8	25.3	24.6
				41515	2682.5	25.2	23.9
			37	39725	2503.5	25.2	24.5
				40173	2548.3	25.1	24.5
				40620	2593.0	25.5	24.0
				41068	2637.8	25.4	24.6
				41515	2682.5	25.3	24.2
			74	39725	2503.5	25.1	24.2
				40173	2548.3	25.5	24.6
		40620		2593.0	25.6	24.5	
		41068		2637.8	25.4	24.3	
		41515		2682.5	25.4	24.1	
		36	0	39725	2503.5	24.5	23.5
				40173	2548.3	24.5	23.3
				40620	2593.0	24.5	23.0
				41068	2637.8	24.3	23.4
				41515	2682.5	24.1	23.3
			19	39725	2503.5	24.0	23.5
				40173	2548.3	24.1	23.6
				40620	2593.0	24.5	23.6
				41068	2637.8	24.4	23.1
				41515	2682.5	24.4	23.0
			39	39725	2503.5	24.3	23.6
				40173	2548.3	24.0	23.2
				40620	2593.0	24.1	23.4
				41068	2637.8	24.5	23.0
				41515	2682.5	24.1	23.2
		75	0	39725	2503.5	24.2	23.5
				40173	2548.3	24.0	23.3
40620	2593.0			24.4	23.0		
41068	2637.8			24.0	23.4		
41515	2682.5			24.2	23.1		

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
41 PC2	20 MHz	1	0	39750	2506.0	25.5	24.5
				40185	2549.5	25.5	24.3
				40620	2593.0	25.6	24.2
				41055	2636.5	25.2	24.4
				41490	2680.0	25.3	24.4
			49	39750	2506.0	25.1	24.4
				40185	2549.5	25.4	24.3
				40620	2593.0	25.2	24.0
				41055	2636.5	25.2	24.3
				41490	2680.0	25.6	24.0
			99	39750	2506.0	25.2	24.4
				40185	2549.5	25.1	24.4
				40620	2593.0	25.4	23.9
				41055	2636.5	25.5	24.3
				41490	2680.0	25.5	24.3
		50	0	39750	2506.0	24.6	23.0
				40185	2549.5	24.1	23.5
				40620	2593.0	24.2	22.9
				41055	2636.5	24.2	23.5
				41490	2680.0	24.1	23.1
			24	39750	2506.0	24.5	23.4
				40185	2549.5	24.5	23.6
				40620	2593.0	24.4	23.1
				41055	2636.5	24.0	23.5
				41490	2680.0	24.4	23.5
			50	39750	2506.0	24.4	23.2
				40185	2549.5	24.3	23.5
				40620	2593.0	24.2	23.1
				41055	2636.5	24.5	23.1
				41490	2680.0	24.0	23.2
		100	0	39750	2506.0	24.1	23.1
				40185	2549.5	24.0	23.1
40620	2593.0			24.5	23.5		
41055	2636.5			24.1	23.4		
41490	2680.0			24.5	23.0		

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
48	5 MHz	1	0	55265	3552.5	23.2	21.9
				55627	3588.7	23.4	22.5
				55990	3625.0	23.2	22.6
				56352	3661.2	23.1	21.9
				56715	3697.5	23.2	22.3
			12	55265	3552.5	23.0	22.5
				55627	3588.7	23.3	22.5
				55990	3625.0	23.2	22.4
				56352	3661.2	23.1	22.4
				56715	3697.5	23.6	22.5
			24	55265	3552.5	23.4	22.4
				55627	3588.7	23.3	22.3
				55990	3625.0	23.3	22.0
				56352	3661.2	23.5	22.0
				56715	3697.5	23.5	22.2
		12	0	55265	3552.5	22.1	21.2
				55627	3588.7	22.1	20.9
				55990	3625.0	22.4	20.9
				56352	3661.2	22.0	21.1
				56715	3697.5	22.6	21.4
			6	55265	3552.5	21.9	21.0
				55627	3588.7	22.0	21.1
				55990	3625.0	22.1	21.5
				56352	3661.2	22.6	21.2
				56715	3697.5	21.9	20.9
			13	55265	3552.5	22.6	21.1
				55627	3588.7	22.1	21.0
				55990	3625.0	22.1	21.5
				56352	3661.2	22.2	21.0
				56715	3697.5	22.5	21.6
		25	0	55265	3552.5	22.0	21.1
				55627	3588.7	22.4	21.2
				55990	3625.0	22.5	21.5
				56352	3661.2	22.2	20.9
				56715	3697.5	21.9	21.2

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
48	10 MHz	1	0	55290	3555.0	23.3	22.5
				55640	3590.0	23.2	22.2
				55990	3625.0	23.4	22.3
				56340	3660.0	23.6	22.3
				56690	3695.0	23.6	22.5
			24	55290	3555.0	23.5	22.3
				55640	3590.0	23.5	22.0
				55990	3625.0	23.5	22.3
				56340	3660.0	23.1	22.5
				56690	3695.0	23.2	22.1
			49	55290	3555.0	23.2	22.3
				55640	3590.0	23.3	22.3
				55990	3625.0	23.5	22.2
				56340	3660.0	23.4	22.1
				56690	3695.0	23.1	21.9
		25	0	55290	3555.0	22.3	20.9
				55640	3590.0	21.9	21.1
				55990	3625.0	22.5	21.0
				56340	3660.0	22.2	21.0
				56690	3695.0	22.1	20.9
			13	55290	3555.0	22.0	21.4
				55640	3590.0	22.2	21.6
				55990	3625.0	22.6	21.1
				56340	3660.0	22.6	21.0
				56690	3695.0	22.0	21.6
			25	55290	3555.0	22.3	21.3
				55640	3590.0	22.2	20.9
				55990	3625.0	22.5	21.5
				56340	3660.0	22.0	21.3
				56690	3695.0	22.3	21.2
		50	0	55290	3555.0	22.0	21.4
				55640	3590.0	22.6	21.0
				55990	3625.0	21.9	21.4
				56340	3660.0	22.0	21.3
				56690	3695.0	22.6	21.6

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
48	15 MHz	1	0	55315	3557.5	23.0	21.9
				55652	3591.2	23.1	22.4
				55990	3625.0	23.6	22.2
				56327	3658.7	23.3	22.0
				56665	3692.5	23.6	22.1
			37	55315	3557.5	23.4	22.0
				55652	3591.2	23.1	22.2
				55990	3625.0	23.2	22.0
				56327	3658.7	23.5	22.1
				56665	3692.5	23.1	22.4
			74	55315	3557.5	23.5	22.2
				55652	3591.2	23.6	22.6
				55990	3625.0	23.0	22.4
				56327	3658.7	23.3	22.4
				56665	3692.5	23.3	22.2
		36	0	55315	3557.5	22.3	21.0
				55652	3591.2	21.9	21.1
				55990	3625.0	22.0	21.2
				56327	3658.7	22.6	21.0
				56665	3692.5	22.2	21.1
			19	55315	3557.5	21.9	21.6
				55652	3591.2	22.3	21.3
				55990	3625.0	22.1	21.1
				56327	3658.7	22.1	21.4
				56665	3692.5	22.1	21.4
			39	55315	3557.5	22.2	21.3
				55652	3591.2	22.2	21.4
				55990	3625.0	22.2	21.5
				56327	3658.7	22.0	21.0
				56665	3692.5	22.5	21.3
		75	0	55315	3557.5	22.1	20.9
				55652	3591.2	22.4	21.5
55990	3625.0			22.6	21.6		
56327	3658.7			21.9	21.3		
56665	3692.5			22.3	21.2		

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
48	20 MHz	1	0	55340	3560.0	23.4	22.2
				55665	3592.5	23.3	22.0
				55990	3625.0	23.5	22.2
				56315	3657.5	23.1	22.3
				56640	3690.0	23.2	22.2
			49	55340	3560.0	23.4	22.6
				55665	3592.5	23.5	22.6
				55990	3625.0	23.1	22.5
				56315	3657.5	23.3	22.4
				56640	3690.0	23.4	22.0
			99	55340	3560.0	23.0	22.0
				55665	3592.5	23.5	22.4
				55990	3625.0	23.5	22.1
				56315	3657.5	23.2	22.6
				56640	3690.0	23.3	22.2
		50	0	55340	3560.0	22.5	21.0
				55665	3592.5	22.2	21.4
				55990	3625.0	22.4	21.3
				56315	3657.5	22.5	21.5
				56640	3690.0	22.5	21.2
			24	55340	3560.0	22.5	21.0
				55665	3592.5	22.5	21.1
				55990	3625.0	22.0	21.5
				56315	3657.5	22.2	21.4
				56640	3690.0	22.1	21.4
			50	55340	3560.0	22.5	21.1
				55665	3592.5	22.0	21.5
				55990	3625.0	22.6	21.4
				56315	3657.5	22.4	21.3
				56640	3690.0	22.0	21.3
		100	0	55340	3560.0	22.0	21.1
				55665	3592.5	22.2	21.0
				55990	3625.0	22.3	21.6
				56315	3657.5	22.0	21.6
				56640	3690.0	22.2	21.0

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
66	1.4 MHz	1	0	131979	1710.7	23.5	22.0
				132322	1745.0	23.4	22.0
				132665	1779.3	23.0	22.3
			3	131979	1710.7	23.1	22.3
				132322	1745.0	23.4	22.5
				132665	1779.3	23.5	22.0
		5	131979	1710.7	23.4	21.9	
			132322	1745.0	23.6	22.0	
			132665	1779.3	23.3	22.0	
		3	0	131979	1710.7	23.4	22.0
				132322	1745.0	23.3	22.2
				132665	1779.3	23.5	22.6
			1	131979	1710.7	23.5	22.4
				132322	1745.0	23.1	21.9
				132665	1779.3	23.4	22.5
			3	131979	1710.7	23.4	22.5
				132322	1745.0	23.1	22.1
				132665	1779.3	23.3	22.0
	6	0	131979	1710.7	22.2	21.0	
			132322	1745.0	22.5	21.6	
			132665	1779.3	21.9	21.3	
	3 MHz	1	0	131987	1711.5	23.2	22.1
				132322	1745.0	23.0	22.1
				132657	1778.5	23.6	22.5
			7	131987	1711.5	23.4	22.5
				132322	1745.0	23.2	22.2
				132657	1778.5	23.5	22.2
			14	131987	1711.5	23.0	22.4
				132322	1745.0	23.0	21.9
				132657	1778.5	23.4	22.1
		8	0	131987	1711.5	22.3	21.1
				132322	1745.0	22.4	21.2
				132657	1778.5	22.4	21.0
			7	131987	1711.5	22.2	21.5
				132322	1745.0	22.4	20.9
				132657	1778.5	22.5	21.1
			14	131987	1711.5	22.0	21.2
				132322	1745.0	22.0	21.4
				132657	1778.5	22.2	21.4
	15	0	131987	1711.5	22.6	21.2	
			132322	1745.0	22.1	21.0	
			132657	1778.5	22.1	21.3	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
66	5 MHz	1	0	131997	1712.5	23.4	22.0	
				132322	1745.0	23.1	22.3	
				132646	1777.4	23.2	22.0	
			12	131997	1712.5	23.4	22.1	
				132322	1745.0	23.5	22.0	
				132646	1777.4	23.6	22.4	
			24	131997	1712.5	23.2	22.4	
				132322	1745.0	23.0	22.3	
				132646	1777.4	23.1	22.2	
		12	0	131997	1712.5	22.3	21.4	
				132322	1745.0	22.6	20.9	
				132646	1777.4	22.0	20.9	
				6	131997	1712.5	22.5	21.2
					132322	1745.0	22.1	21.4
					132646	1777.4	22.1	21.2
			13	131997	1712.5	22.3	21.4	
				132322	1745.0	22.5	21.5	
				132646	1777.4	22.3	21.2	
			25	0	131997	1712.5	22.6	21.1
					132322	1745.0	22.4	21.3
					132646	1777.4	22.4	21.5
		10 MHz	1	0	132033	1716.1	23.3	22.2
					132322	1745.0	23.1	22.5
					132621	1774.9	23.1	22.5
	24				132033	1716.1	23.1	22.3
					132322	1745.0	22.9	22.2
					132621	1774.9	23.5	22.2
	49			132033	1716.1	23.6	22.5	
				132322	1745.0	23.2	22.2	
				132621	1774.9	23.3	22.0	
	25			0	132033	1716.1	22.3	21.1
					132322	1745.0	22.0	21.5
					132621	1774.9	22.1	21.5
			13		132033	1716.1	22.3	21.5
					132322	1745.0	21.9	21.3
					132621	1774.9	22.6	21.2
			25	132033	1716.1	22.4	21.5	
				132322	1745.0	22.1	21.4	
				132621	1774.9	22.2	21.5	
			50	0	132033	1716.1	22.1	21.2
					132322	1745.0	22.6	21.4
					132621	1774.9	22.1	21.2

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
66	15 MHz	1	0	132047	1717.5	23.6	22.4	
				132322	1745.0	23.5	21.9	
				132596	1772.4	23.0	22.2	
			37	132047	1717.5	23.0	22.3	
				132322	1745.0	23.1	22.3	
				132596	1772.4	23.4	22.4	
			74	132047	1717.5	23.5	22.2	
				132322	1745.0	23.2	22.2	
				132596	1772.4	23.5	22.2	
		36	0	132047	1717.5	22.3	21.3	
				132322	1745.0	22.0	21.1	
				132596	1772.4	22.3	21.3	
				19	132047	1717.5	22.4	21.1
					132322	1745.0	22.5	21.3
					132596	1772.4	22.3	21.3
			39	132047	1717.5	22.2	21.3	
				132322	1745.0	22.5	21.5	
				132596	1772.4	22.5	21.4	
			75	0	132047	1717.5	22.2	21.2
					132322	1745.0	22.1	21.5
					132596	1772.4	22.2	21.5
		20 MHz	1	0	132072	1720.0	23.0	22.2
					132322	1745.0	23.0	22.5
					132571	1769.9	23.2	22.5
	49				132072	1720.0	23.4	22.2
					132322	1745.0	23.1	22.5
					132571	1769.9	23.3	22.2
	99			132072	1720.0	23.1	22.1	
				132322	1745.0	23.0	22.6	
				132571	1769.9	23.5	22.1	
	50			0	132072	1720.0	22.2	21.2
					132322	1745.0	22.2	21.4
					132571	1769.9	22.1	21.4
			24		132072	1720.0	22.1	21.3
					132322	1745.0	22.5	21.4
					132571	1769.9	22.1	20.9
			50	132072	1720.0	22.3	21.4	
				132322	1745.0	22.6	21.3	
				132571	1769.9	22.3	21.0	
	100		0	132072	1720.0	22.0	21.5	
				132322	1745.0	22.0	21.6	
				132571	1769.9	22.3	21.1	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
71	5 MHz	1	0	133147	665.5	23.0	22.3	
				133297	680.5	23.1	22.5	
				133447	695.5	22.9	22.4	
			12	133147	665.5	22.9	22.4	
				133297	680.5	23.5	22.0	
				133447	695.5	23.4	22.2	
			24	133147	665.5	23.2	22.1	
				133297	680.5	23.4	22.5	
				133447	695.5	23.1	21.9	
		12	0	133147	665.5	22.3	21.3	
				133297	680.5	22.2	21.2	
				133447	695.5	22.0	21.2	
			6	133147	665.5	22.0	21.5	
				133297	680.5	22.6	21.2	
				133447	695.5	22.6	21.3	
			13	133147	665.5	22.2	21.0	
				133297	680.5	22.6	21.6	
				133447	695.5	22.4	21.1	
			25	0	133147	665.5	22.3	20.9
					133297	680.5	22.0	21.3
					133447	695.5	22.1	21.2
		10 MHz	1	0	133172	668.0	23.2	22.1
					133297	680.5	23.2	22.1
					133422	693.0	23.2	22.0
	24			133172	668.0	22.9	22.2	
				133297	680.5	23.4	22.3	
				133422	693.0	23.5	22.2	
	49			133172	668.0	23.5	22.2	
				133297	680.5	23.5	22.2	
				133422	693.0	22.9	22.1	
	25			0	133172	668.0	22.5	21.4
					133297	680.5	22.3	21.0
					133422	693.0	22.0	21.3
			13	133172	668.0	22.2	21.6	
				133297	680.5	22.0	21.2	
				133422	693.0	22.1	21.1	
			25	133172	668.0	22.6	21.5	
				133297	680.5	22.4	21.0	
				133422	693.0	22.2	21.4	
	50		0	133172	668.0	22.0	21.1	
				133297	680.5	22.0	21.3	
				133422	693.0	22.3	21.0	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
71	15 MHz	1	0	133197	670.5	23.3	21.9	
				133297	680.5	23.1	22.1	
				133397	690.5	22.9	22.3	
			37	133197	670.5	23.3	22.3	
				133297	680.5	22.9	22.6	
				133397	690.5	23.2	22.2	
			74	133197	670.5	23.5	22.3	
				133297	680.5	23.3	22.5	
				133397	690.5	23.1	22.6	
		36	0	133197	670.5	22.1	21.0	
				133297	680.5	22.0	21.1	
				133397	690.5	22.3	21.0	
				19	133197	670.5	22.4	21.3
					133297	680.5	22.0	21.0
					133397	690.5	22.0	21.3
			39	133197	670.5	22.4	21.2	
				133297	680.5	21.9	21.6	
				133397	690.5	22.6	21.3	
	75		0	133197	670.5	22.2	21.1	
				133297	680.5	22.1	21.0	
				133397	690.5	22.2	21.4	
	20 MHz	1	0	133222	673.0	23.4	22.2	
				133297	680.5	23.2	22.2	
				133372	688.0	23.6	22.2	
			49	133222	673.0	23.2	22.3	
				133297	680.5	23.0	22.4	
				133372	688.0	23.2	22.3	
			99	133222	673.0	23.4	22.1	
				133297	680.5	23.1	22.3	
				133372	688.0	23.3	22.2	
			50	0	133222	673.0	22.1	20.9
					133297	680.5	22.0	21.3
					133372	688.0	22.4	21.1
		24		133222	673.0	22.3	21.2	
				133297	680.5	22.2	21.2	
				133372	688.0	22.0	21.1	
		50		133222	673.0	22.4	21.5	
				133297	680.5	22.0	20.9	
				133372	688.0	22.1	21.5	
		100	0	133222	673.0	22.1	21.2	
				133297	680.5	22.4	21.3	
				133372	688.0	22.0	21.6	

Band	Mode	Bandwidth (MHz)	Channel	Frequency (MHz)	Data Rate	Antenna	Avg Power (dBm)	Tune-up Pwr (dBm)
2450 MHz	802.11b	20	1	2412	1 Mbps	W1	17.04	18.00
			6	2437			17.12	18.00
			11	2462			17.00	18.00
			1	2412		W2	17.06	18.00
			6	2437			17.18	18.00
			11	2462			17.11	18.00
	802.11g	20	1	2412	6 Mbps	W1	Not Required	16.00
			6	2437				16.00
			11	2462				16.00
			1	2412		W2		16.00
			6	2437				16.00
			11	2462				16.00
	802.11n	20	1	2412	MCS0	W1		15.00
			6	2437				15.00
			11	2462				15.00
			1	2412		W2		15.00
			6	2437				15.00
			11	2462				15.00
	802.11n40	40	2	2417	MCS0	W1	13.00	
			6	2437			13.00	
			10	2457			13.00	
			2	2417		W2	13.00	
			6	2437			13.00	
			10	2457			13.00	
5.15-5.25 GHz	802.11a	20	36	5180	6 Mbps	W1	Not Required	15.00
			40	5200				15.00
			44	5220				15.00
			48	5240				15.00
			36	5180		W2		15.00
			40	5200				15.00
			44	5220				15.00
			48	5240				15.00
	802.11n	20	36	5180	MCS0	W1		14.00
			40	5200				14.00
			44	5220				14.00
			48	5240				14.00
			36	5180		W2		14.00
			40	5200				14.00
			44	5220				14.00
			48	5240				14.00
	802.11n	40	36	5180	MCS0	W1		12.00
			40	5200				12.00
			44	5220				12.00
			48	5240				12.00
			36	5180		W2		12.00
			40	5200				12.00
			44	5220				12.00
			48	5240				12.00

Band	Mode	Bandwidth (MHz)	Channel	Frequency (MHz)	Data Rate	Antenna	Avg Power (dBm)	Tune-up Pwr (dBm)
5.25-5.35 GHz	802.11a	20	52	5260	6 Mbps	W1	14.19	15.00
			56	5280			14.22	15.00
			60	5300			14.28	15.00
			64	5320			14.21	15.00
			52	5260		W2	14.23	15.00
			56	5280			14.29	15.00
			60	5300			14.31	15.00
			64	5320			14.26	15.00
	802.11n	20	52	5260	MCS0	W1	Not Required	14.00
			56	5280				14.00
			60	5300				14.00
			64	5320				14.00
			52	5260		W2		14.00
			56	5280				14.00
			60	5300				14.00
			64	5320				14.00
	802.11n	40	54	5270	MCS0	W1		12.00
			56	5280				12.00
			60	5300				12.00
			62	5310				12.00
			54	5270		W2	12.00	
			56	5280			12.00	
			60	5300			12.00	
			62	5310			12.00	
5600 MHz	802.11a	20	104	5520	6 Mbps	W1	14.35	15.00
			116	5580			14.39	15.00
			124	5620			14.42	15.00
			136	5680			14.34	15.00
			104	5520		W2	14.41	15.00
			116	5580			14.45	15.00
			124	5620			14.49	15.00
			136	5680			14.38	15.00
	802.11n	20	104	5520	MCS0	W1	Not Required	14.00
			116	5580				14.00
			124	5620				14.00
			136	5680				14.00
			104	5520		W2		14.00
			116	5580				14.00
			124	5620				14.00
			136	5680				14.00
	802.11n	40	104	5520	MCS0	W1		12.00
			116	5580				12.00
			124	5620				12.00
			136	5680				12.00
			104	5520		W2	12.00	
			116	5580			12.00	
			124	5620			12.00	
			136	5680			12.00	

Band	Mode	Bandwidth (MHz)	Channel	Frequency (MHz)	Data Rate	Antenna	Avg Power (dBm)	Tune-up Pwr (dBm)
5800 MHz	802.11a	20	149	5745	6 Mbps	W1	14.27	15.00
			153	5765			14.21	15.00
			157	5785			14.36	15.00
			161	5805			14.25	15.00
			165	5825			14.32	15.00
			149	5745		W2	14.32	15.00
			153	5765			14.29	15.00
			157	5785			14.39	15.00
			161	5805			14.31	15.00
			165	5825			14.36	15.00
	802.11n	20	MCS0	149	5745	W1	Not Required	14.00
				153	5765			14.00
				157	5785			14.00
				161	5805			14.00
				165	5825			14.00
				149	5745	W2		14.00
				153	5765			14.00
				157	5785			14.00
				161	5805			14.00
				165	5825			14.00
	802.11n	40	MCS0	149	5745	W1	12.00	
				153	5765		12.00	
				157	5785		12.00	
				161	5805		12.00	
165				5825	W2	12.00		
149				5745		12.00		
153				5765		12.00		
157				5785		12.00		
161	5805	12.00						
165	5825	12.00						

10. SAR Test Results

General Note:

- Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
- Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.

UMTS Note:

- Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
- Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

- Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
- Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
- Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
- Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
- For LTE B4/B5/B12/B17 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- LTE band 2/4/5/17/38 SAR test was covered by Band 25/66/26/12/41; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant M1	RMC 12.2Kbps	Back	15mm	9400	1880	23.87	24.50	0.105	0.12
	WCDMA II_Ant M2	RMC 12.2Kbps		15mm	9262	1852.4	23.75	24.50	0.748	0.89
1	WCDMA II_Ant M2	RMC 12.2Kbps		15mm	9400	1880	23.87	24.50	0.776	0.90
	WCDMA II_Ant M2	RMC 12.2Kbps		15mm	9538	1907.6	23.74	24.50	0.753	0.90
	WCDMA II_Ant M3	RMC 12.2Kbps		15mm	9400	1880	23.87	24.50	0.115	0.13
	WCDMA II_Ant M4	RMC 12.2Kbps		15mm	9400	1880	23.87	24.50	0.752	0.87
	WCDMA II_Ant M5	RMC 12.2Kbps		15mm	9400	1880	23.87	24.50	0.761	0.88
	WCDMA II_Ant M6	RMC 12.2Kbps		15mm	9400	1880	23.87	24.50	0.144	0.17
	Repeat	RMC 12.2Kbps		15mm	9262	1852.4	23.87	24.50	0.759	0.88
	WCDMA IV_Ant M1	RMC 12.2Kbps		15mm	1413	1732.6	23.83	24.50	0.0536	0.06
2	WCDMA IV_Ant M2	RMC 12.2Kbps		15mm	1413	1732.6	23.83	24.50	0.499	0.58
	WCDMA IV_Ant M3	RMC 12.2Kbps		15mm	1413	1732.6	23.83	24.50	0.0597	0.07
	WCDMA IV_Ant M4	RMC 12.2Kbps		15mm	1413	1732.6	23.83	24.50	0.468	0.55
	WCDMA IV_Ant M5	RMC 12.2Kbps		15mm	1413	1732.6	23.83	24.50	0.485	0.57
	WCDMA IV_Ant M6	RMC 12.2Kbps		15mm	1413	1732.6	23.83	24.50	0.0646	0.08
	Repeat	RMC 12.2Kbps		15mm	1413	1732.6	23.83	24.50	0.476	0.56
	WCDMA V_Ant M1	RMC 12.2Kbps		15mm	4183	836.6	23.58	24.50	0.0711	0.09
3	WCDMA V_Ant M2	RMC 12.2Kbps		15mm	4183	836.6	23.58	24.50	0.255	0.32
	WCDMA V_Ant M3	RMC 12.2Kbps		15mm	4183	836.6	23.58	24.50	0.0723	0.09
	WCDMA V_Ant M4	RMC 12.2Kbps		15mm	4183	836.6	23.58	24.50	0.242	0.30
	WCDMA V_Ant M5	RMC 12.2Kbps		15mm	4183	836.6	23.58	24.50	0.237	0.29
	WCDMA V_Ant M6	RMC 12.2Kbps	15mm	4183	836.6	23.58	24.50	0.0762	0.09	
	Repeat	RMC 12.2Kbps	15mm	4183	836.6	23.58	24.50	0.235	0.29	

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant M1	20M	QPSK	1	49	Back	15mm	18900	1880	23.2	24.0	0.105	0.13
	LTE Band 2_Ant M1	20M	QPSK	50	24		15mm	18900	1880	22.5	23.0	0.0924	0.10
	LTE Band 2_Ant M2	20M	QPSK	1	49		15mm	18900	1880	23.2	24.0	0.422	0.51
	LTE Band 2_Ant M2	20M	QPSK	50	24		15mm	18900	1880	22.5	23.0	0.315	0.35
	LTE Band 2_Ant M3	20M	QPSK	1	49		15mm	18900	1880	23.2	24.0	0.108	0.13
	LTE Band 2_Ant M3	20M	QPSK	50	24		15mm	18900	1880	22.5	23.0	0.0936	0.11
	LTE Band 2_Ant M4	20M	QPSK	1	49		15mm	18900	1880	23.2	24.0	0.418	0.50
	LTE Band 2_Ant M4	20M	QPSK	50	24		15mm	18900	1880	22.5	23.0	0.304	0.34
	LTE Band 2_Ant M5	20M	QPSK	1	49		15mm	18900	1880	23.2	24.0	0.426	0.51
	LTE Band 2_Ant M5	20M	QPSK	50	24		15mm	18900	1880	22.5	23.0	0.305	0.34
	LTE Band 2_Ant M6	20M	QPSK	1	49		15mm	18900	1880	23.2	24.0	0.112	0.13
	LTE Band 2_Ant M6	20M	QPSK	50	24		15mm	18900	1880	22.5	23.0	0.0898	0.10
	LTE Band 4_Ant M1	20M	QPSK	1	49		15mm	20175	1732.5	23.3	24.0	0.0402	0.05
	LTE Band 4_Ant M1	20M	QPSK	50	24		15mm	20175	1732.5	22.3	23.0	0.0311	0.04
	LTE Band 4_Ant M2	20M	QPSK	1	49		15mm	20175	1732.5	23.3	24.0	0.457	0.54
	LTE Band 4_Ant M2	20M	QPSK	50	24		15mm	20175	1732.5	22.3	23.0	0.329	0.39
	LTE Band 4_Ant M3	20M	QPSK	1	49		15mm	20175	1732.5	23.3	24.0	0.0415	0.05
	LTE Band 4_Ant M3	20M	QPSK	50	24		15mm	20175	1732.5	22.3	23.0	0.0358	0.04
	LTE Band 4_Ant M4	20M	QPSK	1	49		15mm	20175	1732.5	23.3	24.0	0.438	0.51
	LTE Band 4_Ant M4	20M	QPSK	50	24		15mm	20175	1732.5	22.3	23.0	0.351	0.41
	LTE Band 4_Ant M5	20M	QPSK	1	49		15mm	20175	1732.5	23.3	24.0	0.442	0.52
	LTE Band 4_Ant M5	20M	QPSK	50	24		15mm	20175	1732.5	22.3	23.0	0.361	0.42
	LTE Band 4_Ant M6	20M	QPSK	1	49		15mm	20175	1732.5	23.3	24.0	0.0418	0.05
	LTE Band 4_Ant M6	20M	QPSK	50	24		15mm	20175	1732.5	22.3	23.0	0.0354	0.04
	LTE Band 5_Ant M1	10M	QPSK	1	24	15mm	20525	836.5	23.3	24.0	0.0542	0.06	
	LTE Band 5_Ant M1	10M	QPSK	25	12	15mm	20525	836.5	22.2	23.0	0.0426	0.05	
	LTE Band 5_Ant M2	10M	QPSK	1	24	15mm	20525	836.5	23.3	24.0	0.318	0.37	
	LTE Band 5_Ant M2	10M	QPSK	25	12	15mm	20525	836.5	22.2	23.0	0.237	0.29	
	LTE Band 5_Ant M3	10M	QPSK	1	24	15mm	20525	836.5	23.3	24.0	0.0553	0.07	
	LTE Band 5_Ant M3	10M	QPSK	25	12	15mm	20525	836.5	22.2	23.0	0.0361	0.04	
	LTE Band 5_Ant M4	10M	QPSK	1	24	15mm	20525	836.5	23.3	24.0	0.317	0.37	
	LTE Band 5_Ant M4	10M	QPSK	25	12	15mm	20525	836.5	22.2	23.0	0.251	0.30	
	LTE Band 5_Ant M5	10M	QPSK	1	24	15mm	20525	836.5	23.3	24.0	0.329	0.39	
	LTE Band 5_Ant M5	10M	QPSK	25	12	15mm	20525	836.5	22.2	23.0	0.267	0.32	
	LTE Band 5_Ant M6	10M	QPSK	1	24	15mm	20525	836.5	23.3	24.0	0.0601	0.07	
	LTE Band 5_Ant M6	10M	QPSK	25	12	15mm	20525	836.5	22.2	23.0	0.0522	0.06	

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7_Ant M1	20M	QPSK	1	49	Back	15mm	21100	2535	23.5	24.8	0.131	0.18
	LTE Band 7_Ant M1	20M	QPSK	50	24		15mm	21100	2535	22.6	23.8	0.0917	0.12
4	LTE Band 7_Ant M2	20M	QPSK	1	49		15mm	21100	2535	23.5	24.8	0.594	0.80
	LTE Band 7_Ant M2	20M	QPSK	50	24		15mm	21100	2535	22.6	23.8	0.428	0.56
	LTE Band 7_Ant M3	20M	QPSK	1	49		15mm	21100	2535	23.5	24.8	0.128	0.17
	LTE Band 7_Ant M3	20M	QPSK	50	24		15mm	21100	2535	22.6	23.8	0.0935	0.12
	LTE Band 7_Ant M4	20M	QPSK	1	49		15mm	21100	2535	23.5	24.8	0.511	0.69
	LTE Band 7_Ant M4	20M	QPSK	50	24		15mm	21100	2535	22.6	23.8	0.467	0.62
	LTE Band 7_Ant M5	20M	QPSK	1	49		15mm	21100	2535	23.5	24.8	0.502	0.68
	LTE Band 7_Ant M5	20M	QPSK	50	24		15mm	21100	2535	22.6	23.8	0.438	0.58
	LTE Band 7_Ant M6	20M	QPSK	1	49		15mm	21100	2535	23.5	24.8	0.145	0.20
	LTE Band 7_Ant M6	20M	QPSK	50	24		15mm	21100	2535	22.6	23.8	0.0952	0.13
	LTE Band 12_Ant M1	10M	QPSK	1	24		15mm	23095	707.5	22.9	24.0	0.162	0.21
	LTE Band 12_Ant M1	10M	QPSK	25	12		15mm	23095	707.5	22.4	23.0	0.114	0.13
5	LTE Band 12_Ant M2	10M	QPSK	1	24		15mm	23095	707.5	22.9	24.0	0.231	0.30
	LTE Band 12_Ant M2	10M	QPSK	25	12		15mm	23095	707.5	22.4	23.0	0.152	0.17
	LTE Band 12_Ant M3	10M	QPSK	1	24		15mm	23095	707.5	22.9	24.0	0.157	0.20
	LTE Band 12_Ant M3	10M	QPSK	25	12		15mm	23095	707.5	22.4	23.0	0.109	0.13
	LTE Band 12_Ant M4	10M	QPSK	1	24		15mm	23095	707.5	22.9	24.0	0.202	0.26
	LTE Band 12_Ant M4	10M	QPSK	25	12		15mm	23095	707.5	22.4	23.0	0.141	0.16
	LTE Band 12_Ant M5	10M	QPSK	1	24		15mm	23095	707.5	22.9	24.0	0.211	0.27
	LTE Band 12_Ant M5	10M	QPSK	25	12		15mm	23095	707.5	22.4	23.0	0.167	0.19
	LTE Band 12_Ant M6	10M	QPSK	1	24		15mm	23095	707.5	22.9	24.0	0.171	0.22
	LTE Band 12_Ant M6	10M	QPSK	25	12		15mm	23095	707.5	22.4	23.0	0.120	0.14
	LTE Band 13_Ant M1	10M	QPSK	1	24	15mm	23230	782	23.3	24.0	0.0513	0.06	
	LTE Band 13_Ant M1	10M	QPSK	25	12	15mm	23230	782	21.9	23.0	0.0402	0.05	
6	LTE Band 13_Ant M2	10M	QPSK	1	24	15mm	23230	782	23.3	24.0	0.234	0.28	
	LTE Band 13_Ant M2	10M	QPSK	25	12	15mm	23230	782	21.9	23.0	0.155	0.20	
	LTE Band 13_Ant M3	10M	QPSK	1	24	15mm	23230	782	23.3	24.0	0.0529	0.06	
	LTE Band 13_Ant M3	10M	QPSK	25	12	15mm	23230	782	21.9	23.0	0.0418	0.05	
	LTE Band 13_Ant M4	10M	QPSK	1	24	15mm	23230	782	23.3	24.0	0.221	0.26	
	LTE Band 13_Ant M4	10M	QPSK	25	12	15mm	23230	782	21.9	23.0	0.138	0.18	
	LTE Band 13_Ant M5	10M	QPSK	1	24	15mm	23230	782	23.3	24.0	0.214	0.25	
	LTE Band 13_Ant M5	10M	QPSK	25	12	15mm	23230	782	21.9	23.0	0.122	0.16	
	LTE Band 13_Ant M6	10M	QPSK	1	24	15mm	23230	782	23.3	24.0	0.0544	0.06	
	LTE Band 13_Ant M6	10M	QPSK	25	12	15mm	23230	782	21.9	23.0	0.0416	0.05	
	LTE Band 14_Ant M1	10M	QPSK	1	24	15mm	23330	793	23.0	24.0	0.0579	0.07	
	LTE Band 14_Ant M1	10M	QPSK	25	12	15mm	23330	793	21.9	23.0	0.0511	0.07	
7	LTE Band 14_Ant M2	10M	QPSK	1	24	15mm	23330	793	23.0	24.0	0.224	0.28	
	LTE Band 14_Ant M2	10M	QPSK	25	12	15mm	23330	793	21.9	23.0	0.133	0.17	
	LTE Band 14_Ant M3	10M	QPSK	1	24	15mm	23330	793	23.0	24.0	0.0592	0.07	
	LTE Band 14_Ant M3	10M	QPSK	25	12	15mm	23330	793	21.9	23.0	0.0527	0.07	
	LTE Band 14_Ant M4	10M	QPSK	1	24	15mm	23330	793	23.0	24.0	0.216	0.27	
	LTE Band 14_Ant M4	10M	QPSK	25	12	15mm	23330	793	21.9	23.0	0.121	0.16	
	LTE Band 14_Ant M5	10M	QPSK	1	24	15mm	23330	793	23.0	24.0	0.220	0.28	
	LTE Band 14_Ant M5	10M	QPSK	25	12	15mm	23330	793	21.9	23.0	0.128	0.16	
	LTE Band 14_Ant M6	10M	QPSK	1	24	15mm	23330	793	23.0	24.0	0.0608	0.08	
	LTE Band 14_Ant M6	10M	QPSK	25	12	15mm	23330	793	21.9	23.0	0.0524	0.07	

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 25_Ant M1	20M	QPSK	1	49	Back	15mm	26365	1882.5	23.3	24.0	0.115	0.14
	LTE Band 25_Ant M1	20M	QPSK	50	24		15mm	26365	1882.5	22.3	23.0	0.0857	0.10
8	LTE Band 25_Ant M2	20M	QPSK	1	49		15mm	26365	1882.5	23.3	24.0	0.467	0.55
	LTE Band 25_Ant M2	20M	QPSK	50	24		15mm	26365	1882.5	22.3	23.0	0.328	0.39
	LTE Band 25_Ant M3	20M	QPSK	1	49		15mm	26365	1882.5	23.3	24.0	0.111	0.13
	LTE Band 25_Ant M3	20M	QPSK	50	24		15mm	26365	1882.5	22.3	23.0	0.0897	0.11
	LTE Band 25_Ant M4	20M	QPSK	1	49		15mm	26365	1882.5	23.3	24.0	0.452	0.53
	LTE Band 25_Ant M4	20M	QPSK	50	24		15mm	26365	1882.5	22.3	23.0	0.304	0.36
	LTE Band 25_Ant M5	20M	QPSK	1	49		15mm	26365	1882.5	23.3	24.0	0.459	0.54
	LTE Band 25_Ant M5	20M	QPSK	50	24		15mm	26365	1882.5	22.3	23.0	0.317	0.37
	LTE Band 25_Ant M6	20M	QPSK	1	49		15mm	26365	1882.5	23.3	24.0	0.122	0.14
	LTE Band 25_Ant M6	20M	QPSK	50	24		15mm	26365	1882.5	22.3	23.0	0.0896	0.11
	LTE Band 26_Ant M1	15M	QPSK	1	37		15mm	26865	831.5	23.5	24.0	0.0604	0.07
	LTE Band 26_Ant M1	15M	QPSK	36	19		15mm	26865	831.5	22.2	23.0	0.0486	0.06
9	LTE Band 26_Ant M2	15M	QPSK	1	37		15mm	26865	831.5	23.5	24.0	0.394	0.44
	LTE Band 26_Ant M2	15M	QPSK	36	19		15mm	26865	831.5	22.2	23.0	0.287	0.35
	LTE Band 26_Ant M3	15M	QPSK	1	37		15mm	26865	831.5	23.5	24.0	0.0611	0.07
	LTE Band 26_Ant M3	15M	QPSK	36	19		15mm	26865	831.5	22.2	23.0	0.0492	0.06
	LTE Band 26_Ant M4	15M	QPSK	1	37		15mm	26865	831.5	23.5	24.0	0.375	0.42
	LTE Band 26_Ant M4	15M	QPSK	36	19		15mm	26865	831.5	22.2	23.0	0.268	0.32
	LTE Band 26_Ant M5	15M	QPSK	1	37		15mm	26865	831.5	23.5	24.0	0.386	0.43
	LTE Band 26_Ant M5	15M	QPSK	36	19		15mm	26865	831.5	22.2	23.0	0.274	0.33
	LTE Band 26_Ant M6	15M	QPSK	1	37		15mm	26865	831.5	23.5	24.0	0.0618	0.07
	LTE Band 26_Ant M6	15M	QPSK	36	19		15mm	26865	831.5	22.2	23.0	0.0501	0.06
	LTE Band 38_Ant M1	20M	QPSK	1	49	15mm	38000	2595	23.4	24.0	0.0203	0.02	
	LTE Band 38_Ant M1	20M	QPSK	50	24	15mm	38000	2595	22.5	23.0	0.0133	0.02	
	LTE Band 38_Ant M2	20M	QPSK	1	49	15mm	38000	2595	23.4	24.0	0.404	0.46	
	LTE Band 38_Ant M2	20M	QPSK	50	24	15mm	38000	2595	22.5	23.0	0.326	0.37	
	LTE Band 38_Ant M3	20M	QPSK	1	49	15mm	38000	2595	23.4	24.0	0.0211	0.02	
	LTE Band 38_Ant M3	20M	QPSK	50	24	15mm	38000	2595	22.5	23.0	0.0145	0.02	
	LTE Band 38_Ant M4	20M	QPSK	1	49	15mm	38000	2595	23.4	24.0	0.392	0.45	
	LTE Band 38_Ant M4	20M	QPSK	50	24	15mm	38000	2595	22.5	23.0	0.314	0.35	
	LTE Band 38_Ant M5	20M	QPSK	1	49	15mm	38000	2595	23.4	24.0	0.399	0.46	
	LTE Band 38_Ant M5	20M	QPSK	50	24	15mm	38000	2595	22.5	23.0	0.323	0.36	
	LTE Band 38_Ant M6	20M	QPSK	1	49	15mm	38000	2595	23.4	24.0	0.0214	0.02	
	LTE Band 38_Ant M6	20M	QPSK	50	24	15mm	38000	2595	22.5	23.0	0.0138	0.02	
	LTE Band 41_Ant M1	20M	QPSK	1	49	15mm	40620	2593	25.2	26.0	0.0324	0.04	
	LTE Band 41_Ant M1	20M	QPSK	50	24	15mm	40620	2593	24.5	25.0	0.0213	0.02	
10	LTE Band 41_Ant M2	20M	QPSK	1	49	15mm	40620	2593	25.2	26.0	0.646	0.78	
	LTE Band 41_Ant M2	20M	QPSK	50	24	15mm	40620	2593	24.5	25.0	0.522	0.59	
	LTE Band 41_Ant M3	20M	QPSK	1	49	15mm	40620	2593	25.2	26.0	0.0337	0.04	
	LTE Band 41_Ant M3	20M	QPSK	50	24	15mm	40620	2593	24.5	25.0	0.0232	0.03	
	LTE Band 41_Ant M4	20M	QPSK	1	49	15mm	40620	2593	25.2	26.0	0.627	0.75	
	LTE Band 41_Ant M4	20M	QPSK	50	24	15mm	40620	2593	24.5	25.0	0.503	0.56	
	LTE Band 41_Ant M5	20M	QPSK	1	49	15mm	40620	2593	25.2	26.0	0.639	0.77	
	LTE Band 41_Ant M5	20M	QPSK	50	24	15mm	40620	2593	24.5	25.0	0.517	0.58	
	LTE Band 41_Ant M6	20M	QPSK	1	49	15mm	40620	2593	25.2	26.0	0.0343	0.04	
	LTE Band 41_Ant M6	20M	QPSK	50	24	15mm	40620	2593	24.5	25.0	0.0221	0.02	

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 48_Ant M1	20M	QPSK	1	49	Back	15mm	55990	3625	23.1	24.0	0.131	0.16
	LTE Band 48_Ant M1	20M	QPSK	50	24		15mm	55990	3625	22.0	23.0	0.0857	0.11
11	LTE Band 48_Ant M2	20M	QPSK	1	49		15mm	55990	3625	23.1	24.0	0.575	0.71
	LTE Band 48_Ant M2	20M	QPSK	50	24		15mm	55990	3625	22.0	23.0	0.436	0.55
	LTE Band 48_Ant M3	20M	QPSK	1	49		15mm	55990	3625	23.1	24.0	0.137	0.17
	LTE Band 48_Ant M3	20M	QPSK	50	24		15mm	55990	3625	22.0	23.0	0.0896	0.11
	LTE Band 48_Ant M4	20M	QPSK	1	49		15mm	55990	3625	23.1	24.0	0.564	0.69
	LTE Band 48_Ant M4	20M	QPSK	50	24		15mm	55990	3625	22.0	23.0	0.422	0.53
	LTE Band 48_Ant M5	20M	QPSK	1	49		15mm	55990	3625	23.1	24.0	0.559	0.69
	LTE Band 48_Ant M5	20M	QPSK	50	24		15mm	55990	3625	22.0	23.0	0.416	0.52
	LTE Band 48_Ant M6	20M	QPSK	1	49		15mm	55990	3625	23.1	24.0	0.146	0.18
	LTE Band 48_Ant M6	20M	QPSK	50	24		15mm	55990	3625	22.0	23.0	0.0954	0.12
	LTE Band 66_Ant M1	20M	QPSK	1	49		15mm	132322	1745	23.1	24.0	0.0483	0.06
	LTE Band 66_Ant M1	20M	QPSK	50	24		15mm	132571	1770	22.5	23.0	0.0371	0.04
12	LTE Band 66_Ant M2	20M	QPSK	1	49		15mm	132571	1770	23.1	24.0	0.501	0.62
	LTE Band 66_Ant M2	20M	QPSK	50	24		15mm	132571	1770	22.5	23.0	0.397	0.45
	LTE Band 66_Ant M3	20M	QPSK	1	49		15mm	132322	1745	23.1	24.0	0.0477	0.06
	LTE Band 66_Ant M3	20M	QPSK	50	24		15mm	132322	1745	22.5	23.0	0.0363	0.04
	LTE Band 66_Ant M4	20M	QPSK	1	49		15mm	132571	1770	23.1	24.0	0.486	0.60
	LTE Band 66_Ant M4	20M	QPSK	50	24		15mm	132571	1770	22.5	23.0	0.373	0.42
	LTE Band 66_Ant M5	20M	QPSK	1	49		15mm	132322	1745	23.1	24.0	0.492	0.61
	LTE Band 66_Ant M5	20M	QPSK	50	24		15mm	132322	1745	22.5	23.0	0.386	0.43
	LTE Band 66_Ant M6	20M	QPSK	1	49		15mm	132322	1745	23.1	24.0	0.0492	0.06
	LTE Band 66_Ant M6	20M	QPSK	50	24		15mm	132322	1745	22.5	23.0	0.0385	0.04
	LTE Band 71_Ant M1	20M	QPSK	1	49	15mm	133222	680.5	23.0	24.0	0.206	0.26	
	LTE Band 71_Ant M1	20M	QPSK	50	24	15mm	133222	680.5	22.2	23.0	0.109	0.13	
13	LTE Band 71_Ant M2	20M	QPSK	1	49	15mm	133222	680.5	23.0	24.0	0.333	0.42	
	LTE Band 71_Ant M2	20M	QPSK	50	24	15mm	133222	680.5	22.2	23.0	0.218	0.26	
	LTE Band 71_Ant M3	20M	QPSK	1	49	15mm	133222	680.5	23.0	24.0	0.224	0.28	
	LTE Band 71_Ant M3	20M	QPSK	50	24	15mm	133222	680.5	22.2	23.0	0.118	0.14	
	LTE Band 71_Ant M4	20M	QPSK	1	49	15mm	133222	680.5	23.0	24.0	0.324	0.41	
	LTE Band 71_Ant M4	20M	QPSK	50	24	15mm	133222	680.5	22.2	23.0	0.204	0.25	
	LTE Band 71_Ant M5	20M	QPSK	1	49	15mm	133222	680.5	23.0	24.0	0.329	0.41	
	LTE Band 71_Ant M5	20M	QPSK	50	24	15mm	133222	680.5	22.2	23.0	0.311	0.37	
	LTE Band 71_Ant M6	20M	QPSK	1	49	15mm	133222	680.5	23.0	24.0	0.235	0.30	
	LTE Band 71_Ant M6	20M	QPSK	50	24	15mm	133222	680.5	22.2	23.0	0.121	0.15	