

TEST REPORT

Reference No..... : WTX24X05102626W002
FCC ID : 2ASIVPGH123W
Applicant : PIN GENIE, INC. DBA LOCKLY
Address : 676 Transfer Rd., St. Paul, MN 55114
Manufacturer : Smart Electronic Industrial (Dong Guan) Co., Ltd.
Address : Qing Long Road, Long Jian Tian Village, Huang Jiang Town, Dong Guan,
Guang Dong, China
Product Name : Vision Connect Hub
Model No..... : PGH123W
Standards : FCC Part 15.247
Date of Receipt sample : 2024-05-06
Date of Test..... : 2024-05-06 to 2024-05-22
Date of Issue : 2024-05-25
Test Report Form No. : WTX_Part 15_247W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

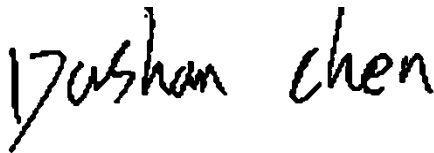

Dashan Chen

Approved by:



Jason Su

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY.....	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS.....	11
3. ANTENNA REQUIREMENT.....	12
3.1 STANDARD APPLICABLE	12
3.2 EVALUATION INFORMATION	12
4. POWER SPECTRAL DENSITY.....	13
4.1 STANDARD APPLICABLE	13
4.2 TEST SETUP BLOCK DIAGRAM	13
4.3 TEST PROCEDURE.....	13
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	13
5. DTS BANDWIDTH.....	14
5.1 STANDARD APPLICABLE	14
5.2 TEST SETUP BLOCK DIAGRAM	14
5.3 TEST PROCEDURE.....	14
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	14
6. RF OUTPUT POWER.....	15
6.1 STANDARD APPLICABLE	15
6.2 TEST SETUP BLOCK DIAGRAM	15
6.3 TEST PROCEDURE.....	15
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	15
7. FIELD STRENGTH OF SPURIOUS EMISSIONS.....	16
7.1 STANDARD APPLICABLE	16
7.2 TEST PROCEDURE.....	16
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	18
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	18
8. OUT OF BAND EMISSIONS.....	22
8.1 STANDARD APPLICABLE	22
8.2 TEST PROCEDURE.....	22
8.3 SUMMARY OF TEST RESULTS/PLOTS.....	23
9. CONDUCTED EMISSIONS.....	24
9.1 TEST PROCEDURE.....	24
9.2 BASIC TEST SETUP BLOCK DIAGRAM	24
9.3 TEST RECEIVER SETUP.....	24
9.4 SUMMARY OF TEST RESULTS/PLOTS.....	24
APPENDIX SUMMARY	27
APPENDIX A.....	28
APPENDIX B.....	30
APPENDIX C.....	32
APPENDIX D.....	34
APPENDIX PHOTOGRAPHS.....	36

Report version

Version No.	Date of issue	Description
Rev.00	2024-05-25	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Vision Connect Hub
Trade Name	LOCKLY
Model No.:	PGH123W
Adding Model(s):	/
Rated Voltage:	DC5V
Battery Capacity	HNAD050100U1 Input:AC100-240 50/60Hz 0.35A Output:DC5V1.0A
Power Adapter:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	908MHz-924MHz
RF Output Power:	27.81dBm (Conducted)
Modulation:	OFDM
Quantity of Channels:	3
Channel Separation:	8MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	-2.08dBi
<i>Note The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	908.0MHz
TM2	Middle Channel	916.0MHz
TM3	High Channel	924.0MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Cable	1.0	Shielded	With Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	±0.42dB
Occupied Bandwidth	Conducted	±1.5%
Power Spectral Density	Conducted	±1.8dB
Conducted Spurious Emission	Conducted	±2.17dB
Conducted Emissions	Conducted	9-150kHz ±3.74dB
		0.15-30MHz ±3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-18GHz ±3.92dB

1.7 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2024-02-24	2025-02-23
WTXE1022A 1002	GSM Tester	Rohde & Schwarz	CMU200	114403	2024-02-27	2025-02-26
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2024-03-19	2025-03-18
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2024-02-24	2025-02-23
WTXE1044A 1001	Signal Generator	Agilent	83752A	3610A014 53	2024-02-24	2025-02-23
WTXE1045A 1001	Vector Signal Generator	Agilent	N5182A	MY470702 02	2024-02-24	2025-02-23
WTXE1018A 1001	Power Divider	Weinschel	1506A	PM204	2024-02-29	2025-02-28
<input type="checkbox"/> Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2024-02-24	2025-02-23
<input type="checkbox"/> Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	2002	2024-02-27	2025-02-26
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2024-02-26	2025-02-25
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28

<input type="checkbox"/> Chamber B: Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2024-02-24	2025-02-23
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2024-02-24	2025-02-23
<input checked="" type="checkbox"/> Chamber C: Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
<input checked="" type="checkbox"/> Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2024-02-27	2025-02-26
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
<input type="checkbox"/> Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2023-12-12	2024-12-11
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2024-02-24	2025-02-23
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2024-02-24	2025-02-23
<input checked="" type="checkbox"/> Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2024-02-24	2025-02-23

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 1#)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 2#)*	SKET	EMC-I	V2.0

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information


This product has an Integral antenna, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram

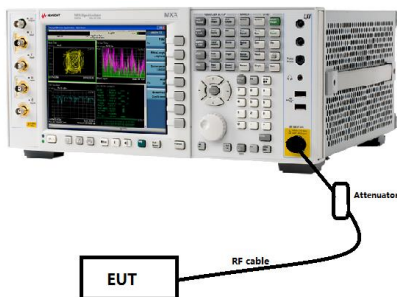

4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.

4.4 Summary of Test Results/Plots


Please refer to Appendix A

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

5.2 Test Setup Block Diagram

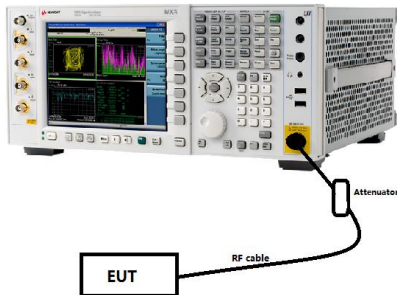

5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots


Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

6.2 Test Setup Block Diagram

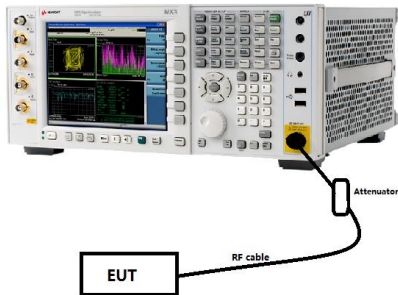

6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

7.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

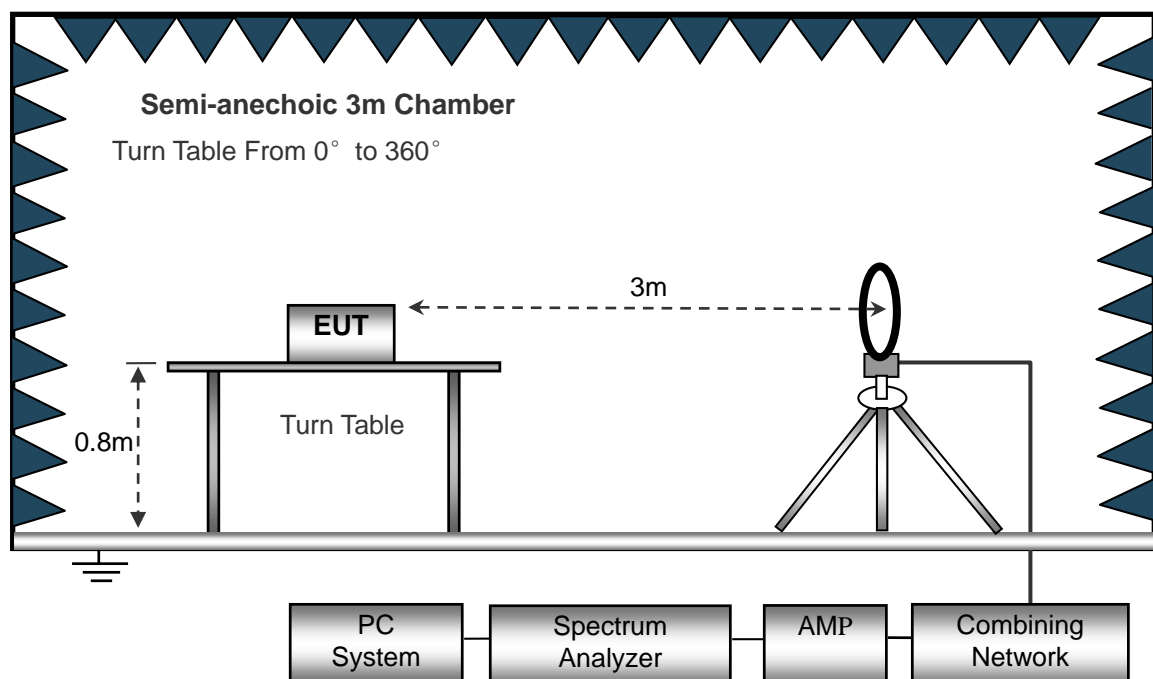

The test setup for emission measurement from 30MHz to 1GHz.

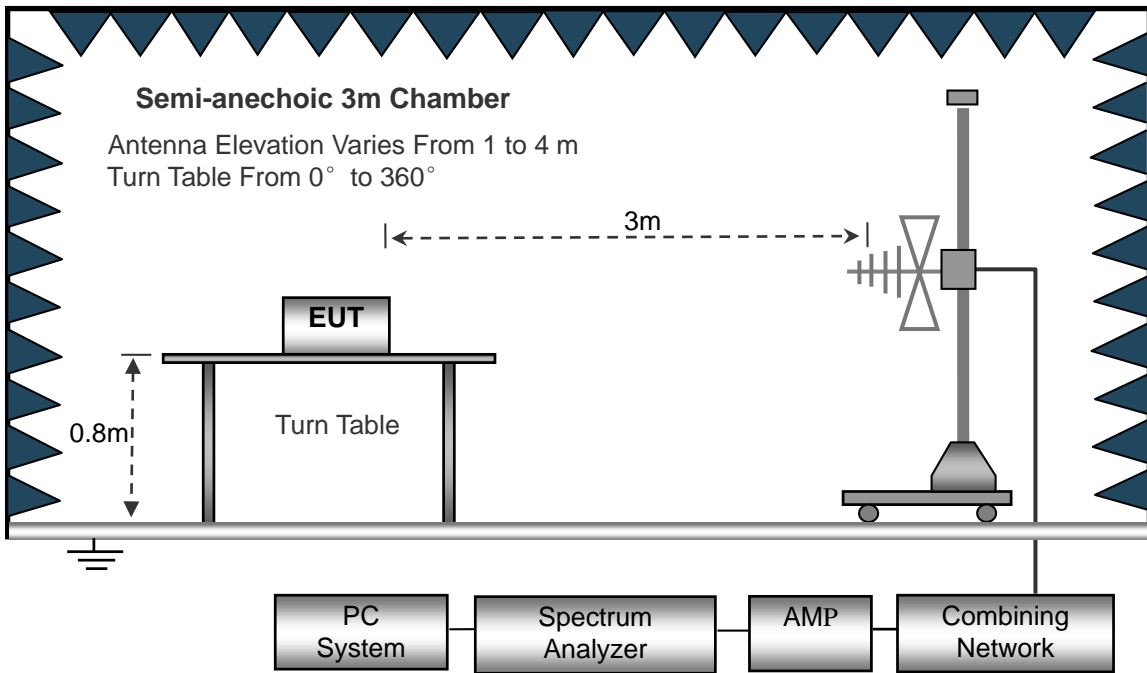

The test setup for emission measurement above 1GHz.

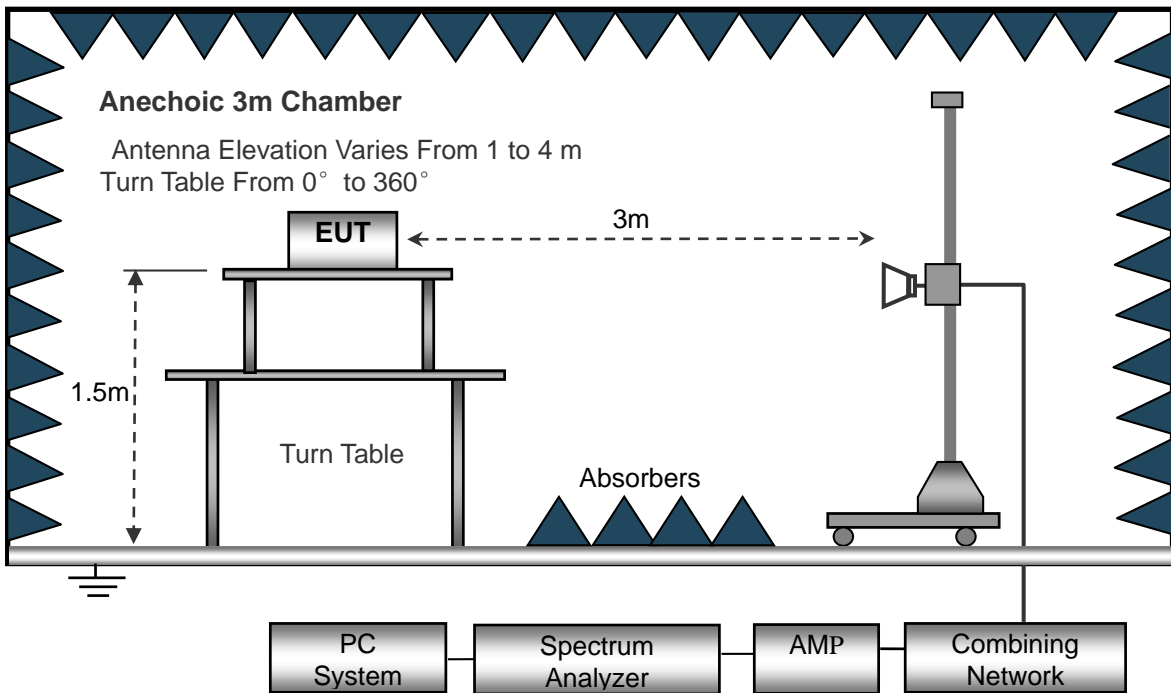

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

7.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


➤ Spurious Emissions Below 1GHz

Test Channel	Low Channel(worst case)	Polarity:	Horizontal
--------------	-------------------------	-----------	------------

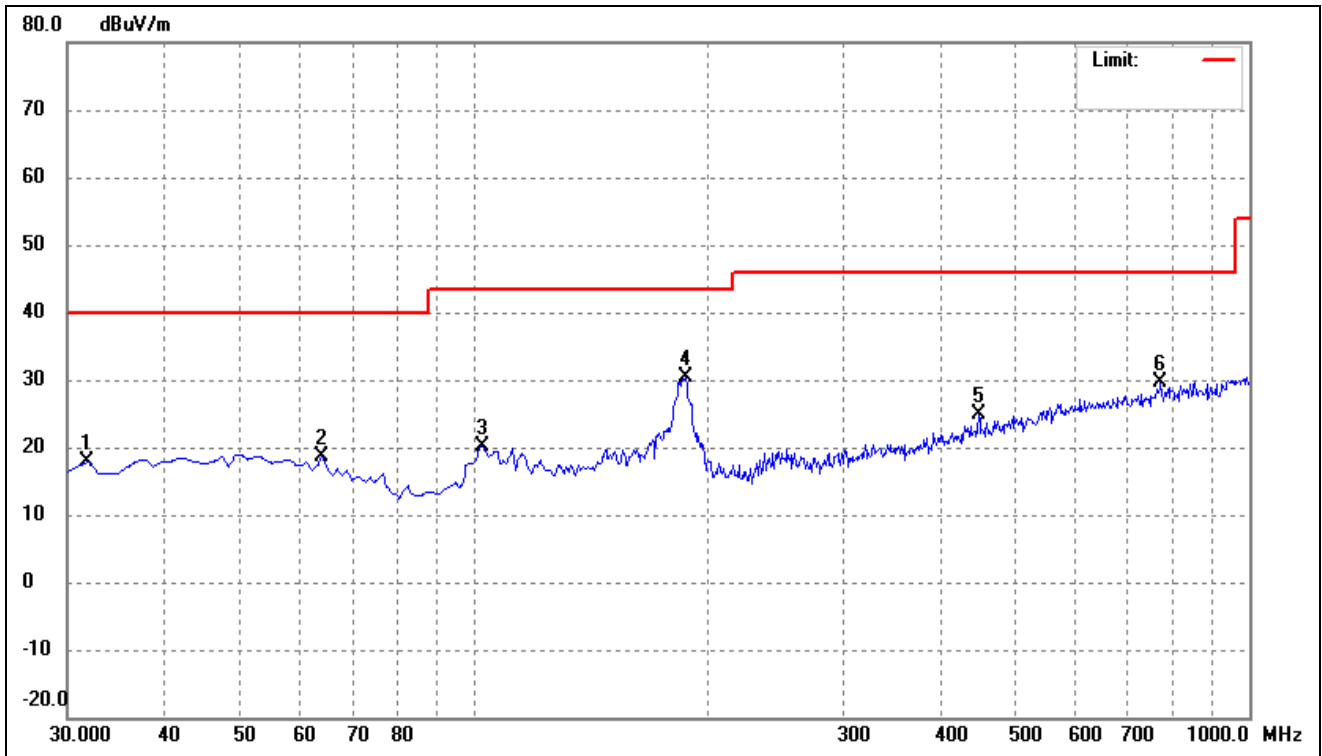

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.9400	27.86	-9.94	17.92	40.00	-22.08	-	-	QP
2	63.9500	28.28	-9.66	18.62	40.00	-21.38	-	-	QP
3	102.7500	32.38	-12.24	20.14	43.50	-23.36	-	-	QP
4	188.1100	41.57	-11.21	30.36	43.50	-13.14	-	-	QP
5	449.0400	29.39	-4.61	24.78	46.00	-21.22	-	-	QP
6	769.1399	29.64	0.01	29.65	46.00	-16.35	-	-	QP

Test Channel	Low Channel(worst case)	Polarity:	Vertical
--------------	-------------------------	-----------	----------

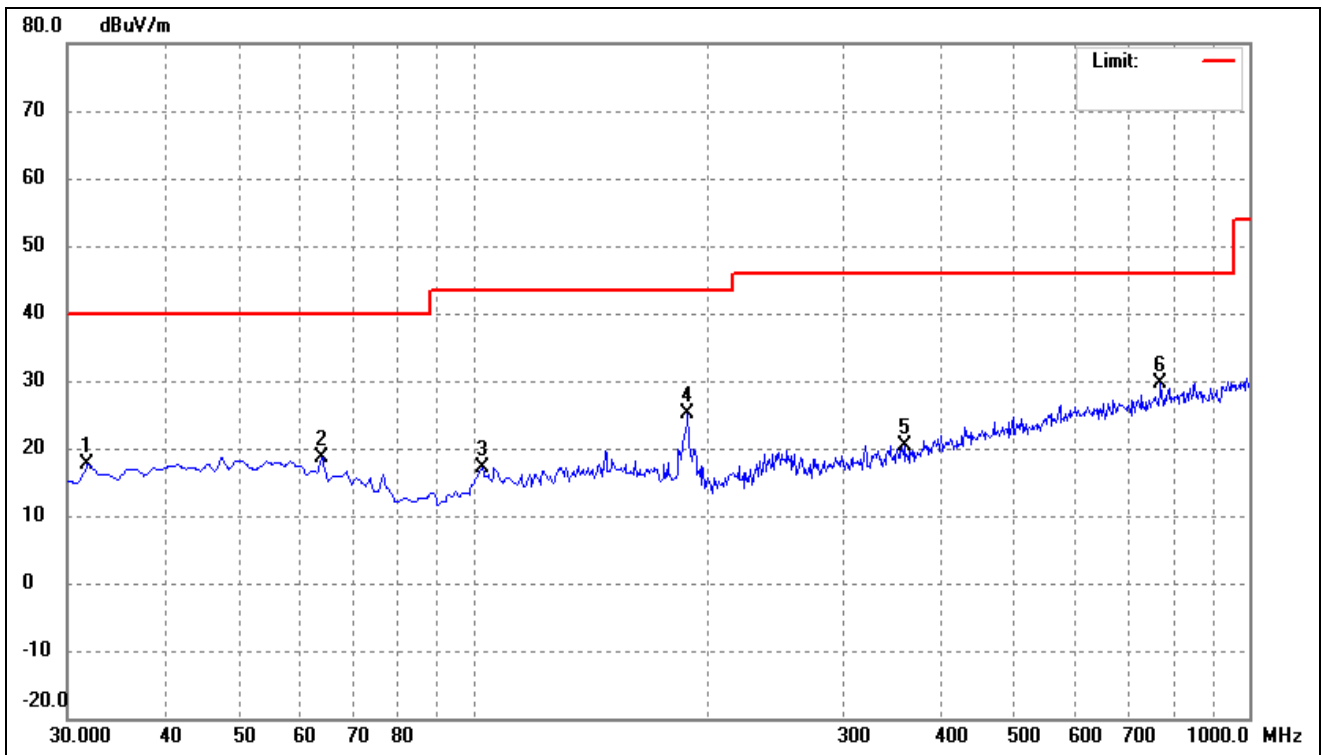

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.9400	27.58	-9.94	17.64	40.00	-22.36	-	-	QP
2	63.9500	28.28	-9.66	18.62	40.00	-21.38	-	-	QP
3	102.7500	29.35	-12.24	17.11	43.50	-26.39	-	-	QP
4	189.0800	36.50	-11.32	25.18	43.50	-18.32	-	-	QP
5	359.8000	27.32	-6.86	20.46	46.00	-25.54	-	-	QP
6	769.1399	29.64	0.01	29.65	46.00	-16.35	-	-	QP

Remark: '-Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

➤ Spurious Emissions Above 1GHz

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-903.0MHz							
1800.000	59.64	-20.81	38.83	74.00	-35.17	H	PK
2724.000	52.92	-18.20	34.72	74.00	-39.28	H	PK
1816.000	54.26	-20.72	33.54	74.00	-40.46	V	PK
2724.000	52.42	-18.20	34.22	74.00	-39.78	V	PK
Middle Channel-909.4MHz							
1832.000	63.14	-20.62	42.52	74.00	-31.48	H	PK
2748.000	53.41	-18.15	35.26	74.00	-38.74	H	PK
1832.000	55.00	-20.62	34.38	74.00	-39.62	V	PK
2748.000	53.62	-18.15	35.47	74.00	-38.53	V	PK
High Channel-914.2MHz							
1845.000	68.84	-20.54	48.30	74.00	-25.70	H	PK
2772.000	53.82	-18.10	35.72	74.00	-38.28	H	PK
1848.000	55.93	-20.52	35.41	74.00	-38.59	V	PK
2772.000	51.59	-18.10	33.49	74.00	-40.51	V	PK

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission

must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

RBW as a function of frequency

Frequency	RBW
9kHz to 150kHz	200Hz to 300Hz
0.15MHz to 30MHz	9kHz to 10kHz
30MHz to 1000MHz	100kHz to 120kHz
>1000MHz	1MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

8.3 Summary of Test Results/Plots

Please refer to Appendix D


9. Conducted Emissions

9.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram

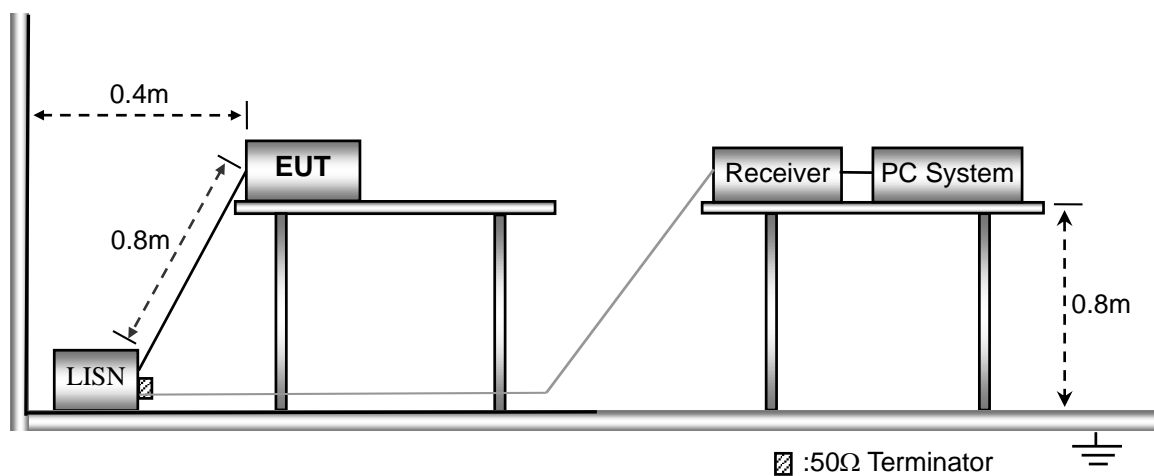


9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal


9.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

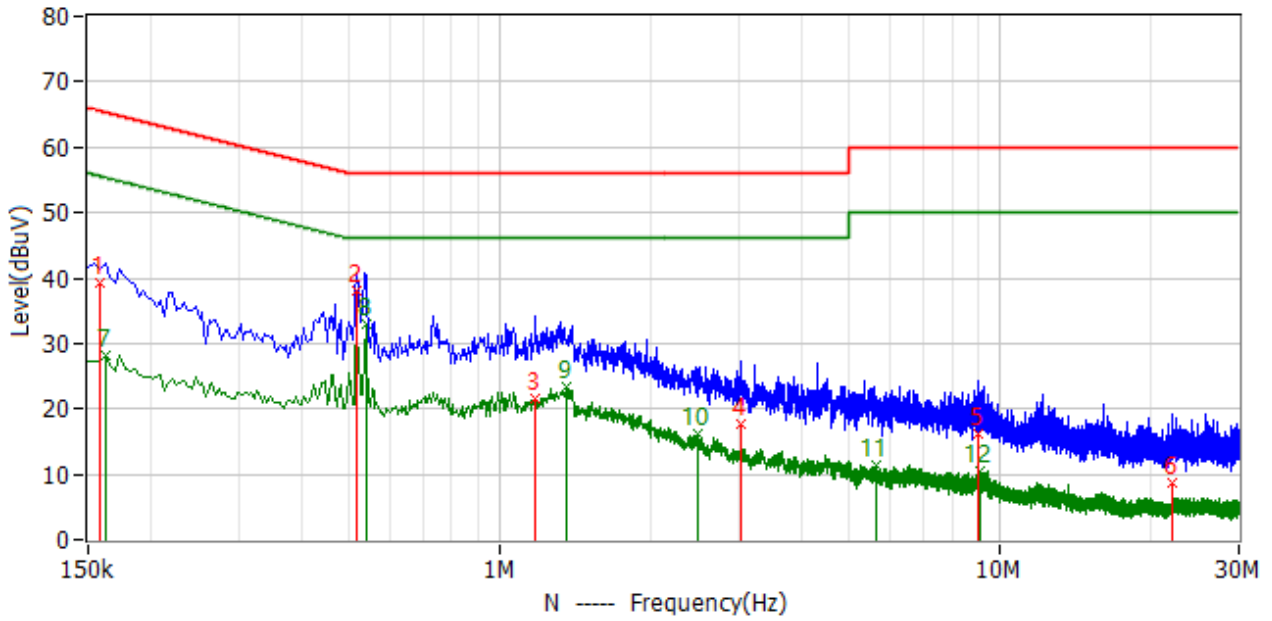

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	158.000kHz	29.7	9.7	39.4	65.6	-26.2	QP
2	518.000kHz	28.6	9.6	38.2	56.0	-17.8	QP
3	1.178MHz	11.9	9.7	21.6	56.0	-34.4	QP
4	3.030MHz	7.9	9.8	17.7	56.0	-38.3	QP
5	9.010MHz	6.2	9.9	16.1	60.0	-43.9	QP
6	22.154MHz	-1.5	10.1	8.6	60.0	-51.4	QP
7*	162.000kHz	18.6	9.7	28.3	55.4	-27.1	AV
8*	538.000kHz	23.2	9.7	32.9	46.0	-13.1	AV
9*	1.362MHz	13.6	9.7	23.3	46.0	-22.7	AV
10*	2.490MHz	6.5	9.7	16.2	46.0	-29.8	AV
11*	5.662MHz	1.6	9.8	11.4	50.0	-38.6	AV
12*	9.078MHz	0.7	9.9	10.6	50.0	-39.4	AV

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

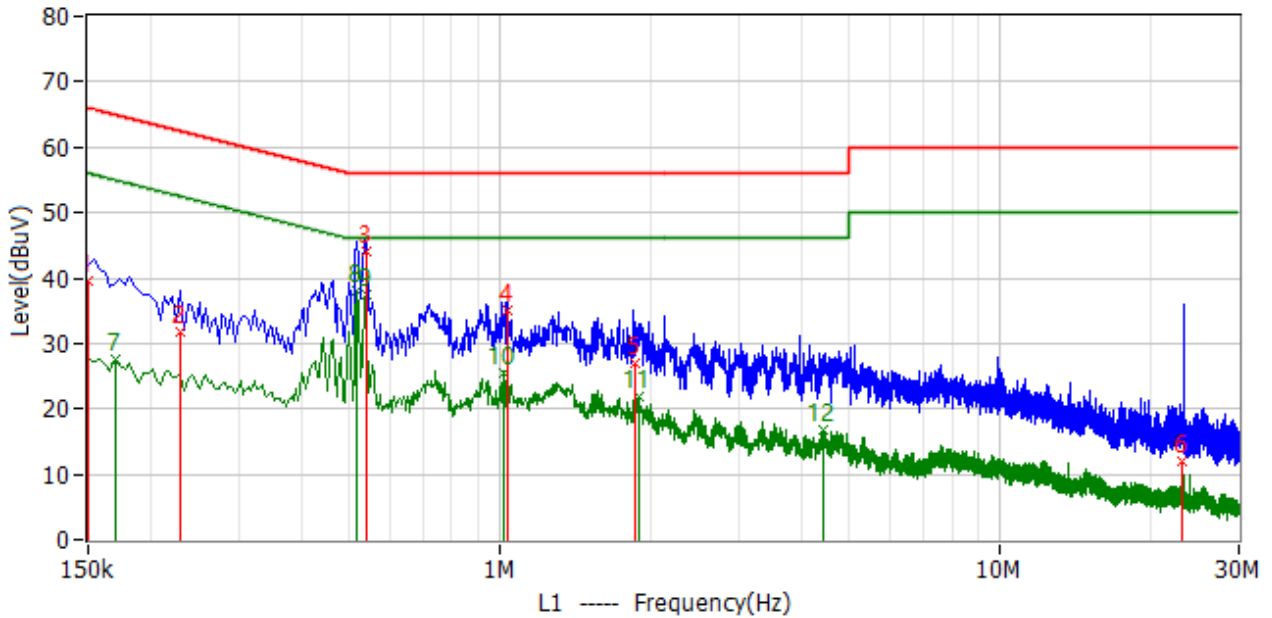

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	150.000kHz	29.6	9.9	39.5	66.0	-26.5	QP
2	230.000kHz	22.0	9.8	31.8	62.4	-30.6	QP
3	538.000kHz	34.4	9.7	44.1	56.0	-11.9	QP
4	1.034MHz	25.2	9.8	35.0	56.0	-21.0	QP
5	1.854MHz	17.1	9.8	26.9	56.0	-29.1	QP
6	23.018MHz	1.9	10.1	12.0	60.0	-48.0	QP
7*	170.000kHz	17.9	9.8	27.7	55.0	-27.3	AV
8*	518.000kHz	28.3	9.7	38.0	46.0	-8.0	AV
9*	538.000kHz	27.9	9.7	37.6	46.0	-8.4	AV
10*	1.018MHz	15.8	9.8	25.6	46.0	-20.4	AV
11*	1.890MHz	12.0	9.8	21.8	46.0	-24.2	AV
12*	4.438MHz	6.9	9.9	16.8	46.0	-29.2	AV




APPENDIX SUMMARY

Project No.	WTX24X05102626W	Test Engineer	Dashan
Start date	2024/5/24	Finish date	2024/5/24
Temperature	24°C	Humidity	47%
RF specifications	802.11ah		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant

APPENDIX A

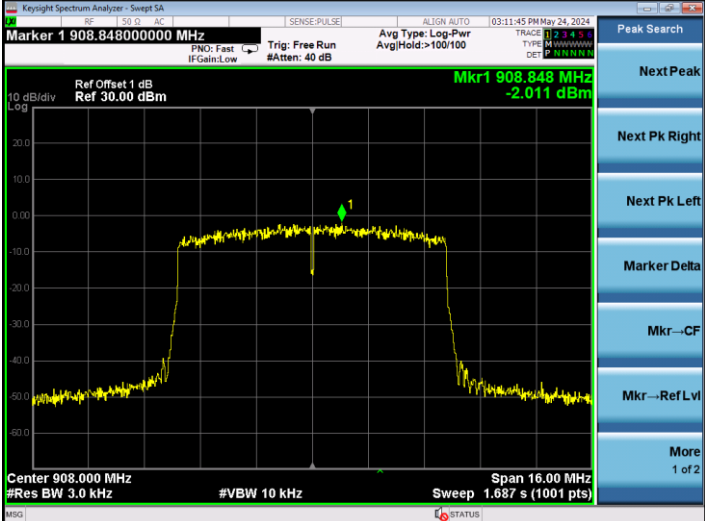Power Spectral Density			
Test Bandwidth MHz	Test Frequency MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
8	908	-2.011	8
	916	-3.205	8
	924	-2.460	8

<p>8MHz-Low</p>	 <p>Keyight Spectrum Analyzer - Swept SA</p> <p>Marker 1 908.84800000 MHz</p> <p>Trig: Free Run #Atten: 40 dB</p> <p>Avg Type: Log-Pwr Avg/Hold: >100/100</p> <p>Ref Offset 1 dB Ref 30.00 dBm</p> <p>Mkr1 908.848 MHz -2.011 dBm</p> <p>Center 908.000 MHz #Res BW 3.0 kHz #VBW 10 kHz Span 16.00 MHz Sweep 1.687 s (1001 pts)</p> <p>Peak Search</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Marker Delta</p> <p>Mkr--CF</p> <p>Mkr--Ref Lvl</p> <p>More 1 of 2</p>
<p>8MHz-Middle</p>	 <p>Keyight Spectrum Analyzer - Swept SA</p> <p>Marker 1 915.24800000 MHz</p> <p>Trig: Free Run #Atten: 40 dB</p> <p>Avg Type: Log-Pwr Avg/Hold: >100/100</p> <p>Ref Offset 1 dB Ref 30.00 dBm</p> <p>Mkr1 915.248 MHz -3.205 dBm</p> <p>Center 916.000 MHz #Res BW 3.0 kHz #VBW 10 kHz Span 16.00 MHz Sweep 1.687 s (1001 pts)</p> <p>Peak Search</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Marker Delta</p> <p>Mkr--CF</p> <p>Mkr--Ref Lvl</p> <p>More 1 of 2</p>
<p>8MHz-High</p>	 <p>Keyight Spectrum Analyzer - Swept SA</p> <p>Marker 1 923.66400000 MHz</p> <p>Trig: Free Run #Atten: 40 dB</p> <p>Avg Type: Log-Pwr Avg/Hold: >100/100</p> <p>Ref Offset 1 dB Ref 30.00 dBm</p> <p>Mkr1 923.664 MHz -2.460 dBm</p> <p>Center 924.000 MHz #Res BW 3.0 kHz #VBW 10 kHz Span 16.00 MHz Sweep 1.687 s (1001 pts)</p> <p>Peak Search</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Marker Delta</p> <p>Mkr--CF</p> <p>Mkr--Ref Lvl</p> <p>More 1 of 2</p>




APPENDIX B

DTS Bandwidth			
Test Bandwidth MHz	Test Frequency MHz	6 dB Bandwidth MHz	Limit kHz
8	908	7.543	≥500
	916	7.625	≥500
	924	7.544	≥500

<p>8MHz-Low</p>	<p>Center Freq 908.000000 MHz</p> <p>Center Freq 908.000000 MHz</p> <p>Trig: Free Run</p> <p>Avg/Hold:>10/10</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>10 dB/div Ref 30.00 dBm</p> <p>Center 908 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 16 MHz</p> <p>Sweep 2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>27.7 dBm</td> </tr> <tr> <td>7.5346 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>16.359 kHz</td> <td>% of OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>7.543 MHz</td> <td>x dB -6.00 dB</td> </tr> </table> <p>Frequency</p> <p>Center Freq 908.000000 MHz</p> <p>CF Step 1.600000 MHz</p> <p>Freq Offset 0 Hz</p>	Occupied Bandwidth	Total Power	27.7 dBm	7.5346 MHz			Transmit Freq Error	16.359 kHz	% of OBW Power 99.00 %	x dB Bandwidth	7.543 MHz	x dB -6.00 dB
Occupied Bandwidth	Total Power	27.7 dBm											
7.5346 MHz													
Transmit Freq Error	16.359 kHz	% of OBW Power 99.00 %											
x dB Bandwidth	7.543 MHz	x dB -6.00 dB											
<p>8MHz-Middle</p>	<p>Center Freq 916.000000 MHz</p> <p>Center Freq 916.000000 MHz</p> <p>Trig: Free Run</p> <p>Avg/Hold:>10/10</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>10 dB/div Ref 30.00 dBm</p> <p>Center 916 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 16 MHz</p> <p>Sweep 2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>27.0 dBm</td> </tr> <tr> <td>7.5637 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>9.729 kHz</td> <td>% of OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>7.625 MHz</td> <td>x dB -6.00 dB</td> </tr> </table> <p>Trace/Detector</p> <p>Clear Write</p> <p>Average</p> <p>Max Hold</p> <p>Min Hold</p> <p>Detector Average</p>	Occupied Bandwidth	Total Power	27.0 dBm	7.5637 MHz			Transmit Freq Error	9.729 kHz	% of OBW Power 99.00 %	x dB Bandwidth	7.625 MHz	x dB -6.00 dB
Occupied Bandwidth	Total Power	27.0 dBm											
7.5637 MHz													
Transmit Freq Error	9.729 kHz	% of OBW Power 99.00 %											
x dB Bandwidth	7.625 MHz	x dB -6.00 dB											
<p>8MHz-High</p>	<p>Center Freq 924.000000 MHz</p> <p>Center Freq 924.000000 MHz</p> <p>Trig: Free Run</p> <p>Avg/Hold:>10/10</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>10 dB/div Ref 30.00 dBm</p> <p>Center 924 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 16 MHz</p> <p>Sweep 2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>27.3 dBm</td> </tr> <tr> <td>7.5282 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-12.453 kHz</td> <td>% of OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>7.544 MHz</td> <td>x dB -6.00 dB</td> </tr> </table> <p>Trace/Detector</p> <p>Clear Write</p> <p>Average</p> <p>Max Hold</p> <p>Min Hold</p> <p>Detector Average</p>	Occupied Bandwidth	Total Power	27.3 dBm	7.5282 MHz			Transmit Freq Error	-12.453 kHz	% of OBW Power 99.00 %	x dB Bandwidth	7.544 MHz	x dB -6.00 dB
Occupied Bandwidth	Total Power	27.3 dBm											
7.5282 MHz													
Transmit Freq Error	-12.453 kHz	% of OBW Power 99.00 %											
x dB Bandwidth	7.544 MHz	x dB -6.00 dB											

APPENDIX C



RF Output Power			
Test Bandwidth MHz	Test Frequency MHz	Reading dBm	Limit dBm
8	908	27.81	30.00
	916	26.81	30.00
	924	27.51	30.00
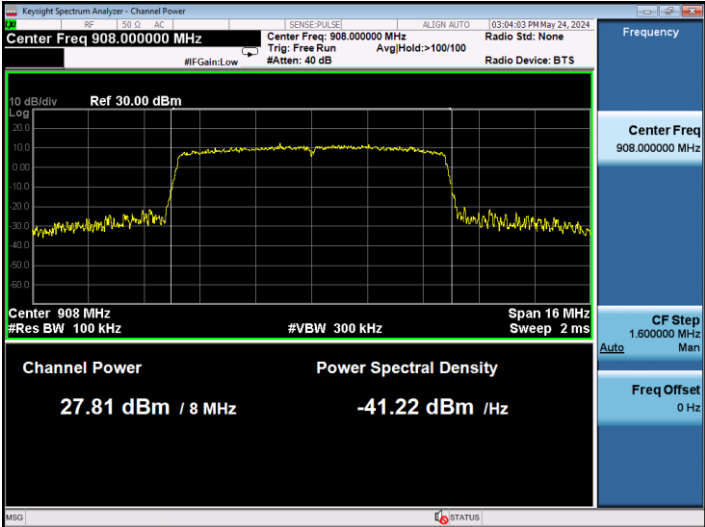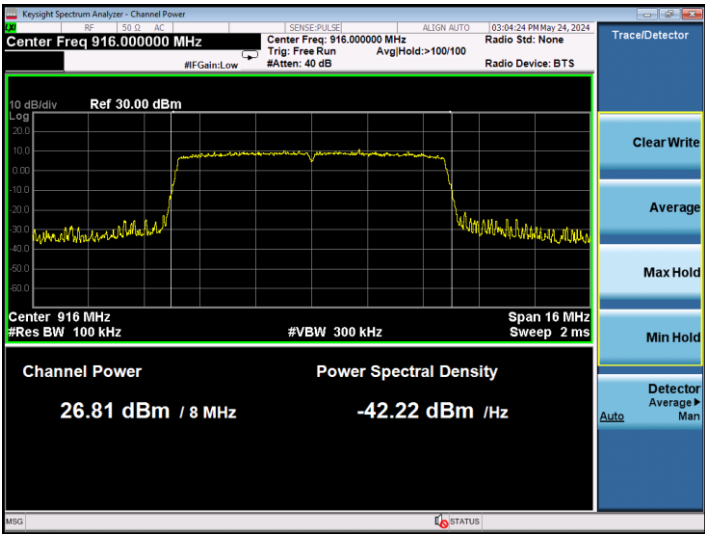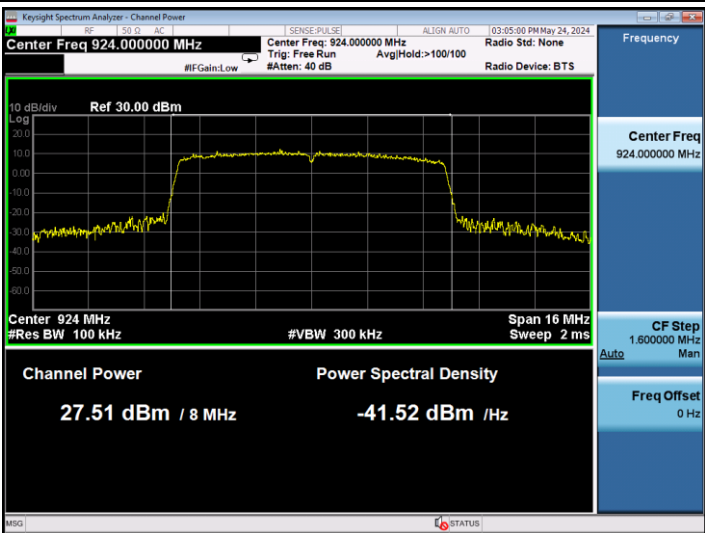
<p>8MHz-Low</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 908.000000 MHz</p> <p>Center Freq: 908.000000 MHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: >100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 908 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 16 MHz</p> <p>Sweep 2 ms</p> <p>Channel Power</p> <p>Power Spectral Density</p> <p>27.81 dBm / 8 MHz</p> <p>-41.22 dBm / Hz</p> <p>Center Freq 908.000000 MHz</p> <p>CF Step 1.600000 MHz</p> <p>Freq Offset 0 Hz</p>
<p>8MHz-Middle</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 916.000000 MHz</p> <p>Center Freq: 916.000000 MHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: >100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 916 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 16 MHz</p> <p>Sweep 2 ms</p> <p>Channel Power</p> <p>Power Spectral Density</p> <p>26.81 dBm / 8 MHz</p> <p>-42.22 dBm / Hz</p> <p>Center Freq 916.000000 MHz</p> <p>Clear Write</p> <p>Average</p> <p>Max Hold</p> <p>Min Hold</p> <p>Detector Average P</p>
<p>8MHz-High</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 924.000000 MHz</p> <p>Center Freq: 924.000000 MHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: >100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 924 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 16 MHz</p> <p>Sweep 2 ms</p> <p>Channel Power</p> <p>Power Spectral Density</p> <p>27.51 dBm / 8 MHz</p> <p>-41.52 dBm / Hz</p> <p>Center Freq 924.000000 MHz</p> <p>CF Step 1.600000 MHz</p> <p>Freq Offset 0 Hz</p>


APPENDIX D




Conducted Out of Band Emissions

8MHz-Low

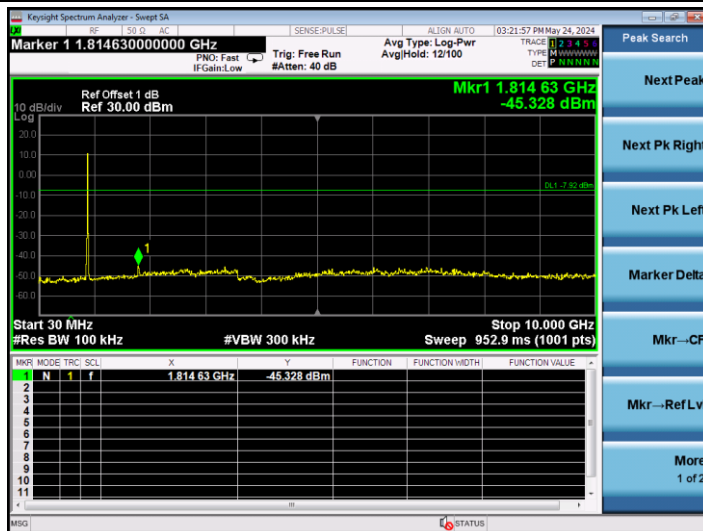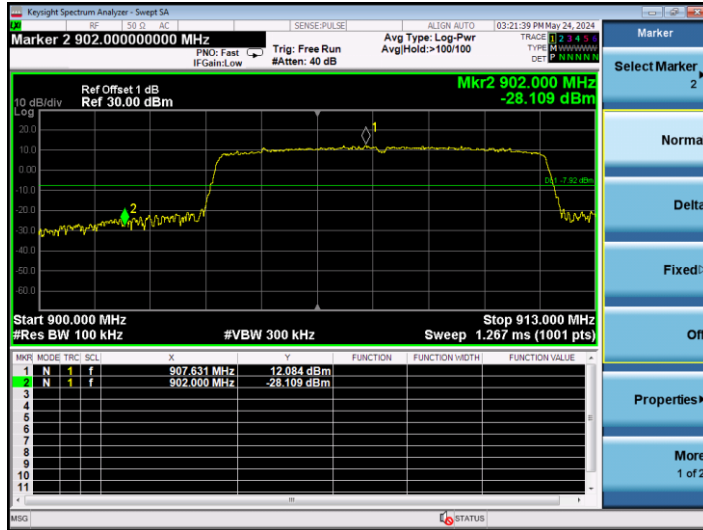

8MHz-Middle

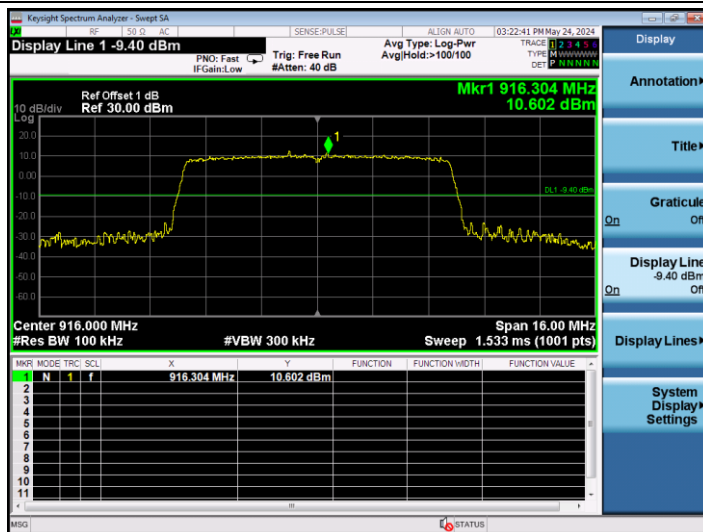

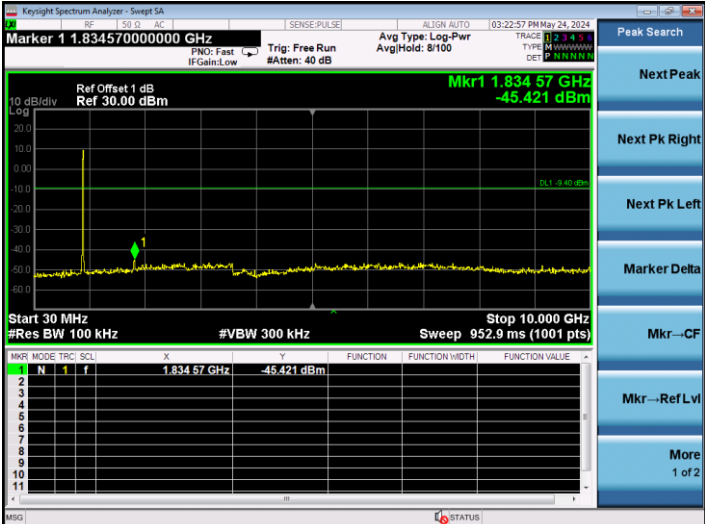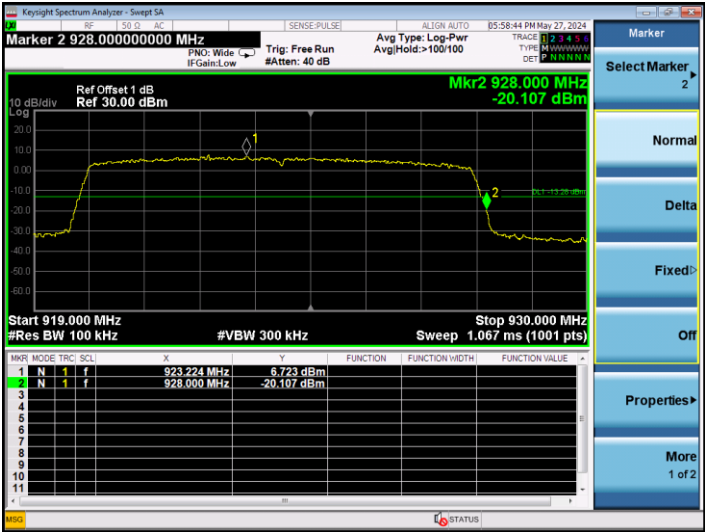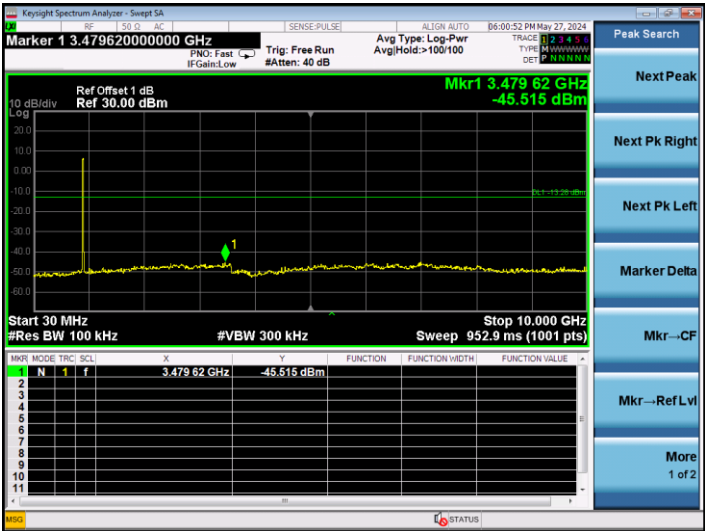	 <p>Marker 1 1.834570000000 GHz Ref Offset 1 dB Ref 30.00 dBm Mkr1 1.834 57 GHz -45.421 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 10.000 GHz Sweep 952.9 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>1.834 57 GHz</td> <td>-45.421 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.834 57 GHz	-45.421 dBm												
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	1.834 57 GHz	-45.421 dBm																							
<p>8MHz-High</p>	 <p>Marker 2 928.000000000 MHz Ref Offset 1 dB Ref 30.00 dBm Mkr2 928.000 MHz -20.107 dBm Start 919.000 MHz #Res BW 100 kHz #VBW 300 kHz Stop 930.000 MHz Sweep 1.067 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>923.224 MHz</td> <td>6.723 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>928.000 MHz</td> <td>-20.107 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	923.224 MHz	6.723 dBm				2	N	1	f	928.000 MHz	-20.107 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	923.224 MHz	6.723 dBm																							
2	N	1	f	928.000 MHz	-20.107 dBm																							
	 <p>Marker 1 3.479620000000 GHz Ref Offset 1 dB Ref 30.00 dBm Mkr1 3.479 62 GHz -45.515 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 10.000 GHz Sweep 952.9 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>3.479 62 GHz</td> <td>-45.515 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	3.479 62 GHz	-45.515 dBm												
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	3.479 62 GHz	-45.515 dBm																							

APPENDIX PHOTOGRAPHS

Please refer to "ANNEX"

**** END OF REPORT ****