

FCC Part 15E

Measurement and Test Report

For

Aviron Interactive.

780 Birchmount Rd. Unit 16, Toronto, ON M1K 5H4, Canada

FCC ID: 2ASJ3-ATS1

FCC Rule(s): FCC Part 15.407

Product Description: Aviron Touchscreen

Tested Model: ATS1

Report No.: STR18128297I-1

Sample Receipt Date: 2018-12-25

Tested Date: 2018-12-26 to 2019-01-28

Issued Date: 2019-01-29

Tested By: Jason Su / Engineer

Reviewed By: Silin Chen / EMC Manager

Approved & Authorized By: Jandy So / PSQ Manager

Prepared By:

Jason Su
Silin Chen
Jandy So

Shenzhen SEM Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY	4
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	4
1.5 EUT OPERATING DURING TEST	5
1.6 TEST FACILITY	5
1.7 EUT SETUP AND TEST MODE.....	6
1.8 MEASUREMENT UNCERTAINTY	7
1.9 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	9
3. RF EXPOSURE	10
3.1 STANDARD APPLICABLE.....	10
3.2 TEST RESULT.....	10
4. ANTENNA REQUIREMENT	11
4.1 STANDARD APPLICABLE.....	11
4.2 EVALUATION INFORMATION	11
5. CONDUCTED EMISSIONS	12
5.1 TEST PROCEDURE.....	12
5.2 BASIC TEST SETUP BLOCK DIAGRAM.....	12
5.3 TEST RECEIVER SETUP	12
5.4 SUMMARY OF TEST RESULTS/PLOTS	12
6. POWER SPECTRAL DENSITY	15
6.1 STANDARD APPLICABLE.....	15
6.2 TEST PROCEDURE.....	15
6.3 SUMMARY OF TEST RESULTS/PLOTS	16
7. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....	34
7.1 STANDARD APPLICABLE.....	34
7.2 TEST PROCEDURE.....	34
7.3 SUMMARY OF TEST RESULTS/PLOTS	36
8. MAXIMUM CONDUCTED OUTPUT POWER.....	54
8.1 STANDARD APPLICABLE.....	54
8.2 TEST PROCEDURE.....	54
8.3 SUMMARY OF TEST RESULTS/PLOTS	55
9. RADIATED SPURIOUS EMISSIONS.....	72
9.1 STANDARD APPLICABLE.....	72
9.2 TEST PROCEDURE.....	72
9.3 TEST RECEIVER SETUP	74
9.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	74
9.5 SUMMARY OF TEST RESULTS/PLOTS	74
10. FREQUENCY STABILITY	103
10.1 STANDARD APPLICABLE.....	103
10.2 TEST PROCEDURE.....	103
10.3 SUMMARY OF TEST RESULTS/PLOTS	103

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Aviron Interactive.
Address of applicant: 780 Birchmount Rd. Unit 16, Toronto, ON M1K 5H4, Canada

Manufacturer: Aviron Interactive.
Address of manufacturer: 780 Birchmount Rd. Unit 16, Toronto, ON M1K 5H4, Canada

General Description of EUT	
Product Name:	Aviron Touchscreen
Brand Name:	Aviron Interactive Inc.
Model No.:	ATS1
Adding Model(s):	/
Rated Voltage:	DC19V
Battery Capacity:	/
Power Adapter:	ADP-65JH Input:AC100-240V 50/60Hz 1.5A Output:DC19V 3.42A
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-VH80
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	15.41dBm (Conducted)
Type of Modulation:	BPSK, QPSK,16QAM,64QAM, 256QAM
Data Rate:	6-54Mbps, up to 867Mbps
Type of Antenna:	Integral Antenna
Antenna Gain:	0dBi
Lowest Internal frequency of EUT:	32.768kHz

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01, KDB 662911 D01 Multiple Transmitter Output v02r01

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Install “RFTestTool” APP in the device, click it, enter the test mode, and then start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	13	13	13	/	/	/	/	/	/	/	13	13	13
802.11n-HT20 MCS0	13	13	13	/	/	/	/	/	/	/	13	13	13
Mode	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	10	10	/	/	/	/	/	/	10	10			
Mode	NCB: 80MHz												
	5210		5290		5530		5610		5690		5775		
802.11ac-VH80 MCS0/Nss2	10		/		/		/		/		10		

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz,5755MHz,5795MHz
TM4	802.11ac-VH80	5210MHz, 5775 MHz
Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.		

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Cable	1.2	Unshielded	Without Ferrite
DC Cable	1.7	Unshielded	With Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	T410	Notebook

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-05-22	2019-05-21
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203; § 15.405	Antenna Requirement	Compliant
§ 15.207; § 15.407(b)(6)	Conducted Emission	Compliant
§ 15.407(a)(1),(2)	Power Spectral Density	Compliant
§ 15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§ 15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§ 15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§ 15.205; § 15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§ 15.407(g)	Frequency Stability	Compliant
§ 15.407(h)	Dynamic Frequency Selection (DFS)	N/A

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the MPE Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has two integral antennas, fulfill the requirement of this section.

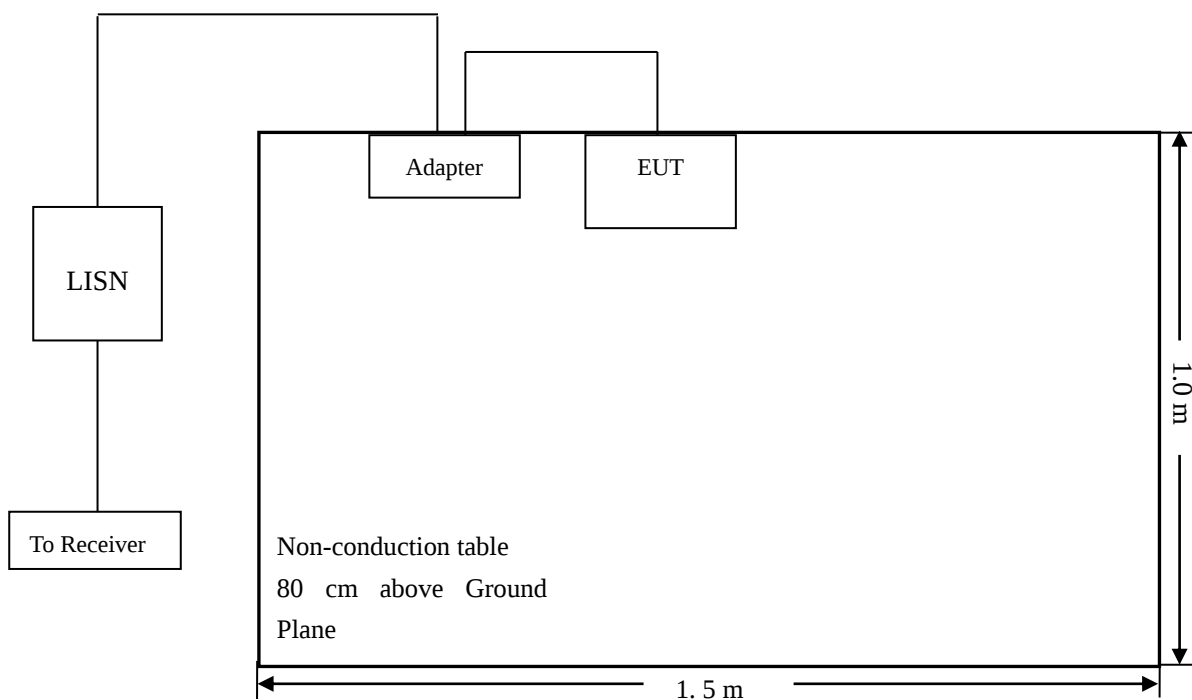
5. Conducted Emissions

5.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

5.2 Basic Test Setup Block Diagram



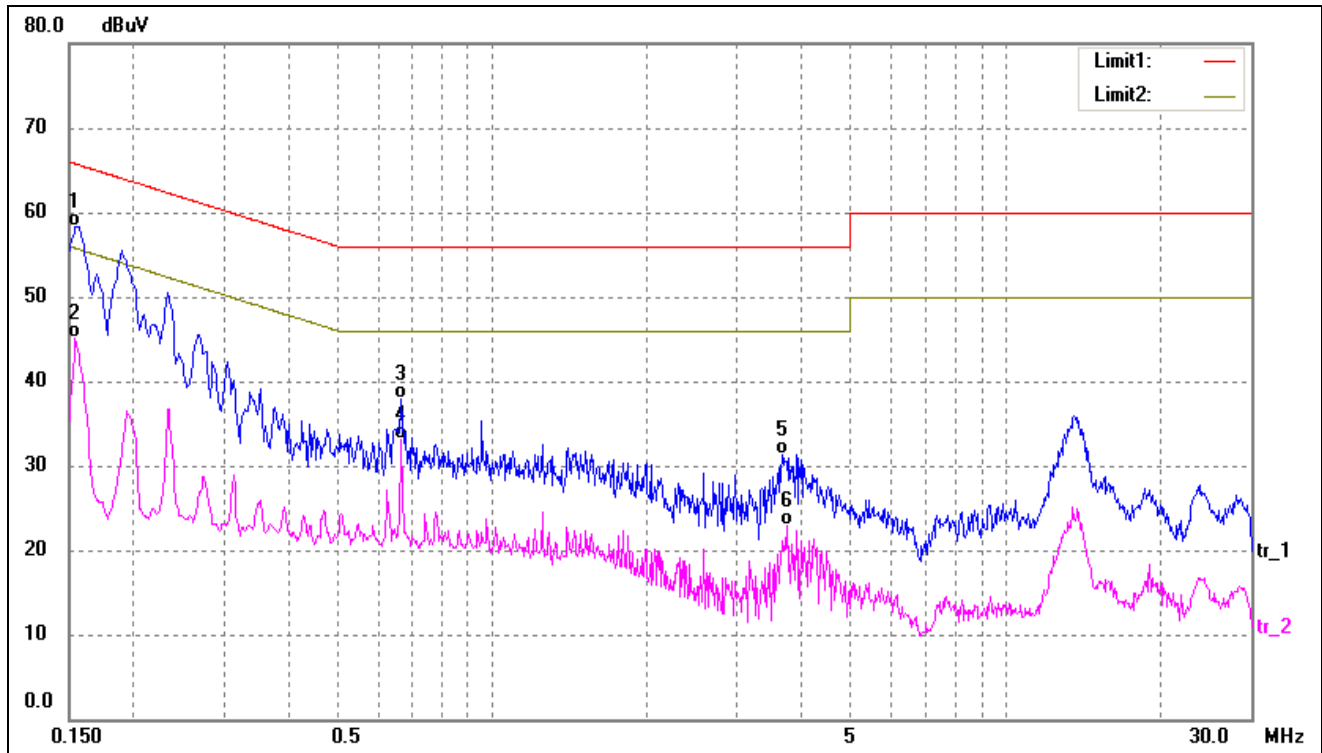
5.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal

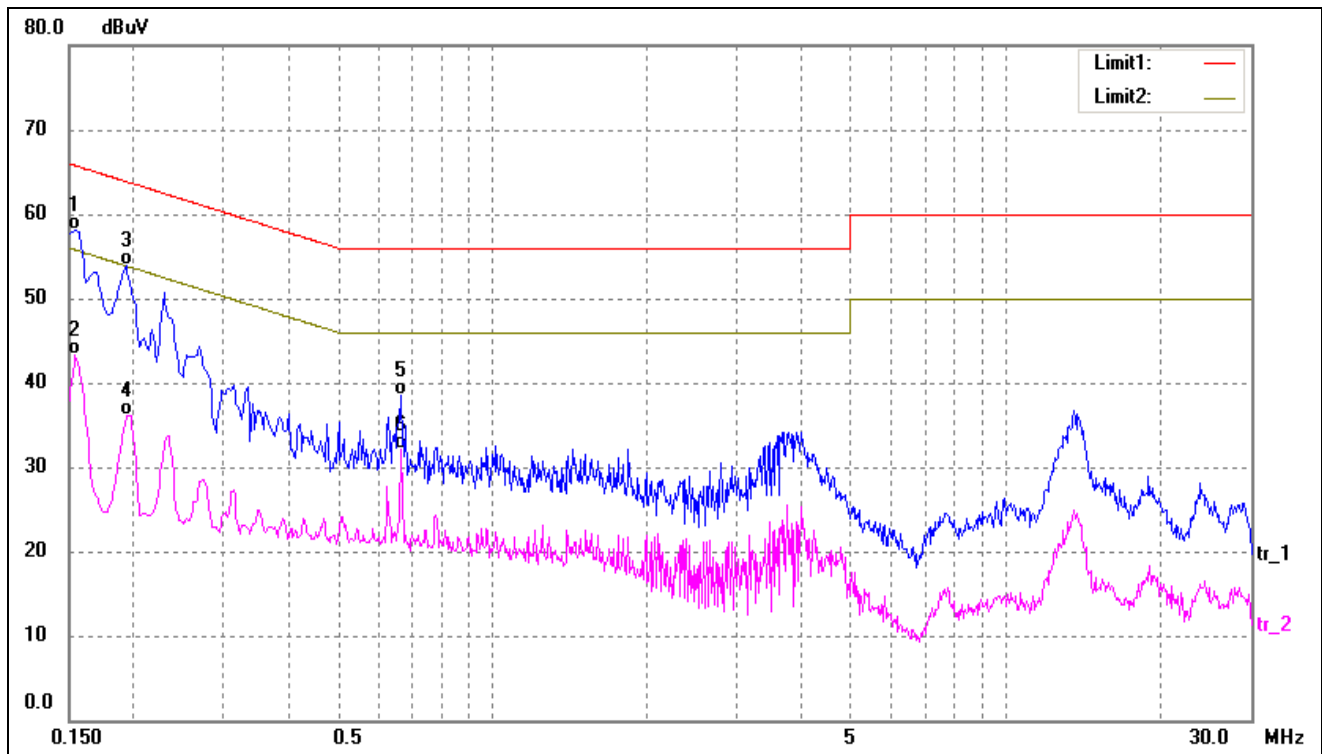
5.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1540	48.21	10.10	58.31	65.78	-7.47	QP
2	0.1540	34.96	10.10	45.06	55.78	-10.72	AVG
3	0.6660	27.51	10.38	37.89	56.00	-18.11	QP
4	0.6660	22.78	10.38	33.16	46.00	-12.84	AVG
5	3.6780	20.61	10.70	31.31	56.00	-24.69	QP
6	3.7580	12.17	10.71	22.88	46.00	-23.12	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------



No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1*	0.1540	48.04	10.10	58.14	65.78	-7.64	QP
2	0.1540	33.24	10.10	43.34	55.78	-12.44	AVG
3	0.1940	43.69	10.12	53.81	63.86	-10.05	QP
4	0.1940	26.02	10.12	36.14	53.86	-17.72	AVG
5	0.6620	28.12	10.38	38.50	56.00	-17.50	QP
6	0.6660	21.68	10.38	32.06	46.00	-13.94	AVG

6. Power Spectral Density

6.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

6.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth ($< 1 \text{ MHz}$, or $< 500 \text{ kHz}$) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ kHz}$ is available on nearly all spectrum analyzers.

6.3 Summary of Test Results/Plots

U-NII-1:5150-5250MHz(Antenna 1)			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	9.180	11
	5200	8.462	11
	5240	8.563	11

U-NII-1:5150-5250MHz(Antenna 2)			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	8.551	11
	5200	8.660	11
	5240	8.810	11

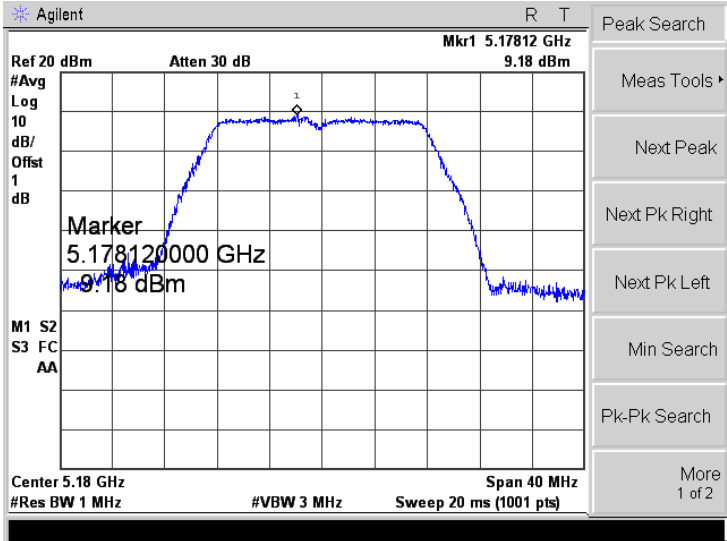
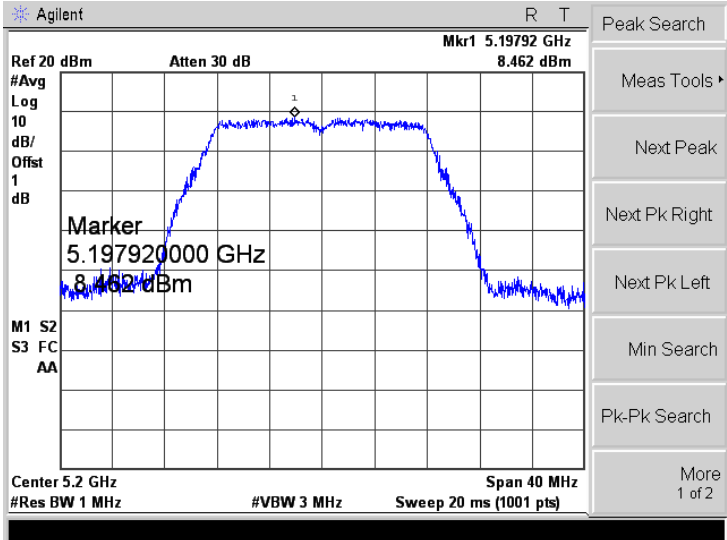
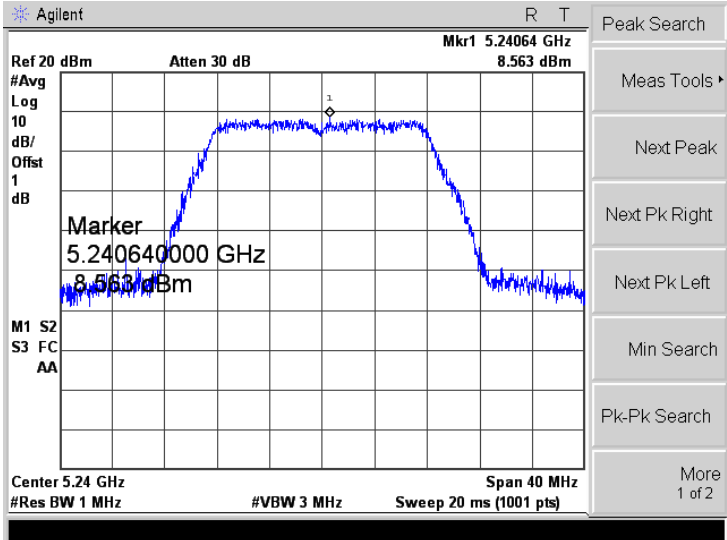
U-NII-1:5150-5250MHz (Antenna 1+ Antenna 2)					
Operating mode	Test Channel	ANT1 Power Spectral Density dBm/MHz	ANT2 Power Spectral Density dBm/MHz	ANT1+2 Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11n-HT20	5180	7.193	7.288	10.25	11
	5200	7.587	7.448	10.53	11
	5240	7.145	7.104	10.13	11
802.11n-HT40	5190	5.250	4.919	8.10	11
	5230	4.391	5.073	7.76	11
802.11ac-HT80	5210	1.187	1.239	4.22	11

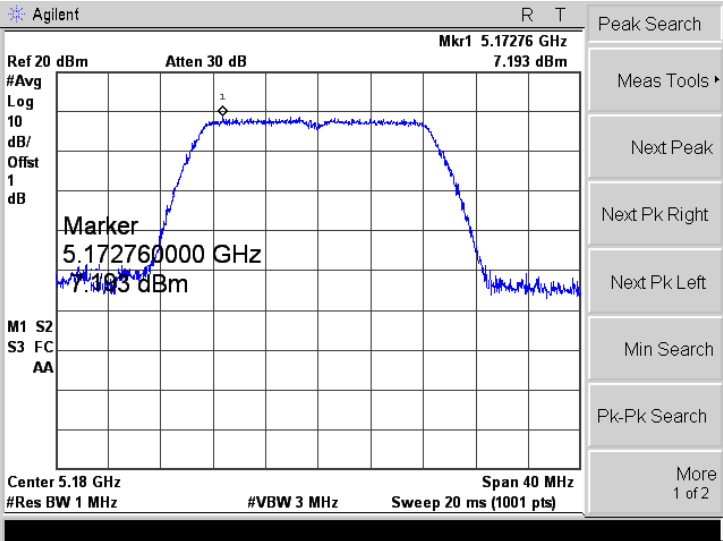
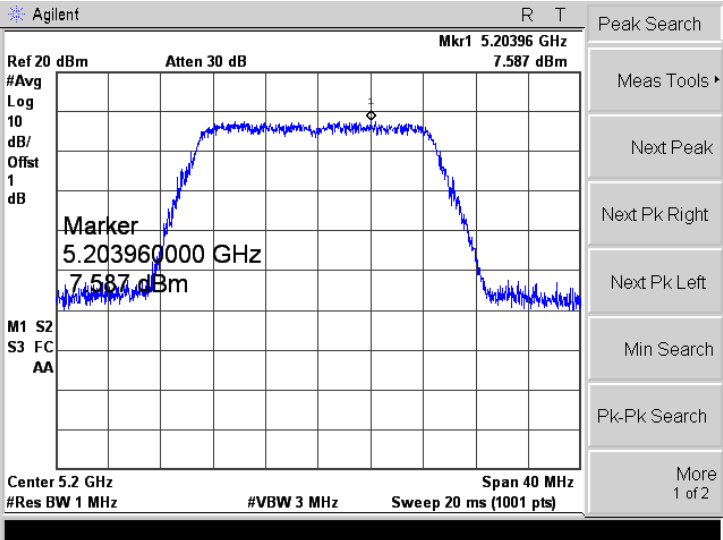
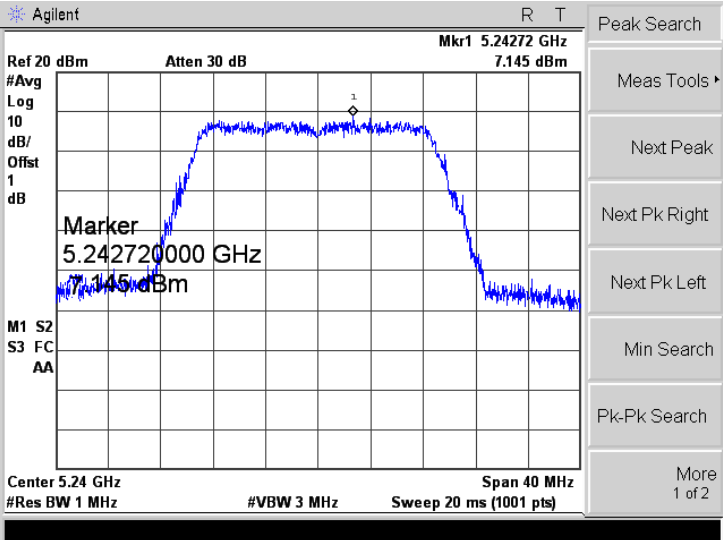
U-NII-3: 5725-5850MHz (Antenna 1)					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	3.713	2.22	5.933	30
	5785	3.002	2.22	5.222	30
	5825	3.592	2.22	5.812	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22					

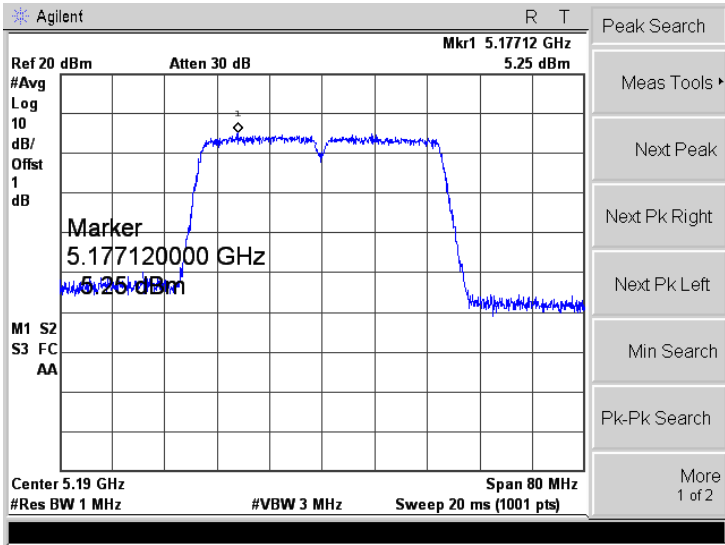
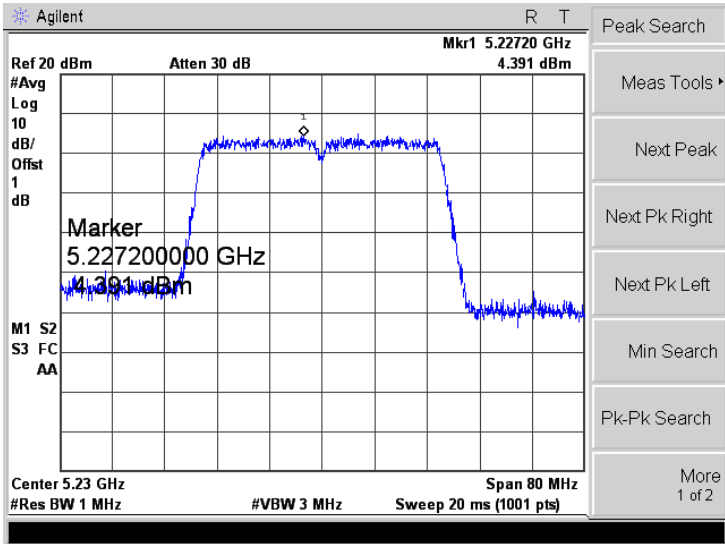
U-NII-3: 5725-5850MHz (Antenna 2)					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	3.057	2.22	5.277	30
	5785	3.002	2.22	5.222	30
	5825	3.429	2.22	5.649	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22					

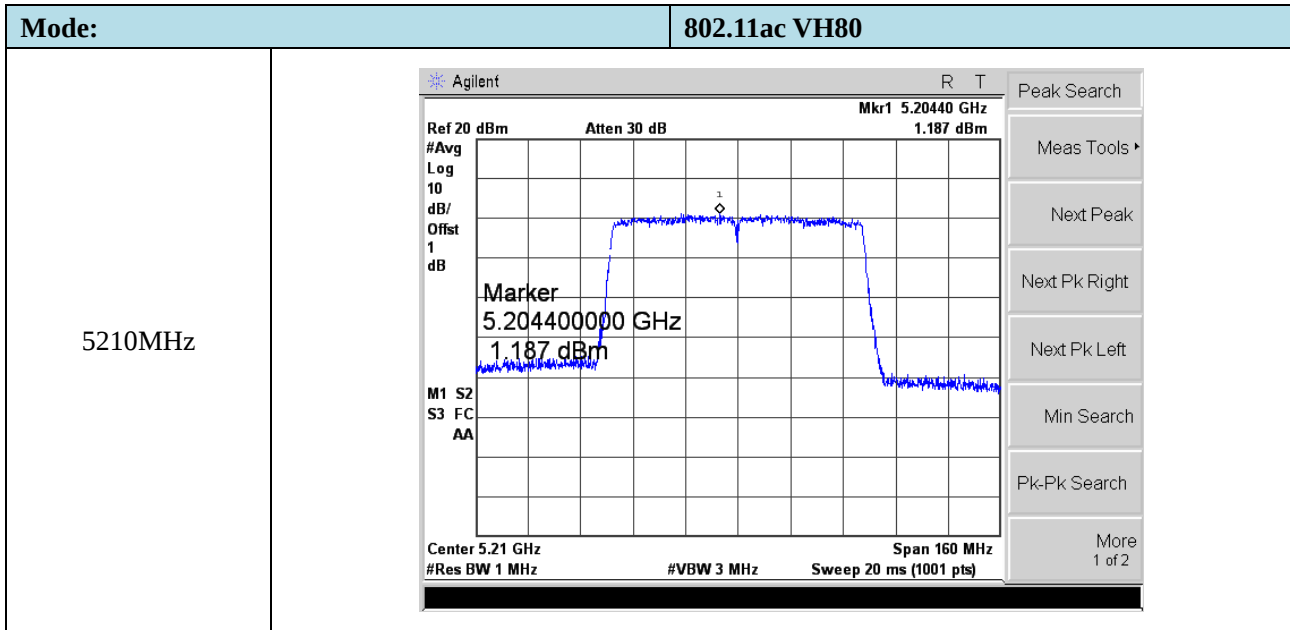
U-NII-3: 5725-5850MHz (Antenna 1+ Antenna 2)						
Operating mode	Test Channel	ANT1 Power Spectral Density dBm/300kHz	ANT2 Power Spectral Density dBm/300kHz	Factor	ANT1+2 Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11n-HT20	5745	3.280	3.151	2.22	7.64	30
	5785	2.978	2.141	2.22	7.37	30
	5825	2.830	3.121	2.22	7.23	30
802.11n HT40	5755	0.764	0.236	2.22	5.52	30
	5795	1.174	0.765	2.22	5.84	30
802.11ac VH80	5775	-2.561	-3.680	2.22	3.35	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22						

➤ Antenna 1:5150-5250MHz

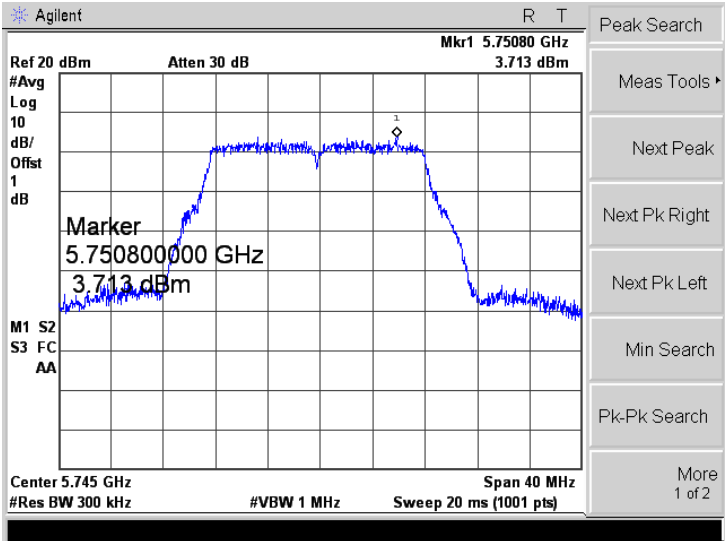
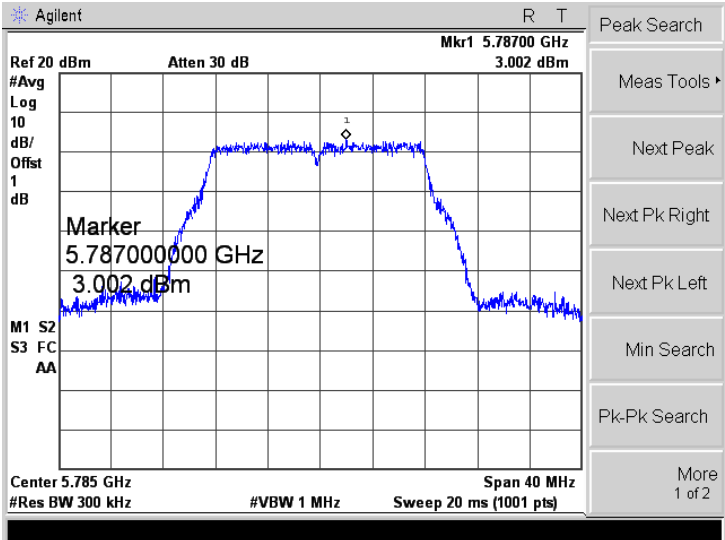
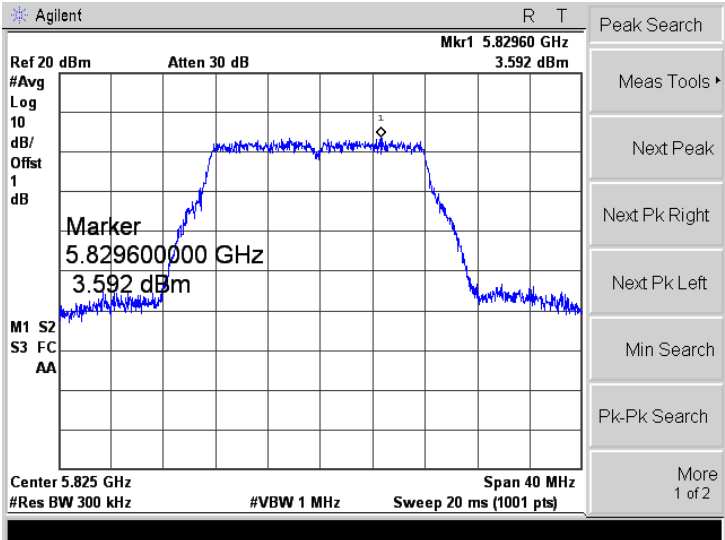
Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

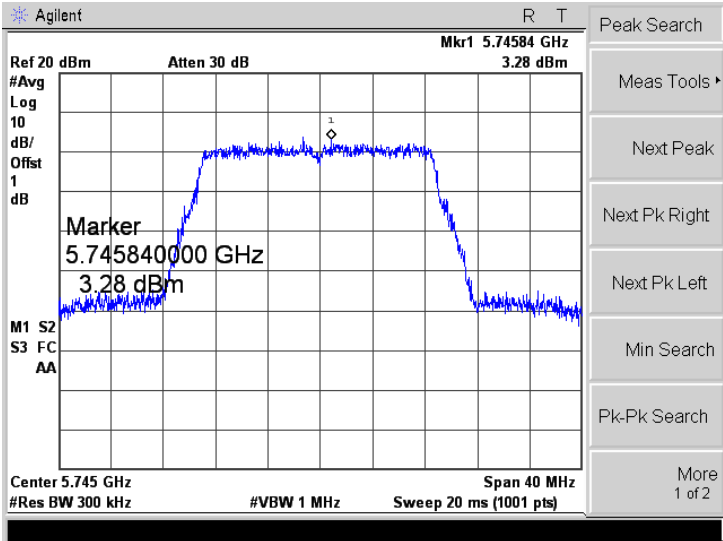
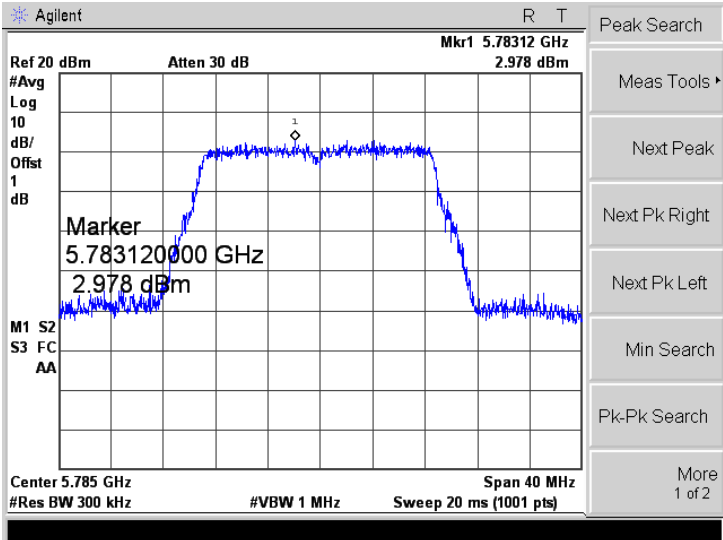
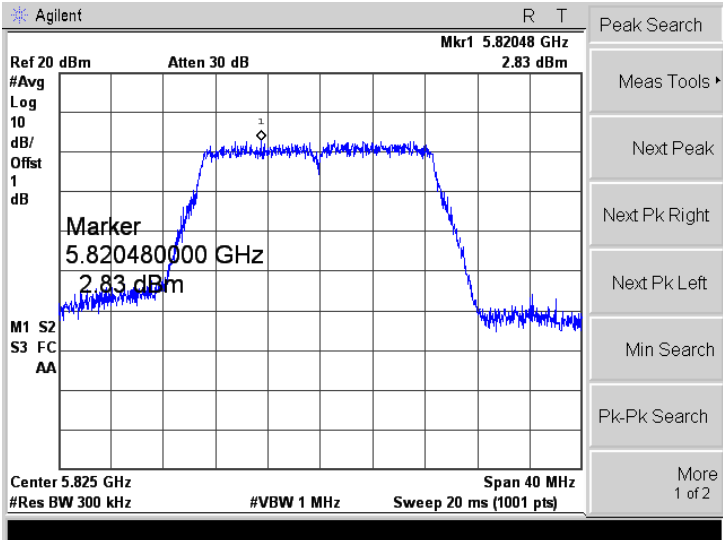
Mode:	802.11n-HT20
5180MHz	
5200MHz	
5240MHz	

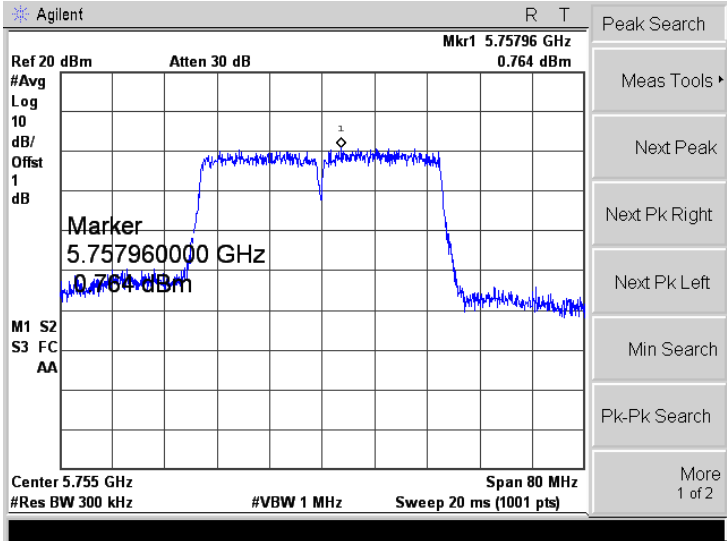
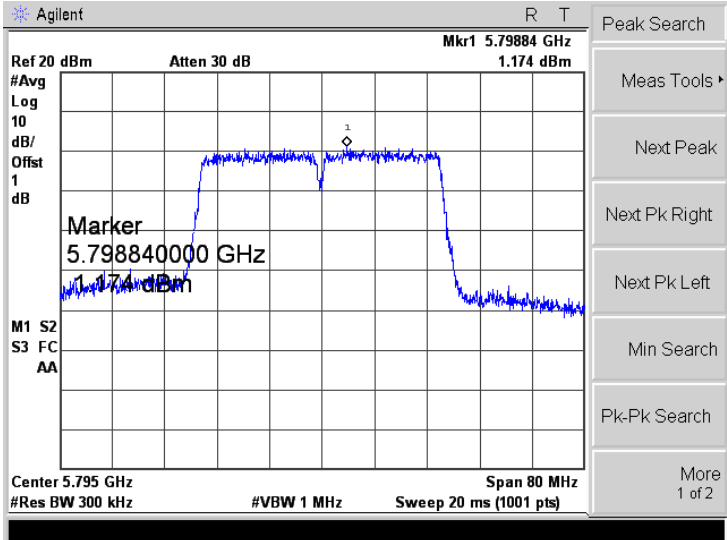
Mode:	802.11n-HT40
5190 MHz	
5230 MHz	

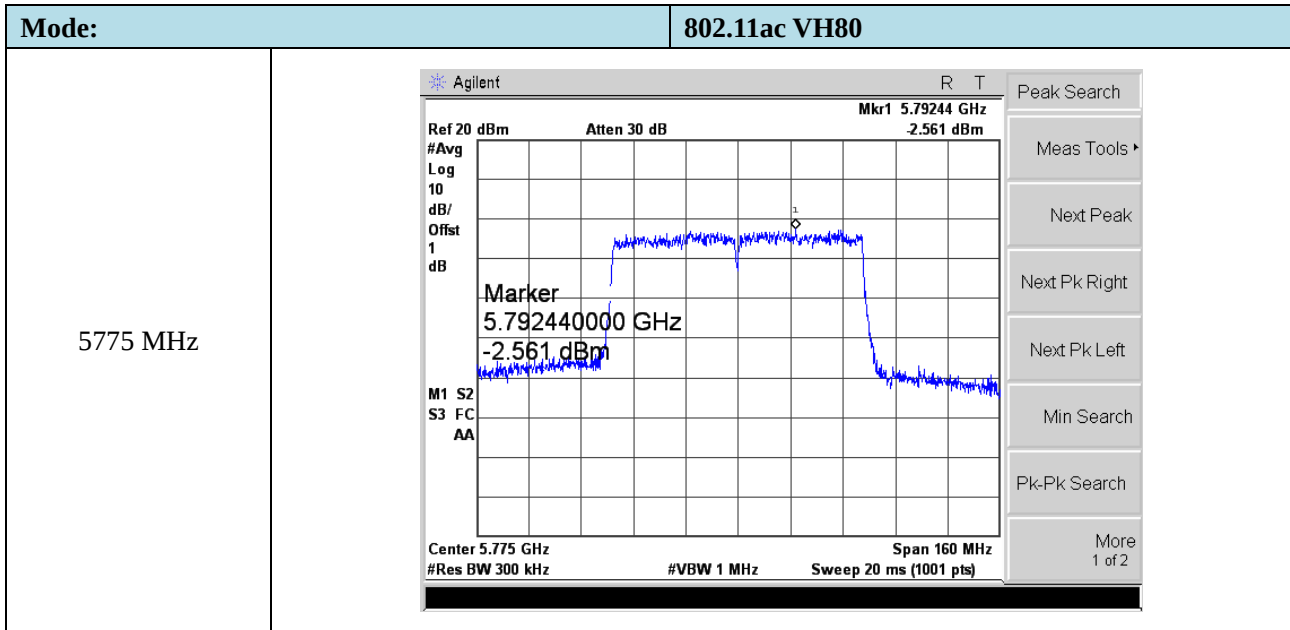


➤ Antenna 1: 5725-5850MHz

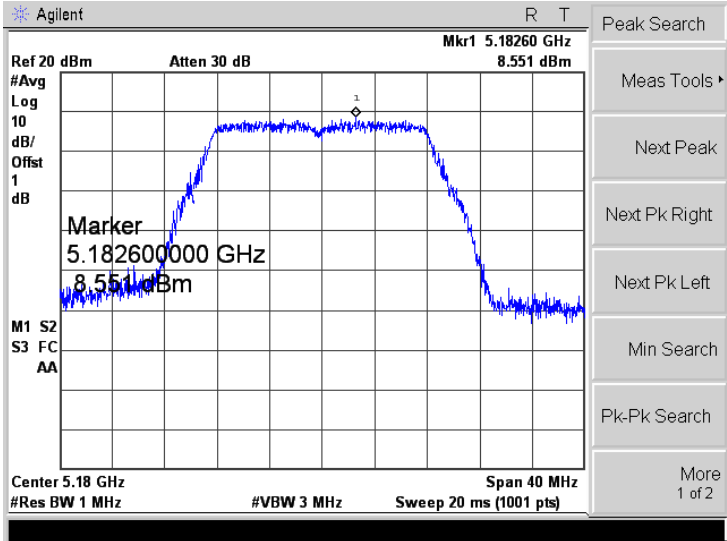
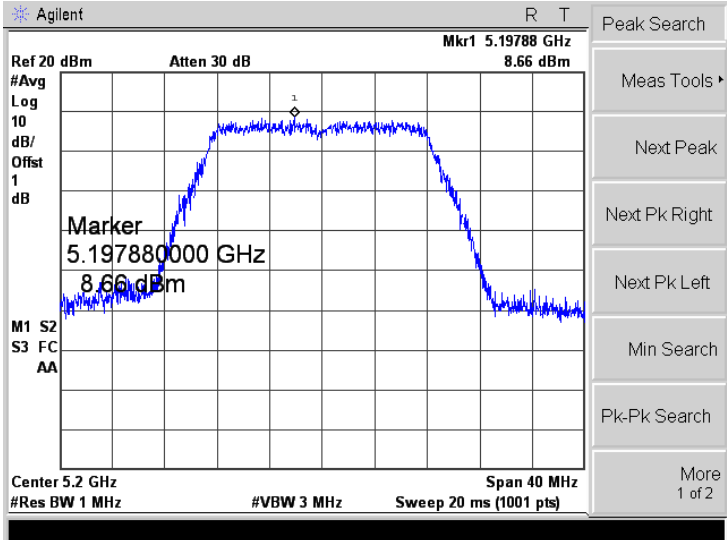
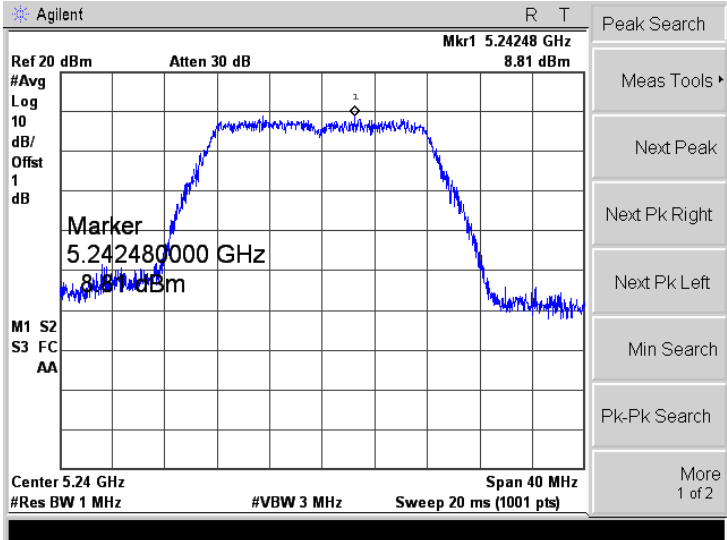
Mode:	802.11a
5745MHz	
5785MHz	
5825MHz	

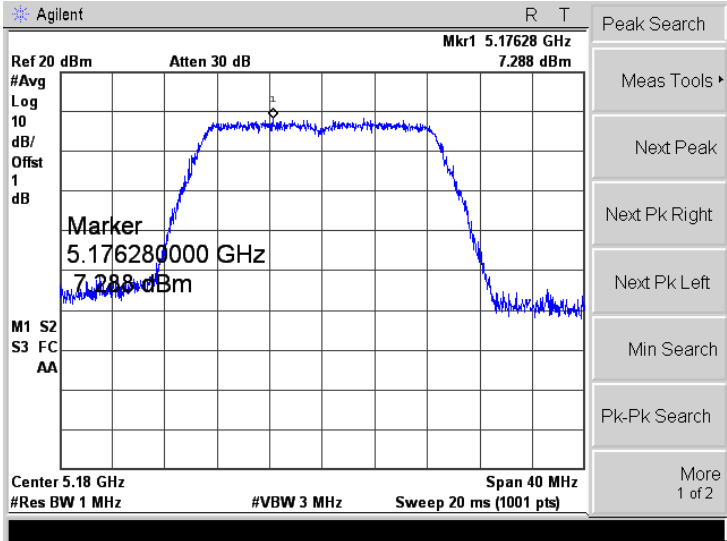
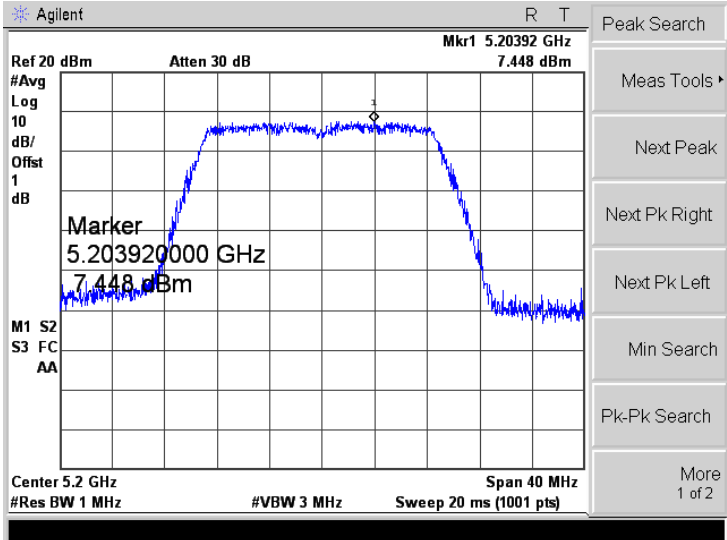
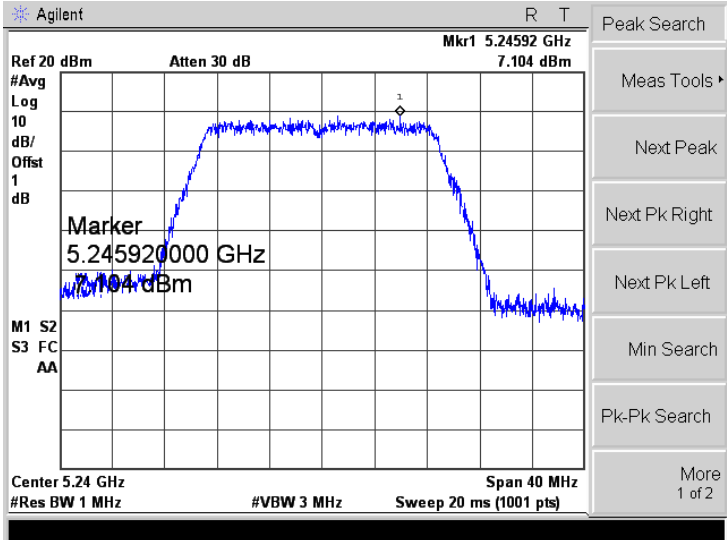
Mode:	802.11n-HT20
5745MHz	 Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.74584 GHz 3.28 dBm #Avg Log 10 dB/ Offst 1 dB Marker 5.74584000 GHz 3.28 dBm M1 S2 S3 FC AA Center 5.745 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
5785MHz	 Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.78312 GHz 2.978 dBm #Avg Log 10 dB/ Offst 1 dB Marker 5.78312000 GHz 2.978 dBm M1 S2 S3 FC AA Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
5825MHz	 Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.82048 GHz 2.83 dBm #Avg Log 10 dB/ Offst 1 dB Marker 5.82048000 GHz 2.83 dBm M1 S2 S3 FC AA Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

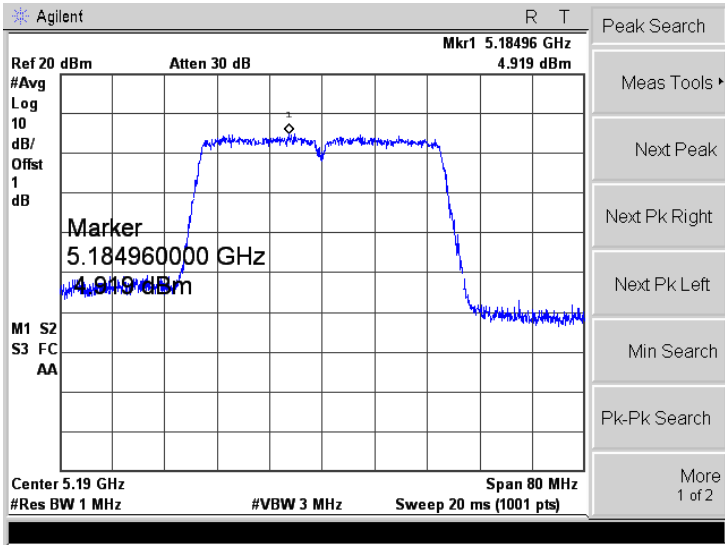
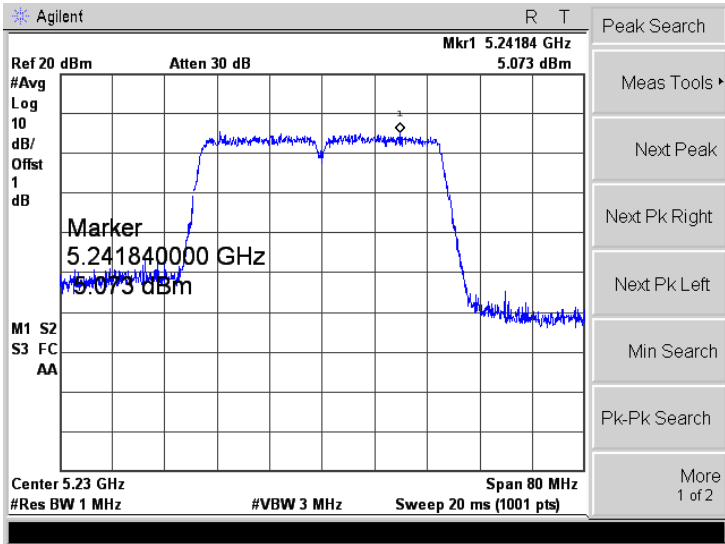
Mode:	802.11n-HT40
5755 MHz	 Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.75796 GHz 0.764 dBm #Avg Log 10 dB/ Offst 1 dB Marker 5.75796000 GHz 0.764 dBm M1 S2 S3 FC AA Center 5.755 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
5795 MHz	 Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.79884 GHz 1.174 dBm #Avg Log 10 dB/ Offst 1 dB Marker 5.798840000 GHz 1.174 dBm M1 S2 S3 FC AA Center 5.795 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

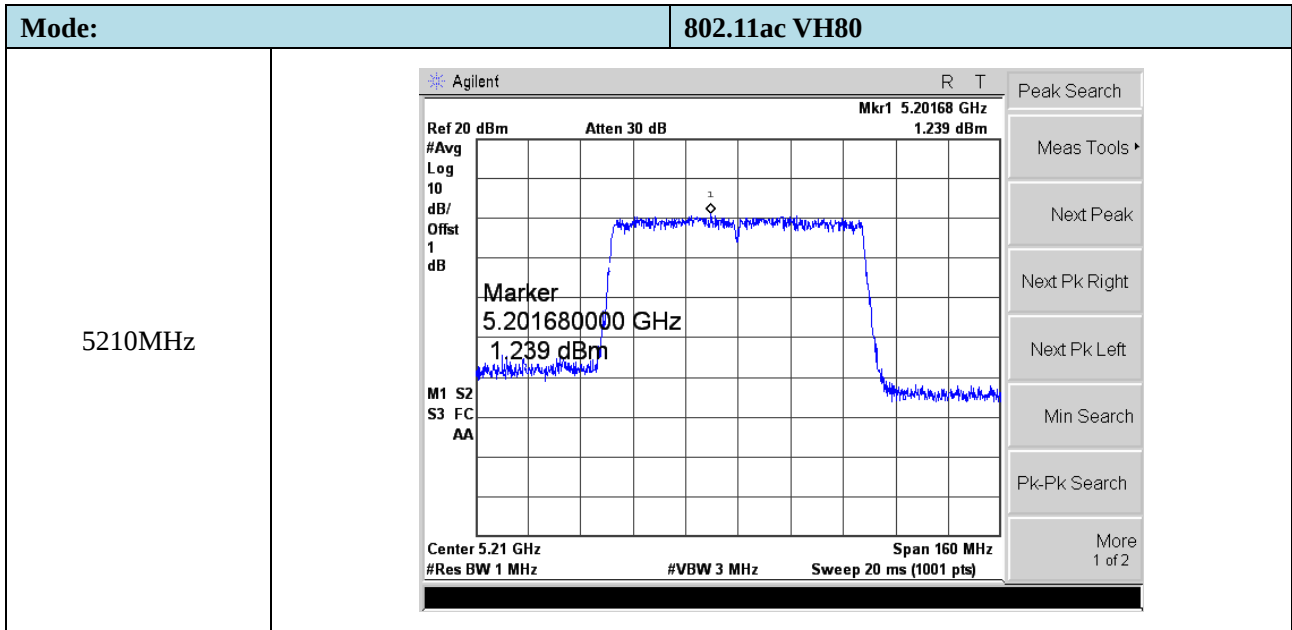


➤ Antenna 2:5150-5250MHz

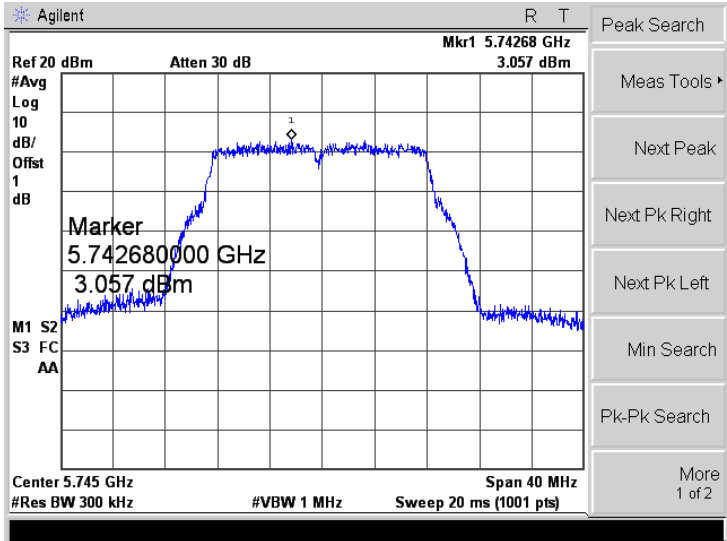
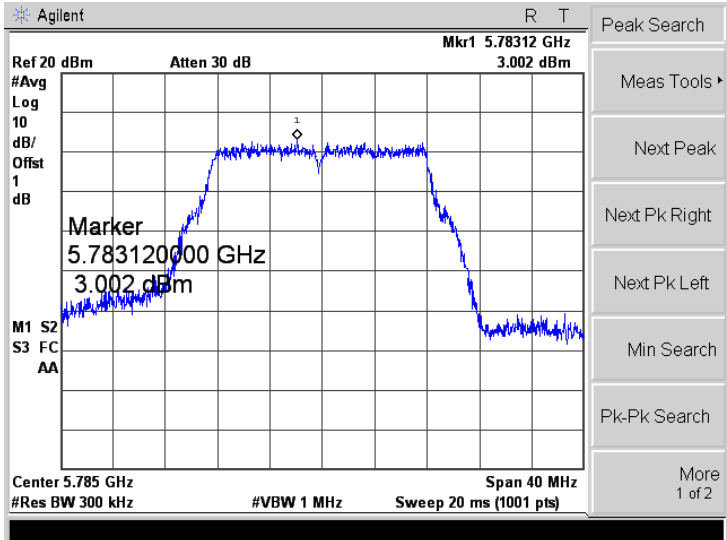
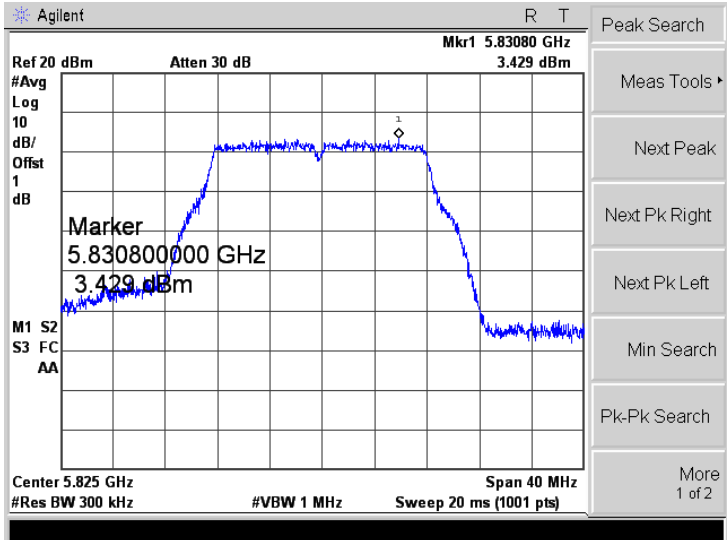
Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

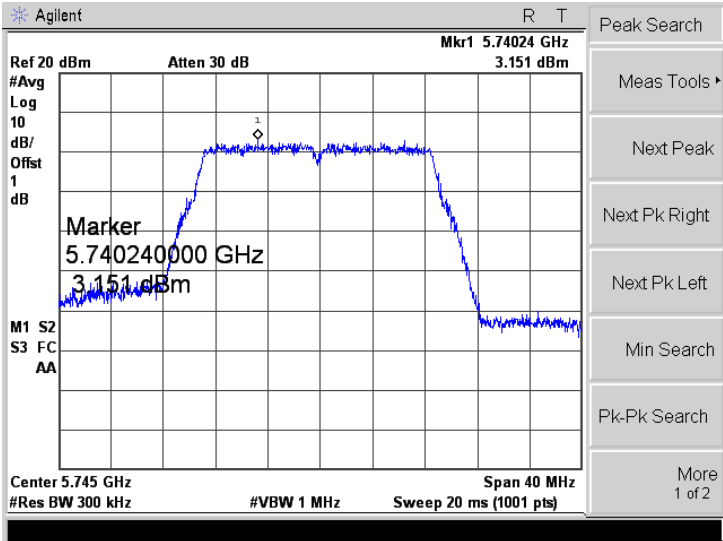
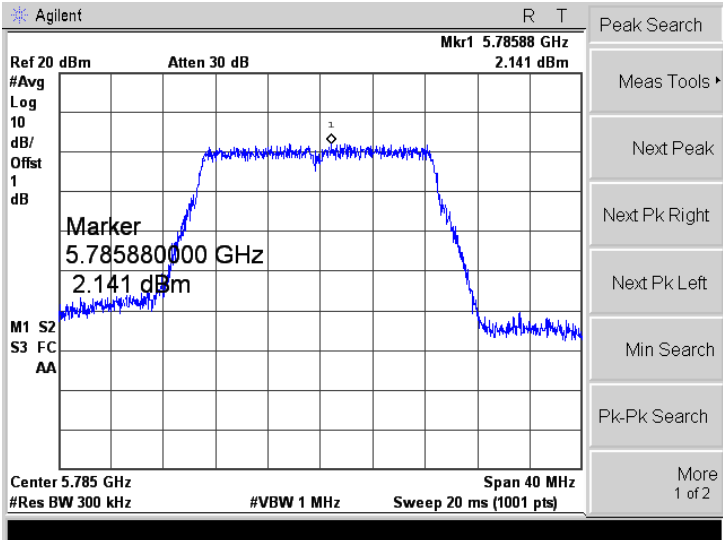
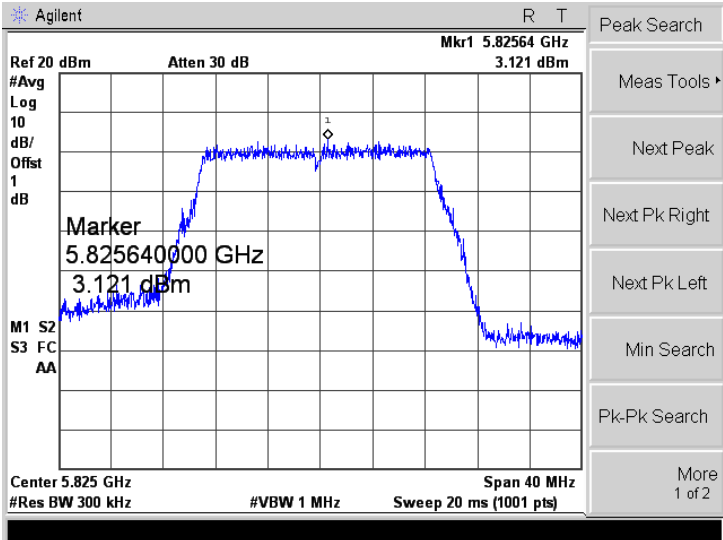
Mode:	802.11n-HT20
5180MHz	
5200MHz	
5240MHz	

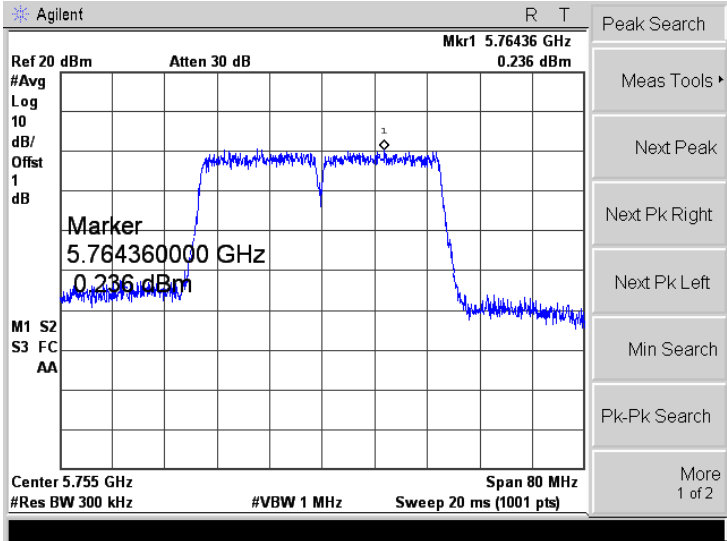
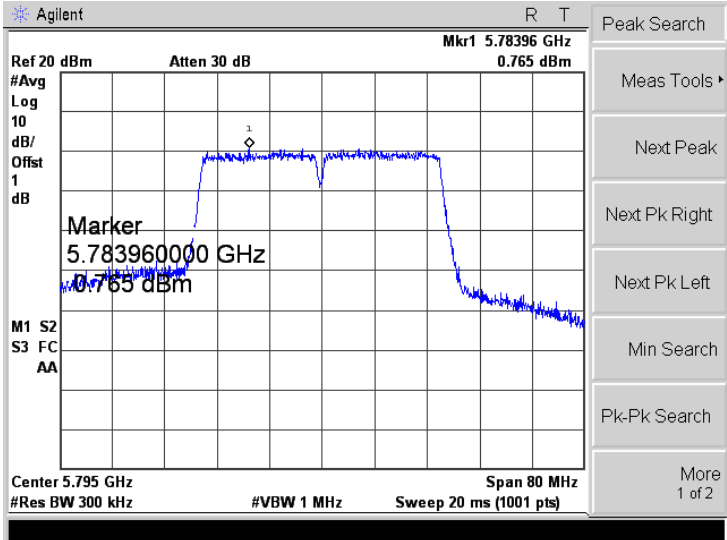
Mode:	802.11n-HT40
5190 MHz	
5230 MHz	

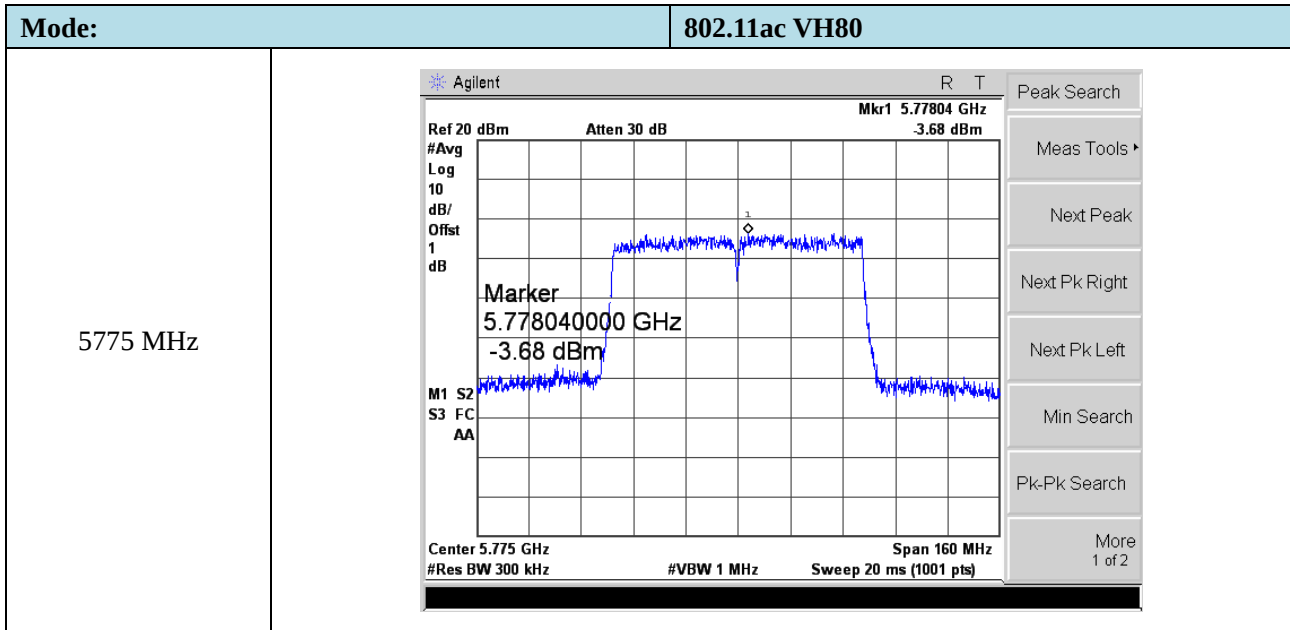


➤ Antenna 2: 5725-5850MHz

Mode:	802.11a
5745MHz	
5785MHz	
5825MHz	

Mode:	802.11n-HT20
5745MHz	
5785MHz	
5825MHz	

Mode:	802.11n-HT40
5755 MHz	 Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.76436 GHz 0.236 dBm #Avg Log 10 dB/ Offst 1 dB Marker 5.76436000 GHz 0.236 dBm M1 S2 S3 FC AA Center 5.755 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
5795 MHz	 Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.78396 GHz 0.765 dBm #Avg Log 10 dB/ Offst 1 dB Marker 5.78396000 GHz 0.765 dBm M1 S2 S3 FC AA Center 5.795 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2



7. Emission Bandwidth and Occupied Bandwidth

7.1 Standard Applicable

According to 15.407 (a) and (e)

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

7.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare

this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 * \text{RBW}$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

7.3 Summary of Test Results/Plots

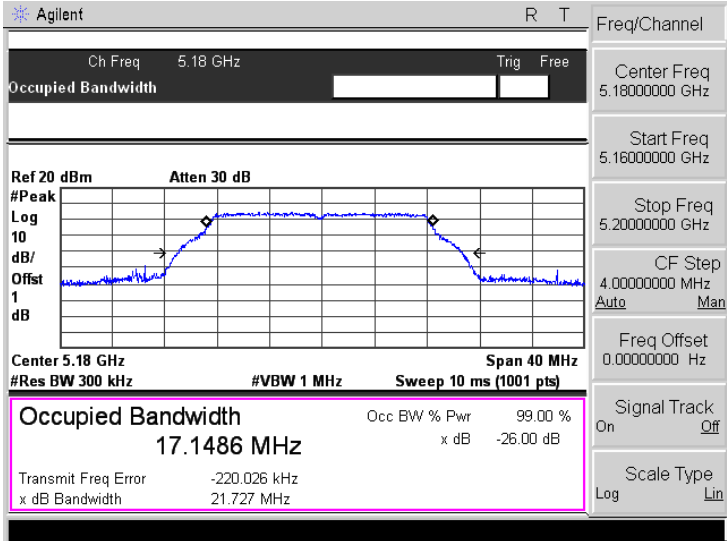
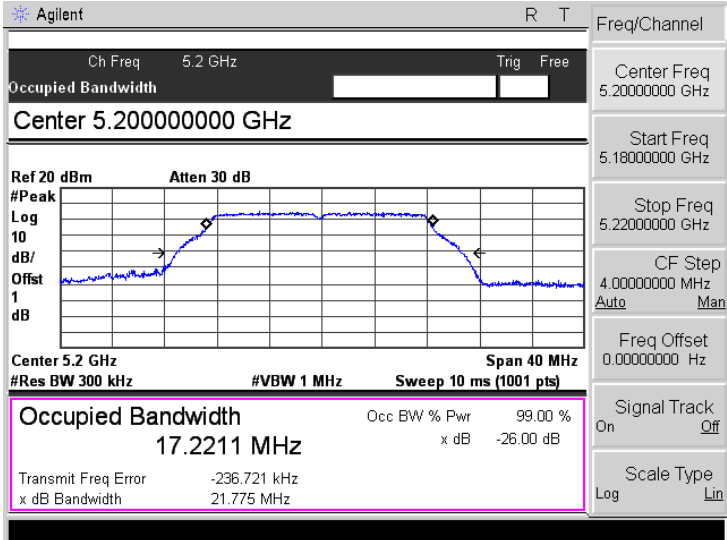
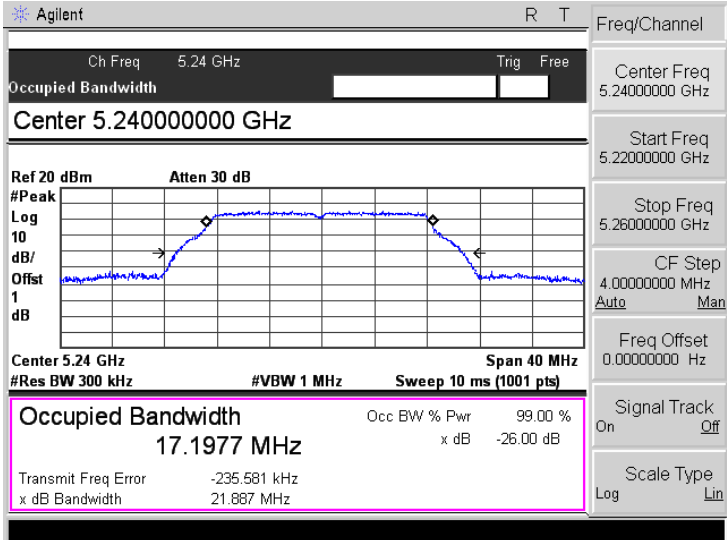
U-NII-1:5150-5250MHz (Antenna 1)				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5180	21.727	17.1486	Pass
	5200	21.775	17.2211	Pass
	5240	21.887	17.1977	Pass
802.11n-HT20	5180	21.778	18.1401	Pass
	5200	21.889	18.2019	Pass
	5240	21.924	18.1932	Pass
802.11n-HT40	5190	41.513	36.7553	Pass
	5230	41.576	36.6985	Pass
802.11ac-HT80	5210	82.281	75.7204	Pass

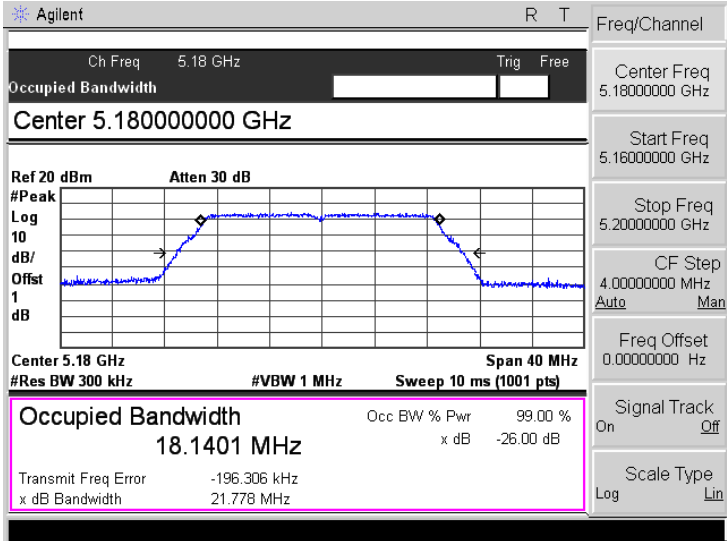
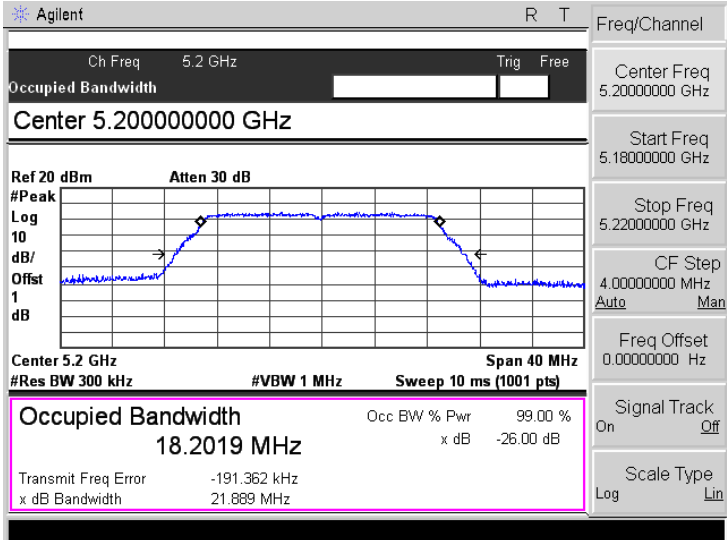
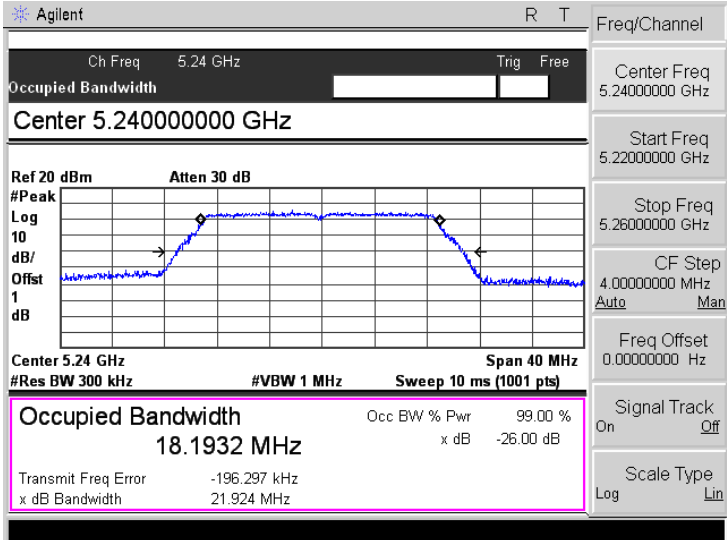
U-NII-3: 5725-5850MHz (Antenna 1)				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5745	16.583	17.2334	≥500
	5785	16.598	17.2759	≥500
	5825	16.545	17.2414	≥500
802.11n-HT20	5745	17.769	18.2042	≥500
	5785	17.775	18.2158	≥500
	5825	17.775	18.2718	≥500
802.11n-HT40	5755	36.814	36.8322	≥500
	5795	36.703	36.7784	≥500
802.11ac VH80	5775	76.343	75.8924	≥500

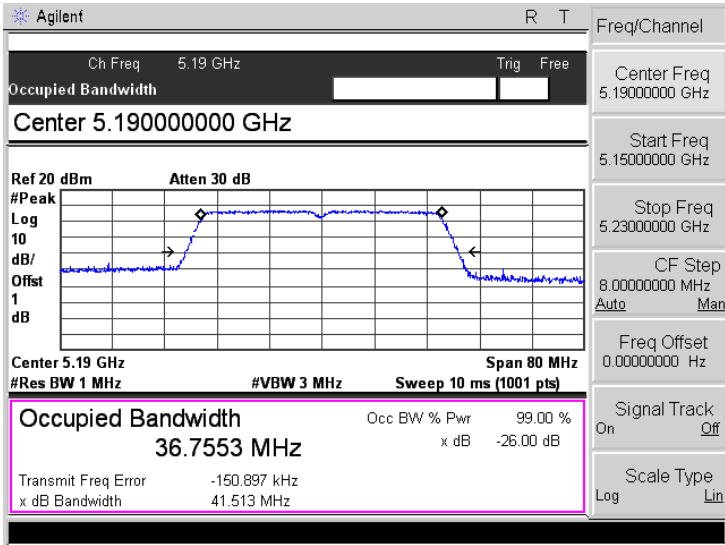
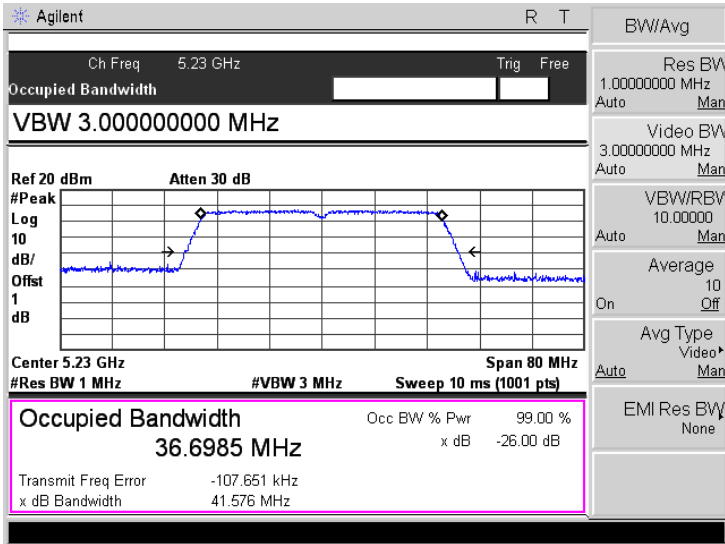
U-NII-1:5150-5250MHz (Antenna 2)				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5180	21.762	17.1991	Pass
	5200	21.635	17.1310	Pass
	5240	21.855	17.2364	Pass
802.11n-HT20	5180	22.027	18.1736	Pass
	5200	22.034	18.2170	Pass
	5240	21.974	18.2510	Pass
802.11n-HT40	5190	41.714	37.0021	Pass
	5230	41.315	36.8109	Pass
802.11ac-HT80	5210	82.428	75.7885	Pass

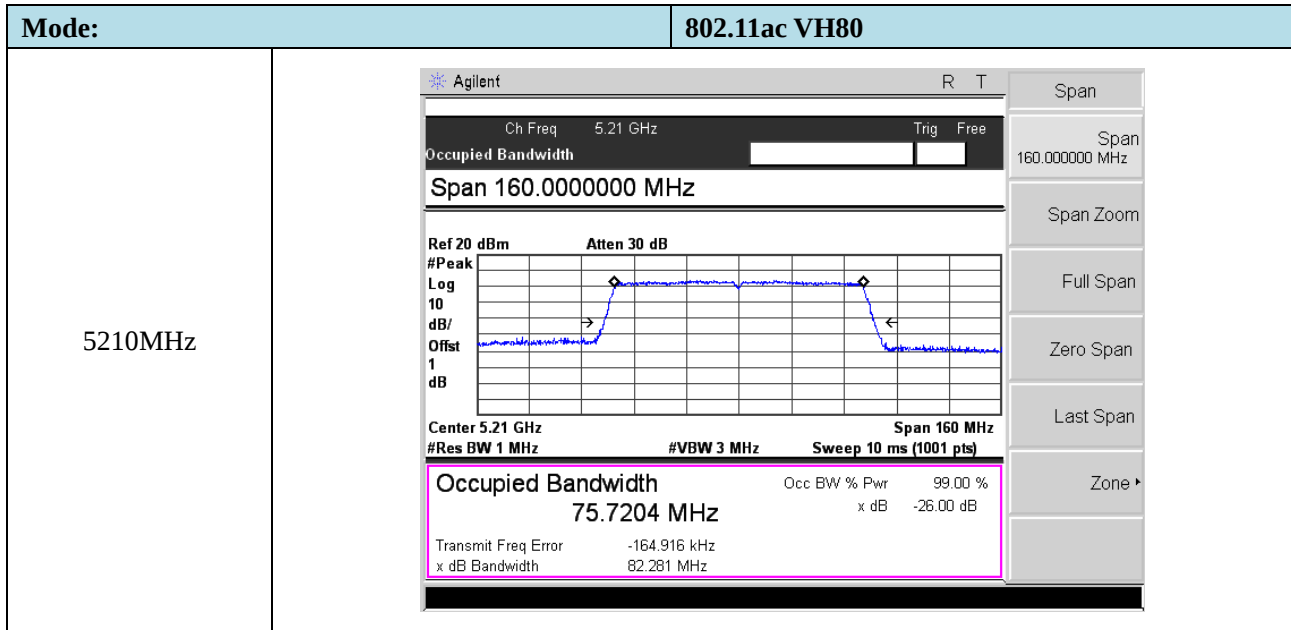
U-NII-3: 5725-5850MHz (Antenna 2)				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5745	16.518	17.1425	≥ 500
	5785	16.546	17.2166	≥ 500
	5825	16.571	17.2352	≥ 500
802.11n-HT20	5745	17.716	18.2292	≥ 500
	5785	17.721	18.1735	≥ 500
	5825	17.748	18.1738	≥ 500
802.11n-HT40	5755	36.492	36.7144	≥ 500
	5795	36.643	36.8071	≥ 500
802.11ac VH80	5775	76.375	75.9132	≥ 500

➤ Antenna 1: 5150-5250MHz

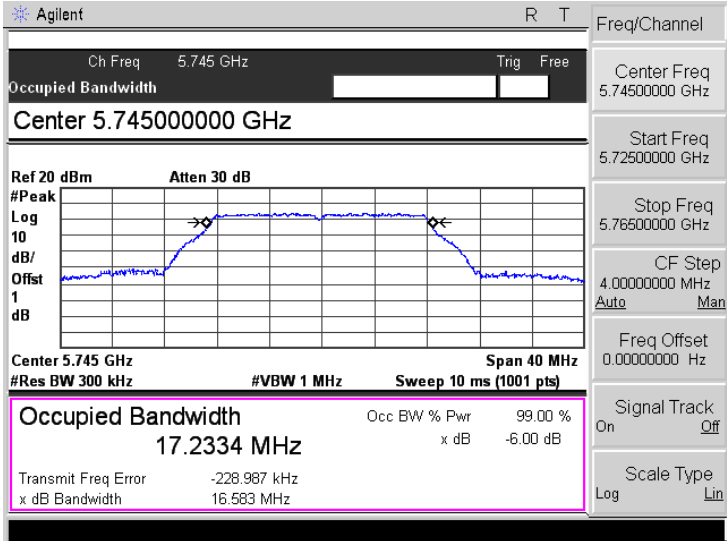
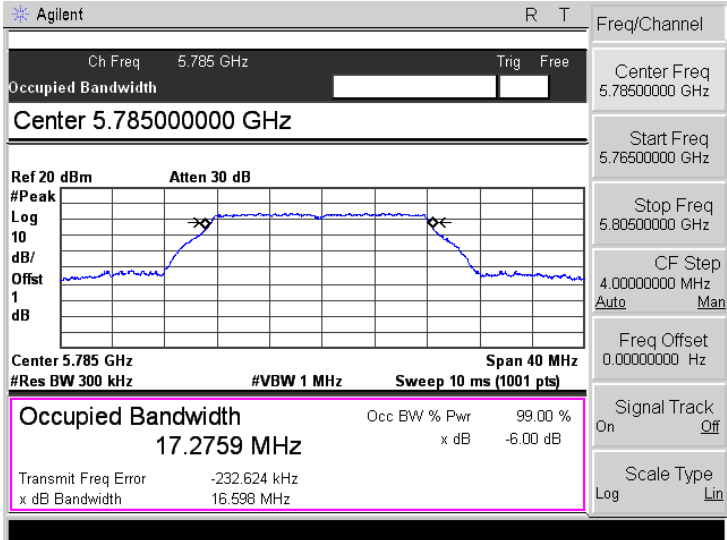
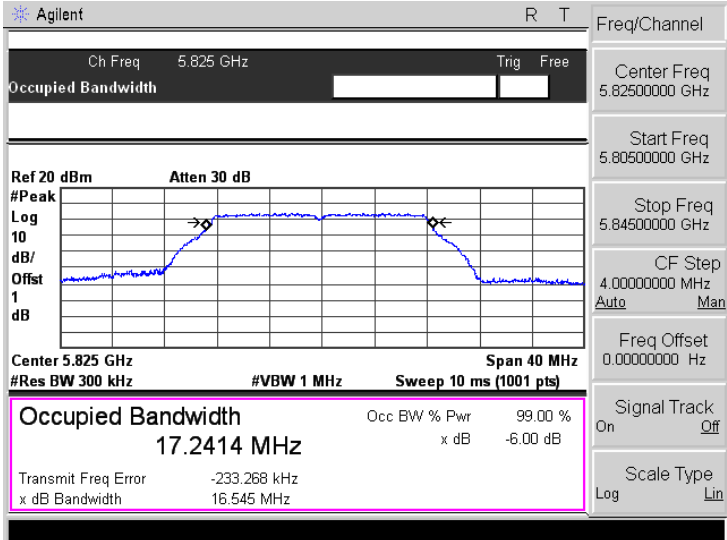
Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

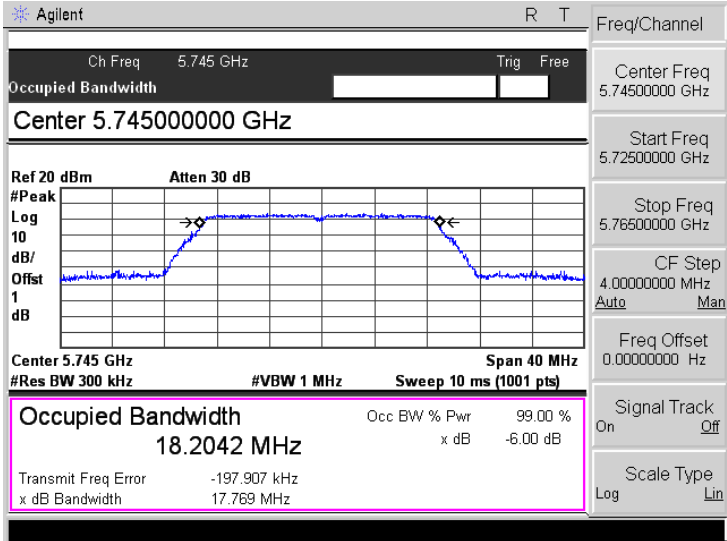
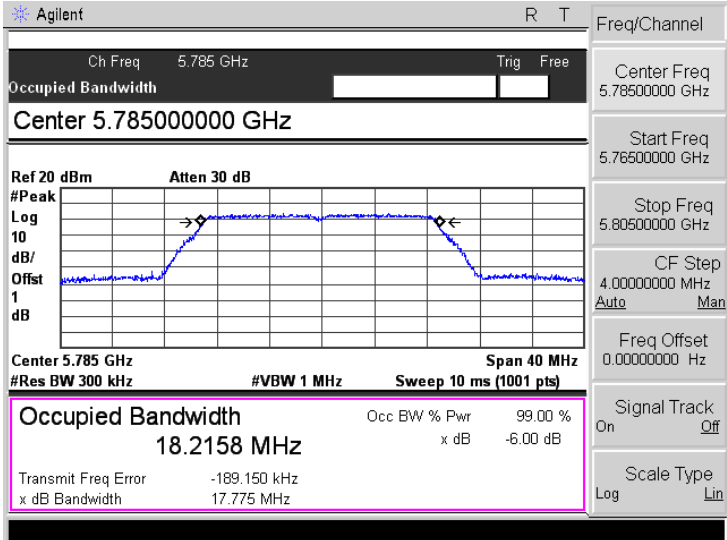
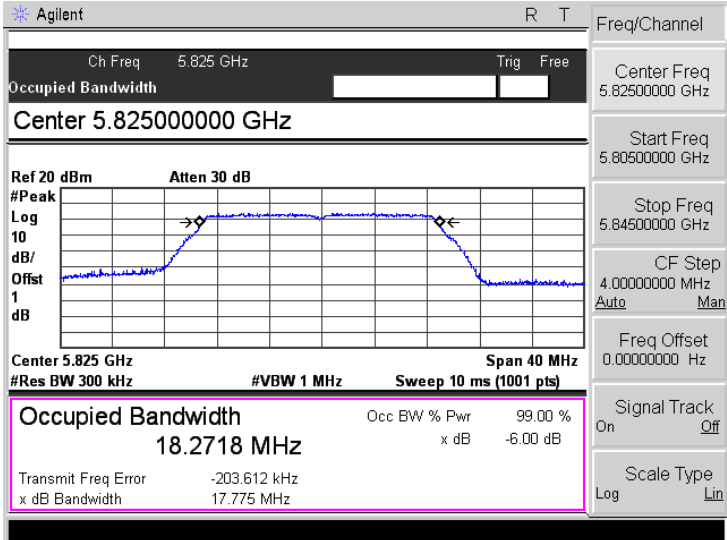
Mode:	802.11n-HT20
5180MHz	
5200MHz	
5240MHz	

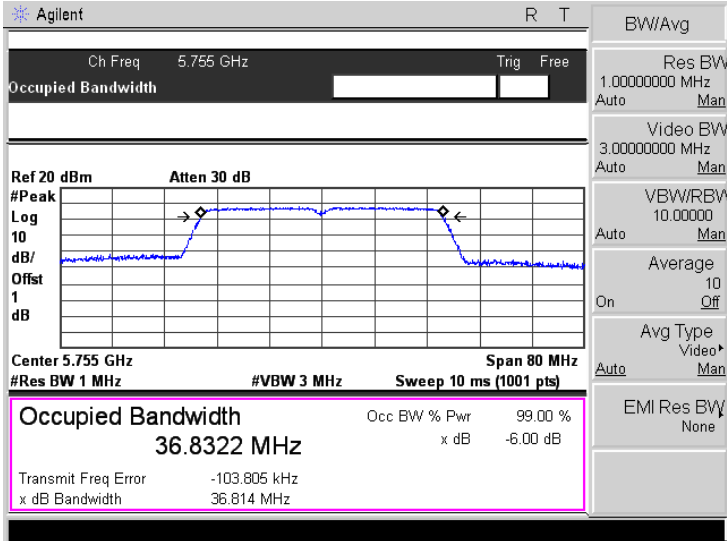
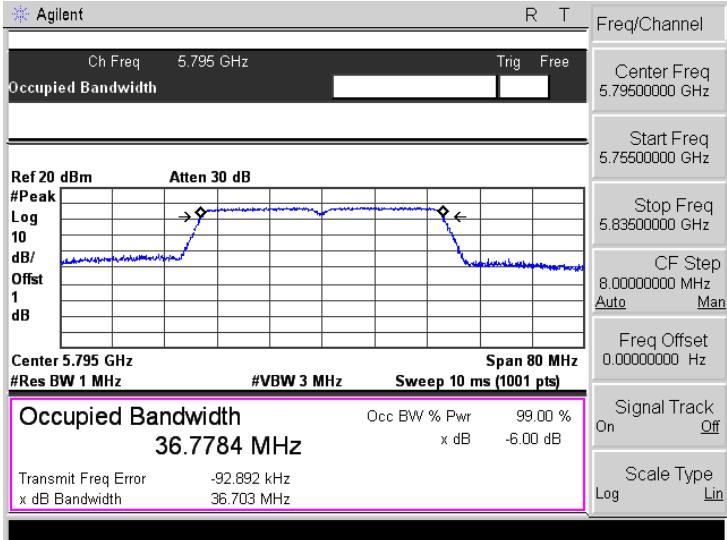
Mode:	802.11n-HT40
5190 MHz	
5230 MHz	

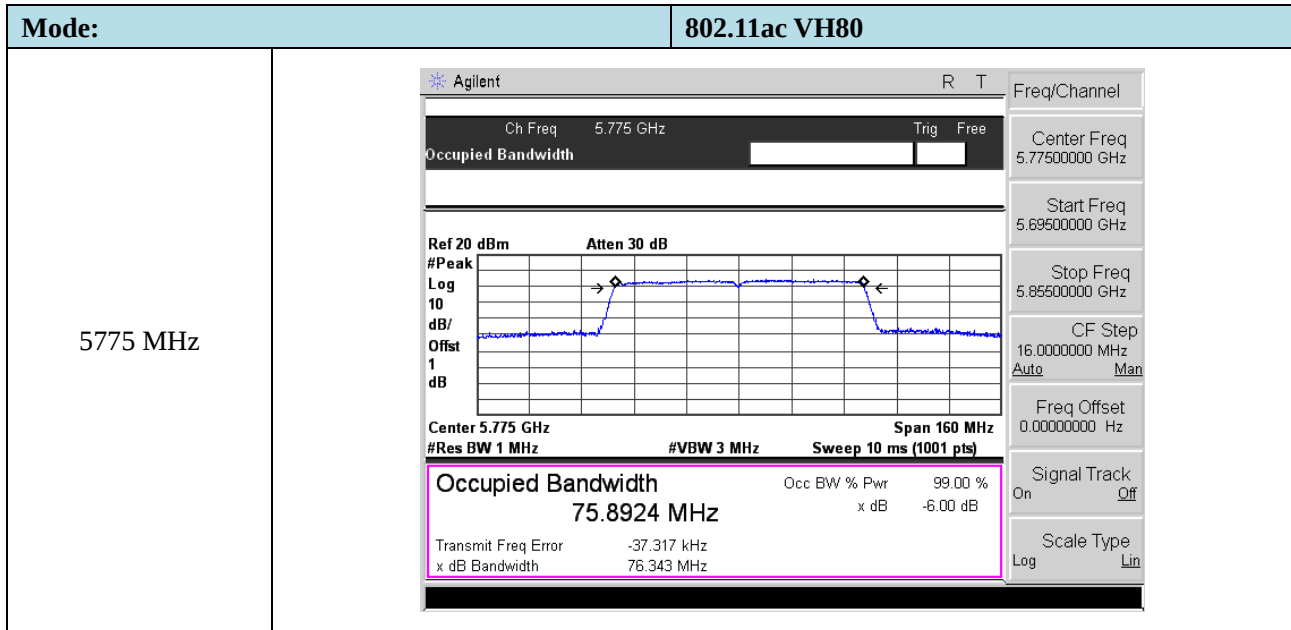


➤ Antenna 1: 5725-5850MHz

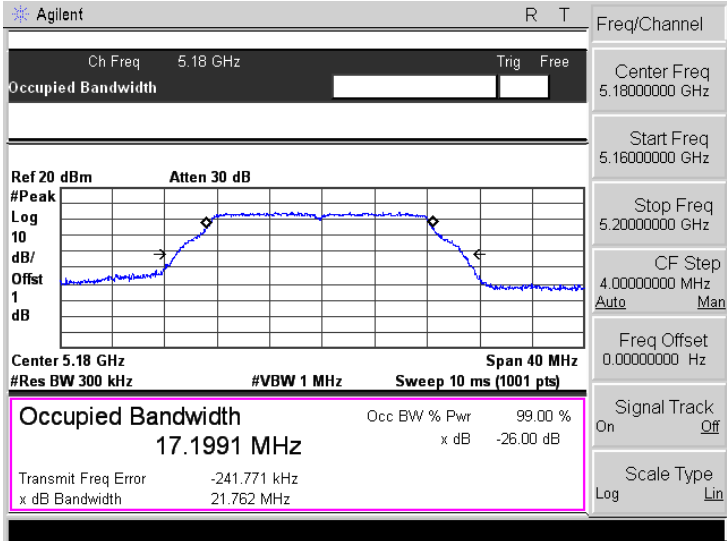
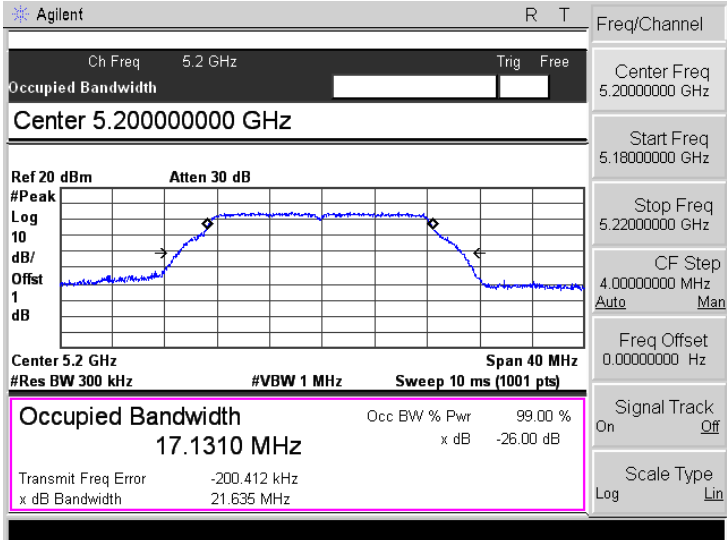
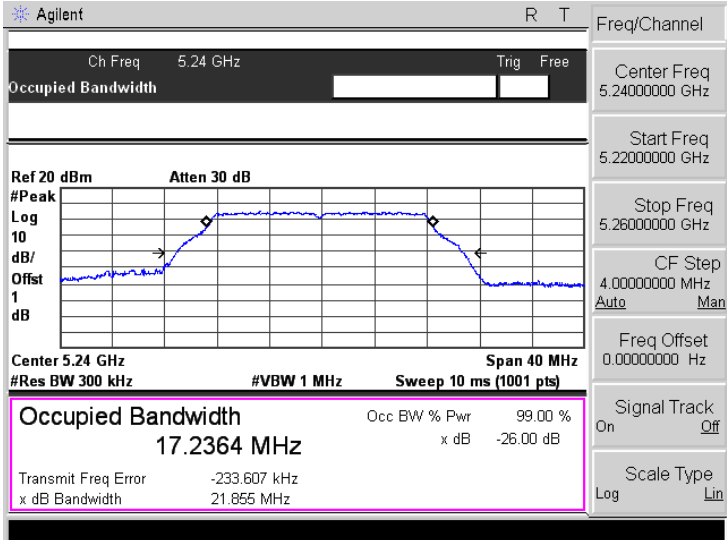
Mode:	802.11a
5745MHz	 Agilent R T Ch Freq 5.745 GHz Trig Free Occupied Bandwidth Center 5.74500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.745 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.2334 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -228.987 kHz x dB Bandwidth 16.583 MHz Freq/Channel Center Freq 5.74500000 GHz Start Freq 5.72500000 GHz Stop Freq 5.76500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5785MHz	 Agilent R T Ch Freq 5.785 GHz Trig Free Occupied Bandwidth Center 5.78500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.2759 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -232.624 kHz x dB Bandwidth 16.598 MHz Freq/Channel Center Freq 5.78500000 GHz Start Freq 5.76500000 GHz Stop Freq 5.80500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5825MHz	 Agilent R T Ch Freq 5.825 GHz Trig Free Occupied Bandwidth Center 5.82500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.2414 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -233.268 kHz x dB Bandwidth 16.545 MHz Freq/Channel Center Freq 5.82500000 GHz Start Freq 5.80500000 GHz Stop Freq 5.84500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

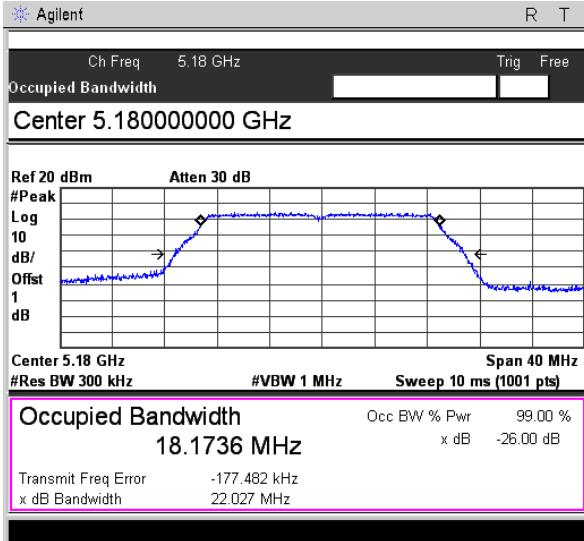
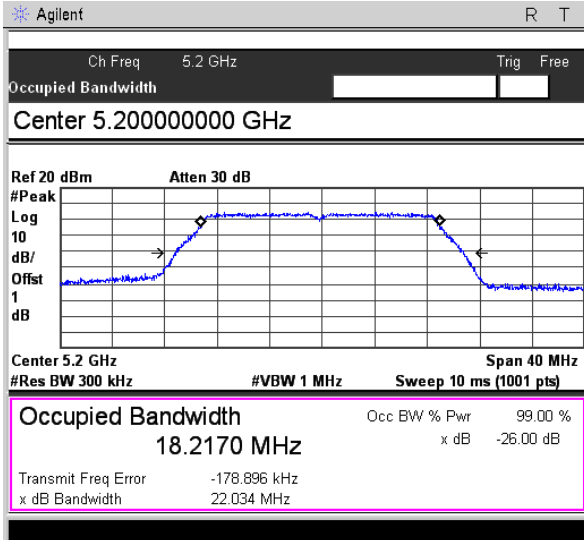
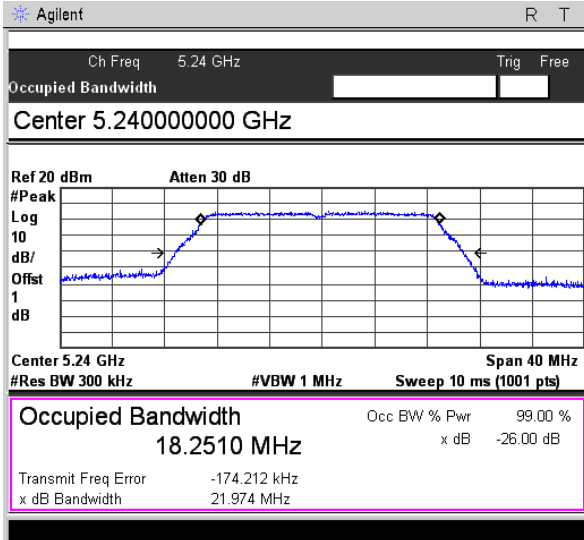
Mode:	802.11n-HT20
5745MHz	 Agilent R T Ch Freq 5.745 GHz Trig Free Occupied Bandwidth Center 5.74500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.745 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 18.2042 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -197.907 kHz x dB Bandwidth 17.769 MHz Freq/Channel Center Freq 5.74500000 GHz Start Freq 5.72500000 GHz Stop Freq 5.76500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5785MHz	 Agilent R T Ch Freq 5.785 GHz Trig Free Occupied Bandwidth Center 5.78500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 18.2158 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -189.150 kHz x dB Bandwidth 17.775 MHz Freq/Channel Center Freq 5.78500000 GHz Start Freq 5.76500000 GHz Stop Freq 5.80500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5825MHz	 Agilent R T Ch Freq 5.825 GHz Trig Free Occupied Bandwidth Center 5.82500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 18.2718 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -203.612 kHz x dB Bandwidth 17.775 MHz Freq/Channel Center Freq 5.82500000 GHz Start Freq 5.80500000 GHz Stop Freq 5.84500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

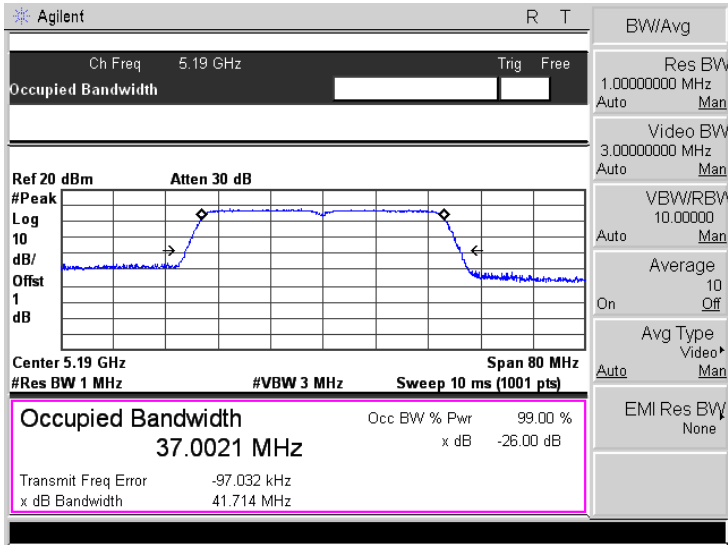
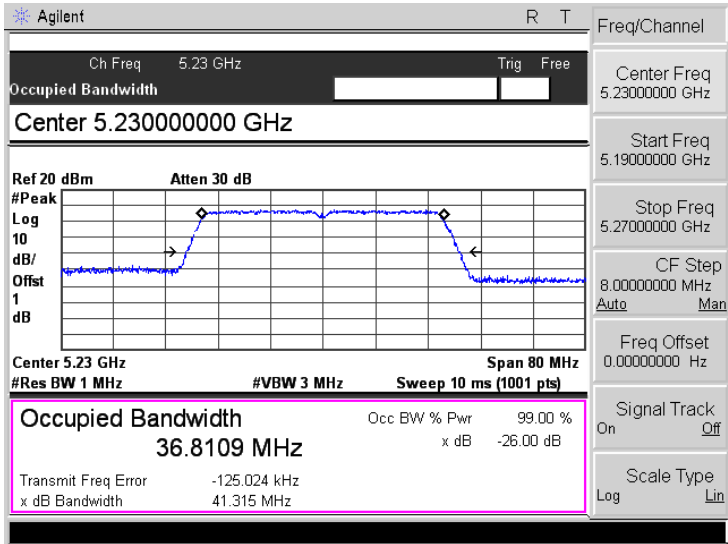
Mode:	802.11n-HT40
5755 MHz	
5795 MHz	

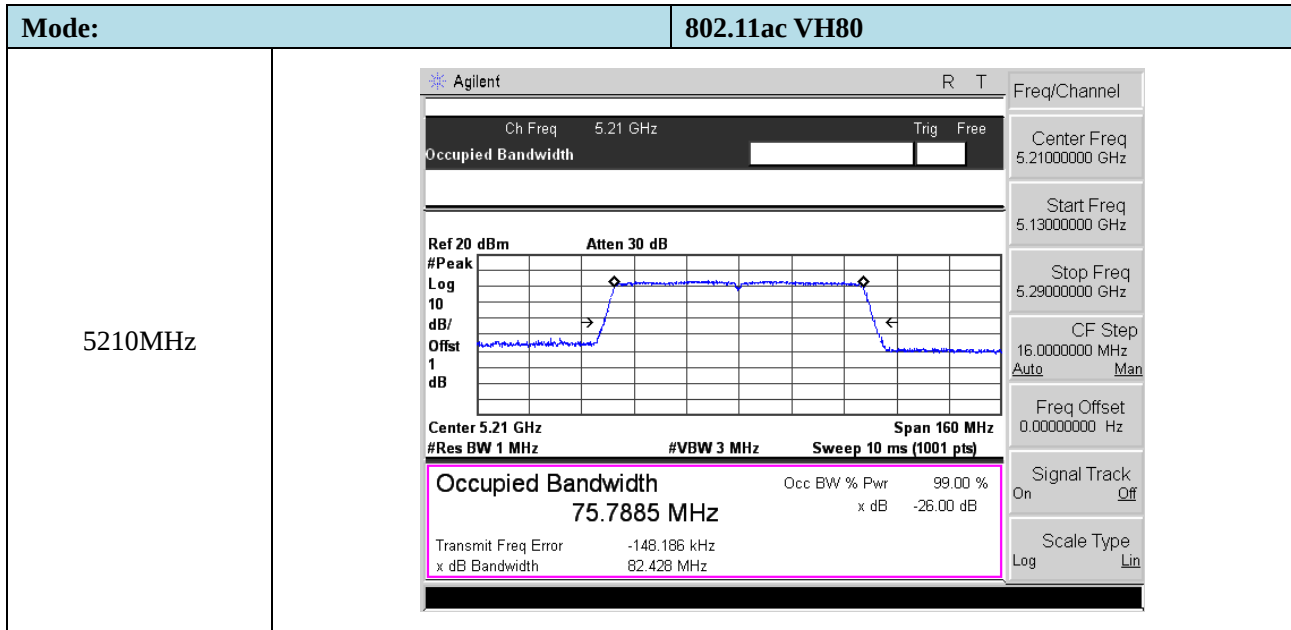


➤ Antenna 2: 5150-5250MHz

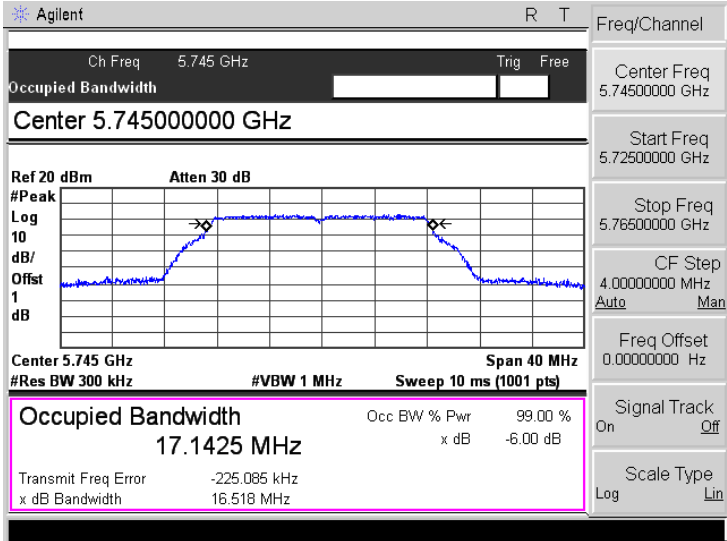
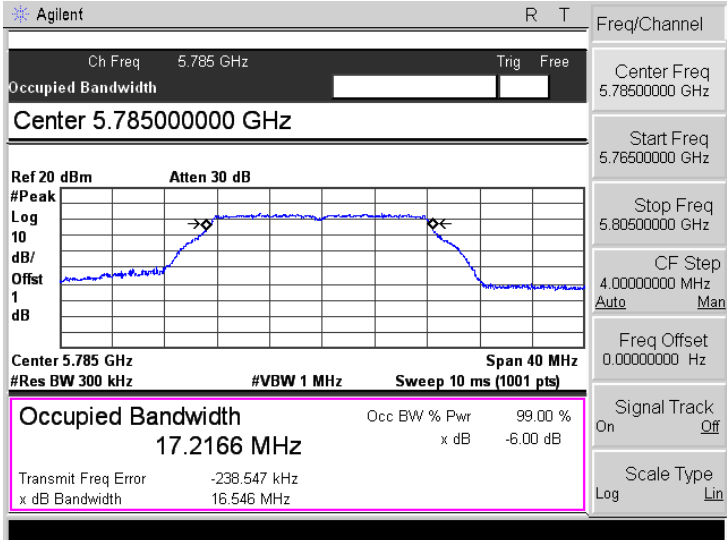
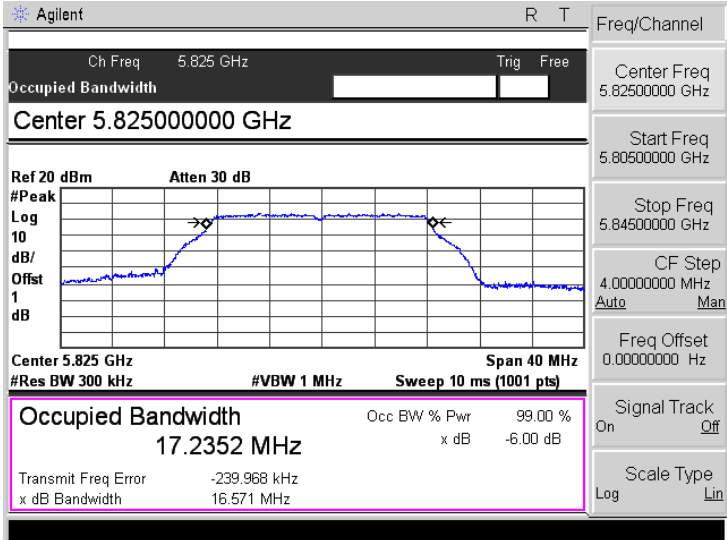
Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

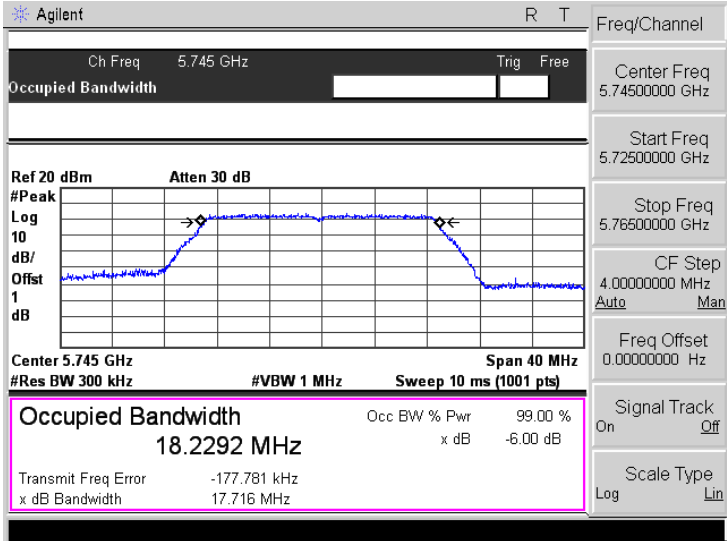
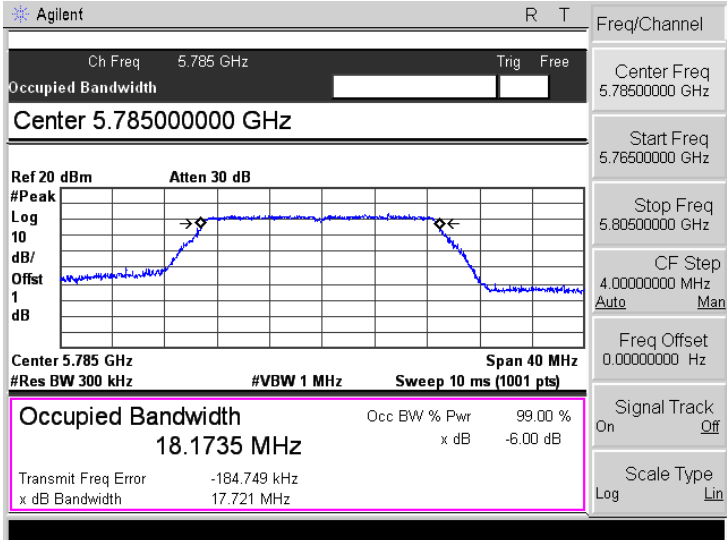
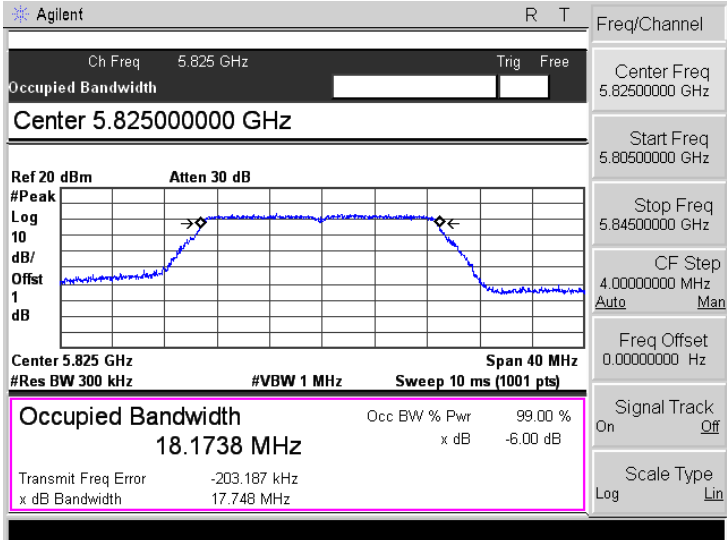
Mode:	802.11n-HT20
5180MHz	 Agilent R T Ch Freq 5.18 GHz Trig Free Occupied Bandwidth Center 5.18000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.18 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 18.1736 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -177.482 kHz x dB Bandwidth 22.027 MHz Freq/Channel Center Freq 5.18000000 GHz Start Freq 5.16000000 GHz Stop Freq 5.20000000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5200MHz	 Agilent R T Ch Freq 5.2 GHz Trig Free Occupied Bandwidth Center 5.20000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.2 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 18.2170 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -178.896 kHz x dB Bandwidth 22.034 MHz Freq/Channel Center Freq 5.20000000 GHz Start Freq 5.18000000 GHz Stop Freq 5.22000000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5240MHz	 Agilent R T Ch Freq 5.24 GHz Trig Free Occupied Bandwidth Center 5.24000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.24 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 18.2510 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -174.212 kHz x dB Bandwidth 21.974 MHz Freq/Channel Center Freq 5.24000000 GHz Start Freq 5.22000000 GHz Stop Freq 5.26000000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

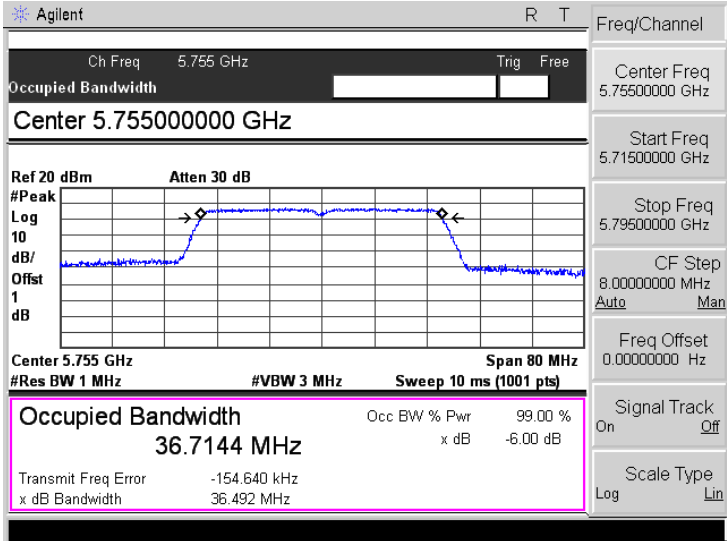
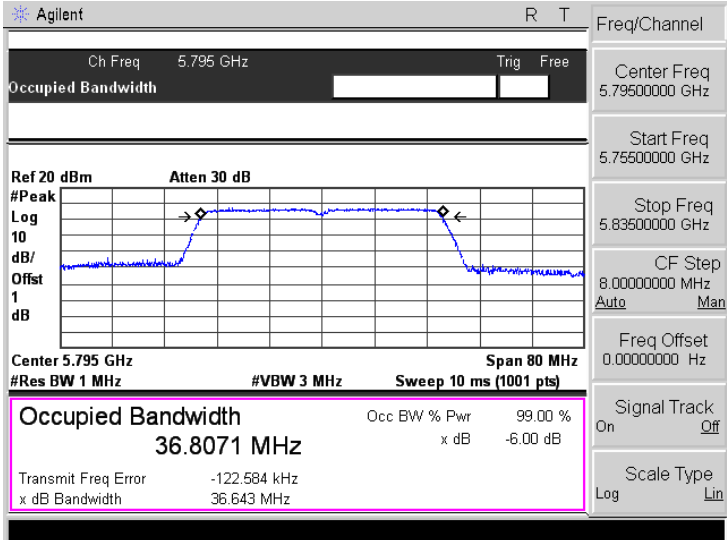
Mode:	802.11n-HT40
5190 MHz	 Agilent R T Ch Freq 5.19 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.19 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 37.0021 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -97.032 kHz x dB Bandwidth 41.714 MHz BW/Avg Res BW 1.00000000 MHz Auto Man Video BW 3.00000000 MHz Auto Man VBW/RBW 10.00000 Auto Man Average 10 On Off Avg Type Video Auto Man EMI Res BW None
5230 MHz	 Agilent R T Ch Freq 5.23 GHz Trig Free Occupied Bandwidth Center 5.230000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.23 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 36.8109 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -125.024 kHz x dB Bandwidth 41.315 MHz Freq/Channel Center Freq 5.23000000 GHz Start Freq 5.19000000 GHz Stop Freq 5.27000000 GHz CF Step 8.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

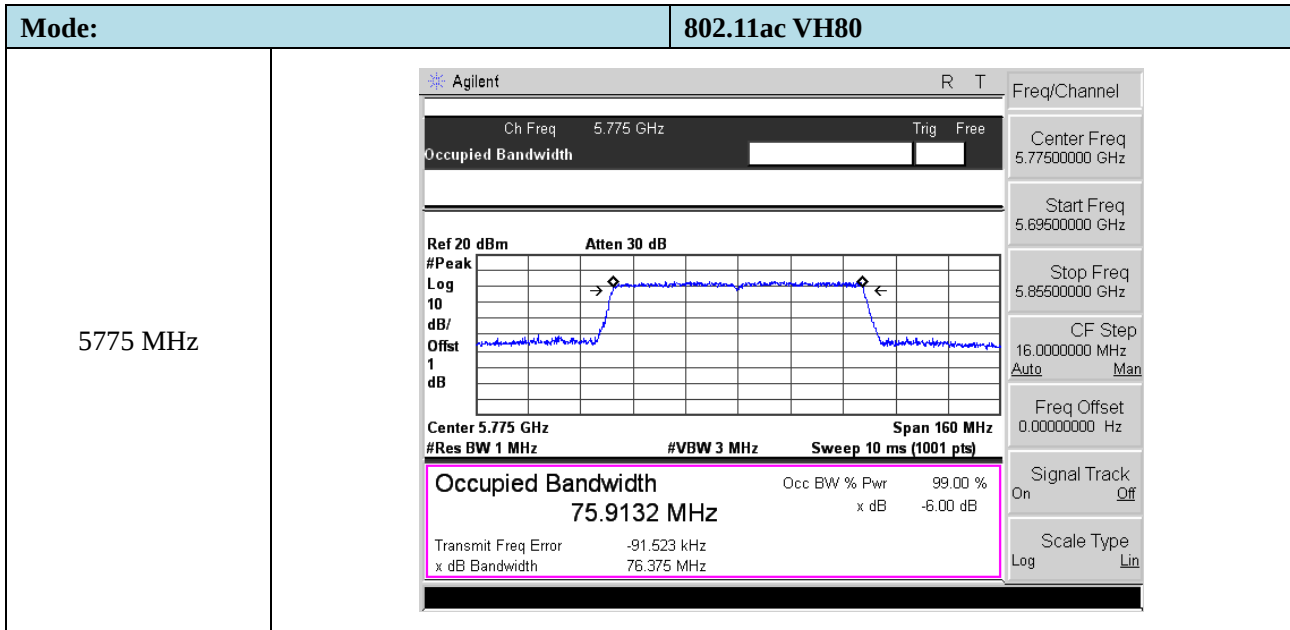


➤ Antenna 2: 5725-5850MHz

Mode:	802.11a
5745MHz	 Agilent R T Ch Freq 5.745 GHz Trig Free Occupied Bandwidth Center 5.74500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.745 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.1425 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -225.085 kHz x dB Bandwidth 16.518 MHz Freq/Channel Center Freq 5.74500000 GHz Start Freq 5.72500000 GHz Stop Freq 5.76500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5785MHz	 Agilent R T Ch Freq 5.785 GHz Trig Free Occupied Bandwidth Center 5.78500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.2166 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -238.547 kHz x dB Bandwidth 16.546 MHz Freq/Channel Center Freq 5.78500000 GHz Start Freq 5.76500000 GHz Stop Freq 5.80500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5825MHz	 Agilent R T Ch Freq 5.825 GHz Trig Free Occupied Bandwidth Center 5.82500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.2352 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -239.968 kHz x dB Bandwidth 16.571 MHz Freq/Channel Center Freq 5.82500000 GHz Start Freq 5.80500000 GHz Stop Freq 5.84500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

Mode:	802.11n-HT20
5745MHz	 Agilent R T Ch Freq 5.745 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.745 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 18.2292 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -177.781 kHz x dB Bandwidth 17.716 MHz Freq/Channel Center Freq 5.74500000 GHz Start Freq 5.72500000 GHz Stop Freq 5.76500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5785MHz	 Agilent R T Ch Freq 5.785 GHz Trig Free Occupied Bandwidth Center 5.78500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 18.1735 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -184.749 kHz x dB Bandwidth 17.721 MHz Freq/Channel Center Freq 5.78500000 GHz Start Freq 5.76500000 GHz Stop Freq 5.80500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5825MHz	 Agilent R T Ch Freq 5.825 GHz Trig Free Occupied Bandwidth Center 5.82500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 18.1738 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -203.187 kHz x dB Bandwidth 17.748 MHz Freq/Channel Center Freq 5.82500000 GHz Start Freq 5.80500000 GHz Stop Freq 5.84500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

Mode:	802.11n-HT40
5755 MHz	 Agilent R T Ch Freq 5.755 GHz Trig Free Occupied Bandwidth Center 5.75500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.755 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 36.7144 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -154.640 kHz x dB Bandwidth 36.492 MHz Freq/Channel Center Freq 5.75500000 GHz Start Freq 5.71500000 GHz Stop Freq 5.79500000 GHz CF Step 8.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5795 MHz	 Agilent R T Ch Freq 5.795 GHz Trig Free Occupied Bandwidth Center 5.79500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.795 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 36.8071 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -122.584 kHz x dB Bandwidth 36.643 MHz Freq/Channel Center Freq 5.79500000 GHz Start Freq 5.75500000 GHz Stop Freq 5.83500000 GHz CF Step 8.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin



8. Maximum Conducted Output Power

8.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

8.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW ≥ 3 MHz.
- (iv) Number of points in sweep $\geq 2 \text{ Span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.

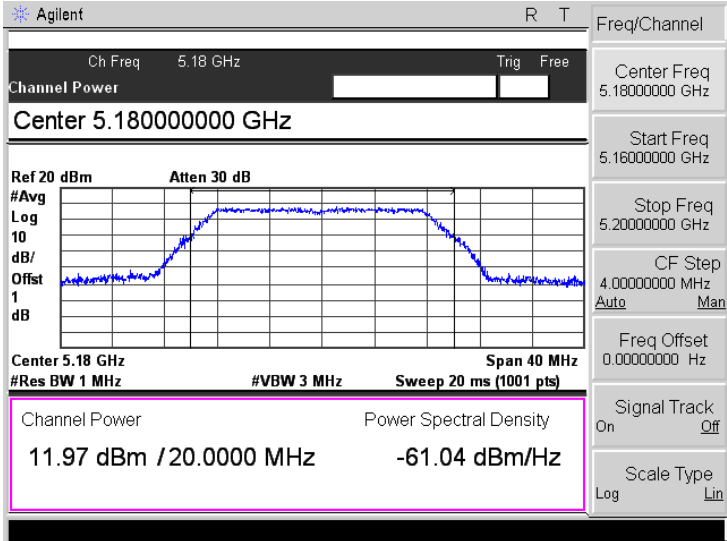
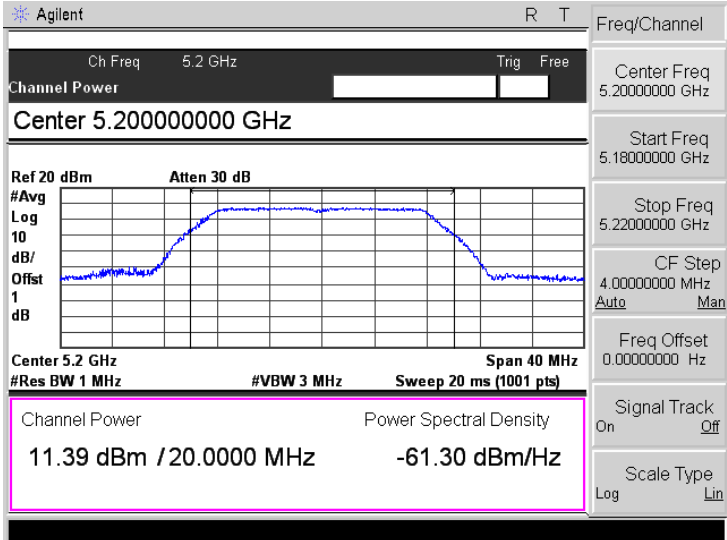
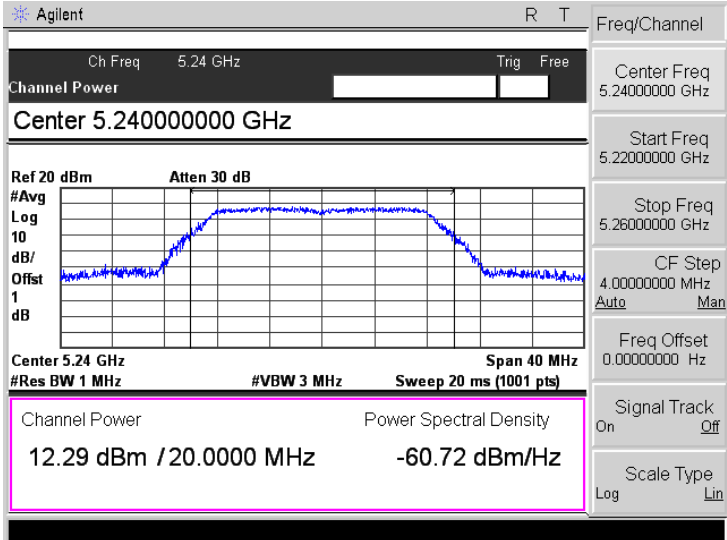
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

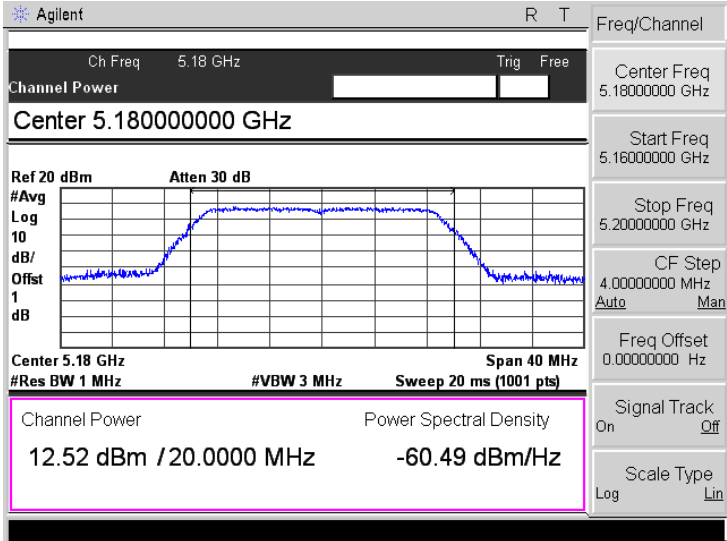
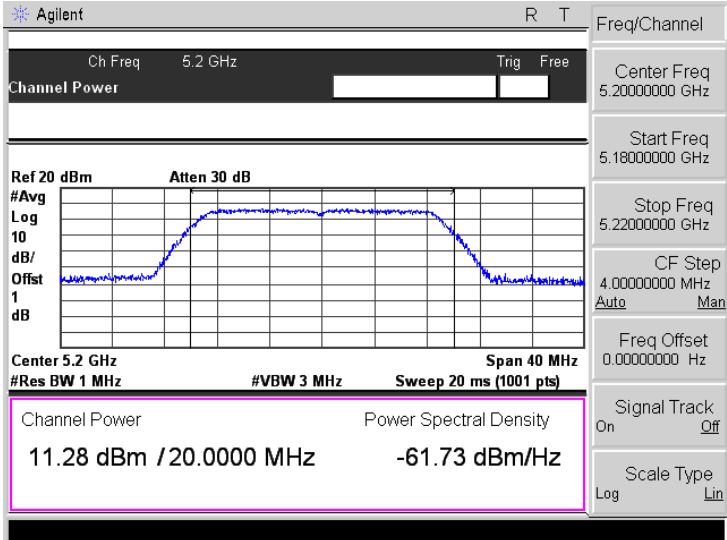
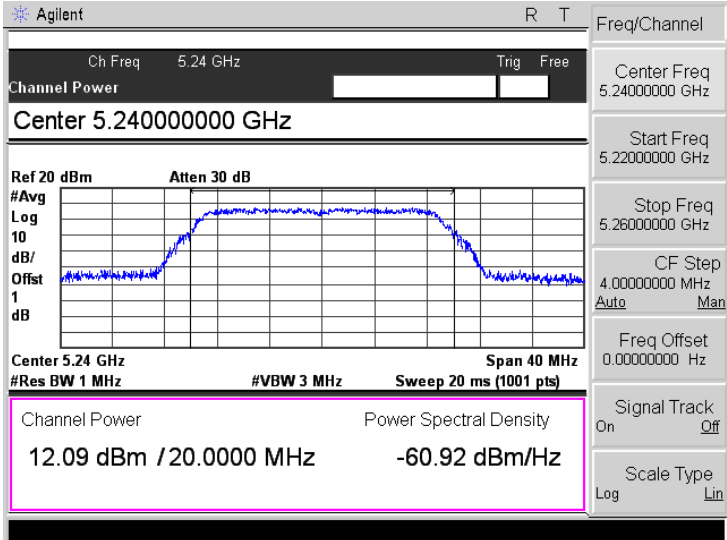
8.3 Summary of Test Results/Plots

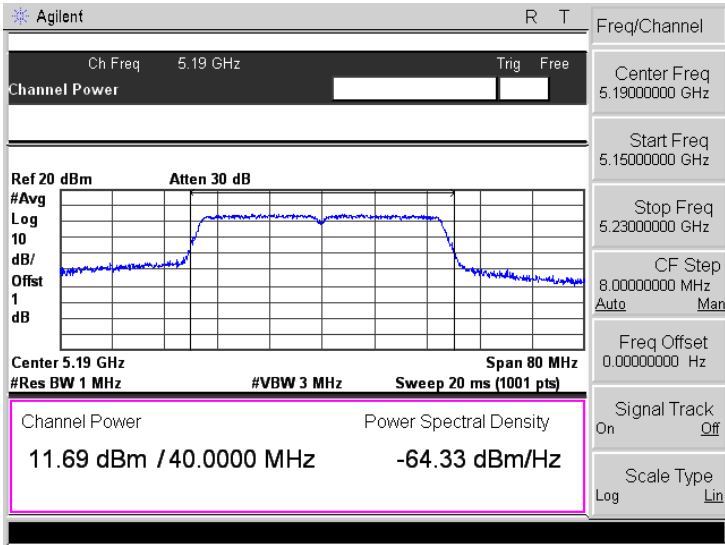
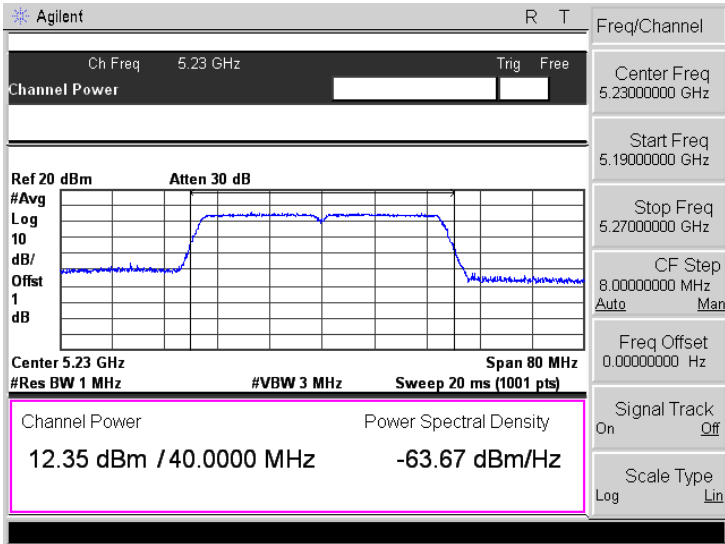
U-NII-1:5150-5250MHz								
Test mode	Frequency MHz	ANT1 Power dBm	ANT2 Power dBm	ANT1 Power mW	ANT2 Power mW	Total Power dBm	Output Power mW	Limit mW
802.11a	5180	11.97	12.29	15.74	16.94	/	/	250
	5200	11.39	12.00	13.77	15.85	/	/	250
	5240	12.29	12.30	16.94	16.98	/	/	250
802.11n-HT20	5180	12.52	12.16	17.87	16.44	15.35	34.31	250
	5200	11.28	12.07	13.43	16.11	14.70	29.54	250
	5240	12.09	12.69	16.18	18.58	15.41	34.76	250
802.11n-HT40	5190	11.69	11.53	14.76	14.22	14.62	28.98	250
	5230	12.35	12.00	17.22	15.85	15.19	33.07	250
802.11ac VH80	5210	10.14	10.87	10.33	12.22	13.53	22.55	250

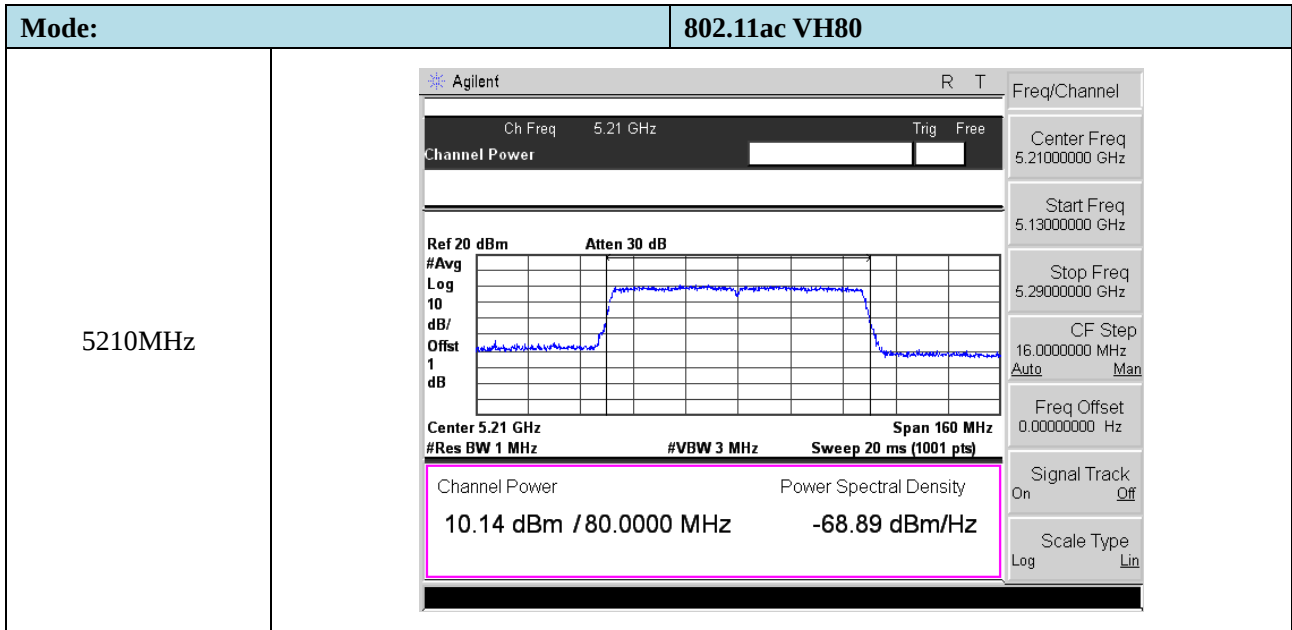
U-NII-1: 5725-5850MHz								
Test mode	Frequency MHz	ANT1 Power dBm	ANT2 Power dBm	ANT1 Power mW	ANT2 Power mW	Total Power dBm	Output Power mW	Limit mW
802.11a	5745	11.85	11.29	15.31	13.46	/	/	250
	5785	11.66	11.16	14.66	13.06	/	/	250
	5825	11.43	10.98	13.90	12.53	/	/	250
802.11n-HT20	5745	11.74	10.81	14.93	12.05	14.31	26.98	250
	5785	11.45	10.98	13.96	12.53	14.23	26.49	250
	5825	11.68	11.41	14.72	13.84	14.56	28.56	250
802.11n-HT40	5755	11.79	11.72	15.10	14.86	14.77	29.96	250
	5795	11.94	11.56	15.63	14.32	14.76	29.95	250
802.11ac VH80	5775	11.05	10.53	12.74	11.30	13.81	24.04	250

➤ Antenna 1: 5150-5250MHz

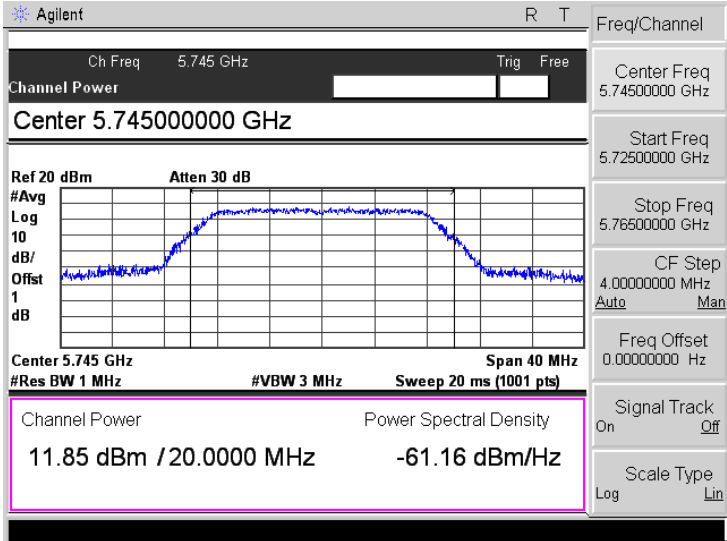
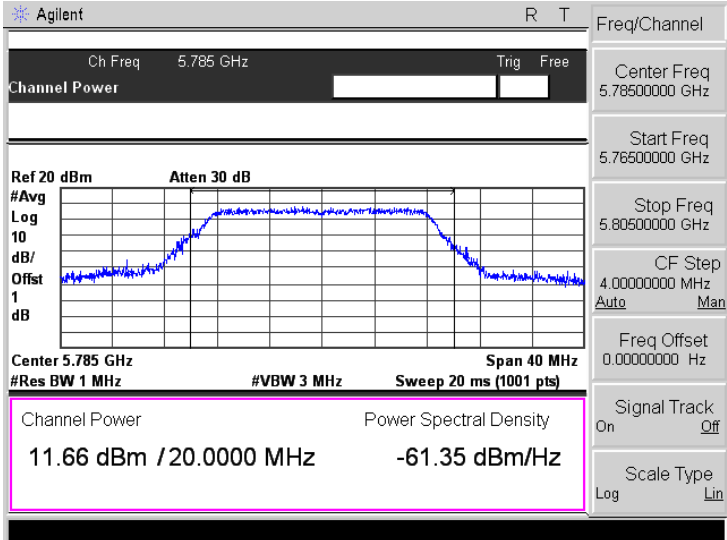
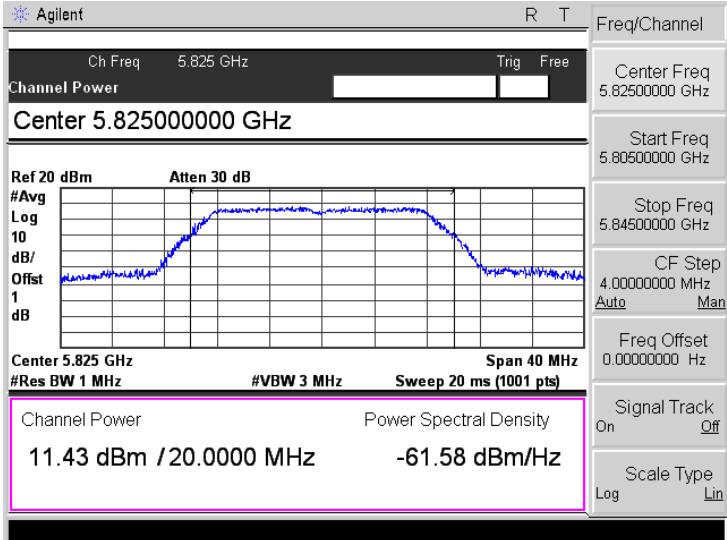
Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

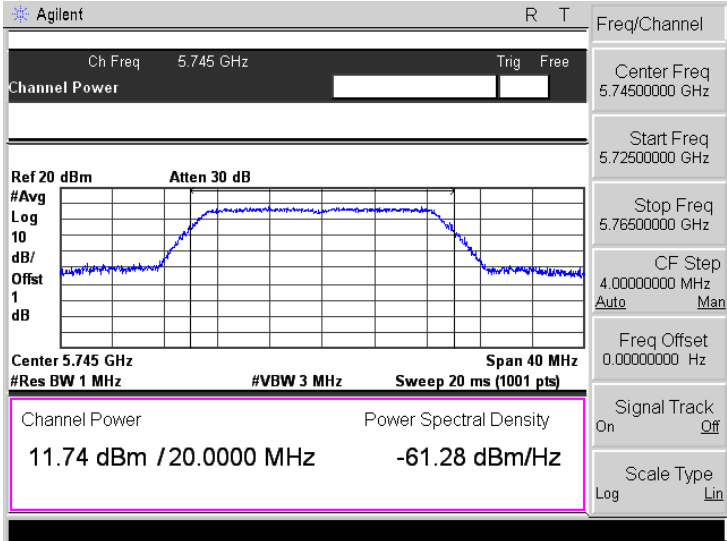
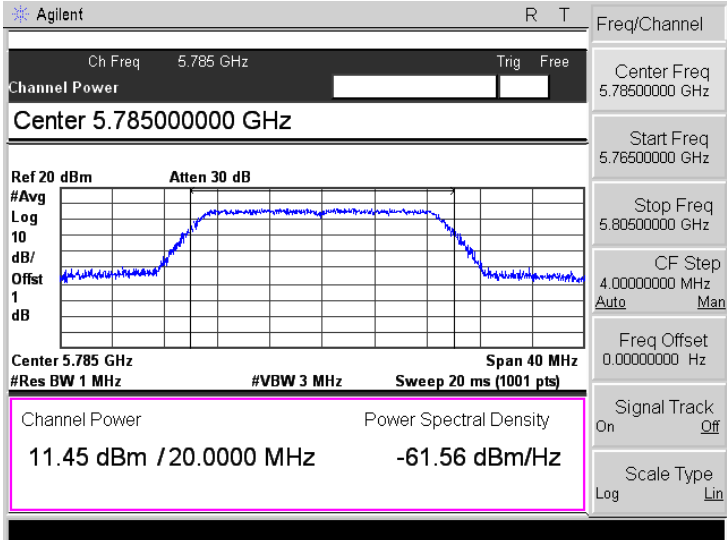
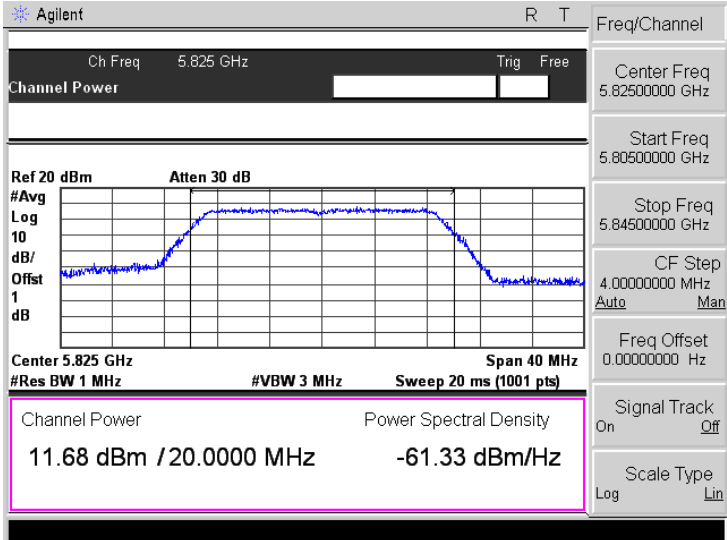
Mode:	802.11n-HT20
5180MHz	
5200MHz	
5240MHz	

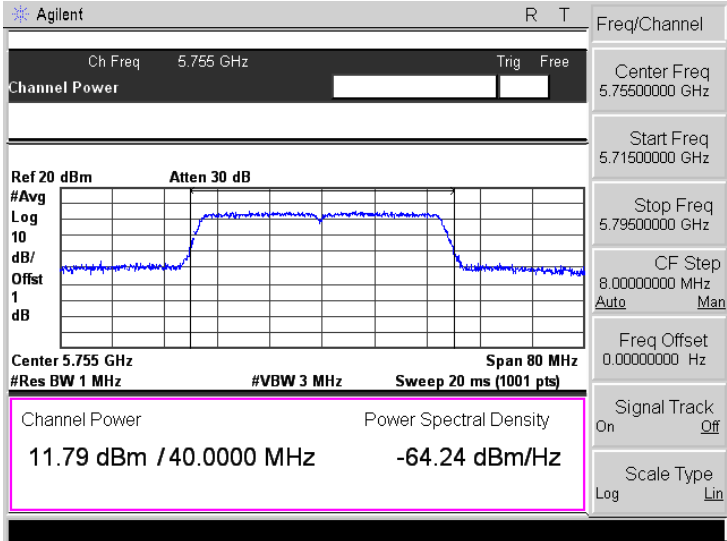
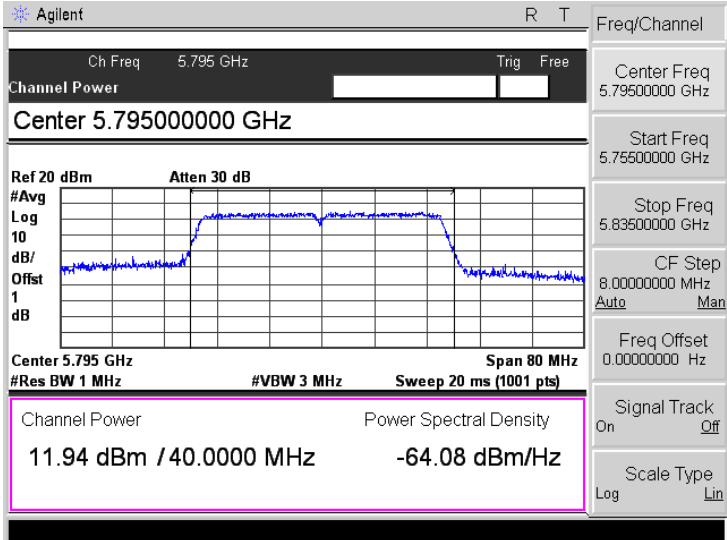
Mode:	802.11n-HT40
5190 MHz	
5230 MHz	

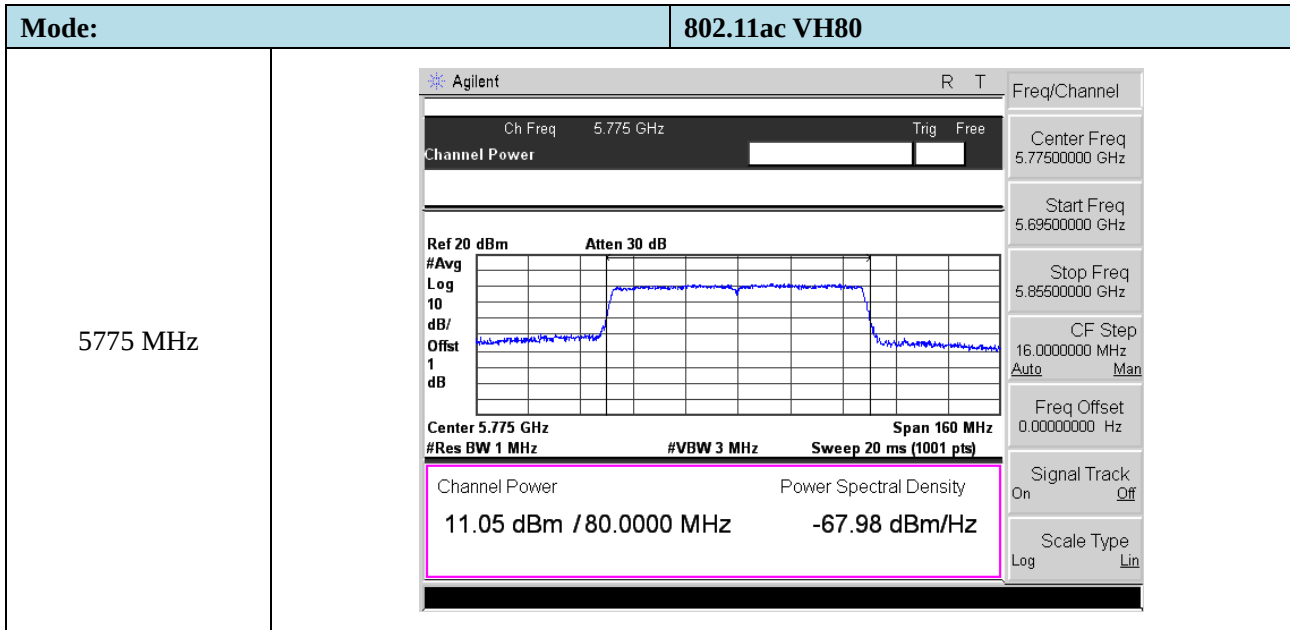


➤ Antenna 1: 5725-5850MHz

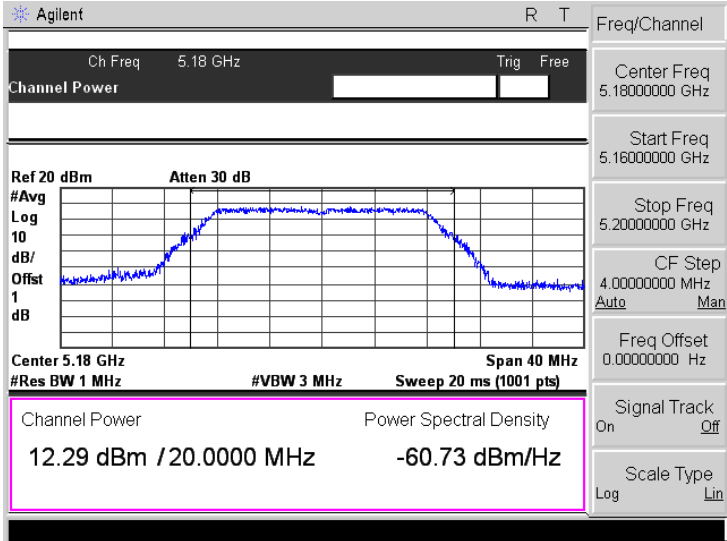
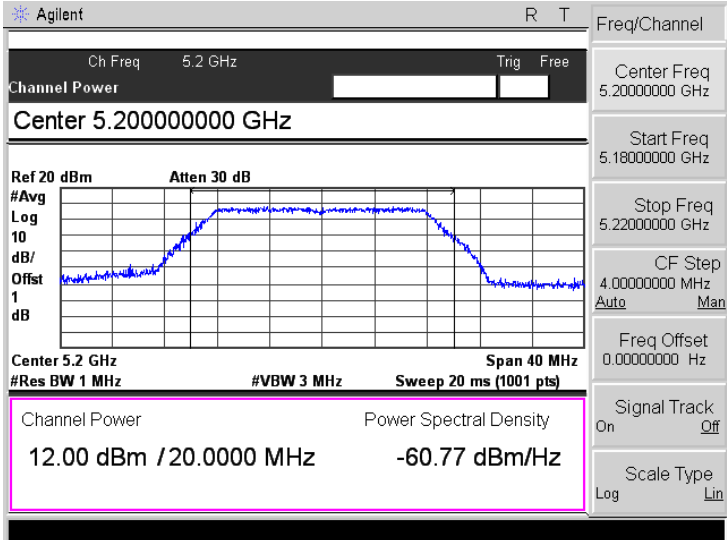
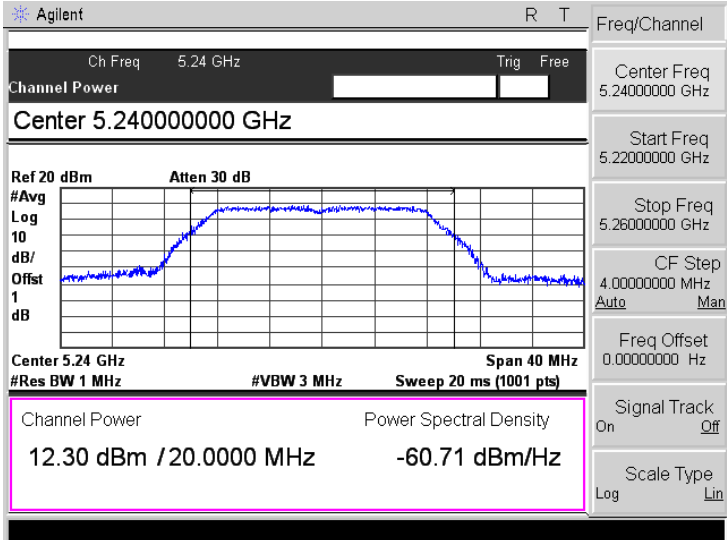
Mode:	802.11a
5745MHz	
5785MHz	
5825MHz	

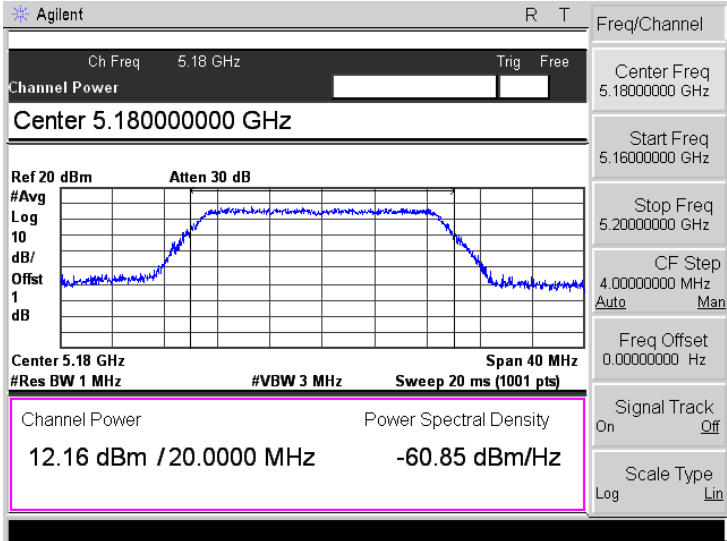
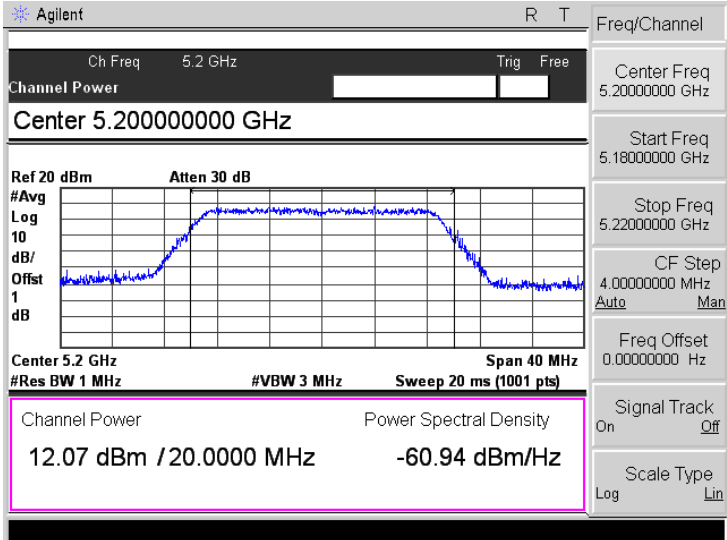
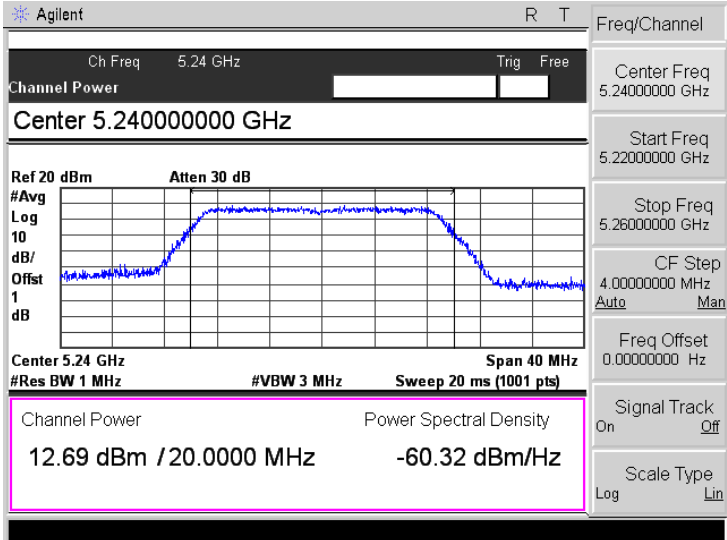
Mode:	802.11n-HT20
5745MHz	
5785MHz	
5825MHz	

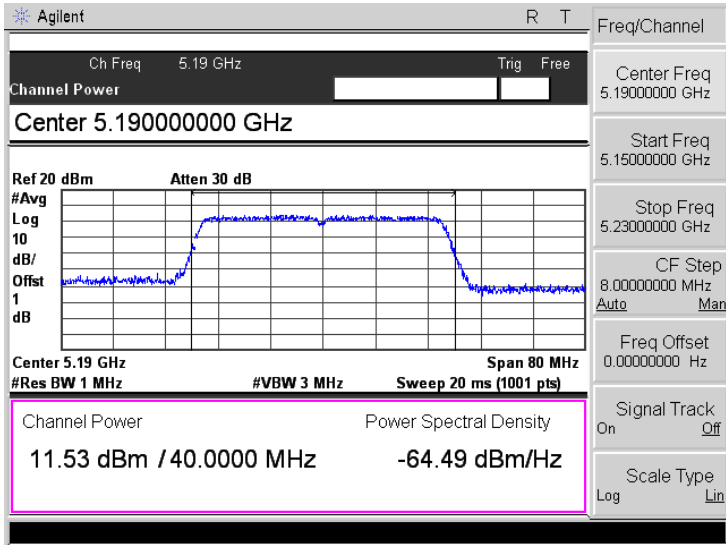
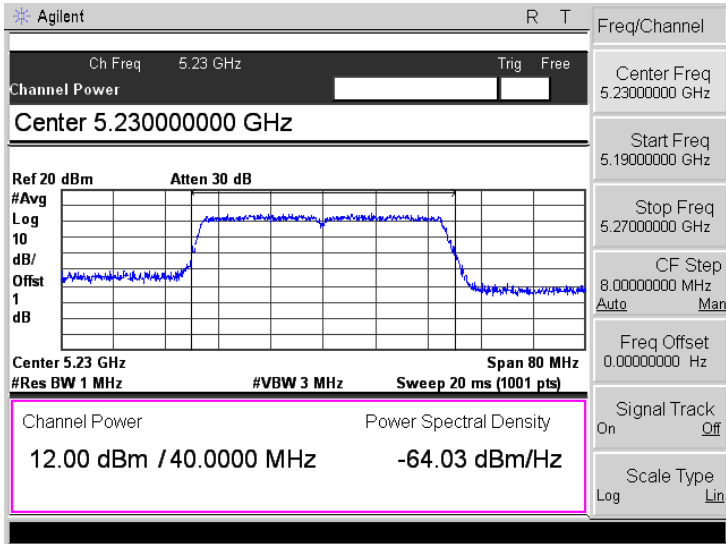
Mode:	802.11n-HT40
5755 MHz	
5795 MHz	

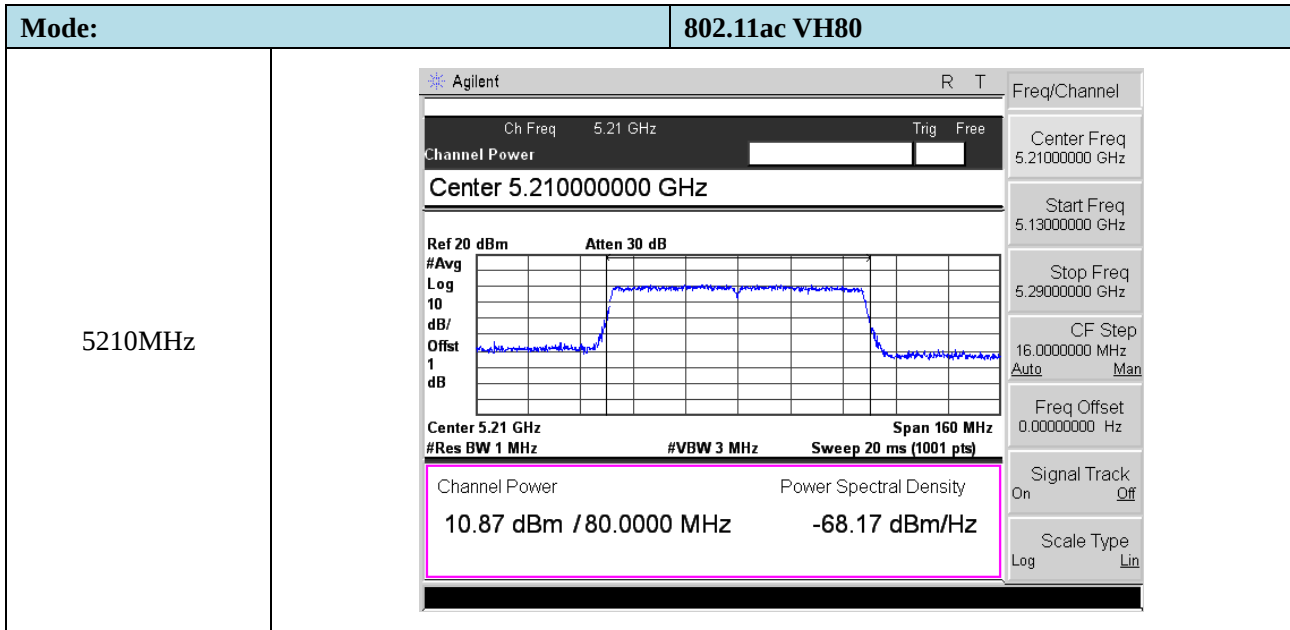


➤ Antenna 2: 5150-5250MHz

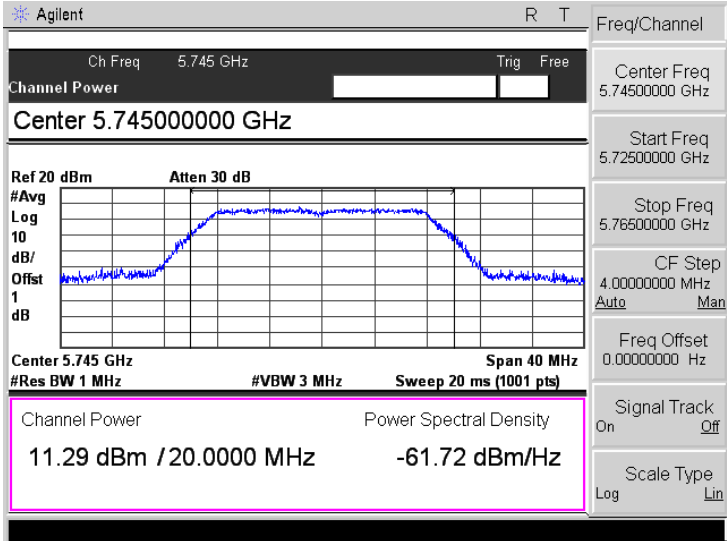
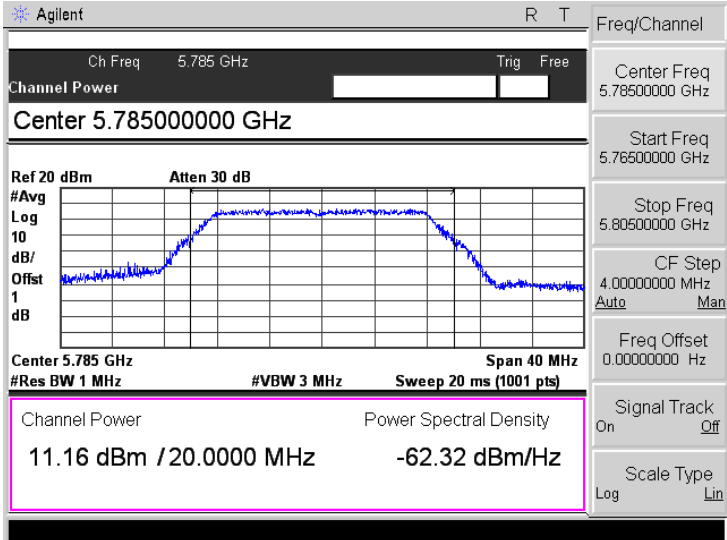
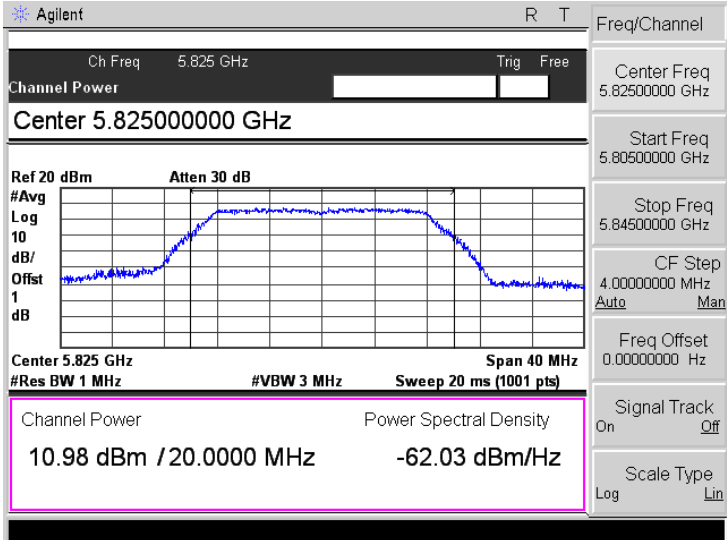
Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

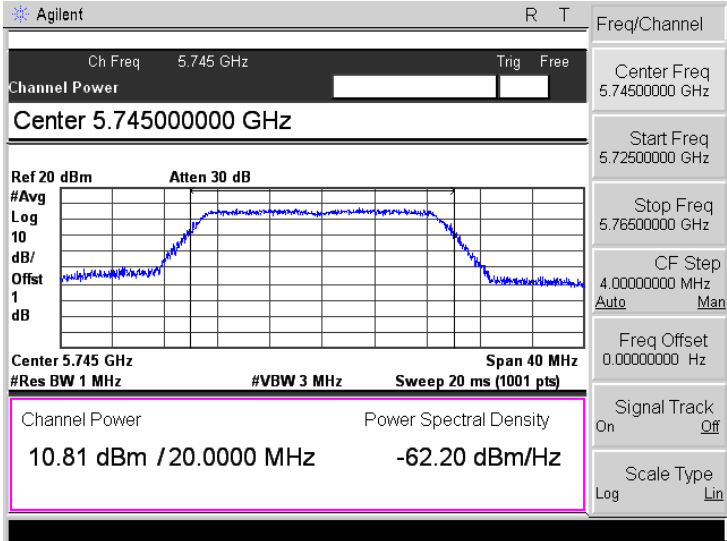
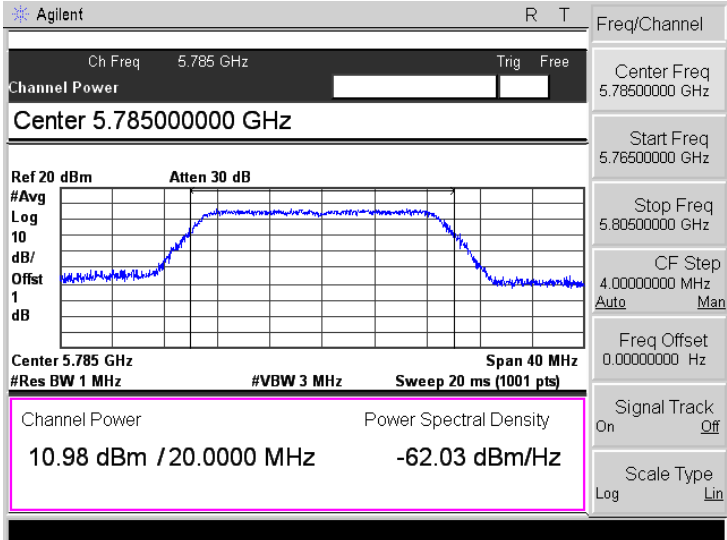
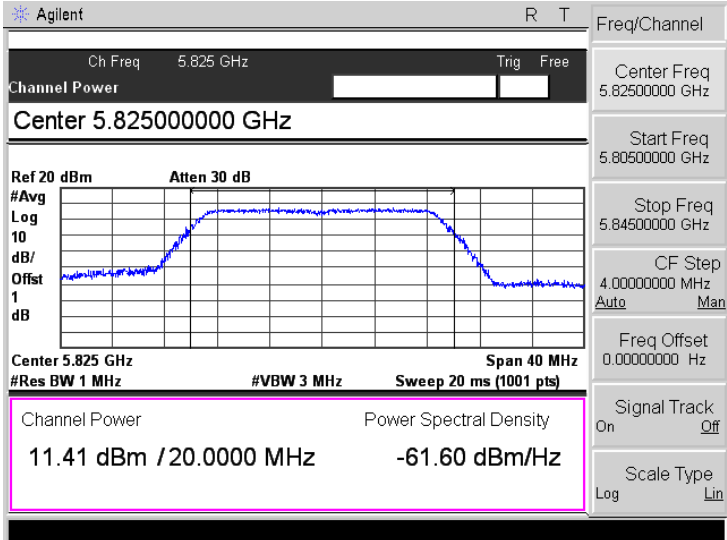
Mode:	802.11n-HT20
5180MHz	
5200MHz	
5240MHz	

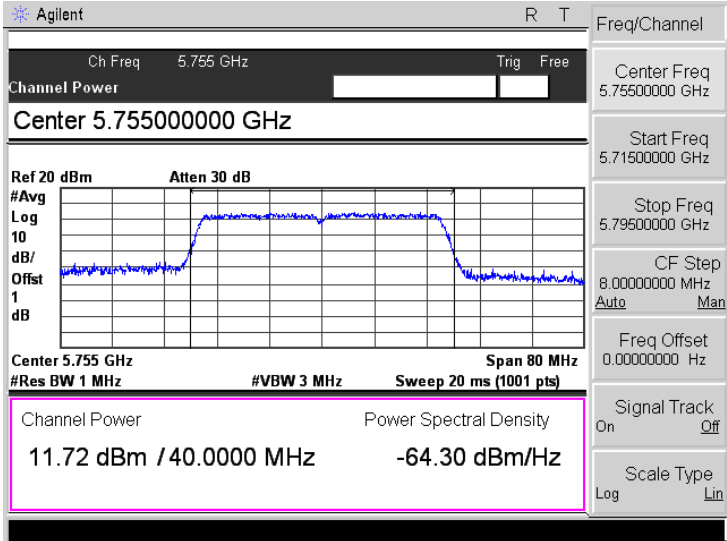
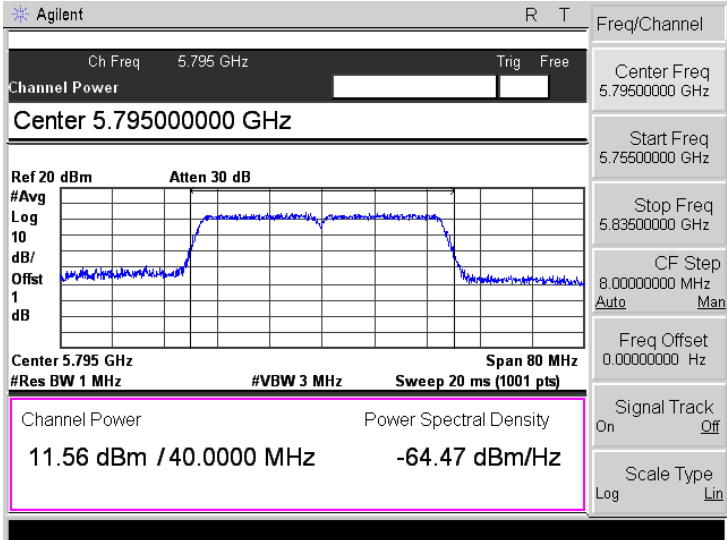
Mode:	802.11n-HT40
5190 MHz	 Agilent R T Freq/Channel Ch Freq 5.19 GHz Trig Free Channel Power Center 5.190000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 5.19 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Channel Power Power Spectral Density 11.53 dBm / 40.0000 MHz -64.49 dBm/Hz Freq/Channel Center Freq 5.19000000 GHz Start Freq 5.15000000 GHz Stop Freq 5.23000000 GHz CF Step 8.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5230 MHz	 Agilent R T Freq/Channel Ch Freq 5.23 GHz Trig Free Channel Power Center 5.230000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 5.23 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Channel Power Power Spectral Density 12.00 dBm / 40.0000 MHz -64.03 dBm/Hz Freq/Channel Center Freq 5.23000000 GHz Start Freq 5.19000000 GHz Stop Freq 5.27000000 GHz CF Step 8.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

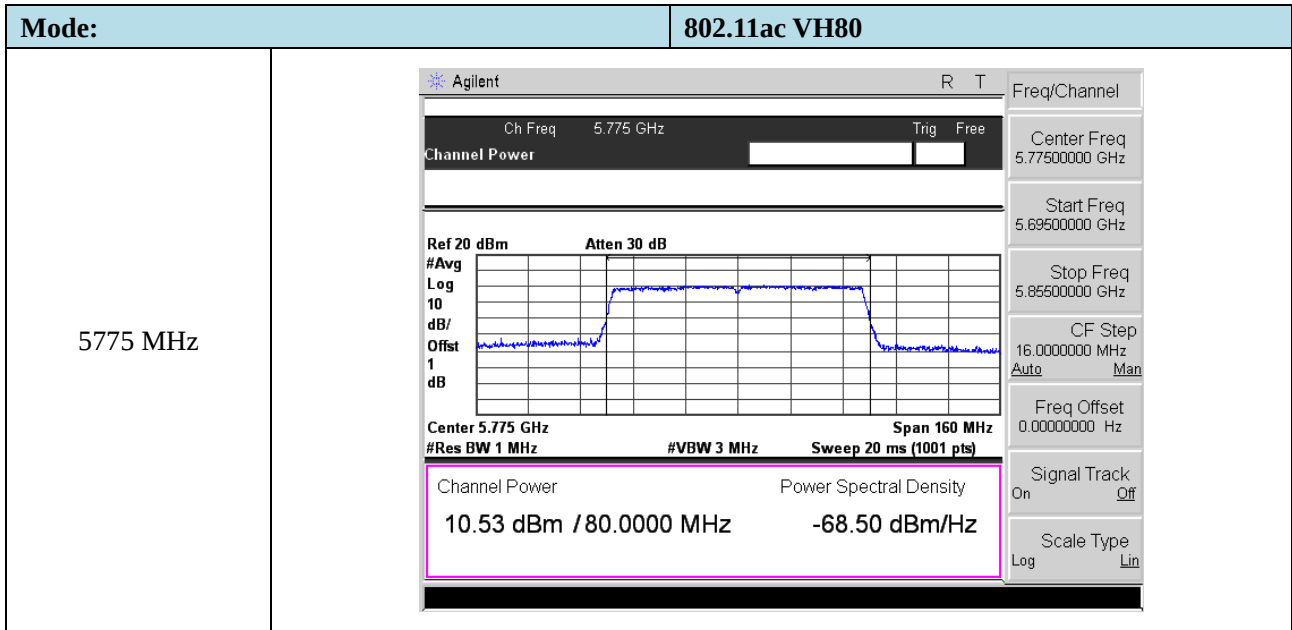


➤ Antenna 2: 5725-5850MHz

Mode:	802.11a
5745MHz	
5785MHz	
5825MHz	

Mode:	802.11n-HT20
5745MHz	
5785MHz	
5825MHz	

Mode:	802.11n-HT40
5755 MHz	
5795 MHz	



9. Radiated Spurious Emissions

9.1 Standard Applicable

According to §15.407(b), Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.
789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

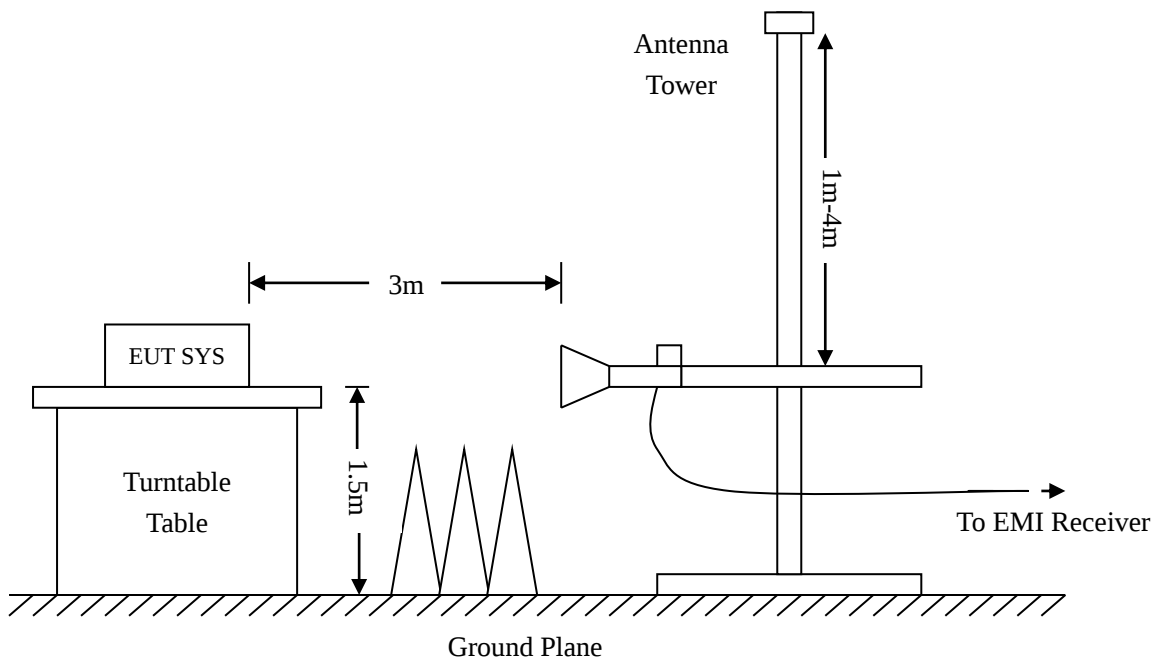
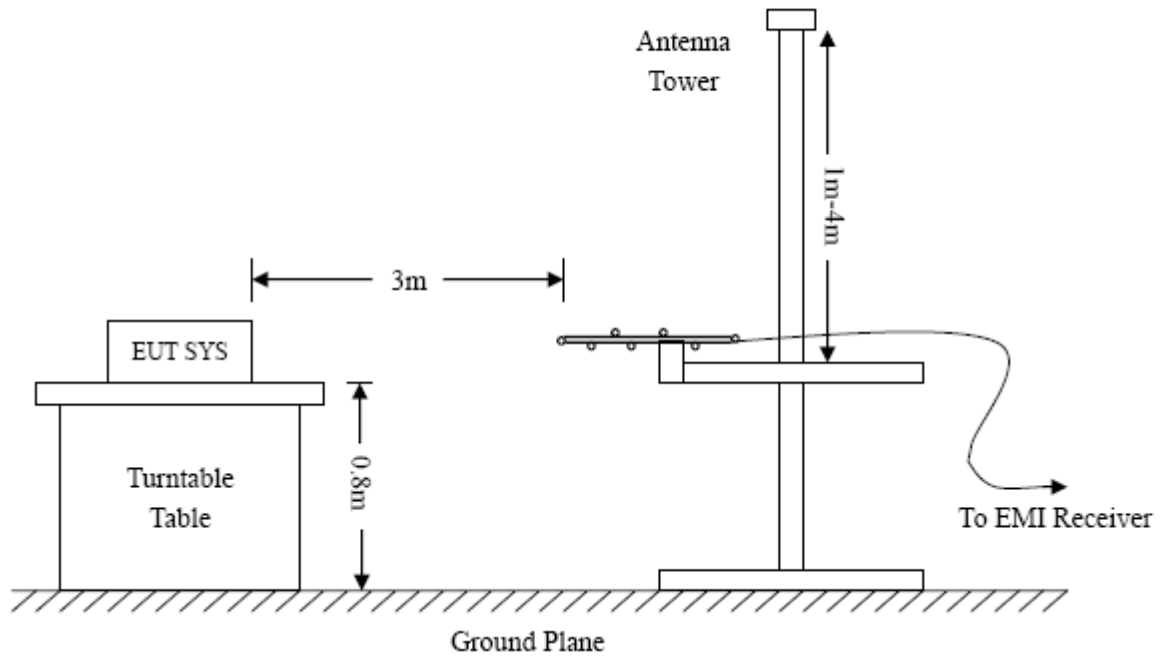
- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

9.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.



9.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

9.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

9.5 Summary of Test Results/Plots

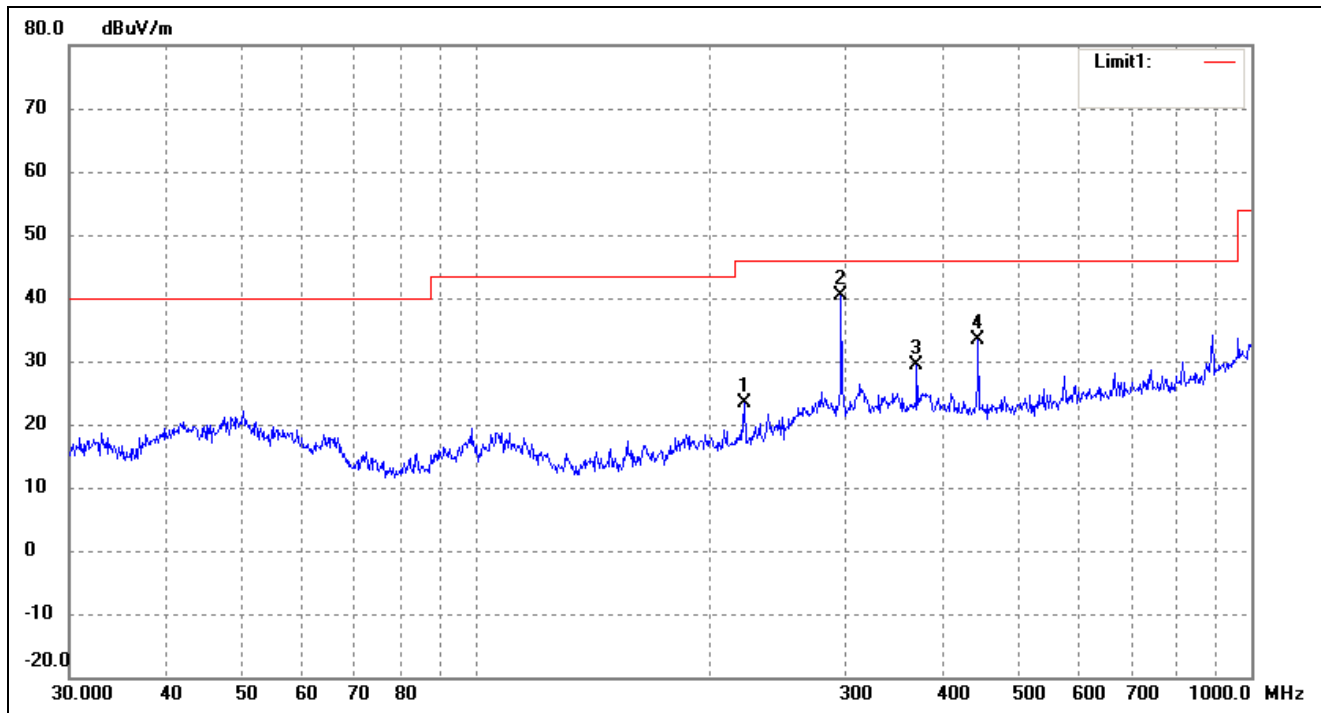
Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

➤ Spurious Emission From 30 MHz to 1 GHz

➤ 5150-5250MHz(Worst case)

➤ Antenna 1:

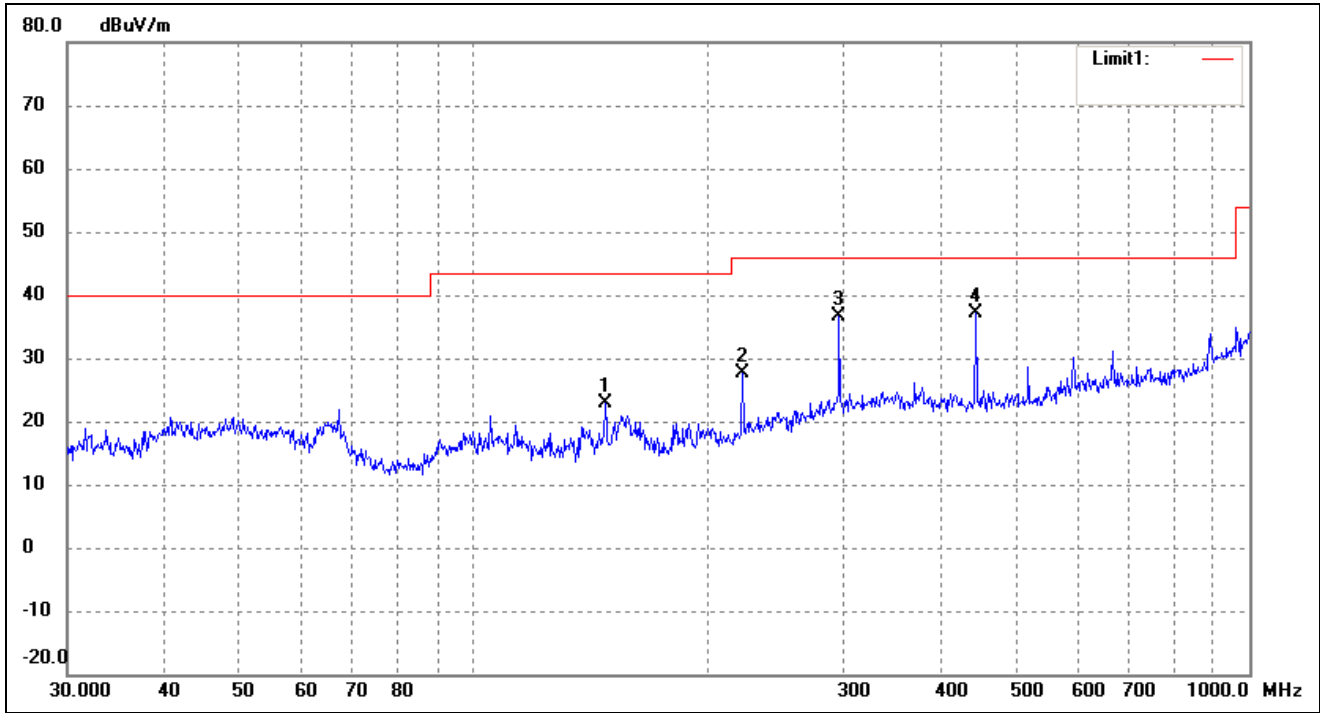
802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	222.1698	34.73	-11.26	23.47	46.00	-22.53	69	100	peak
2	296.1836	47.83	-7.49	40.34	46.00	-5.66	128	100	peak
3	370.7023	36.31	-7.01	29.30	46.00	-16.70	63	100	peak
4	444.8514	39.86	-6.41	33.45	46.00	-12.55	269	100	peak

802.11a

Test Channel	5180MHz(Worst case)	Polarity:	Vertical
--------------	---------------------	-----------	----------

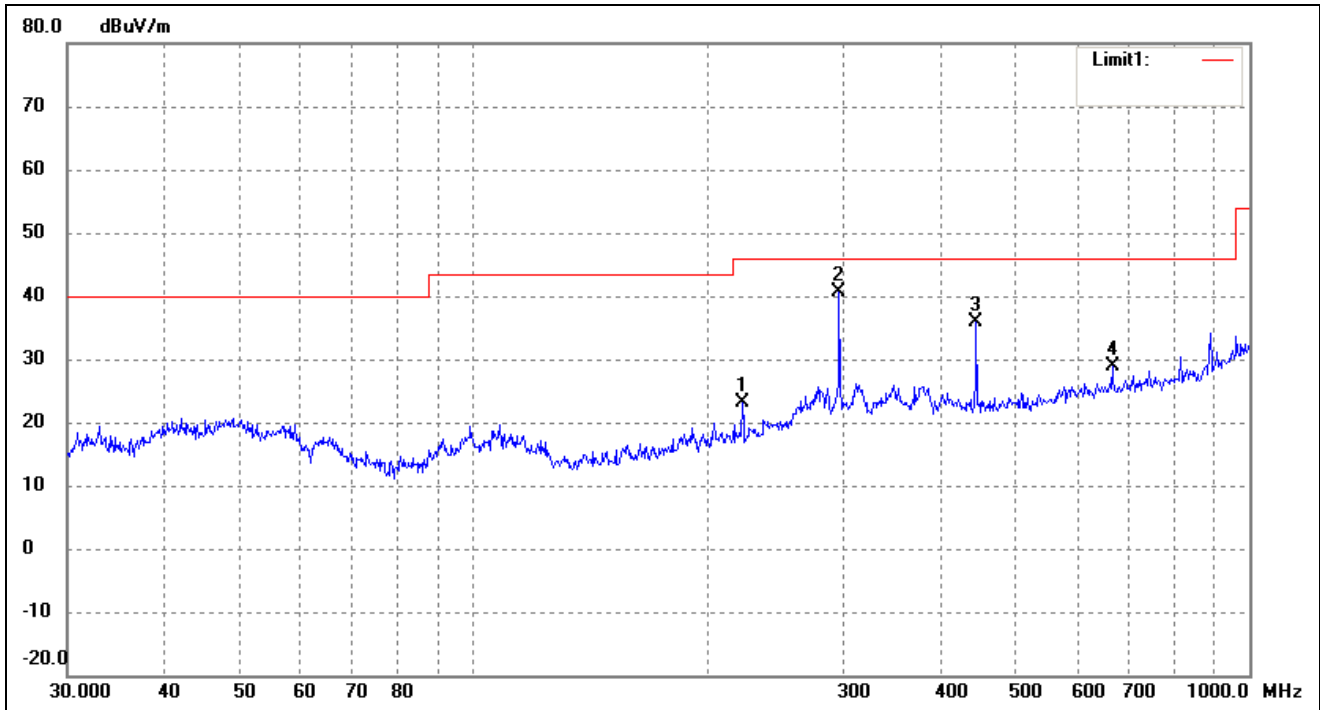


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	147.9214	40.44	-17.59	22.85	43.50	-20.65	219	100	peak
2	222.1698	40.14	-12.43	27.71	46.00	-18.29	134	100	peak
3	296.1836	46.02	-9.42	36.60	46.00	-9.40	89	100	peak
4	444.8514	44.14	-6.96	37.18	46.00	-8.82	91	100	peak

➤ Antenna 2

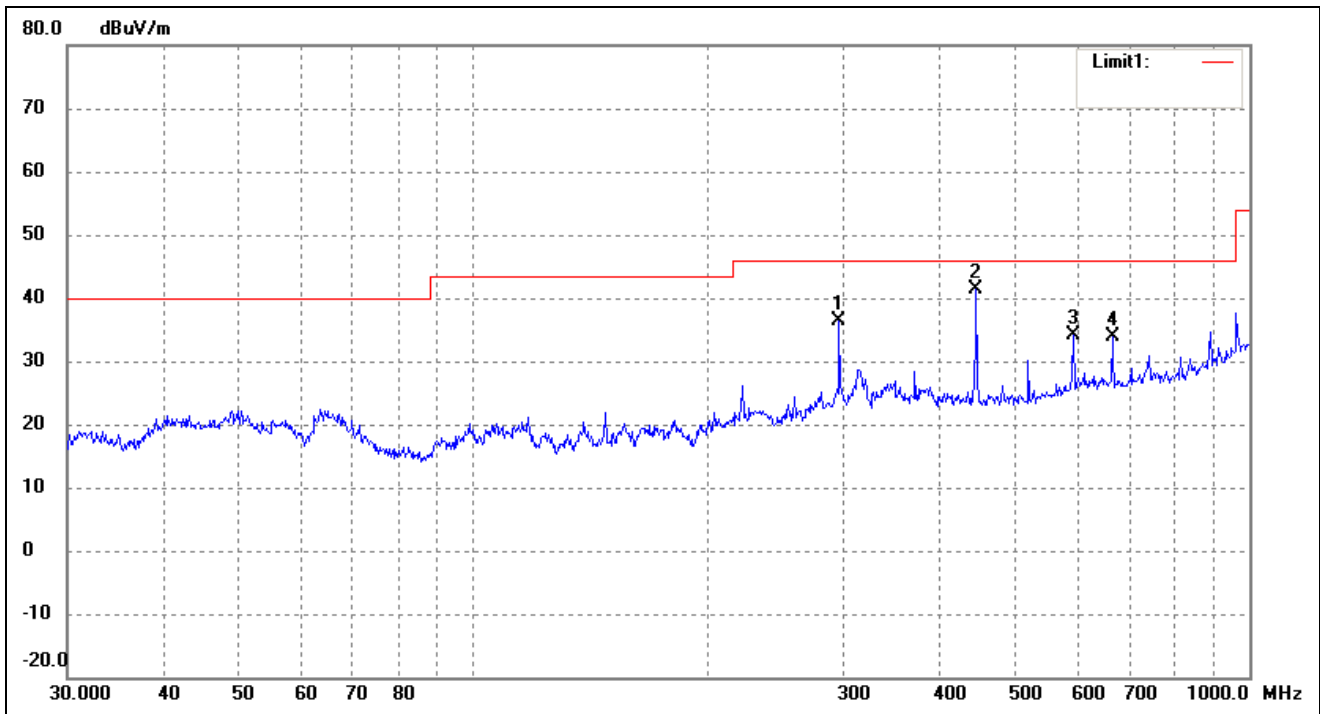
802.11a

Test Channel	5180MHz(Worst case)	Polarity:	Horizontal
--------------	---------------------	-----------	------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	222.1698	34.39	-11.26	23.13	46.00	-22.87	69	100	peak
2	296.1836	48.22	-7.49	40.73	46.00	-5.27	128	100	peak
3	444.8514	42.27	-6.41	35.86	46.00	-10.14	63	100	peak
4	665.8035	32.16	-3.18	28.98	46.00	-17.02	269	100	peak

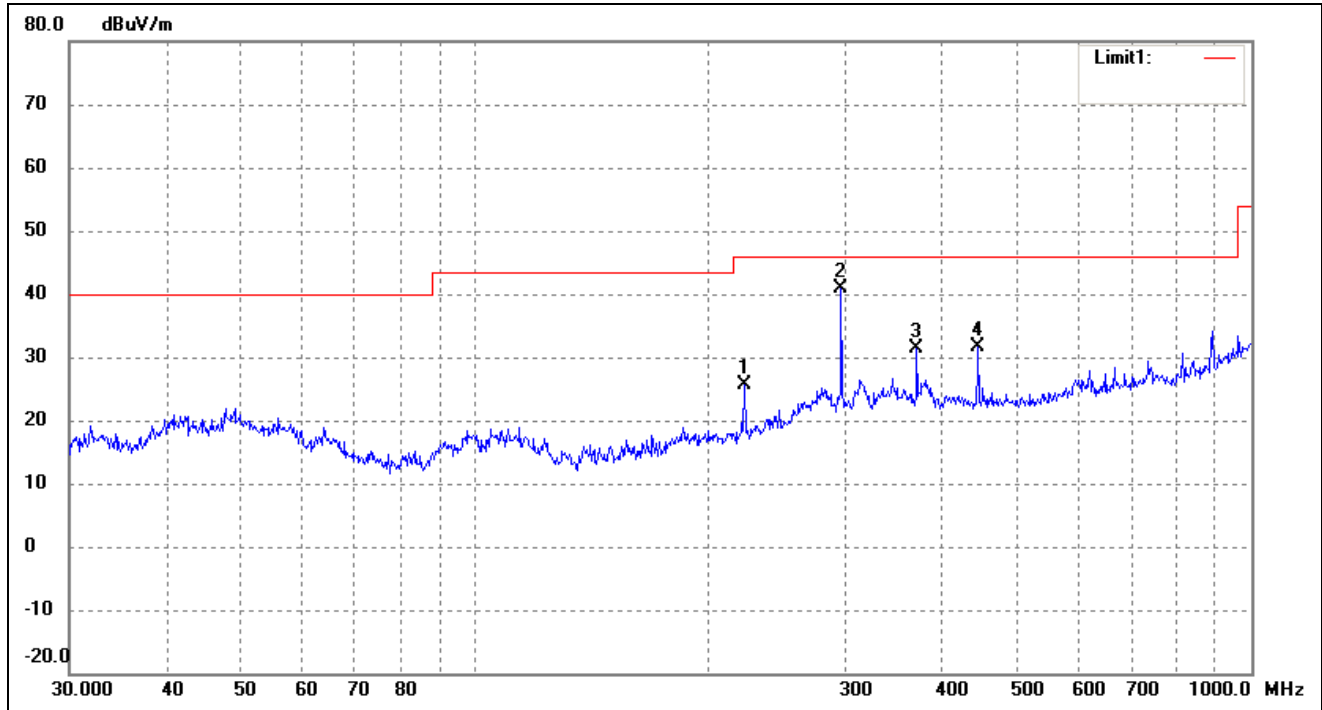
802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	296.1836	43.90	-7.49	36.41	46.00	-9.59	118	100	peak
2	444.8514	47.80	-6.41	41.39	46.00	-4.61	137	100	peak
3	593.0497	38.20	-4.00	34.20	46.00	-11.80	218	100	peak
4	665.8035	36.94	-3.18	33.76	46.00	-12.24	174	100	peak

➤ Antenna 1 and Antenna 2:

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	222.1698	36.80	-11.26	25.54	46.00	-20.46	172	100	peak
2	296.1836	48.25	-7.49	40.76	46.00	-5.24	94	100	peak
3	370.7023	38.33	-7.01	31.32	46.00	-14.68	193	100	peak
4	444.8514	38.03	-6.41	31.62	46.00	-14.38	103	100	peak

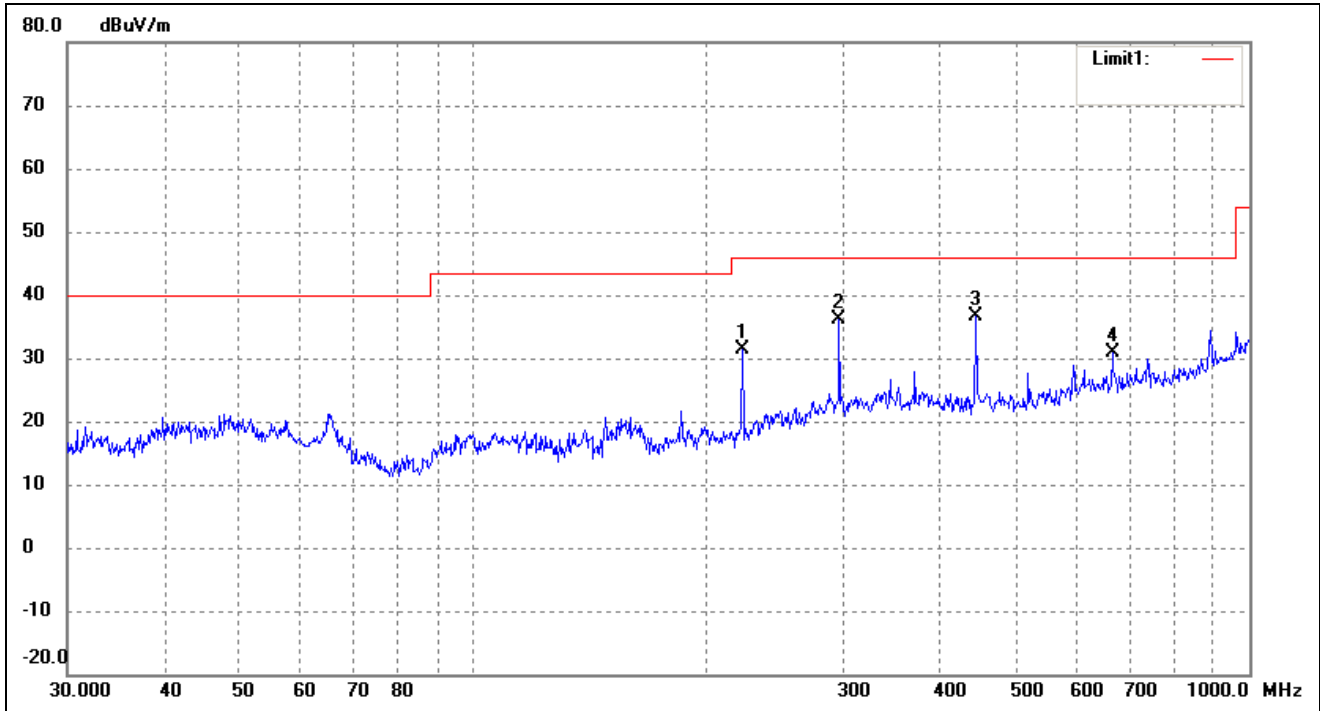
802.11n-HT20

Test Channel

5180MHz(worst case)

Polarity:

Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	222.1698	43.72	-12.43	31.29	46.00	-14.71	199	100	peak
2	296.1836	45.53	-9.42	36.11	46.00	-9.89	313	100	peak
3	444.8514	43.60	-6.96	36.64	46.00	-9.36	68	100	peak
4	665.8035	34.04	-3.18	30.86	46.00	-15.14	331	100	peak

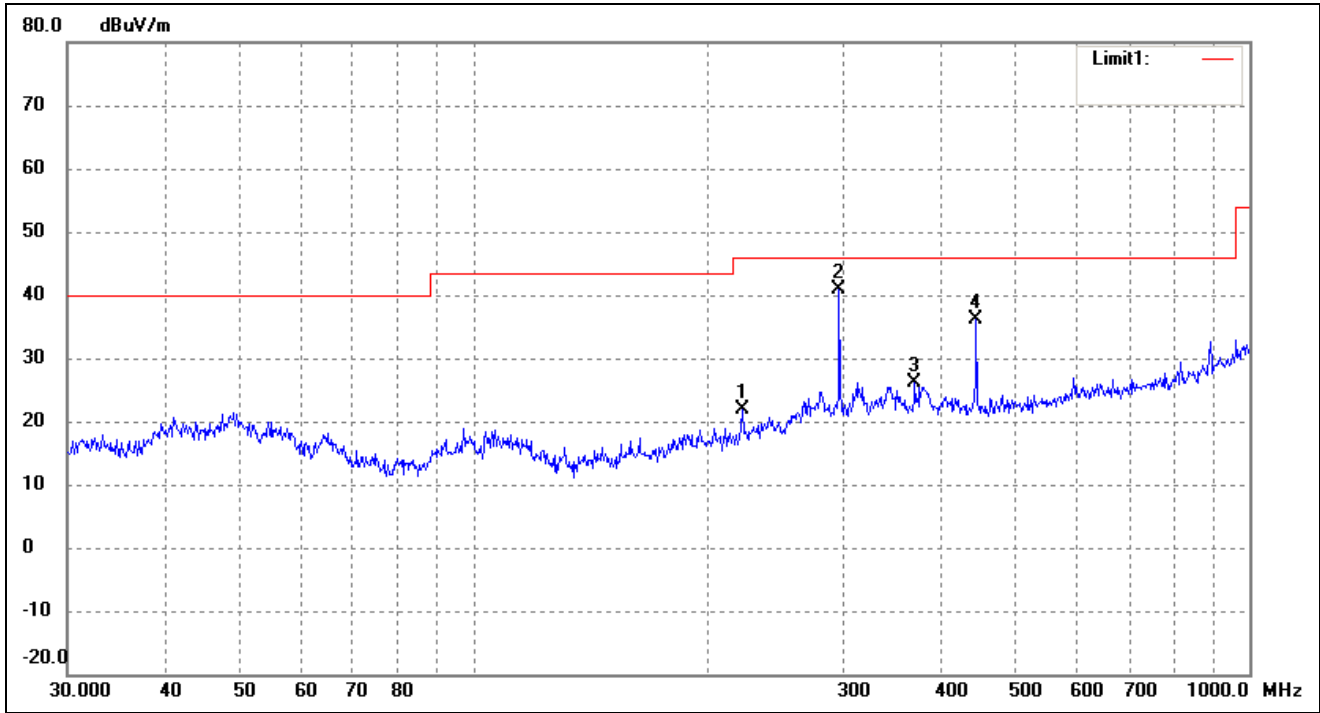
802.11n-HT40

Test Channel

5190MHz(worst case)

Polarity:

Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	222.1698	33.13	-11.26	21.87	46.00	-24.13	286	100	peak
2	296.1836	48.32	-7.49	40.83	46.00	-5.17	99	100	peak
3	370.7023	33.15	-7.01	26.14	46.00	-19.86	290	100	peak
4	444.8514	42.50	-6.41	36.09	46.00	-9.91	91	100	peak

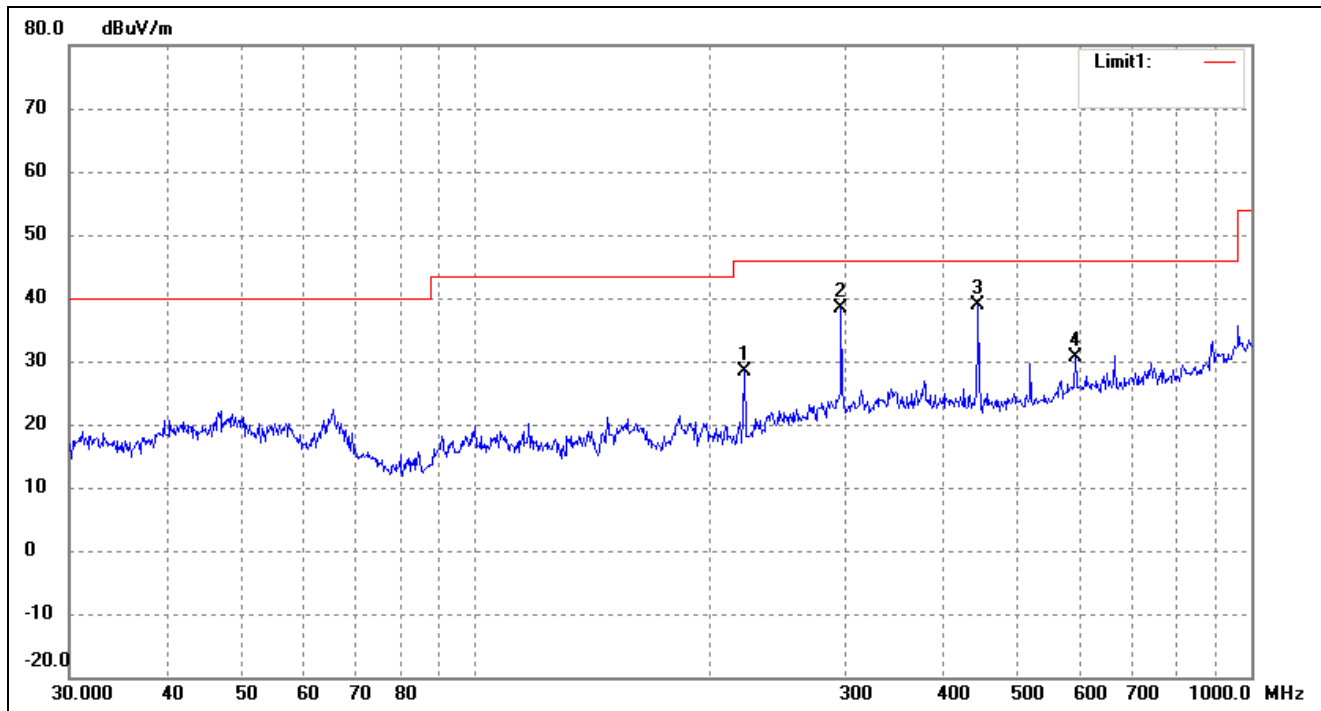
802.11n-HT40

Test Channel

5190MHz(worst case)

Polarity:

Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	222.1698	40.88	-12.43	28.45	46.00	-17.55	117	100	peak
2	296.1836	47.86	-9.42	38.44	46.00	-7.56	229	100	peak
3	444.8514	45.81	-6.96	38.85	46.00	-7.15	67	100	peak
4	593.0497	34.56	-4.00	30.56	46.00	-15.44	257	100	peak

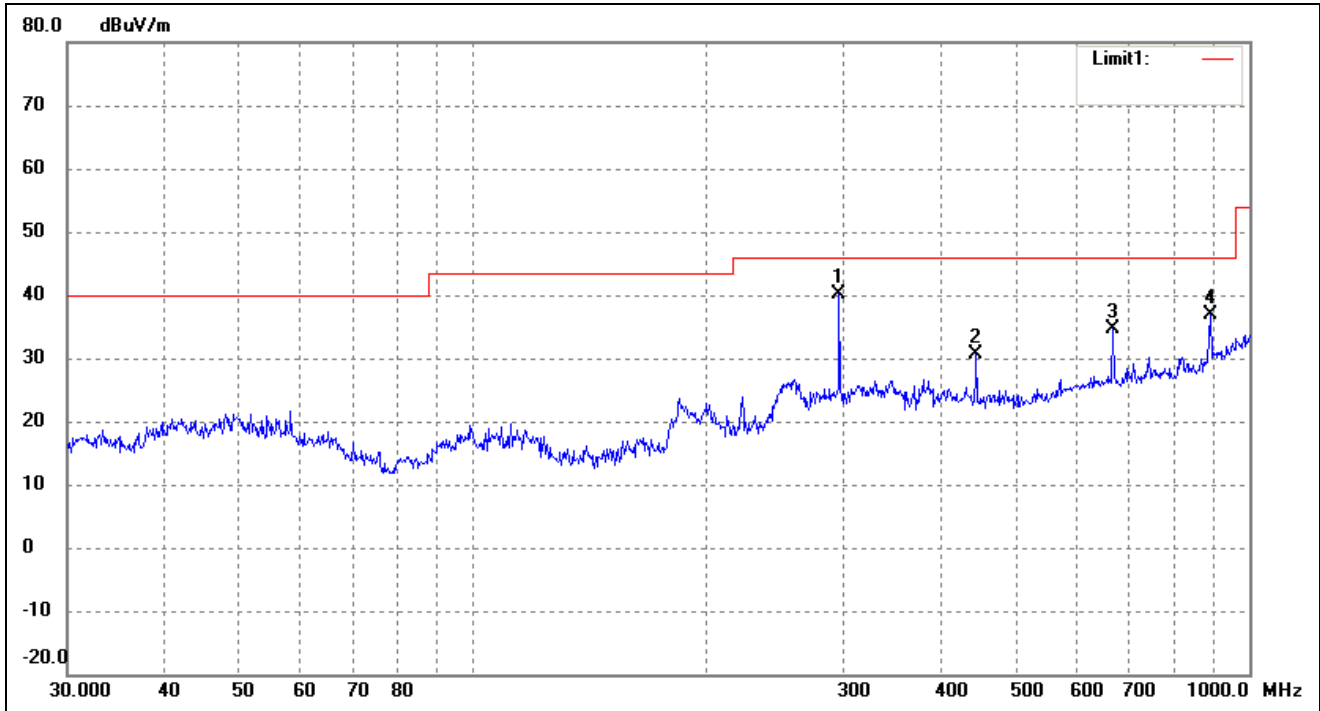
802.11ac-HT80

Test Channel

5210MHz(worst case)

Polarity:

Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	296.1836	49.51	-9.42	40.09	46.00	-5.91	169	100	peak
2	444.8514	37.57	-6.96	30.61	46.00	-15.39	109	100	peak
3	665.8035	37.90	-3.18	34.72	46.00	-11.28	73	100	peak
4	890.7278	35.93	1.00	36.93	46.00	-9.07	335	100	peak

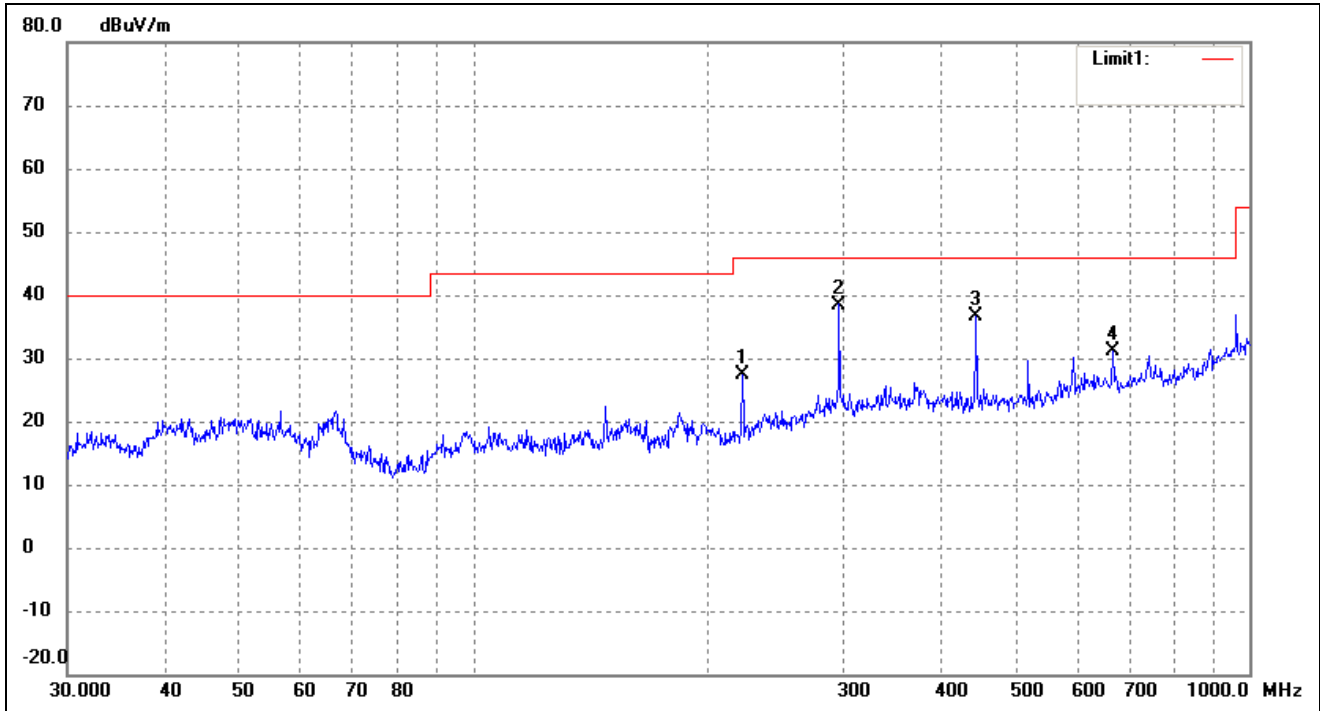
802.11ac-HT80

Test Channel

5210MHz(worst case)

Polarity:

Vertical



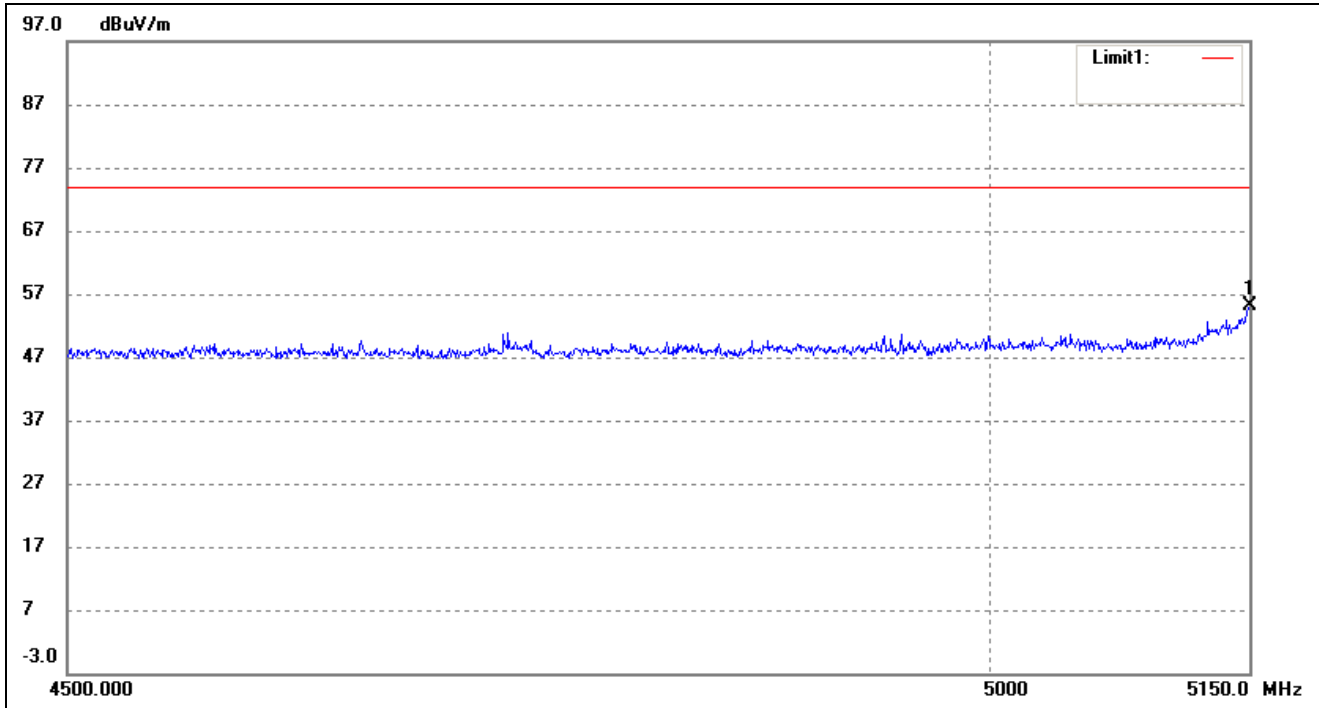
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	222.1698	39.81	-12.43	27.38	46.00	-18.62	237	100	peak
2	296.1836	47.92	-9.42	38.50	46.00	-7.50	113	100	peak
3	444.8514	43.57	-6.96	36.61	46.00	-9.39	57	100	peak
4	668.1423	34.22	-3.15	31.07	46.00	-14.93	99	100	peak

➤ Spurious Emission above 1GHz

Antenna 1:

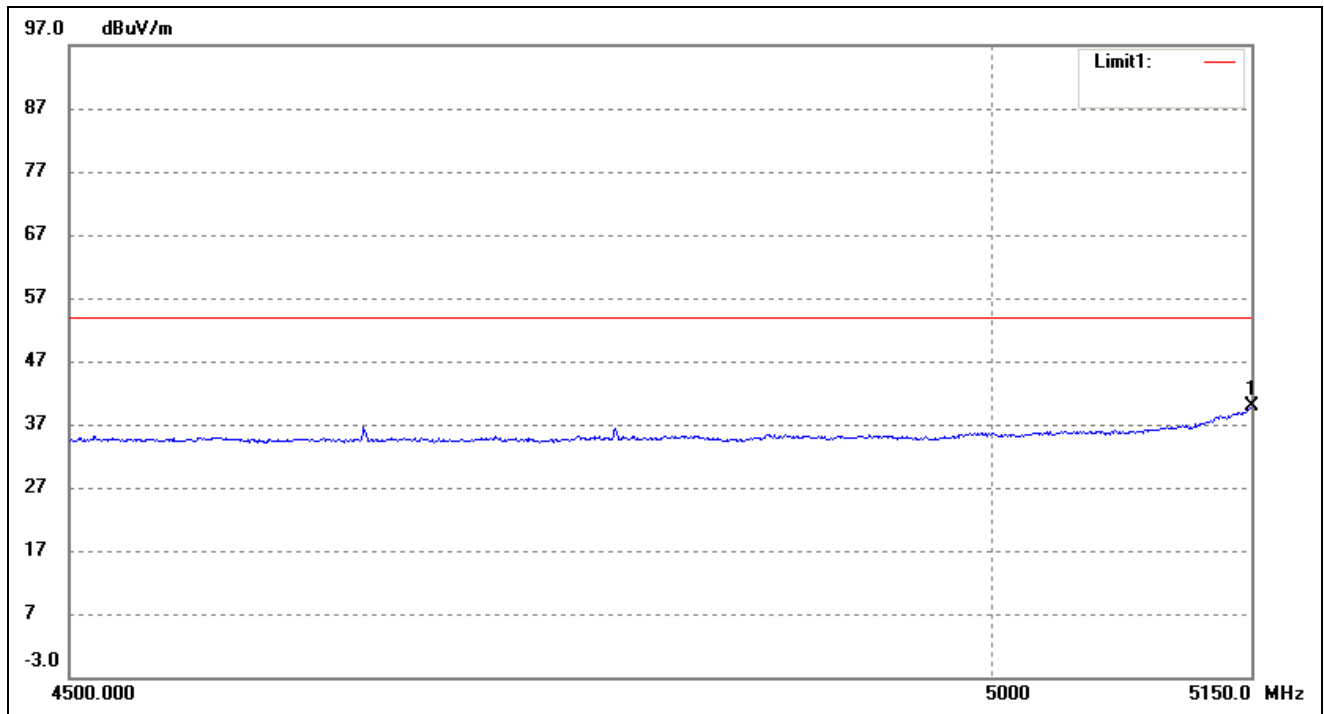
802.11a- Restricted Bandedge

Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)
--------------	-------------------	-----------	----------------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	58.20	-2.99	55.21	74.00	-18.79	186	100	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

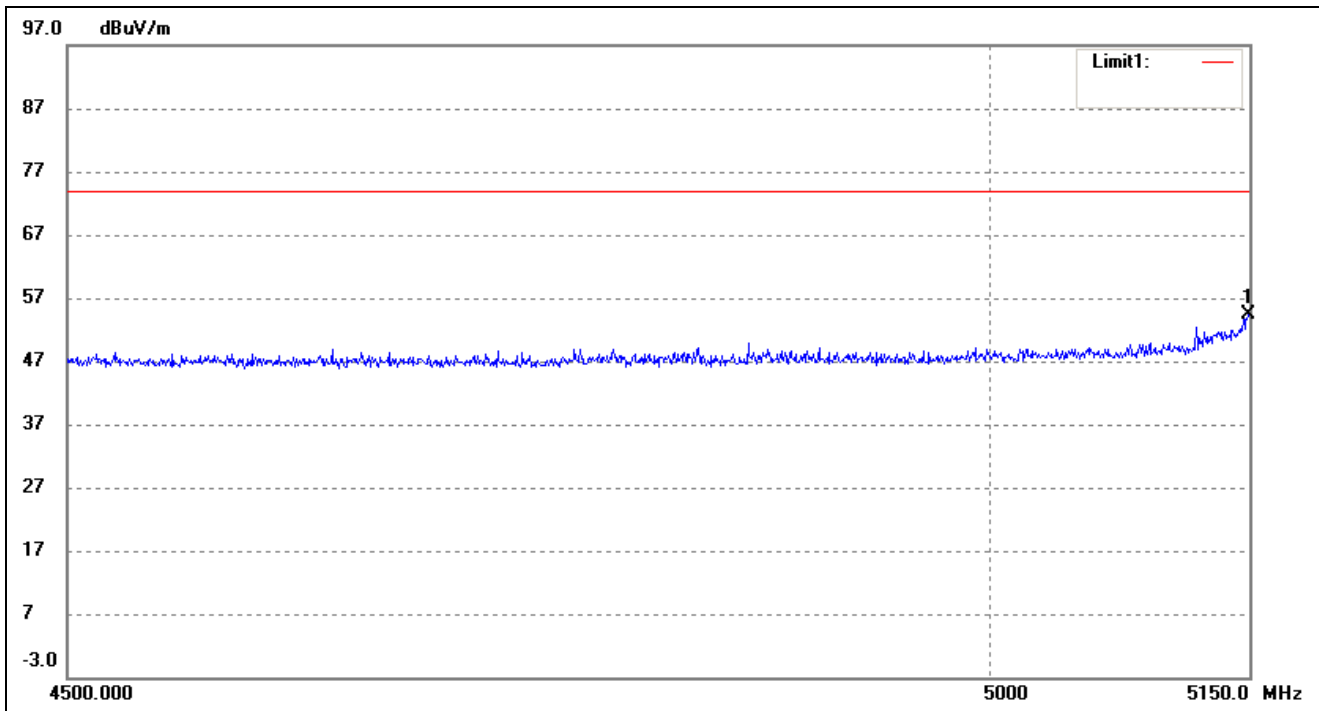


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	42.76	-2.99	39.77	54.00	-14.23	288	100	AVG

Antenna 2:

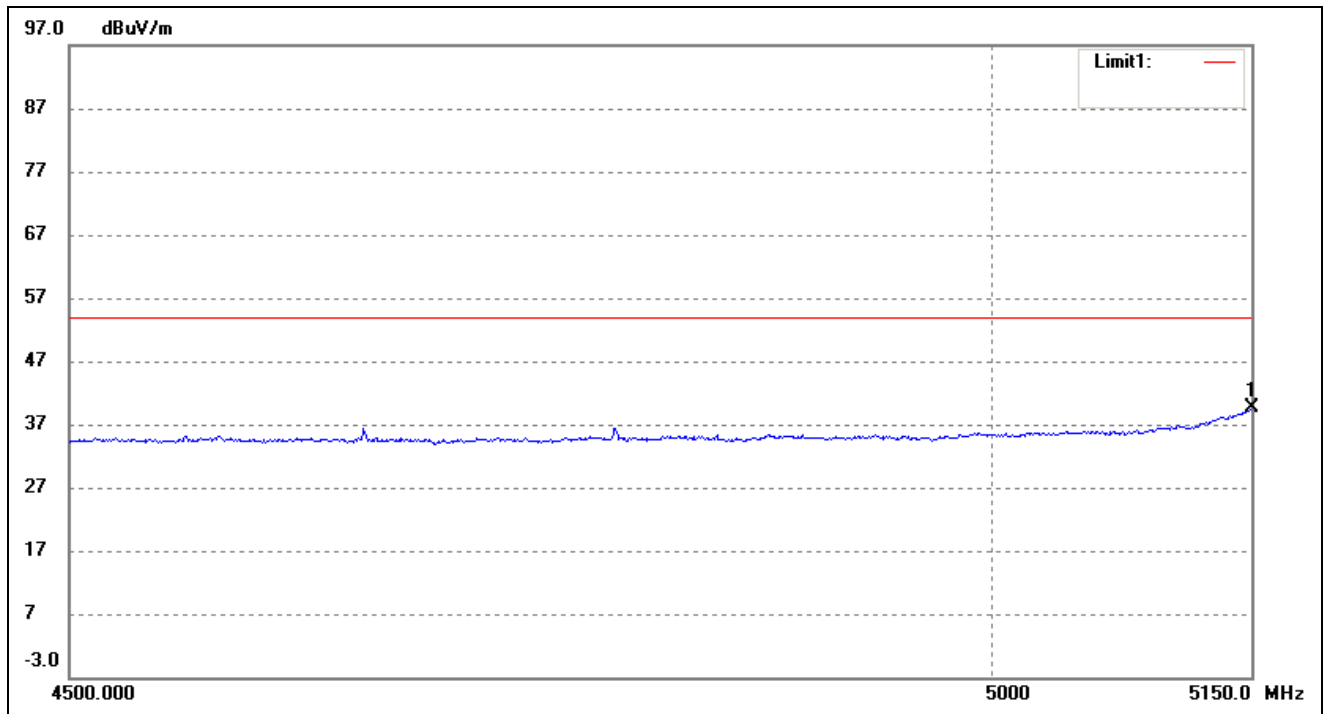
802.11a- Restricted Bandedge

Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)
--------------	-------------------	-----------	----------------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5149.305	57.37	-2.99	54.38	74.00	-19.62	104	100	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

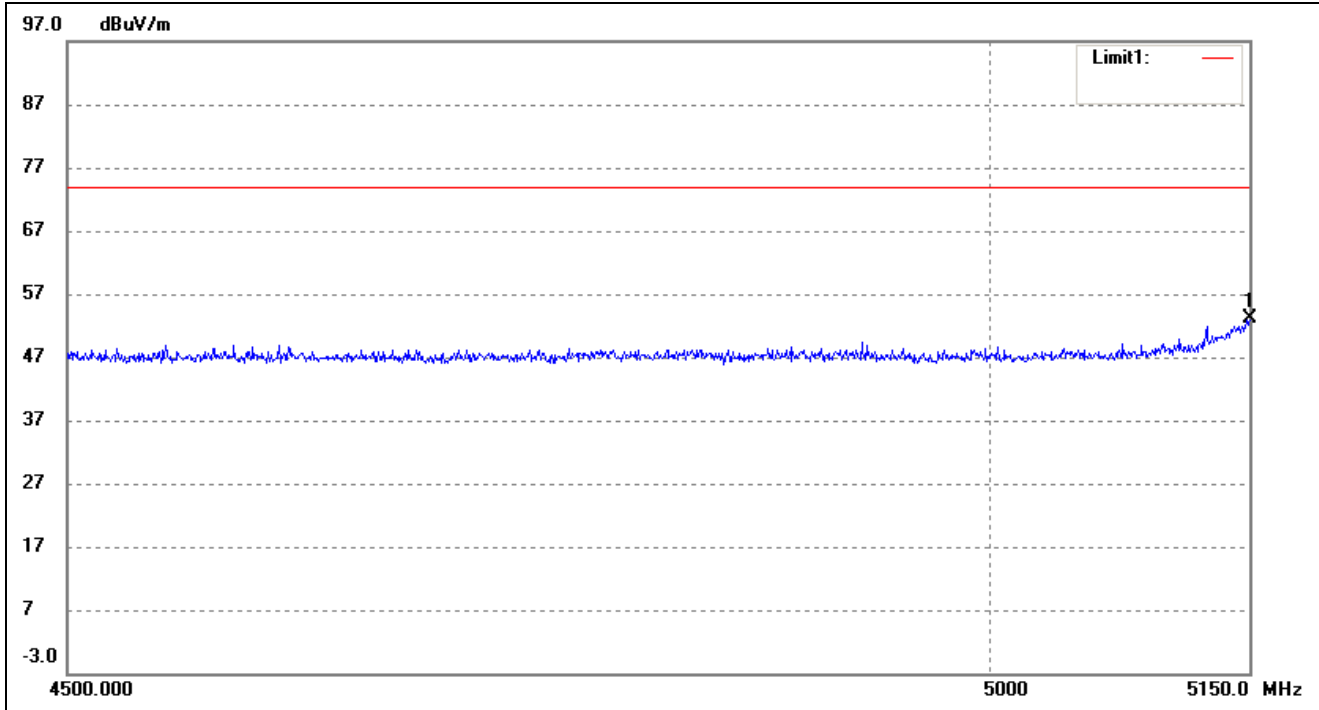


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	42.54	-2.99	39.55	54.00	-14.45	51	100	AVG

Antenna 1 and Antenna 2:

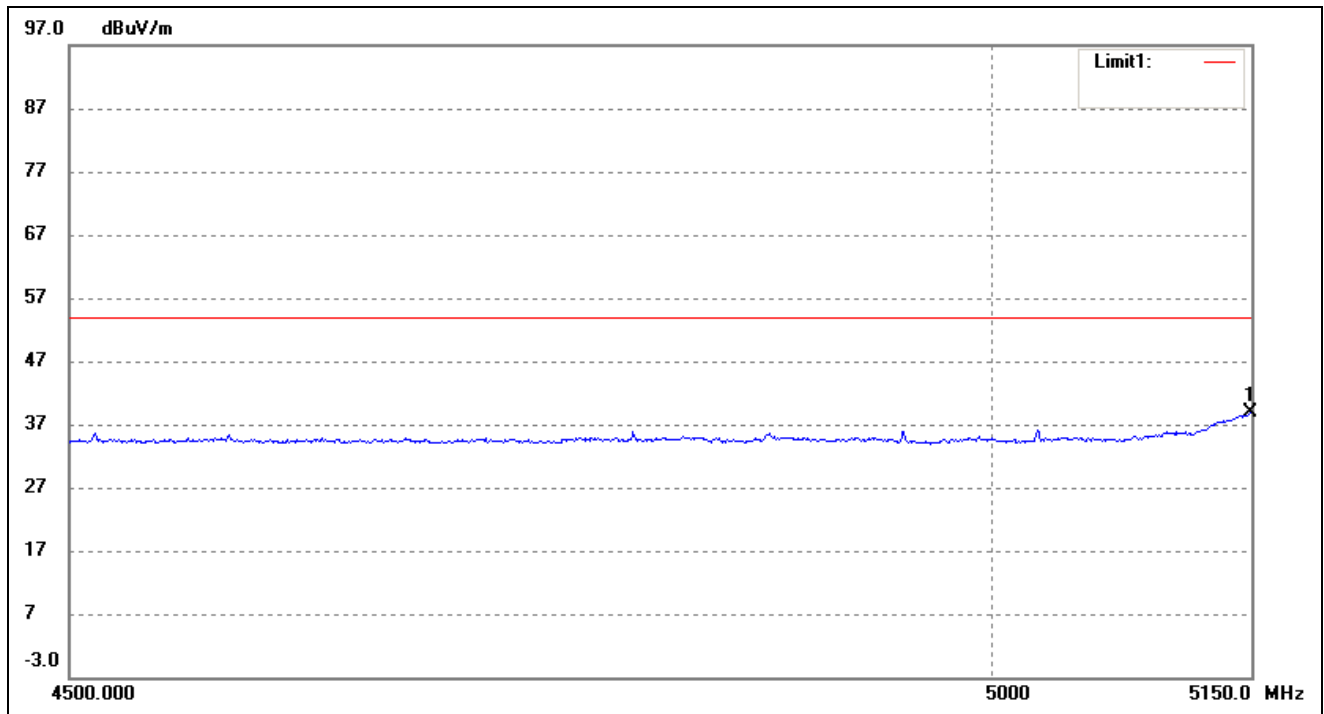
802.11n-HT20- Restricted Bandedge

Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)
--------------	-------------------	-----------	----------------------



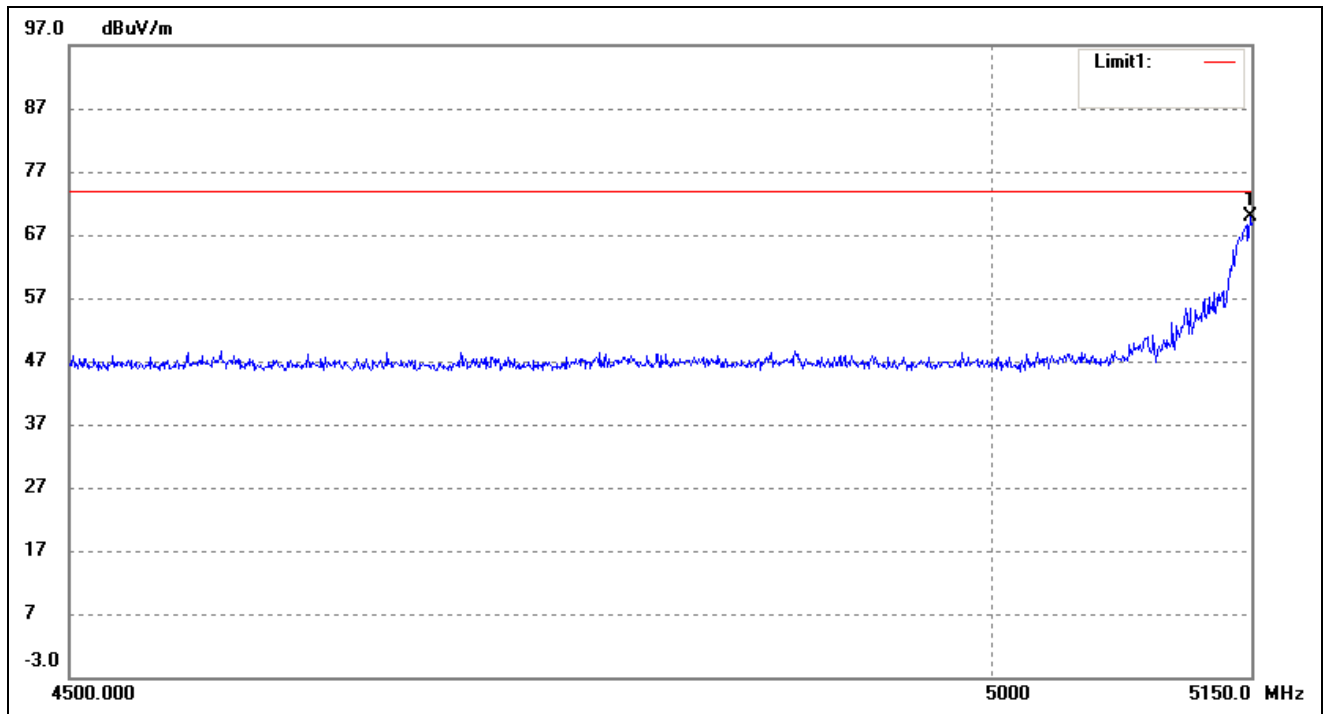
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	56.16	-2.99	53.17	74.00	-20.83	313	100	peak

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5148.050	37.69	-0.13	37.56	54.00	-16.44	148	100	AVG

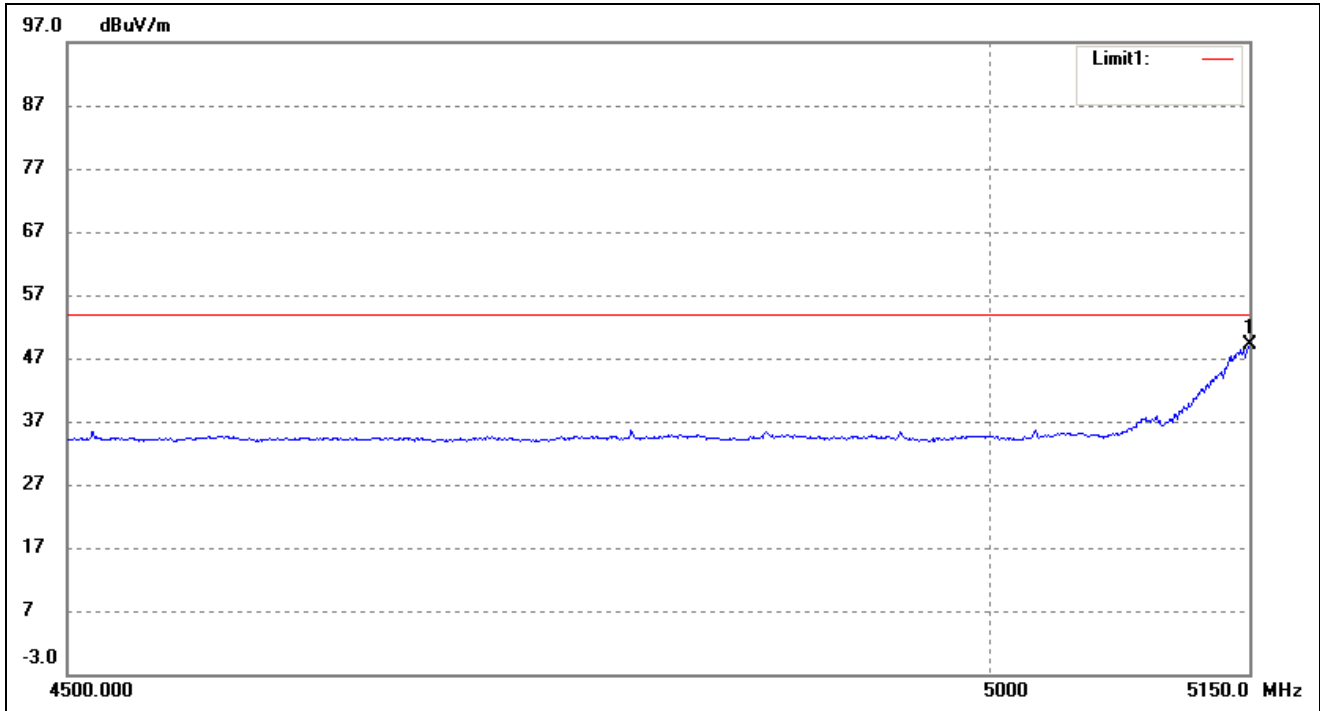
802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5149.305	72.88	-2.99	69.89	74.00	-4.11	94	100	peak

802.11n-HT40- Restricted Bandedge

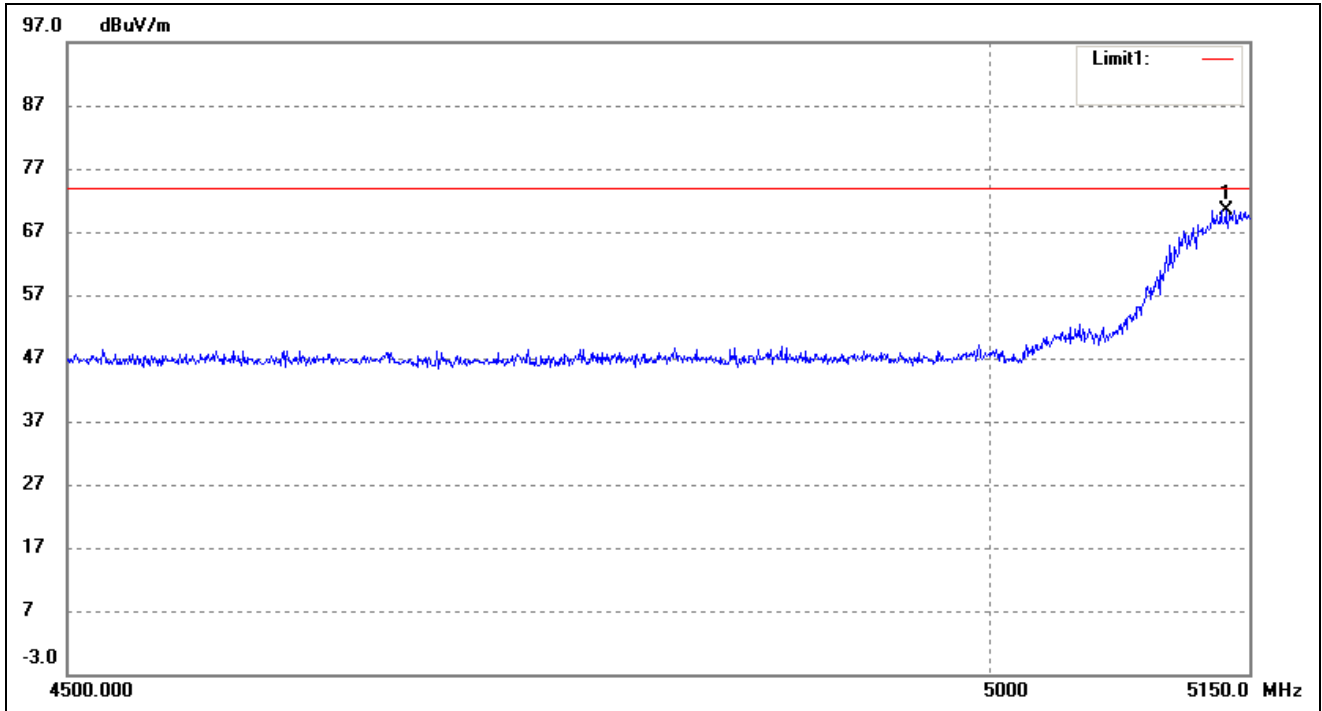
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)
--------------	-------------------	-----------	----------------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	52.17	-2.99	49.18	54.00	-4.82	131	100	AVG

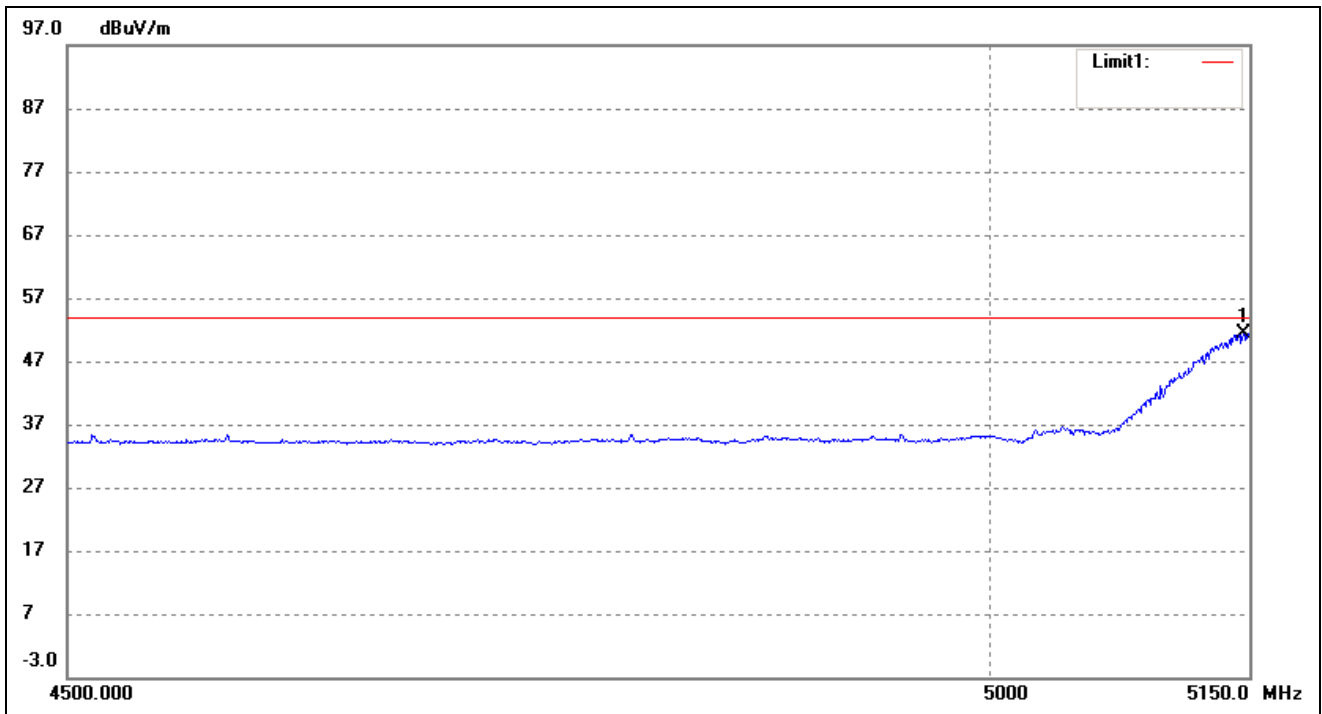
802.11ac-HT80- Restricted Bandedge

Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)
--------------	-------------------	-----------	----------------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5136.122	73.47	-3.03	70.44	74.00	-3.56	74	100	peak

802.11ac-HT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5146.527	54.35	-3.00	51.35	54.00	-2.65	121	100	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)

Antenna 1:

- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	55.01	7.11	62.12	74	-11.88	H	PK
10360	38.10	7.11	45.21	54	-8.79	H	AV
10360	53.66	7.11	60.77	74	-13.23	H	PK
10360	37.46	7.11	44.57	54	-9.43	H	AV
High Channel (5240MHz)							
10480	53.09	7.1	60.19	74	-13.81	H	PK
10480	40.47	7.1	47.57	54	-6.43	H	AV
10480	56.66	7.1	63.76	74	-10.24	H	PK
10480	38.80	7.1	45.9	54	-8.10	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	53.9	9.02	62.92	74	-11.08	H	PK
11490	38.3	9.02	47.32	54	-6.68	H	AV
11490	51.48	9.02	60.5	74	-13.5	H	PK
11490	35.24	9.02	44.26	54	-9.74	H	AV
High Channel (5825MHz)							
11610	54.59	8.94	63.53	74	-10.47	H	PK
11610	36.84	8.94	45.78	54	-8.22	H	AV
11610	54.20	8.94	63.14	74	-10.86	H	PK
11610	36.88	8.94	45.82	54	-8.18	H	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.98	-27
Highest	Above 5350	-41.02	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-36.52	-27
	5715 to 5725	-29.62	-17
Highest	5850 to 5860	-31.02	-17
	Above 5860	-41.55	-27

Note: the data just list the worst cases

Antenna 2:

➤ Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	55.43	7.11	62.54	74	-11.46	H	PK
10360	38.65	7.11	45.76	54	-8.24	H	AV
10360	56.57	7.11	63.68	74	-10.32	H	PK
10360	39.43	7.11	46.54	54	-7.46	H	AV
High Channel (5240MHz)							
10480	54.35	7.1	61.45	74	-12.55	H	PK
10480	39.78	7.1	46.88	54	-7.12	H	AV
10480	54.98	7.1	62.08	74	-11.92	H	PK
10480	38.85	7.1	45.95	54	-8.05	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	53.14	9.02	62.16	74	-11.84	H	PK
11490	38.25	9.02	47.27	54	-6.73	H	AV
11490	54.59	9.02	63.61	74	-10.39	H	PK
11490	38.78	9.02	47.8	54	-6.2	H	AV
High Channel (5825MHz)							
11610	51.27	8.94	60.21	74	-13.79	H	PK
11610	36.72	8.94	45.66	54	-8.34	H	AV
11610	53.42	8.94	62.36	74	-11.64	H	PK
11610	38.11	8.94	47.05	54	-6.95	H	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.11	-27
Highest	Above 5350	-39.65	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-39.41	-27
	5715 to 5725	-27.14	-17
Highest	5850 to 5860	-30.32	-17
	Above 5860	-40.32	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT20)

Antenna 2 (worst cases):

- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	53.70	7.11	60.81	74	-13.19	H	PK
10360	36.96	7.11	44.07	54	-9.93	H	AV
10360	53.36	7.11	60.47	74	-13.53	H	PK
10360	38.09	7.11	45.20	54	-8.80	H	AV
High Channel (5240MHz)							
10480	55.89	7.1	62.99	74	-11.01	H	PK
10480	38.40	7.1	45.5	54	-8.50	H	AV
10480	53.41	7.1	60.51	74	-13.49	H	PK
10480	39.78	7.1	46.88	54	-7.12	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	52.88	9.02	61.9	74	-12.1	H	PK
11490	35.96	9.02	44.98	54	-9.02	H	AV
11490	53.39	9.02	62.41	74	-11.59	H	PK
11490	34.99	9.02	44.01	54	-9.99	H	AV
High Channel (5825MHz)							
11610	54.20	8.94	63.14	74	-10.86	H	PK
11610	36.94	8.94	45.88	54	-8.12	H	AV
11610	54.99	8.94	63.93	74	-10.07	H	PK
11610	37.27	8.94	46.21	54	-7.79	H	AV

- Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-41.15	-27
Highest	Above 5350	-38.41	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-39.62	-27
	5715 to 5725	-27.12	-17
Highest	5850 to 5860	-31.65	-17
	Above 5860	-39.41	-27
Note: the data just list the worst cases			

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT40)

Antenna 2 (worst cases):

- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	53.02	7.11	60.13	74	-13.87	H	PK
10380	39.23	7.11	46.34	54	-7.66	H	AV
10380	56.30	7.11	63.41	74	-10.59	H	PK
10380	39.82	7.11	46.93	54	-7.07	H	AV
High Channel (5230MHz)							
10460	53.10	7.1	60.2	74	-13.8	H	PK
10460	39.63	7.1	46.73	54	-7.27	H	AV
10460	53.44	7.1	60.54	74	-13.46	H	PK
10460	39.52	7.1	46.62	54	-7.38	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	53.83	9.04	62.87	74	-11.13	H	PK
11510	38.17	9.04	47.21	54	-6.79	H	AV
11510	54.06	9.04	63.1	74	-10.9	H	PK
11510	36.92	9.04	45.96	54	-8.04	H	AV
High Channel (5795MHz)							
11590	51.60	8.96	60.56	74	-13.44	H	PK
11590	37.65	8.96	46.61	54	-7.39	H	AV
11590	51.90	8.96	60.86	74	-13.14	H	PK
11590	37.62	8.96	46.58	54	-7.42	H	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-41.32	-27
Highest	Above 5350	-40.10	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-39.78	-27
	5715 to 5725	-28.01	-17
Highest	5850 to 5860	-27.36	-17
	Above 5860	-40.31	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VH80)

Antenna 2 (worst cases):

- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	55.17	7.11	62.28	74	-11.72	H	PK
10420	39.80	7.11	46.91	54	-7.09	H	AV
10420	53.88	7.11	60.99	74	-13.01	H	PK
10420	40.61	7.11	47.72	54	-6.28	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	54.49	9.00	63.49	74	-10.51	H	PK
11550	36.31	9.00	45.31	54	-8.69	H	AV
11550	51.27	9.00	60.27	74	-13.73	H	PK
11550	36.92	9.00	45.92	54	-8.08	H	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-42.65	-27
Highest	Above 5350	-41.01	-27
Note: the data just list the worst cases			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-40.71	-27
	5715 to 5725	-38.65	-17
Highest	5850 to 5860	-34.14	-17
	Above 5860	-39.11	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

10. Frequency Stability

10.1 Standard Applicable

According to §15.407(g), Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

10.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

10.3 Summary of Test Results/Plots

U-NII-1:5150-5250MHz worst case at 802.11a middle channel (Antenna 1)				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	19	-30	169	0.0325
100%		-20	176	0.0338
100%		-10	149	0.0287
100%		0	110	0.0212
100%		+10	127	0.0244
100%		+20	109	0.0210
100%		+30	103	0.0198
100%		+40	150	0.0288
100%		+50	151	0.0290
Low Battery power	17	+20	169	0.0325
High Battery power	22	+20	176	0.0338

U-NII-1:5725-5850MHz worst case at 802.11a middle channel (Antenna 1)				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	19	-30	133	0.0230
100%		-20	133	0.0230
100%		-10	167	0.0289
100%		0	114	0.0197
100%		+10	166	0.0287
100%		+20	151	0.0261
100%		+30	117	0.0202
100%		+40	168	0.0290
100%		+50	103	0.0178
Low Battery power	17	+20	133	0.0230
High Battery power	22	+20	133	0.0230

U-NII-1:5150-5250MHz worst case at 802.11a middle channel (Antenna 2)				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	19	-30	127	0.0244
100%		-20	140	0.0269
100%		-10	109	0.0210
100%		0	176	0.0338
100%		+10	165	0.0317
100%		+20	161	0.0310
100%		+30	116	0.0223
100%		+40	179	0.0344
100%		+50	129	0.0248
Low Battery power	17	+20	127	0.0244
High Battery power	22	+20	140	0.0269

U-NII-1:5725-5850MHz worst case at 802.11a middle channel (Antenna 2)				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	19	-30	157	0.0271
100%		-20	104	0.0180
100%		-10	171	0.0296
100%		0	148	0.0256
100%		+10	166	0.0287
100%		+20	163	0.0282
100%		+30	127	0.0220
100%		+40	121	0.0209
100%		+50	120	0.0207
Low Battery power	17	+20	157	0.0271
High Battery power	22	+20	104	0.0180

***** END OF REPORT *****