



**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15.247

**Report Reference No.**.....: **GTSR19010009-05**

**FCC ID**.....: **2ASJA-B8821CU1**

Compiled by

( position+printed name+signature)..: File administrators Jimmy Wang



Supervised by

( position+printed name+signature)..: Test Engineer Aaron Tan



Approved by

( position+printed name+signature)..: Manager Jason Hu



Date of issue.....: Feb.25, 2019

**Representative Laboratory Name .:** **Shenzhen Global Test Service Co.,Ltd.**

Address.....: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

**Applicant's name**.....: **REV Robotics LLC**

Address .....: 1621 W Crosby Road Suite 104 Carrollton TX,75006

**Test specification** .....

Standard .....: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator.....: Shenzhen Global Test Service Co.,Ltd.

Master TRF.....: Dated 2014-12

**Shenzhen Global Test Service Co.,Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** .....

Trade Mark .....: /

Manufacturer .....: Shenzhen Bilian Electronic Co.,Ltd

Model/Type reference.....: BL-M8821CU1

Listed Models .....: /

Modulation Type .....: GFSK,II/4DQPSK,8DPSK

Operation Frequency.....: From 2402MHz to 2480MHz

Hardware Version .....: V1.1

Software Version .....: V30\_20121220

Rating .....: DC 3.3V

Result.....: **PASS**

**TEST REPORT**

<b>Test Report No. :</b>	<b>GTSR19010009-05</b>	Feb. 25, 2019
		Date of issue

Equipment under Test : **IEEE 802.11a/b/g/n/ac(1T1R) USB WLAN And BT Module**

Model /Type : BL-M8821CU1

Listed Models : /

**Applicant** : REV Robotics LLC

Address : 1621 W Crosby Road Suite 104 Carrollton TX, 75006

**Manufacturer** : Shenzhen Bilian Electronic Co.,Ltd

Address : No.3 Building 401, 107 FuQian Rd, JuTang Community  
Fucheng Street, Longhua District, shenzhen, P.R.China

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b>1.</b>	<b><u>TEST STANDARDS .....</u></b>	<b><u>4</u></b>
<b>2.</b>	<b><u>SUMMARY .....</u></b>	<b><u>5</u></b>
2.1.	General Remarks	5
2.2.	Product Description	5
2.3.	Equipment Under Test	5
2.4.	Short description of the Equipment under Test (EUT)	6
2.5.	EUT operation mode	6
2.6.	Block Diagram of Test Setup	7
2.7.	Related Submittal(s) / Grant (s)	7
2.8.	Special Accessories	7
2.9.	Modifications	7
<b>3.</b>	<b><u>TEST ENVIRONMENT .....</u></b>	<b><u>8</u></b>
3.1.	Address of the test laboratory	8
3.2.	Test Facility	8
3.3.	Environmental conditions	8
3.4.	Summary of measurement results	9
3.5.	Statement of the measurement uncertainty	10
3.6.	Equipments Used during the Test	11
<b>4.</b>	<b><u>TEST CONDITIONS AND RESULTS.....</u></b>	<b><u>12</u></b>
4.1.	AC Power Conducted Emission .....	12
4.2.	Radiated Emission.....	15
4.3.	Maximum Peak Output Power.....	20
4.4.	20dB Bandwidth .....	21
4.5.	Frequency Separation .....	27
4.6.	Band Edge Compliance of RF Emission .....	33
4.7.	Spurious RF Conducted Emission .....	43
4.8.	Number of hopping frequency .....	47
4.9.	Time Of Occupancy(Dwell Time) .....	48
4.10.	Pseudorandom Frequency Hopping Sequence .....	55
4.11.	Antenna Requirement.....	56
<b>5.</b>	<b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>	<b><u>57</u></b>
<b>6.</b>	<b><u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</u></b>	<b><u>59</u></b>

## **1. TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[DA 00-705](#): Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

## 2. SUMMARY

### 2.1. General Remarks

Date of receipt of test sample	:	Feb. 12, 2019
Testing commenced on	:	Feb. 12, 2019
Testing concluded on	:	Feb. 25, 2019

### 2.2. Product Description

Product Name:	<b>IEEE 802.11a/b/g/n/ac(1T1R) USB WLAN And BT Module</b>
Trade Mark:	/
Model/Type reference:	BL-M8821CU1
Antenna Type	Connect to external antenna
Power supply:	DC 3.3V
Notebook:	Manufacturer: TOSHIBA Model: Satellite S40Dt-A
<b>WIFI</b>	
WLAN	Supported 802.11 a/b/g/n/ac
Modulation Type	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ac: OFDM(64QAM, 16QAM, QPSK, BPSK)
Operation frequency	IEEE 802.11a:5180-5240MHz IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz, 5180-5240MHz IEEE 802.11ac VHT20: 5180-5240MHz IEEE 802.11n HT40:2422-2452MHz, 5190-5230MHz IEEE 802.11ac VHT40: 5190-5230MHz IEEE 802.11ac VHT80: 5210-5210MHz
Antenna gain	1.62 dBi Max for 2.4G band; 1.62 dBi Max for 5.2G band
<b>BT</b>	
Modulation Type	GFSK,8DPSK, $\pi$ /4DQPSK
Operation frequency	2402-2480MHz
Antenna gain	1.62 dBi Max

### 2.3. Equipment Under Test

#### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 230V / 50 Hz	<input type="radio"/> 120V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 3.3V

## 2.4. Short description of the Equipment under Test (EUT)

This is a Bluetooth speaker

For more details, refer to the user's manual of the EUT.

## 2.5. EUT operation mode

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT. Channel 00/38/78 was selected to test.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>00</b>	<b>2402</b>	40	2442
01	2403	41	2443
02	2404	42	2444
03	2405	43	2445
04	2406	44	2446
05	2407	45	2447
06	2408	46	2448
07	2409	47	2449
08	2410	48	2450
09	2411	49	2451
10	2412	50	2452
11	2413	51	2453
12	2414	52	2454
13	2415	53	2455
14	2416	54	2456
15	2417	55	2457
16	2418	56	2458
17	2419	57	2459
18	2420	58	2460
19	2421	59	2461
20	2422	60	2462
21	2423	61	2463
22	2424	62	2464
23	2425	63	2465
24	2426	64	2466
25	2427	65	2467
26	2428	66	2468
27	2429	67	2469
28	2430	68	2470
29	2431	69	2471
30	2432	70	2472
31	2433	71	2473
32	2434	72	2474
33	2435	73	2475
34	2436	74	2476
35	2437	75	2477
36	2438	76	2478
37	2439	77	2479
<b>38</b>	<b>2440</b>	<b>78</b>	<b>2480</b>
39	<b>2441</b>		

**2.6. Block Diagram of Test Setup**



**2.7. Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for **FCC ID: 2ASJA-M8821CU1** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

**2.8. Special Accessories**

Manufacturer	Description	Model	Serial Number	Certificate
TOSHIBA	Tablet PC	Satellite S40Dt-A	D26T	DOC

**2.9. Modifications**

No modifications were implemented to meet testing criteria.

### **3. TEST ENVIRONMENT**

#### **3.1. Address of the test laboratory**

**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

#### **3.2. Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

##### **FCC-Registration No.: 165275**

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

##### **CNAS-Lab Code: L8169**

Shenzhen Global Test Service Co.,Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

##### **A2LA-Lab Cert. No.: 4758.01**

Shenzhen Global Test Service Co.,Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### **3.3. Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar



## 3.4. Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Pass	Fail	NA	NP	Remark
§15.247(b)(4)	Antenna gain	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(e)	Power spectral density	-/-	-/-	-/-	-/-	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Not applicable for FHSS
§15.247(a)(1)	Carrier Frequency separation	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Middle	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1)	Number of Hopping channels	GFSK 8DPSK	<input checked="" type="checkbox"/> Full	GFSK 8DPSK	<input checked="" type="checkbox"/> Full	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1)	Time of Occupancy (dwell time)	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Middle	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1)	Spectrum bandwidth of a FHSS system 20dB bandwidth	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(b)(1)	Maximum output power	GFSK $\pi/4$ DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK $\pi/4$ DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d)	Band edge compliance conducted	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.205	Band edge compliance radiated	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d)	TX spurious emissions conducted	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d)	TX spurious emissions radiated	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109	RX spurious emissions radiated	-/-	-/-	-/-	-/-	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a)	TX spurious Emissions radiated < 30 MHz	GFSK	-/-	GFSK	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.107(a) §15.207	Conducted Emissions < 30 MHz	GFSK	-/-	GFSK	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

## Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed
3. We tested all test mode and recorded worst case in report
4. For  $\pi/4$  QPSK its same modulation type with 8-DPSK, and based exploratory test, there is no significant difference of that two types test result, so except output power, all other items final test were only performed with the worse case 8-DPSK and GFSK.

### 3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

**3.6. Equipments Used during the Test**


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2018/09/20	2019/09/19
LISN	R&S	ESH2-Z5	893606/008	2018/09/20	2019/09/19
Bilog Antenna	Schwarzbeck	VULB9163	976	2016/09/20	2019/09/19
EMI Test Receiver	R&S	ESC17	101102	2018/09/20	2019/09/19
Spectrum Analyzer	Agilent	N9020A	MY48010425	2018/09/20	2019/09/19
Spectrum Analyzer	R&S	FSP40	100019	2018/06/05	2019/06/04
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2016/09/20	2019/09/19
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2016/09/20	2019/09/19
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	971	2016/09/20	2019/09/19
Amplifier	Schwarzbeck	BBV 9743	#202	2018/09/20	2019/09/19
Amplifier	EMCI	EMC051845B	980355	2018/09/20	2019/09/19
Temperature/Humidity Meter	Gangxing	CTH-608	02	2018/09/20	2019/09/19
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2018/09/20	2019/09/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2018/09/20	2019/09/19
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2018/09/20	2019/09/19
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2018/09/20	2019/09/19
Data acquisition card	Agilent	U2531A	TW53323507	2018/09/20	2019/09/19
Power Sensor	Agilent	U2021XA	MY5365004	2018/09/20	2019/09/19
EMI Test Software	R&S	ES-K1	V1.7.1	2018/09/20	2019/09/19
EMI Test Software	JS Tonscend	JS32-RE	2.0.1.5	2018/09/20	2019/09/19
EMI Test Software	Audix	E3	2..1.1	2018/09/20	2019/09/19

Note: The Cal.Interval was one year.

## 4. TEST CONDITIONS AND RESULTS

### 4.1. AC Power Conducted Emission

#### TEST CONFIGURATION

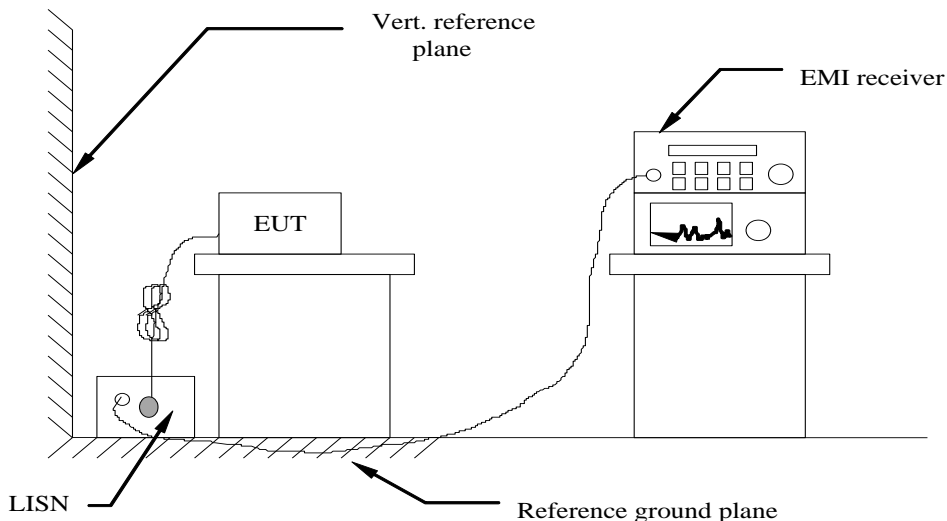

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013.
- 4 The EUT received DC 5V power, the adapter received AC120V/60Hz or AC 240V/50Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

#### TEST RESULTS


Remark: We measured Conducted Emission at GFSK,  $\pi/4$  DQPSK and 8DPSK mode in AC 120V/60Hz and AC 240V/50Hz, the worst case was recorded .

Power supply:

AC 120V/60Hz

Polarization

L

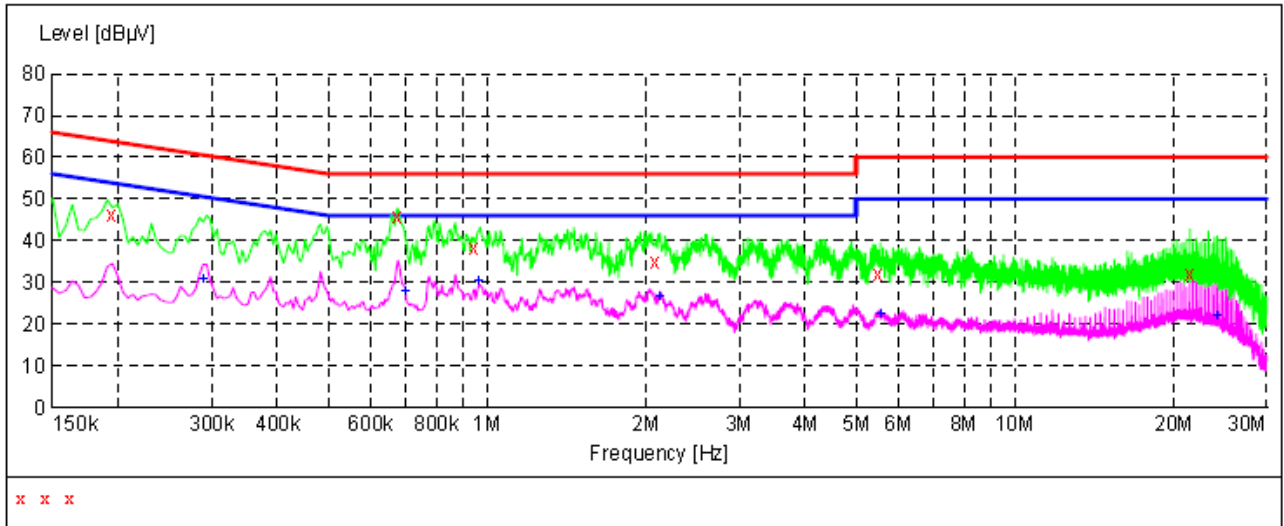

x x x

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.195000	46.30	10.0	64	17.5	QP	L1	GND
0.676500	45.70	9.7	56	10.3	QP	L1	GND
0.942000	38.10	9.6	56	17.9	QP	L1	GND
2.085000	34.90	9.5	56	21.1	QP	L1	GND
5.514000	32.10	9.2	60	27.9	QP	L1	GND
21.421500	32.20	9.0	60	27.8	QP	L1	GND


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.289500	30.60	9.9	51	19.9	AV	L1	GND
0.699000	27.90	9.7	46	18.1	AV	L1	GND
0.964500	30.30	9.6	46	15.7	AV	L1	GND
2.121000	26.40	9.5	46	19.6	AV	L1	GND
5.577000	22.30	9.2	50	27.7	AV	L1	GND
24.130500	22.10	9.0	50	27.9	AV	L1	GND

Power supply:

AC 120V/60Hz

Polarization

N

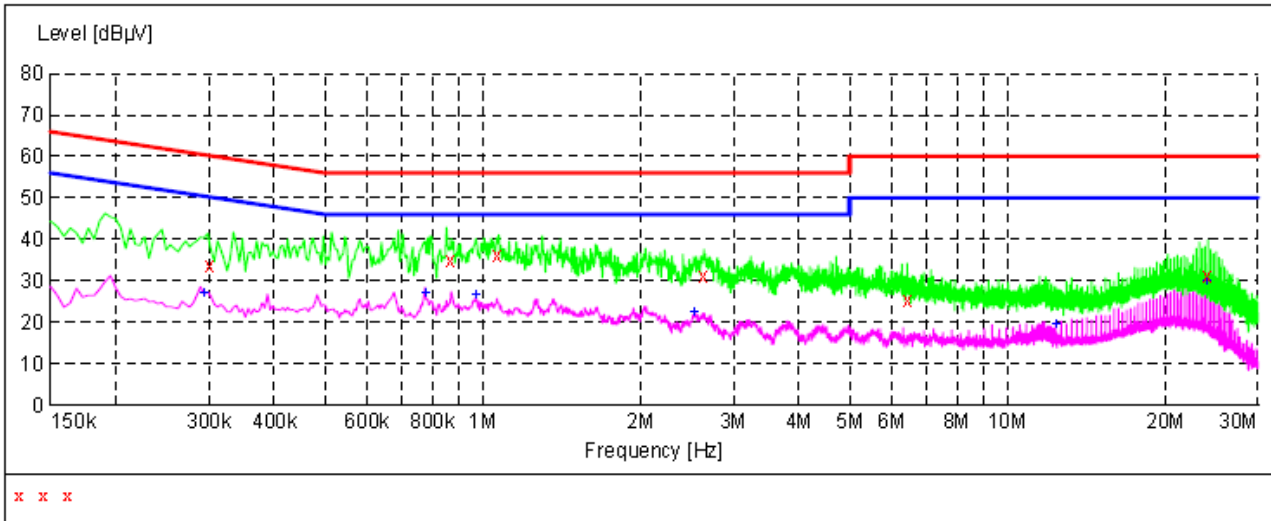


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.303000	33.80	9.9	60	26.4	QP	N	GND
0.870000	35.10	9.6	56	20.9	QP	N	GND
1.063500	36.20	9.6	56	19.8	QP	N	GND
2.643000	31.10	9.5	56	24.9	QP	N	GND
6.445500	25.20	9.2	60	34.8	QP	N	GND
24.072000	31.00	9.0	60	29.0	QP	N	GND

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.294000	26.90	9.9	50	23.5	AV	N	GND
0.775500	27.10	9.7	46	18.9	AV	N	GND
0.969000	26.60	9.6	46	19.4	AV	N	GND
2.530500	22.50	9.5	46	23.5	AV	N	GND
12.336000	19.30	8.5	50	30.7	AV	N	GND
24.063000	29.80	9.0	50	20.2	AV	N	GND


### 4.2. Radiated Emission

#### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

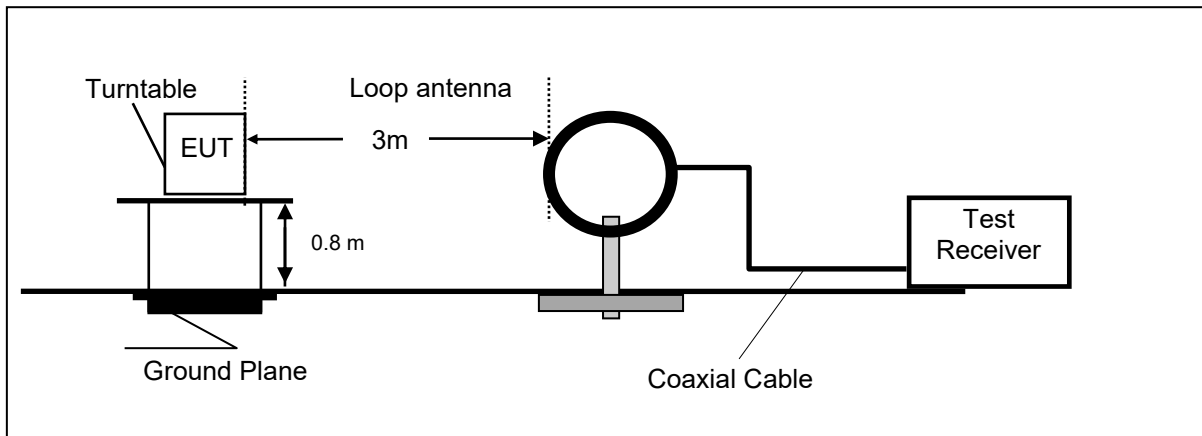

Frequency range 30MHz – 1000MHz

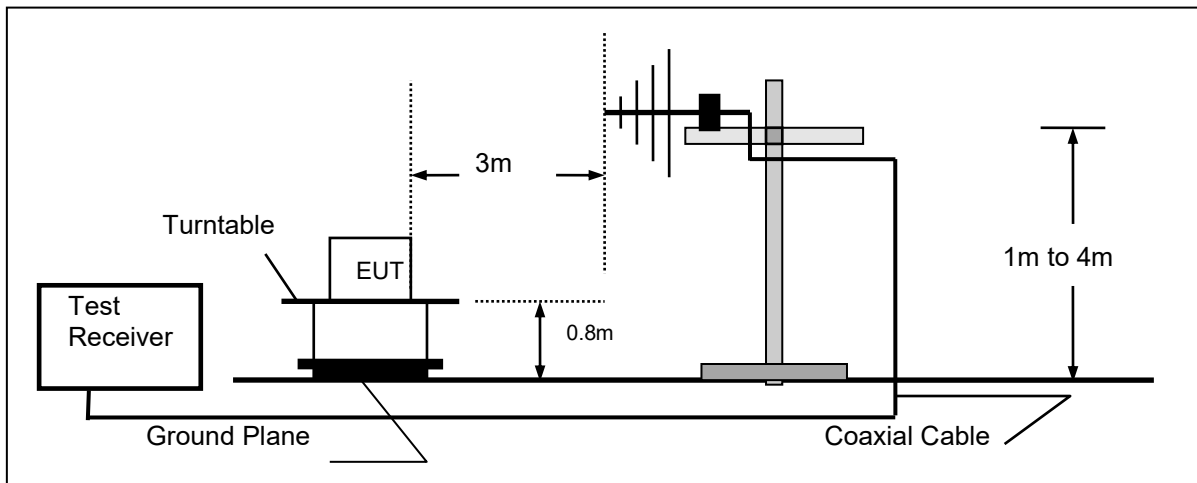

Frequency range above 1GHz-25GHz

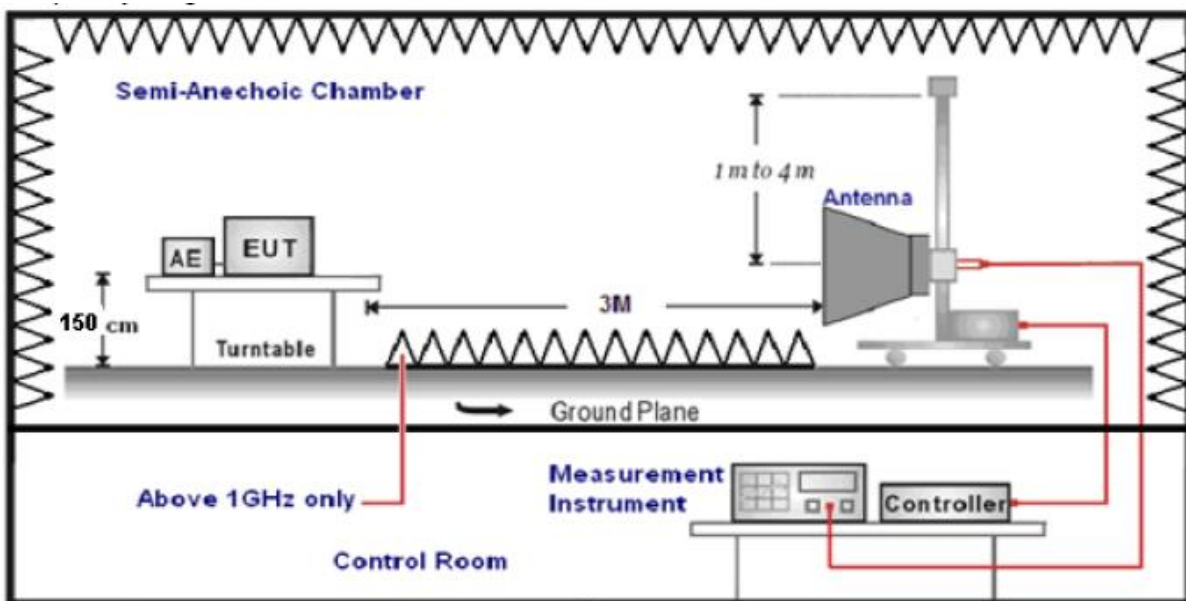

#### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 2480MHz.so radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$Transd=AF +CL-AG$$

**RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500



**TEST RESULTS**

Remark: We measured Radiated Emission at GFSK,  $\pi/4$  DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK mode.

**For 9 KHz-30MHz**

<b>Freq.</b>	<b>Reading</b>	<b>Limit</b>	<b>Margin</b>	<b>State</b>
<b>(MHz)</b>	<b>(dBuV/m)</b>	<b>(dBuV/m)</b>	<b>(dB)</b>	<b>P/F</b>
--	--	--	--	<b>P</b>
--	--	--	--	<b>P</b>

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance/test distance})(\text{dB})$ ;

Limit line = specific limits(dBuv) + distance extrapolation factor.


For 30MHz-1GHz

Horizontal

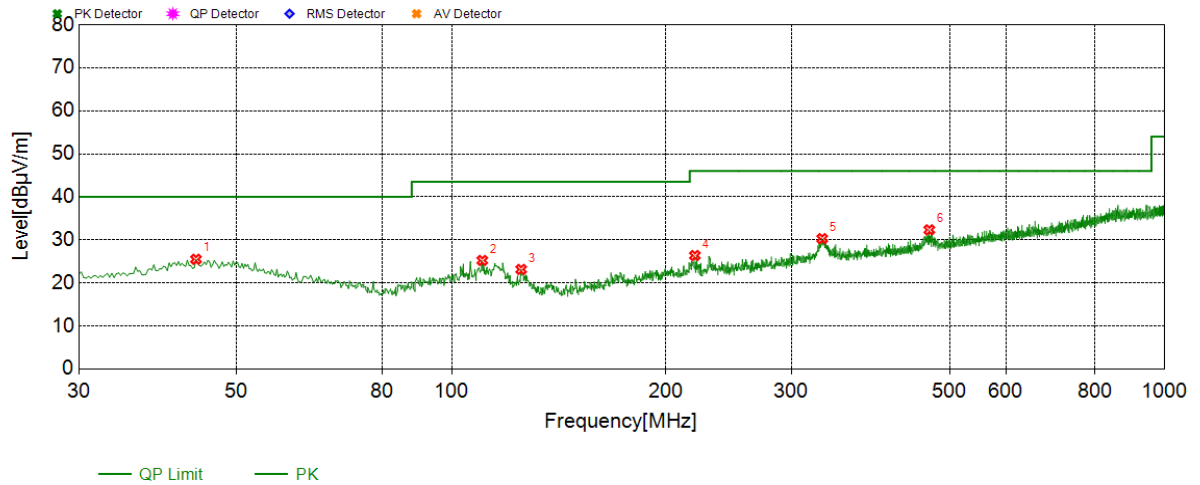

NO.	Freq. [MHz]	Reading [dBµV/m]	Result Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle[°]	Polarity
1	43.823	39.68	25.49	-14.19	40.00	14.51	100	205	Horizontal
2	110.510	42.37	25.22	-17.15	43.50	18.28	100	181	Horizontal
3	125.303	42.61	23.13	-19.48	43.50	20.37	100	160	Horizontal
4	219.635	42.21	26.36	-15.85	46.00	19.64	100	352	Horizontal
5	331.428	43.07	30.29	-12.78	46.00	15.71	100	71	Horizontal
6	468.440	42.49	32.34	-10.15	46.00	13.66	100	271	Horizontal

Vertical

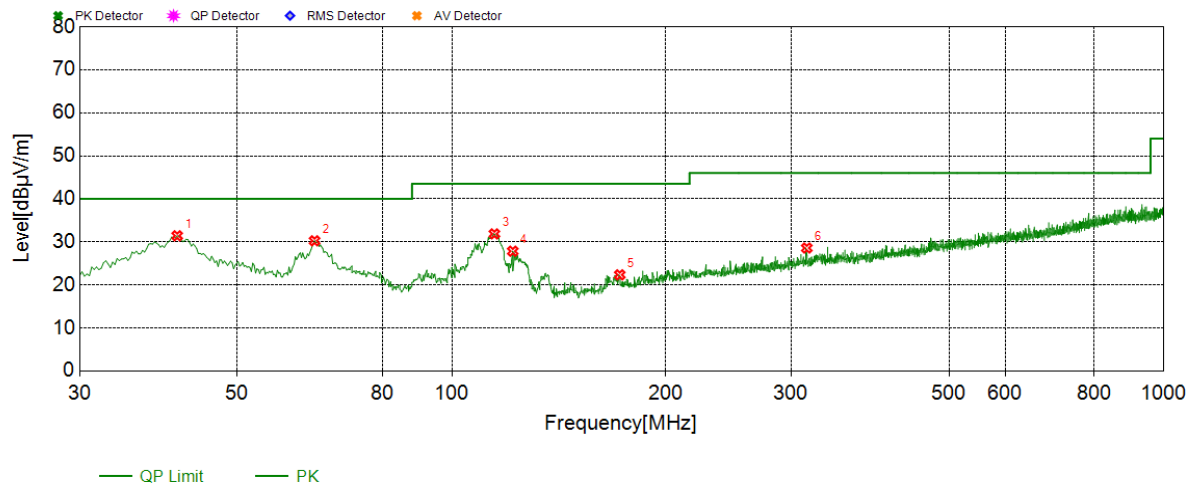

NO.	Freq. [MHz]	Reading [dBµV/m]	Result Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle[°]	Polarity
1	41.155	46.05	31.42	-14.63	40.00	8.58	100	159	Vertical
2	64.193	47.80	30.25	-17.55	40.00	9.75	100	169	Vertical
3	114.875	49.73	31.86	-17.87	43.50	11.64	100	274	Vertical
4	121.908	46.82	27.84	-18.98	43.50	15.66	100	246	Vertical
5	172.348	41.19	22.34	-18.85	43.50	21.16	100	198	Vertical
6	315.665	41.78	28.57	-13.21	46.00	17.43	100	226	Vertical

## For 1GHz to 25GHz


Frequency (MHz)	Meter Reading (dB $\mu$ V)	Antenna Factor (dB)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type	Comment
TX-2402									
4804	28.32	32.94	11.94	27.49	45.71	54	-8.29	Average	Vertical
4804	36.52	32.94	11.94	27.49	53.91	74	-20.09	peak	Vertical
7206	31.05	25.28	18.04	27.94	46.43	54	-7.57	Average	Vertical
7206	39.67	25.28	18.04	27.94	55.05	74	-18.95	peak	Vertical
4804	28.47	32.94	11.94	27.49	45.86	54	-8.14	Average	Horizontal
4804	39.87	32.94	11.94	27.49	57.26	74	-16.74	peak	Horizontal
7206	32.18	25.28	18.04	27.94	47.56	54	-6.44	Average	Horizontal
7206	42.76	25.28	18.04	27.94	58.14	74	-15.86	peak	Horizontal
TX-2441									
4882	32.06	32.11	12.15	27.53	48.79	54	-5.21	Average	Vertical
4882	38.51	32.11	12.15	27.53	55.24	74	-18.76	peak	Vertical
7323	33.36	24.33	18.09	27.96	47.82	54	-6.18	Average	Vertical
7323	38.24	24.33	18.09	27.96	52.70	74	-21.30	peak	Vertical
4882	31.49	32.11	12.15	27.53	48.22	54	-5.78	Average	Horizontal
4882	35.08	32.11	12.15	27.53	51.81	74	-22.19	peak	Horizontal
7323	30.01	24.33	18.09	27.96	44.47	54	-9.53	Average	Horizontal
7323	41.57	24.33	18.09	27.96	56.03	74	-17.97	peak	Horizontal
TX-2480									
4960	30.42	31.32	12.31	27.58	46.47	54	-7.53	Average	Vertical
4960	39.36	31.32	12.31	27.58	55.41	74	-18.59	peak	Vertical
7440	29.46	24.38	18.16	27.99	44.01	54	-9.99	Average	Vertical
7440	38.78	24.38	18.16	27.99	53.33	74	-20.67	peak	Vertical
4960	28.96	31.32	12.31	27.58	45.01	54	-8.99	Average	Horizontal
4960	39.99	31.32	12.31	27.58	56.04	74	-17.96	peak	Horizontal
7440	31.58	24.38	18.16	27.99	46.13	54	-7.87	Average	Horizontal
7440	40.74	24.38	18.16	27.99	55.29	74	-18.71	peak	Horizontal

## REMARKS:

1. Emission level (dB $\mu$ V/m) = Raw Value (dB $\mu$ V) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

### 4.3. Maximum Peak Output Power

#### TEST CONFIGURATION



#### TEST PROCEDURE

According to ANSI C63.10:2013 Maximum peak conducted output power for HFSS devices:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the HFSS bandwidth and shall utilize a fast-responding diode detector.

The maximum Average conducted output power may be measured using a wideband RF power meter with a thermocouple detector or equivalent. The power meter shall have a video bandwidth that is greater than or equal to the HFSS bandwidth and shall utilize a fast-responding diode detector.

#### LIMIT

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


#### TEST RESULTS

Type	Channel	Peak Output power (dBm)	Limit (dBm)	Result
GFSK	00	1.41	30	Pass
	39	1.27		
	78	1.85		
$\pi/4$ DQPSK	00	0.75	21	Pass
	39	0.51		
	78	0.96		
8DPSK	00	0.86	21	Pass
	39	0.62		
	78	0.07		

Note: The test results including the cable lose.

4.4. 20dB Bandwidth

**TEST CONFIGURATION**



**TEST PROCEDURE**

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30KHz and VBW=100KHz. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


**LIMIT**

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

**TEST RESULTS**

	Frequency	20dB Bandwidth (kHz)	99% Bandwidth (KHz)	Result
GFSK	2402 MHz	904.8	840.94	PASS
	2441 MHz	878.9	835.67	PASS
	2480 MHz	874.1	836.01	PASS

Test plot as follows:

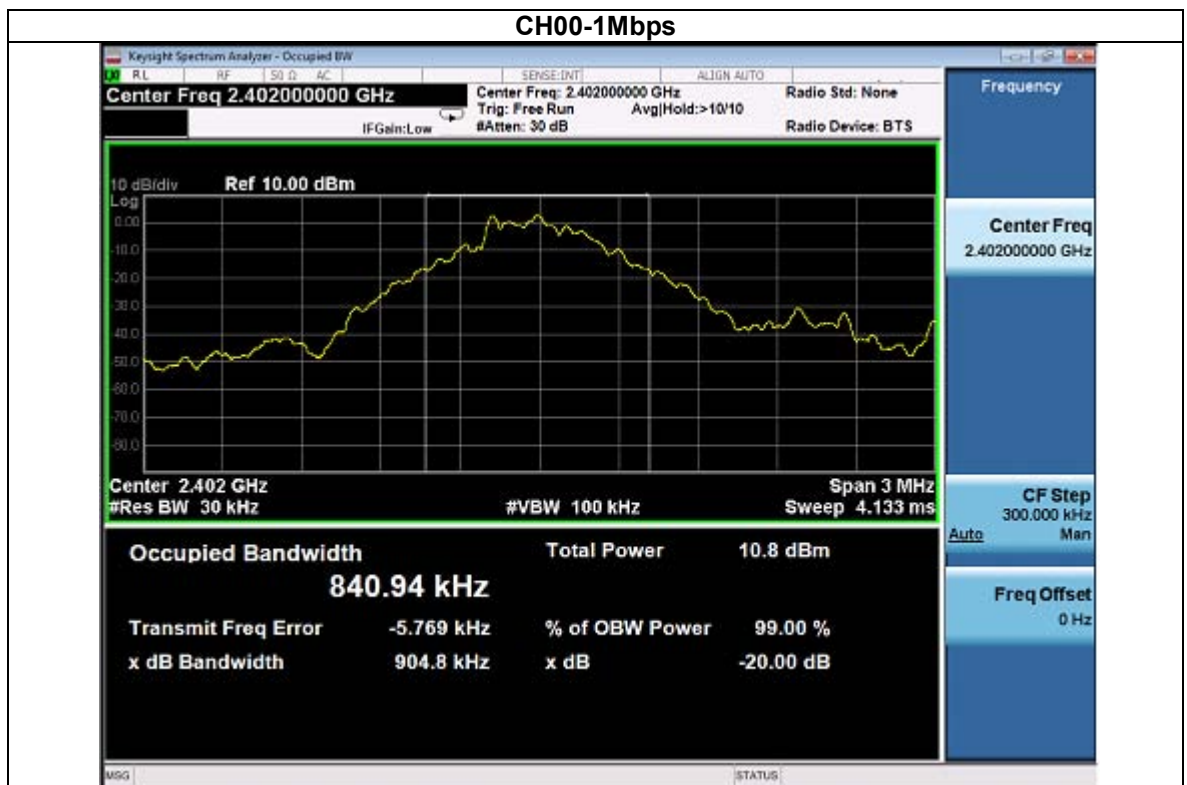

### CH39 -1Mbps




### CH78 -1Mbps




	Frequency	20dB Bandwidth (kHz)	99% Bandwidth (KHz)	Result
π /4-DQPSK	2402 MHz	1.217	1.161	PASS
	2441 MHz	1.215	1.159	PASS
	2480 MHz	1.216	1.159	PASS


Test plot as follows:

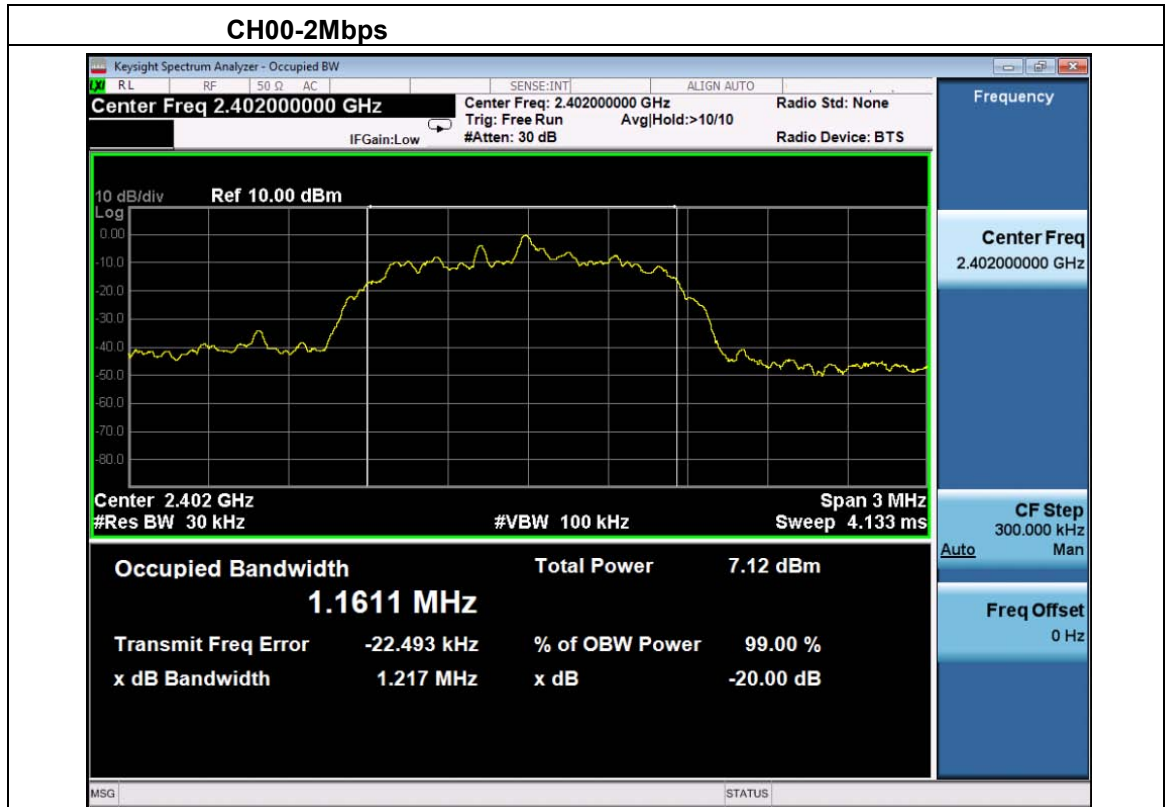

### CH39-2Mbps

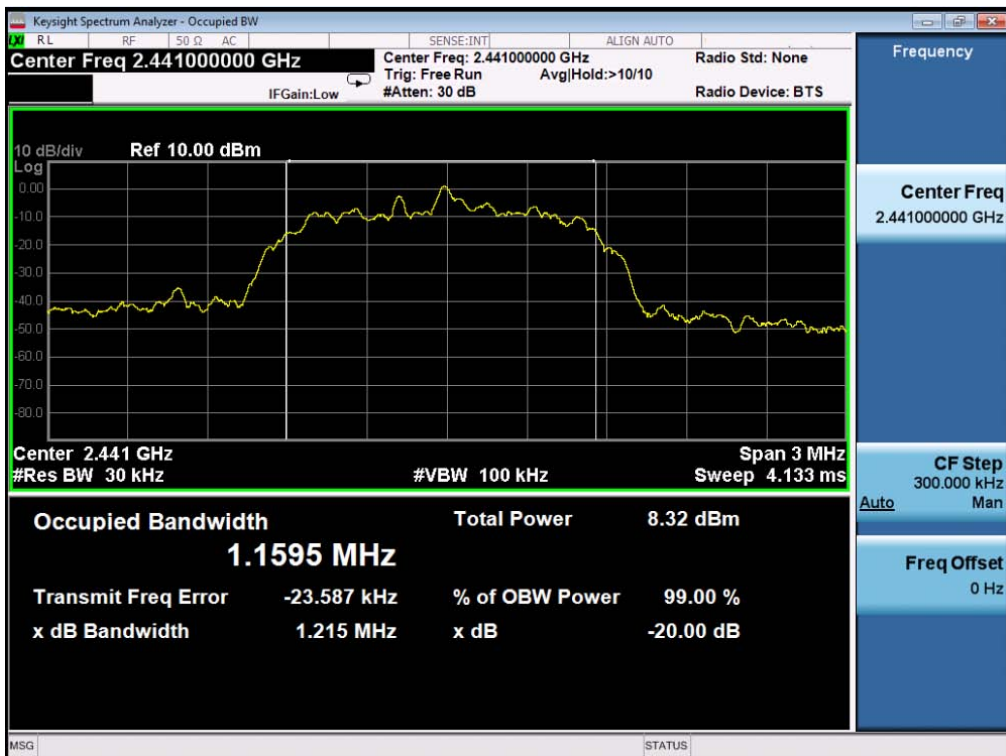


### CH78-2Mbps

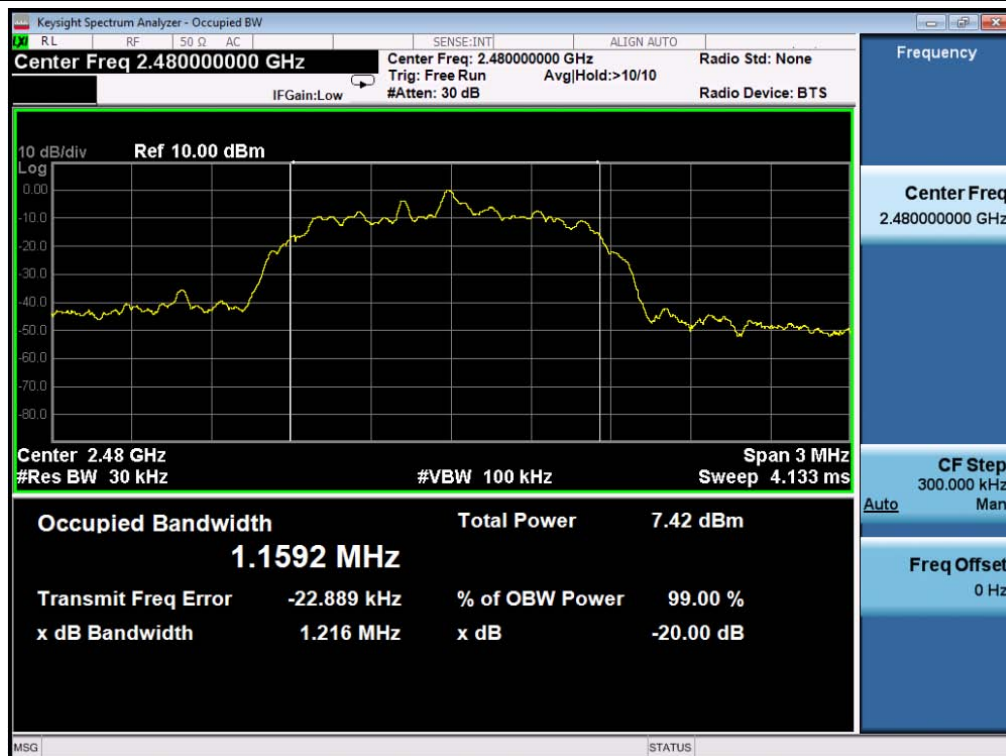




	Frequency	20dB Bandwidth (kHz)	99% Bandwidth (KHz)	Result
8-DPSK	2402 MHz	904.8	840.94	PASS
	2441 MHz	878.9	835.67	PASS
	2480 MHz	874.1	836.01	PASS


Test plot as follows:

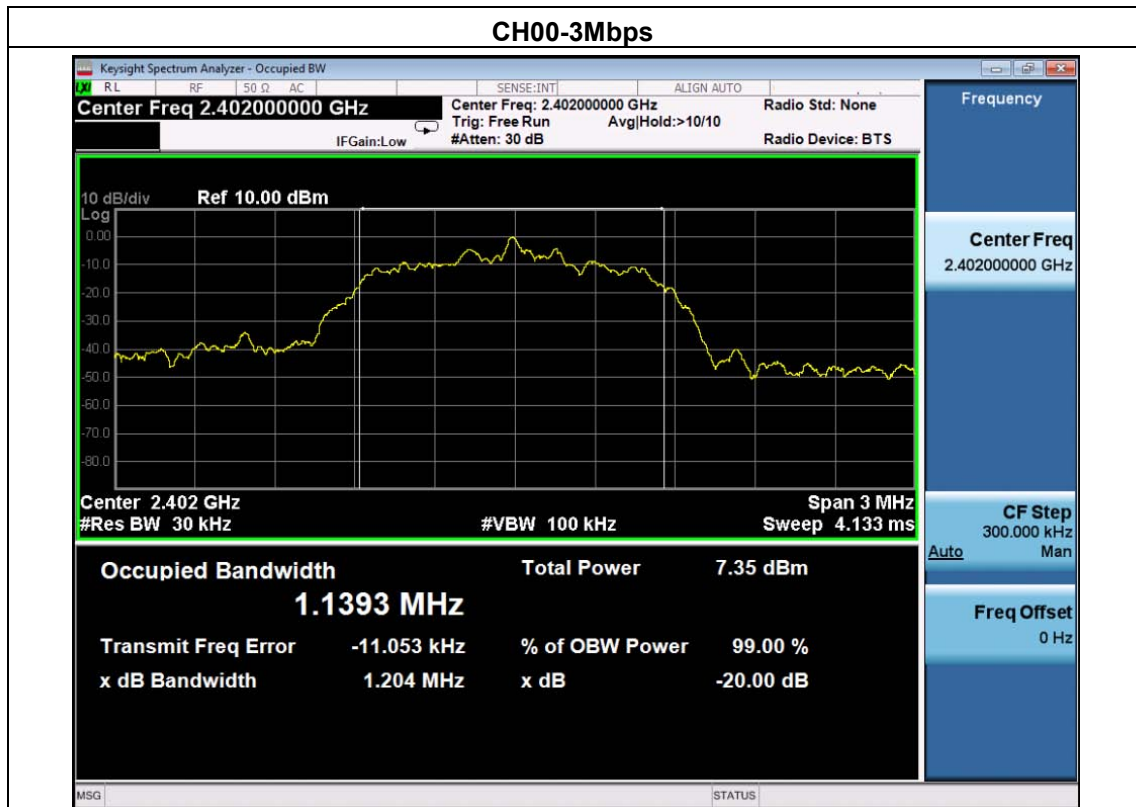

### CH39-3Mbps

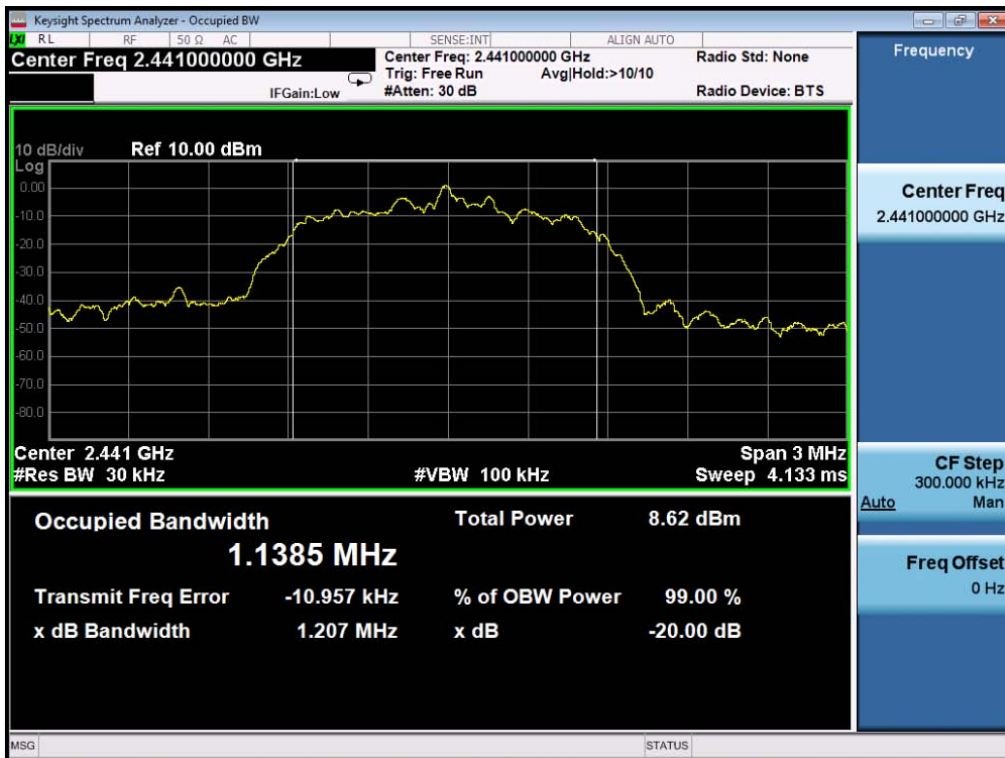


### CH78-3Mbps

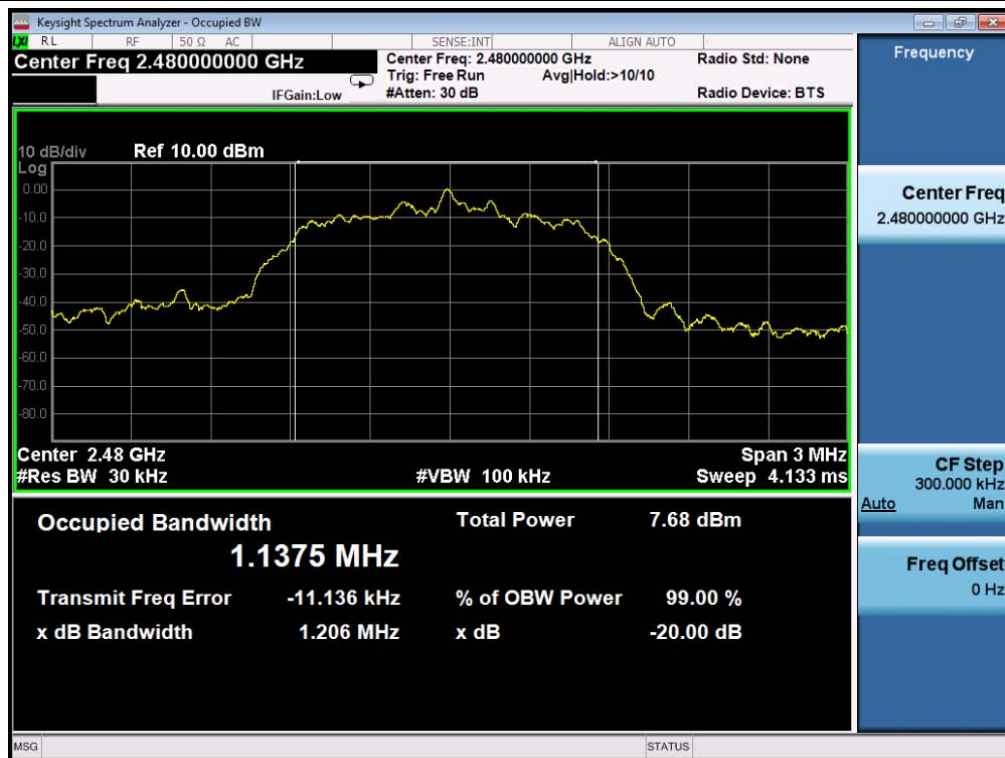

### 4.5. Frequency Separation

#### TEST CONFIGURATION



#### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30KHz and VBW=100KHz.

#### LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 2/3\*20dB bandwidth of the hopping channel, whichever is greater.

#### TEST RESULTS

	Frequency	Ch. Separation (MHz)	Limit (KHz)	Result
GFSK	2402 MHz	1.000	904.8	Complies
	2441 MHz	0.986	878.9	Complies
	2480 MHz	1.010	874.1	Complies

Ch. Separation Limits: > 20dB bandwidth



### CH39-1Mbps






### CH78-1Mbps



	Frequency	Ch. Separation (MHz)	Limit (KHz)	Result
π/4-DQPSK	2402 MHz	0.982	0.811	Complies
	2441 MHz	1.006	0.810	Complies
	2480 MHz	1.004	0.811	Complies


Ch. Separation Limits: >2/3 of 20dB bandwidth.

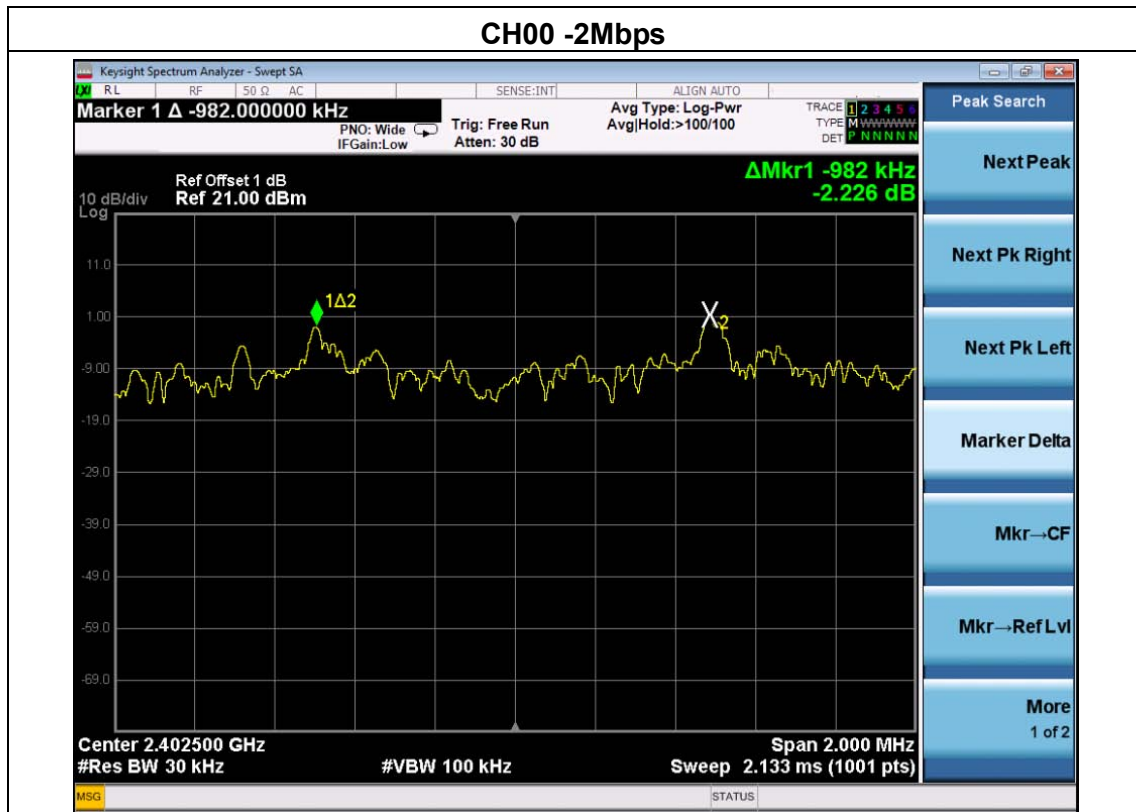

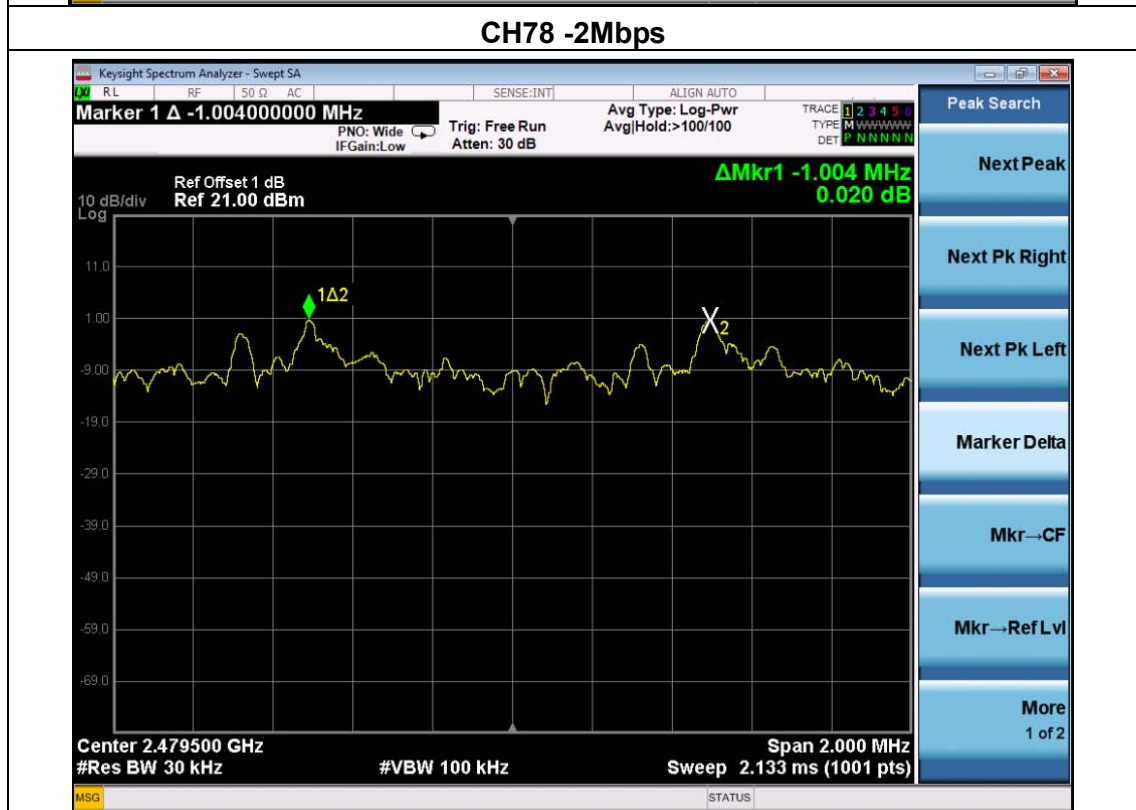
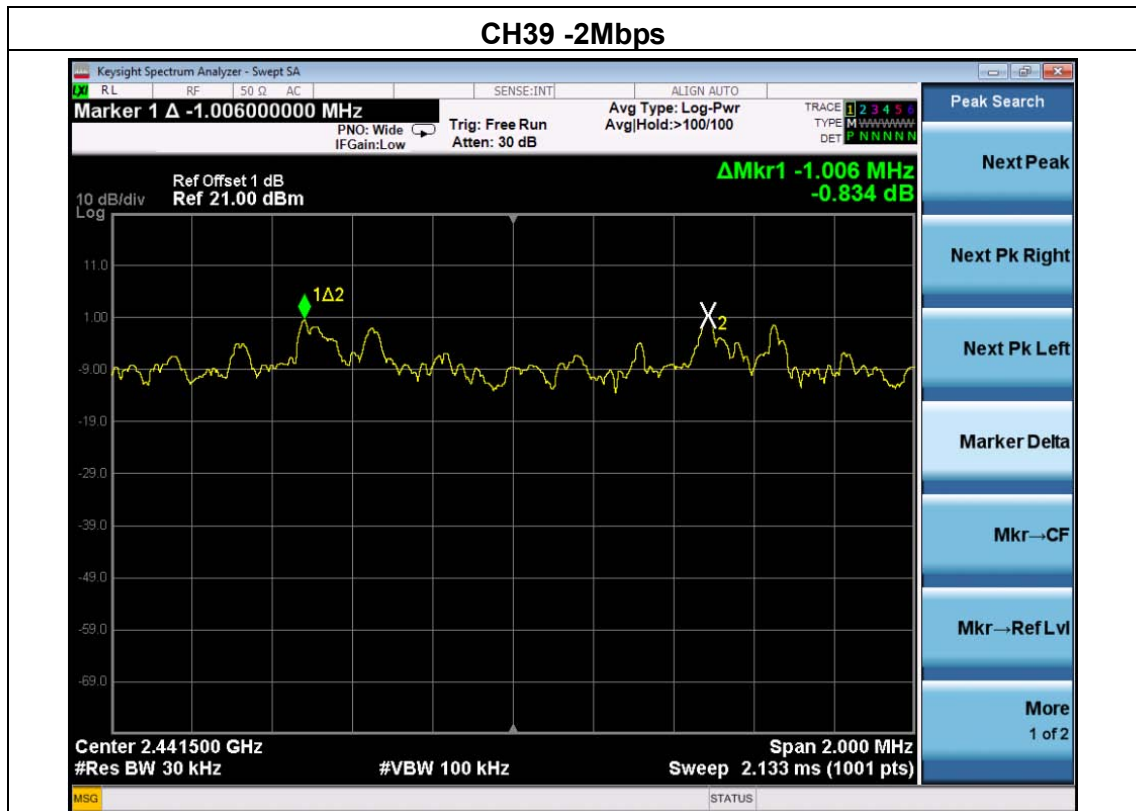


	Frequency	Ch. Separation (MHz)	Limit (KHz)	Result
8-DPSK	2402 MHz	0.992	0.803	Complies
	2441 MHz	1.000	0.805	Complies
	2480 MHz	1.002	0.804	Complies

Ch. Separation Limits: >2/3 of 20dB bandwidth.

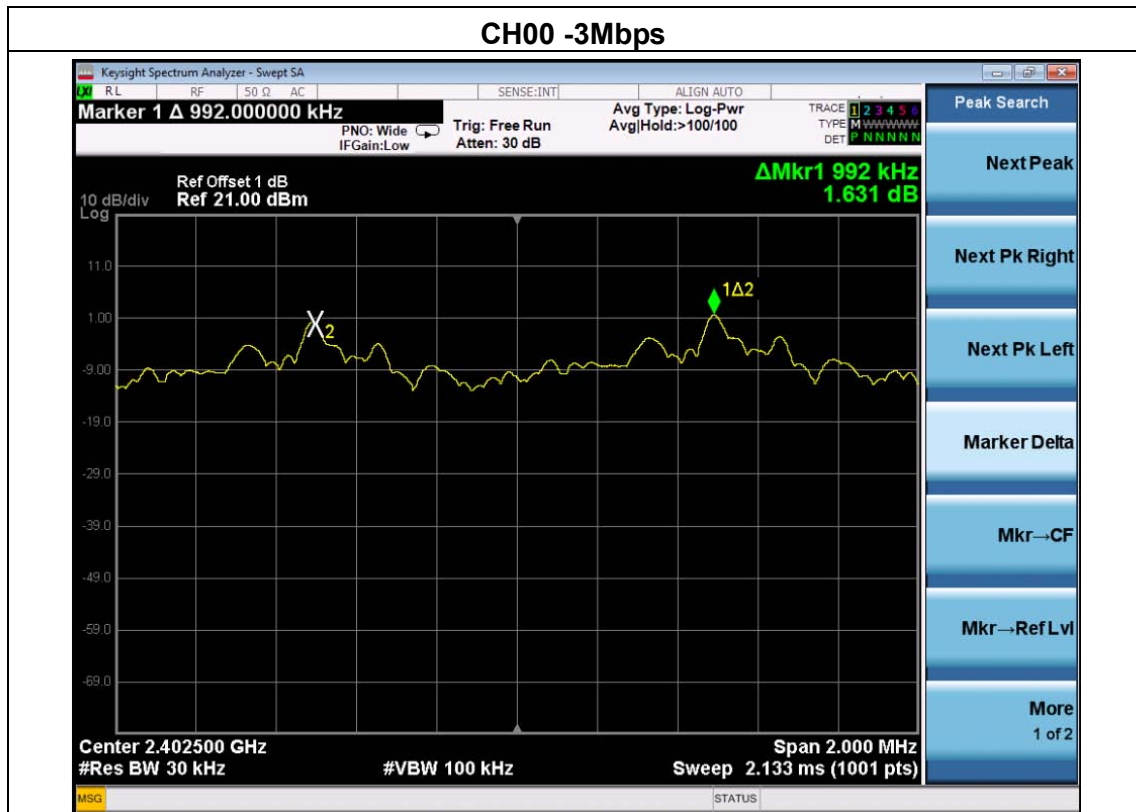



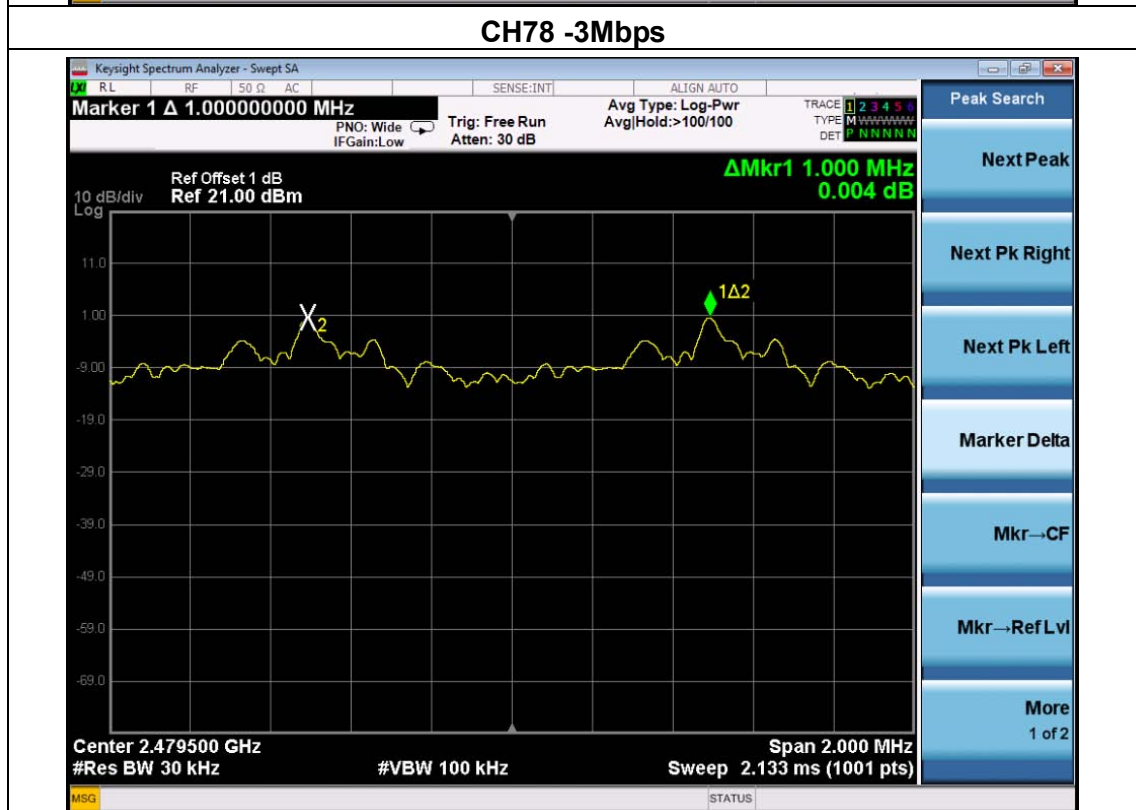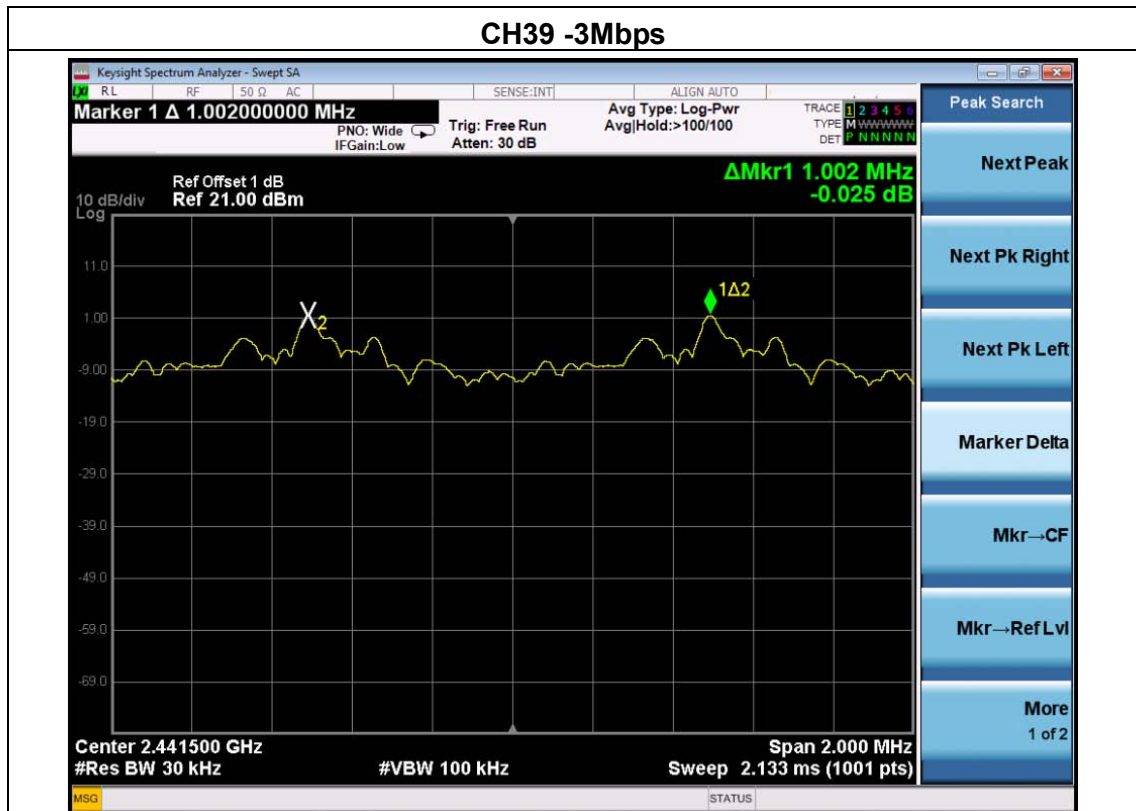




### 4.6. Band Edge Compliance of RF Emission

#### TEST REQUIREMENT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### TEST CONFIGURATION

*For Radiated*

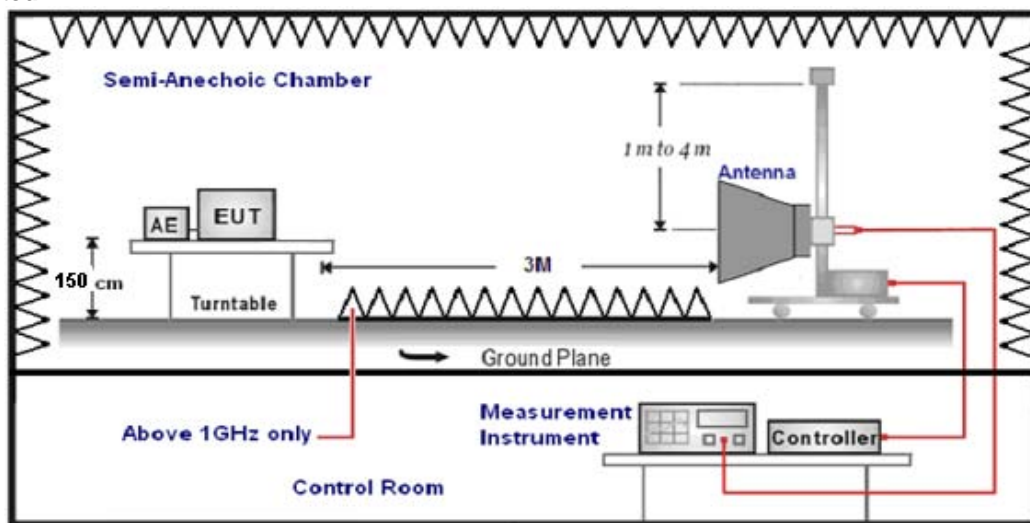

*For Conducted*



#### TEST PROCEDURE

1. The EUT was placed on a turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

#### LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

**TEST RESULTS**

Remark: we measured all conditions(DH1,DH3,DH5) and recorded worst case at DH1.

**4.6.1 For Radiated Bandedge Measurement**

Remark: we tested radiated bandedge at both hopping and no-hopping modes,recorded worst case at no-hopping mode

**GFSK**

Frequency(MHz):			2402			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	51.49	PK	74.00	22.51	1.00	122	56.80	27.49	3.32	36.12	-5.31
2390.00	41.27	AV	54.00	12.73	1.00	122	46.58	27.49	3.32	36.12	-5.31
Frequency(MHz):			2402			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	49.74	PK	74.00	24.26	1.00	97	55.05	27.49	3.32	36.12	-5.31
2390.00	41.47	AV	54.00	12.53	1.00	97	46.78	27.49	3.32	36.12	-5.31
Frequency(MHz):			2480			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	50.85	PK	74.00	23.15	1.00	157	56.57	27.45	3.38	36.55	-5.72
2483.50	39.48	AV	54.00	14.52	1.00	157	45.20	27.45	3.38	36.55	-5.72
Frequency(MHz):			2480			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	51.72	PK	74.00	22.28	1.00	324	57.44	27.45	3.38	36.55	-5.72
2483.50	41.36	AV	54.00	12.64	1.00	324	47.08	27.45	3.38	36.55	-5.72

## 8-DPSK

Frequency(MHz):			2402			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	49.83	PK	74	24.17	1	135	55.14	27.49	3.32	36.12	-5.31
2390.00	39.96	AV	54	14.04	1	135	45.27	27.49	3.32	36.12	-5.31
Frequency(MHz):			2402			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	48.74	PK	74	25.26	1	198	54.05	27.49	3.32	36.12	-5.31
2390.00	39.93	AV	54	14.07	1	198	45.24	27.49	3.32	36.12	-5.31
Frequency(MHz):			2480			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	48.91	PK	74	25.09	1	241	54.63	27.45	3.38	36.55	-5.72
2483.50	39.17	AV	54	14.83	1	241	44.89	27.45	3.38	36.55	-5.72
Frequency(MHz):			2480			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	50.12	PK	74	23.88	1	182	55.84	27.45	3.38	36.55	-5.72
2483.50	40.29	AV	54	13.71	1	182	46.01	27.45	3.38	36.55	-5.72

## 4.6.2 For Conducted Bandedge Measurement

Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
GFSK Non-hopping			
Left Band	52.638	20	Pass
Right Band	61.654	20	Pass
$\pi/4$ -DQPSK Non-hopping			
Left Band	38.913	20	Pass
Right Band	56.494	20	Pass
8DPSK Non-hopping			
Left Band	38.514	20	Pass
Right Band	56.573	20	Pass
GFSK hopping			
Left Band	50.779	20	Pass
Right Band	62.704	20	Pass
$\pi/4$ -DQPSK hopping			
Left Band	41.946	20	Pass
Right Band	58.733	20	Pass
8DPSK hopping			
Left Band	40.431	20	Pass
Right Band	60.129	20	Pass


















EDR mode(8DPSK): Band Edge-Right Side

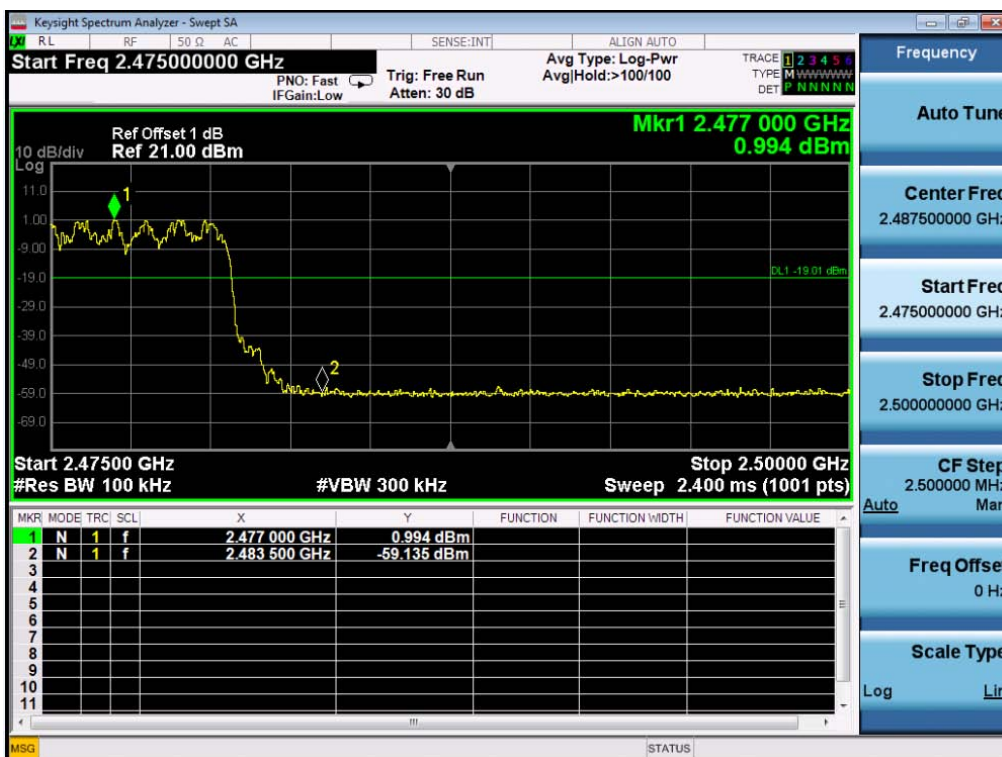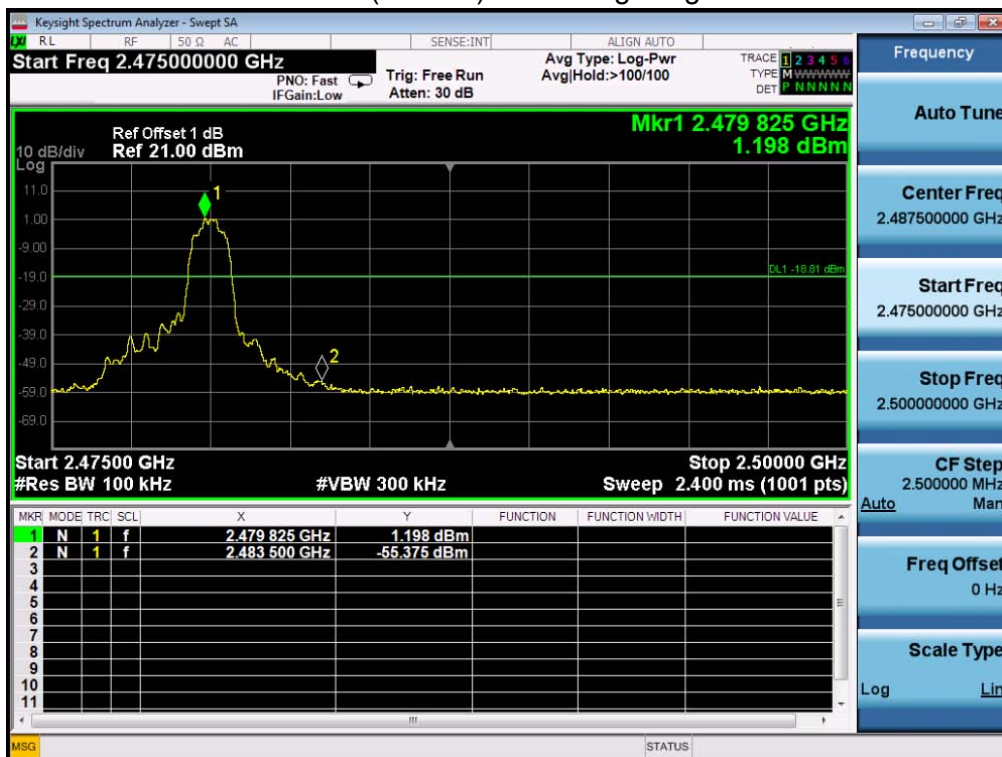

NOTE: Hopping enabled and disabled have evaluated, and the worst data was reported.

## 4.7. Spurious RF Conducted Emission

### TEST CONFIGURATION



### TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 9KHz to 25GHz.

### LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.
3. For below 30MHz, For 9KHz-150kHz, 150K-10MHz, We use the RBW 1KHz, 10KHz, So the limit need to be calculated by " $10\lg(BW1/BW2)$ ". for example For 9KHz-150kHz, RBW 1KHz, The Limit= the highest emission level-20-10log(100/1)= the highest emission level-40.

### TEST RESULTS

Remark: The measurement frequency range is from 9KHz to the 10<sup>th</sup> harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

Test Mode:


GFSK

Test channel :

00



Channel 0

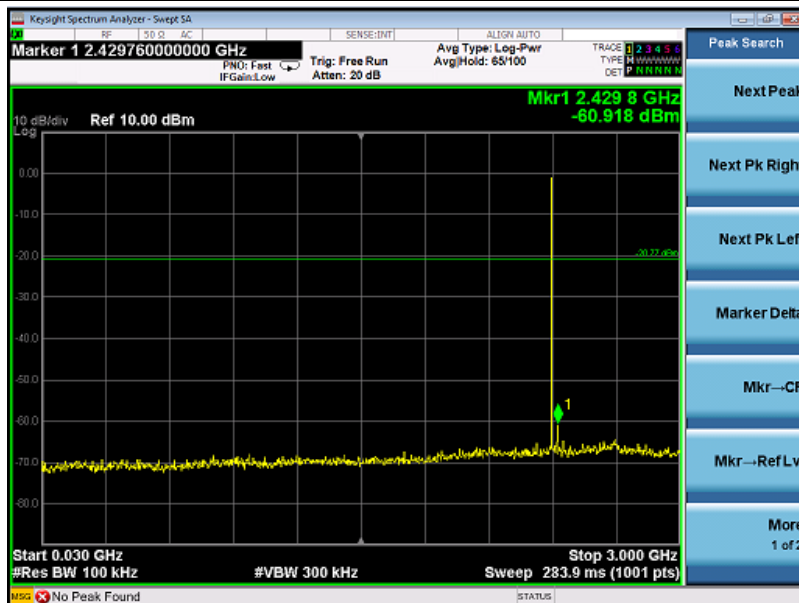

30MHz~3GHz



3GHz ~25GHz

Test Mode:


GFSK

Test channel :


39



Channel 19

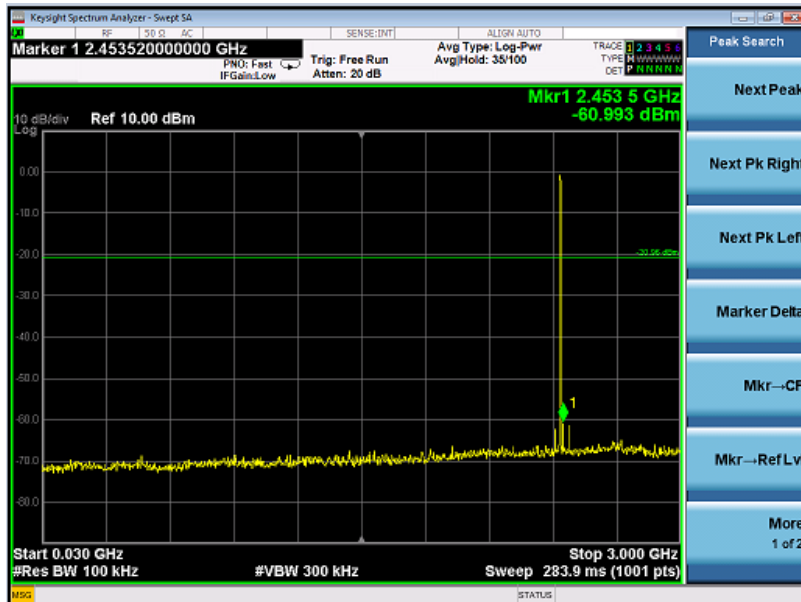

30MHz~3GHz

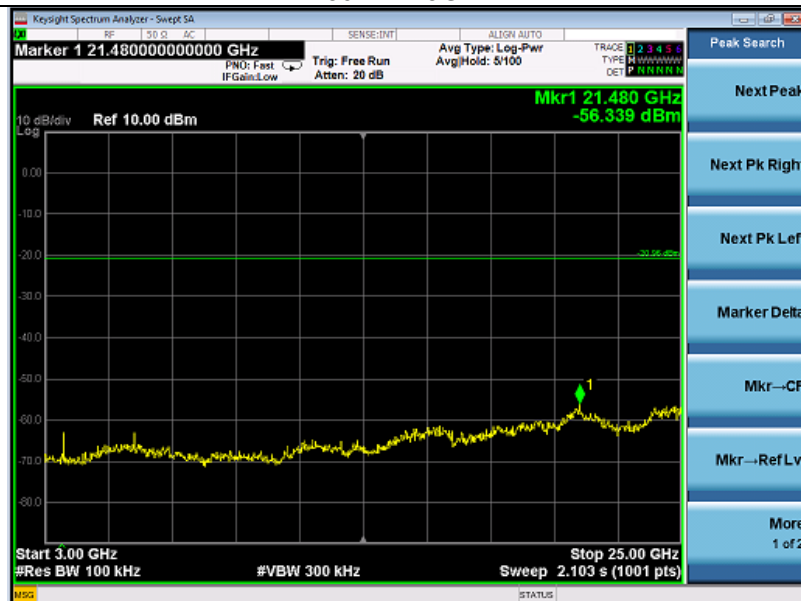

3GHz ~25GHz

Test Mode:


GFSK

Test channel :

78



Channel 39

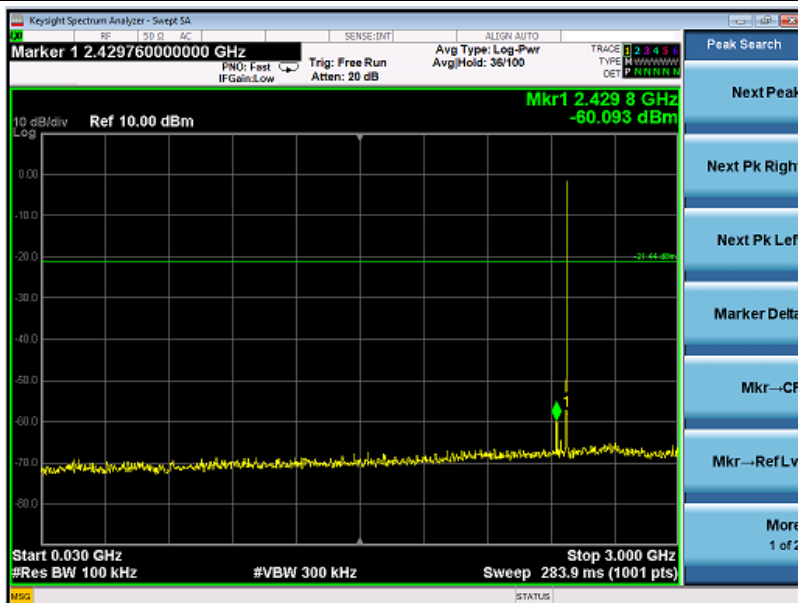

30MHz~3GHz




3GHz ~25GHz



### 4.8. Number of hopping frequency

#### TEST CONFIGURATION




#### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with RBW=1MHz and VBW=3MHz.

#### LIMIT

Frequency hopping systems in the 2400–2483.5MHz band shall use at least 15 channels.


Modulation	Number of Hopping Channel	Limit	Result
GFSK	79	≥15	Pass

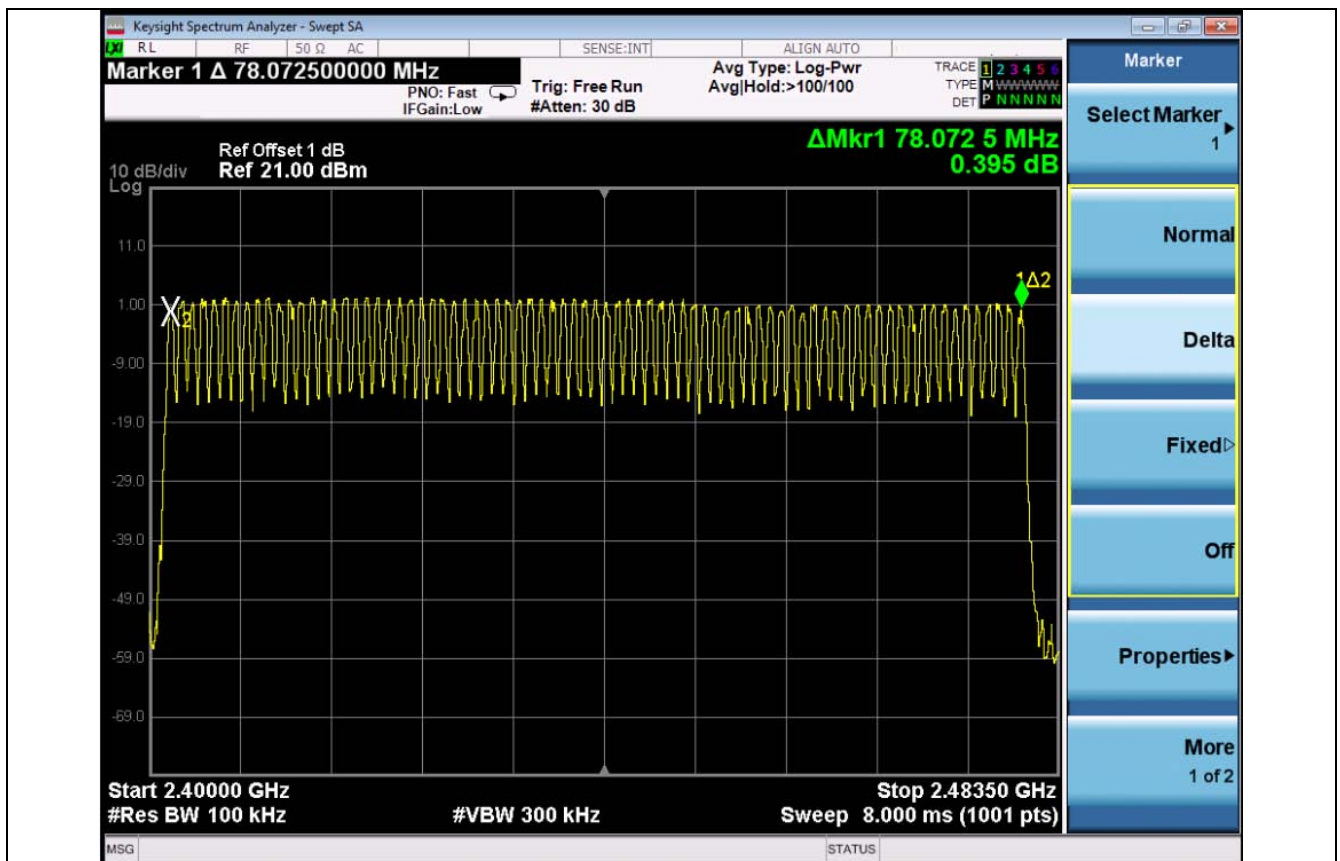

GFSK Modulation

#### 4.9. Time Of Occupancy(Dwell Time)

##### TEST CONFIGURATION



##### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with RBW=1MHz and VBW=3MHz,Span=0Hz.

##### LIMIT


The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.



##### TEST RESULTS



	Data Packet	Frequency	Pulse Duration	Dwell Time	Limits
			(ms)	(s)	(s)
GFSK	DH1	2441 MHz	0.435	0.14	0.4
	2DH1	2441 MHz	0.450	0.14	0.4
	3DH1	2441 MHz	0.450	0.14	0.4


Test plot as follows:


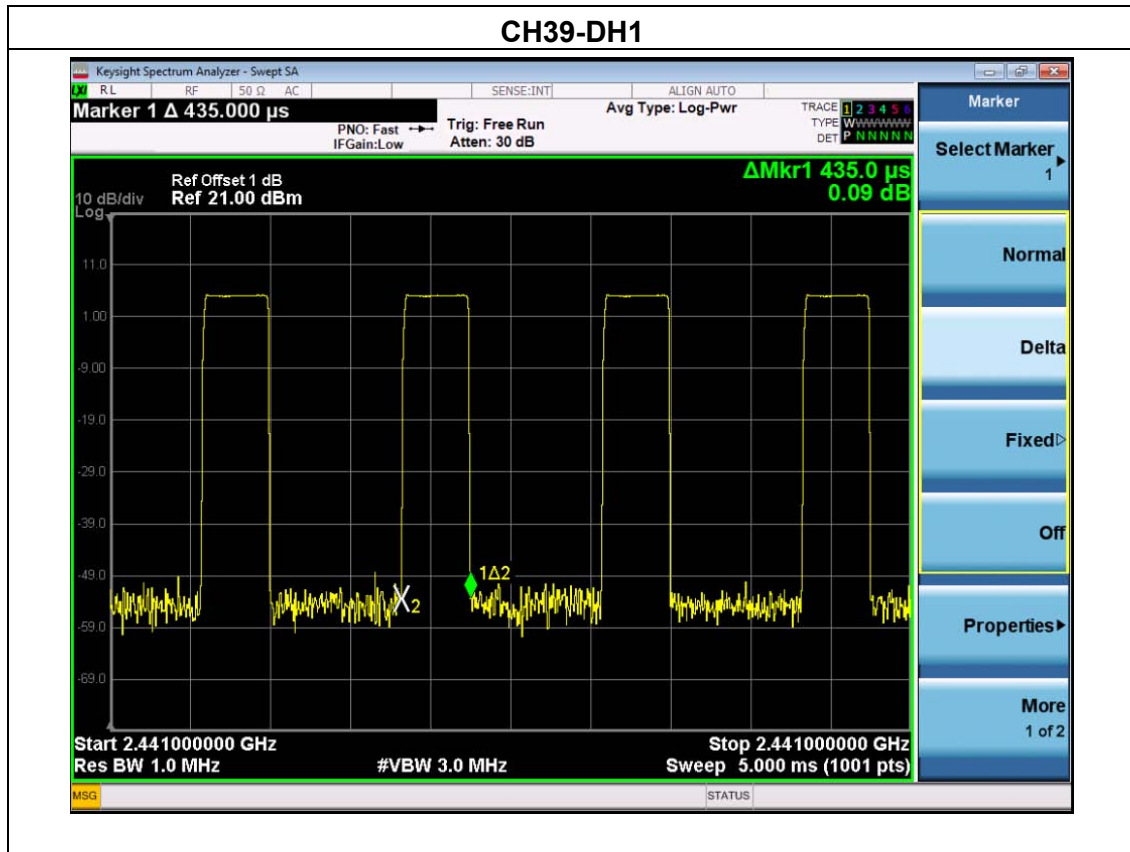


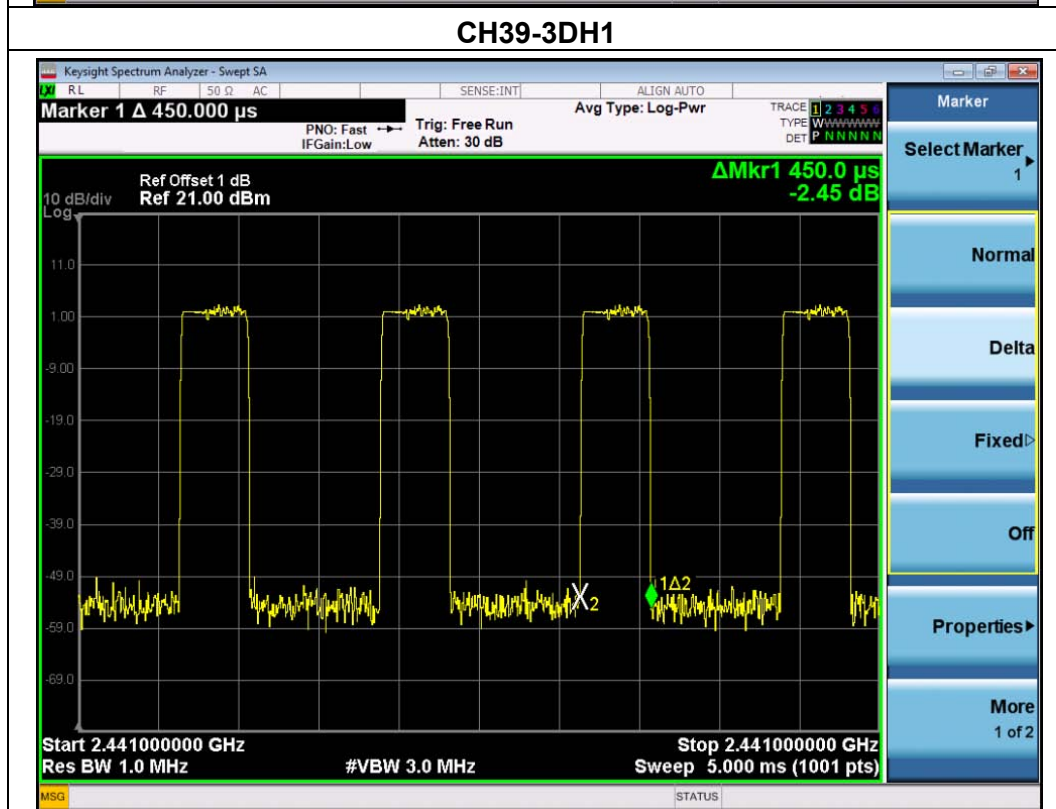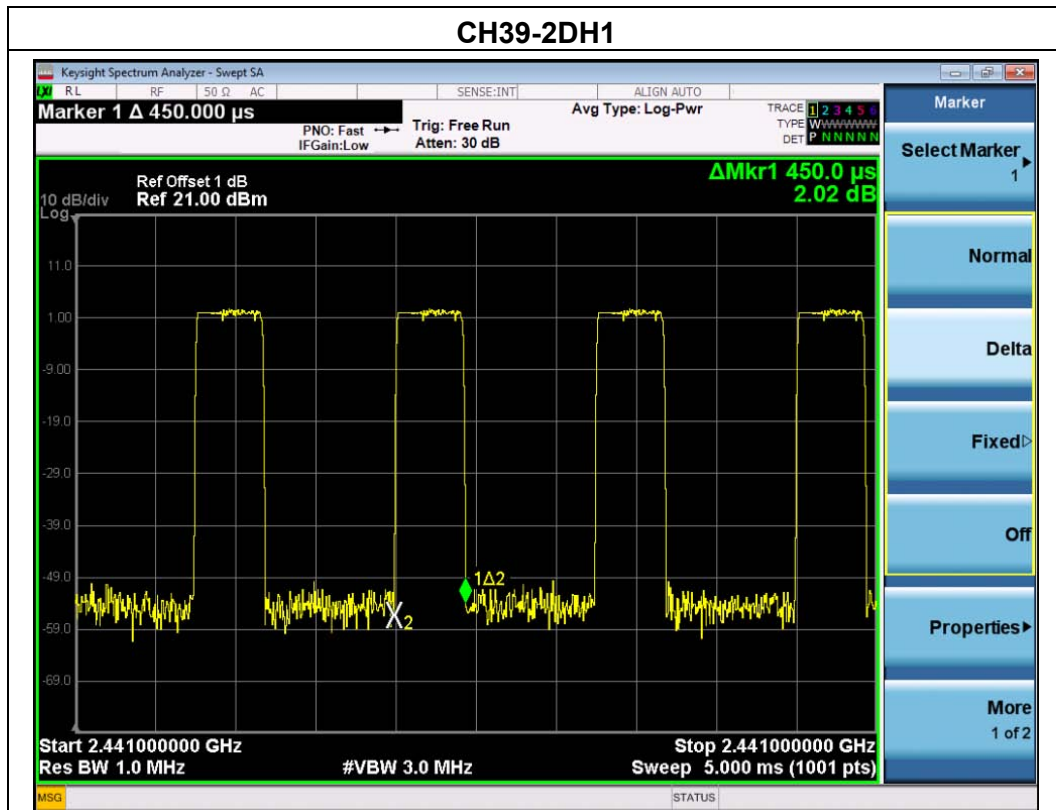

	Data Packet	Frequency	Pulse Duration	Dwell Time	Limits
			(ms)	(s)	(s)
π/4DQPSK	DH3	2441 MHz	1.69	0.27	0.4
	2DH3	2441 MHz	1.70	0.27	0.4
	3DH3	2441 MHz	1.70	0.27	0.4


Test plot as follows:


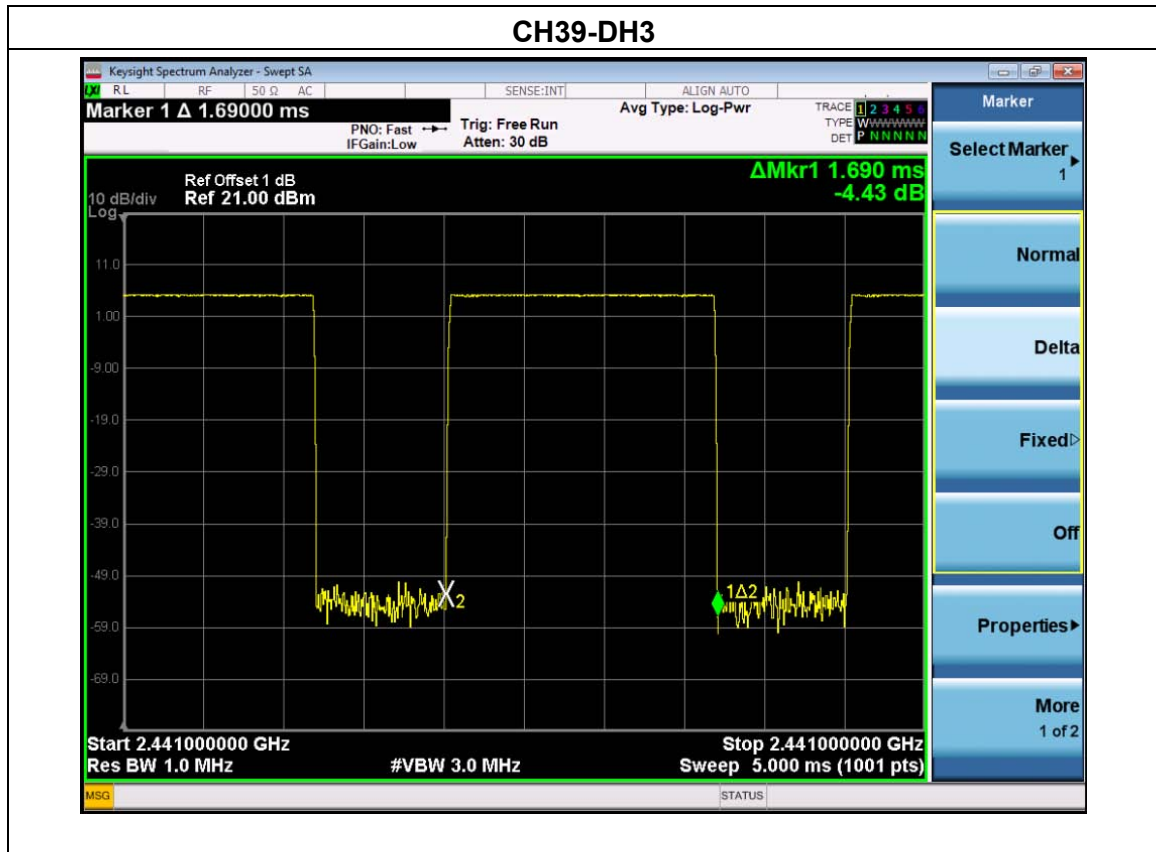


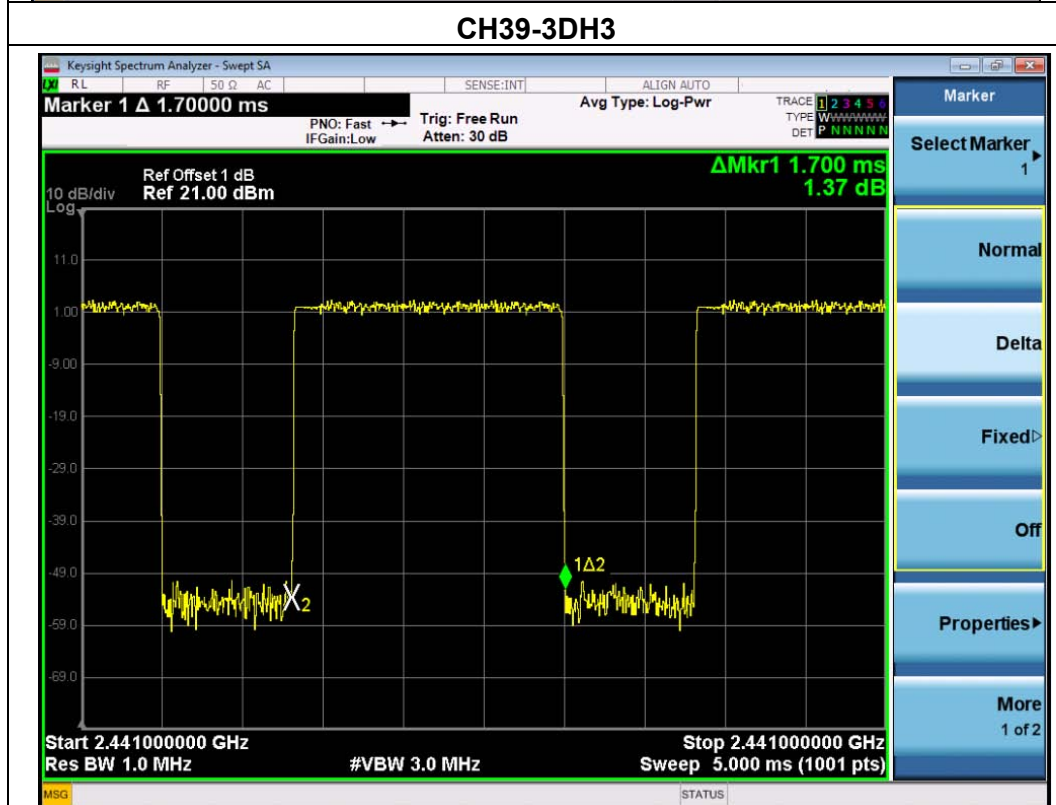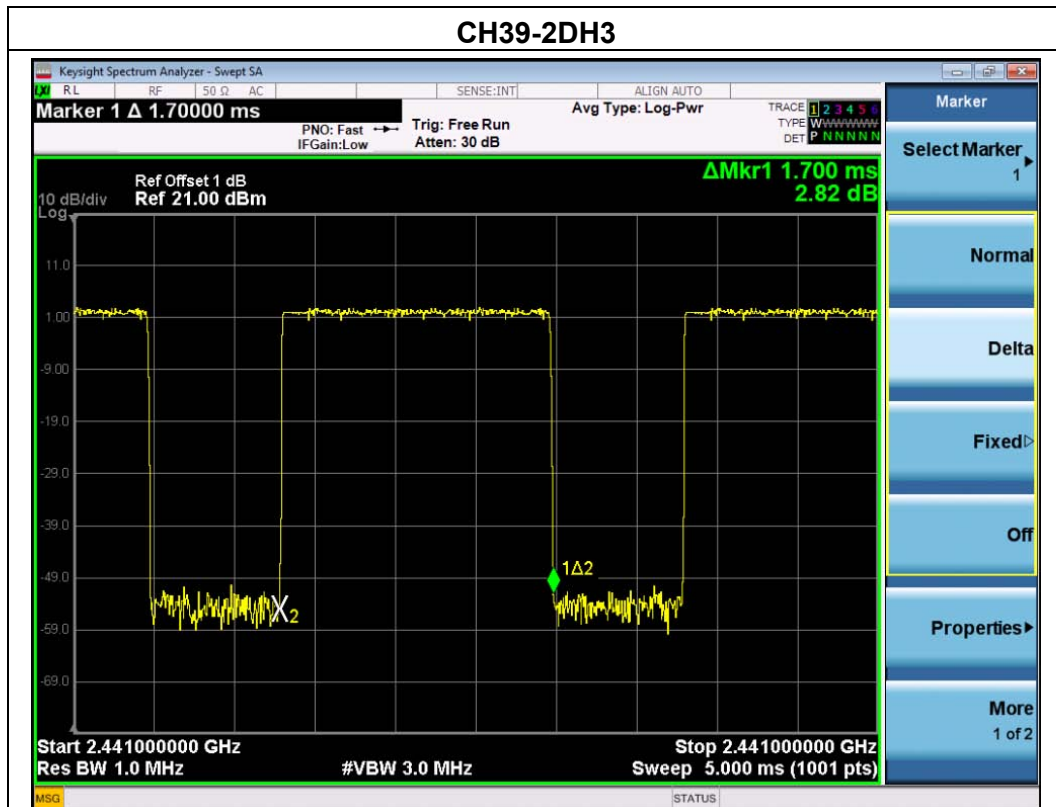

	Data Packet	Frequency	Pulse Duration	Dwell Time	Limits
			(ms)	(s)	(s)
8-DPSK	DH5	2441 MHz	2.95	0.31	0.4
	2DH5	2441 MHz	2.96	0.32	0.4
	3DH5	2441 MHz	2.97	0.32	0.4

Test plot as follows:

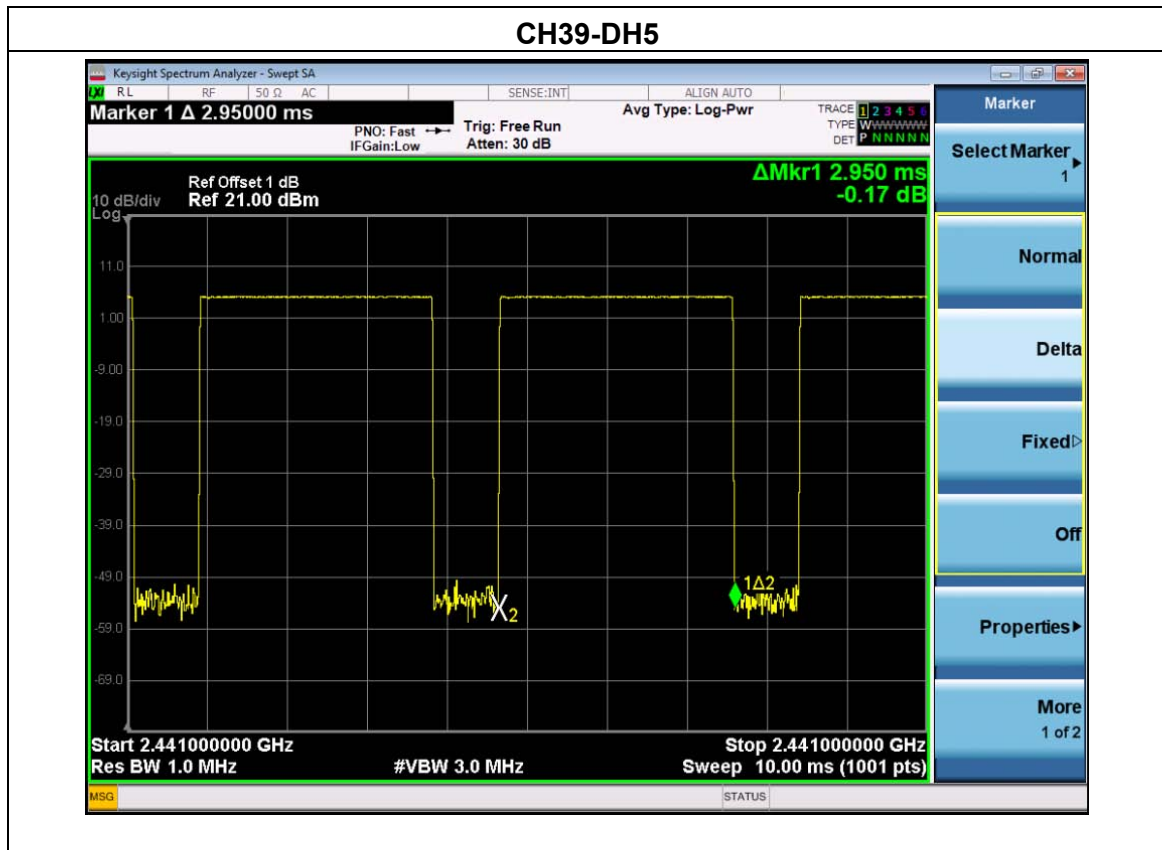

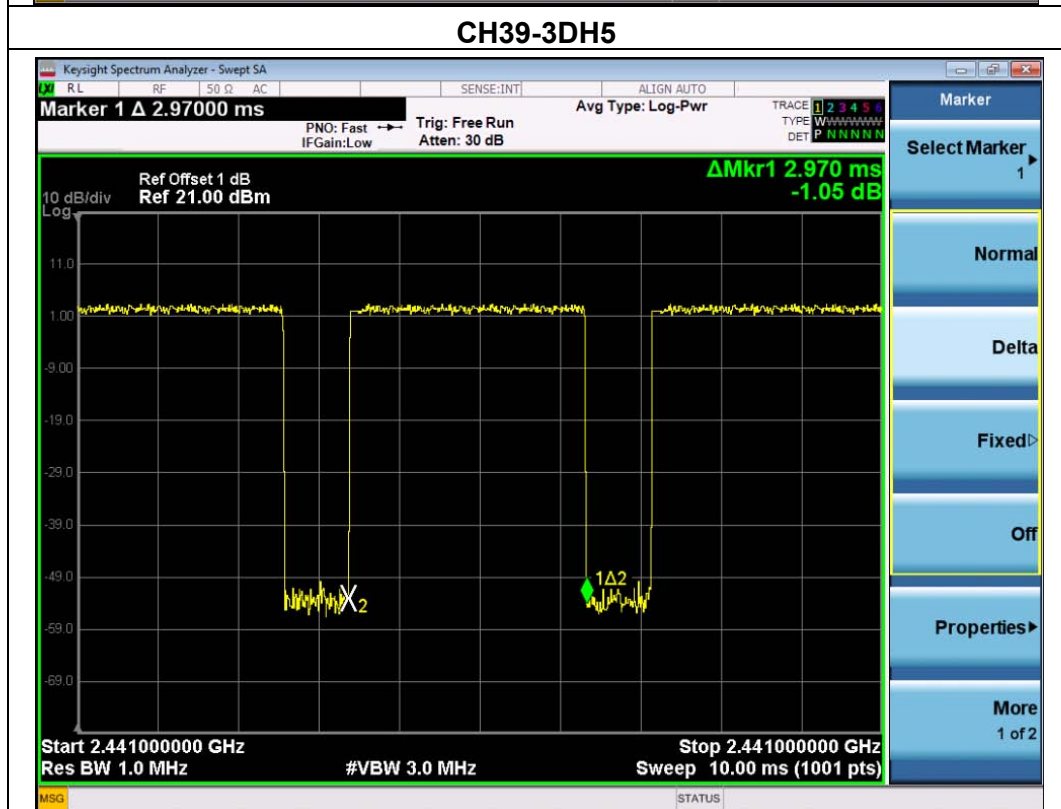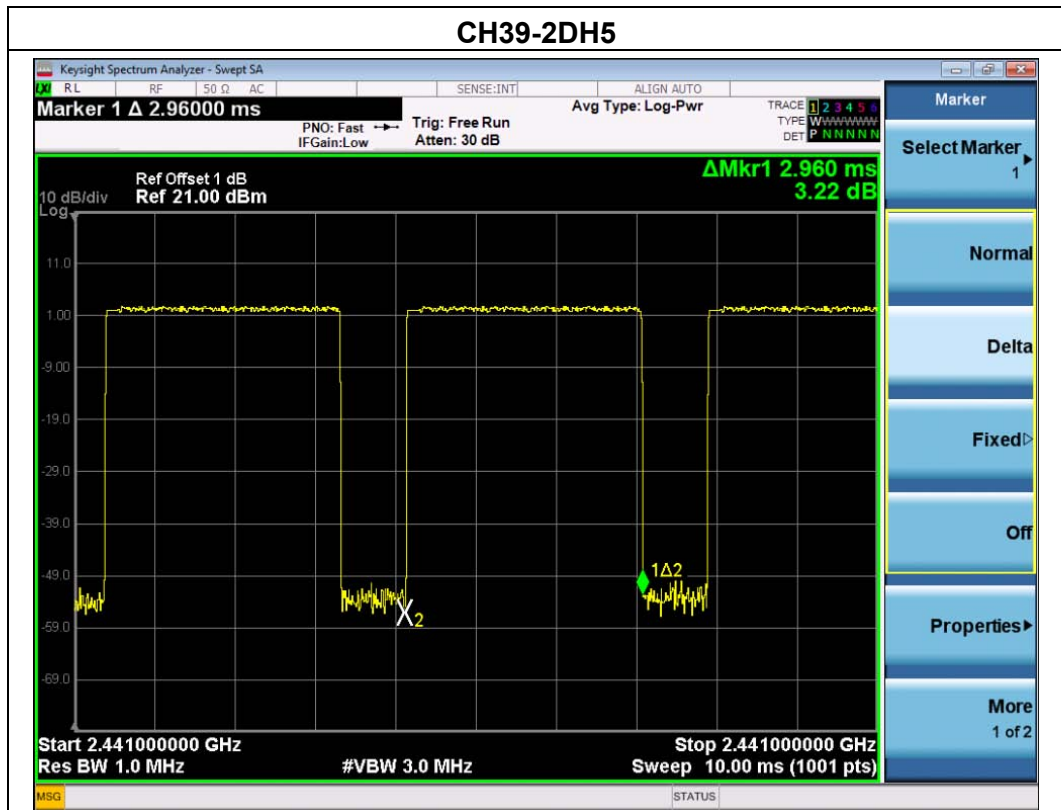

### 4.10. Pseudorandom Frequency Hopping Sequence

**TEST APPLICABLE**


**For 47 CFR Part 15C section 15.247 (a)(1) requirement:**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo-randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

**EUT Pseudorandom Frequency Hopping Sequence Requirement**


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

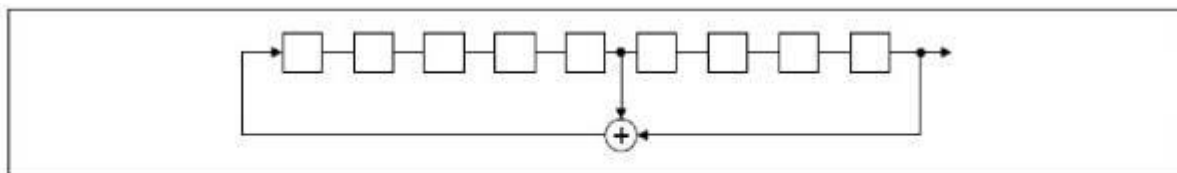

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

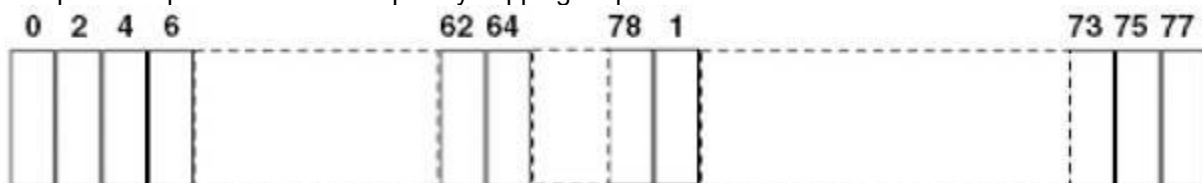

Each frequency used equally on the average by each transmitter. The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

## **4.11. Antenna Requirement**

### **Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.



### **Test Result**

The antenna used for this product is Internal Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 0dBi.



## 5. Test Setup Photos of the EUT

### Radiated Emission Test

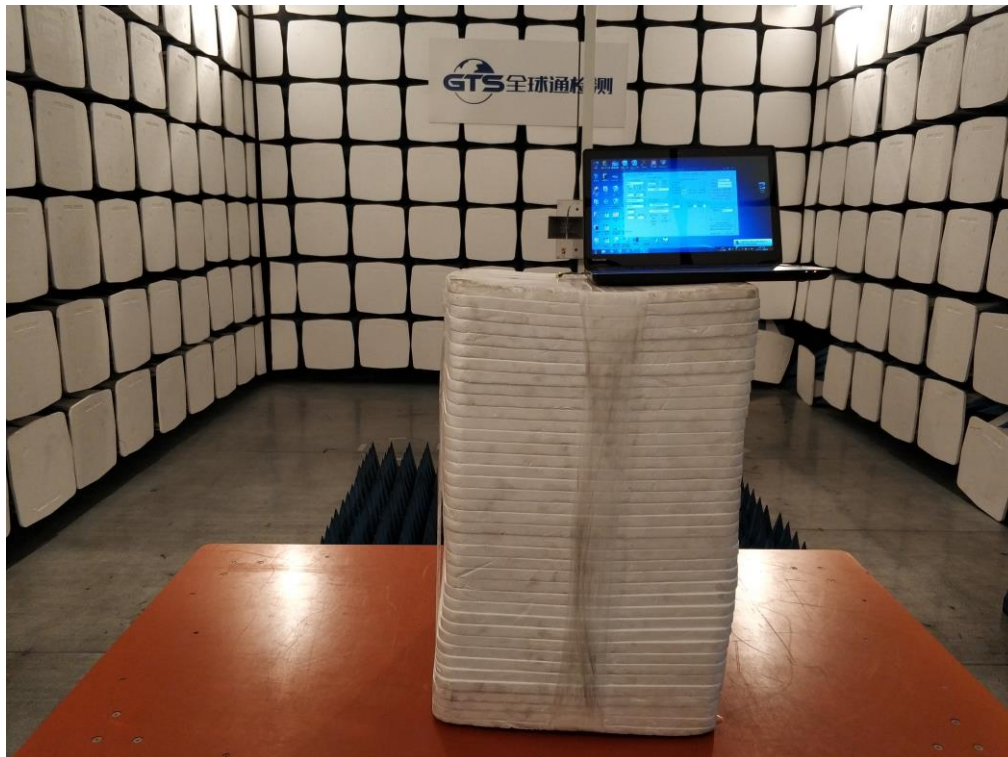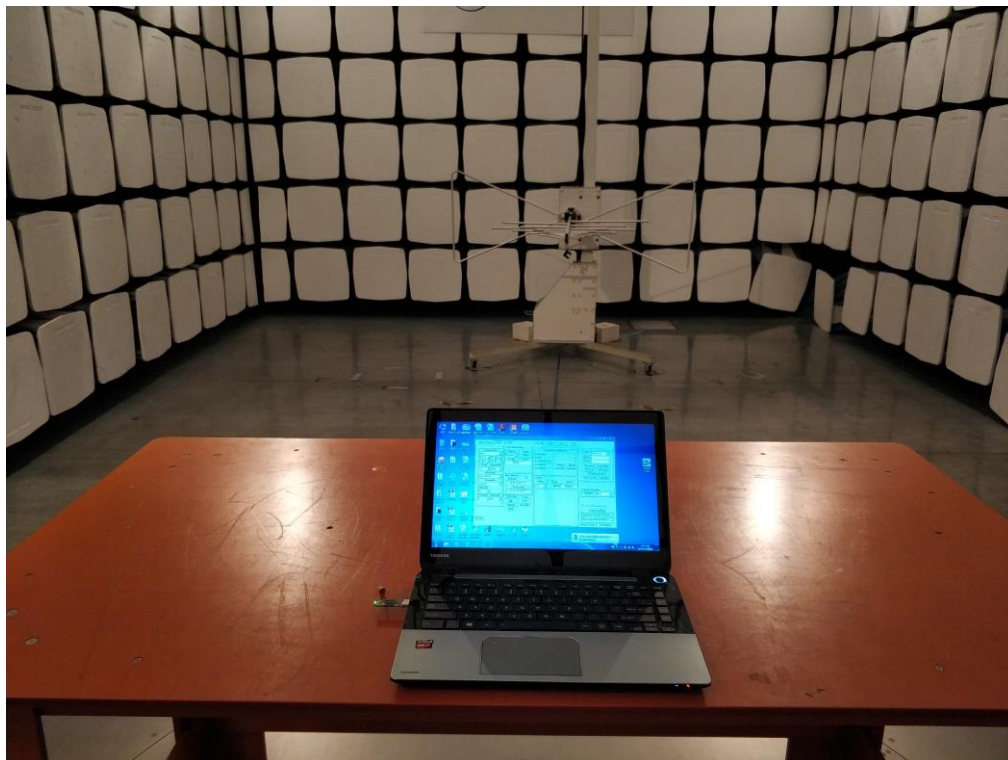

Conducted Emission



## **6. External and Internal Photos of the EUT**

Reference to the test report No. GTSR19010009-01.

.....**End of Report**.....