

# **FCC Test Report**

Report No.: AGC10732230801FR01

FCC ID : 2ASJU-M13DC

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: Wireless lavalier microphone

**BRAND NAME** : HIPPO, COOLBOX

M13DC, M6, M8, M9, M10, M11, M12, M12DC, M15,

**MODEL NAME** : M15DC, MJ16DC, M18, M19, M20, M21, M22, M23, M26,

M27, M28, M29, M30, M31, M32

**APPLICANT**: ShenZhen HIPPO Digital CO., Ltd

**DATE OF ISSUE** : Aug. 09, 2023

**STANDARD(S)** : FCC Part 15.247

**REPORT VERSION**: V1.0


Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 43

#### **REPORT REVISE RECORD**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 09, 2023	Valid	Initial Release





#### **TABLE OF CONTENTS**

1. VERIFICATION OF COMPLIANCE	
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION 2.2. TABLE OF CARRIER FREQUENCYS 2.3. RELATED SUBMITTAL(S)/GRANT(S). 2.4. TEST METHODOLOGY 2.5. SPECIAL ACCESSORIES. 2.6. EQUIPMENT MODIFICATIONS. 2.7. ANTENNA REQUIREMENT.	
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	10
5. SYSTEM TEST CONFIGURATION	1 <sup>2</sup>
5.1. CONFIGURATION OF TESTED SYSTEM 5.2. EQUIPMENT USED IN TESTED SYSTEM 5.3. SUMMARY OF TEST RESULTS	11
6. TEST FACILITY	12
7. PEAK OUTPUT POWER	
7.1. MEASUREMENT PROCEDURE 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 7.3. LIMITS AND MEASUREMENT RESULT	
8. BANDWIDTH	10
8.1. MEASUREMENT PROCEDURE	
9. CONDUCTED SPURIOUS EMISSION	20
9.1. MEASUREMENT PROCEDURE	20 
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	27
10.1. MEASUREMENT PROCEDURE	27 27
11. RADIATED EMISSION	29
11.1. MEASUREMENT PROCEDURE	30 37
12. LINE CONDUCTED EMISSION TEST	41
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	4 <sup>2</sup> 4



Page 4 of 43

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	42
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	42
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	42
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	43
APPENDIX B: PHOTOGRAPHS OF EUT	43



Page 5 of 43

#### 1. VERIFICATION OF COMPLIANCE

Applicant	ShenZhen HIPPO Digital CO., Ltd
Address	3rd Floor, Building A, Dunfa Industrial Park, Hangcheng Avenue, Gushu, Xixiang, BaoAn District, Shenzhen, China
Manufacturer	ShenZhen HIPPO Digital CO., Ltd
Address	3rd Floor, Building A, Dunfa Industrial Park, Hangcheng Avenue, Gushu, Xixiang, BaoAn District, Shenzhen, China
Factory	ShenZhen HIPPO Digital CO., Ltd
Address	3rd Floor, Building A, Dunfa Industrial Park, Hangcheng Avenue, Gushu, Xixiang, BaoAn District, Shenzhen, China
Product Designation	Wireless lavalier microphone
Brand Name	HIPPO, COOLBOX
Test Model	M13DC
Series Model	M6, M8, M9, M10, M11, M12, M12DC, M15, M15DC, MJ16DC, M18, M19, M20, M21, M22, M23, M26, M27, M28, M29, M30, M31, M32
Declaration of Difference	All the same except the appearance of color and model name
Date of receipt of test item	Aug. 03, 2023 to Aug. 09, 2023
Date of test	Aug. 09, 2023
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BLE/RF

#### We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Alan Duan
(Project Engineer)

Reviewed By

Calvin Liu
(Reviewer)

Aug. 09, 2023



Page 6 of 43

#### 2. GENERAL INFORMATION

#### 2.1. PRODUCT DESCRIPTION

The EUT is designed as a "Wireless lavalier microphone". It is designed by way of utilizing the GFSK technology to achieve the system operation.


A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	-0.994dBm (Max)
Modulation	GFSK
Number of channels	40 Channel
Antenna Designation	Ceramic Antenna (Comply with requirements of the FCC part 15.203)
Antenna Gain	1.75dBi
Hardware Version	N9120-TX-V1.1
Software Version	V1.0
Power Supply	DC 3.7V by battery

Note: The EUT comprises left and right wireless lavalier microphone, both are the same. the left wireless lavalier microphone had been tested and recorded in this report as the worst case.

#### 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402 MHz
	1	2404 MHz
	2	2406 MHz
	3	2408 MHz
	4	2410 MHz
	5	2412 MHz
0400 0400 5MH-	6	2414 MHz
2400~2483.5MHz	7	2416 MHz
	8	2418 MHz
	9	2420 MHz
	10	2422 MHz
	11	2424 MHz
	12	2426 MHz
	13	2428 MHz





14 2430 MHz 15 2432 MHz 16 2434 MHz 17 2436 MHz 18 2438 MHz 19 2440 MHz 20 2442 MHz 21 2444 MHz 22 2446 MHz 23 2448 MHz 2450 MHz 25 2452 MHz 26 2454 MHz 27 2456 MHz 28 2460 MHz 29 2460 MHz 30 2462 MHz 31 2466 MHz 32 2466 MHz 32 2466 MHz
16     2434 MHz       17     2436 MHz       18     2438 MHz       19     2440 MHz       20     2442 MHz       21     2444 MHz       22     2446 MHz       23     2448 MHz       24     2450 MHz       25     2452 MHz       26     2454 MHz       27     2456 MHz       28     2458 MHz       29     2460 MHz       30     2462 MHz       31     2464 MHz       32     2466 MHz
17 2436 MHz 18 2438 MHz 19 2440 MHz 20 2442 MHz 21 2444 MHz 22 2446 MHz 23 2448 MHz 24 2450 MHz 25 2452 MHz 26 2454 MHz 27 2456 MHz 28 2458 MHz 29 2460 MHz 30 2462 MHz 31 2464 MHz 32 2466 MHz
18 2438 MHz 19 2440 MHz 20 2442 MHz 21 2444 MHz 22 2446 MHz 23 2448 MHz 24 2450 MHz 25 2452 MHz 26 2454 MHz 27 2456 MHz 28 2458 MHz 29 2460 MHz 30 2462 MHz 31 2464 MHz 32 2466 MHz
19 2440 MHz 20 2442 MHz 21 2444 MHz 22 2446 MHz 23 2448 MHz 24 2450 MHz 25 2452 MHz 26 2454 MHz 27 2456 MHz 28 2458 MHz 29 2460 MHz 30 2462 MHz 31 2464 MHz 32 2466 MHz
20 2442 MHz 21 2444 MHz 22 2446 MHz 23 2448 MHz 24 2450 MHz 25 2452 MHz 26 2454 MHz 27 2456 MHz 28 2458 MHz 29 2460 MHz 30 2462 MHz 31 2464 MHz 32 2466 MHz
21 2444 MHz 22 2446 MHz 23 2448 MHz 24 2450 MHz 25 2452 MHz 26 2454 MHz 27 2456 MHz 28 2458 MHz 29 2460 MHz 30 2462 MHz 31 2464 MHz 32 2466 MHz
22 2446 MHz 23 2448 MHz 24 2450 MHz 25 2452 MHz 26 2454 MHz 27 2456 MHz 28 2458 MHz 29 2460 MHz 30 2462 MHz 31 2464 MHz 32 2466 MHz
23 2448 MHz 24 2450 MHz 25 2452 MHz 26 2454 MHz 27 2456 MHz 28 2458 MHz 29 2460 MHz 30 2462 MHz 31 2464 MHz 32 2466 MHz
24     2450 MHz       25     2452 MHz       26     2454 MHz       27     2456 MHz       28     2458 MHz       29     2460 MHz       30     2462 MHz       31     2464 MHz       32     2466 MHz
25     2452 MHz       26     2454 MHz       27     2456 MHz       28     2458 MHz       29     2460 MHz       30     2462 MHz       31     2464 MHz       32     2466 MHz
26 2454 MHz 27 2456 MHz 28 2458 MHz 29 2460 MHz 30 2462 MHz 31 2464 MHz 32 2466 MHz
27 2456 MHz 28 2458 MHz 29 2460 MHz 30 2462 MHz 31 2464 MHz 32 2466 MHz
28 2458 MHz 29 2460 MHz 30 2462 MHz 31 2464 MHz 32 2466 MHz
29 2460 MHz 30 2462 MHz 31 2464 MHz 32 2466 MHz
30 2462 MHz 31 2464 MHz 32 2466 MHz
31 2464 MHz 32 2466 MHz
32 2466 MHz
00
33 2468 MHz
34 2470 MHz
35 2472 MHz
36 2474 MHz
37 2476 MHz
38 2478 MHz
39 2480 MHz



Page 8 of 43

#### 2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2ASJU-M13DC** filing to comply with the FCC Part 15.247 requirements.

#### 2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

#### 2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

#### 2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



Page 9 of 43

#### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2.7 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$




Page 10 of 43

#### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION	
1	Low channel TX	
2	Middle channel TX	
3	High channel TX	

#### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

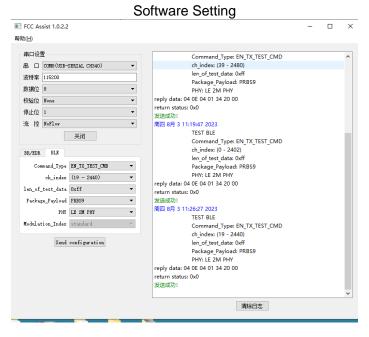



Page 11 of 43

#### 5. SYSTEM TEST CONFIGURATION

#### **5.1. CONFIGURATION OF TESTED SYSTEM**

Radiated Emission Configure:

#### **5.2. EQUIPMENT USED IN TESTED SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	Wireless lavalier microphone	M13DC	2ASJU-M13DC	EUT
2	Control Box	USB-TTL	N/A	AE

#### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Not applicable

Note: The 2.4G TX function cannot transmit when charging.



Page 12 of 43

#### **6. TEST FACILITY**

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA

#### **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Jun. 01, 2023	May 31, 2024
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Jun. 01, 2023	May 31, 2024
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Mar. 23, 2023	Mar. 22, 2024
Broadband Preamplifier	ETS LINDGREN	3117-PA	00246148	Aug. 04, 2022	Aug. 03, 2024
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 05, 2023	Jan. 04, 2025
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



Page 13 of 43

#### 7. PEAK OUTPUT POWER


#### 7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer
- 2. RBW ≥ DTS bandwidth
- 3. VBW≥3\*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external cables.

## 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

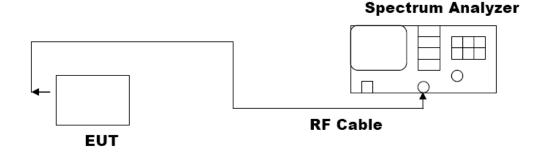




Page 14 of 43

#### 7.3. LIMITS AND MEASUREMENT RESULT

1.3. LIMITS AND	7.5. LIMITS AND MILASONLIMENT RESOLT					
	Test Data of Conducted Output Power					
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	-1.389	≤30	Pass		
GFSK	2440	-1.107	≤30	Pass		
	2480	-0.994	≤30	Pass		

**Test Graphs of Conducted Output Power** 













Page 16 of 43

#### 8. BANDWIDTH

#### **8.1. MEASUREMENT PROCEDURE**

#### 6dB bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW ≥ 3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

#### Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
  The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
  bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.


**Note:** The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

#### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.


#### 8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and DTS Bandwidth						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth(MHz)	-6dB Bandwidth Limits (MHz)	Pass or Fail	
	2402	2.054	1.159	≥0.5	Pass	
GFSK	2440	2.053	1.163	≥0.5	Pass	
	2480	2.053	1.159	≥0.5	Pass	







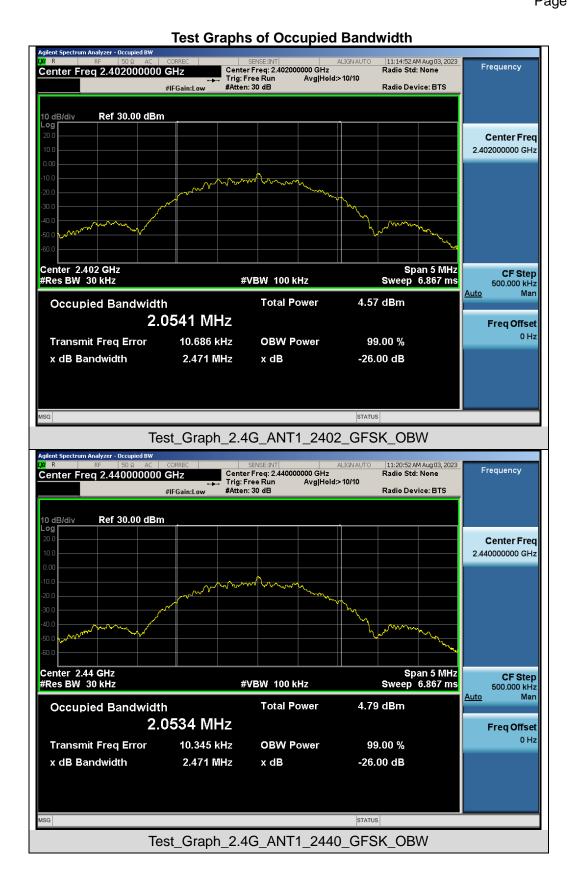






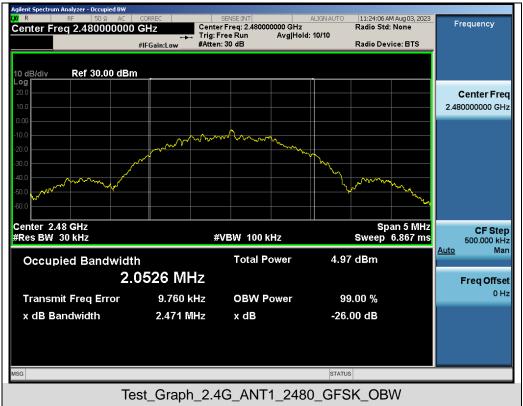

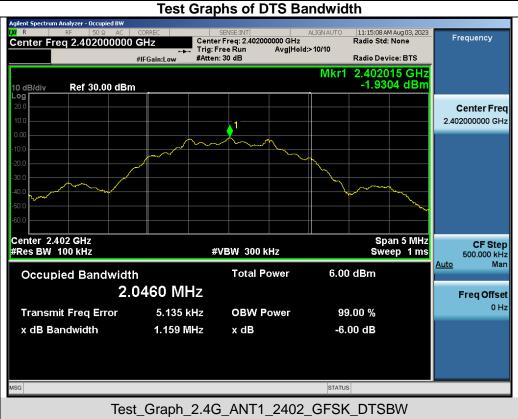







Test Graph 2.4G ANT1 2480 GFSK DTSBW

x dB

-6.00 dB

1.159 MHz

x dB Bandwidth



Page 20 of 43

#### 9. CONDUCTED SPURIOUS EMISSION

#### 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

#### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

#### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

#### 9.4. LIMITS AND MEASUREMENT RESULT

5.4. EIIII 16 AND IIIEAGONEINENT NEGGET						
LIMITS AND MEASUREMENT RESULT						
Applicable Limite	Measurement Result					
Applicable Limits	Test Data	Criteria				
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS				






Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_2.4G\_ANT1\_2402\_GFSK\_Lower Band Emissions






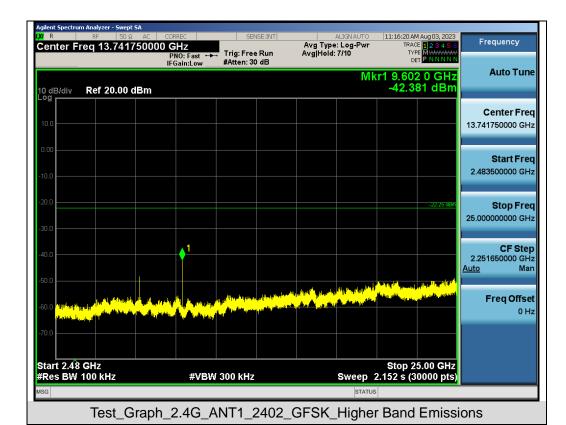


11:21:53 AM Aug 03, 2023 Avg Type: Log-Pwr Avg|Hold:>10/10 Frequency Center Freq 2.440000000 GHz Trig: Free Run #Atten: 30 dB PNO: Wide →→ IFGain:Low **Auto Tune** Mkr1 2.439 517 90 GHz -2.446 dBm 10 dB/div Ref 20.00 dBm Center Freq 2.440000000 GHz Start Freq 2.437500000 GHz Stop Frea 2.442500000 GHz **CF Step** 500,000 kHz Man Auto Freq Offset 0 Hz Center 2.440000 GHz #Res BW 100 kHz Span 5.000 MHz Sweep 2.000 ms (30000 pts)

Test\_Graph\_2.4G\_ANT1\_2440\_GFSK\_Reference Level

#VBW 300 kHz






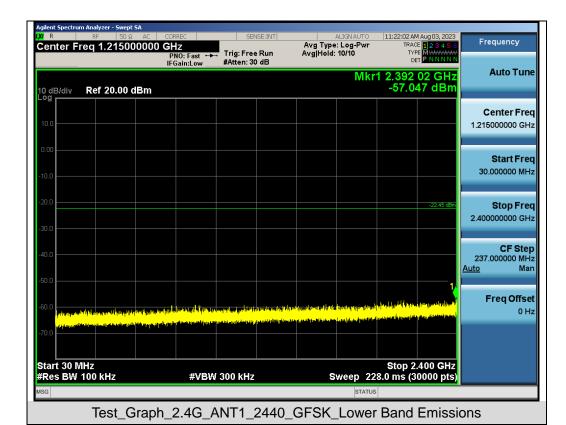




Test\_Graph\_2.4G\_ANT1\_2440\_GFSK\_Higher Band Emissions


#VBW 300 kHz









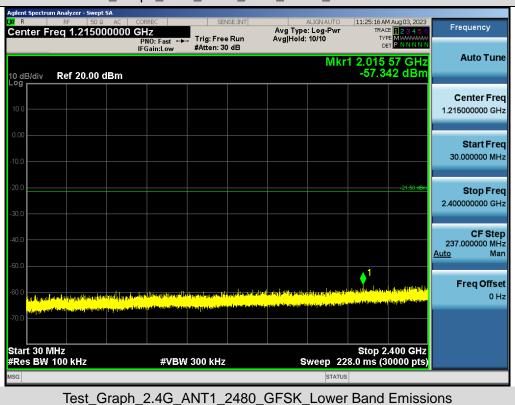






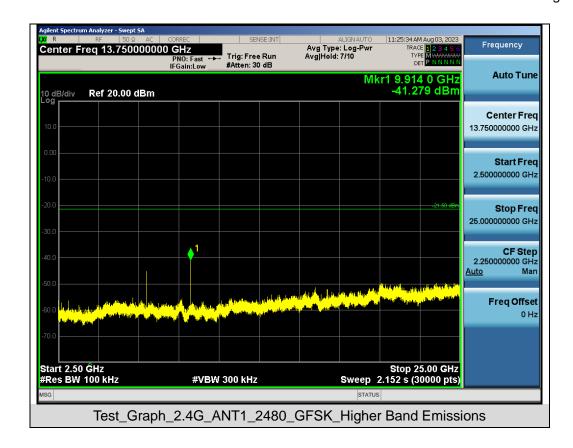





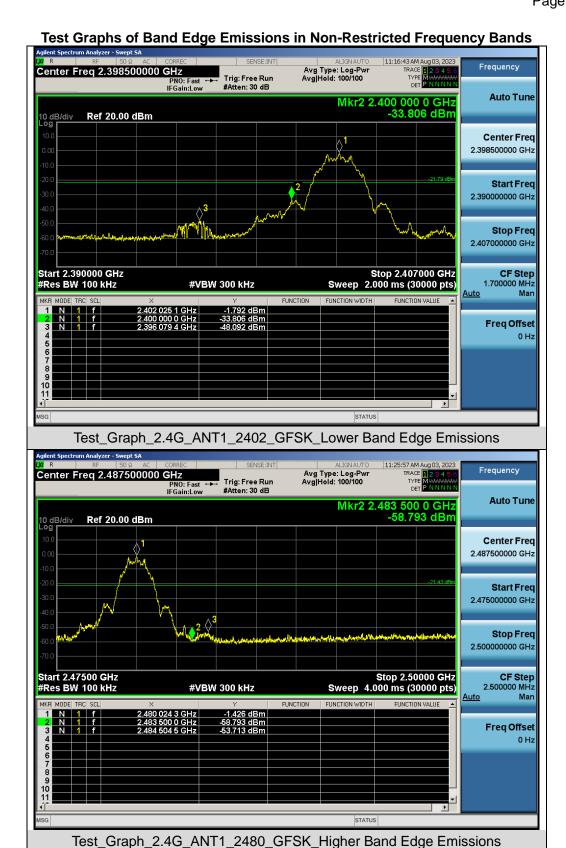



Page 27 of 43

#### 10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

#### 10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 8.4 was used in this testing.

#### 10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 7.2.


#### 10.3. MEASUREMENT EQUIPMENT USED


Refer to Section 6.

#### 10.4. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power Spectral Density					
Test Mode	Test Channel (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail	
	2402	-19.920	<b>≤8</b>	Pass	
GFSK	2440	-19.689	≤8	Pass	
	2480	-19.423	≪8	Pass	

Test Graphs of Conducted Output Power Spectral Density

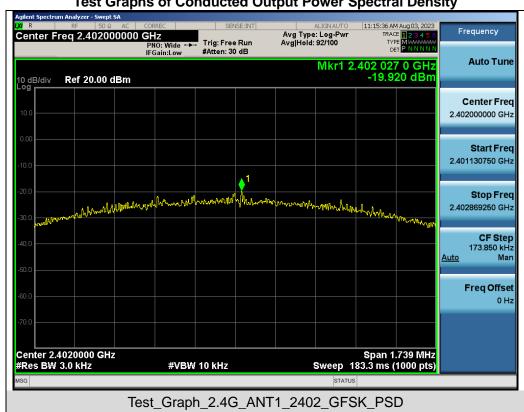




Freq Offset 0 Hz

Span 1.739 MHz Sweep 183.3 ms (1000 pts)



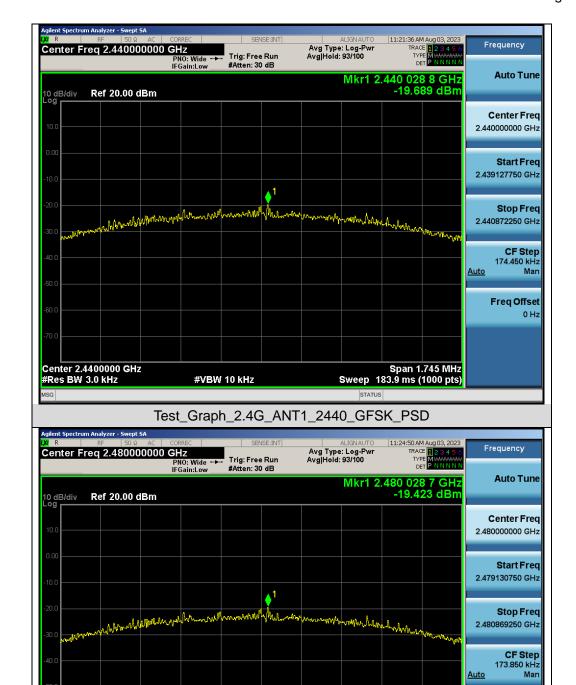

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_2.4G\_ANT1\_2480\_GFSK\_PSD

#VBW 10 kHz

Center 2.4800000 GHz #Res BW 3.0 kHz




Page 29 of 43

#### 11. RADIATED EMISSION

#### 11.1. MEASUREMENT PROCEDURE


- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.






#### 11.2. TEST SETUP


#### Radiated Emission Test-Setup Frequency Below 30MHz

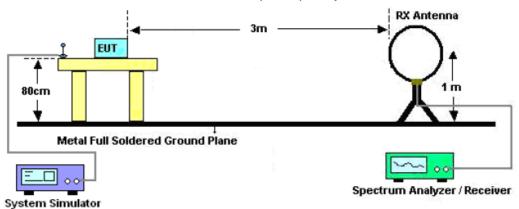

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

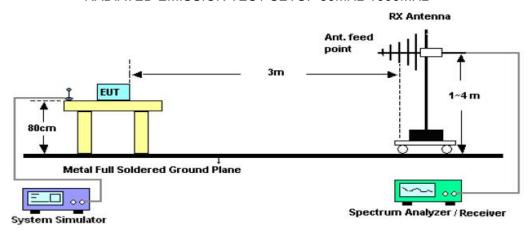

#### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

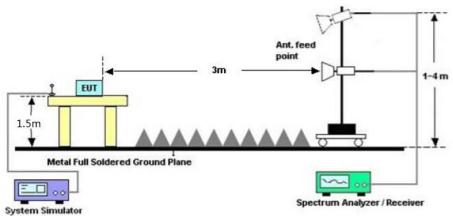



Page 31 of 43

#### 11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

#### 11.4. TEST RESULT

#### Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Page 32 of 43

#### Radiated emission from 30MHz to 1000MHz

EUT	Wireless lavalier microphone	Model Name	M13DC
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

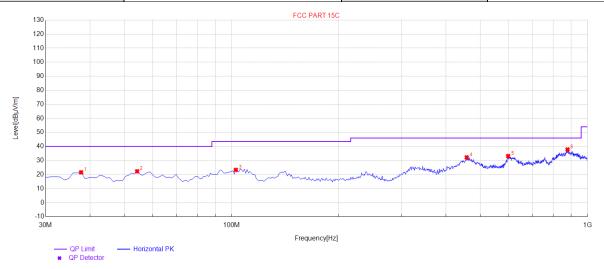


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	37.76	21.60	10.04	40.00	18.40	100	130	Horizontal
2	54.25	22.32	11.85	40.00	17.68	100	130	Horizontal
3	102.75	23.33	20.12	43.50	20.17	100	220	Horizontal
4	457.77	32.23	27.30	46.00	13.77	100	30	Horizontal
5	598.42	33.19	28.21	46.00	12.81	100	140	Horizontal
6	878.75	37.85	33.07	46.00	8.15	100	290	Horizontal

**RESULT: PASS** 



Page 33 of 43

EUT	Wireless lavalier microphone	Model Name	M13DC
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

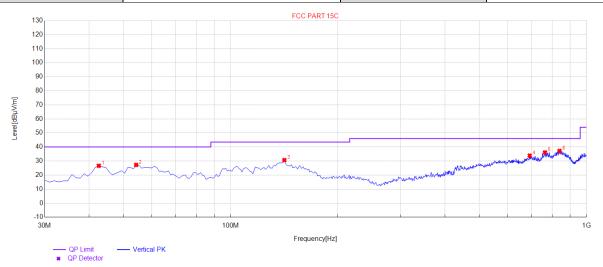

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	42.61	26.62	12.15	40.00	13.38	100	140	Vertical
2	54.25	27.22	14.00	40.00	12.78	100	50	Vertical
3	141.55	30.68	20.04	43.50	12.82	100	100	Vertical
4	692.51	33.85	28.64	46.00	12.15	100	260	Vertical
5	764.29	36.13	30.59	46.00	9.87	100	300	Vertical
6	839.95	37.20	32.54	46.00	8.80	100	80	Vertical

### RESULT: PASS Note:

- 1. Factor=Antenna Factor + Cable loss, Margin= Limit –Level.
- 2. All test modes had been tested. The mode 3 is the worst case and recorded in the report.



Page 34 of 43

#### Radiated emission above 1GHz

EUT	Wireless lavalier microphone	Model Name	M13DC
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	43.36	0.08	43.44	74	-30.56	peak
4804.000	35.29	0.08	35.37	54	-18.63	AVG
7206.000	38.91	2.21	41.12	74	-32.88	peak
7206.000	31.33	2.21	33.54	54	-20.46	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Wireless lavalier microphone	Model Name	M13DC
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.000	44.61	0.08	44.69	74	-29.31	peak
4804.000	34.91	0.08	34.99	54	-19.01	AVG
7206.000	38.32	2.21	40.53	74	-33.47	peak
7206.000	30.17	2.21	32.38	54	-21.62	AVG

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Page 35 of 43

EUT	Wireless lavalier microphone	Model Name	M13DC
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	44.69	0.14	44.83	74	-29.17	peak
4880.000	35.33	0.14	35.47	54	-18.53	AVG
7320.000	39.81	2.36	42.17	74	-31.83	peak
7320.000	31.91	2.36	34.27	54	-19.73	AVG
Remark:	•		•			1
Factor = Anter	na Factor + Cabl	e Loss – Pre-a	mnlifier			

Factor = Antenna Factor + Cable Loss - Pre-amplitier.

EUT	Wireless lavalier microphone	Model Name	M13DC
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	45.22	0.14	45.36	74	-28.64	peak
4880.000	38.38	0.14	38.52	54	-15.48	AVG
7320.000	40.72	2.36	43.08	74	-30.92	peak
7320.000	32.93	2.36	35.29	54	-18.71	AVG

#### Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Page 36 of 43

EUT	Wireless lavalier microphone	Model Name	M13DC
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	44.39	0.22	44.61	74	-29.39	peak
4960.000	35.77	0.22	35.99	54	-18.01	AVG
7440.000	38.83	2.64	41.47	74	-32.53	peak
7440.000	29.22	2.64	31.86	54	-22.14	AVG
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier			

EUT	Wireless lavalier microphone	Model Name	M13DC
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	42.32	0.22	42.54	74	-31.46	peak
4960.000	34.66	0.22	34.88	54	-19.12	AVG
7440.000	38.31	2.64	40.95	74	-33.05	peak
7440.000	29.61	2.64	32.25	54	-21.75	AVG
Remark:						
<sup>-</sup> actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			

#### **RESULT: PASS**

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.







Test result for band edge emission at restricted bands

EUT	Wireless lavalier microphone	Model Name	M13DC
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal


Test Graph for Peak Measurement

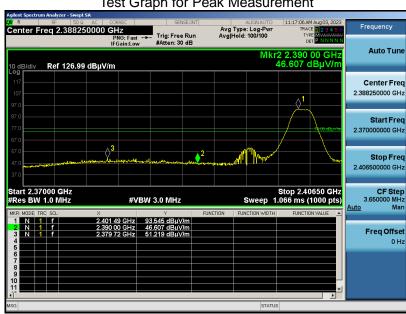



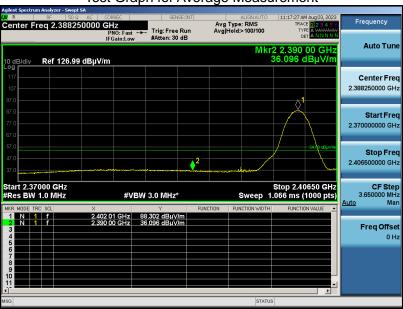


**RESULT: PASS** 






**EUT Model Name** M<sub>13</sub>DC Wireless lavalier microphone 25° C **Temperature Relative Humidity** 55.4% 960hPa **Test Voltage** Normal Voltage **Pressure Test Mode** Mode 1 **Antenna** Vertical


Test Graph for Peak Measurement

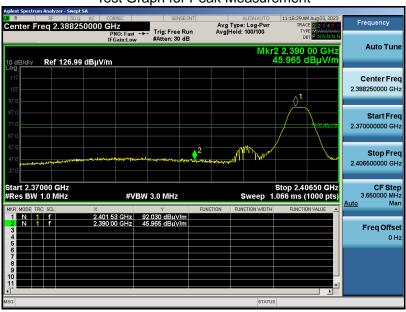



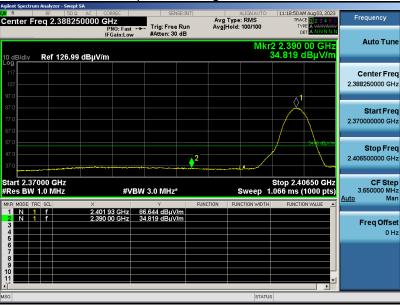


**RESULT: PASS** 







**EUT** M<sub>13</sub>DC Wireless lavalier microphone **Model Name** 25° C **Temperature Relative Humidity** 55.4% 960hPa **Test Voltage** Normal Voltage **Pressure Test Mode** Mode 3 **Antenna** Horizontal


Test Graph for Peak Measurement

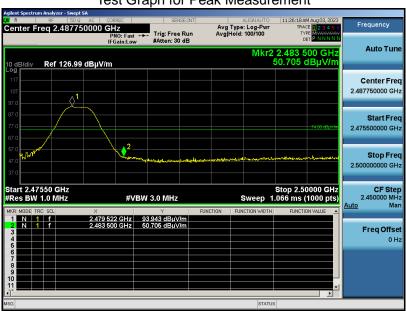



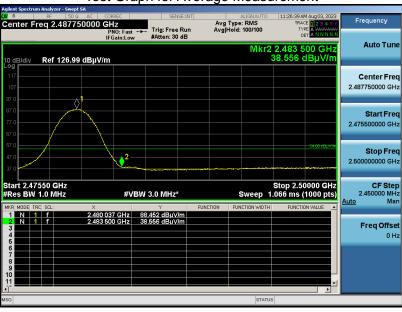


**RESULT: PASS** 






**EUT** M<sub>13</sub>DC Wireless lavalier microphone **Model Name** 25° C **Temperature Relative Humidity** 55.4% 960hPa Normal Voltage **Pressure Test Voltage Test Mode** Mode 3 **Antenna** Vertical

Test Graph for Peak Measurement

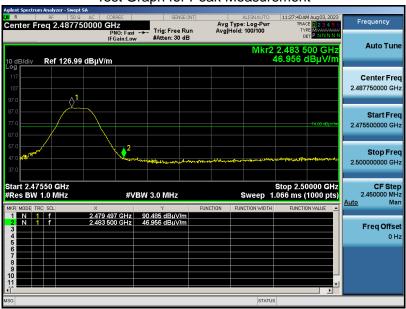



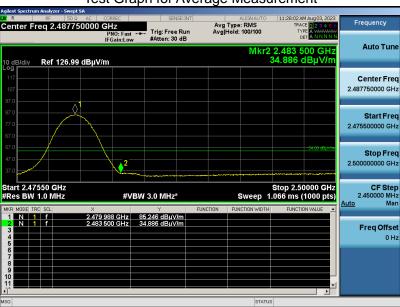

#### **RESULT: PASS**

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



Page 41 of 43

#### 12. LINE CONDUCTED EMISSION TEST


#### 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

#### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

#### 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

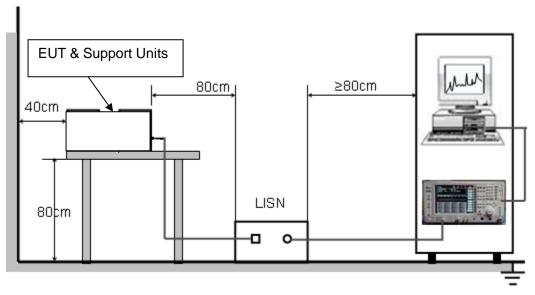



Page 42 of 43

#### 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 3.7V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

#### 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

#### 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

N/A

Note: The 2.4G TX function cannot transmit when charging.



Page 43 of 43

#### APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC10732230801AP01

**APPENDIX B: PHOTOGRAPHS OF EUT** 

Refer to the Report No.: AGC10732230801AP02

----END OF REPORT----



### Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.