

天线产品规格书

PRODUCT SPECIFICATION

1、产品技术指标 (PRODUCT TECHNICAL SPECIFICATION)

电性能指标Electrical Specifications	
频率范围Frequency Range (MHz)	2400-2500
频带宽度Bandwidth (MHz)	100
输入阻抗Input Impedence (Ω)	50
电压驻波比V.S.W.R	≤ 2
增益Gain (dBi)	$0 \pm 0.8\text{dBi}$
极化形式Polarization Type	垂直Vertical
雷电保护Lightning Protection	交流接地
功率容量Power Capacity (w)	0.5
机械指标Mechanical Specifications	
天线长度Antenna Length (mm)	$\text{Ø}1.5 \times 33$ 和 $\text{Ø}1.5 \times 80$
辐射体Radiator	铜Cu
连接器型号Connect Type	直接焊接
工作温度Working Temp($^{\circ}\text{C}$)	-40~65
储藏温度Storage Temperature($^{\circ}\text{C}$)	-40~80
颜色Color	透明
重量Weight (g)	0.37g(8cm长)和0.15g(3.3cm)


产品简介

该天线是专为四驱动飞碟设计生产的，天线具有性价比高，结构小巧，生产方便的优点。


2、产品图片（PRODUCT PICTURE）



3、产品规格图(PRODUCT SPECIFICATION CHART)

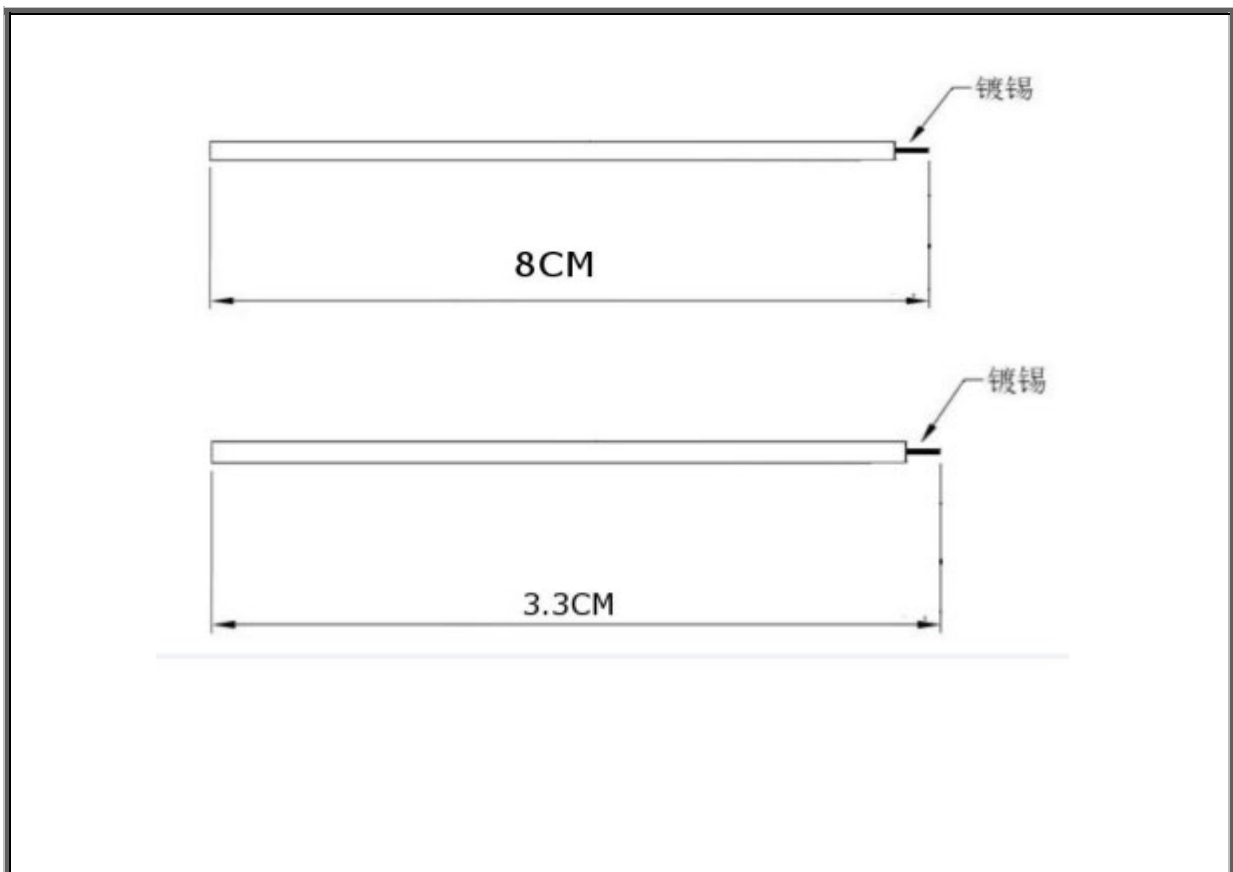

4、驻波图（STATIONARY WAVE PATTERN）

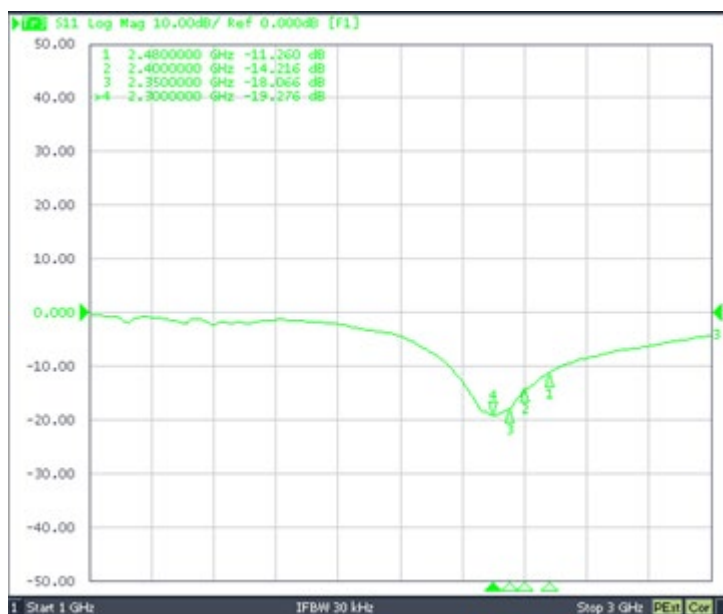

5、增益图

