



Label and Label Location



LABEL 20 FCC Single 07

The location of the label shall be defined on the assembly drawing.

IMPORTANT: the FCC label are added only on UBT-S 5.8-6GHz HP.

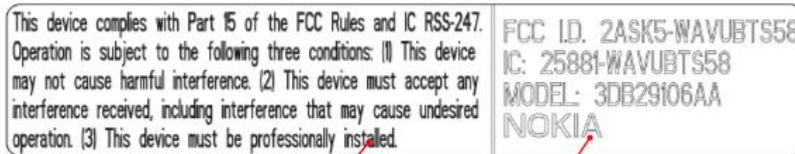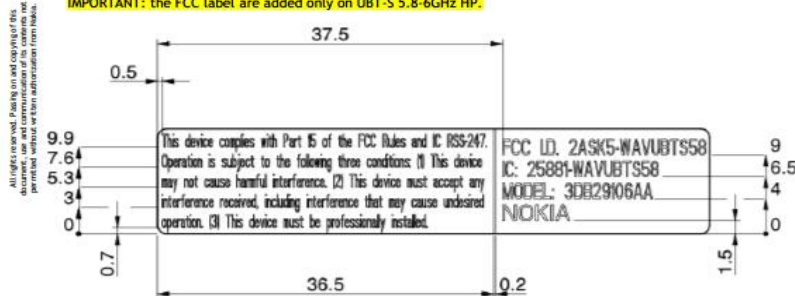


A

B

Label material: 3DB29416AAAA		Label color: White		
Label dimension: 60 x 12 mm		Application: FCC Single label Identification		
Field	Field Name	Height Char.	Text length	Note
A	FCC legal text	1.5 mm	288 characters	Nokia pure text
B	FCC identification	1.8 mm	61 Characters	Nokia pure text

FCC Label Placement
See Note 903



Top View
UBT-S ODU

This device complies with Part 15 of the FCC Rules and IC RSS-247. Operation is subject to the following three conditions: (1) This device may not cause harmful interference. (2) This device must accept any interference received, including interference that may cause undesired operation. (3) This device must be professionally installed.

FCC ID: 2ASK5-WAVUBTS58
IC: 25881-WAVUBTS58
MODEL: 3DB29106AA
Nokia

WAVUBTS58 Naming Convention

WAVUBTS58-U256F30-283

- Data Payload Capacity: 14, 28, 37, 45, 46, 54, 62, 67, 75, 82, 91, 114, 142, 168, 189, 212, 236, 261, 283
- RF Bandwidth: 10MHz, 30MHz
- A=Adaptive Modulation, F=Fixed Modulation.
- Modulation Scheme: 4=4QAM, 16=16QAM, 32=32QAM, 64=64QAM, 128=128QAM, 256=256QAM, 512=512QAM, 1024=1024QAM, 2048=2048QAM, 4096=4096QAM
- U=UBT-S
- WAVUBTS58=Microwave Packet Radio, Frequency Band: 58=5.725-5.850