



Accreditation
N°1-1633
Scope available on
www.cofrac.fr

Template : May 28th, 2024

TEST REPORT

N°: 22597699-801747-A(FILE#5652354)

Version: 01

Subject

Radio spectrum tests according to the standards:
FCC CFR 47 Part 15.247 & ANSI C63.10
RSS-247 & RSS-Gen

Issued to

ENLAPS
26 avenue Jean Kuntzmann
38330 – MONTBONNOT
FRANCE

Apparatus under test

- Product
- Trade mark
- Manufacturer
- Model under test
- Serial number
- FCCID
- IC

Timelapse digital cameras
enlaps™
ENLAPS
Tikee mini
M-MIN-0A-001105 / M-MIN-0A-001090
2ASLI-TIKEEM01
24785-TIKEEM01

Conclusion

See Test Program chapter

Test date July 02, 2024 to July 18, 2024
Test location LCIE Grenoble
FCC Test site FR0008 - 918017 (MOI)
ISED Test site 6500A (MOI)
Sample receipt date July 02, 2024
Composition of document 65 pages
Document issued on July 18, 2024

Written by :

Akram HAKKARI
Tests operator

Approved by :

Majid MOURZAGH
Technical manager



Reproduction of this document is only authorized in its complete form. Any partial reproduction or any insertion of results in an accompanying text with a view to their distribution must receive prior and formal agreement from LCIE. This document results from tests carried out on a specimen, sample or test piece. It does not prejudice the conformity of all the products manufactured to the object tested. Unless otherwise indicated or rule specified by the test method, the decision of conformity does not take into account measurement uncertainty. It in no way prejudices a certification decision. The accreditation of the COFRAC Testing Section attests to the technical competence of the laboratories for the tests covered by the accreditation only. If certain tests mentioned in this report were carried out outside the framework of COFRAC accreditation, they are identified by the symbol

LCIE
Laboratoire Central des Industries Electriques
Une société Bureau Veritas

Z.I Centr'alp
170, Rue de Chatagnon
38430 Moirans
FRANCE

Tél. + 33 4 76 07 36 36
contact@lcie.fr
www.lcie.fr



PUBLICATION HISTORY

| Version | Date | Author | Modification |
|---------|---------------|---------------|--------------------------|
| 01 | July 18, 2024 | Akram HAKKARI | Creation of the document |

Each new edition of this test report replaces and cancels the previous edition. The control of the old editions of report is under responsibility of client.



SUMMARY

| | | |
|----|---|----|
| 1. | TEST PROGRAM | 4 |
| 2. | EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)..... | 5 |
| 3. | OCCUPIED BANDWIDTH..... | 12 |
| 4. | 6DB BANDWIDTH | 22 |
| 5. | MAXIMUM CONDUCTED OUTPUT POWER | 28 |
| 6. | POWER SPECTRAL DENSITY | 35 |
| 7. | UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS | 41 |
| 8. | UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS | 48 |
| 9. | UNCERTAINTIES CHART | 65 |



1. TEST PROGRAM

References

- 47 CFR Part 15.247 (2023)
- RSS 247 Issue 3
- RSS Gen Issue 5
- KDB 558074 D01 DTS Meas Guidance v05r02 [Pb](#)
- KDB 662911 D01 Multiple Transmitter Output v02r01 [Pb](#)
- ANSI C63.10 (2013)

Radio requirement:

| Clause - Test Description | | Test result - Comments |
|---|-----------------------|------------------------|
| Occupied Bandwidth | <i>ISED</i> | PASS |
| 6dB Bandwidth | <i>FCC & ISED</i> | PASS |
| Maximum Conducted Output Power | <i>FCC & ISED</i> | PASS |
| Power Spectral Density | <i>FCC & ISED</i> | PASS |
| Unwanted Emissions in Non-Restricted Frequency Bands | <i>FCC & ISED</i> | PASS |
| Unwanted Emissions in Restricted Frequency Bands | <i>FCC & ISED</i> | PASS |
| Receiver Radiated Emissions | <i>ISED</i> | PASS(2) |
| This table is a summary of test report, see conclusion of each clause of this test report for detail. | | |

(1) Limited program

(2) Testing covered the receive mode, and receiver spurious emissions are considered to be the same as transmitter.

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement

NA: Not Applicable

NP: Test Not Performed

2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)

2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT):

| | |
|---|---|
| Model under test: | Tikee mini |
| Serial Number: | M-MIN-0A-001105 / M-MIN-0A-001090 |
|  | |
| Dimensions: | 12.5cm x 13cm x 7cm (Length x Width x Height) |
| Type: | Table-Top |

Power supply:

| Name | Type | Rating | Reference / Sn | Comments |
|---------|---------|------------------------|-------------------------------------|--|
| Supply1 | Battery | 3.6Vdc [2.5Vdc-4.2Vdc] | / | Internal battery charged by USB-C or proprietary connector |
| Supply2 | AC | 100-240V/50-60Hz | SAMSUNG EP-TA200 | USB-C, No provided by manufacturer |
| Supply3 | AC | 100-240V/50-60Hz | Intertek MX15Z-0502500VX E467127 | Proprietary, No provided by manufacturer |

NC: Not communicated by provider

**Inputs/outputs - Cable:**

| Access | Type | Length used (m) | Declared <3m | Shielded | Under test | Comments |
|---------|---|-----------------|--------------|----------|------------|-----------------------------|
| Supply1 | Internal Battery | / | / | / | / | / |
| Supply2 | USB-C: Samsung SMPS, only supply access for user other than debug | 2 | Yes | Yes | Yes | No provided by manufacturer |
| Supply3 | Proprietary connector: Intertek SMPS (solar panel possible) | 2 | Yes | No | Yes | No provided by manufacturer |
| Access1 | µSD connector | / | NA | NA | NA | / |
| Access2 | SIM connector | / | NA | NA | NA | / |

NC: Not communicated by provider

Auxiliary equipment used during test:

| Type | Reference | Sn | Comments |
|-------------|-----------|----|----------|
| ASUS Router | - | - | - |
| Laptop | LENOVO | - | - |

NC: Not communicated by provider



Equipment information (declaration of provider):

| WiFi | | | |
|------------------------------|---|---|--|
| Chipset / RF Module | Ampak AP6256 | | |
| Frequency band: | [2400 – 2483.5] MHz | | |
| Standard: | <input checked="" type="checkbox"/> 802.11b | <input checked="" type="checkbox"/> 802.11g | <input checked="" type="checkbox"/> 802.11n HT20 <input type="checkbox"/> 802.11n HT40 |
| Spectrum Modulation: | DSSS | OFDM | |
| Number of Channel: | 11 max (see channel plan) | | |
| Spacing channel: | 5MHz | | |
| Channel bandwidth: | 20MHz | | |
| Antenna Type: | Internal | | |
| Antenna connector: | Temporary for tests | | |
| Antenna requirements §15.203 | The transmitter uses an integral antenna and it permanently connected | | |
| Transmit chains: | 1 | | |
| Beamforming gain: | No | | |
| Receiver chains | 1 | | |
| Ad-Hoc mode: | No | | |

| CHANNEL PLAN | | | |
|----------------------------------|-----------------|----------------|-----------------|
| 802.11b / 802.11g / 802.11n HT20 | | 802.11n HT40 | |
| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| Cmin: 1 | 2412 | Cmin: 3 | 2422 |
| 2 | 2417 | 4 | 2427 |
| 3 | 2422 | 5 | 2432 |
| 4 | 2427 | Cmid: 6 | 2437 |
| 5 | 2432 | 7 | 2442 |
| Cmid: 6 | 2437 | 8 | 2447 |
| 7 | 2442 | Cmax: 9 | 2452 |
| 8 | 2447 | | |
| 9 | 2452 | | |
| 10 | 2457 | | |
| Cmax: 11 | 2462 | | |

| DATA RATE | | | |
|-------------------------------------|------------------|--------------------------|-------------------------------------|
| 802.11b | | | |
| Available for EUT | Data Rate (Mbps) | Modulation Type | Modulation Worst Case |
| <input checked="" type="checkbox"/> | 1 | DBPSK | <input checked="" type="checkbox"/> |
| | 2 | DQPSK | <input type="checkbox"/> |
| | 5.5 | DQPSK | <input type="checkbox"/> |
| | 11 | CCK | <input type="checkbox"/> |
| 802.11g | | | |
| Available for EUT | Data Rate (Mbps) | Modulation Type | Modulation Worst Case |
| <input checked="" type="checkbox"/> | 6 | BPSK | <input checked="" type="checkbox"/> |
| | 9 | BPSK | <input type="checkbox"/> |
| | 12 | QPSK | <input type="checkbox"/> |
| | 18 | QPSK | <input type="checkbox"/> |
| | 24 | 16-QAM | <input type="checkbox"/> |
| | 36 | 16-QAM | <input type="checkbox"/> |
| | 48 | 64-QAM | <input type="checkbox"/> |
| 54 | 64-QAM | <input type="checkbox"/> | |



L C I E

| DATA RATE | | | | | | | | | |
|-------------------|-----------|-----------------|------------|--------|--------|--------|------------------|--------------|-----------------------|
| 802.11n HT20 | | | | | | | | | |
| Available for EUT | MCS Index | Spatial streams | Modulation | | | | Data Rate (Mbps) | | Worst Case Modulation |
| | | | | | | | (GI = 800ns) | (GI = 400ns) | |
| ☑ | 0 | 1 | BPSK | | | | 6.5 | 7.2 | ☑ |
| | 1 | 1 | QPSK | | | | 13 | 14.4 | ☐ |
| | 2 | 1 | QPSK | | | | 19.5 | 21.7 | ☐ |
| | 3 | 1 | 16-QAM | | | | 26 | 28.9 | ☐ |
| | 4 | 1 | 16-QAM | | | | 39 | 43.3 | ☐ |
| | 5 | 1 | 64-QAM | | | | 52 | 57.8 | ☐ |
| | 6 | 1 | 64-QAM | | | | 58.5 | 65 | ☐ |
| | 7 | 1 | 64-QAM | | | | 65 | 72.2 | ☐ |
| ☐ | 32 | 1 | BPSK | | | | - | - | ☐ |
| | 8 | 2 | BPSK | | | | 13 | 14.4 | ☐ |
| | 9 | 2 | QPSK | | | | 26 | 28.9 | ☐ |
| | 10 | 2 | QPSK | | | | 39 | 43.3 | ☐ |
| | 11 | 2 | 16-QAM | | | | 52 | 57.8 | ☐ |
| | 12 | 2 | 16-QAM | | | | 78 | 86.7 | ☐ |
| | 13 | 2 | 64-QAM | | | | 104 | 115.6 | ☐ |
| | 14 | 2 | 64-QAM | | | | 117 | 130.3 | ☐ |
| | 15 | 2 | 64-QAM | | | | 130 | 144.4 | ☐ |
| | 33 | 2 | 16-QAM | QPSK | - | - | 39 | 43.3 | ☐ |
| | 34 | 2 | 64-QAM | QPSK | - | - | 52 | 57.8 | ☐ |
| | 35 | 2 | 64-QAM | 16-QAM | - | - | 65 | 72.2 | ☐ |
| | 36 | 2 | 16-QAM | QPSK | - | - | 58.5 | 65 | ☐ |
| | 37 | 2 | 64-QAM | QPSK | - | - | 78 | 86.7 | ☐ |
| | 38 | 2 | 64-QAM | 16-QAM | - | - | 97.5 | 108.3 | ☐ |
| | ☐ | 16 | 3 | BPSK | | | | 19.5 | 21.7 |
| 17 | | 3 | QPSK | | | | 39 | 43.3 | ☐ |
| 18 | | 3 | QPSK | | | | 58.5 | 65 | ☐ |
| 19 | | 3 | 16-QAM | | | | 78 | 86.7 | ☐ |
| 20 | | 3 | 16-QAM | | | | 117 | 130 | ☐ |
| 21 | | 3 | 64-QAM | | | | 156 | 173.3 | ☐ |
| 22 | | 3 | 64-QAM | | | | 175.5 | 195 | ☐ |
| 23 | | 3 | 64-QAM | | | | 195 | 216.7 | ☐ |
| 39 | | 3 | 16-QAM | QPSK | QPSK | - | 52 | 57.8 | ☐ |
| 40 | | 3 | 16-QAM | 16-QAM | QPSK | - | 65 | 72.2 | ☐ |
| 41 | | 3 | 64-QAM | QPSK | QPSK | - | 65 | 72.2 | ☐ |
| 42 | | 3 | 64-QAM | 16-QAM | QPSK | - | 78 | 86.7 | ☐ |
| 43 | | 3 | 64-QAM | 16-QAM | 16-QAM | - | 91 | 101.1 | ☐ |
| 44 | | 3 | 64-QAM | 64-QAM | QPSK | - | 91 | 101.1 | ☐ |
| 45 | | 3 | 64-QAM | 64-QAM | 16-QAM | - | 104 | 115.6 | ☐ |
| 46 | | 3 | 16-QAM | QPSK | QPSK | - | 78 | 86.7 | ☐ |
| 47 | 3 | 16-QAM | 16-QAM | QPSK | - | 97.5 | 108.3 | ☐ | |
| 48 | 3 | 64-QAM | QPSK | QPSK | - | 97.5 | 108.3 | ☐ | |
| 49 | 3 | 64-QAM | 16-QAM | QPSK | - | 117 | 130 | ☐ | |
| 50 | 3 | 64-QAM | 16-QAM | 16-QAM | - | 136.5 | 151.7 | ☐ | |
| 51 | 3 | 64-QAM | 64-QAM | QPSK | - | 136.5 | 151.7 | ☐ | |
| 52 | 3 | 64-QAM | 64-QAM | 16-QAM | - | 156 | 173.3 | ☐ | |
| ☐ | 24 | 4 | BPSK | | | | 26 | 28.9 | ☐ |
| | 25 | 4 | QPSK | | | | 52 | 57.8 | ☐ |
| | 26 | 4 | QPSK | | | | 78 | 86.7 | ☐ |
| | 27 | 4 | 16-QAM | | | | 104 | 115.6 | ☐ |
| | 28 | 4 | 16-QAM | | | | 156 | 173.3 | ☐ |
| | 29 | 4 | 64-QAM | | | | 208 | 231.1 | ☐ |
| | 30 | 4 | 64-QAM | | | | 234 | 260 | ☐ |
| | 31 | 4 | 64-QAM | | | | 260 | 288.9 | ☐ |
| | 53 | 4 | 16-QAM | QPSK | QPSK | QPSK | 65 | 72.2 | ☐ |
| | 54 | 4 | 16-QAM | 16-QAM | QPSK | QPSK | 78 | 86.7 | ☐ |
| | 55 | 4 | 16-QAM | 16-QAM | 16-QAM | QPSK | 91 | 101.1 | ☐ |
| | 56 | 4 | 64-QAM | QPSK | QPSK | QPSK | 78 | 86.7 | ☐ |
| | 57 | 4 | 64-QAM | 16-QAM | QPSK | QPSK | 91 | 101.1 | ☐ |
| | 58 | 4 | 64-QAM | 16-QAM | 16-QAM | QPSK | 104 | 115.6 | ☐ |
| | 59 | 4 | 64-QAM | 16-QAM | 16-QAM | 16-QAM | 117 | 130 | ☐ |
| | 60 | 4 | 64-QAM | QPSK | QPSK | QPSK | 104 | 115.6 | ☐ |
| | 61 | 4 | 64-QAM | 16-QAM | 16-QAM | QPSK | 117 | 130 | ☐ |
| | 62 | 4 | 64-QAM | 16-QAM | 16-QAM | 16-QAM | 130 | 144.4 | ☐ |
| | 63 | 4 | 64-QAM | 64-QAM | 64-QAM | QPSK | 130 | 144.4 | ☐ |
| | 64 | 4 | 64-QAM | 64-QAM | 64-QAM | 16-QAM | 143 | 158.9 | ☐ |
| | 65 | 4 | 16-QAM | QPSK | QPSK | QPSK | 97.5 | 108.3 | ☐ |
| | 66 | 4 | 16-QAM | 16-QAM | QPSK | QPSK | 117 | 130 | ☐ |
| 67 | 4 | 16-QAM | 16-QAM | 16-QAM | QPSK | 136.5 | 151.7 | ☐ | |
| 68 | 4 | 64-QAM | QPSK | QPSK | QPSK | 117 | 130 | ☐ | |
| 69 | 4 | 64-QAM | 16-QAM | QPSK | QPSK | 136.5 | 151.7 | ☐ | |
| 70 | 4 | 64-QAM | 16-QAM | 16-QAM | QPSK | 156 | 173.3 | ☐ | |
| 71 | 4 | 64-QAM | 16-QAM | 16-QAM | 16-QAM | 175.5 | 195 | ☐ | |
| 72 | 4 | 64-QAM | 64-QAM | QPSK | QPSK | 156 | 173.3 | ☐ | |
| 73 | 4 | 64-QAM | 64-QAM | 16-QAM | QPSK | 175.5 | 195 | ☐ | |
| 74 | 4 | 64-QAM | 64-QAM | 16-QAM | 16-QAM | 195 | 216.7 | ☐ | |



L C I E

| | | | | | | | | | |
|--|----|---|--------|--------|--------|--------|-------|-------|--------------------------|
| | 75 | 4 | 64-QAM | 64-QAM | 64-QAM | QPSK | 195 | 216.7 | <input type="checkbox"/> |
| | 76 | 4 | 64-QAM | 64-QAM | 64-QAM | 16-QAM | 214.5 | 238.3 | <input type="checkbox"/> |

| Antenna Characteristic | | | |
|------------------------|------------|----------------------|-----------------------|
| Antenna reference | Gain (dBi) | Frequency Band (MHz) | Impedance(Ω) |
| Taoglas WLA.01 | 1 | 2400 – 2483.5 | 50 |

| Hardware information | | | |
|---|------------------------------|------------------|------------|
| Highest internal frequency (PLL, Quartz, Clock, Microprocessor...): | F_{Highest}: | NC | MHz |
| Firmware (if applicable): | V: | 6.0.2 / MP0.3.10 | |
| Software (if applicable): | V: | NA | |
| Equipment intended: | Fixed | | |
| Type of equipment: | Stand-alone | | |
| Equipment sample: | Production model | | |
| Duty cycle: | Continuous operation | | |
| Operating temperature range: | T_{min} : | -10 °C | |
| | T_{nom} : | 20 °C | |
| | T_{max} : | 55 °C | |
| Operating voltage: | V_{min} (85% V_{nom}): | 3.06 | |
| | V_{nom} : | 3.6 | |
| | V_{max} (115% V_{nom}): | 4.14 | |

NC: Not communicated by provider

2.2. RUNNING MODE

| Test mode | Description of test mode |
|-------------|---|
| Test mode 1 | Permanent emission with modulation on a fixed channel in the data rate that produced the highest power. |
| Test mode 2 | Permanent reception |

| Test | Running mode |
|--|-----------------|
| Occupied Bandwidth | Test mode 1 |
| 6dB Bandwidth | Test mode 1 |
| Maximum Conducted Output Power | Test mode 1 |
| Power Spectral Density | Test mode 1 |
| Conducted Spurious Emission at the Band Edge | Test mode 1 |
| Unwanted Emissions in Non-Restricted Frequency Bands | Test mode 1 |
| Unwanted Emissions in Restricted Frequency Bands | Test mode 1 |
| Receiver Radiated Emissions | Test mode 2 (1) |

(1) Testing covered the receive mode, and receiver spurious emissions are considered to be the same as transmitter.

2.3. EQUIPMENT LABELLING

| Label |
|--|
|  |

2.4. EQUIPMENT MODIFICATIONS DURING THE TESTS

None



2.5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow:

$$FS = RA + AF + CF - AG$$

Where:

FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Factor

AG = Amplifier Gain

Example:

Assume a receiver reading of 52.5dB μ V is obtained. The antenna factor of 7.4 and a cable factor of 1.1 are added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dB μ V/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m.}$$

2.6. TEST DISTANCE EXTRAPOLATION – FCC/ISED

The field strength is extrapolated to the new measurement distance using formula from FCC Part15.31 (f) and §6.5-6.6 RSS-GEN:

Below 30MHz,

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

Above 30MHz,

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

Where:

FS_{limit} is the calculation of field strength at the limit distance, expressed in dB μ V/m

FS_{max} is the measured field strength, expressed in dB μ V/m

d_{measure} is the distance of the measurement point from the EUT

d_{limit} is the reference limit distance

2.7. CALIBRATION DATE

The calibration intervals are extended at 12+2 months. This extended interval is based on the fact that there is sufficient calibration data to statistically establish a trend or based on experience of use of the test equipment to assure good measurement results for a longer period. The symbol -/- replaces the date for equipment checking before test or that have none impact on the test or that have no calibration required by the standard.

2.8. METHOD TO DETERMINATE THE SPURIOUS RADIATED EMISSION

The Normalized Site Attenuation (NSA) is added to the maximum values observed during the azimuth search in order to obtain the spurious radiated emission. For spurious above -6dB from the limit found with the NSA, the Substitution Method is applied.

The substitution antenna replaces the equipment under test (EUT) for Effective Radiated Power (ERP) or Effective Isotropically Radiated Power (EIRP) measurement following the standard. Power is measured for a high level and calculated for the same level of radiated field strength obtained on the measuring antenna and EUT.

3. DUTY CYCLE

3.1. TEST CONDITIONS

Date of test : July 17, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 33
Ambient temperature (°C) : 22

3.2. TEST SETUP


The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency.
The captured power is measured and recorded.

Test Procedure:

ANSI C63.10 § 11.6

- Zero-span mode
- $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value
- $VBW \geq RBW$
- Detector = Peak
- Trace mode = Max Hold.
- Sweep time $> 3 * \text{Period time anticipated}$
- Sweep = Single
- Trigger Video

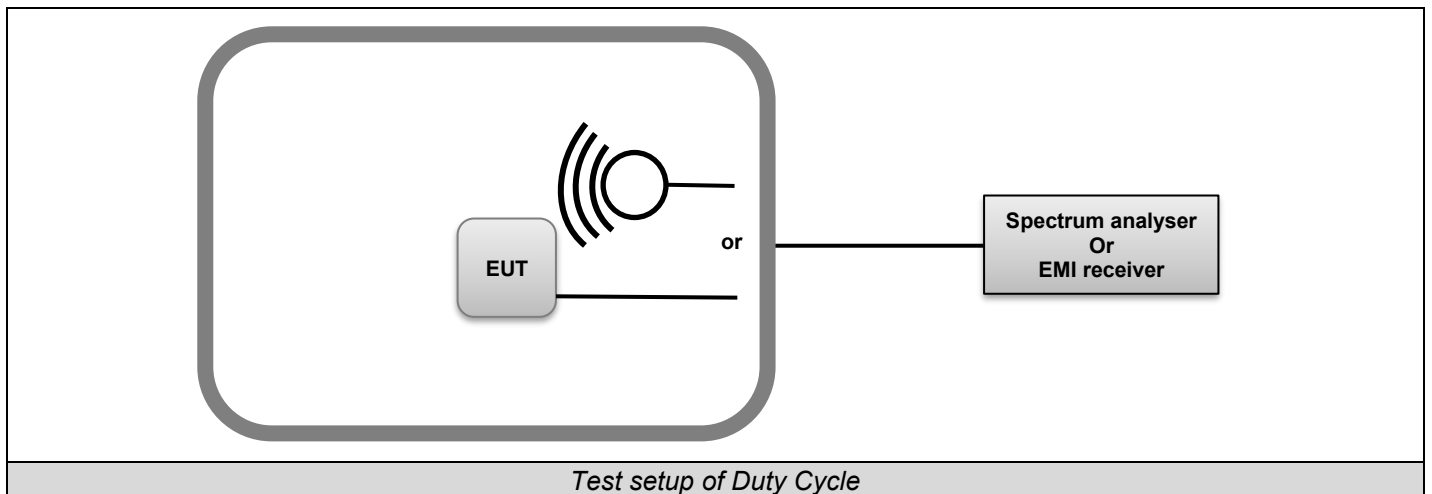

Test setup of Duty Cycle



L C I E

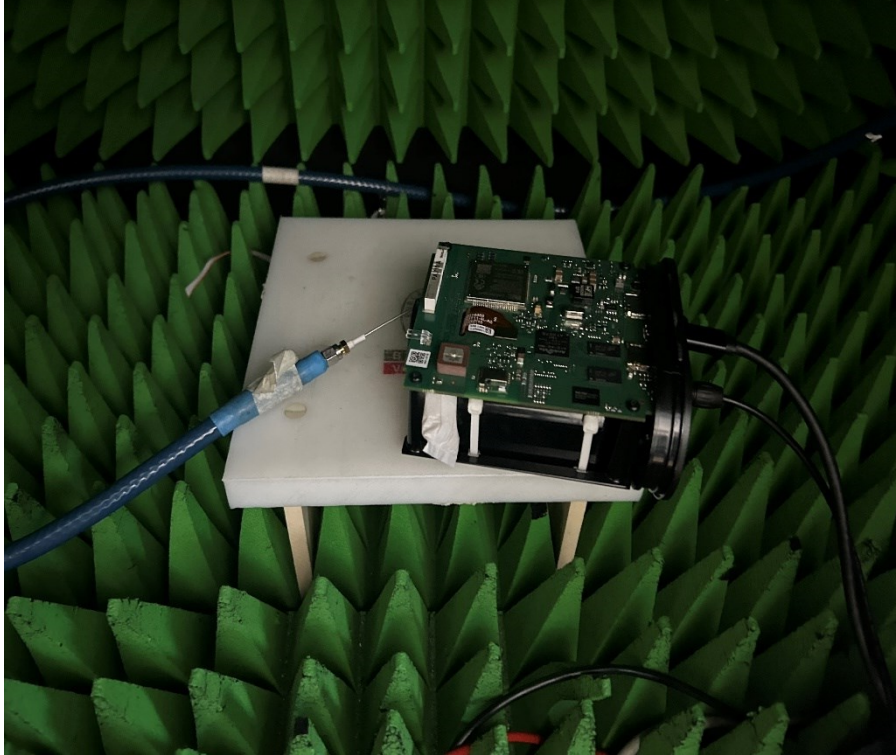


Photo of Duty Cycle

3.3. **LIMIT**

None



3.4. TEST EQUIPMENT LIST

| TEST EQUIPMENT USED | | | | | |
|-----------------------------|-----------------|--------------|------------|----------|---------|
| Description | Manufacturer | Model | Identifier | Cal_Date | Cal_Due |
| Attenuator 10dB | AEROFLEX | – | A7122268 | 07/23 | 07/25 |
| CABLE SMA 1m | RADIALL | 11GHz | A5329862 | 07/23 | 07/24 |
| Full Anechoic Room | SIEPEL | – | D3044024 | | |
| Multimeter - CEM | FLUKE | 87 | A1240251 | 10/23 | 10/25 |
| SMK 1.2m (Ampl <-> chamber) | HUBER-SUHNER | SUCOFLEX 102 | A5330062 | 04/23 | 04/26 |
| Spectrum analyzer | ROHDE & SCHWARZ | FSV 40 | A4060059 | 04/24 | 04/26 |
| Thermo-hygrometer | TESTO | 608-H1 | B4204120 | 03/23 | 03/25 |
| Thermo-hygrometer (PM1/2/3) | KIMO | HQ 210 | B4206022 | 05/23 | 05/25 |

3.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION


None



L C I E

3.6. RESULTS

Duty Cycle
Cmin
WiFi - 802.11b 1Mbits/s

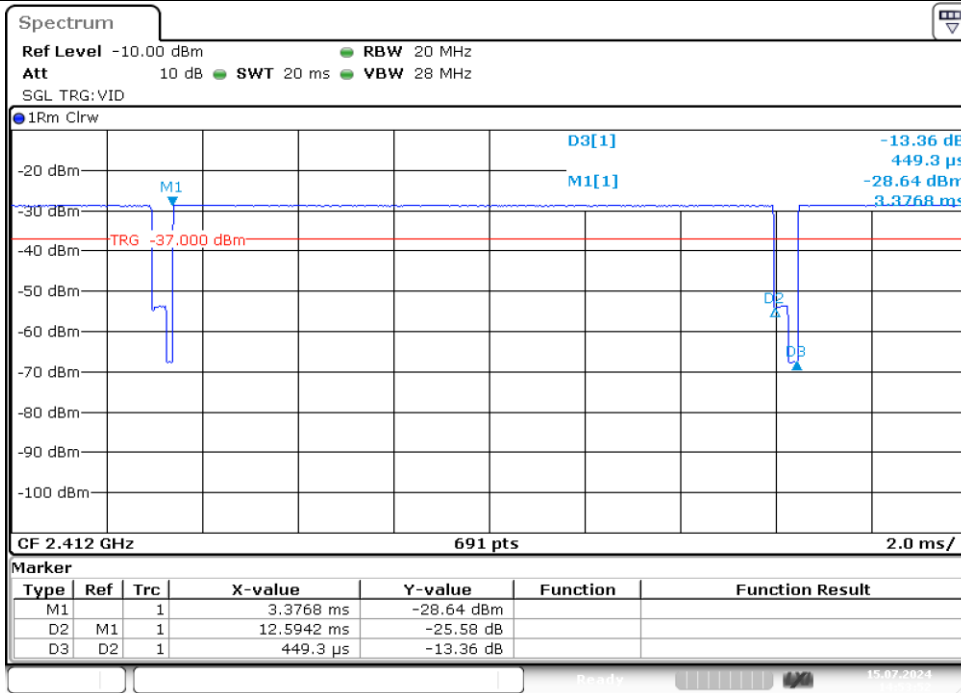

Date: 15.JUL.2024 14:53:53

| Test Period (ms) | Total Time ON (ms) | Duty Cycle (%) | Duty Cycle Factor (dB) |
|--|--------------------|---|------------------------|
| 13.04 | 12.59 | 96 | 0.17 |
| $Duty\ Cycle\ (\%) = (Total\ Time\ ON / Test\ Period) * 100$ | | $Duty\ Factor\ (dB) = 10 * \log(100 / Duty\ Cycle(\%))$ | |
| Therefore, for average measurements a correction factor, Duty Factor, is use in all tests. | | | |

4. OCCUPIED BANDWIDTH

4.1. TEST CONDITIONS

Date of test : July 17, 2024
 Test performed by : Akram HAKKARI
 Relative humidity (%) : 33
 Ambient temperature (°C) : 22

4.2. TEST SETUP


The Equipment Under Test is installed in an anechoic chamber. Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure:

ANSI C63.10 § 6.9.2 and RSS-Gen Issue 5 § 6.7

- RBW used in the range of 1% to 5% of the anticipated emission bandwidth
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = Max Hold.
- Sweep = Auto couple.
- Allow the trace to stabilize.
- OBW 99% function of spectrum analyzer used

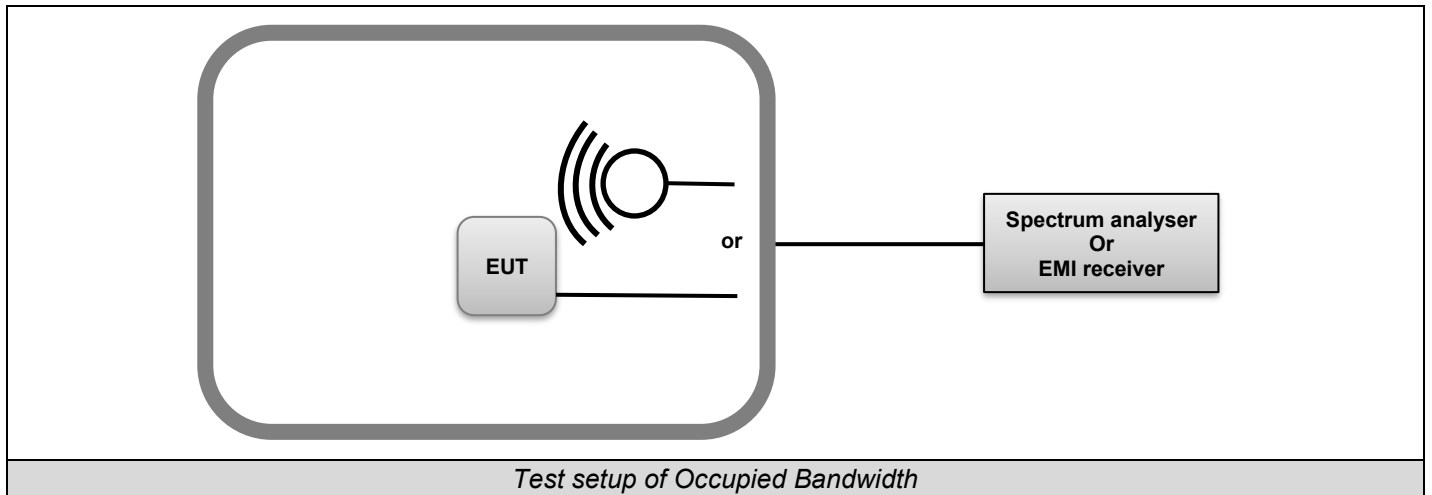



L C I E

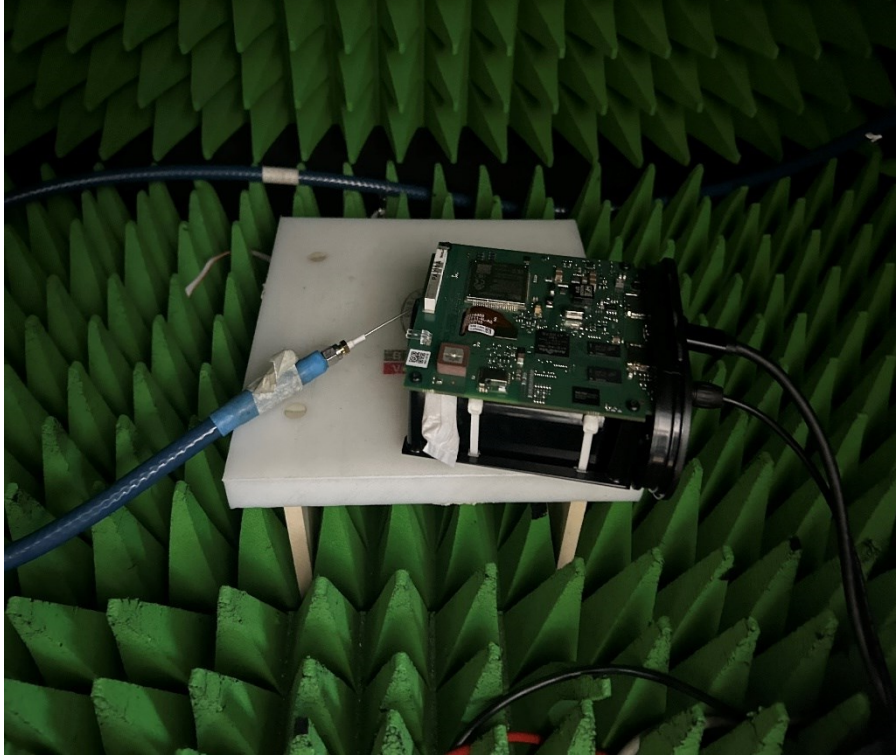


Photo of Occupied bandwidth

4.3. **LIMIT**

None



4.4. TEST EQUIPMENT LIST

| TEST EQUIPMENT USED | | | | | |
|-----------------------------|-----------------|--------------|------------|----------|---------|
| Description | Manufacturer | Model | Identifier | Cal_Date | Cal_Due |
| Attenuator 10dB | AEROFLEX | – | A7122268 | 07/23 | 07/25 |
| CABLE SMA 1m | RADIALL | 11GHz | A5329862 | 07/23 | 07/24 |
| Full Anechoic Room | SIEPEL | – | D3044024 | | |
| Multimeter - CEM | FLUKE | 87 | A1240251 | 10/23 | 10/25 |
| SMK 1.2m (Ampl <-> chamber) | HUBER-SUHNER | SUCOFLEX 102 | A5330062 | 04/23 | 04/26 |
| Spectrum analyzer | ROHDE & SCHWARZ | FSV 40 | A4060059 | 04/24 | 04/26 |
| Thermo-hygrometer | TESTO | 608-H1 | B4204120 | 03/23 | 03/25 |
| Thermo-hygrometer (PM1/2/3) | KIMO | HQ 210 | B4206022 | 05/23 | 05/25 |


4.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



L C I E

4.6. RESULTS

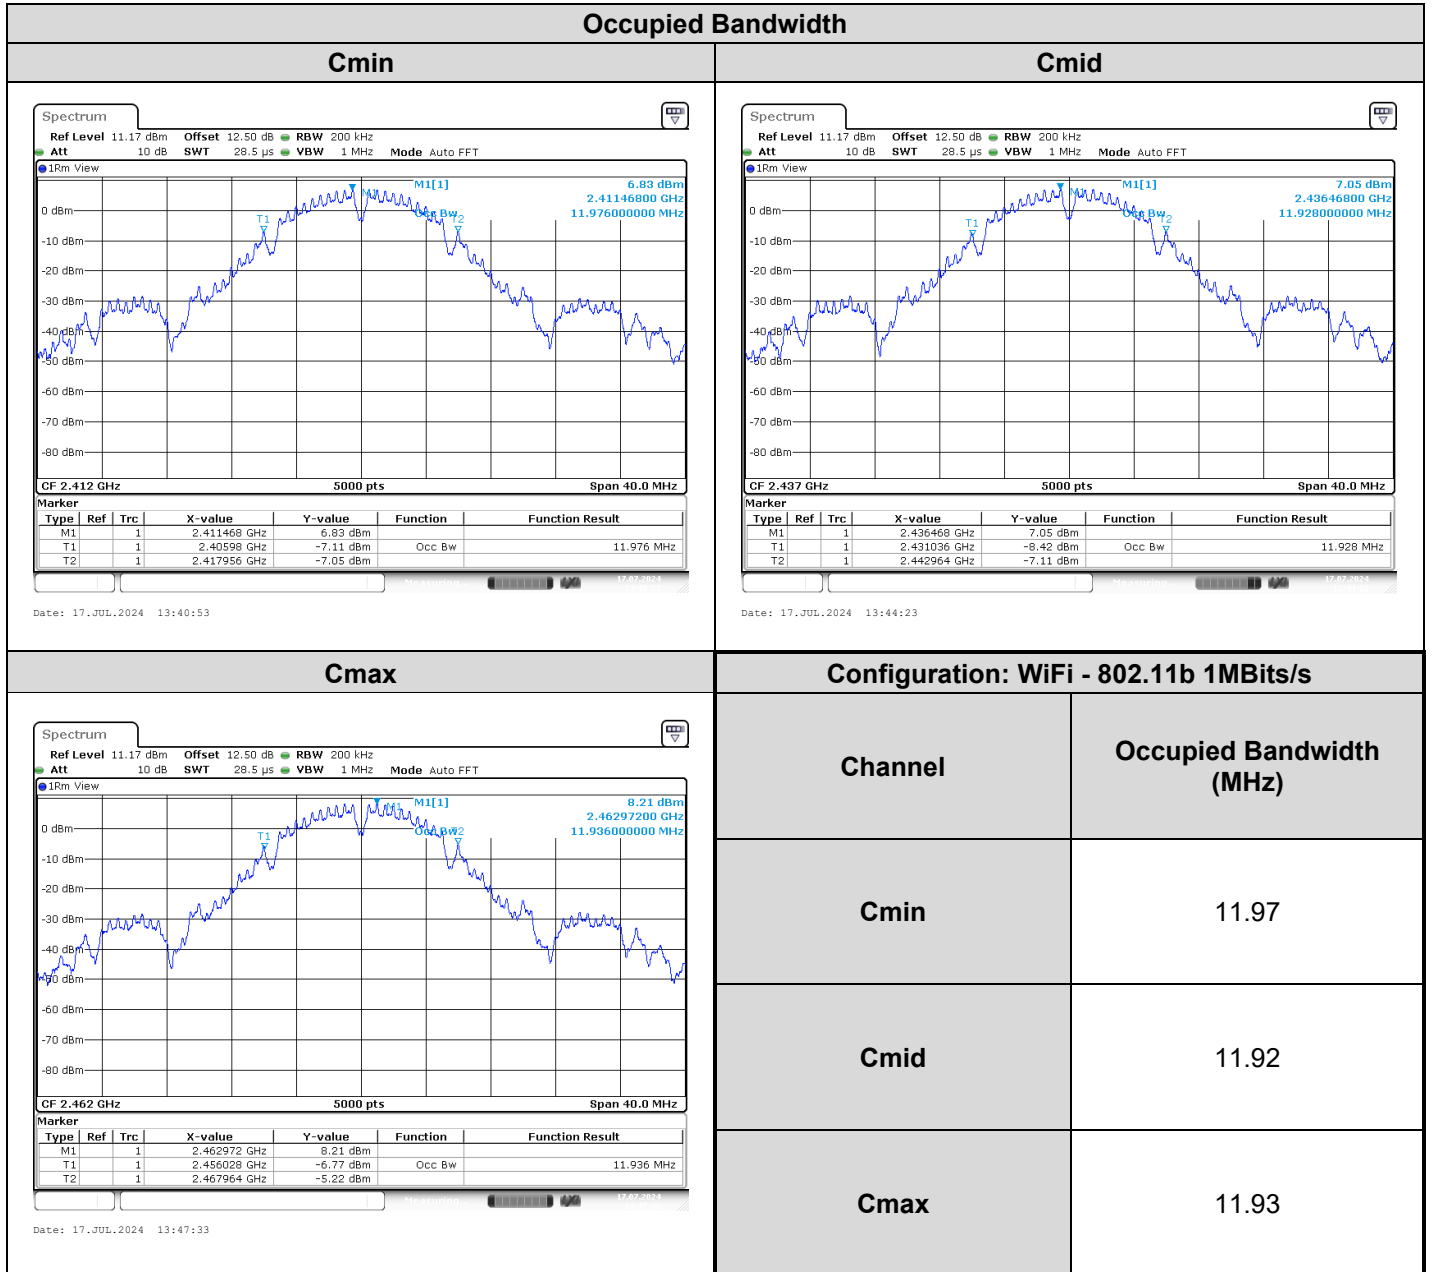





L C I E

Occupied Bandwidth


Cmin

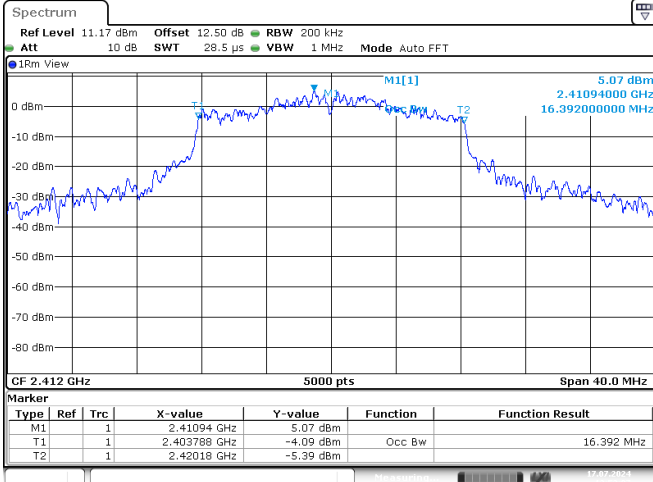

Cmid

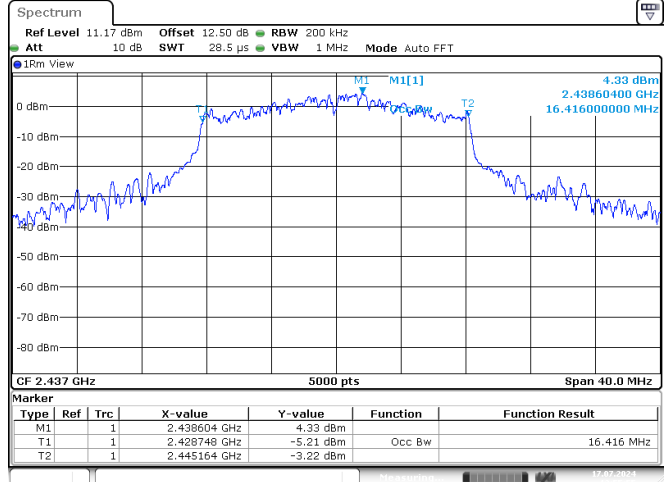

Cmax

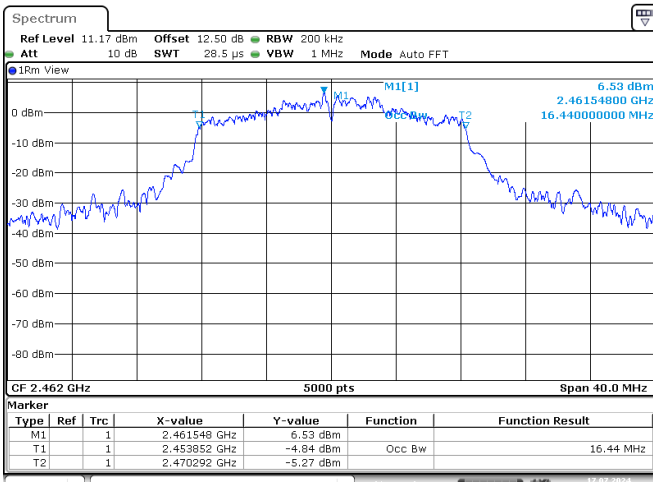

Configuration: WiFi - 802.11g 6Mbits/s


| Channel | Occupied Bandwidth (MHz) |
|---------|--------------------------|
| Cmin | 16.39 |
| Cmid | 16.41 |
| Cmax | 16.44 |



L C I E


Occupied Bandwidth

Cmin

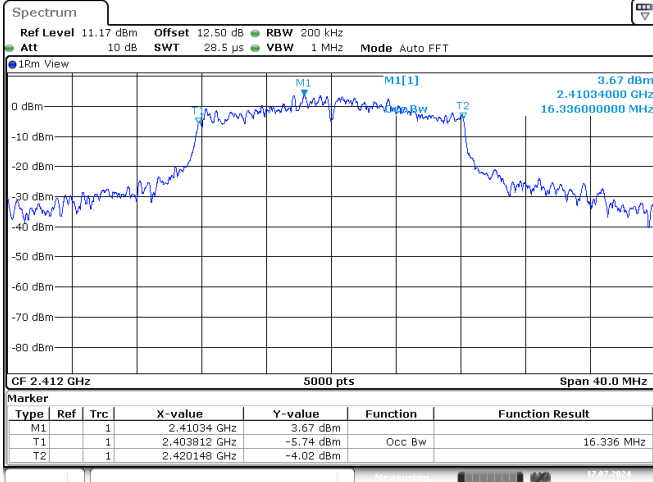


Date: 17.JUL.2024 14:02:59

Cmid

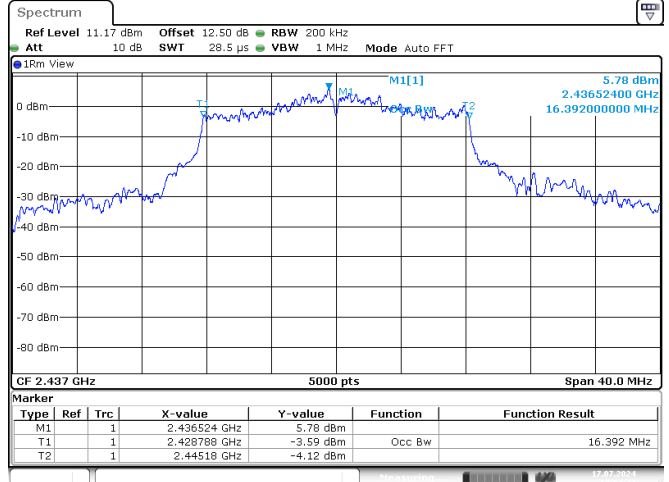

Date: 17.JUL.2024 14:04:44

Cmax

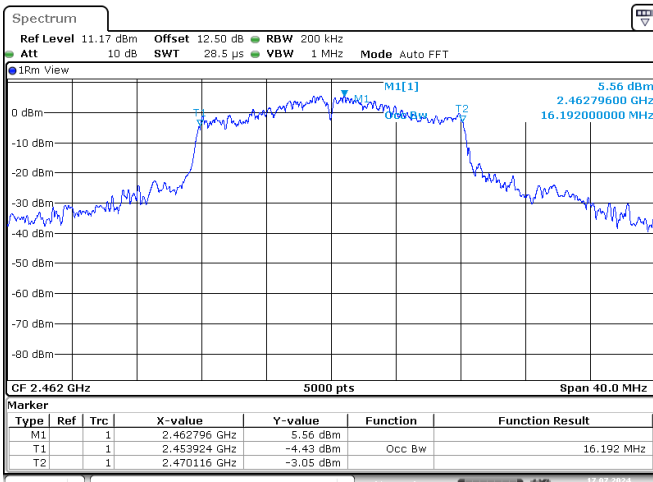

Date: 17.JUL.2024 14:06:33

Configuration: Choisissez

| Channel | Occupied Bandwidth (MHz) |
|---------|--------------------------|
| Cmin | 16.33 |
| Cmid | 16.39 |
| Cmax | 16.19 |

4.7. CONCLUSION

Occupied Channel Bandwidth measurement performed on the sample of the product **Tikee mini**, Sn: **M-MIN-0A-001105 / M-MIN-0A-001090**, in configuration and description presented in this test report, show levels **compliant** to the **RSS-GEN** limits.

5. 6dB BANDWIDTH

5.1. TEST CONDITIONS

Date of test : July 17, 2024
 Test performed by : Akram HAKKARI
 Relative humidity (%) : 33
 Ambient temperature (°C) : 22

5.2. TEST SETUP

The Equipment Under Test is installed in an anechoic chamber. Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure:

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.2

- Set resolution bandwidth (RBW) = 100kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer.

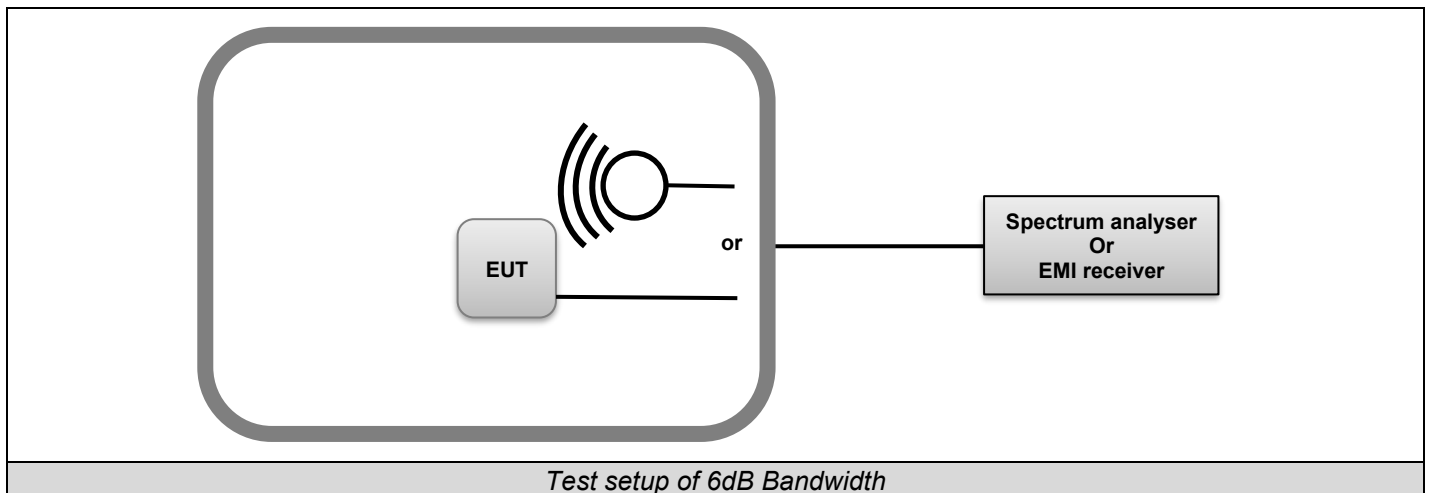




Photo of 6dB bandwidth

5.3. LIMIT

| Frequency range | 6dB bandwidth |
|---|---------------|
| 902-928MHz 2400MHz to 2483.5MHz 5725-5850 MHz | ≥500kHz |



5.4. TEST EQUIPMENT LIST

| TEST EQUIPMENT USED | | | | | |
|-----------------------------|-----------------|--------------|------------|----------|---------|
| Description | Manufacturer | Model | Identifier | Cal_Date | Cal_Due |
| Attenuator 10dB | AEROFLEX | – | A7122268 | 07/23 | 07/25 |
| CABLE SMA 1m | RADIALL | 11GHz | A5329862 | 07/23 | 07/24 |
| Full Anechoic Room | SIEPEL | – | D3044024 | | |
| Multimeter - CEM | FLUKE | 87 | A1240251 | 10/23 | 10/25 |
| SMK 1.2m (Ampl <-> chamber) | HUBER-SUHNER | SUCOFLEX 102 | A5330062 | 04/23 | 04/26 |
| Spectrum analyzer | ROHDE & SCHWARZ | FSV 40 | A4060059 | 04/24 | 04/26 |
| Thermo-hygrometer | TESTO | 608-H1 | B4204120 | 03/23 | 03/25 |
| Thermo-hygrometer (PM1/2/3) | KIMO | HQ 210 | B4206022 | 05/23 | 05/25 |


5.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



L C I E

5.6. RESULTS

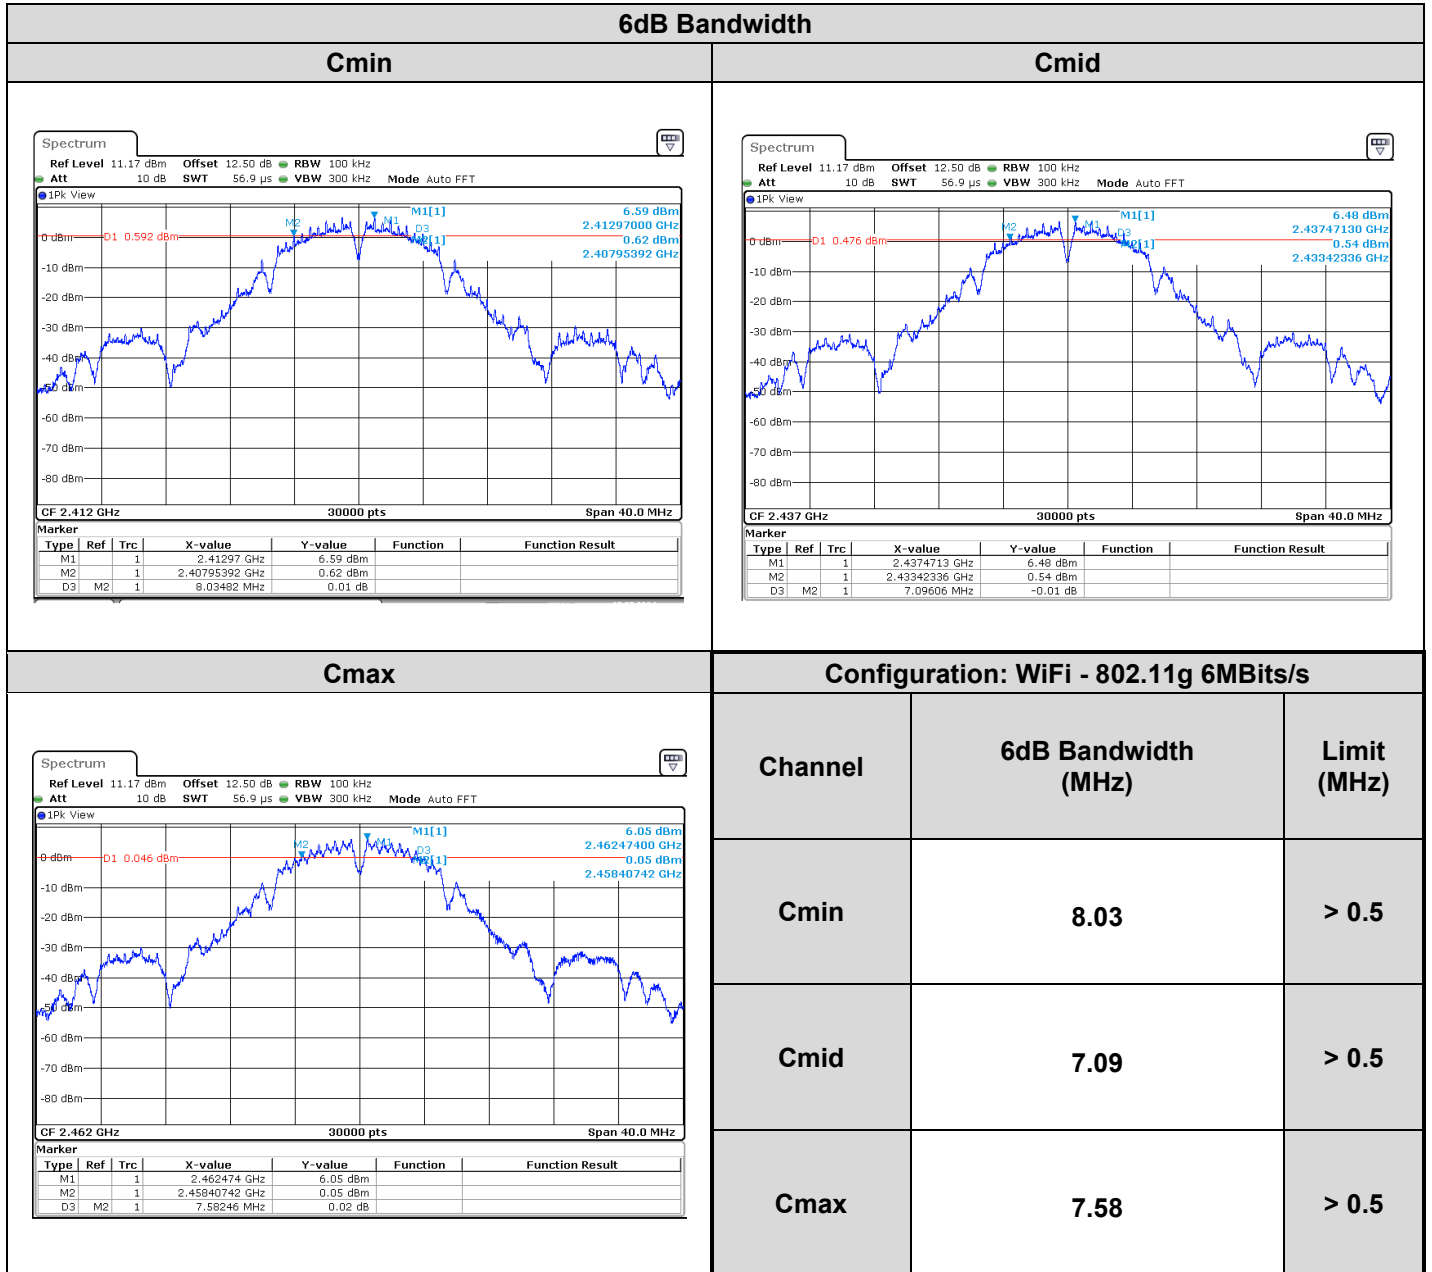





L C I E

6dB Bandwidth


Cmin

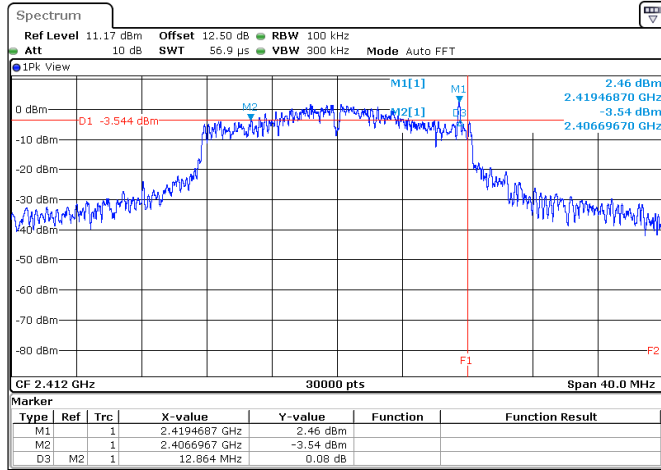

Cmid

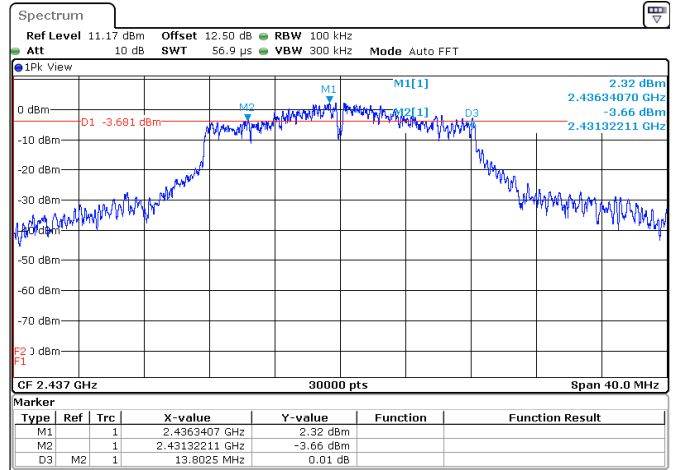

Cmax

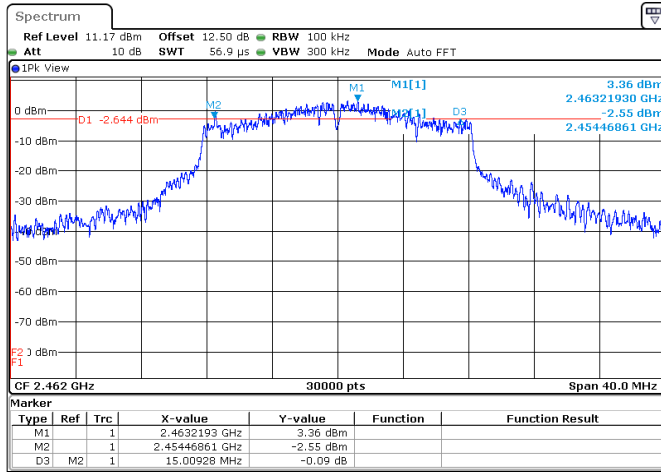

Configuration: WiFi - 802.11g 6Mbits/s


| Channel | 6dB Bandwidth (MHz) | Limit (MHz) |
|---------|---------------------|-------------|
| Cmin | 12.86 | > 0.5 |
| Cmid | 13.8 | > 0.5 |
| Cmax | 15 | > 0.5 |




L C I E

6dB Bandwidth


Cmin

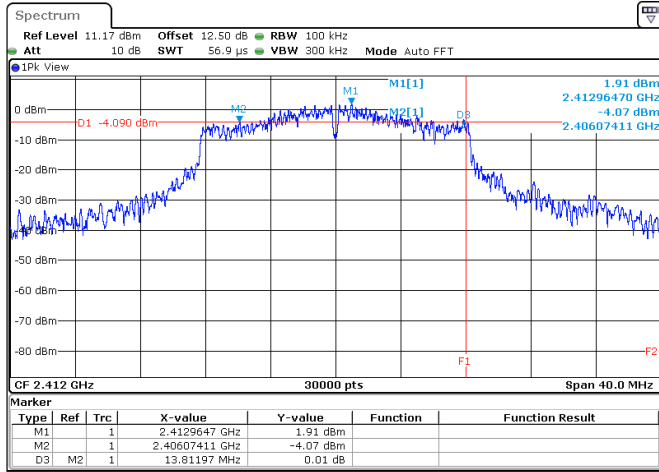

Cmid

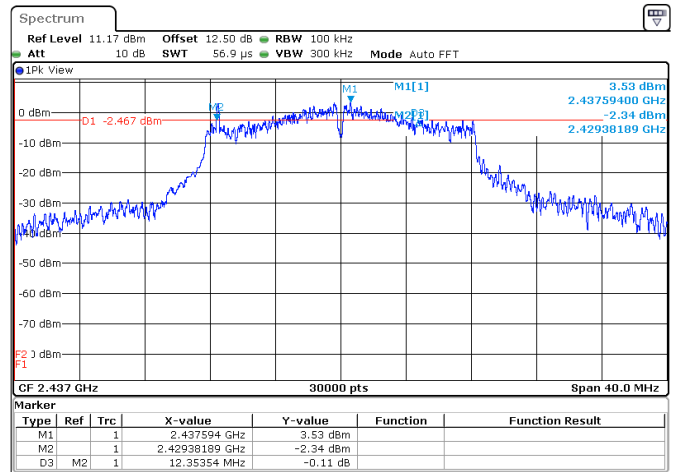

Cmax

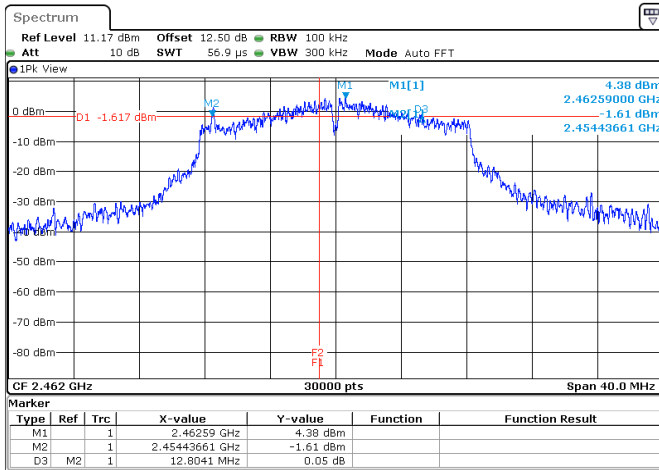

Configuration: WiFi - 802.11n HT20 MCS0

| Channel | 6dB Bandwidth (MHz) | Limit (MHz) |
|---------|---------------------|-------------|
| Cmin | 13.811968 | > 0.5 |
| Cmid | 12.353536 | > 0.5 |
| Cmax | 12.804096 | > 0.5 |

5.7. CONCLUSION

6dB Bandwidth measurement performed on the sample of the product **Tikee mini**, Sn: **M-MIN-0A-001105 / M-MIN-0A-001090**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.



6. MAXIMUM CONDUCTED OUTPUT POWER

6.1. TEST CONDITIONS

Date of test : July 17, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 33
Ambient temperature (°C) : 22

6.2. TEST SETUP

The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure used: KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.1.1

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.1.1

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- o Set the RBW \geq DTS bandwidth.
- o Set VBW $\geq 3 \times$ RBW.
- o Set span $\geq 3 \times$ RBW
- o Sweep time = auto couple.
- o Detector = peak.
- o Trace mode = max hold.
- o Allow trace to fully stabilize.
- o Use peak marker function to determine the peak amplitude level.

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.1.2

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- o Set the RBW = 1 MHz.
- o Set the VBW $\geq 3 \times$ RBW
- o Set the span $\geq 1.5 \times$ DTS bandwidth.
- o Detector = peak.
- o Sweep time = auto couple.
- o Trace mode = max hold.
- o Allow trace to fully stabilize.
- o Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.2.2(Method AVGSA-1)

Subclause 11.9.2.2 of ANSI C63.10 is applicable, Method AVGSA-1 uses trace averaging with the EUT transmitting at full power throughout each sweep.


- o a) Set span to at least 1.5 times the OBW.
- o b) Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- o c) Set VBW $\geq [3 \times$ RBW].
- o d) Number of points in sweep $\geq [2 \times$ span / RBW]. (This gives bin-to-bin spacing \leq RBW / 2, so that narrowband signals are not lost between frequency bins.)
- o e) Sweep time = auto.
- o f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- o g) If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at the maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- o h) Trace average at least 100 traces in power averaging (rms) mode.
- o i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.2.2(Method AVGSA-2)

Subclause 11.9.2.2 of ANSI C63.10 is applicable.

Method AVGSA-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The procedure for this method is as follows:

- a) Measure the duty cycle D of the transmitter output signal as described in 11.6.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- d) Set VBW $\geq [3 \times \text{RBW}]$.
- e) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- f) Sweep time = auto.
- g) Detector = RMS (i.e., power averaging), if available. Otherwise, use the sample detector mode.
- h) Do not use sweep triggering. Allow the sweep to “free run.”
- i) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- j) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- k) Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is 25%.

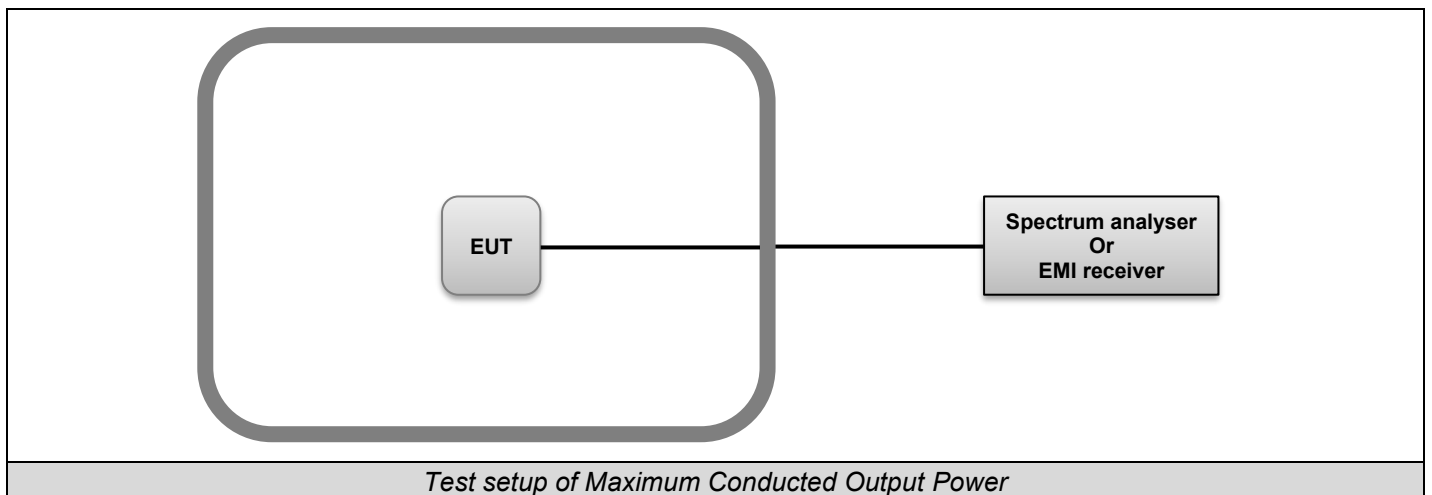



L C I E

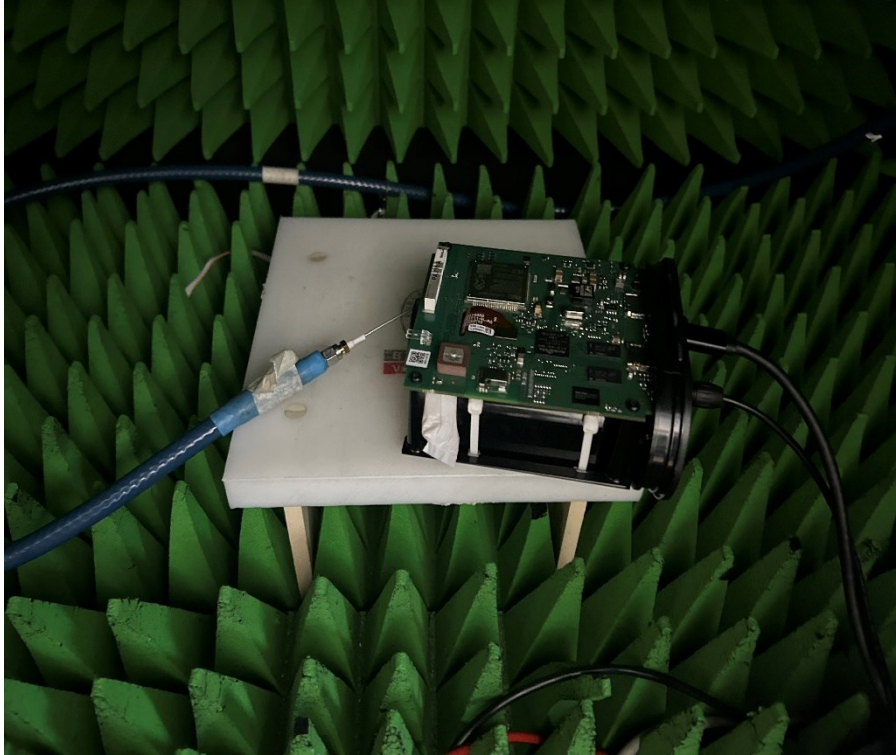


Photo of Maximum Conducted Output Power



6.3. LIMIT

| Frequency range | Maximum Conducted Output Power |
|---|--------------------------------|
| 902-928MHz 2400MHz to 2483.5MHz 5725-5850 MHz | ≤30dBm* |

*Remark: Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi

6.4. TEST EQUIPMENT LIST

| TEST EQUIPMENT USED | | | | | |
|-----------------------------|-----------------|--------------|------------|----------|---------|
| Description | Manufacturer | Model | Identifier | Cal_Date | Cal_Due |
| Attenuator 10dB | AEROFLEX | – | A7122268 | 07/23 | 07/25 |
| CABLE SMA 1m | RADIALL | 11GHz | A5329862 | 07/23 | 07/24 |
| Full Anechoic Room | SIEPEL | – | D3044024 | | |
| Multimeter - CEM | FLUKE | 87 | A1240251 | 10/23 | 10/25 |
| SMK 1.2m (Ampl <-> chamber) | HUBER-SUHNER | SUCOFLEX 102 | A5330062 | 04/23 | 04/26 |
| Spectrum analyzer | ROHDE & SCHWARZ | FSV 40 | A4060059 | 04/24 | 04/26 |
| Thermo-hygrometer | TESTO | 608-H1 | B4204120 | 03/23 | 03/25 |
| Thermo-hygrometer (PM1/2/3) | KIMO | HQ 210 | B4206022 | 05/23 | 05/25 |


6.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



L C I E


6.6. RESULTS

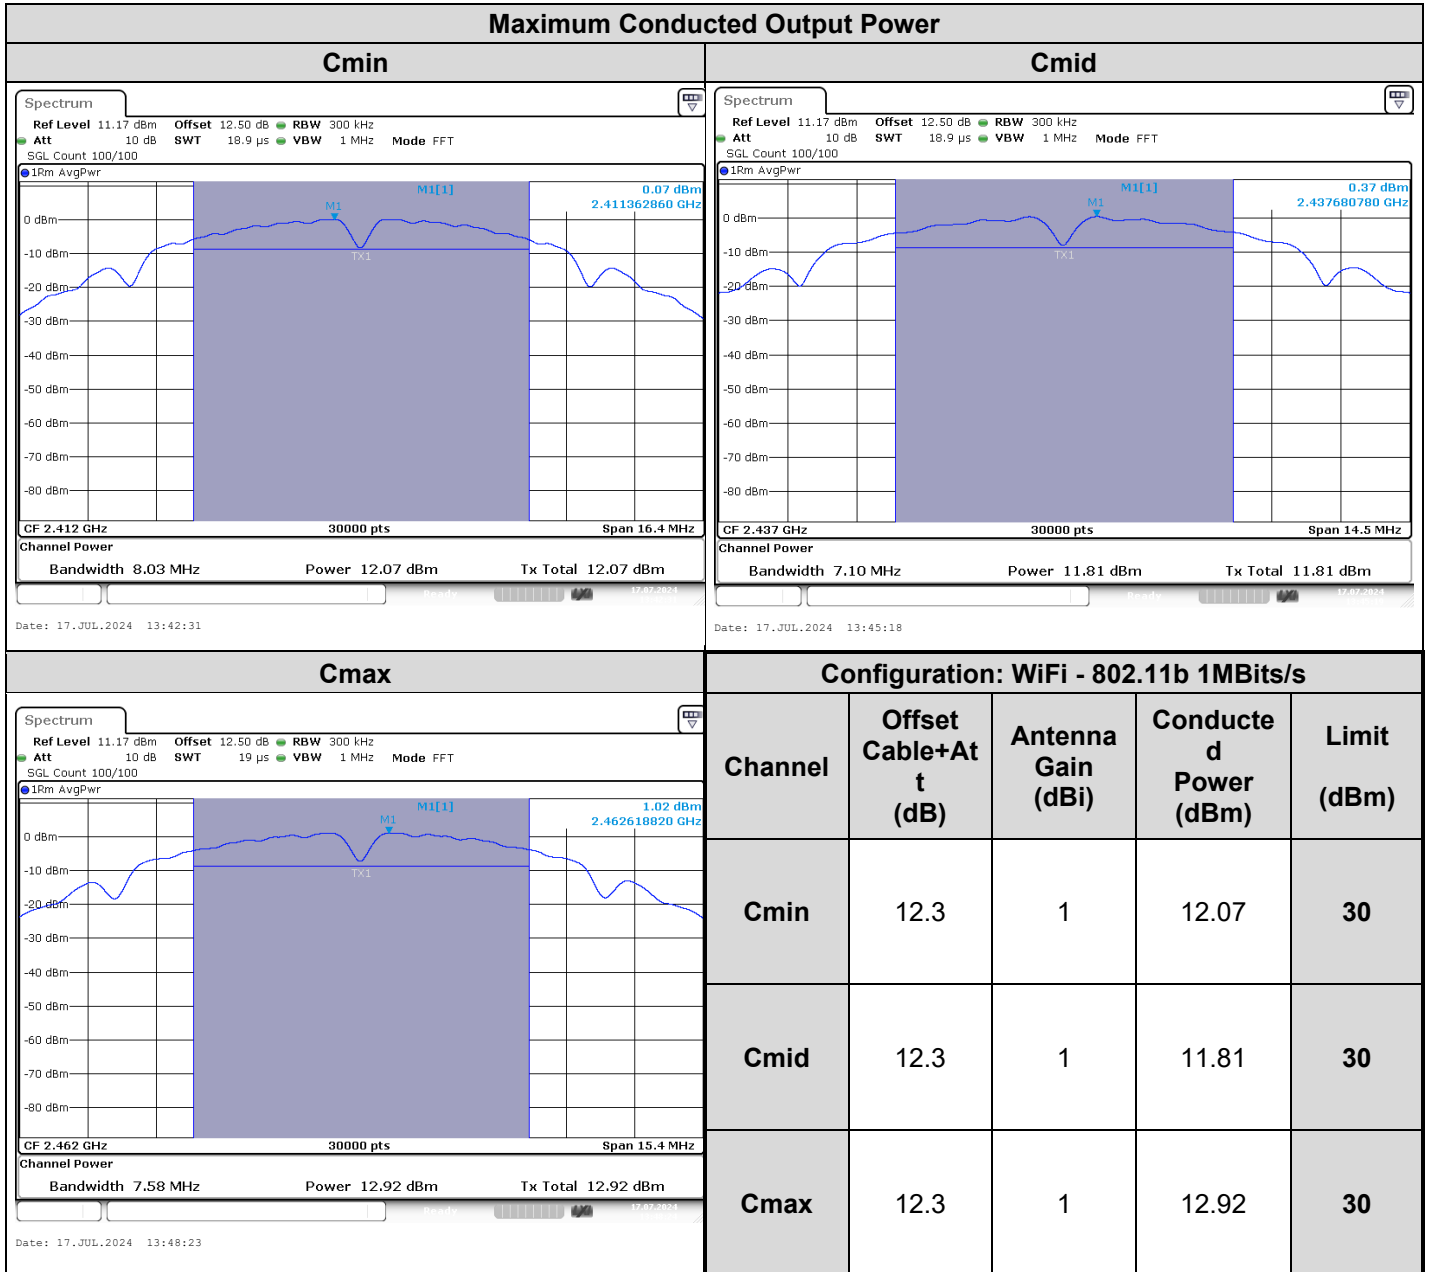




L C I E

Maximum Conducted Output Power

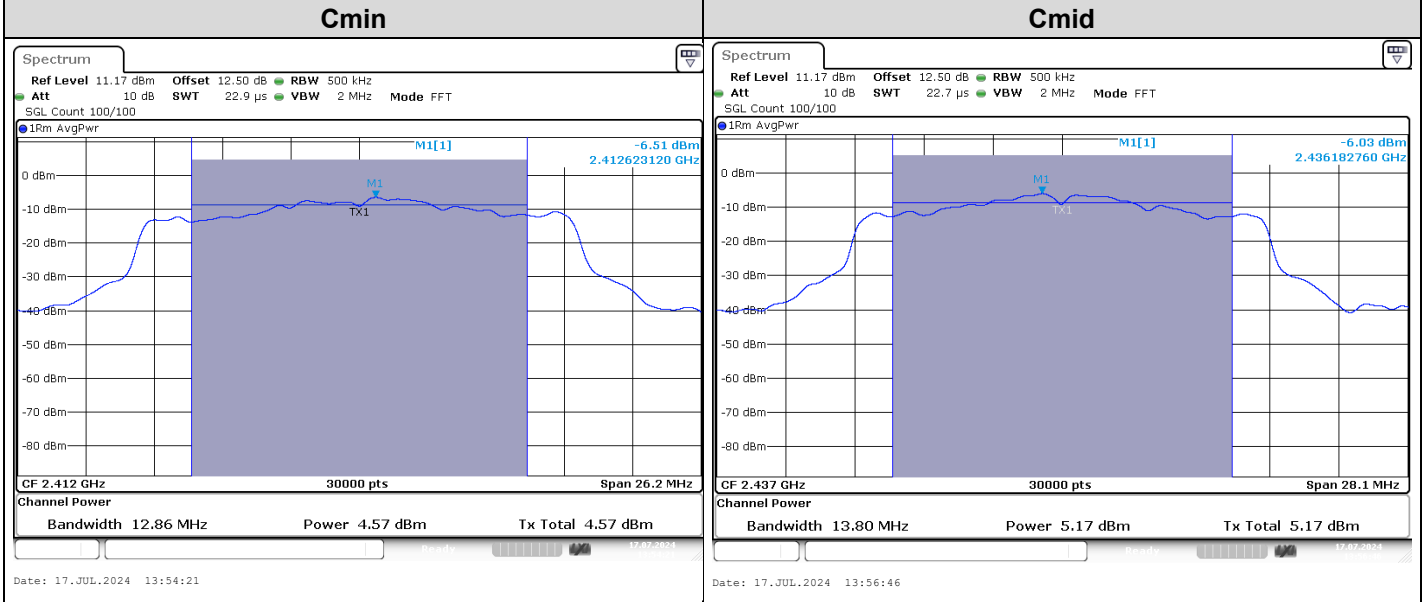

| Cmax | | Configuration: WiFi - 802.11g 6Mbits/s | | | |
|---------|-----------------------|--|------------------------|-------------|--|
| Channel | Offset Cable+Att (dB) | Antenna Gain (dBi) | Conducte d Power (dBm) | Limit (dBm) | |
| Cmin | 12.3 | 1 | 4.57 | 30 | |
| Cmid | 12.3 | 1 | 5.17 | 30 | |
| Cmax | 12.3 | 1 | 6.3 | 30 | |

Cmax
 Spectrum: Ref Level 11.17 dBm, Offset 12.50 dB, RBW 500 kHz, Att 10 dB, SWT 22.7 μs, VBW 2 MHz, Mode FFT, SGL Count 100/100.
 1Rm AvgPwr: -5.34 dBm at 2.46248240 GHz.
 Channel Power: Bandwidth 15.01 MHz, Power 6.30 dBm, Tx Total 6.30 dBm.
 Date: 17.JUL.2024 13:58:54

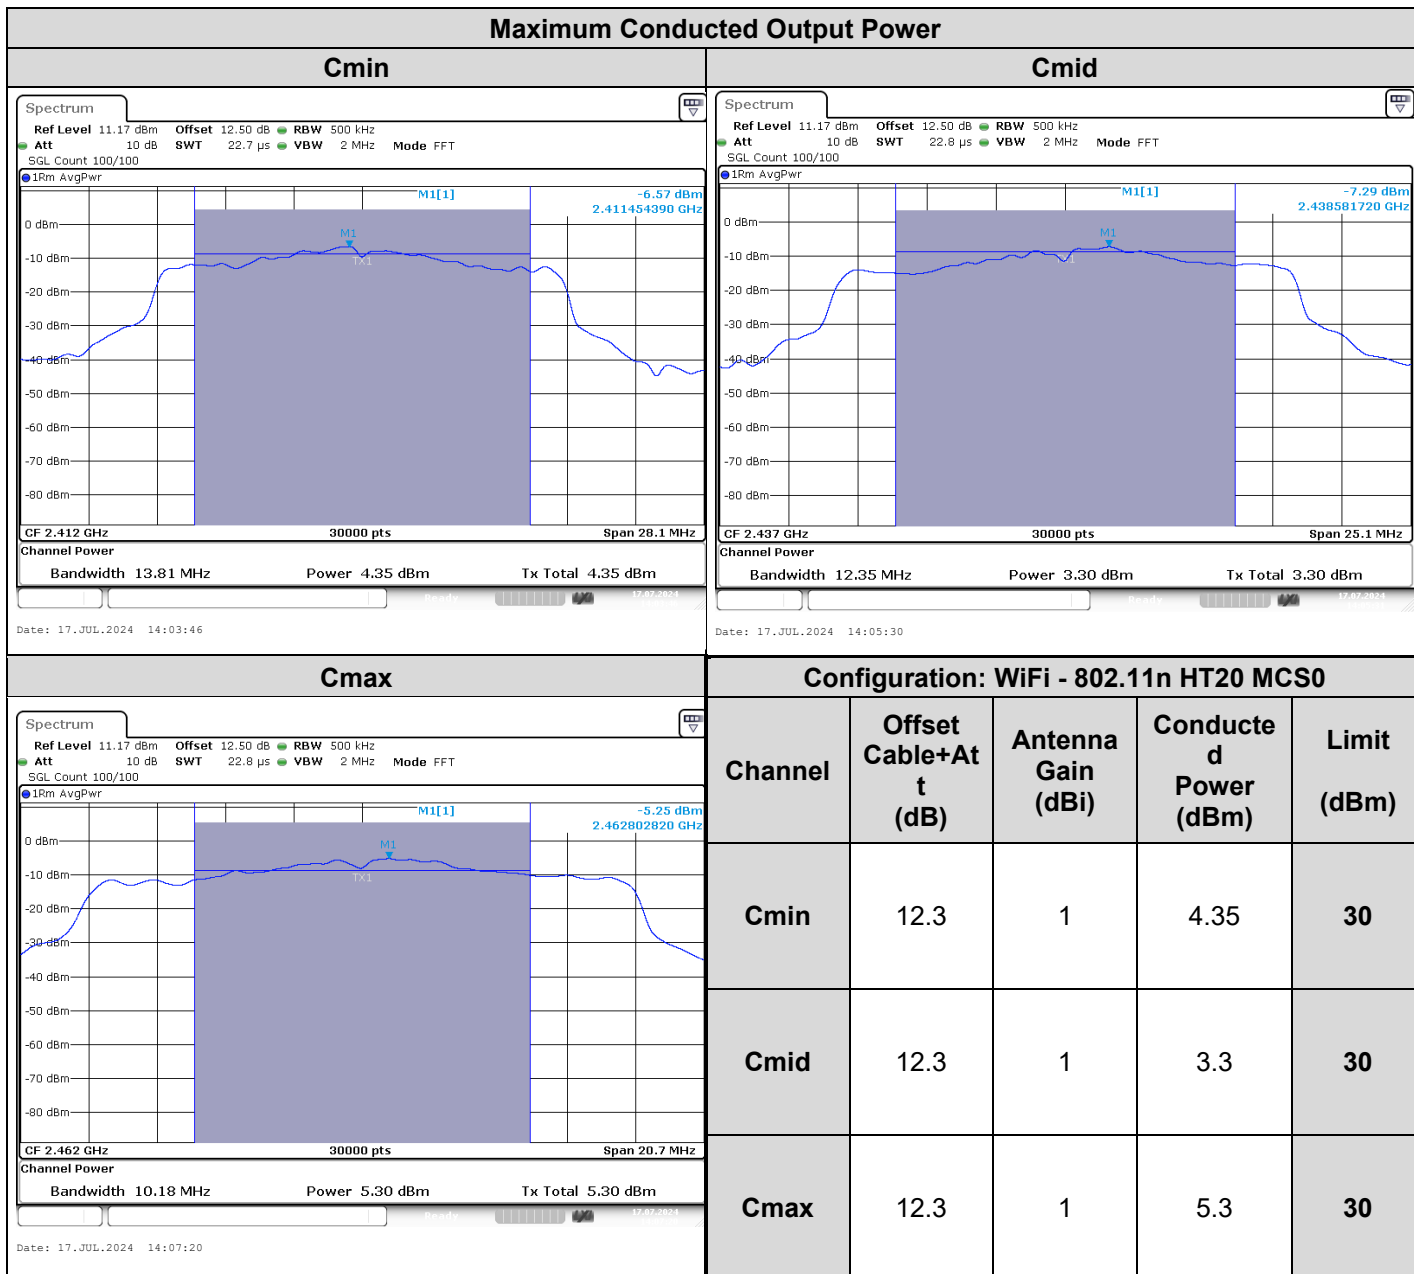

6.7. CONCLUSION

Maximum Output Conducted Power measurement performed on the sample of the product **Tikee mini**, Sn: **M-MIN-0A-001105 / M-MIN-0A-001090**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.



7. POWER SPECTRAL DENSITY

7.1. TEST CONDITIONS

Date of test : July 17, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 33
Ambient temperature (°C) : 22

7.2. TEST SETUP

The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure used: KDB 558074 D01 DTS Meas Guidance v05r02 § 8.4 (Method PKPSD)
KDB 558074 D01 DTS Meas Guidance v05r02 § 8.4 (Method PKPSD)

Subclause 11.10 of ANSI C63.10 is applicable



- o Set analyzer center frequency to DTS channel center frequency.
- o Set the span to 1.5 times the DTS bandwidth.
- o Set the RBW to: 3 kHz.
- o Set the VBW $\geq 3 \times$ RBW.
- o Detector = peak.
- o Sweep time = auto couple.
- o Trace mode = max hold.
- o Allow trace to fully stabilize.
- o Use the peak marker function to determine the maximum amplitude level within the RBW.
- o If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.4 (Method AVGPSD-1)

Subclause 11.10 of ANSI C63.10 is applicable

Method AVGPSD-1 uses trace averaging with EUT transmitting at full power throughout each sweep. The following procedure may be used when the maximum (average) conducted output power was used to determine compliance to the fundamental output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has a power averaging (rms) detector, then it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously ($D \geq 98\%$), or else sweep triggering/signal gating must be implemented to ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter OFF time to be considered):

- o a) Set instrument center frequency to DTS channel center frequency.
- o b) Set span to at least 1.5 times the OBW.
- o c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- o d) Set $\text{VBW} \geq [3 \times \text{RBW}]$.
- o e) Detector = power averaging (rms) or sample detector (when rms not available).
- o f) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- o g) Sweep time = auto couple.
- o h) Employ trace averaging (rms) mode over a minimum of 100 traces.
- o i) Use the peak marker function to determine the maximum amplitude level.
- o j) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

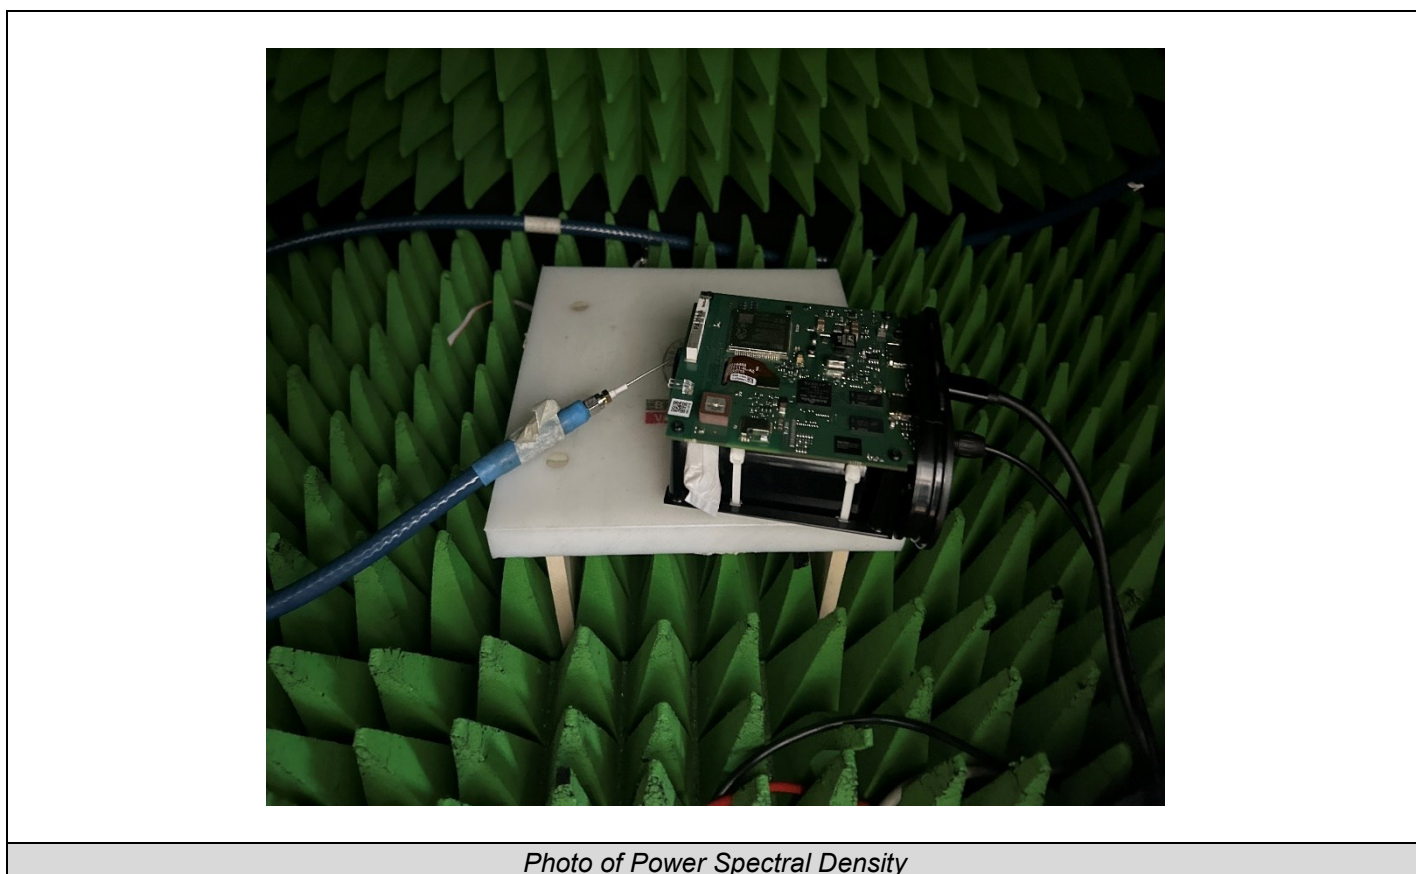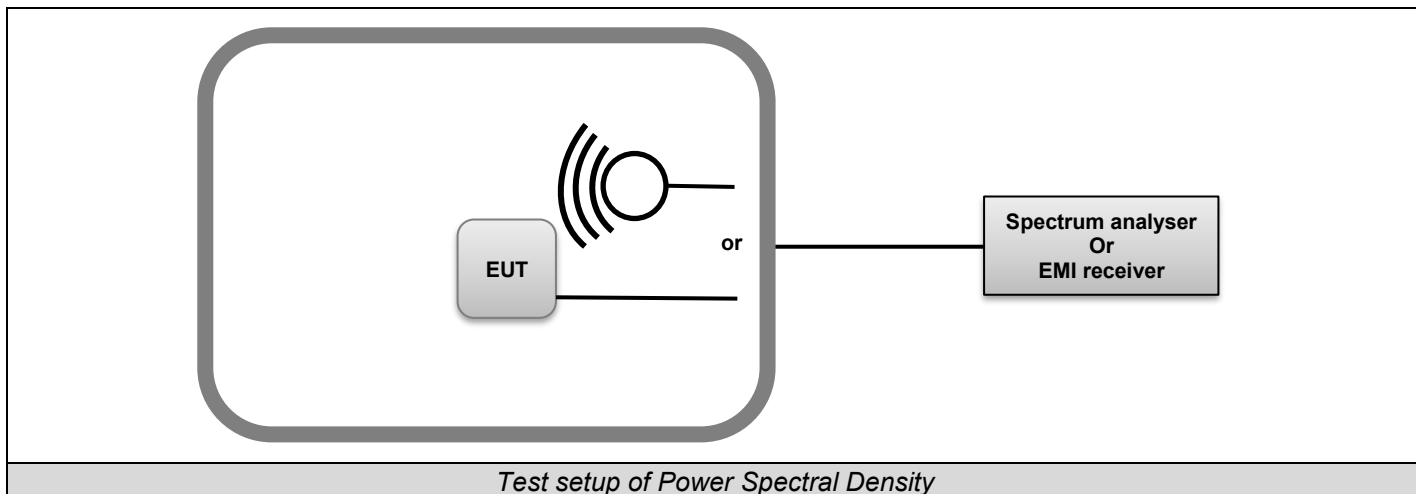



7.3. LIMIT

| Frequency range | Power Spectral Density |
|---|------------------------|
| 902-928MHz 2400MHz to 2483.5MHz 5725-5850 MHz | ≤8dBm / 3kHz * |

*Remark: Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi

7.4. TEST EQUIPMENT LIST

| TEST EQUIPMENT USED | | | | | |
|-----------------------------|-----------------|--------------|------------|----------|---------|
| Description | Manufacturer | Model | Identifier | Cal_Date | Cal_Due |
| Attenuator 10dB | AEROFLEX | _ | A7122268 | 07/23 | 07/25 |
| CABLE SMA 1m | RADIALL | 11GHz | A5329862 | 07/23 | 07/24 |
| Full Anechoic Room | SIEPEL | _ | D3044024 | | |
| Multimeter - CEM | FLUKE | 87 | A1240251 | 10/23 | 10/25 |
| SMK 1.2m (Ampl <-> chamber) | HUBER-SUHNER | SUCOFLEX 102 | A5330062 | 04/23 | 04/26 |
| Spectrum analyzer | ROHDE & SCHWARZ | FSV 40 | A4060059 | 04/24 | 04/26 |
| Thermo-hygrometer | TESTO | 608-H1 | B4204120 | 03/23 | 03/25 |
| Thermo-hygrometer (PM1/2/3) | KIMO | HQ 210 | B4206022 | 05/23 | 05/25 |


7.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



L C I E



7.6. RESULTS

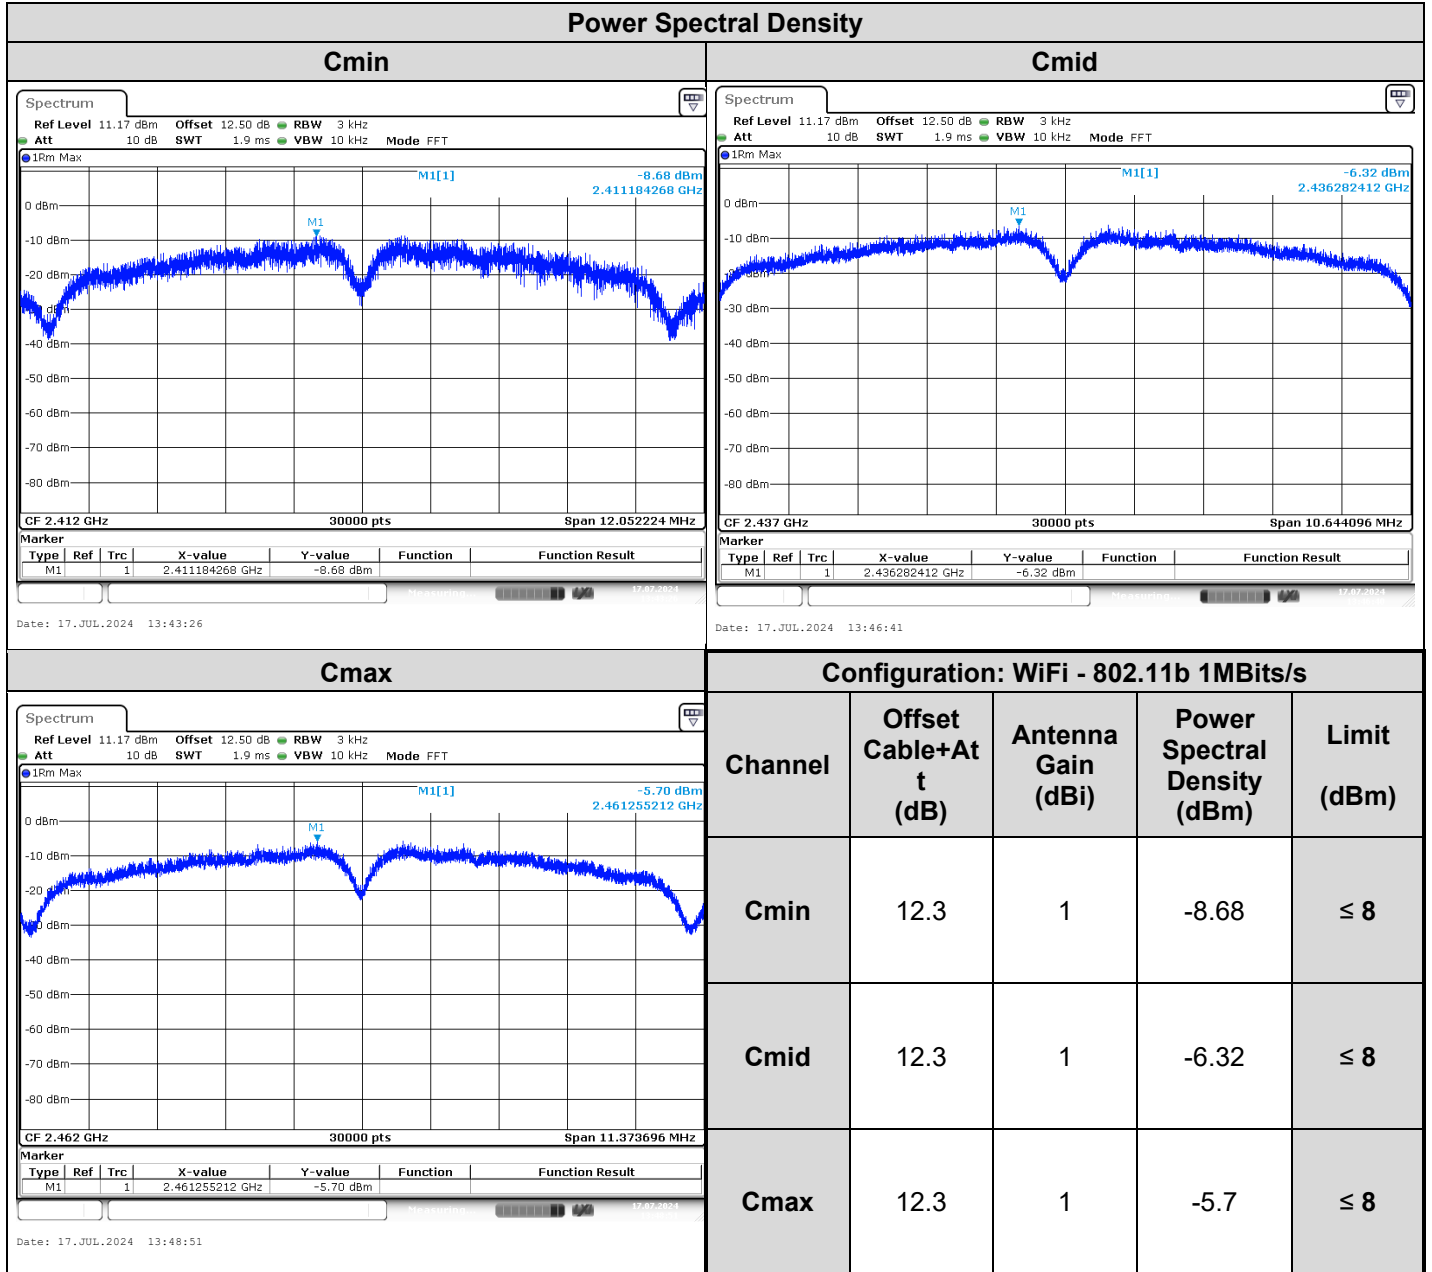




L C I E

Power Spectral Density

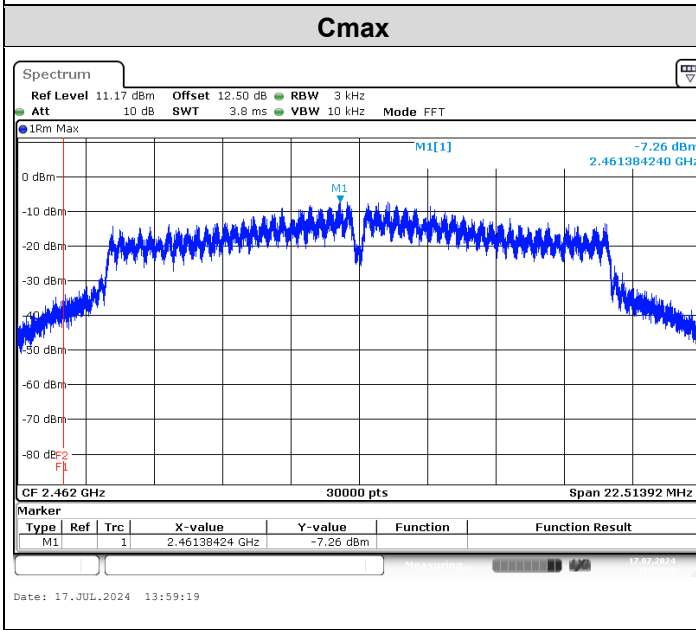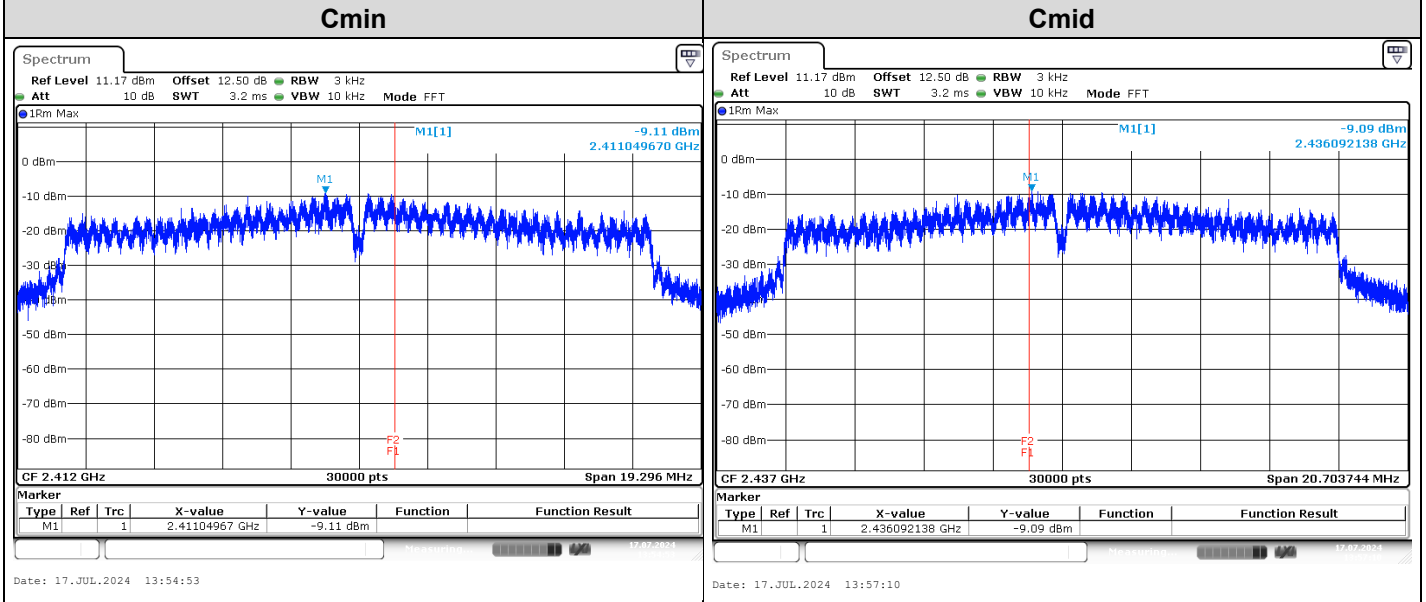

| Configuration: WiFi - 802.11g 6Mbits/s | | | | |
|--|-----------------------|--------------------|------------------------------|-------------|
| Channel | Offset Cable+Att (dB) | Antenna Gain (dBi) | Power Spectral Density (dBm) | Limit (dBm) |
| Cmin | 12.3 | 1 | -9.11 | ≤ 8 |
| Cmid | 12.3 | 1 | 9.09 | ≤ 8 |
| Cmax | 12.3 | 1 | -7.26 | ≤ 8 |

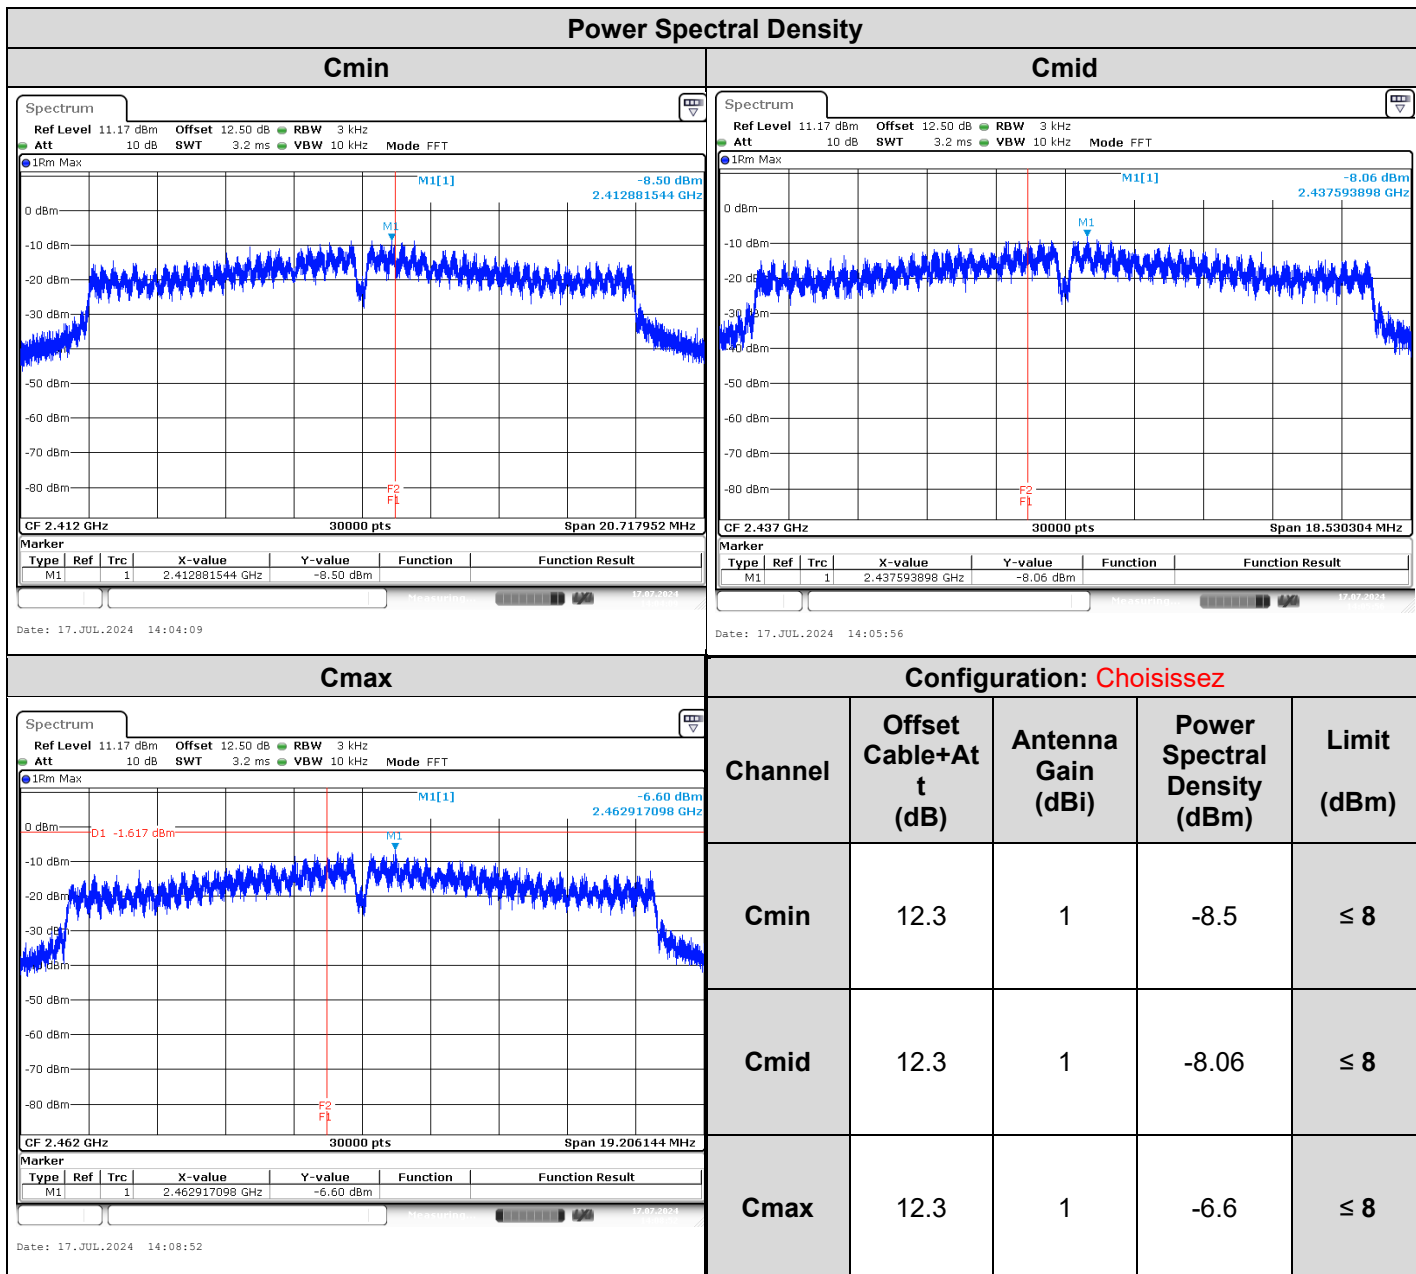

7.7. CONCLUSION

Power Spectral Density measurement performed on the sample of the product **Tikee mini**, Sn: **M-MIN-0A-001105 / M-MIN-0A-001090**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.

8. UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.1. TEST CONDITIONS


Date of test : July 17, 2024
 Test performed by : Akram HAKKARI
 Relative humidity (%) : 33
 Ambient temperature (°C) : 22

8.2. TEST SETUP

The Equipment Under Test is installed in an anechoic chamber. Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure:
KDB 558074 D01 DTS Meas Guidance v05r02 § 8.5

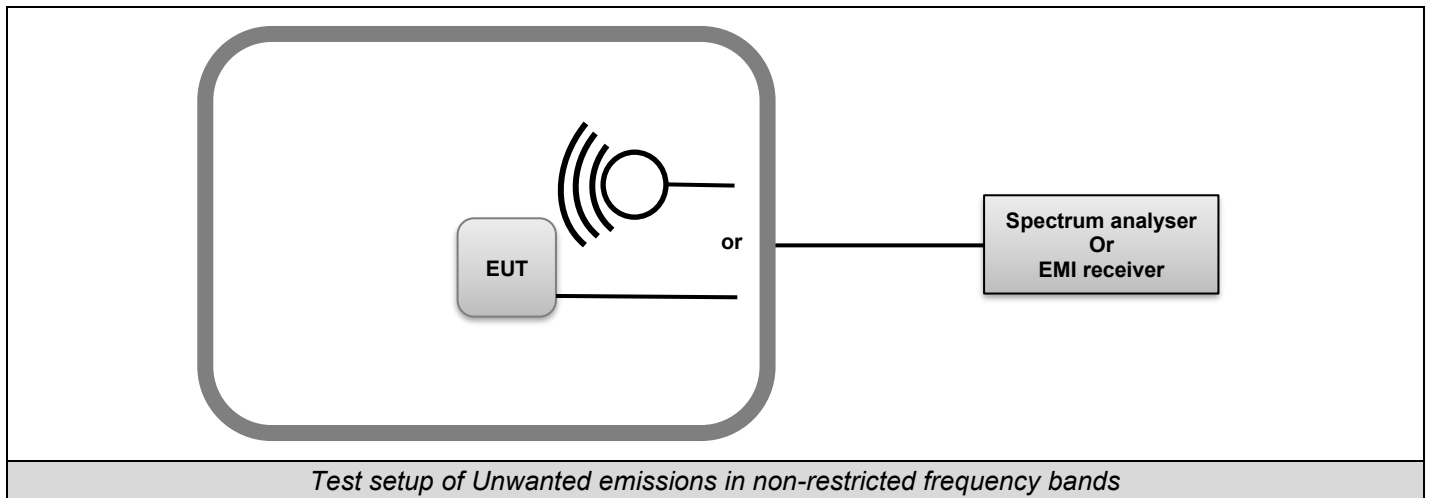



L C I E

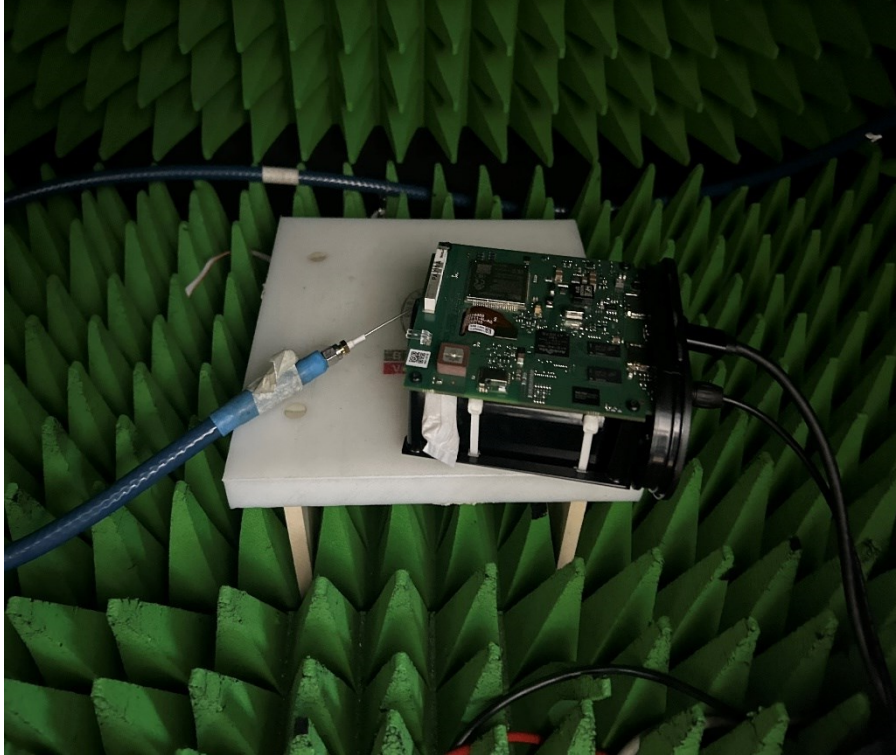


Photo of Unwanted emissions in non-restricted frequency bands



8.3. LIMIT

All Spurious Emissions must be at least 20dB below the Fundamental Radiator Level at the Band Edge of operating frequency band and in non-restricted bands.

8.4. TEST EQUIPMENT LIST

| TEST EQUIPMENT USED | | | | | |
|-----------------------------|-----------------|--------------|------------|----------|---------|
| Description | Manufacturer | Model | Identifier | Cal_Date | Cal_Due |
| Attenuator 10dB | AEROFLEX | – | A7122268 | 07/23 | 07/25 |
| CABLE SMA 1m | RADIALL | 11GHz | A5329862 | 07/23 | 07/24 |
| Full Anechoic Room | SIEPEL | – | D3044024 | | |
| Multimeter - CEM | FLUKE | 87 | A1240251 | 10/23 | 10/25 |
| SMK 1.2m (Ampl <-> chamber) | HUBER-SUHNER | SUCOFLEX 102 | A5330062 | 04/23 | 04/26 |
| Spectrum analyzer | ROHDE & SCHWARZ | FSV 40 | A4060059 | 04/24 | 04/26 |
| Thermo-hygrometer | TESTO | 608-H1 | B4204120 | 03/23 | 03/25 |
| Thermo-hygrometer (PM1/2/3) | KIMO | HQ 210 | B4206022 | 05/23 | 05/25 |

8.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None




L C I E

8.6. RESULTS

8.6.1. Operational frequency band

| |
|--|
| Unwanted emissions in non-restricted bands at the band edge |
| Configuration: WiFi - 802.11b 1Mbits/s |
| Cmin / Cmid / Cmax |
| Delta limit (dBc) determination |
| Tx1 |

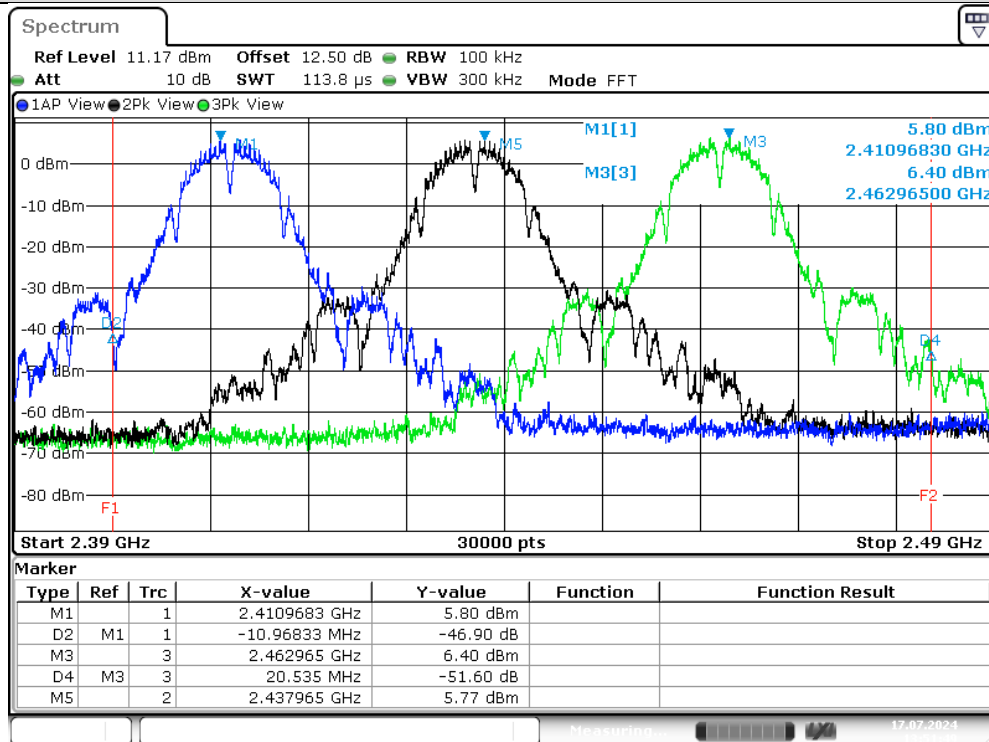

Date: 17.JUL.2024 13:51:48

| Frequency (MHz) | Level (dBc) | Limit (dBc) |
|------------------------|-------------|-------------|
| C_{min} | -46.9 | -20 |
| C_{max} | -51.6 | -20 |



L C I E


Unwanted emissions in non-restricted bands at the band edge

Configuration: WiFi - 802.11g 6Mbits/s

Cmin / Cmid / Cmax

Delta limit (dBc) determination

Tx1

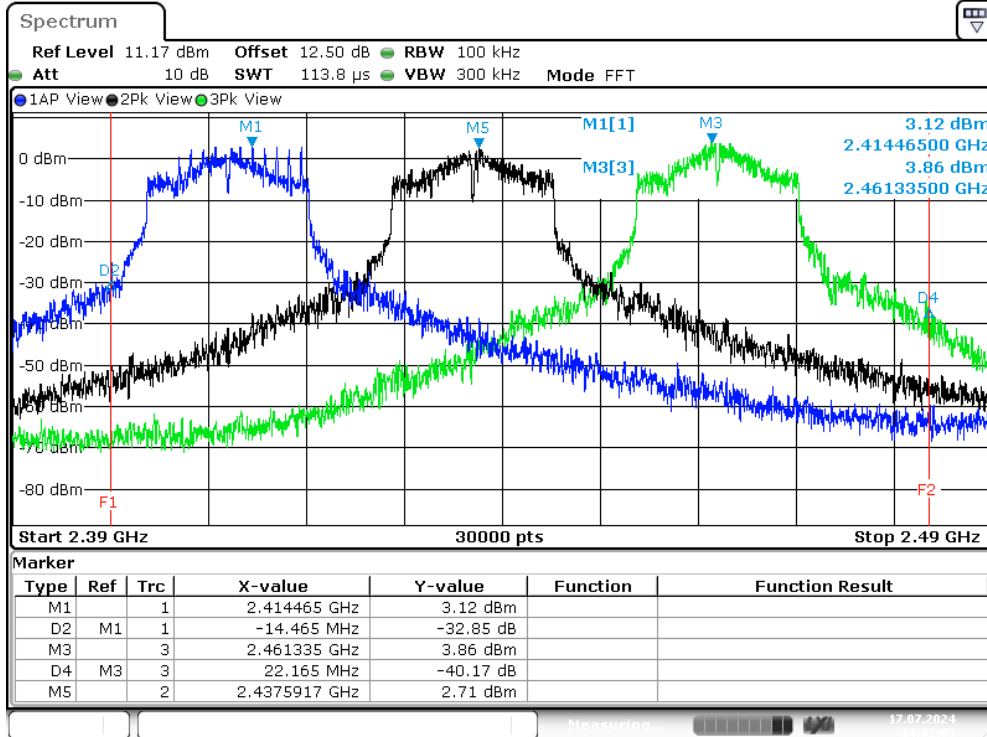

Date: 17.JUL.2024 14:02:04

| Frequency (MHz) | Level (dBc) | Limit (dBc) |
|-----------------|-------------|-------------|
| Cmin | -32.85 | -20 |
| Cmax | -40.17 | -20 |



L C I E


Unwanted emissions in non-restricted bands at the band edge

Configuration: WiFi - 802.11n HT20 MCS0

Cmin / Cmid / Cmax

Delta limit (dBc) determination


Tx1

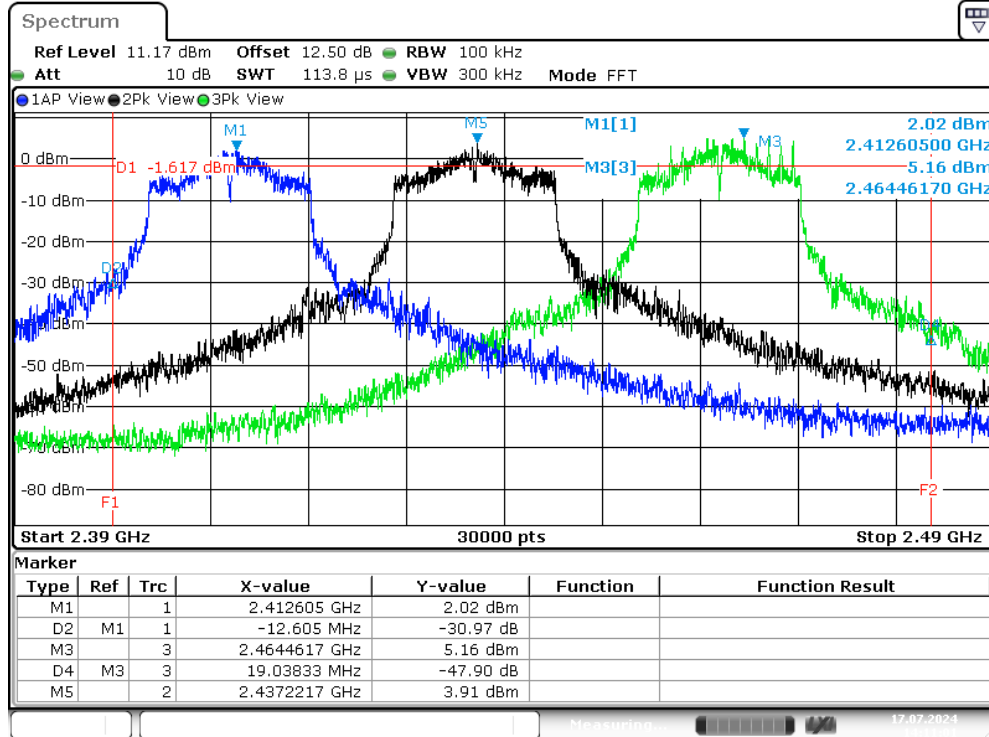

Date: 17.JUL.2024 14:11:01

| Frequency (MHz) | Level (dBc) | Limit (dBc) |
|------------------------|-------------|-------------|
| C_{min} | -30.97 | -20 |
| C_{max} | -47.9 | -20 |

8.6.2. Non restricted frequency bands

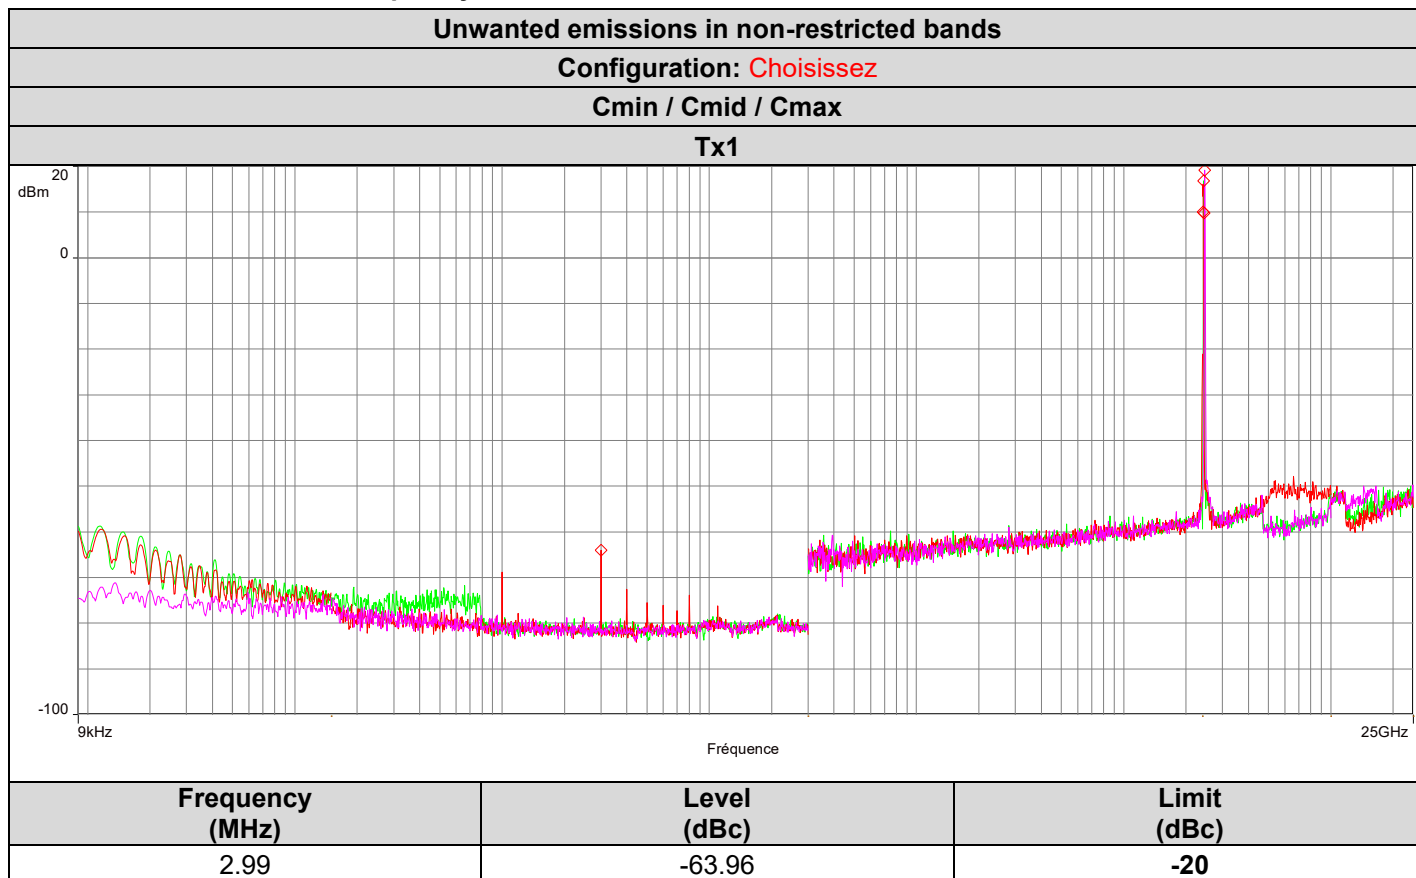

8.7. CONCLUSION

Unwanted emissions in non-restricted bands and at the band edge measurement performed on the sample of the product **Tikee mini**, Sn: **M-MIN-0A-001105 / M-MIN-0A-001090**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.



9. UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS

9.1. TEST CONDITIONS

Date of test : July 16, 2024
 Test performed by : Akram HAKKARI
 Relative humidity (%) : 33
 Ambient temperature (°C) : 21

9.2. TEST SETUP

Test procedure:
 ANSI C63.10 & FCC Part 15 subpart C

Following frequency ranges, test setup parameters are different and specified in this table:

| Frequency range: | 9kHz to 30MHz | |
|-------------------------|--|---------------------|
| Test: | Pre-Characterization | Qualification |
| Antenna Polarization: | Parallel, Perpendicular and Ground parallel | |
| Antenna Height: | Centered on EUT (§6.6.5 ANSI C63-10) | 1m |
| Antenna Type: | Loop | |
| RBW Filter: | 200Hz below 150kHz / 9kHz above 150kHz | |
| Maximization: | Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration | |
| EUT height: | 1.5m | 0.8m |
| Test site: | Full Anechoic Chamber | Open Aera Test Site |
| Distance EUT - Antenna: | 3m | 10m |
| Detector: | Peak | QPeak |

| Frequency range: | 30MHz to 1GHz | |
|-------------------------|--|----------------------|
| Test: | Pre-Characterization | Qualification |
| Antenna Polarization: | Horizontal and Vertical | |
| Antenna Height: | Centered on EUT (§6.6.5 ANSI C63-10) | Varied from 1m to 4m |
| Antenna Type: | Bi-Log | |
| RBW Filter: | 120kHz | |
| Maximization: | Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration | |
| EUT height: | 1.5m | 0.8m |
| Test site: | Full Anechoic Chamber | Open Aera Test Site |
| Distance EUT - Antenna: | 3m | 10m |
| Detector: | Peak | QPeak |




| Frequency range: | 1GHz to 14GHz | |
|-------------------------|--|--------------------------------------|
| Test: | Pre-Characterization | Qualification |
| Antenna Polarization: | Horizontal and Vertical | |
| Antenna Height: | Centered on EUT (§6.6.5 ANSI C63-10) | Centered on EUT (§6.6.5 ANSI C63-10) |
| Antenna Type: | Horn | |
| RBW Filter: | 1MHz | |
| Maximization: | Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration | |
| EUT height: | 1.5m | 1.5m |
| Test site: | Full Anechoic Chamber | Full Anechoic Chamber |
| Distance EUT - Antenna: | 3m | 3m |
| Detector: | Peak & Average | Peak & Average |

| Frequency range: | 14GHz to 25GHz | |
|-------------------------|--|--------------------------------------|
| Test: | Pre-Characterization | Qualification |
| Antenna Polarization: | Horizontal and Vertical | |
| Antenna Height: | Centered on EUT (§6.6.5 ANSI C63-10) | Centered on EUT (§6.6.5 ANSI C63-10) |
| Antenna Type: | Horn | |
| RBW Filter: | 1MHz | |
| Maximization: | Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration | |
| EUT height: | 1.5m | 1.5m |
| Test site: | Full Anechoic Chamber | Full Anechoic Chamber |
| Distance EUT - Antenna: | 1m | 1m |
| Detector: | Peak & Average | Peak & Average |



L C I E

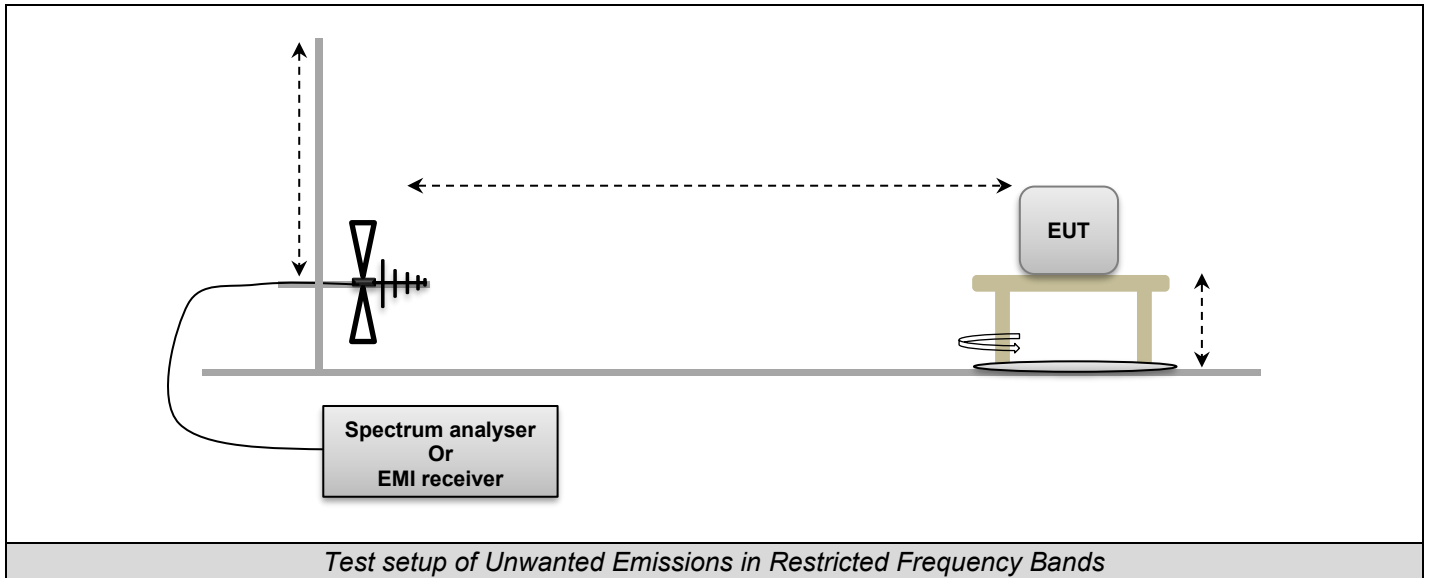



L C I E



Photo of Unwanted Emissions in Restricted Frequency Bands



9.3. LIMIT

| Measure at 300m | | |
|-------------------|--------------------------|----------|
| Frequency range | Level | Detector |
| 9kHz-490kHz | 67.6dB μ V/m /F(kHz) | QPeak |
| Measure at 30m | | |
| Frequency range | Level | Detector |
| 490kHz-1.705MHz | 87.6dB μ V/m /F(kHz) | QPeak |
| 1.705MHz-30MHz | 29.5dB μ V/m | QPeak |
| Measure at 10m | | |
| Frequency range | Level | Detector |
| 30MHz to 88MHz | 29.5dB μ V/m | QPeak |
| 88MHz to 216MHz | 33dB μ V/m | QPeak |
| 216MHz to 960MHz | 35.5B μ V/m | QPeak |
| 960MHz to 1000MHz | 43.5dB μ V/m | QPeak |
| Above 1000MHz | 63.5dB μ V/m | Peak |
| | 43.5dB μ V/m | Average |
| Measure at 3m | | |
| Frequency range | Level | Detector |
| 30MHz to 88MHz | 40dB μ V/m | QPeak |
| 88MHz to 216MHz | 43.5dB μ V/m | QPeak |
| 216MHz to 960MHz | 46B μ V/m | QPeak |
| 960MHz to 1000MHz | 54dB μ V/m | QPeak |
| Above 1000MHz | 74dB μ V/m | Peak |
| | 54dB μ V/m | Average |



9.4. TEST EQUIPMENT LIST

| TEST EQUIPMENT USED | | | | | |
|---------------------------------|-----------------|------------------|---------------|----------|---------|
| Description | Manufacturer | Model | Identifier | Cal_Date | Cal_Due |
| Amplifier 10MHz - 18GHz | LCIE SUD EST | – | A7102082 | 05/22 | 05/24 |
| Antenna Bi-log | AH System | SAS-521-7 | C2040180 | 05/23 | 05/25 |
| Antenna horn 18GHz | EMCO | 3115 | C2042029 | 03/22 | 03/25 |
| BAT EMC | NEXIO | v3.21.0.32 | L1000115 | | |
| CABLE | TELEDYNE | R82-0404-0.5M | A5330010 | 03/22 | 03/25 |
| Cable 0.75m | - | 18GHz | A5329900 | 08/22 | 08/24 |
| Cable SMA 40cm | WITHWAVE | W101-SM1-0.4M | A5329979 | 10/23 | 10/26 |
| Comb EMR HF | YORK | CGE01 | A3169114 | | |
| CONTROLLER | INSCO | CO3000 | D3044034 | | |
| Emission Cable (SMA 1m) | TELEDYNE | 26GHz | A5329874 | 08/22 | 08/25 |
| Emission Cable (SMA 3.3m) | TELEDYNE | 26GHz | A5329875 | 08/22 | 08/25 |
| Filter Matrice | LCIE SUD EST | Combined filters | A7484078 | 03/23 | 03/25 |
| Rehausse Table C3 | LCIE | – | F2000511 | | |
| Rehausse Table C3 | LCIE | – | F2000507 | | |
| Semi-Anechoic chamber #3 (BF) | SIEPEL | – | D3044017_BF | 04/22 | 04/25 |
| Semi-Anechoic chamber #3 (VSWR) | SIEPEL | – | D3044017_VSWR | 04/22 | 04/25 |
| Spectrum analyzer | ROHDE & SCHWARZ | FSU 26 | A4060058 | 09/23 | 09/25 |
| Table C3 | LCIE | – | F2000461 | | |
| Thermo-hygrometer (PM1/2/3) | KIMO | HQ 210 | B4206022 | 05/23 | 05/25 |
| TILT | INSCO | TILT | D3044033 | | |
| Turntable chamber (Cage#3) | ETS Lingren | Model 2165 | F2000371 | | |
| Turntable controller (Cage#3) | ETS Lingren | Model 2090 | F2000444 | | |

9.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



9.6. RESULTS

For all following measurements, worst case is presented with different configurations and modulations of EUT.

9.6.1. 9kHz to 30MHz

Graphs – Pre characterization:

| Graph identifier | Polarization | Mode | Channel | EUT position | Comments |
|------------------|--------------|------|---------|--------------|---------------------------|
| Emr# 1 | 0°/90° | TX | Single | Axis XY/Z | See the following results |
| Emr# 2 | 180° | TX | Single | Axis XY/Z | See the following results |




L C I E

Radiated Emissions

Graph name: Emr#1
Frequency range: 9 kHz to 30 MHz

(0°/90°) - TX mode - Axis 0° (Worst case presented)

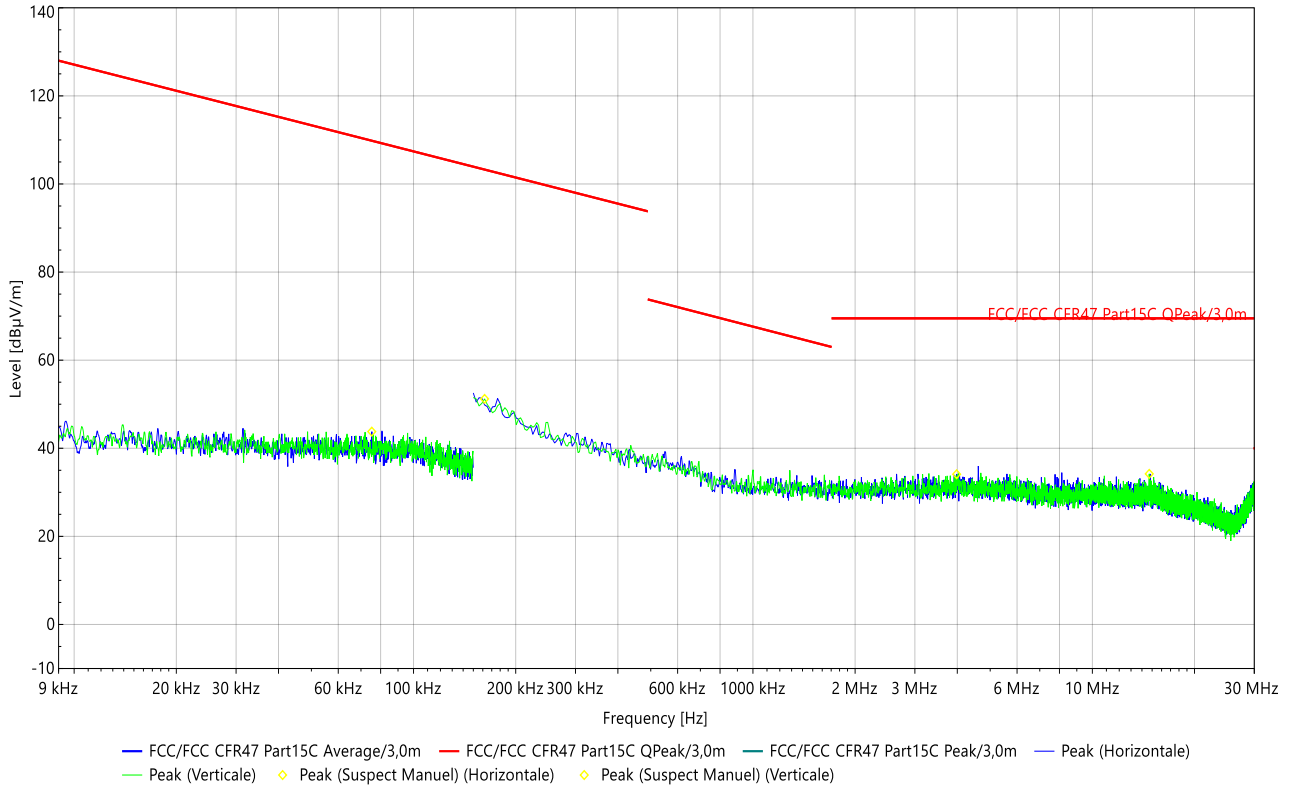

| Frequency | PK Level (dBµV/m) | Lim.QP (dBµV/m) | Angle (°) | Polar. | Correct. (dB) |
|--------------|-------------------|-----------------|-----------|--------|---------------|
| 75.326 kHz | 43.78 | 109.82 | 183 | H | 60.14 |
| 3.98274 MHz | 34.10 | 69.50 | 131 | H | 40.21 |
| 161.94 kHz | 51.21 | 103.27 | 275 | V | 56.17 |
| 14.71083 MHz | 34.19 | 69.50 | 4 | V | 38.91 |

No significant frequency observed




L C I E

Radiated Emissions

Graph name: Emr#2
Frequency range: 9 kHz to 30 MHz

(180°) - TX mode - Axis 0° (Worst case presented)

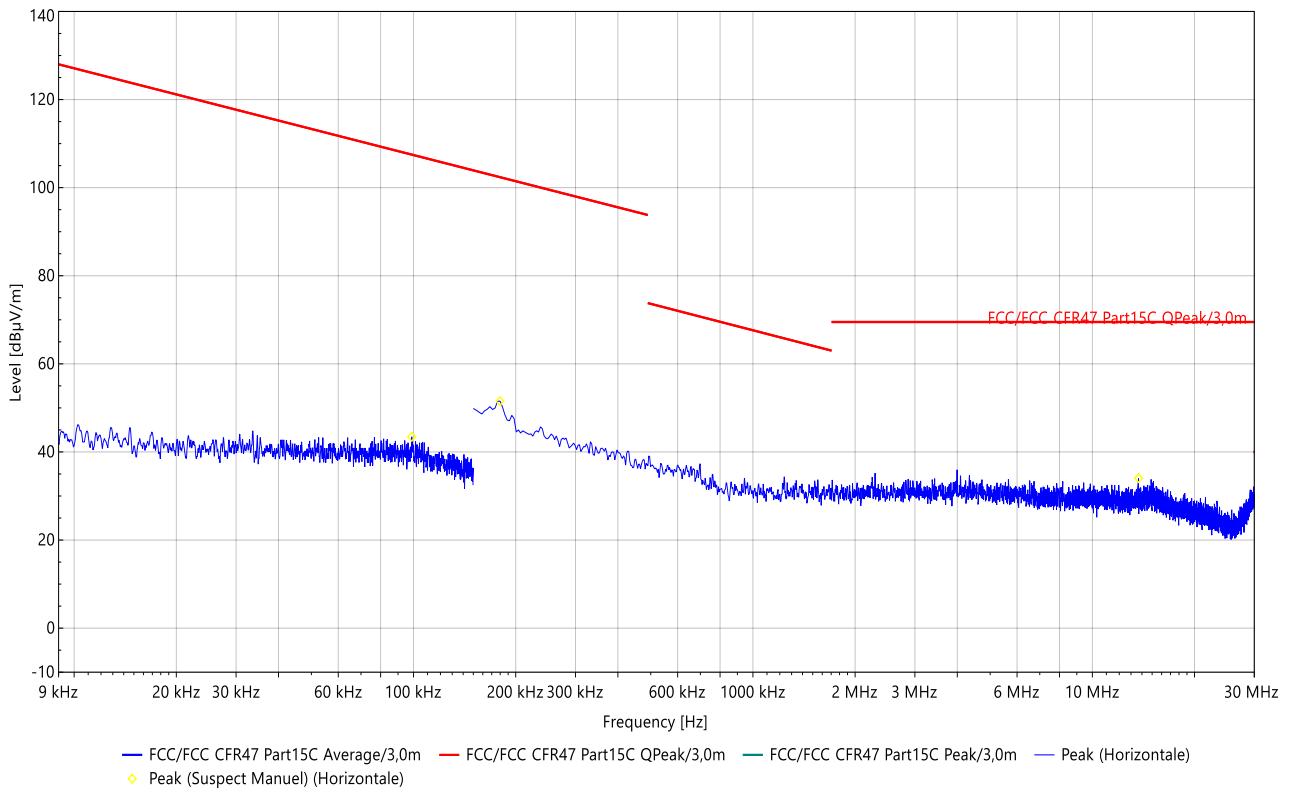

Pre-Characterization:

| Frequency | PK Level (dBµV/m) | Lim.QP (dBµV/m) | Angle (°) | Polar. | Correct. (dB) |
|---------------|-------------------|-----------------|-----------|--------|---------------|
| 98.816 kHz | 43.44 | 107.50 | 122 | H | 60.28 |
| 179.85 kHz | 51.54 | 102.38 | 357 | H | 55.32 |
| 13.681005 MHz | 34.05 | 69.50 | 92 | H | 39.14 |

No significant frequency observed



9.6.2. 30MHz to 14GHz

Graphs – Pre characterization:

| Graph identifier | Polarization | Mode | Channel | EUT position | Comments |
|------------------|--------------|------|---------|--------------|---------------------------|
| Emr# 3 | H/V | TX | Cmin | Axis XY/Z | See the following results |
| Emr# 4 | H/V | TX | Cmid | Axis XY/Z | See the following results |
| Emr# 5 | H/V | TX | Cmax | Axis XY/Z | See the following results |




L C I E

Radiated Emissions

Graph name: Emr#3
Frequency range: 30 MHz to 14 GHz

(H+V) - Cmin - TX mode - Automatic Axis

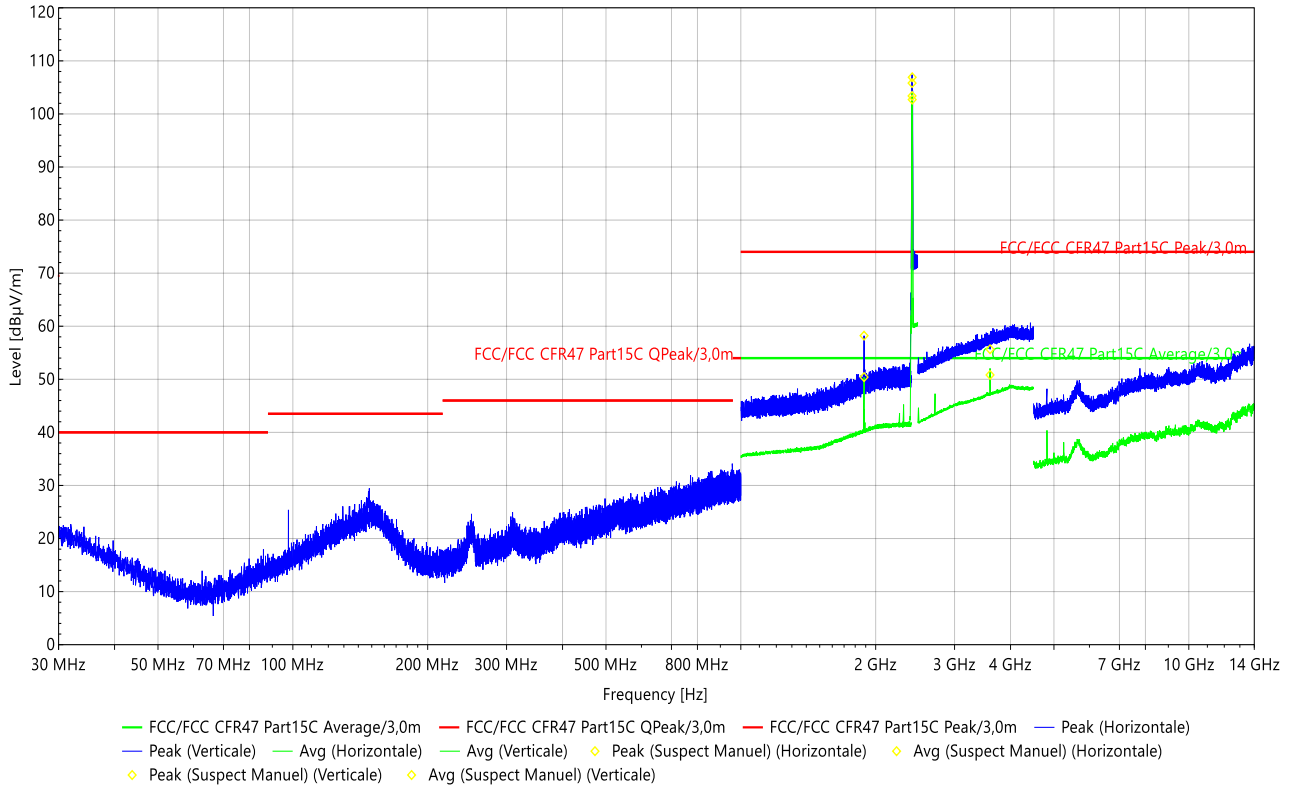

Pre-Characterization:

| Frequency | PK Level (dBµV/m) | Lim.PK (dBµV/m) | Avg (dBµV/m) | Lim.Avg (dBµV/m) | Lim.QP (dBµV/m) | Angle (°) | Polar. | Correct. (dB) |
|-----------------|-------------------|-----------------|--------------|------------------|-----------------|-----------|--------|---------------|
| 2.41123075 GHz* | 105.81 | 74.00 | 103.39 | 54.00 | | 268 | H | 35.72 |
| 2.4129425 GHz* | 106.91 | 74.00 | 102.70 | 54.00 | | 268 | H | 35.72 |
| 1.88375 GHz | 58.22 | 74.00 | 50.41 | 54.00 | | 114 | H | 34.65 |
| 3.599834399 GHz | 55.66 | 74.00 | 50.82 | 54.00 | | 233 | V | 40.39 |
| 4.012758320 GHz | 60.12 | 74.00 | 48.32 | 54.00 | | 218 | V | 40.39 |

*Carrier frequency
 No significant frequency observed




L C I E

Radiated Emissions

Graph name: Emr#4
Frequency range: 30 MHz to 14 GHz

(H+V) - Cmid - TX mode - Automatic Axis

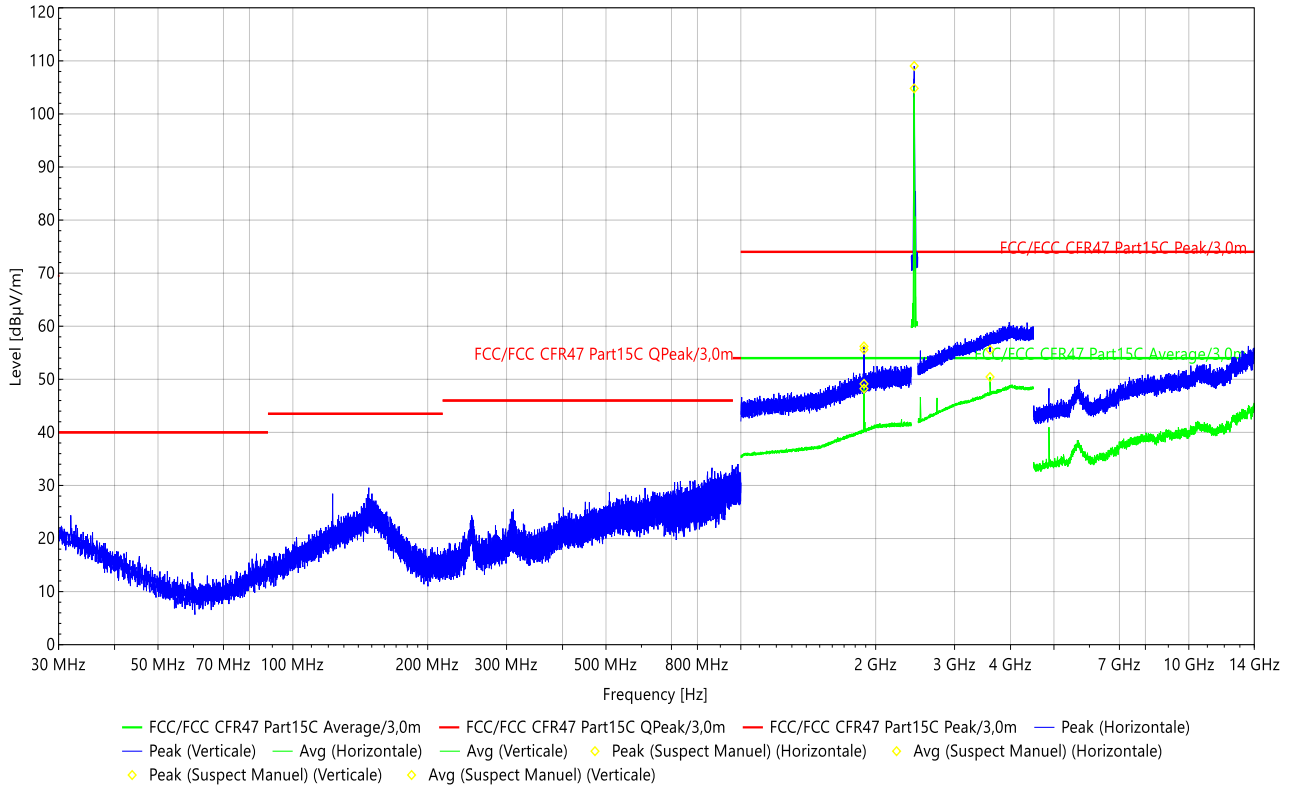


Pre-Characterization:

| Frequency | PK Level (dBµV/m) | Lim.PK (dBµV/m) | Avg (dBµV/m) | Lim.Avg (dBµV/m) | Lim.QP (dBµV/m) | Angle (°) | Polar. | Correct. (dB) |
|-----------------|-------------------|-----------------|--------------|------------------|-----------------|-----------|--------|---------------|
| 1.88305 GHz | 56.20 | 74.00 | 48.24 | 54.00 | | 192 | H | 34.64 |
| 3.599834399 GHz | 55.57 | 74.00 | 50.44 | 54.00 | | 327 | V | 40.39 |
| 2.43795075 GHz* | 109.03 | 74.00 | 104.81 | 54.00 | | 301 | V | 35.77 |
| 1.8834 GHz | 55.60 | 74.00 | 49.15 | 54.00 | | 5 | V | 34.65 |
| 4.03758532 GHz | 60.34 | 74.00 | 49.02 | 54.00 | | 197 | V | 40.39 |

*Carrier frequency
 No significant frequency observed



L C I E

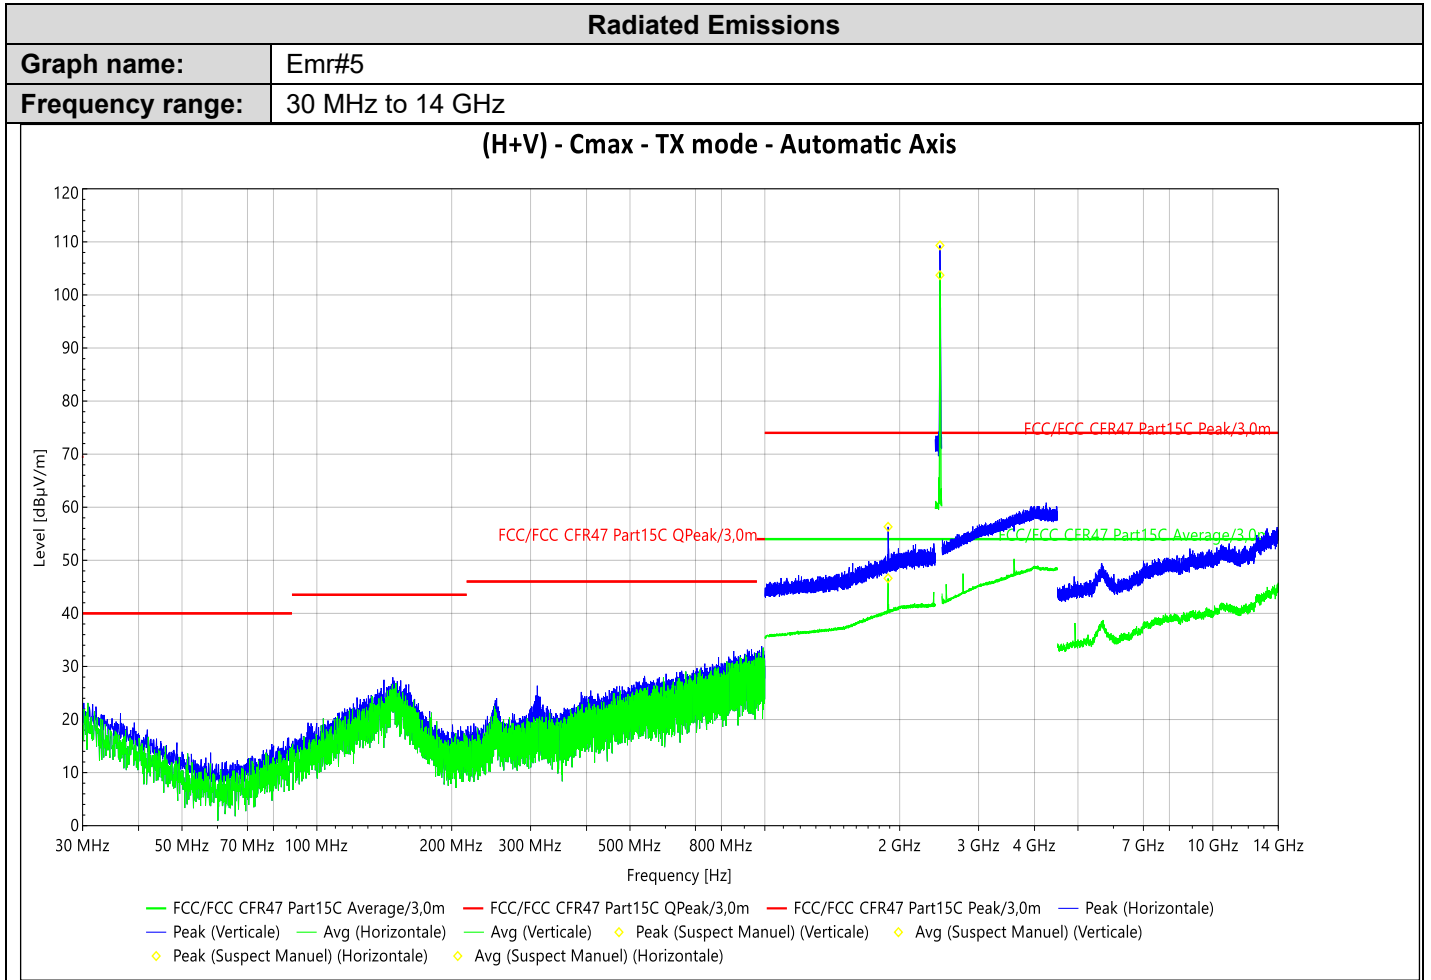

Pre-Characterization:

| Frequency | PK Level (dBµV/m) | Lim.PK (dBµV/m) | Avg (dBµV/m) | Lim.Avg (dBµV/m) | Lim.QP (dBµV/m) | Angle (°) | Polar. | Correct. (dB) |
|-----------------|-------------------|-----------------|--------------|------------------|-----------------|-----------|--------|---------------|
| 2.46007825 GHz* | 109.33 | 74.00 | 103.72 | 54.00 | | 281 | V | 35.78 |
| 1.8841 GHz | 56.31 | 74.00 | 46.61 | 54.00 | | 354 | H | 34.65 |
| 4.009837189 GHz | 60.02 | 74.00 | 48.12 | 54.00 | | 183 | V | 40.39 |

*Carrier frequency
 No significant frequency observed




9.6.3. 1GHz to 25GHz

Graphs – Pre characterization:

| Graph identifier | Polarization | Mode | Channel | EUT position | Comments |
|------------------|--------------|------|---------|--------------|---------------------------|
| Emr# 6 | H/V | TX | Cmin | Axis XY/Z | See the following results |
| Emr# 7 | H/V | TX | Cmid | Axis XY/Z | See the following results |
| Emr# 8 | H/V | TX | Cmax | Axis XY/Z | See the following results |



L C I E

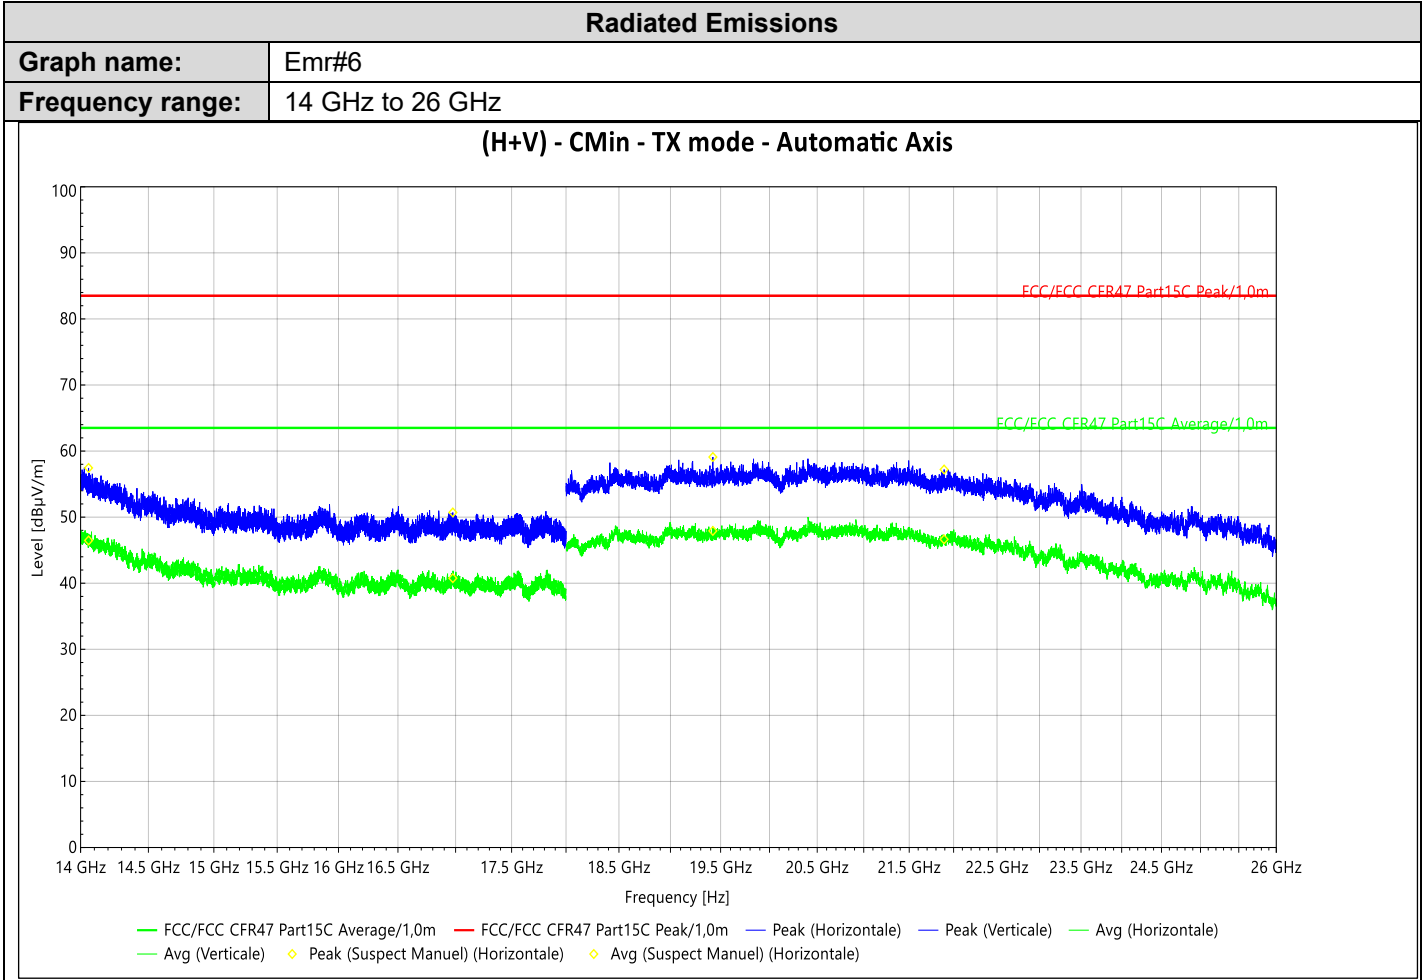


Pre-Characterization:

| Frequency | PK Level (dBµV/m) | Lim.PK (dBµV/m) | Avg (dBµV/m) | Lim.Avg (dBµV/m) | Angle (°) | Polar. | Correct. (dB) |
|-------------|-------------------|-----------------|--------------|------------------|-----------|--------|---------------|
| 14.058 GHz | 57.45 | 83.50 | 46.47 | 63.50 | 234 | H | 3.28 |
| 16.9755 GHz | 50.70 | 83.50 | 40.76 | 63.50 | 30 | H | -4.99 |
| 19.422 GHz | 59.10 | 83.50 | 47.92 | 63.50 | 0 | H | 2.37 |
| 21.892 GHz | 57.21 | 83.50 | 46.64 | 63.50 | 114 | H | 2.35 |

No significant frequency observed




L C I E

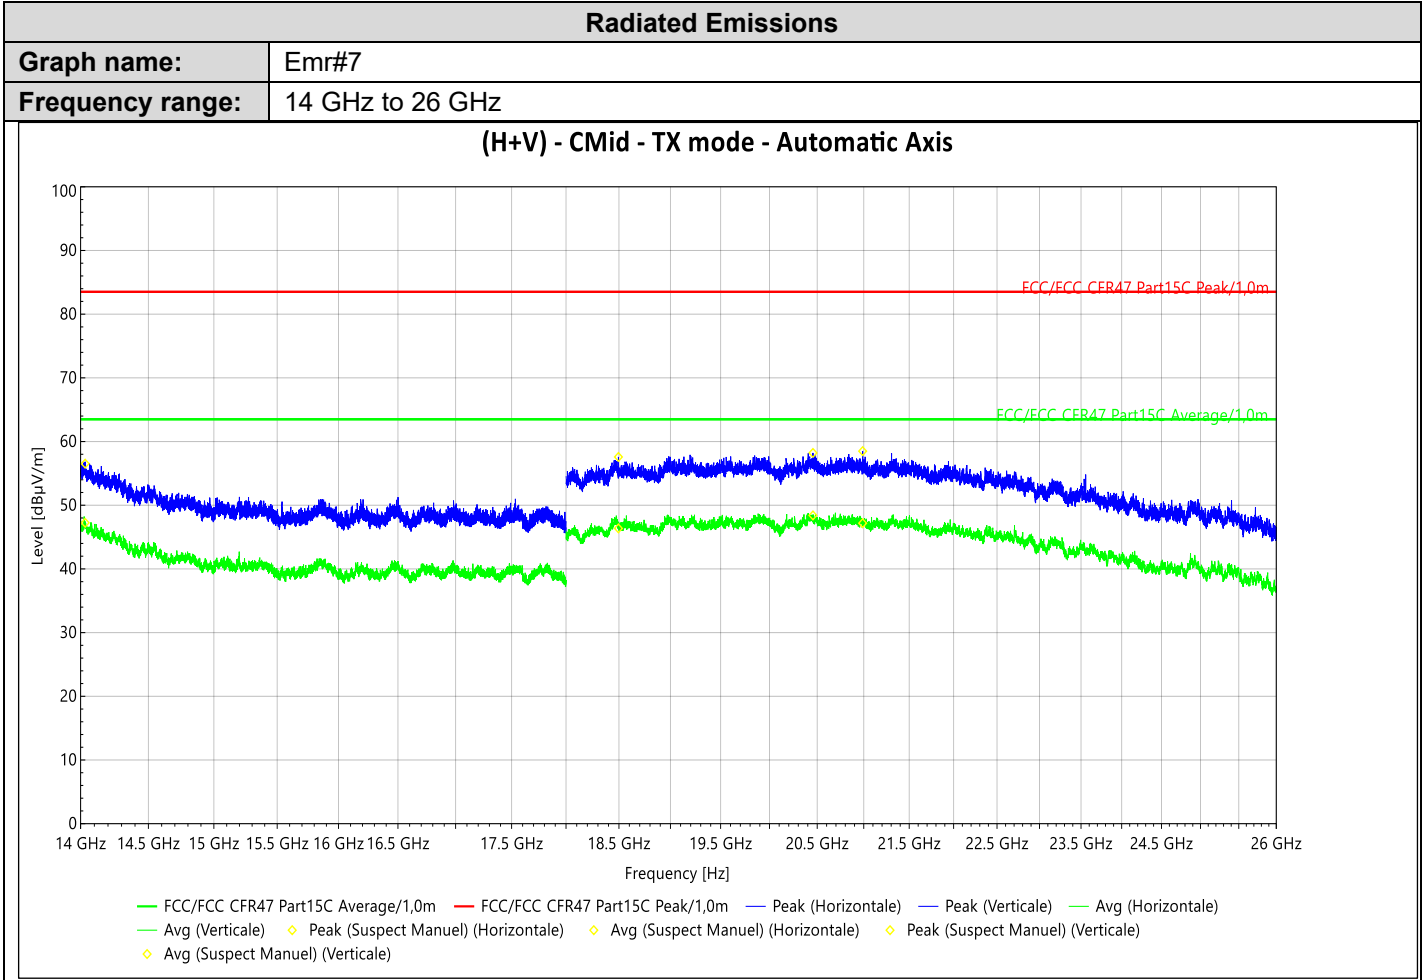

Pre-Characterization:

| Frequency | PK Level (dBµV/m) | Lim.PK (dBµV/m) | Avg (dBµV/m) | Lim.Avg (dBµV/m) | Angle (°) | Polar. | Correct. (dB) |
|------------|-------------------|-----------------|--------------|------------------|-----------|--------|---------------|
| 14.033 GHz | 56.53 | 83.50 | 47.24 | 63.50 | 199 | H | 3.44 |
| 20.988 GHz | 58.49 | 83.50 | 47.18 | 63.50 | 202 | H | 3.10 |
| 18.495 GHz | 57.58 | 83.50 | 46.36 | 63.50 | 155 | V | 3.41 |
| 20.455 GHz | 58.21 | 83.50 | 48.40 | 63.50 | 268 | V | 3.52 |

No significant frequency observed

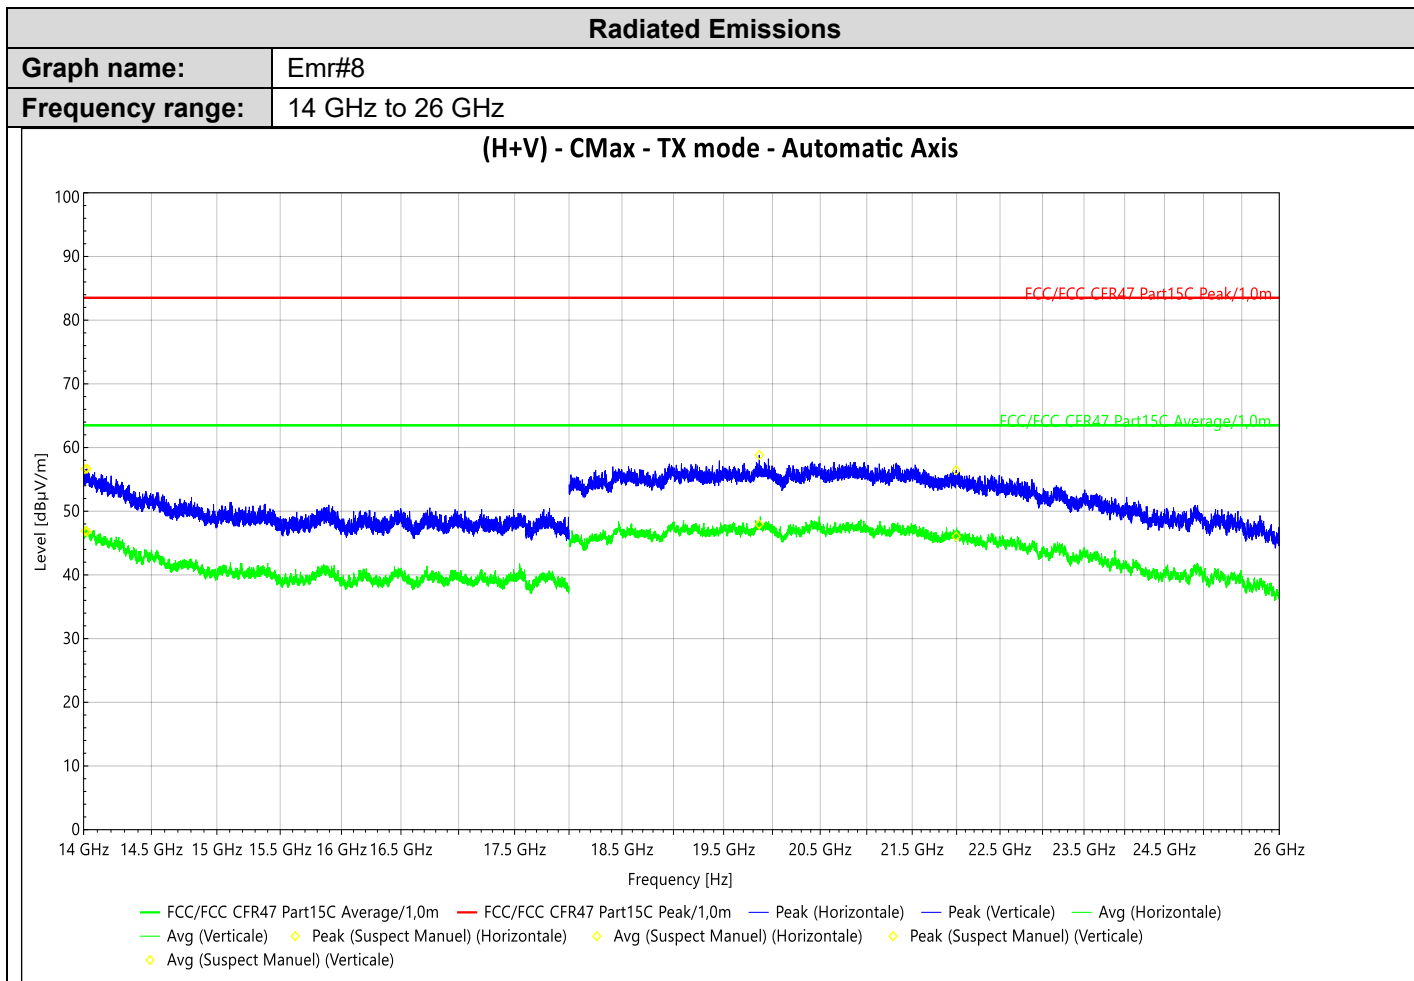

Pre-Characterization:

| Frequency | PK Level (dBµV/m) | Lim.PK (dBµV/m) | Avg (dBµV/m) | Lim.Avg (dBµV/m) | Angle (°) | Polar. | Correct. (dB) |
|-------------|-------------------|-----------------|--------------|------------------|-----------|--------|---------------|
| 14.0105 GHz | 56.62 | 83.50 | 46.87 | 63.50 | 214 | H | 3.57 |
| 21.995 GHz | 56.44 | 83.50 | 46.04 | 63.50 | 126 | H | 2.14 |
| 14.025 GHz | 56.68 | 83.50 | 46.80 | 63.50 | 84 | V | 3.48 |
| 19.863 GHz | 58.84 | 83.50 | 47.95 | 63.50 | 8 | V | 3.69 |

No significant frequency observed

9.7. CONCLUSION

Unwanted emissions in non-restricted bands measurement performed on the sample of the product **Tikee mini**, Sn: **M-MIN-0A-001105 / M-MIN-0A-001090**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.



10. UNCERTAINTIES CHART

| <i>Kind of measurement</i> | <i>Wide uncertainty laboratory</i> |
|--|------------------------------------|
| Occupied Channel Bandwidth | ±2.8 % |
| Humidity | ±3.2 % |
| Power Spectral Density, Conducted | ±1.7 dB |
| Radio frequency | ±0.3 ppm |
| RF power, conducted | ±1.2 dB |
| RF power, radiated (Full anechoic chamber above 1GHz) | ±3.7 dB |
| RF power, radiated (Semi anechoic chamber & open test site) | ±5.6 dB |
| Spurious emission, conducted | ±2.3 dB |
| Spurious emission, radiated (Full anechoic chamber above 1GHz) | ±3.8 dB |
| Spurious emission, radiated (Semi anechoic chamber & open test site) | ±5.7 dB |
| Temperature | ±0.75 °C |
| Time | ±2.3 % |
| Voltage | ±1.7 % |

The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the standard. The conformity of the sample is directly established by the applicable limit values. This table includes all uncertainties maximum feasible for testing in the laboratory, whether or not made in this report.