



TEST REPORT

Report Number. : 13714272-E2V1

Applicant : LEVITON MANUFACTURING CO., INC.
10385 SW AVERY
TUALATIN, OR 97062-2210
USA

Model : MSC-B9604

Brand : LEVITON

FCC ID : 2ASLN-ZL07S

IC : 25037-ZL07S

EUT Description : MSC MUSHROOM LOGIC BOARD B9604

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
September 02, 2021

Prepared by:
UL VERIFICATION SERVICES
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	9/2/2021	Initial Issue	

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS.....	5
2. TEST RESULTS SUMMARY	7
3. TEST METHODOLOGY	8
4. FACILITIES AND ACCREDITATION.....	8
5. DECISION RULES AND MEASUREMENT UNCERTAINTY.....	9
5.1. <i>METROLOGICAL TRACEABILITY</i>	9
5.2. <i>DECISION RULES</i>	9
5.3. <i>MEASUREMENT UNCERTAINTY.....</i>	9
5.4. <i>SAMPLE CALCULATION.....</i>	9
6. EQUIPMENT UNDER TEST	10
6.1. <i>EUT DESCRIPTION.....</i>	10
6.2. <i>MAXIMUM OUTPUT POWER.....</i>	10
6.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	10
6.4. <i>SOFTWARE AND FIRMWARE</i>	10
6.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	11
6.6. <i>DESCRIPTION OF TEST SETUP</i>	12
7. MEASUREMENT METHOD	16
8. TEST AND MEASUREMENT EQUIPMENT	17
9. ANTENNA PORT TEST RESULTS	18
9.1. <i>ON TIME AND DUTY CYCLE</i>	18
9.2. <i>99% BANDWIDTH.....</i>	19
9.3. <i>6 dB BANDWIDTH</i>	20
9.4. <i>OUTPUT POWER</i>	21
9.5. <i>AVERAGE POWER.....</i>	22
9.6. <i>POWER SPECTRAL DENSITY</i>	23
9.7. <i>CONDUCTED SPURIOUS EMISSIONS</i>	25
10. RADIATED TEST RESULTS.....	27
10.1. <i>LIMITS AND PROCEDURE.....</i>	27

10.2. TRANSMITTER ABOVE 1 GHz.....	29
10.3. WORST CASE BELOW 30MHz	39
10.4. WORST CASE BELOW 1 GHz.....	41
10.5. WORST CASE 18-26 GHz	43
11. AC POWER LINE CONDUCTED EMISSIONS	45
12. SETUP PHOTOS	48

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LEVITON MANUFACTURING CO., INC.
10385 SW AVERY
TUALATIN, OR 97062-2210
USA

EUT DESCRIPTION: MSC MUSHROOM LOGIC BOARD B9604

MODEL: MSC-B9604

BRAND: LEVITON

SERIAL NUMBER: 9MC (Conducted)
6MR, 7MR, 8MR, 10MR (Radiated)

DATE TESTED: MAY 20 – JUNE 29, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5 + A1	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Dan Corona
Operations Leader
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Brian Shen
Laboratory Engineer
Consumer Technology Division
UL Verification Services Inc.

Reviewed By:



Kiya Kedida
Senior Project Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST RESULTS SUMMARY

This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for the validity of results after the integration of the data provided by the customer.

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	ANSI C63.10 Section 11.6.
-	RSS-GEN 6.7	99% OBW	Reporting purposes only	ANSI C63.10 Section 6.9.3.
15.247 (a) (2)	RSS-247 5.2 (a)	6dB BW		None.
15.247 (b) (3)	RSS-247 5.4 (d)	Output Power		None.
See Comment		Average power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (e)	RSS-247 5.2 (b)	PSD		None.
15.247 (d)	RSS-247 5.5	Conducted Spurious Emissions		None.
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions		None.
15.207	RSS-Gen 8.8	AC Mains Conducted Emissions		None.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, RSS-GEN Issue 5 + A1 + A2, and RSS-247 Issue 2.

4. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building 1: 47173 Benicia Street Fremont, CA 94538, U.S.A	US0104	2324A	208313
<input type="checkbox"/>	Building 2: 47266 Benicia Street Fremont, CA 94538, U.S.A	US0104	22541	208313
<input checked="" type="checkbox"/>	Building 4: 47658 Kato Rd Fremont, CA 94538, U.S.A	US0104	2324B	208313

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U_{Lab}
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.84 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 dB

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

$$36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$$

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The EUT is a BLE & ZIGBEE MSC Mushroom Logic Board B9604. It is a limited module and tested in number of host models. Models# 0-10V: ZLD7S-N00, ZLD70-N00 and DALI: ZL0DS-N00, ZL0D0-N00 containing BG21 are identical in terms of enclosure and PCB board and their configurations to model# 0-10V: ZL07S-N00, ZL070-N00 and DALI: ZL0DS-N00, ZL0D0-N00 containing MG21; the only difference is these are BLE-only and had other proprietary protocol features disabled by silicon manufacturer.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2405 - 2480	Zigbee	7.90	6.17

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna gain(s) and type, as provided by the manufacturer, are as follows:

The radio utilizes a wire antenna, with a maximum gain of 1.5dBi.

6.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was SiLabs Railtest firmware version # 2.8.6
The EUT firmware installed during testing was SiLabs Railtest_efr32mg21_mushroom.s37
The test utility software used during testing was RealTerm version 2.0.0.70

6.5. WORST-CASE CONFIGURATION AND MODE

Radiated emissions below 1GHz, above 18GHz, and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Band edge and radiated emissions between 1GHz and 18GHz were performed with the EUT set to transmit at the highest power on low, middle and high channels.

A metal plate(for end product installation purposes) was attached to the host per applicant's request. The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

Part number ZL07S-N00 with both BLE/Zigbee protocol was set for full testing and spot check verification has been done on models ZL070-N00, ZL0DS-N00 and ZL0D0-N00 for radiated harmonic spurious.

6.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Asus	EeePC1101HAB	-	DoC
FTDI to USB Cable	-	-	-	-
LED Electronics Driver	Signify	XI040C110V054PST2	-	-
LED Electronics Driver	Signify	XI040C110V054PVT2	-	-
5V Power Supply	Cui Inc	SWM6-5-NH-C	172400495	-

I/O CABLES (CONDUCTED EMISSIONS)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	DC	Unshielded	3	Driver to EUT
2	FTDI	1	USB	Unshielded	1.8	EUT to Laptop (maintenance cable)
3	Antenna Port	1	SMA	Unshielded	0.2	EUT to Analyzer
4	AC	1	AC	Unshielded	3	

I/O CABLES (RADIATED EMISSIONS 1 to 18GHz)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	DC	Unshielded	3	AC/DC Supply
2	FTDI	1	USB	Unshielded	1.8	EUT to Laptop (maintenance cable)


I/O CABLES (RADIATED EMISSIONS 9KHz to 30MHz, 30MHz to 1GHz AND AC POWER LINE CONDUCTED EMISSIONS)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	DC	Unshielded	3	AC/DC Supply

SETUP DIAGRAM FOR CONDUCTED TESTS

TEST SETUP


The EUT is powered by the Driver. Test software exercised the radio card.

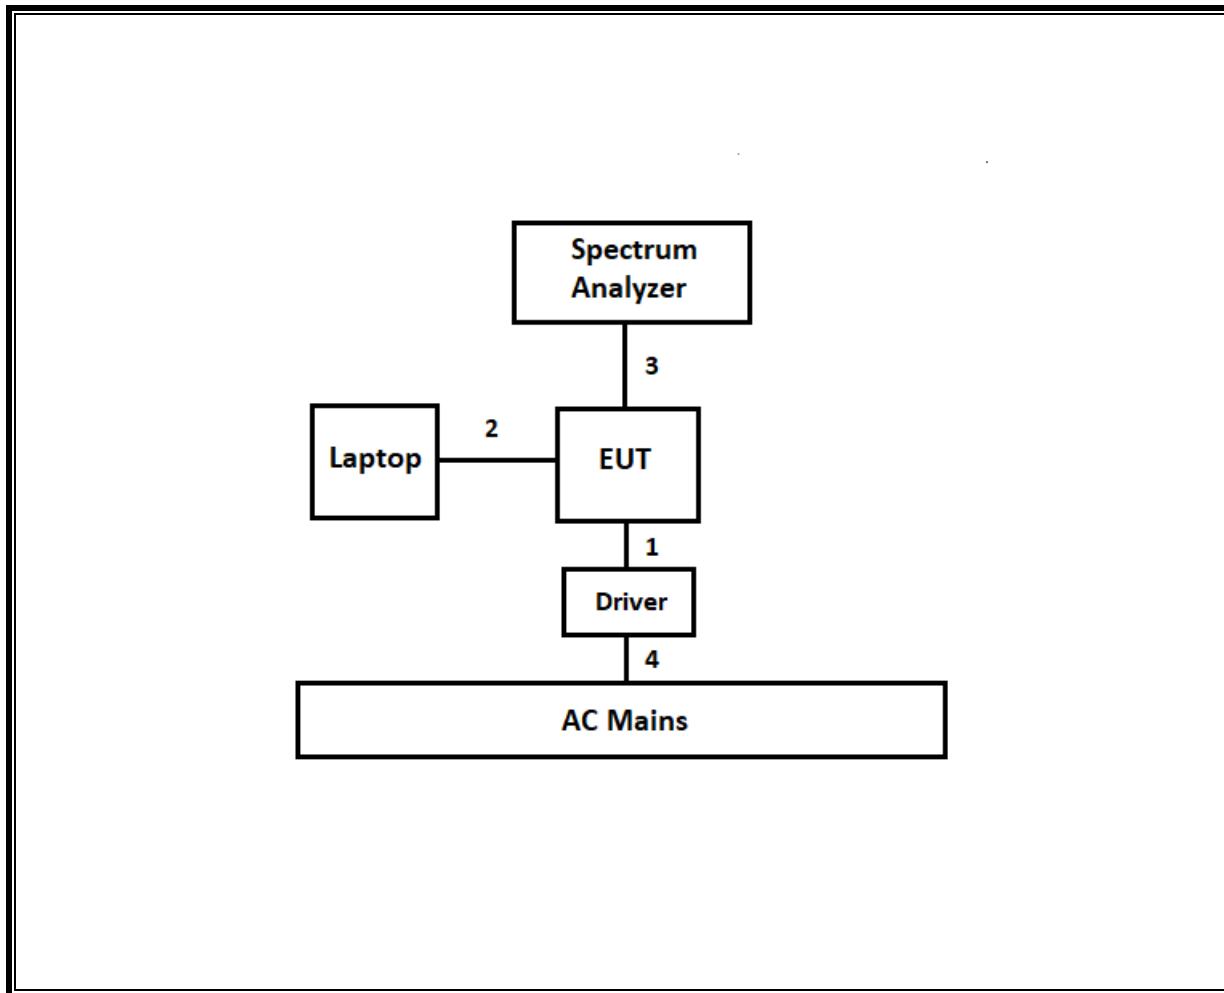

SETUP DIAGRAM FOR RADIATED TESTS (1GHz to 18GHz)

TEST SETUP


The EUT is powered by the 5V AC/DC Adapter. Test software exercised the radio card.

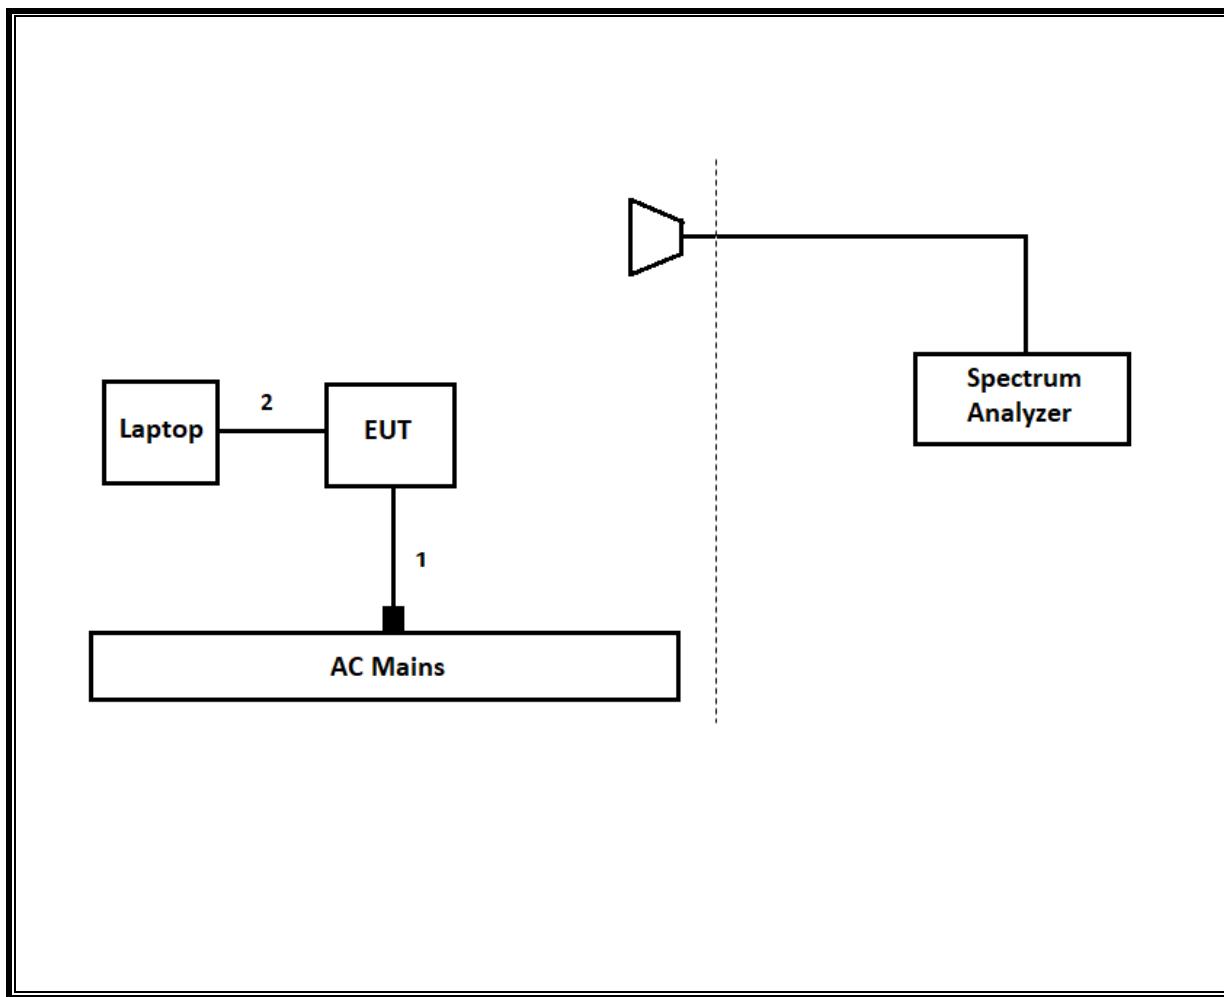

SETUP DIAGRAM FOR RADIATED TESTS(9KHz to 30MHz, 30MHz to 1GHz) AND AC POWER LINE CONDUCTED EMISSIONS

TEST SETUP

The EUT is powered by the 5V AC/DC Adapter. Test software exercised the radio card. The laptop was used for setup and removed during testing.

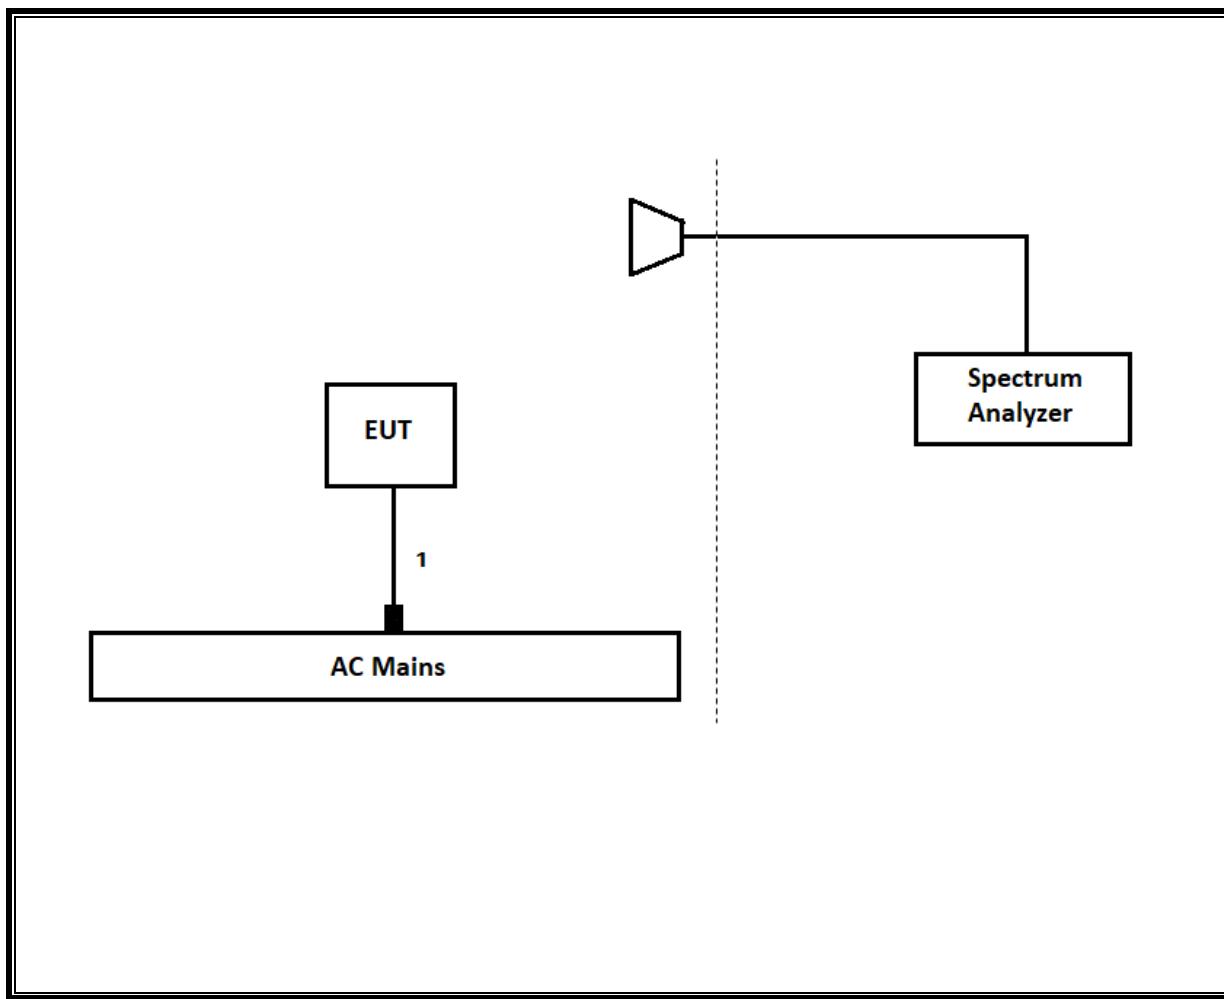

7. MEASUREMENT METHOD

On Time and Duty Cycle: ANSI C63.10 Section 11.6.

6 dB BW: ANSI C63.10 Section 11.8.1

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Output Power: ANSI C63.10 Section 11.9.1.3 Method PKPM1 Peak-reading power meter

Output Power: ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G (Measurement using a gated RF average-reading power meter)

PSD: ANSI C63.10 Section 11.10.2. Method PKPSD (peak PSD)

Radiated emissions non-restricted frequency bands: ANSI C63.10 Section -11.11

Radiated emissions restricted frequency bands: ANSI C63.10 Section -11.12.1 and KDB558074 Section 11, Question 3 (a)

Conducted emissions in restricted frequency bands: ANSI C63.10 Section -11.12.2

Band-edge: ANSI C63.10 Section 6.10

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	PRE0179367	2/21/2022	2/21/2021
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	PRE0179377	2/23/2022	2/23/2022
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T863	8/31/2021	8/31/2020
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T344	*5/26/2021	5/26/2020
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T119	5/7/2022	5/7/2021
Amplifier, 100MHz-18GHz	AMPLICAL	AMP0.1G18-47-20	PRE0197319	4/8/2022	4/8/2021
Amplifier, 1 - 18GHz	MITEQ	AFS42-00101800-25-S-42	T1568	4/9/2022	4/9/2021
Antenna, Broadband Hybrid, 30MHz to 3GHz	Sunol Sciences Corp.	JB3	T477 (81560)	9/24/2021	9/24/2020
Antenna, Broadband Hybrid, 30MHz to 3GHz	Sunol Sciences Corp.	JB3	174373	12/2/2021	12/2/2020
Amplifier, 9KHz to 1GHz, 32dB	SONOMA INSTRUMENT	310	175953	1/21/2022	1/21/2021
Amplifier, 10KHz to 1GHz, 32dB	SONOMA INSTRUMENT	310	T300	3/2/2022	3/2/2021
Antenna, Passive Loop 30Hz - 1MHz	ELECTRO METRICS	EM-6871	SC-8015	5/24/2022	5/24/2021
Antenna, Passive Loop 100KHz - 30MHz	ELECTRO METRICS	EM-6872	SC-8014	5/24/2022	5/24/2021
Spectrum Analyzer, PSA, 3Hz to 26.5GHz	Keysight Technologies Inc	E4440A	T198	5/13/2022	5/13/2021
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	T1227	3/16/2022	3/16/2021
Power Meter, P-series single channel	Keysight Technologies Inc	N1911A	T1264	1/26/2022	1/26/2021
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826/B	T447	9/24/2021	9/24/2020
Rf Amplifier, 18-26.5GHz, 60dB gain	AMPLICAL	AMP18G26.5-60	171590	5/21/2022	5/21/2021
AC Line					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
LISN	FCC INC.	FCC-LISN-50/250-25-2-01-480V	PRE0186446	1/20/2022	1/20/2021
EMI TEST RECEIVER	Rohde & Schwarz	ESR	T1436	2/19/2022	2/19/2021
Transient Limiter	COM-TE	TBFL1	207996	6/1/2022	6/1/2020
Thermometer	Control Company	14-650-118	175736	8/26/2021	6/26/2020
Test Software List					
Description	Manufacturer	Model	Version		
Radiated Software	UL	UL EMC	Rev 9.5, April 30, 2020 (below 30MHz, below 1G, 1-18G radiated emissions), Oct 21, 2019 (above 18G radiated emissions)		
Antenna Port Software	UL	UL RF	AP 2021.4.1 & 2021.5.12		
AC Line Conducted Software	UL	UL EMC	Rev 9.5, July 07, 2020		

NOTES:

- * Testing is completed before equipment expiration date.
- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE


KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
Zigbee	0.100	0.100	1.000	100	0.00	0.010

Note: For testing purposes, the EUT is transmitting continuously
For DCCF used for radiated harmonic average measurements, DCCF is based on
manufacturer's declared operational duty cycle of 66.06%
DCCF = $20 \times \log(0.6606) = -3.6 \text{ dB}$

DUTY CYCLE PLOTS

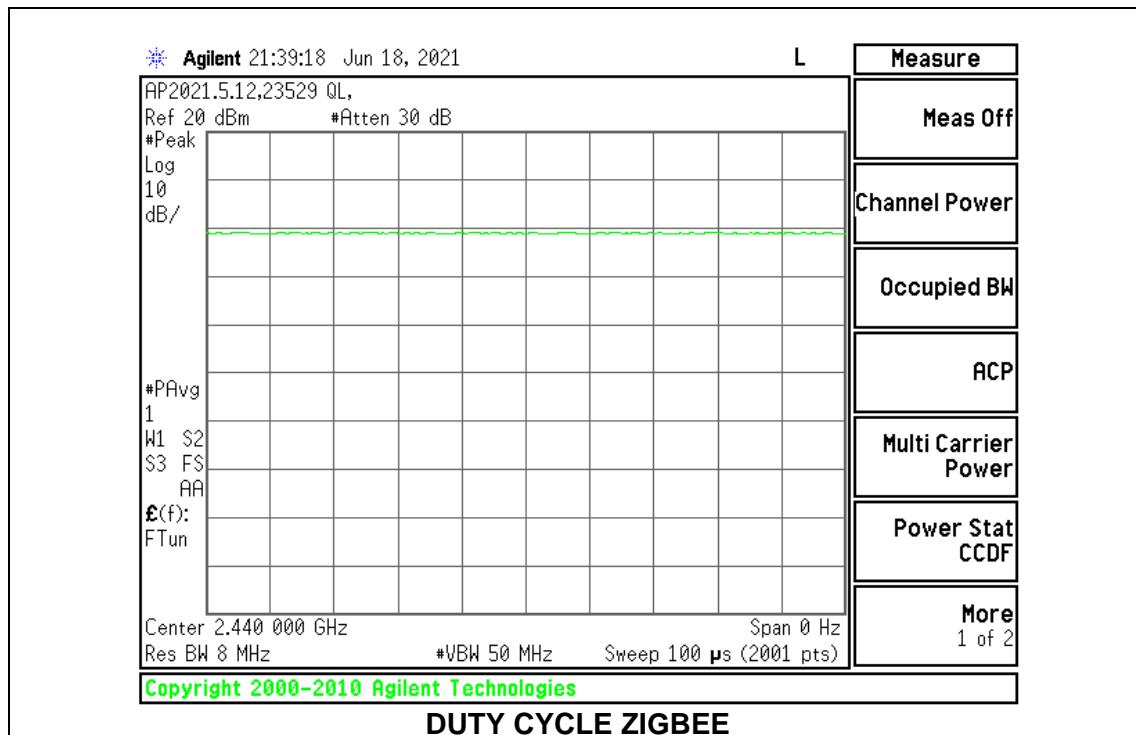

9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2405	2.2099
Middle	2440	2.2130
High	2480	2.2167



9.3. 6 dB BANDWIDTH

LIMITS


FCC §15.247 (a) (2)

RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2405	1.644	0.5
Middle	2440	1.698	0.5
High	2480	1.599	0.5

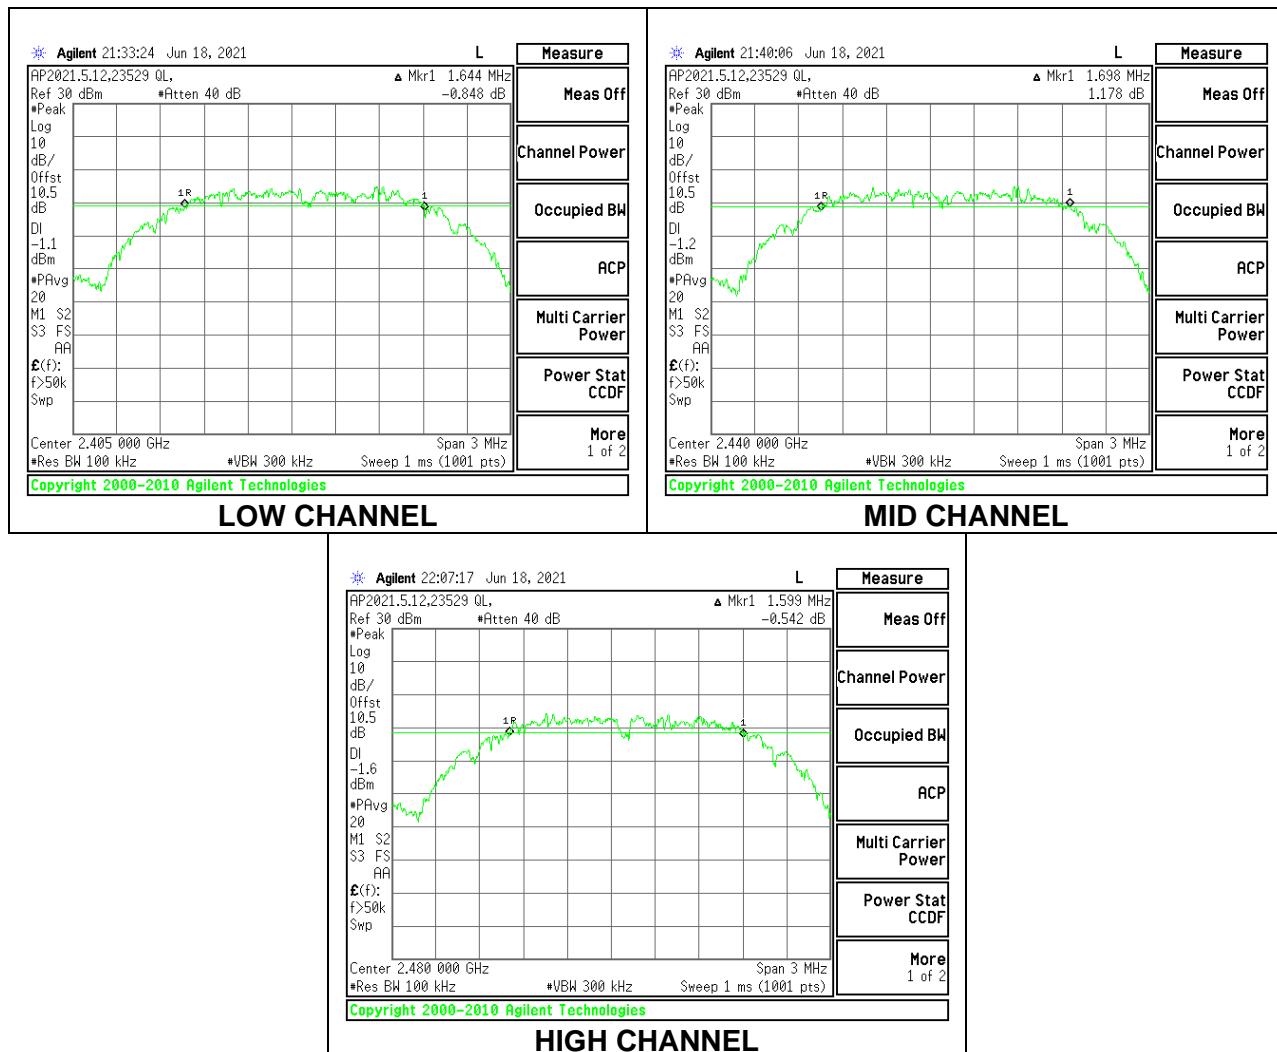

9.4. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

RSS-247 5.4 (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband peak power sensor. Peak output power was read directly from power meter.

RESULTS

Tested By:	19480 BS
Date:	6/25/2021

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2405	7.90	30	-22.10
Middle	2440	7.72	30	-22.28
High	2480	7.50	30	-22.50

9.5. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband average power sensor. Gated average output power was read directly from power meter.

RESULTS

Tested By:	19480 BS
Date:	6/25/2021

Channel	Frequency (MHz)	AV power (dBm)
Low	2405	7.84
Middle	2440	7.65
High	2480	7.43

9.6. POWER SPECTRAL DENSITY

LIMITS


FCC §15.247 (e)

RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2405	-6.968	8	-14.97
Middle	2440	-7.193	8	-15.19
High	2480	-7.442	8	-15.44

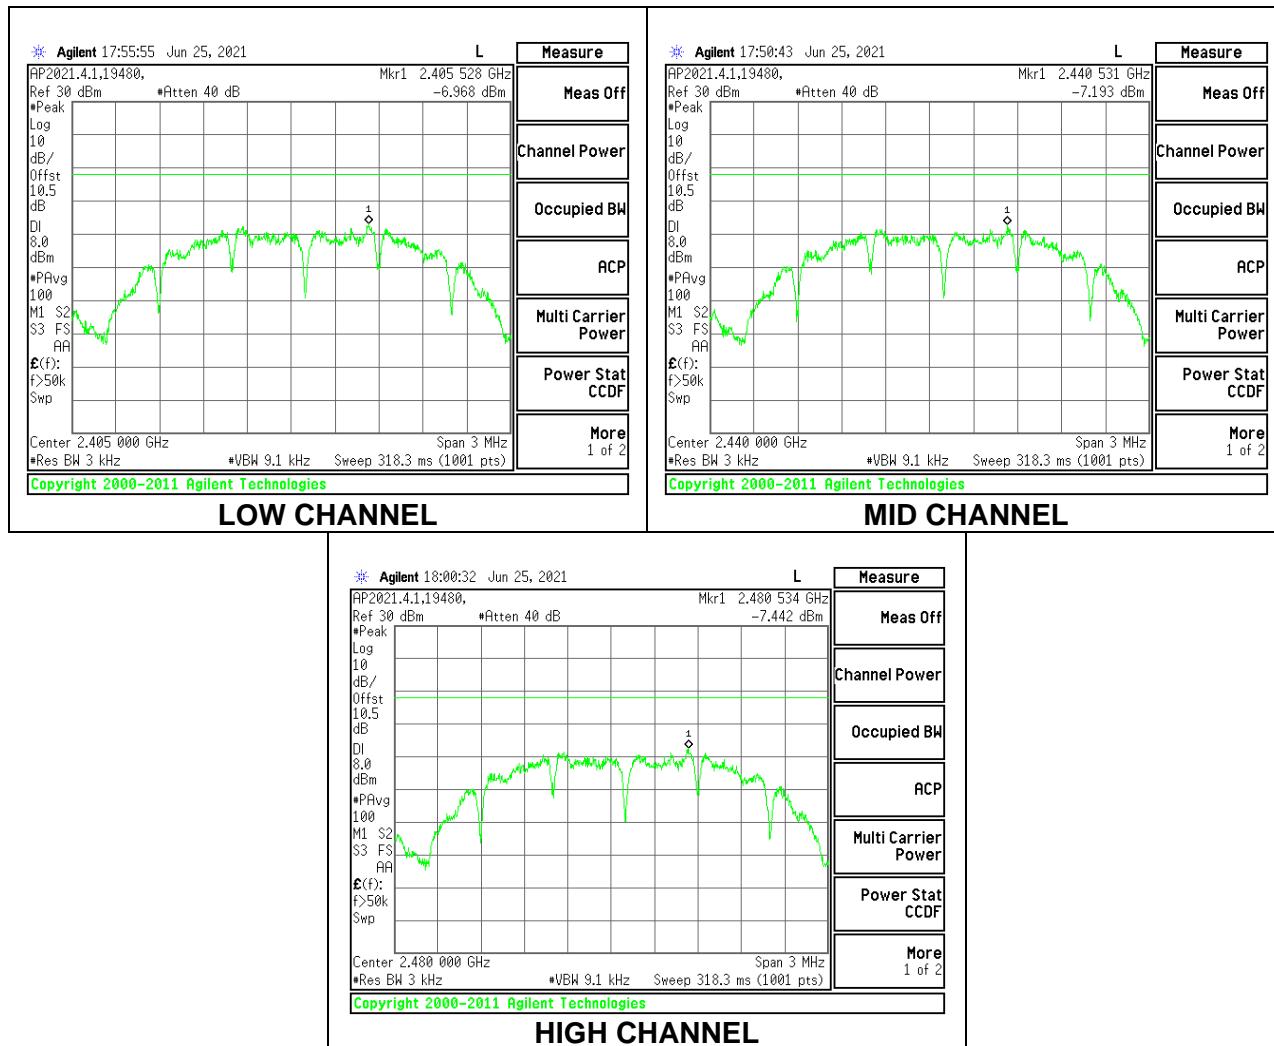

9.7. CONDUCTED SPURIOUS EMISSIONS


LIMITS

FCC §15.247 (d)

RSS-247 5.5

Output power was measured based on the use of a peak measurement, therefore, spurious emissions are required to be 20 dBc.

RESULTS

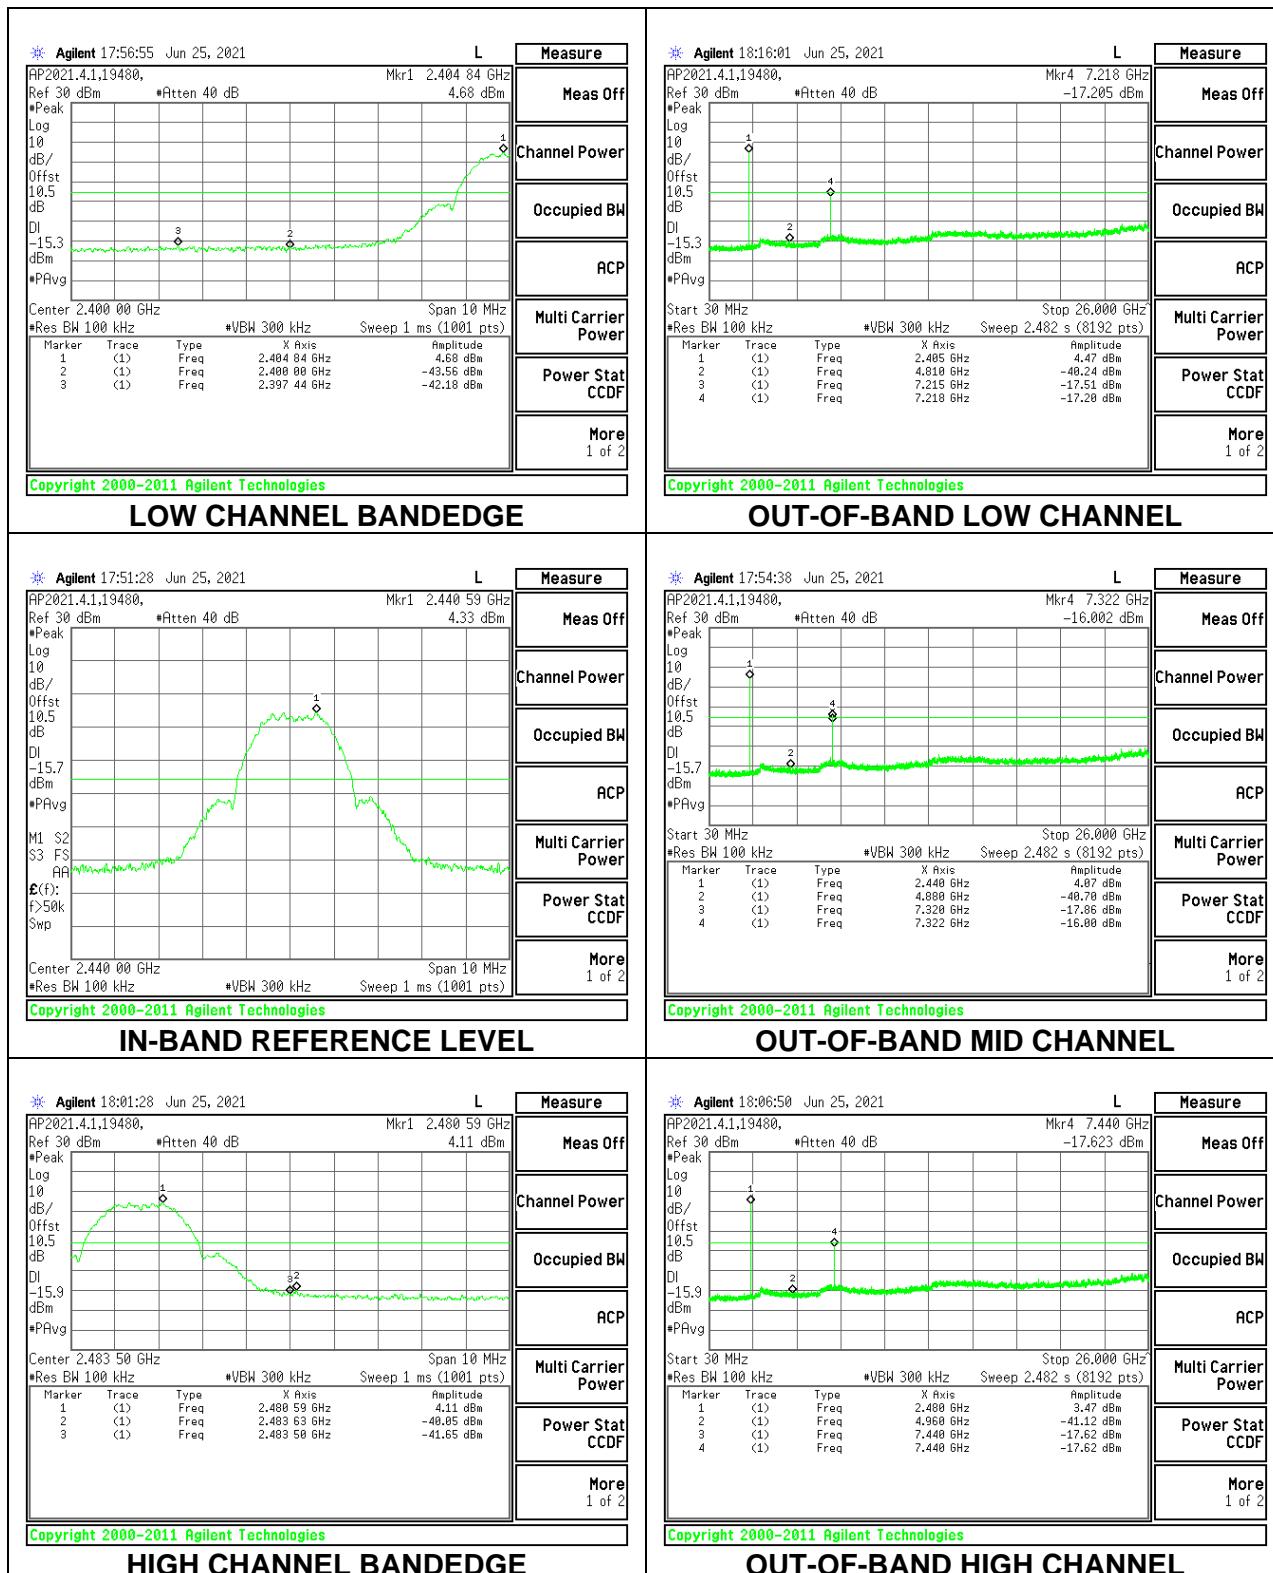

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

RSS-GEN, Section 8.9 and 8.10.

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak or average (9-90kHz and 110-490kHz).

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 1 GHz to 18 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. Below 1GHz and above 18GHz emissions, the channel with the highest output power was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

2D antenna use - For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel), parallel and perpendicular are the worst orientations, therefore testing was performed on these two orientations only.

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

NOTE: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table), using the free space impedance of 377 Ohms. For example the measurement at frequency X kHz resulted in a level of Y dB_uV/m, which is equivalent to $Y - 51.5 = Z$ dB_uA/m, which has the same margin, W dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.


KDB 414788 Open Field Site(OFS) and Chamber Correlation Justification

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

10.2. TRANSMITTER ABOVE 1 GHz

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

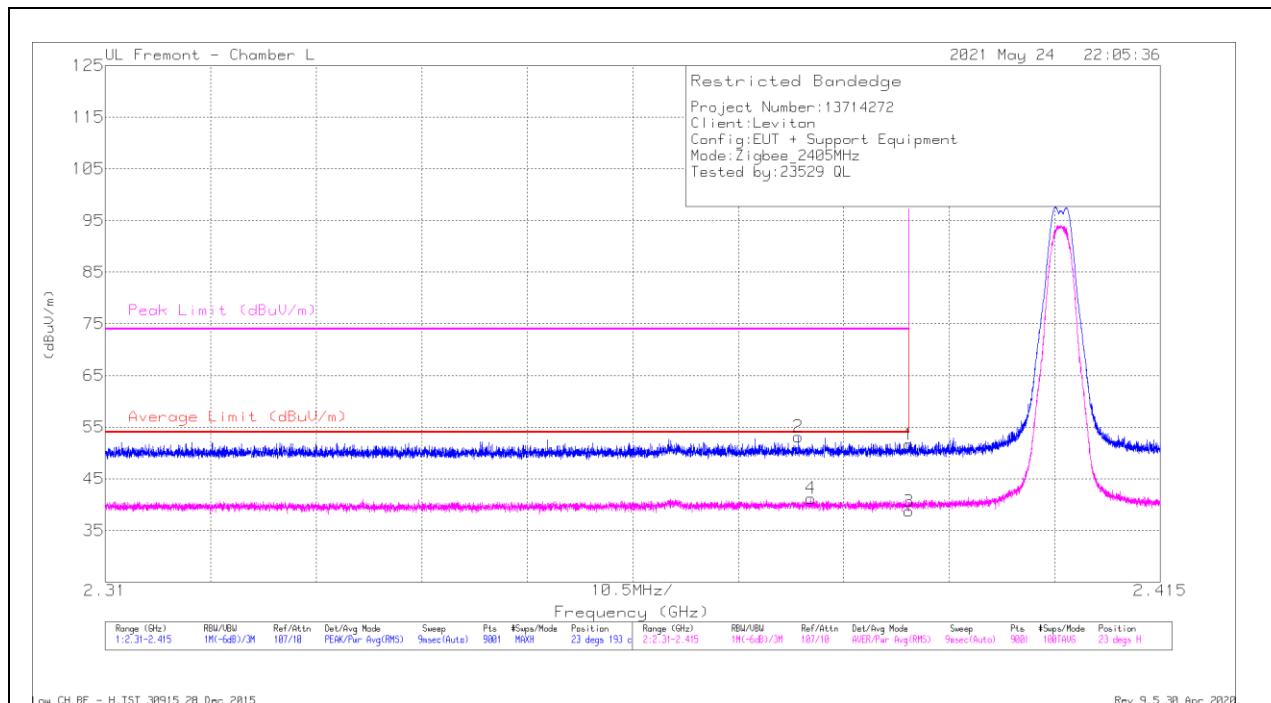


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	39.05	Pk	31.9	-19.3	51.65	-	-	74	-22.35	23	193	H
2	* 2.37896	40.74	Pk	31.8	-19.4	53.14	-	-	74	-20.86	23	193	H
3	* 2.38999	26.14	RMS	31.9	-19.3	38.74	54	-15.26	-	-	23	193	H
4	* 2.3802	28.82	RMS	31.8	-19.4	41.22	54	-12.78	-	-	23	193	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

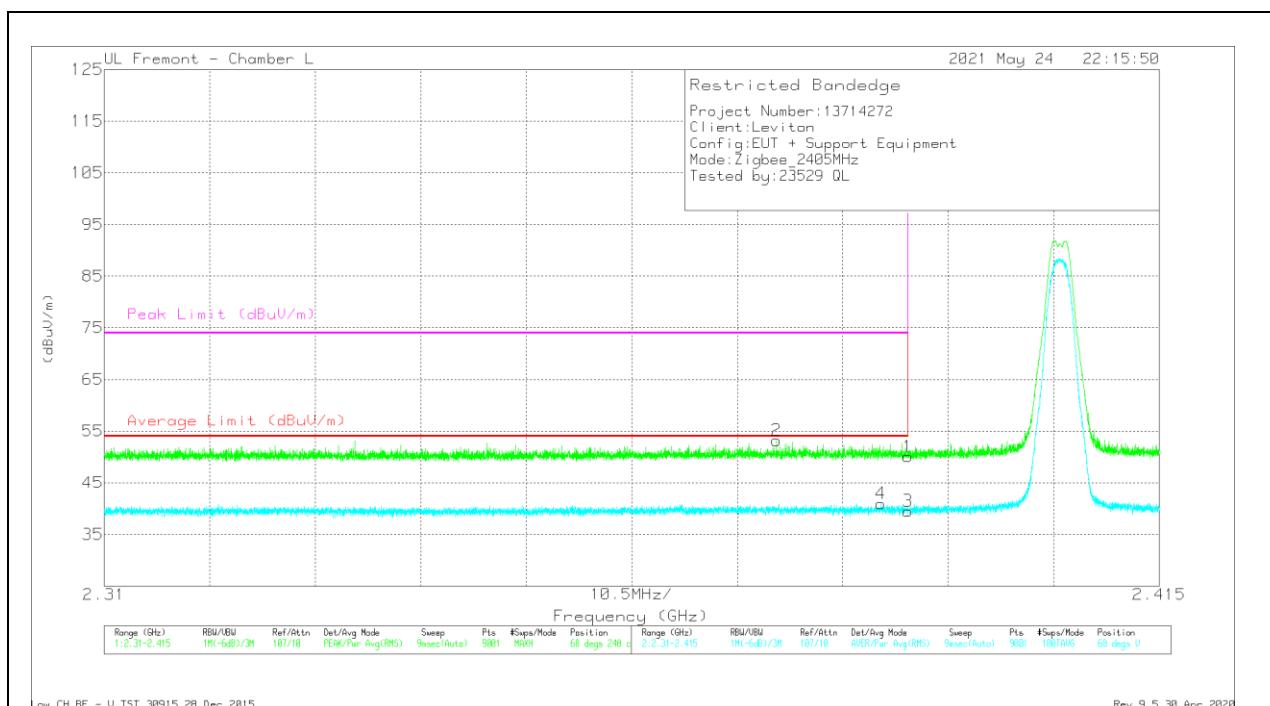

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	37.47	Pk	31.9	-19.3	50.07	-	-	74	-23.93	68	248	V
2	* 2.37692	40.81	Pk	31.8	-19.4	53.21	-	-	74	-20.79	68	248	V
3	* 2.38999	26.89	RMS	31.9	-19.3	39.49	54	-14.51	-	-	68	248	V
4	* 2.38728	28.56	RMS	31.8	-19.4	40.96	54	-13.04	-	-	68	248	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

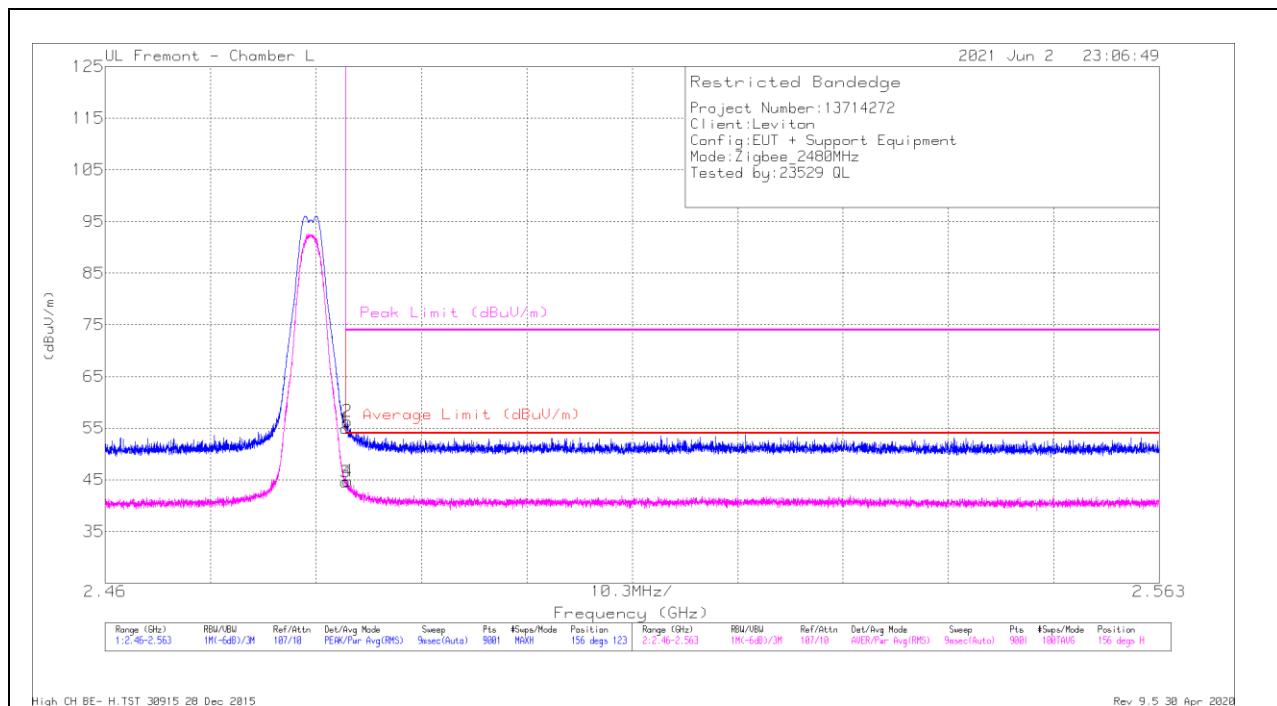


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	41.62	Pk	32.3	-19	54.92	-	-	74	-19.08	156	123	H
2	* 2.48365	43.01	Pk	32.3	-19	56.31	-	-	74	-17.69	156	123	H
3	* 2.48351	31.28	RMS	32.3	-19	44.58	54	-9.42	-	-	156	123	H
4	* 2.48372	31.44	RMS	32.3	-19	44.74	54	-9.26	-	-	156	123	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

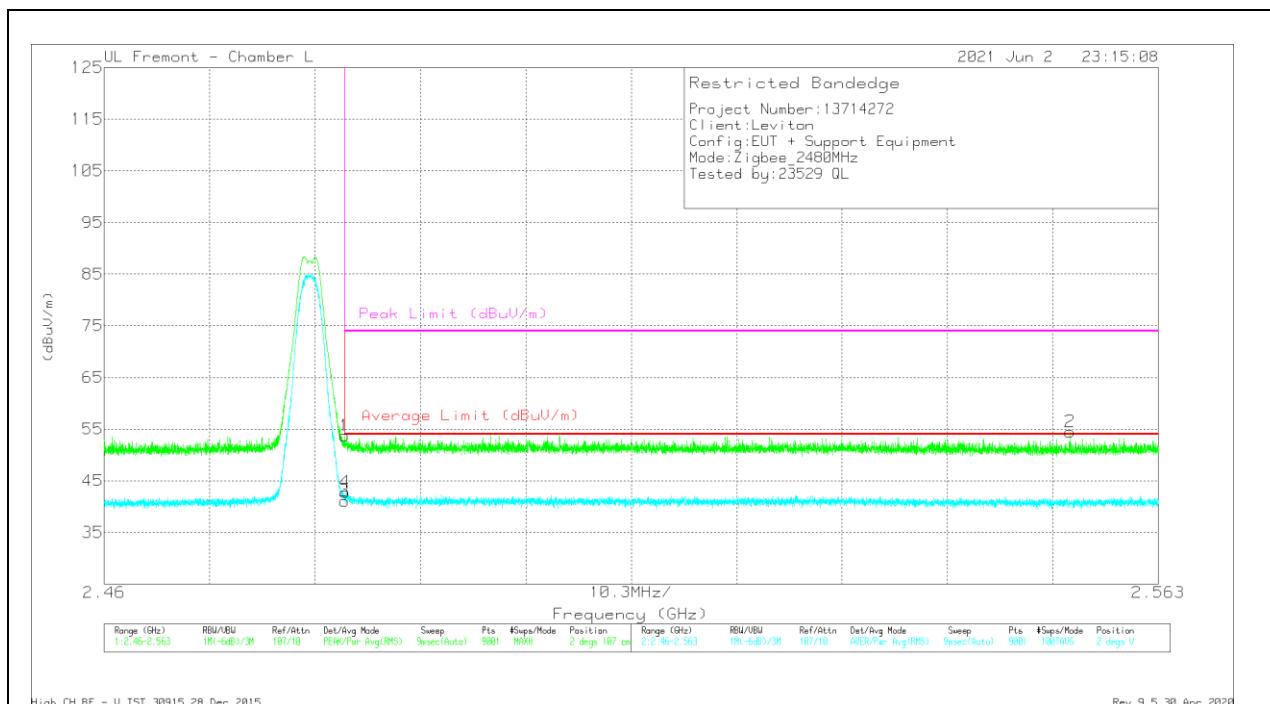

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	40.43	Pk	32.3	-19	53.73	-	-	74	-20.27	2	107	V
2	2.55438	41.29	Pk	32.2	-19	54.49	-	-	74	-19.51	2	107	V
3	* 2.48351	27.79	RMS	32.3	-19	41.09	54	-12.91	-	-	2	107	V
4	* 2.48354	29.5	RMS	32.3	-19	42.8	54	-11.2	-	-	2	107	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

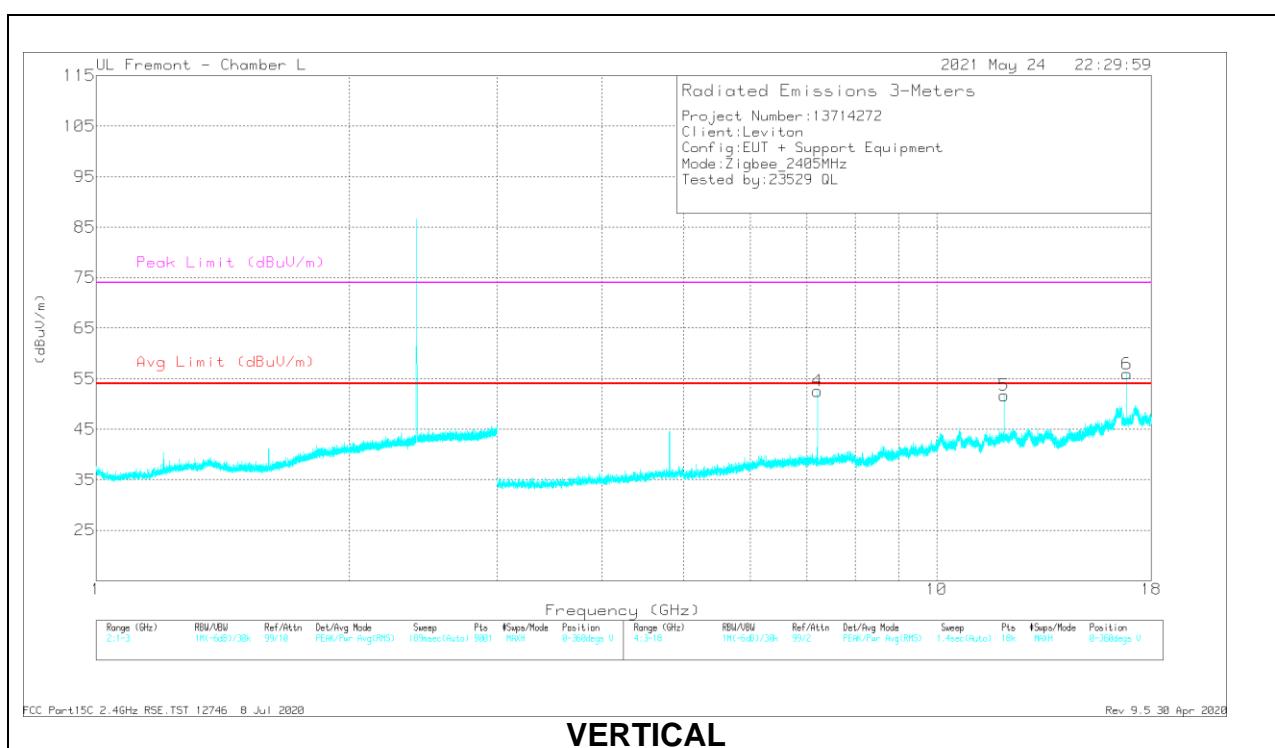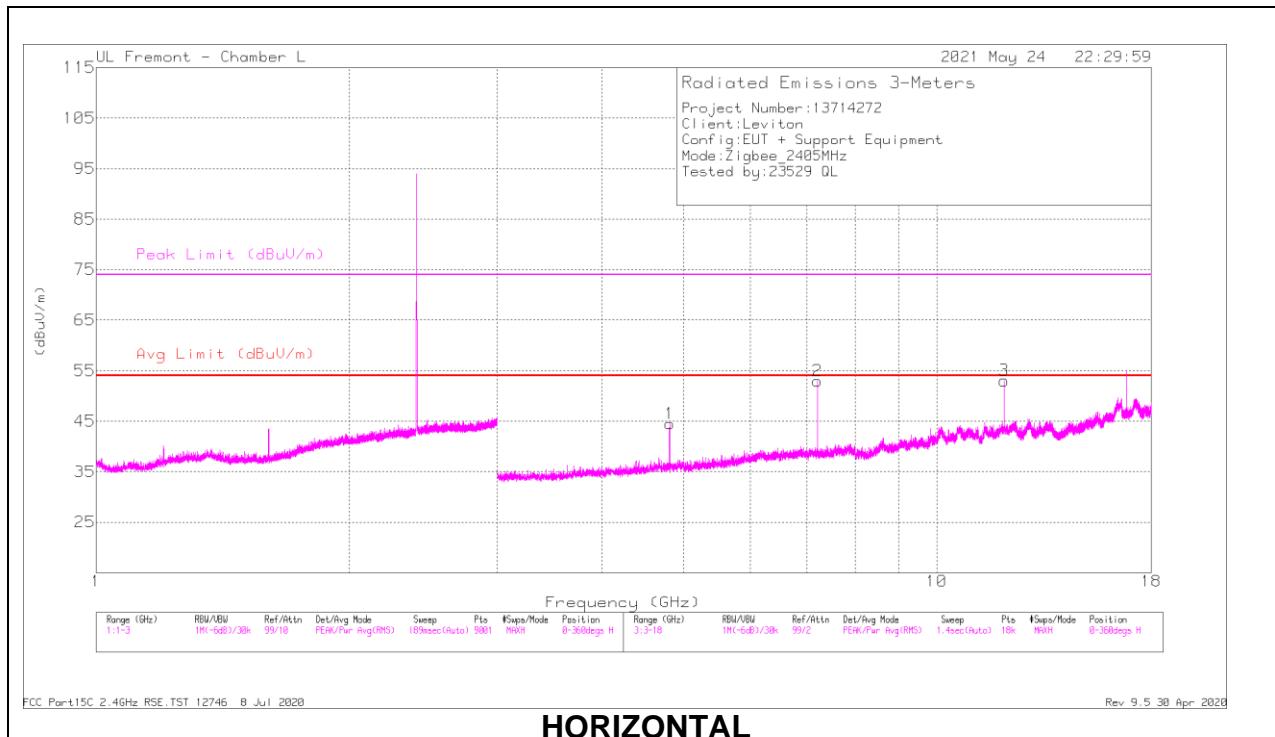

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DCCF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.81116	41.03	PK2	34.2	-24.6	0	50.63	-	-	74	-23.37	337	101	H
	* 4.80919	32.07	AV	34.2	-24.6	3.6	38.07	54	-15.93	-	-	337	101	H
2	7.21687	44.91	PK2	35.6	-20.4	0	60.11	-	-	-	-	291	101	H
3	* 12.02285	38.96	PK2	38.7	-16.3	0	61.36	-	-	74	-12.64	358	101	H
	* 12.02281	31.63	AV	38.7	-16.3	3.6	50.43	54	-3.57	-	-	358	101	H
5	* 12.02805	37.09	PK2	38.7	-16.4	0	59.39	-	-	74	-14.61	9	101	V
	* 12.02265	28.96	AV	38.7	-16.3	3.6	47.76	54	-6.24	-	-	9	101	V
4	7.21376	46.17	PK2	35.5	-20.3	0	61.37	-	-	-	-	54	102	V
6	16.83912	35.79	PK2	42.2	-15.2	0	62.79	-	-	-	-	65	101	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

AV = Linear Average reading + Duty Cycle Correction Factor(KDB558074 Section 11, Question 3 (c)

Duty Cycle Correction Factor = -3.6 dB. Refer to Section 9.1

MID CHANNEL RESULTS

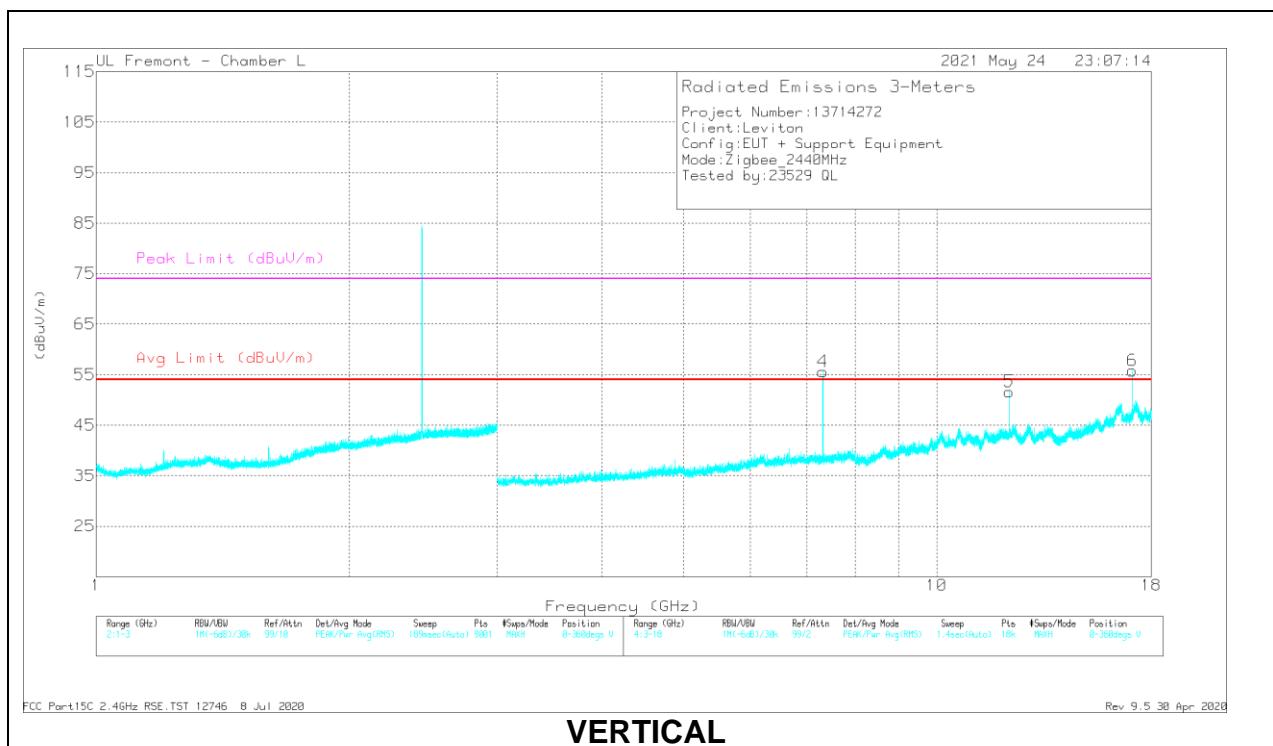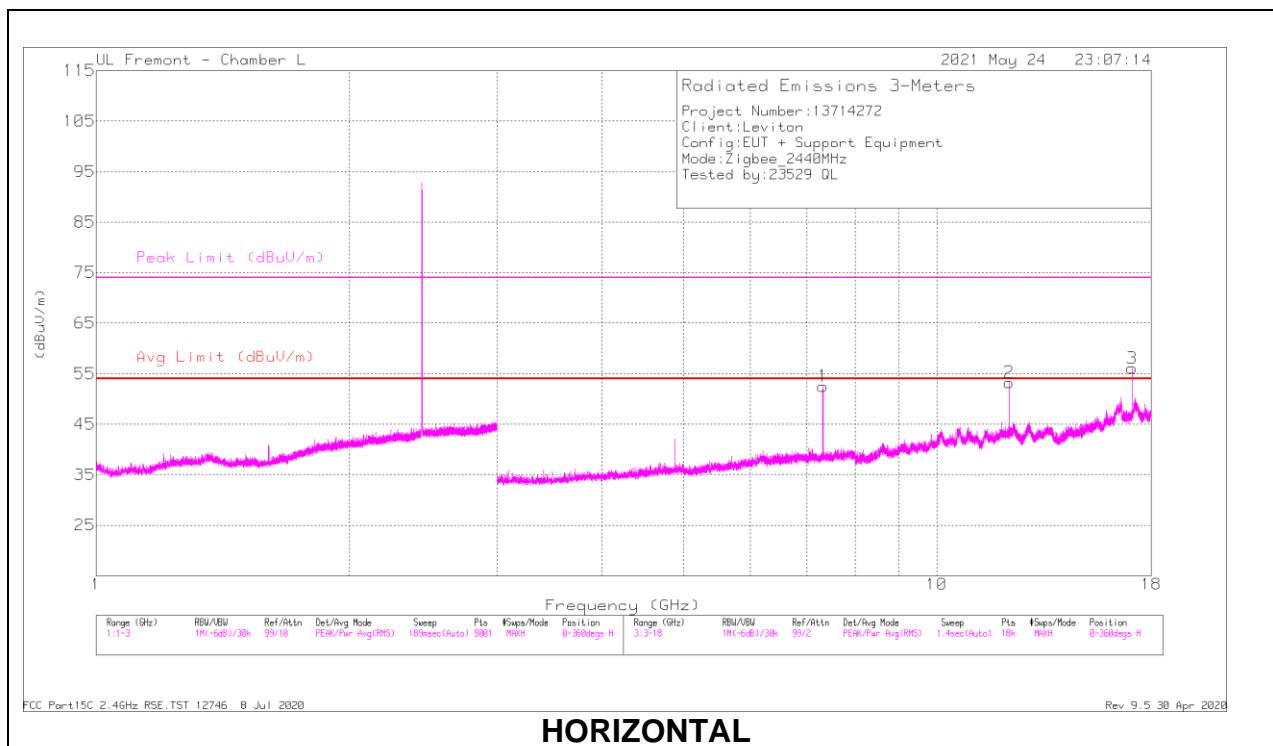

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 7.31855	45.69	PK2	35.5	-20.1	0	61.09	-	-	74	-12.91	291	101	H
	* 7.3186	39.93	AV	35.5	-20.1	3.6	51.73	54	-2.27	-	-	291	101	H
2	* 12.20318	37.76	PK2	39	-16.7	0	60.06	-	-	74	-13.94	12	101	H
	* 12.19765	30.16	AV	38.9	-16.7	3.6	48.76	54	-5.24	-	-	12	101	H
3	17.08426	39.15	PK2	41.7	-15.3	0	65.55	-	-	-	-	86	255	H
4	* 7.32183	47.77	PK2	35.5	-20.1	0	63.17	-	-	74	-10.83	41	101	V
	* 7.31882	41.66	AV	35.5	-20.1	3.6	53.46	54	-0.54	-	-	41	101	V
5	* 12.19781	36.9	PK2	38.9	-16.7	0	59.1	-	-	74	-14.9	11	102	V
	* 12.19763	29.11	AV	38.9	-16.7	3.6	47.71	54	-6.29	-	-	11	102	V
6	17.0845	37.41	PK2	41.7	-15.3	0	63.81	-	-	-	-	64	101	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

AV = Linear Average reading + Duty Cycle Correction Factor(KDB558074 Section 11, Question 3 (c)

Duty Cycle Correction Factor = -3.6 dB. Refer to Section 9.1

HIGH CHANNEL RESULTS

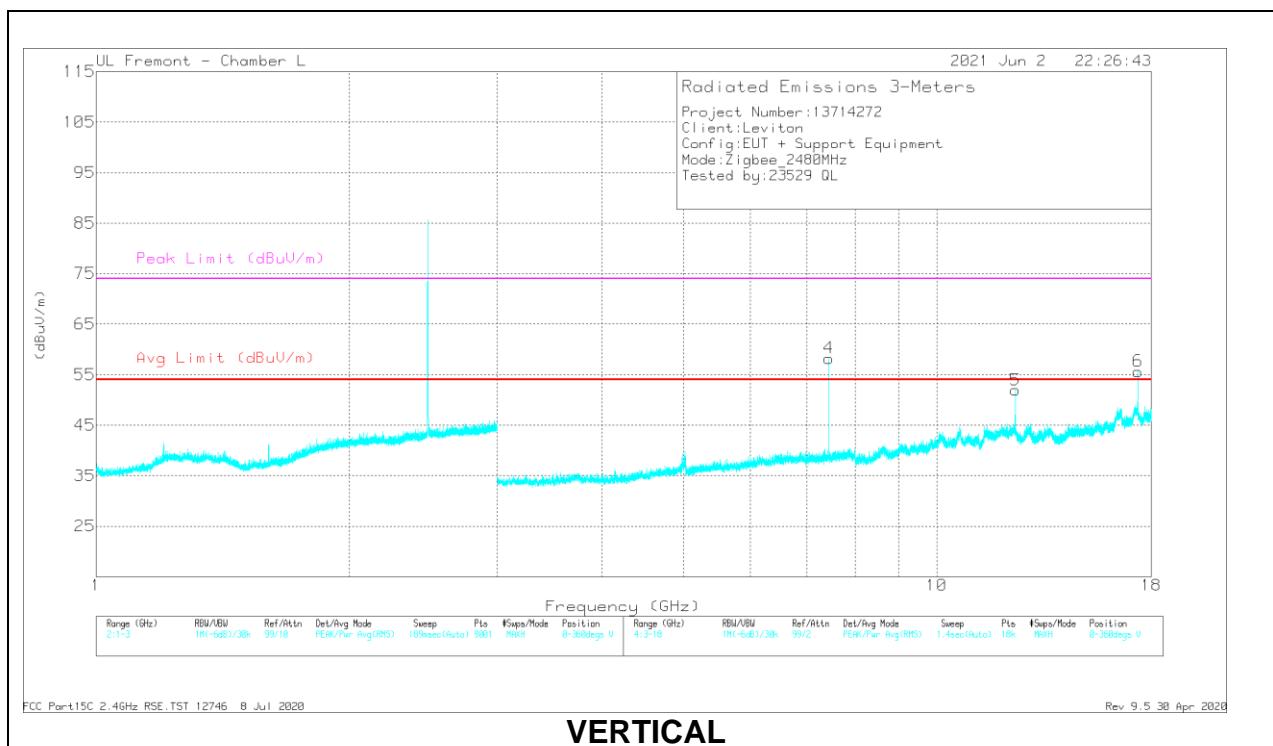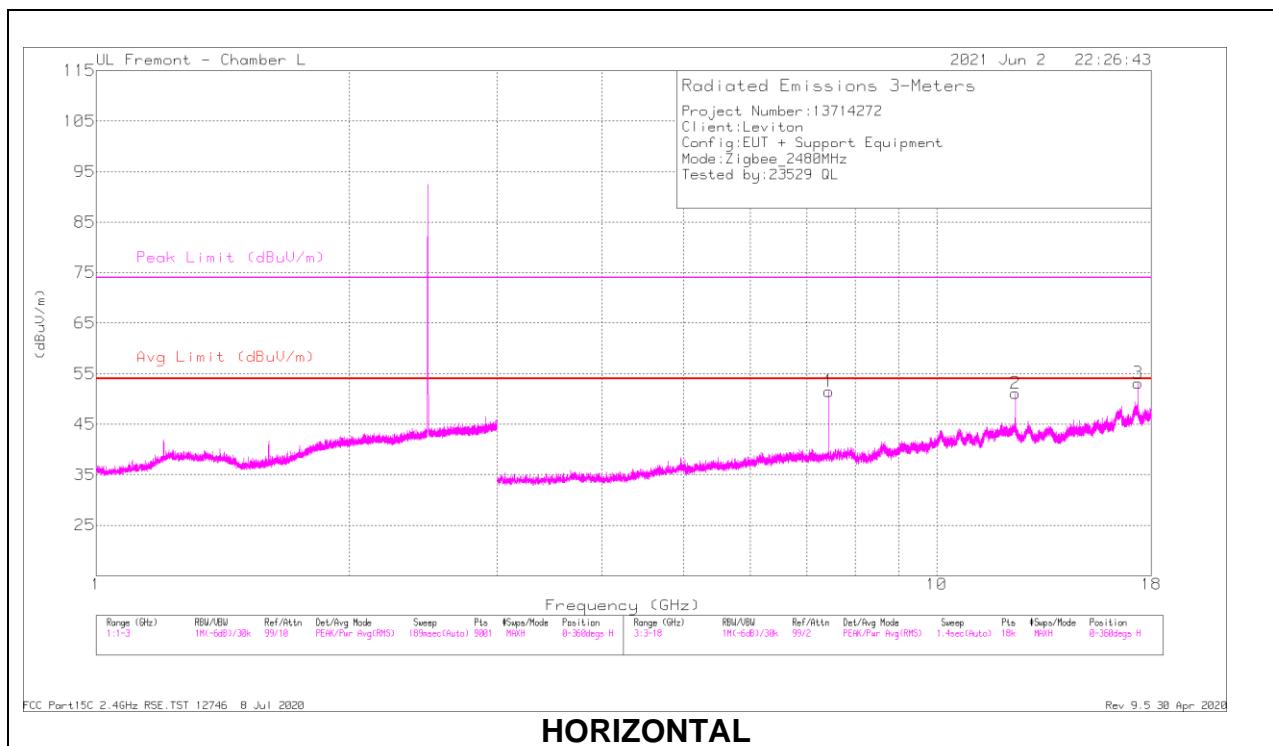

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 7.43862	43.32	PK2	35.7	-19.9	0	59.12	-	-	74	-14.88	33	101	H
	* 7.43859	37	AV	35.7	-19.9	3.6	49.2	54	-4.8	-	-	33	101	H
2	* 12.40306	36	PK2	39.1	-16.3	0	58.8	-	-	74	-15.2	91	123	H
	* 12.3978	28.49	AV	39.2	-16.3	3.6	47.79	54	-6.21	-	-	91	123	H
3	17.35693	36.59	PK2	41	-14.8	0	62.79	-	-	-	-	53	129	H
4	* 7.44187	47.14	PK2	35.7	-20	0	62.84	-	-	74	-11.16	122	101	V
	* 7.44177	39.32	AV	35.7	-20	3.6	51.42	54	-2.58	-	-	122	101	V
5	* 12.39771	37.09	PK2	39.2	-16.3	0	59.99	-	-	74	-14.01	126	128	V
	* 12.40311	29.21	AV	39.1	-16.3	3.6	48.41	54	-5.59	-	-	126	128	V
6	17.36432	36.81	PK2	41	-14.9	0	62.91	-	-	-	-	170	127	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

AV = Linear Average reading + Duty Cycle Correction Factor(KDB558074 Section 11, Question 3 (c)

Duty Cycle Correction Factor = -3.6 dB. Refer to Section 9.1

10.3. WORST CASE BELOW 30MHz

SPURIOUS EMISSIONS BELOW 30 MHz (WORST-CASE CONFIGURATION)

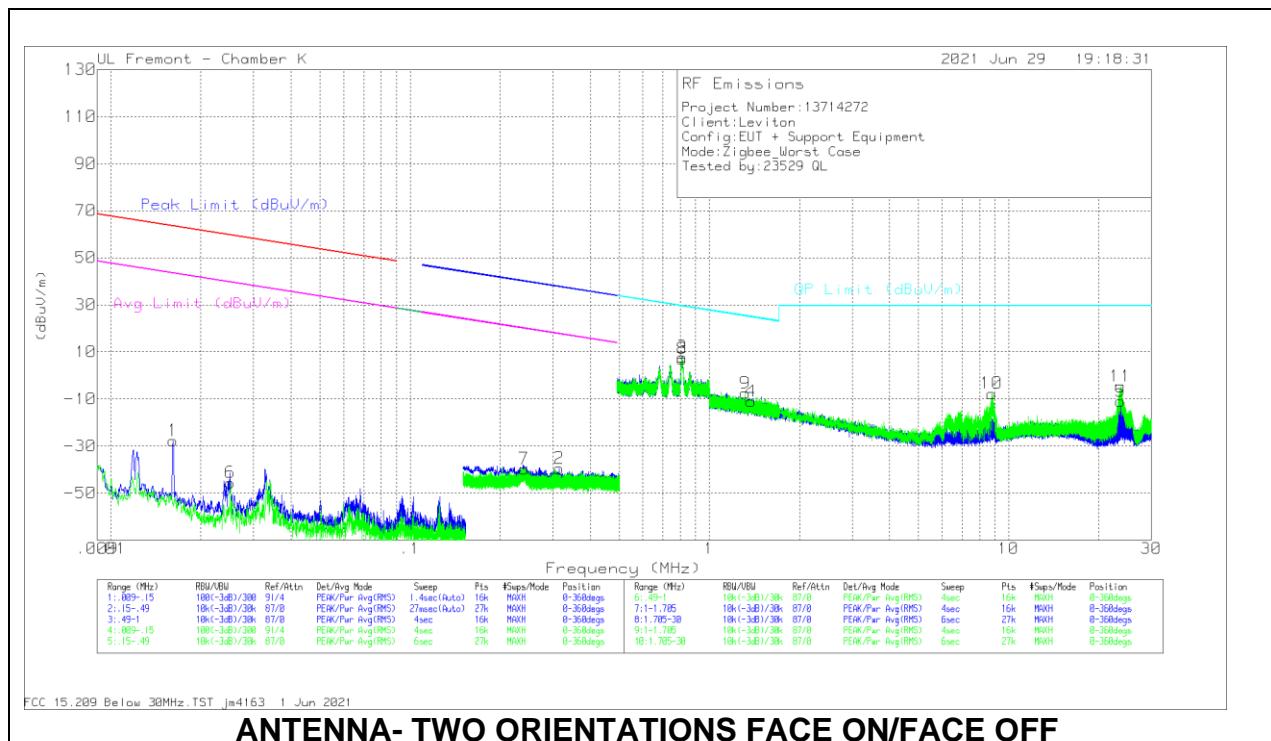

Below 30MHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (E ACF)	Amp/Cbl (dB)	Dist Corr 300m	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.01613	24.59	Pk	59.5	-31.8	-80	-27.71	63.43	-91.14	43.43	-	-	-	-	-	0-360
2	.31483	16.48	Pk	56.2	-32.2	-80	-39.52	-	-	-	37.65	-	17.65	-	0-360	
6	.02505	8.12	Pk	58.4	-32.1	-80	-45.58	59.61	-	39.61	85.19	-	-	-	0-360	
7	.24022	16.2	Pk	56.2	-32.2	-80	-39.8	-	-	-	40	-79.8	20	-59.8	0-360	



Pk - Peak detector

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (E ACF)	Amp/Cbl (dB)	Dist Corr 30m (dB) 40Log	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
3	.81246	23.72	Pk	56.2	-32.2	-40	7.72	29.42	-21.7	0-360
8	.81112	23.04	Pk	56.2	-32.2	-40	7.04	29.43	-22.39	0-360
4	1.37778	16.38	Pk	44.7	-32.1	-40	-11.02	24.85	-35.87	0-360
5	23.69204	27.29	Pk	33.3	-31.6	-40	-11.01	29.5	-40.51	0-360
9	1.31878	19.53	Pk	45	-32.1	-40	-7.57	25.22	-32.79	0-360
10	8.77376	29.95	Pk	34.3	-31.9	-40	-7.65	29.5	-37.15	0-360
11	23.64802	33.62	Pk	33.3	-31.6	-40	-4.68	29.5	-34.18	0-360

Pk - Peak detector

10.4. WORST CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

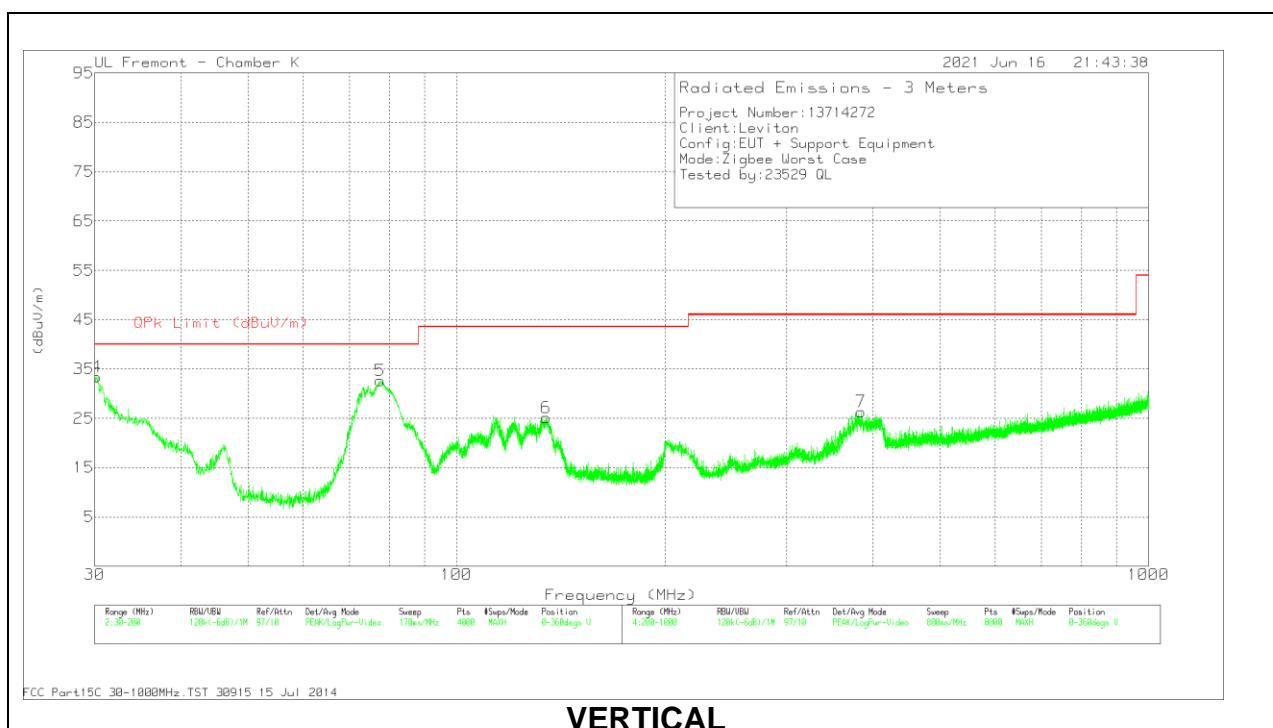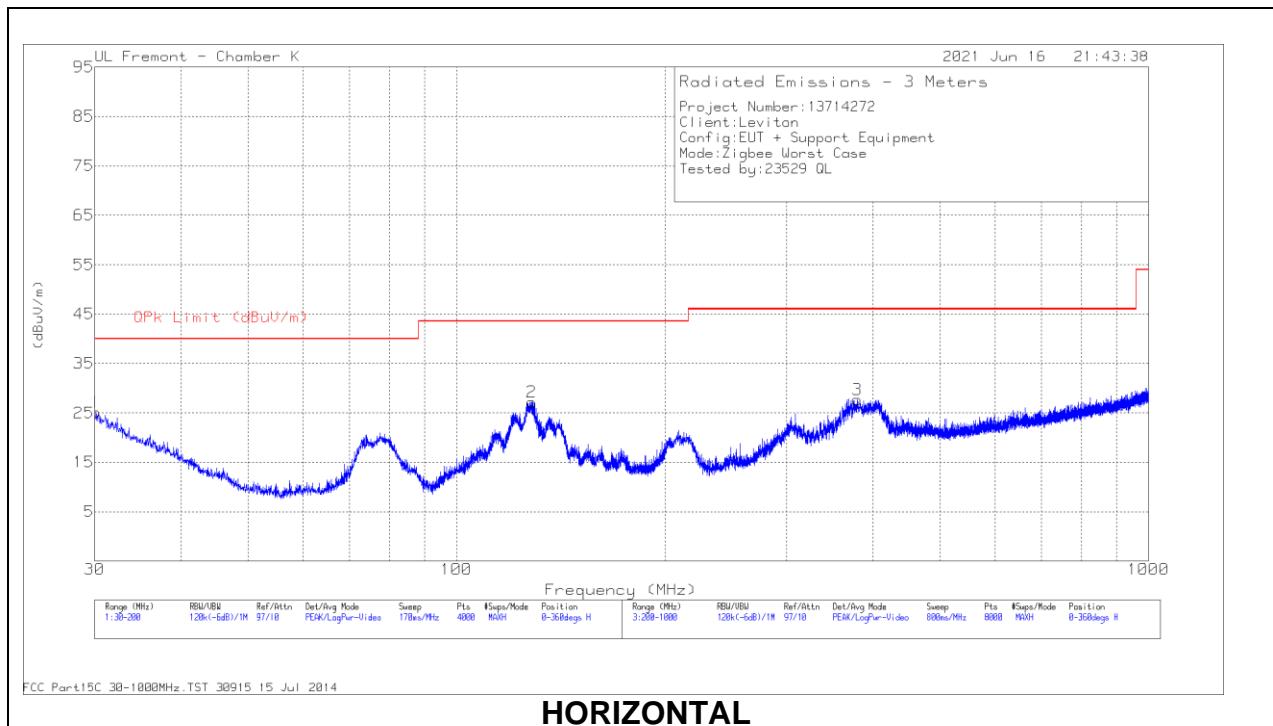

Below 1GHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 81560 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.1275	28.89	Pk	27.9	-31.6	25.19	40	-14.81	0-360	199	H
2	128.498	37.99	Pk	19.9	-30.7	27.19	43.52	-16.33	0-360	199	H
4	30.0006	39.58	Pk	28	-31.6	35.98	40	-4.02	138	97	V
	30.0006	35.55	Qp	28	-31.6	31.95	40	-8.05	138	97	V
5	77.933	49.85	Pk	14	-31.1	32.75	40	-7.25	89	95	V
	77.933	47.4	Qp	14	-31.1	30.3	40	-9.7	89	95	V
6	134.7896	36.22	Pk	19.6	-30.7	25.12	43.52	-18.4	0-360	101	V
3	379.7234	35.73	Pk	21.5	-29.5	27.73	46.02	-18.29	0-360	101	H
7	384.1239	34.35	Pk	21.5	-29.5	26.35	46.02	-19.67	0-360	97	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

Qp - Quasi-Peak detector

10.5. WORST CASE 18-26 GHz

SPURIOUS EMISSIONS 18-26GHz (WORST-CASE CONFIGURATION)

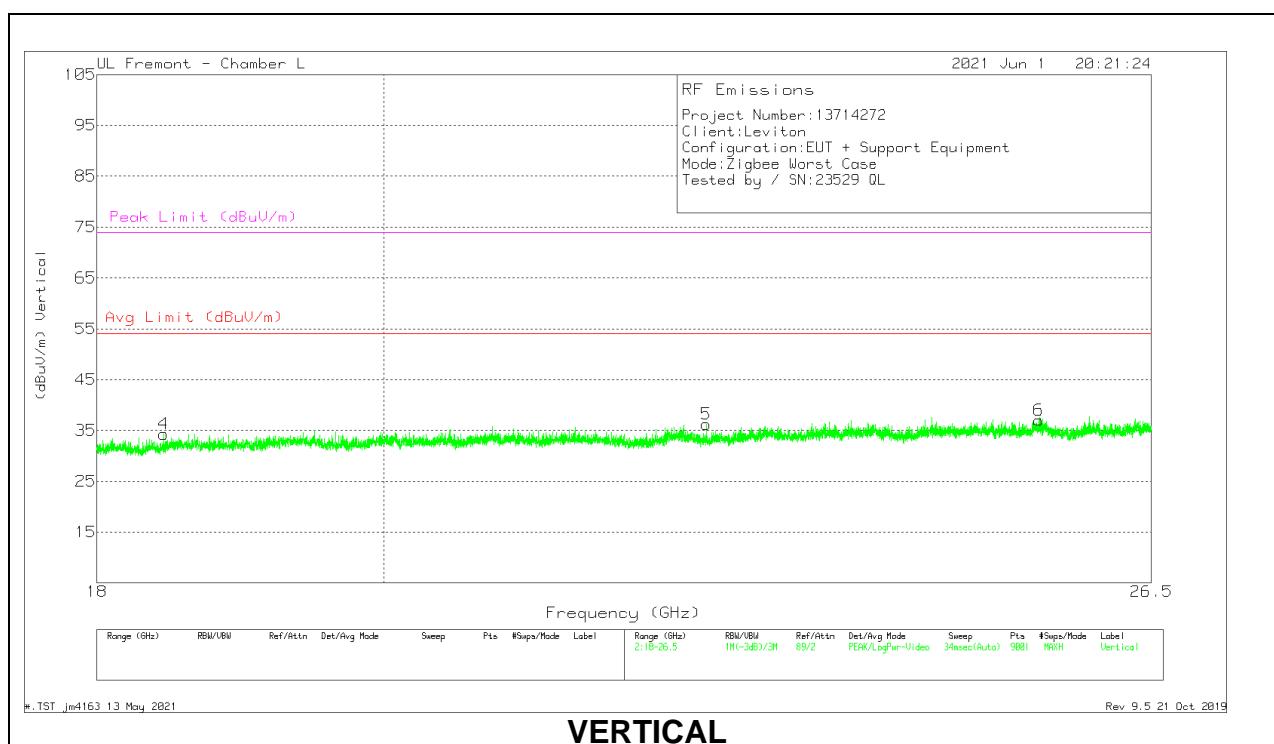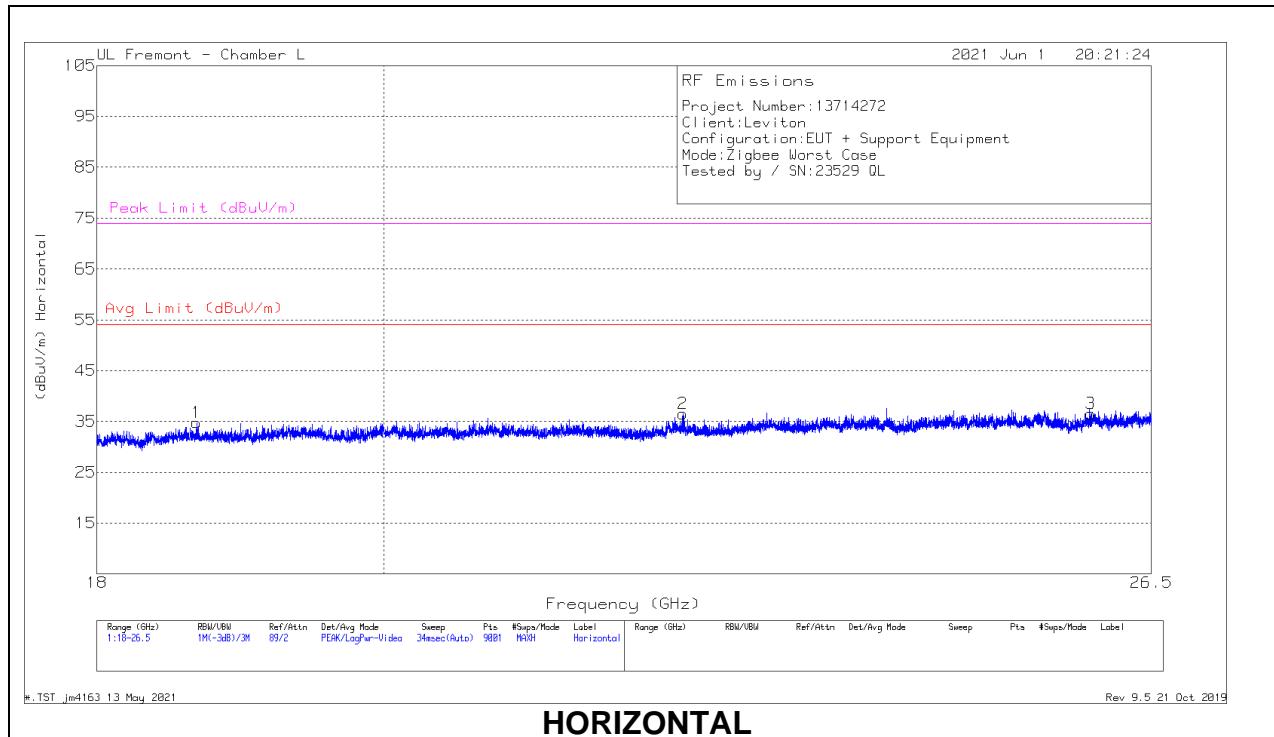

18 – 26 GHz Data

Marker	Frequency (GHz)	Meter Reading (dB _{UV})	Det	T447 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dB _{UV} /m)	Avg Limit (dB _{UV} /m)	Margin (dB)	Peak Limit (dB _{UV} /m)	PK Margin (dB)
1	18.66961	70.5	Pk	32.4	-58.6	-9.5	34.8	54	-19.2	74	-39.2
2	22.31516	70.25	Pk	33.6	-57.8	-9.5	36.55	54	-17.45	74	-37.45
3	25.91727	67.14	Pk	34.4	-55.5	-9.5	36.54	54	-17.46	74	-37.46
4	18.44578	70.92	Pk	32.4	-59.5	-9.5	34.32	54	-19.68	74	-39.68
5	22.50689	69.81	Pk	33.6	-57.7	-9.5	36.21	54	-17.79	74	-37.79
6	25.429	67.24	Pk	34.5	-55.2	-9.5	37.04	54	-16.96	74	-36.96

Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)


RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

RESULTS

LINE 1 RESULTS

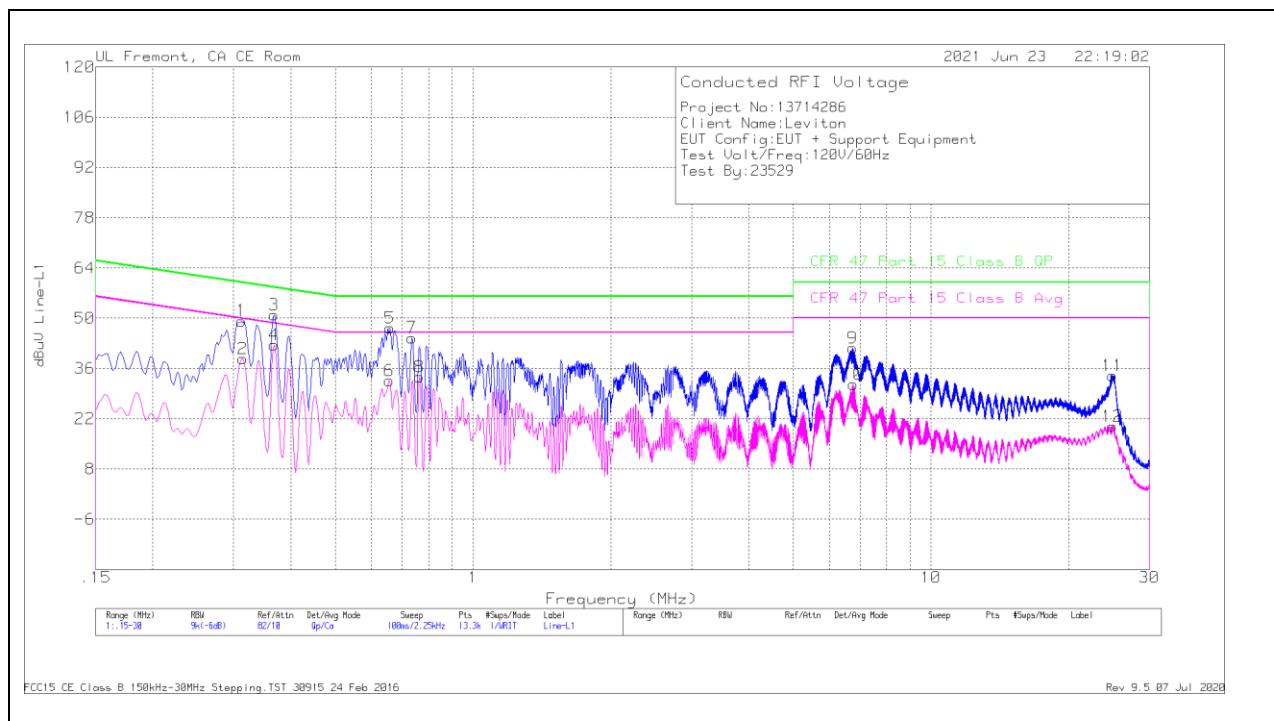


Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 L1	LC Cables C1&C3 dB	TekBox Limiter TBFL1 Model 207	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
1	.312	39.99	Qp	0	0	9.3	49.29	59.92	-10.63	-	-
2	.31425	29.51	Ca	0	0	9.3	38.81	-	-	49.86	-11.05
3	.36825	41.7	Qp	0	0	9.3	51	58.54	-7.54	-	-
4	.36825	33.33	Ca	0	0	9.3	42.63	-	-	48.54	-5.91
5	.6585	38.05	Qp	0	0	9.3	47.35	56	-8.65	-	-
6	.65625	23.38	Ca	0	0	9.3	32.68	-	-	46	-13.32
7	.735	35.28	Qp	0	0	9.3	44.58	56	-11.42	-	-
8	.76425	24.24	Ca	0	.1	9.3	33.64	-	-	46	-12.36
9	6.7425	32.37	Qp	0	.1	9.3	41.77	60	-18.23	-	-
10	6.77175	22.16	Ca	0	.1	9.3	31.56	-	-	50	-18.44
11	24.9315	24.41	Qp	0	.3	9.3	34.01	60	-25.99	-	-
12	24.9315	10.33	Ca	0	.3	9.3	19.93	-	-	50	-30.07

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

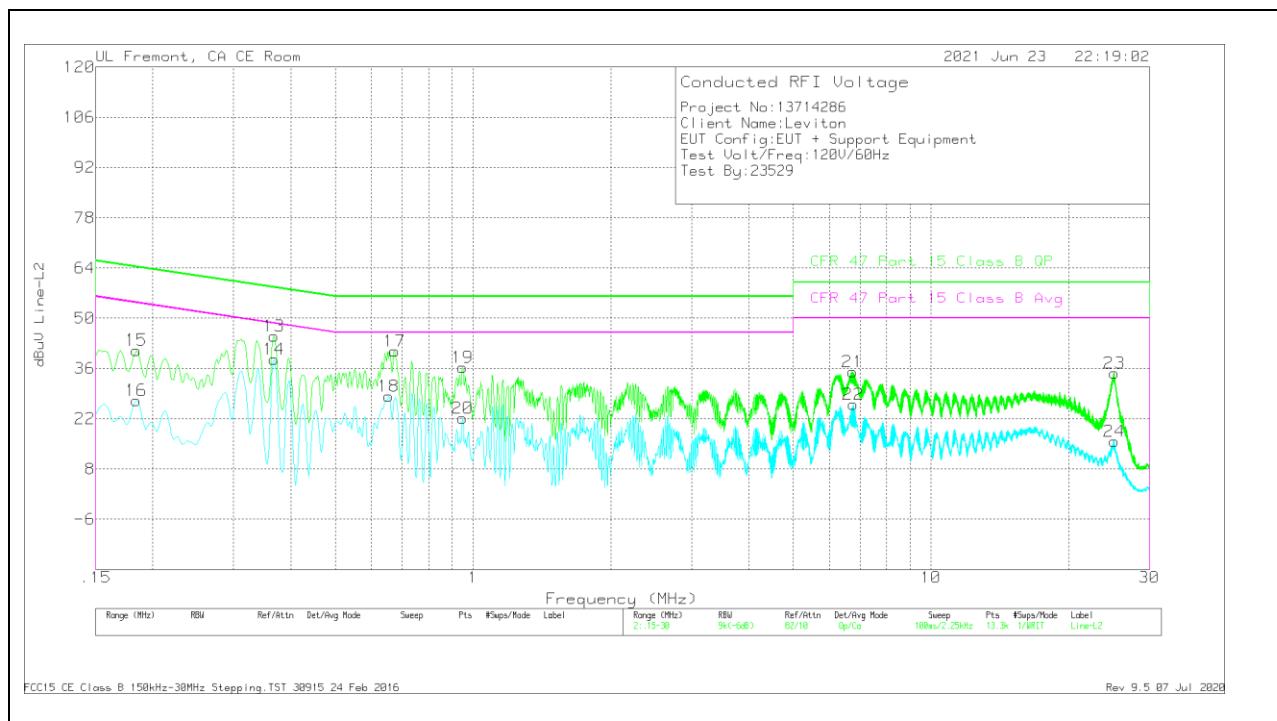

Range 2: Line-L2 .15 - 30MHz												
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE0186446 L2	LC Cables C2&C3 dB	TekBox Limiter TBFL1 Model 207	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)	
13	.36825	35.8	Qp	0	0	9.3	45.1	58.54	-13.44	-	-	
14	.36825	29.3	Ca	0	0	9.3	38.6	-	-	48.54	-9.94	
15	.18375	31.69	Qp	0	0	9.4	41.09	64.31	-23.22	-	-	
16	.18375	17.73	Ca	0	0	9.4	27.13	-	-	54.31	-27.18	
17	.67425	31.52	Qp	0	0	9.3	40.82	56	-15.18	-	-	
18	.654	18.93	Ca	0	0	9.3	28.23	-	-	46	-17.77	
19	.94875	26.83	Qp	0	.1	9.3	36.23	56	-19.77	-	-	
20	.94875	12.72	Ca	0	.1	9.3	22.12	-	-	46	-23.88	
21	6.73575	25.72	Qp	0	.1	9.3	35.12	60	-24.88	-	-	
22	6.765	16.56	Ca	0	.1	9.3	25.96	-	-	50	-24.04	
23	25.17675	24.97	Qp	.1	.3	9.3	34.67	60	-25.33	-	-	
24	25.12275	6.04	Ca	.1	.3	9.3	15.74	-	-	50	-34.26	

Qp - Quasi-Peak detector

Ca - CISPR average detection