



## FCC Test Report

**FOR**  
Lyft, Inc.

**Model number**  
SIT-03-1-B

### Product Description

Location and connectivity module. Includes LTE, NFC, GNSS and RX-only WIFI to enable ride sharing capabilities and unit tracking.

**FCC ID:** 2ASMPSIT031B

### Applied Rules and Standards

Title 47 CFR: Part 15.225

**REPORT #:** EMC\_LYFTH\_005\_19001\_FCC\_15.225\_NFC

**DATE:** 08/16/2019



A2LA Accredited

IC recognized #  
3462B-2

### **CETECOM Inc.**

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: [info@cetecom.com](mailto:info@cetecom.com) • <http://www.cetecom.com>  
CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571



**TABLE OF CONTENTS**

**1 ASSESSMENT ..... 3**

**2 ADMINISTRATIVE DATA..... 4**

2.1 IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT..... 4

2.2 IDENTIFICATION OF THE CLIENT ..... 4

2.3 IDENTIFICATION OF THE MANUFACTURER..... 4

**3 EQUIPMENT UNDER TEST (EUT)..... 5**

3.1 EUT SPECIFICATIONS ..... 5

3.2 EUT SAMPLE DETAILS..... 6

3.3 ACCESSORY EQUIPMENT (AE) DETAILS..... 6

3.4 TEST SAMPLE CONFIGURATION ..... 6

3.5 MODE OF OPERATION DETAILS..... 6

3.6 JUSTIFICATION FOR WORST CASE MODE OF OPERATION ..... 6

**4 SUBJECT OF INVESTIGATION..... 7**

4.1 MEASUREMENT UNCERTAINTY..... 7

4.2 ENVIRONMENTAL CONDITIONS DURING TESTING:..... 7

4.3 DATES OF TESTING:..... 7

**5 MEASUREMENT RESULTS SUMMARY ..... 8**

**6 MEASUREMENT PROCEDURES..... 9**

6.1 RADIATED MEASUREMENT ..... 9

**7 TEST RESULT DATA ..... 12**

7.1 TRANSMITTER SPURIOUS EMISSIONS AND RESTRICTED BANDS..... 12

**8 TEST SETUP PHOTOS..... 19**

**9 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTING ..... 19**

**10 REVISION HISTORY ..... 19**



**1 Assessment**

The following device as further described in section 3 of this report was evaluated for unlicensed radio according to criteria specified in Code of Federal Regulations Title 47 CFR: Part 15.225.

No deviations were ascertained.

According to section 5 of this report, the overall result is PASS.

Company	Description	Model #
Lyft, Inc.	Location and connectivity module. Includes LTE, NFC, GNSS and RX-only WIFI to enable ride sharing capabilities and unit tracking.	SIT-03-1-B

**Responsible for Testing Laboratory:**

08/16/2019	Compliance	Cindy Li (Lab Manager)	
Date	Section	Name	Signature

**Responsible for the Report:**

08/16/2019	Compliance	Issa Ghanma (EMC Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section3. CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.



## 2 Administrative Data

### 2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

<b>Company Name:</b>	CETECOM Inc.
<b>Department:</b>	Compliance
<b>Street Address:</b>	411 Dixon Landing Road
<b>City/Zip Code</b>	Milpitas, CA 95035
<b>Country</b>	USA
<b>Telephone:</b>	+1 (408) 586 6200
<b>Fax:</b>	+1 (408) 586 6299
<b>Lab Manager:</b>	Cindy Li
<b>Responsible Project Leader:</b>	Saman, Rami

### 2.2 Identification of the Client

<b>Applicant's Name:</b>	Lyft, Inc.
<b>Street Address:</b>	185 Berry St Suite 5000
<b>City/Zip Code</b>	San Francisco, CA 94107
<b>Country</b>	USA

### 2.3 Identification of the Manufacturer

<b>Manufacturer's Name:</b>	---Same as client----
<b>Manufacturers Address:</b>	-----
<b>City/Zip Code</b>	-----
<b>Country</b>	-----



### 3 Equipment Under Test (EUT)

#### 3.1 EUT Specifications

<b>Brand:</b>	Lyft
<b>Marketing name:</b>	Lyft Scooter Interface Module
<b>Module Name:</b>	NFC Module
<b>Frequency Range / number of channels:</b>	13.56 MHz / 1 Channel
<b>Type(s) of Modulation:</b>	ASK
<b>Modes of Operation:</b>	RFID
<b>Antenna Information as declared:</b>	<ul style="list-style-type: none"> <li>❖ Custom PCB trace antenna:                             <ul style="list-style-type: none"> <li>• This antenna is composed of 4 loops of 300µm copper traces in a rectangle of size 37mm x 42mm.</li> <li>• There is a 100µm thick ferrite sheet bonded to the bottom side of the PCB (Laird MHLL12060-200)</li> <li>• This antenna is tuned to couple with a similarly tuned 13.56 MHz NFC card antenna.</li> <li>• The antenna is simulated to have a maximum antenna gain of -18dBi</li> </ul> </li> </ul>
<b>Max. Output Powers as declared:</b>	15 dBm (low power) 18 dBm (high power)
<b>Other Radios included in the device:</b>	<ul style="list-style-type: none"> <li>❖ Cellular 4G LTE CAT-1                             <ul style="list-style-type: none"> <li>• Module name: Digi XBee Cellular LTE Cat 1</li> <li>• Module number: XBC-V1-UT-101</li> <li>• FCC ID: RI7LE866SV1A</li> </ul> </li> <li>❖ WLAN(Wi-Fi): 802.11 b/g/n (Receive only)                             <ul style="list-style-type: none"> <li>• Module name: Stand-alone Wi-Fi module</li> <li>• Model number: uBlox NINA-W132</li> <li>• FCC ID: XPYNINAW13</li> </ul> </li> <li>❖ GPS:                             <ul style="list-style-type: none"> <li>• Module name: uBlox M8 GNSS Antenna Module</li> <li>• Model number: uBlox SAM-M8Q</li> </ul> </li> </ul>
<b>Sample Revision:</b>	<input type="checkbox"/> Prototype Unit; <input type="checkbox"/> Production Unit; <input checked="" type="checkbox"/> Pre-Production
<b>Power Supply/ Rated Operating Voltage Range:</b>	Low 30 VDC, Nominal 36 VDC, High 42 VDC
<b>Operating Temperature Range:</b>	Low -20° C, Nominal 25° C, High 50° C
<b>EUT Dimensions [mm]:</b>	180 x 75 x 40
<b>EUT Diameter:</b>	<input checked="" type="checkbox"/> < 60 cm <input type="checkbox"/> Other _____

**3.2 EUT Sample details**

EUT #	Serial Number	NFC board label	HW Version	SW Version	Notes / Comments
1	971-288	FK1914XNFC3P10085	1.1	1.1	Test mode Always read / High duty cycle

**3.3 Accessory Equipment (AE) details**

AE #	Comments
1	<ul style="list-style-type: none"> <li>❖ XP Power:                             <ul style="list-style-type: none"> <li>○ S/N :171002-00573</li> <li>○ MODEL : ACM36US36</li> <li>○ INPUT :100V – 240V~50/60Hz, 1.0A</li> <li>○ OUTPUT :36 V _____ 1.0A</li> </ul> </li> </ul>

**3.4 Test Sample Configuration**

Set-up #	Combination of AE used for test set up	Comments
1	EUT # 1 + AE # 1	-

**3.5 Mode of Operation details**

Mode of Operation	Description of Operating modes	Additional Information
Op. 1	RFID ASK	The Radio was configured by the client to transmit continuously at the maximum output power and highest possible duty cycle. For Radiated measurements: The internal antenna was connected.

**3.6 Justification for Worst Case Mode of Operation**

During the testing process the EUT was tested with transmitter sets the highest duty cycle, maximum output power and worst case of supported protocols (1433a).

For radiated measurements, all data in this report shows the worst case between horizontal and vertical antenna polarizations and for all orientations of the EUT.



## 4 Subject of Investigation

The objective of the measurements done by CETECOM Inc. was to assess the performance of the EUT according to the relevant requirements specified in Code of Federal Regulations Title 47 CFR: Part 15.225.

This test report is to support a request for new equipment authorization under the:

- FCC ID: 2ASMPSIT031B

### 4.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus, with 95% confidence interval (in dB delta to result), based on a coverage factor  $k=1$ .

Radiated measurement

9 kHz to 30 MHz	$\pm 2.5$ dB (Magnetic Loop Antenna)
30 MHz to 1000 MHz	$\pm 2.0$ dB (Biconilog Antenna)
1 GHz to 40 GHz	$\pm 2.3$ dB (Horn Antenna)

According to TR 102 273 a multiplicative propagation of error is assumed for RF measurement systems. For this reason the RMS method is applied to dB values and not to linear values as appropriate for additive propagation of error. Also used: <http://physics.nist.gov/cuu/Uncertainty/typeb.html>. The above calculated uncertainties apply to direct application of the Substitution method. The Substitution method is always used when the EUT comes closer than 3 dB to the limit.

### 4.2 Environmental Conditions During Testing:

The following environmental conditions were maintained during the course of testing:

- Ambient Temperature: 20-25° C
- Relative humidity: 40-60%

### 4.3 Dates of Testing:

07/17/2019 – 07/19/2019



**5 Measurement Results Summary**

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	NA	NP	Result
§15.225 (a), (b), (c)	Field Strength (Fundamental)	Nominal	ASK	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Note 1 Note 2
§15.225 (d) §15.209 (a)	TX Spurious emissions-Radiated	Nominal	RFID ASK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Complies
§15.225(e)	Frequency stability	Extreme temperature and voltage conditions	CW	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Note 1 Note 2

Note 1: NA= Not Applicable; NP= Note Performed.

Note 2: Leveraged from module certification FCC filing ID: 2ASMPNB2IOT




## 6 Measurement Procedures


### 6.1 Radiated Measurement

The radiated measurement is performed according to ANSI C63.10 (2013)


- The exploratory measurement is accomplished by running a matrix of 16 sweeps over the required frequency range with R&S Test-SW EMC32 for 360° continuous measurement of the turntable, two orthogonal positions of the EUT and both antenna polarizations. This procedure exceeds the requirement of the above standards to cover the 3 orthogonal axis of the EUT. A max peak detector is utilized during the exploratory measurement. The Test-SW creates an overall maximum trace for all 12 sweeps and saves the settings for each point of this trace. The maximum trace is part of the test report.
- The 10 highest emissions are selected with an automatic algorithm of EMC32 searching for peaks in the noise floor and ensuring that broadband signals are not selected multiple times.
- The maxima are then put through the final measurement and again maximized in a 90deg range of the turntable, fine search in frequency domain and height scan between 1m and 4m.
- The above procedure is repeated for all possible ways of power supply to EUT and for all supported modulations.
- In case there are no emissions above noise floor level only the maximum trace is reported as described above.
- The results are split up into up to 4 frequency ranges due to antenna bandwidth restrictions. A magnetic loop is used from 9 kHz to 30 MHz, a Biconilog antenna is used from 30 MHz to 1 GHz, and two different horn antennas are used to cover frequencies up to 40 GHz.

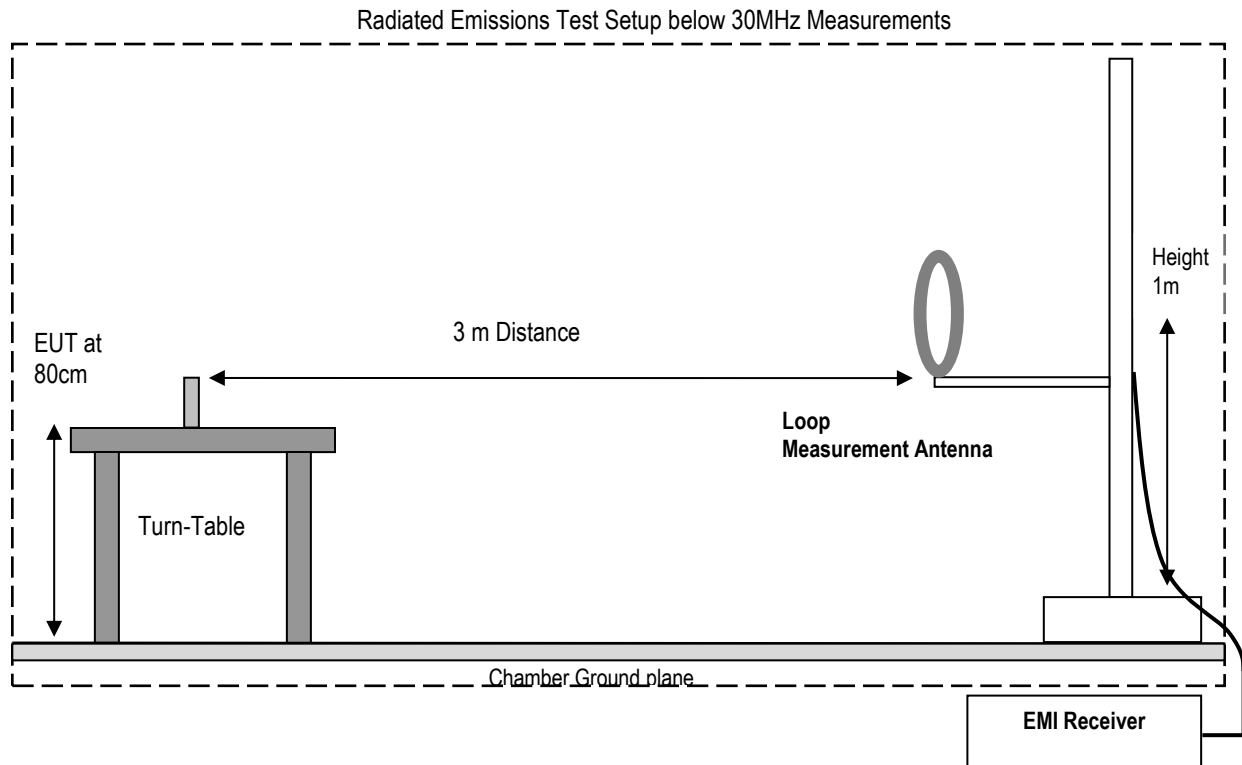

Radiated Emissions Test Setup 30MHz-1GHz Measurements

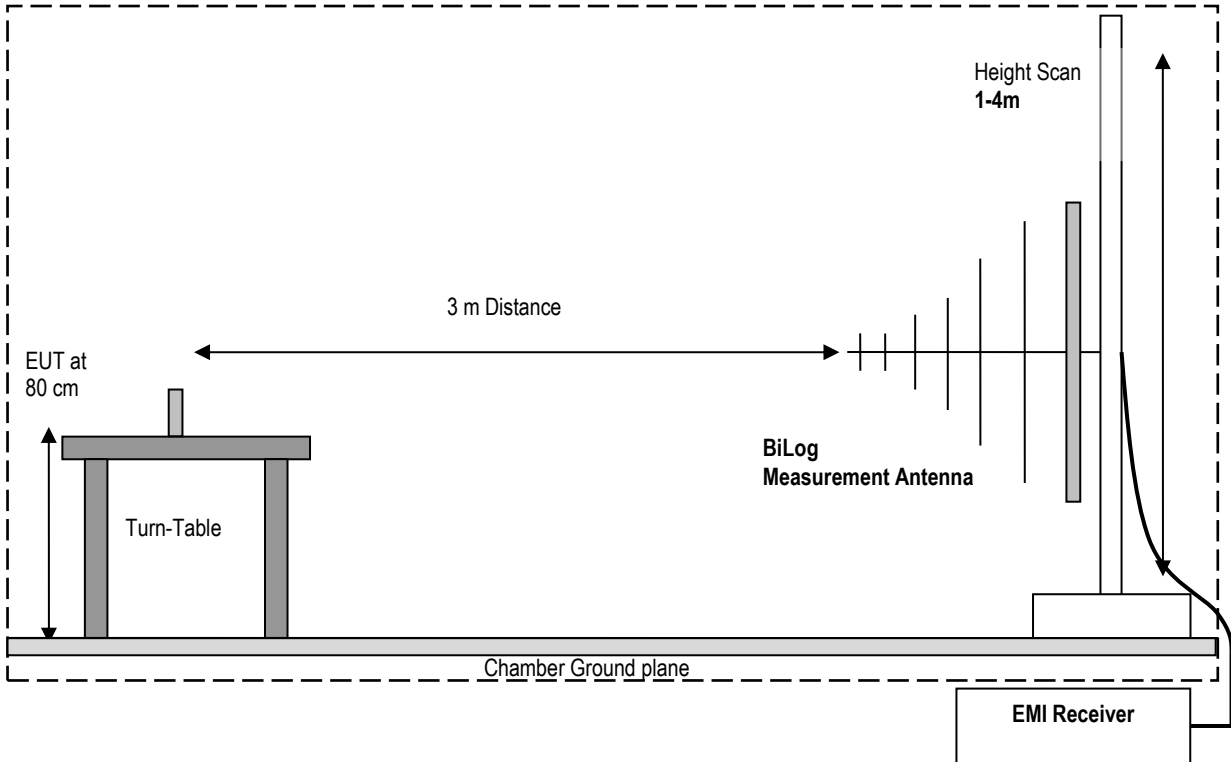

Radiated Emissions Test Setup above 1GHz Measurements

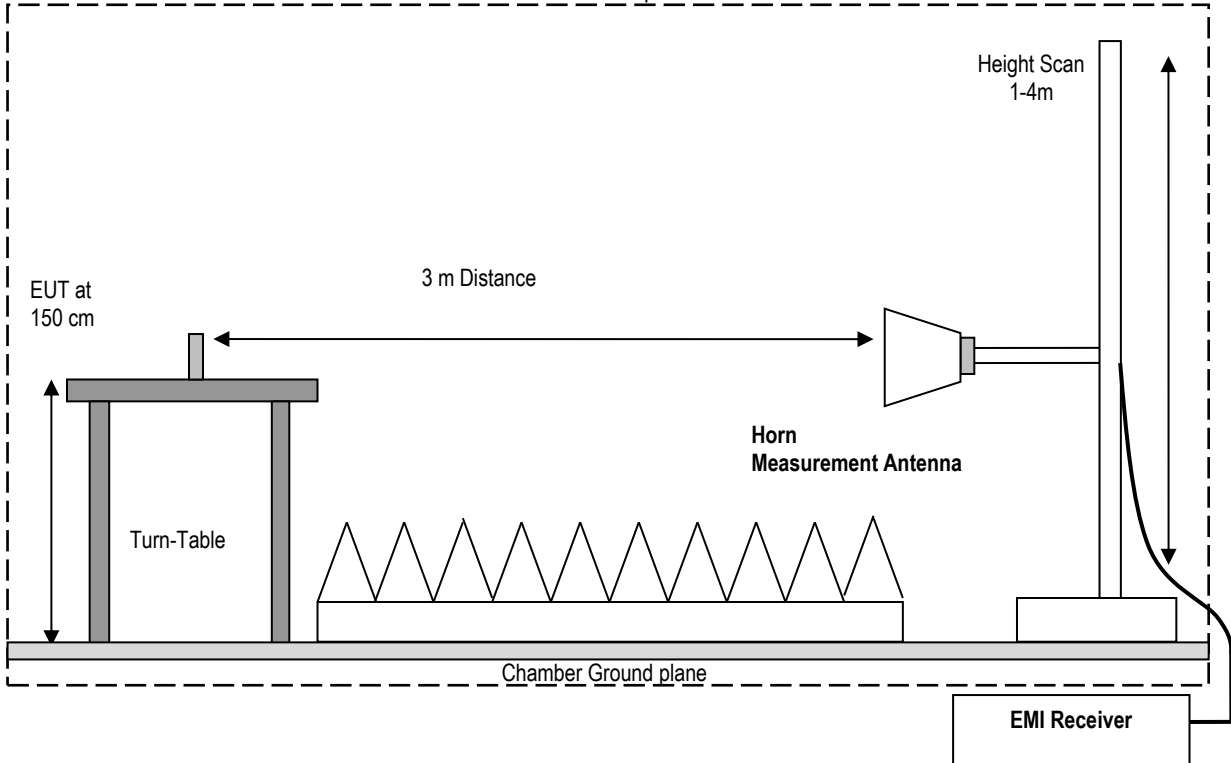



**6.1.1 Sample Calculations for Field Strength Measurements**

Field Strength is calculated from the Spectrum Analyzer/ Receiver readings, taking into account the following parameters:

1. Measured reading in dBμV
2. Cable Loss between the receiving antenna and SA in dB and
3. Antenna Factor in dB/m

All radiated measurement plots in this report are taken from a test SW that calculates the Field Strength based on the following equation:

$$FS \text{ (dB}\mu\text{V/m)} = \text{Measured Value on SA (dB}\mu\text{V)} - \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$$

Example:

Frequency (MHz)	Measured SA (dBμV)	Cable Loss (dB)	Antenna Factor Correction (dB)	Field Strength Result (dBμV/m)
1000	80.5	3.5	14	98.0

## 7 Test Result Data

### 7.1 Transmitter Spurious Emissions and Restricted Bands

#### 7.1.1 Measurement according to ANSI C63.10

##### **Analyzer Settings:**

- Frequency = 9 KHz – 30 MHz
- RBW = 9 KHz
- Detector = Peak
  
- Frequency = 30 MHz – 1 GHz
- Detector = Peak / Quasi-Peak
- RBW = 120 KHz (<1 GHz)
  
- Frequency > 1 GHz
- Detector = Peak / Average
- RBW = 1MHz

Plots reported here represent the worst case emissions for horizontal and vertical antenna polarizations and for three orientations of the EUT. Unless mentioned otherwise, the emissions outside the limit lines in the plots are from the transmit signal.



**7.1.2 Limits: FCC 15.247(d)/15.209(a)**

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

- Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
- PEAK LIMIT= 74dB  $\mu$ V/m
- AVG. LIMIT= 54dB  $\mu$ V/m
- Except as shown in CFR 47 Part 15.205 paragraph (d), only spurious emissions are permitted in any of the frequency bands listed below

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Radiated spurious emissions shall be measured for the transmit frequencies, transmit power, and data rate for the lowest, middle and highest channel in each frequency band of operation and for the highest gain antenna for each antenna type, and using the appropriate parameters and test requirements described in 5.4.

The highest (or worst-case) data rate shall be recorded for each measurement.

For testing at distance other than the specified in the standard, the limit conversion is calculated by using 40 dB/decade extrapolation as follow:


$$\text{Conversion factor (CF)} = 40 \log (D/d) = 40 \log (300 \text{ m} / 3 \text{ m}) = 80 \text{ dB}$$

**7.1.3 Test conditions and setup:**

Ambient Temperature	EUT operating mode	Power Input
22° C	Op.1	DC 36V



7.1.4 Measurement Plots:

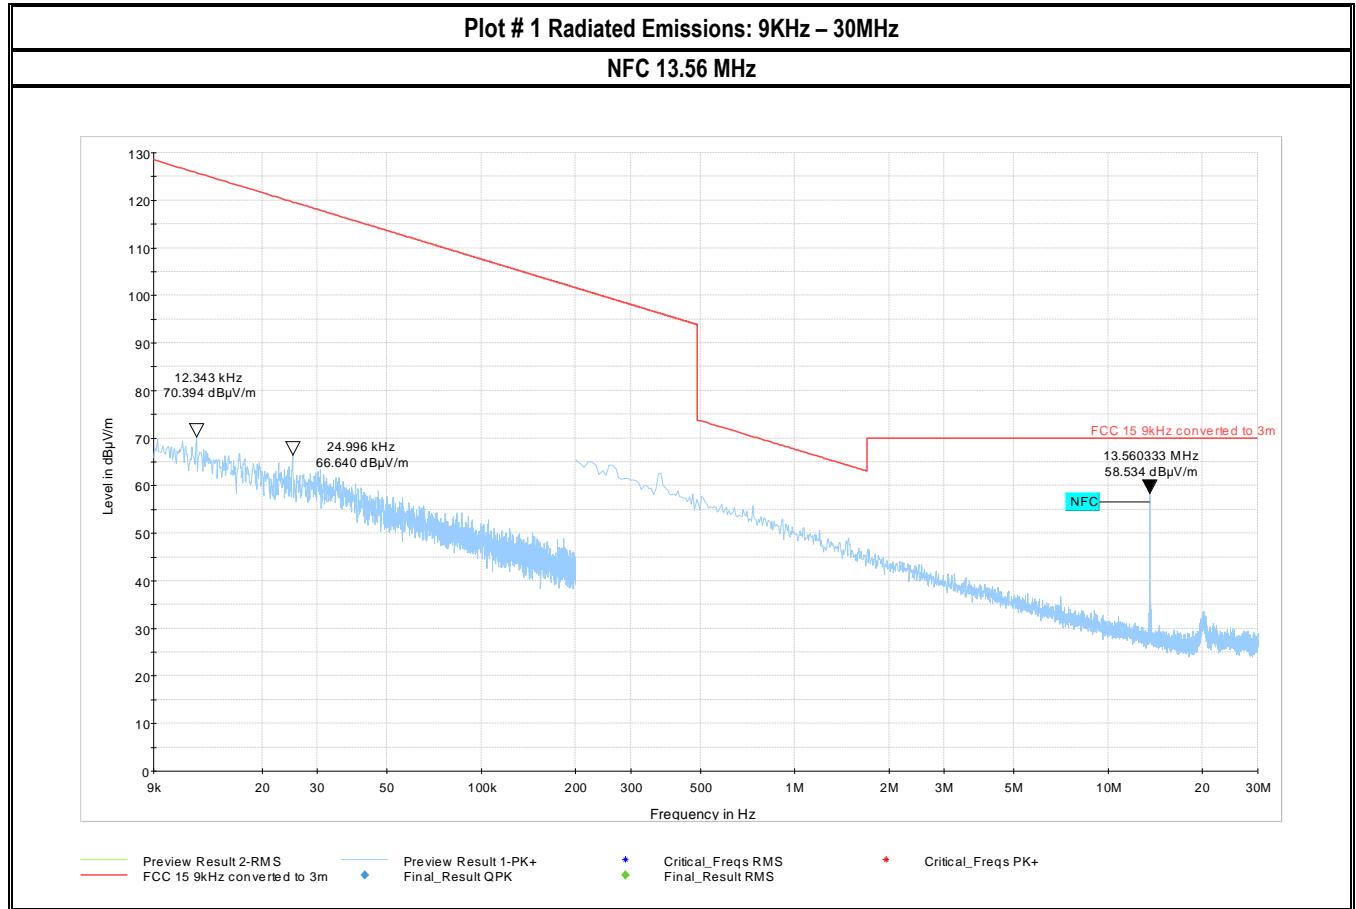




**Plot # 2 Radiated Emissions: 30MHz – 1GHz**

**NFC 13.56 MHz**

**Final Result**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
30.933	29.34	40.00	10.66	100.0	100.000	218.0	V	281.0	-10.6	1:15:30 PM - 7/19/2019
60.917	25.46	40.00	14.54	100.0	100.000	141.0	V	-68.0	-22.7	1:18:38 PM - 7/19/2019
82.653	28.74	40.00	11.26	100.0	100.000	159.0	V	217.0	-23.3	1:21:28 PM - 7/19/2019
169.684	33.71	43.50	9.79	100.0	100.000	100.0	V	6.0	-20.1	1:24:33 PM - 7/19/2019
176.285	37.53	43.50	5.97	100.0	100.000	100.0	V	-17.0	-20.9	1:27:08 PM - 7/19/2019
198.982	29.55	43.50	13.95	100.0	100.000	119.0	V	182.0	-20.6	1:29:59 PM - 7/19/2019
351.544	33.80	46.00	12.20	100.0	100.000	135.0	H	130.0	-15.7	1:32:46 PM - 7/19/2019

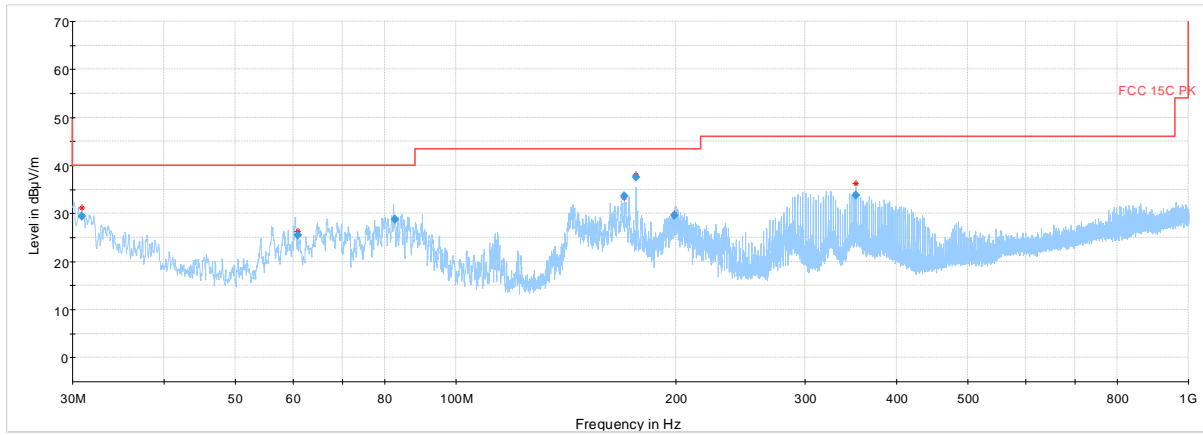


Preview Result 1-PK+    Critical\_Freqs PK+    FCC 15C PK    Final\_Result PK+    Final\_Result RMS





Plot # 3 Radiated Emissions: 1 – 3GHz

NFC 13.56 MHz

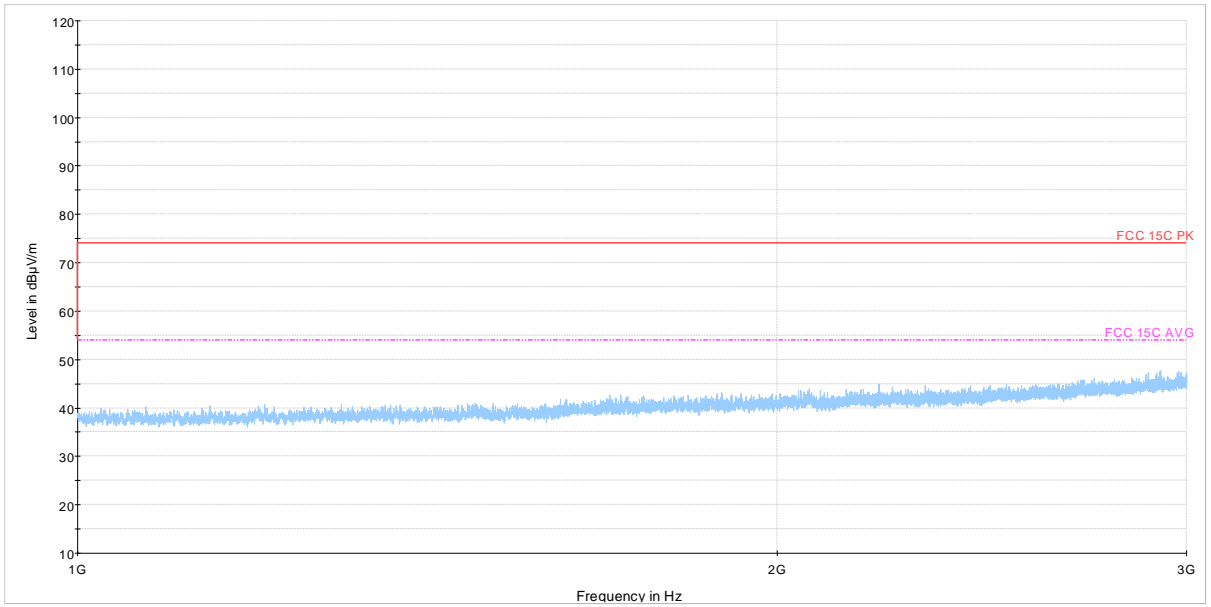


Preview Result 1-PK+ Critical\_Freqs PK+ FCC 15C PK FCC 15C AVG Final\_Result PK+ Final\_Result RMS



Plot # 4 Radiated Emissions: 3 – 18GHz

NFC 13.56 MHz

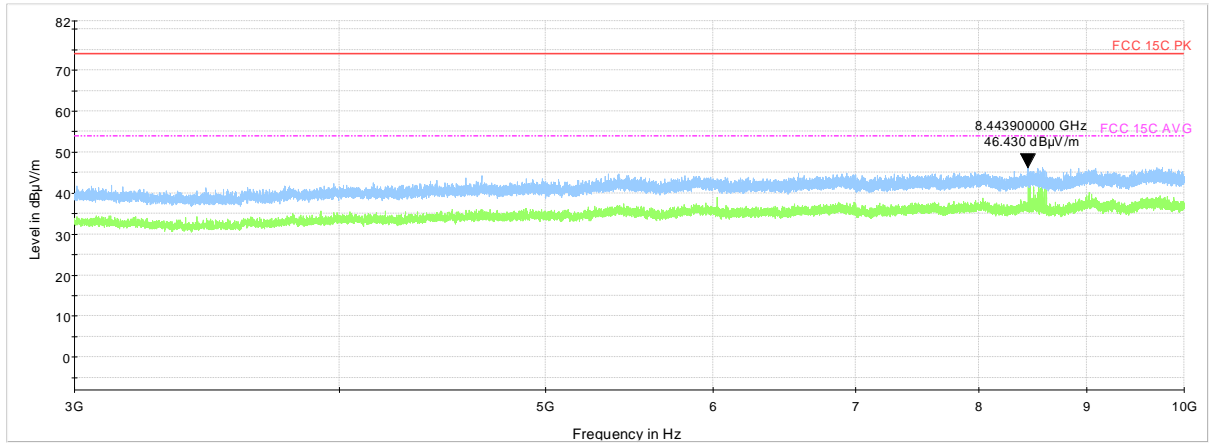

- RMS\_MAXH
- PK+\_MAXH
- FCC 15C PK
- FCC 15C AVG
- Critical\_Freqs RMS
- Final\_Result QPK
- Critical\_Freqs PK+
- Final\_Result RMS



**8 Test setup photos**

Setup photos are included in supporting file name: "EMC\_LYFTH\_005\_19001\_FCC\_Setup\_Photos.pdf"

**9 Test Equipment And Ancillaries Used For Testing**

Equipment Type	Manufacturer	Model	Serial #	Calibration Cycle	Last Calibration Date
ACTIVE LOOP ANTENNA	ETS LINDGREN	6507	00161344	3 YEARS	10/26/2017
BILOG ANTENNA	TESEO	CBL 6141B	41106	3 YEARS	11/01/2017
HORN ANTENNA	ETS.LINDGREN	3115	00035111	3 YEARS	04/17/2019
HORN ANTENNA	ETS.LINDGREN	3117	00167061	3 YEARS	08/08/2017
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSV 40	101022	3 YEARS	07/15/2019
VWR THERMOMETER	CONTROL COMPANY	36934-164	191871994	2 YEARS	01/10/2019

Note: Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels. Calibration due dates, unless defined specifically, falls on the last day of the month. Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.

**10 Revision History**

Date	Report Name	Changes to report	Report prepared by
08/16/2019	EMC_LYFTH_005_19001_FCC_15.225_NFC	Initial Version	Issa Ghanma