

Global United Technology Services Co., Ltd.

Report No.: GTS201903000169F01

FCC REPORT

Applicant: Dinsafer Innovation Co., Ltd.

Address of Applicant: Room 402/403, Floor 4, Area B, Unit B, West Silicon Valley,

No. 5010, Baoan Avenue, Hangcheng Street, Baoan District,

Shenzhen, 518128, China

Dinsafer Innovation Co., Ltd. Manufacturer:

Address of Room 402/403, Floor 4, Area B, Unit B, West Silicon Valley, No. 5010, Baoan Avenue, Hangcheng Street, Baoan District, Manufacturer:

Shenzhen, 518128, China

Equipment Under Test (EUT)

Product Name: Wireless indoor Siren

Model No.: DISA4(DIS *4,*=A-Z)(DIS A*,*=1-9)

FCC ID: 2ASON-DISA4

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.231

Date of sample receipt: March 22, 2019

Date of Test: March 22~ April 01, 2019

Date of report issued: April 02, 2019

Test Result: PASS *

In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo **Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.



2 Version

Version No.	Date	Description
01	April 02, 2019	Original

Prepared By:	Tger. Che	Date:	April 02, 2019	
	Project Engineer			
Check By:	Johnson	Date:	April 02, 2019	_
	Reviewer			



3 Contents

	Р	Page
1	COVER PAGE	1
2	VERSION	2
3	CONTENTS	3
4	TEST SUMMARY	
	4.1 MEASUREMENT UNCERTAINTY	
5	GENERAL INFORMATION	5
	5.1 GENERAL DESCRIPTION OF EUT	6
	5.3 DESCRIPTION OF SUPPORT UNITS	6
	5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
6	TEST INSTRUMENTS LIST	7
7	TEST RESULTS AND MEASUREMENT DATA	8
	7.1 ANTENNA REQUIREMENT	
	7.2.1 Field Strength of The Fundamental Signal	11
	7.3 20DB OCCUPY BANDWIDTH	
8	TEST SETUP PHOTO	17
9	EUT CONSTRUCTIONAL DETAILS	17

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203	Pass
Conduction Emission	15.207	N/A
Field strength of the Fundamental Signal	15.231 (b)	Pass
Spurious Emissions	15.231 (b)/15.209	Pass
20dB Bandwidth	15.231 (c)	Pass
Dwell Time	15.231 (a)(2)	Pass

Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes			
Radiated Emission	9kHz ~ 30MHz	± 4.54dB	(1)			
Radiated Emission	30MHz ~ 1000MHz	± 5.34dB	(1)			
Radiated Emission	1GHz ~ 26.5GHz	± 5.34dB	(1)			
AC Power Line Conducted Emission 0.15MHz ~ 30MHz ± 3.44dB						
Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.						



5 General Information

5.1 General Description of EUT

Product Name:	Wireless indoor Siren
Model No.:	DISA4(DIS *4,*=A-Z)(DIS A*,*=1-9)
Test model:	DISA4
Remark: All above models ar	e identical in the same PCB layout, interior structure and electrical circuits.
The only difference is model	name for commercial purpose.
Serial No.:	2019-DISA4
Hardware Version:	G005-F4-V1.1
Software Version:	G005F4-V1.0.1.2019.03.21-Bate
Test sample(s) ID:	GTS201903000169-1
Sample(s) Status:	Engineer sample
Operation Frequency:	433.92MHz
Modulation technology:	2FSK
Antenna Type:	Integral Antenna
Antenna gain:	0dBi(declare by applicant)
Power supply:	DC 4.5V 3*1.5V "AAA"



5.2 Test mode

Transmitting mode	Keep the EUT in transmitting mode. (New battery is used during all test)
-------------------	--

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which only the worst case was shown in this test report and defined as follows:

	Axis	Х	Υ	Z
433.92MHz	Field Strength(dBuV/m)	83.92	81.11	76.84

5.3 Description of Support Units

None.

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• FCC —Registration No.: 381383

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

• Industry Canada (IC) —Registration No.: 9079A-2

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2.

NVLAP (LAB CODE:600179-0)

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone,

Xixiang Road, Baoan District, Shenzhen, Guangdong, China

Tel: 0755-27798480 Fax: 0755-27798960

5.6 Other Information Requested by the Customer

None.



6 Test Instruments list

Radia	Radiated Emission:								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)			
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020			
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A			
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 27 2018	June. 26 2019			
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 27 2018	June. 26 2019			
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 27 2018	June. 26 2019			
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 27 2018	June. 26 2019			
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A			
8	Coaxial Cable GTS		N/A	GTS213	June. 27 2018	June. 26 2019			
9	Coaxial Cable	Coaxial Cable GTS		GTS211	June. 27 2018	June. 26 2019			
10	Coaxial cable	GTS	N/A	GTS210	June. 27 2018	June. 26 2019			
11	Coaxial Cable	GTS	N/A	GTS212	June. 27 2018	June. 26 2019			
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 27 2018	June. 26 2019			
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 27 2018	June. 26 2019			
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 27 2018	June. 26 2019			
15	Band filter	Amindeon	82346	GTS219	June. 27 2018	June. 26 2019			
16	Power Meter	Anritsu	ML2495A	GTS540	June. 27 2018	June. 26 2019			
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 27 2018	June. 26 2019			
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 27 2018	June. 26 2019			
19	Splitter	Agilent	11636B	GTS237	June. 27 2018	June. 26 2019			
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 27 2018	June. 26 2019			
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 20 2018	Oct. 19 2019			
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 20 2018	Oct. 19 2019			
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 20 2018	Oct. 19 2019			
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 27 2018	June. 26 2019			

Gene	General used equipment:								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date	Cal.Due date			
					(mm-dd-yy)	(mm-dd-yy)			
1	Barometer	ChangChun	DYM3	GTS257	June 27 2018	June 26 2019			



7 Test results and Measurement Data

7.1 Antenna Requirement


Standard requirement: FCC Part15 C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integral antenna; the best case gain of the antenna is 0dBi.

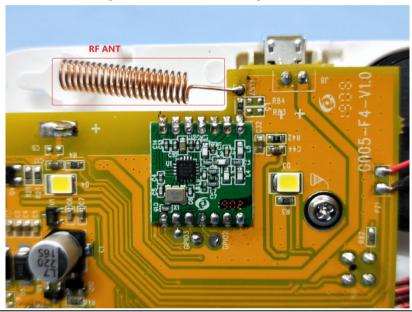



7.2 Radiated Emission Method

1.2	Radiated Emission We	tilou							
	Test Requirement:	FCC Part15 C Section 15.231 (b)& Section 15.209							
	Test Method:	ANSI C63.10:2013							
	Test Frequency Range:	9kHz to 5000MHz							
	Test site:	Measurement Distar	nce: 3m						
	Receiver setup:	Frequency	Dete	ector	RBW	VB'	W	Value	
		9KHz-150KHz PK,A		V,QP	200Hz 6		Hz	PK,AV,QP	
		150KHz-30MHz PK,A		V,QP	P 9KHz		Hz	PK,AV,QP	
		30MHz-1GHz	30MHz-1GHz Quasi-pea		120KHz	300k	Ήz	Quasi-peak	
		Above 1GHz	Pe	ak	1MHz	3MI	Ηz	Peak	
		Above IGHZ	Pe	ak	1MHz	10H	łz	Average	
	Limit:	Frequency		Limit	(dBuV/m @	3m)		Remark	
	(Field strength of the	433.92MHz			100.83 80.83			Peak Value verage Value	
	fundamental signal)				00.03				
	Limit:	Field Strength of Unwanted Unwanted							
	(Spurious Emissions)	(MHz)	fundamental (microvolts/meter				Emissions		
		40.00.40.70	,			(microvolts/meter)			
		40.66-40.70 70-130	1,000 500			100 50			
		130-174		500 to 1,500**		50 to 1,50**			
		174-260		1,500			1,50		
		260-470 Above 470		1,500 to 5,000** 5,000			1,50 to 5,00** 5,00		
		7,5000 170			0,000			0,00	
		Frequency			Class B	(dBuV	/m @		
		(MHz) Above 1000		Peak 74			Average 54		
		Or The maximum pe		unwante		level i	s 20		
		maximum permitted f	fundame	ental lev	el whicheve	er limit	perm	nits higher field	
	Test setup:	strength.							
	rest setup.	Below 30MHz							
		***************************************	*********	*******	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	******	_		
		■ """"""""""""""""""""""""""""""""""""	· · · · · · · · · · · · · · · · · · ·	m >√			7		
		*			->-		1		
		E					7		
		Turn Table* EUT* < 1m > 4							
		Test A	Antenna	Receiver	Preamplifier	·			
		Below 1GHz							
		2000.1012							



Report No.: GTS201903000169F01 Test Antenna Tum Table < 80cm Preamplifier« Above 1GHz < 1m ... 4m > Tum Table <150cm> Receiver+ Preamplifier+ Test Procedure: 1. The EUT was placed on the top of a rotating table (0.8 meters for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Test Instruments: Refer to section 6.0 for details Test mode: Refer to section 5.2 for details Test environment: Temp.: 25 °C Humid.: 50% Press.: 1 010mbar Test results: **Pass**

Global United Technology Services Co., Ltd.

No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone,

Xixiang Road, Baoan District, Shenzhen, Guangdong, China

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Measurement data:

7.2.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
433.92	102.39	16.03	3.02	37.52	83.92	100.83	-16.91	Horizontal
433.92	97.65	16.03	3.02	37.52	79.18	100.83	-21.65	Vertical


Average value:

Frequency	Peak Value	Duty cycle	Average	Limit Line	Over Limit	
(MHz)	(dBuV/m)	factor	value (dBuV/m)	(dBuV/m)	(dB)	Polarization
433.92	83.92	-5.245	78.675	80.83	-2.155	Horizontal
433.92	79.18	-5.245	73.935	80.83	-6.895	Vertical

Remarks:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. Average value=Peak value + Duty cycle factor

Average value:		
	Average value=Peak value + Duty Cycle Factor	
Calculate Formula:	Duty cycle factor=20 log(Duty cycle)	
	Duty cycle=on time/100 milliseconds or period, whichever is less	
	T on time =54.67(ms)	
Test data:	T period 100(ms)	
Test data.	Duty cycle=0.5467	
	duty cycle factor=-5.245	

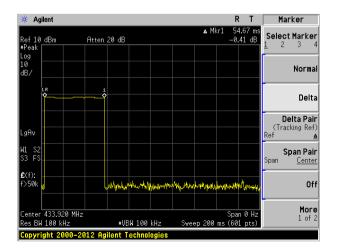



7.2.2 Spurious Emissions


Measurement data:

9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Below 1GHz:

Mode:	Transmitting mode	Polarization:	Horizontal	

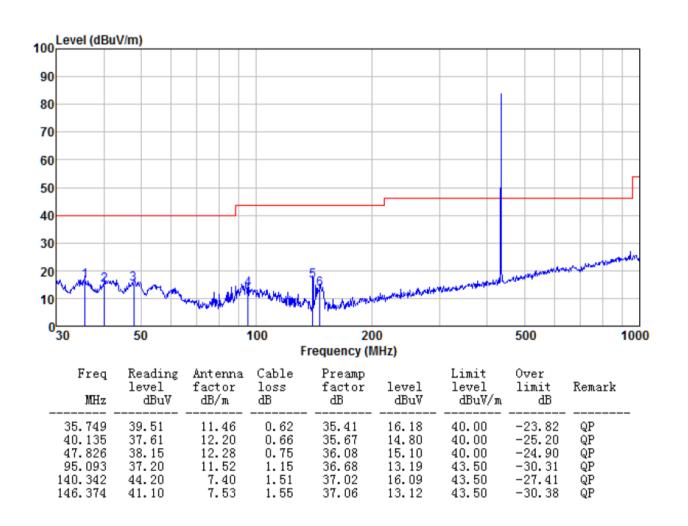



Mode: Transmitting mode Polarization: Vertical

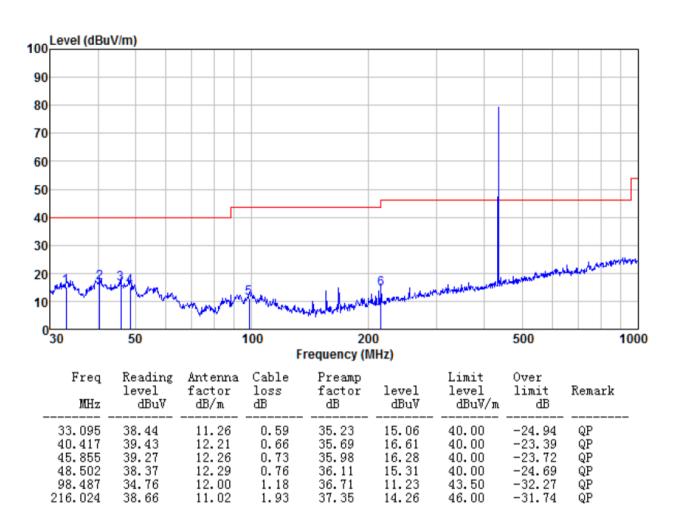



Above 1G:

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1205	51.63	24.79	4.47	35.92	44.97	74.00	-29.03	Vertical
1665	48.18	25.8	4.78	36.29	42.47	74.00	-31.53	Vertical
2295	52.94	27.17	5.28	36.77	48.62	74.00	-25.38	Vertical
1220	49.06	24.83	4.48	35.93	42.44	74.00	-31.56	Horizontal
1725	48.27	25.91	4.82	36.33	42.67	74.00	-31.33	Horizontal
2350	46.85	27.31	5.34	36.82	42.68	74.00	-31.32	Horizontal

Remarks:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor



7.3 20dB Occupy Bandwidth

	. — 2000 Сосиру — 11111111111111111111111111111111111				
Test Requirement:	FCC Part15 C Section 15.231 (c)				
Test Method:	ANSI C63.10:2013				
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.				
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				


Measurement Data

Test Frequency (MHz)	20dB bandwidth (MHz)	Limit (MHz)	Result
433.92	0.095	1.085	Pass

Note: Limit= Fundamental frequency×0.25%

433.92×0.25%=1.085MHz

Test plot as follows:

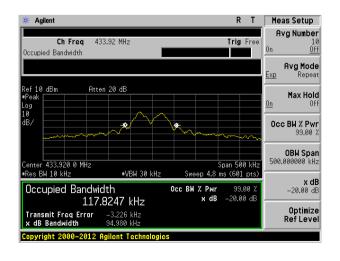




7.4 Dwell Time


Test Requirement:	FCC Part15 C Section 15.231 (a)(2)	
Test Method:	ANSI C63.10:2013	
Receiver setup:	RBW=100KHz, VBW=300KHz, span=0Hz, detector: Peak	
Limit:	Not more than 5 seconds	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 6.0 for details	
Test mode:	Refer to section 5.2 for details	
Test results:	Pass	

Measurement data:

Frequency (MHz)	Duration of each TX (second)	Limit (second)	Result
433.92	0.05467	<5.0	Pass

Test plot as follows:

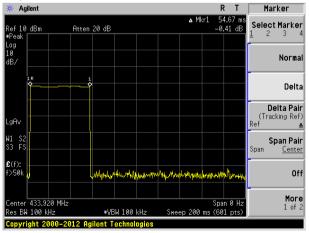

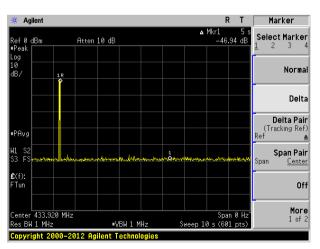



8 Test Setup Photo

Reference to the appendix I for details.

9 EUT Constructional Details

Reference to the appendix II for details.

----- End -----