



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: MAXWEST COMMUNICATION LIMITED

Address: FLAT/RM 707 7/F, FORTRESS TOWER 250 KING'S ROAD,NORTH
POINT, HONG KONG

FCC ID: 2ASP8ASTRO55T

Product Name: Phone

**Standard(s): 47 CFR Part 2
47 CFR Part 22, Subpart H
47 CFR Part 24, Subpart E
47 CFR Part 27
ANSI C63.26-2015**

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230524073-00E

Date Of Issue: 2023/6/6

Reviewed By: Sun Zhong *Sun Zhong*

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,

Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.2 Support Equipment List and Details	10
1.2.3 Support Cable List and Details	10
1.2.4 Block Diagram of Test Setup.....	10
1.3 MEASUREMENT UNCERTAINTY	11
2. SUMMARY OF TEST RESULTS	12
3. REQUIREMENTS AND TEST PROCEDURES	13
3.1 Applicable Standard For Part 22 Subpart H:.....	13
3.1.1 RF Output Power	13
3.1.2 Spurious Emissions.....	13
3.1.3 Frequency stability.....	13
3.2 Applicable Standard For Part 24 Subpart E:	15
3.2.1 RF Output Power	15
3.2.2 Spurious Emissions.....	15
3.2.3 Frequency stability.....	15
3.3 Applicable Standard For Part 27:.....	16
3.3.1 RF Output Power	16
3.3.2 Spurious Emissions.....	16
3.3.3 Frequency stability.....	18
3.4 Test Method:.....	19
3.4.1 RF Output Power	19
Test Setup Block:.....	19
3.4.2 Occupied Bandwidth.....	20
Test Setup Block:.....	20
3.4.3 Spurious emissions at antenna terminals.....	21
Test Setup Block:.....	21
3.4.4 Out of band emission	22
Test Setup Block:.....	22
3.4.5 Frequency stability.....	23
Test Setup Block:.....	23
3.4.6 Field strength of spurious radiation.....	24
4. Test DATA AND RESULTS	26
4.1 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 850 BAND:.....	26
4.2 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 1900 BAND:.....	32
4.3 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 2:.....	38

4.5 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 5: 45
4.6 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 2..... 52
4.7 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 4..... 73
4.8 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 5..... 94
4.9 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 7..... 110
4.10 RADIATED SPURIOUS EMISSIONS..... 126

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230524073-00E	Original Report	2023/6/6

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

General:

EUT Name:	Phone
EUT Model:	ASTRO 55T
Operation Bands and modes:	GSM/GPRS/EDGE: 850/1900 WCDMA: Band 2/5 LTE: Band 2/4/5/7
Modulation Type:	GMSK, 8PSK, BPSK, QPSK, 16QAM
Rated Input Voltage:	DC 5V from adapter or DC 3.8V from battery
Serial Number:	25FP-1
EUT Received Date:	2023/5/6
EUT Received Status:	Good

Operation Voltage(V_{DC}):

Lowest:	3.6	Normal:	3.8	Highest:	4.35
---------	-----	---------	-----	----------	------

Antenna Information ▲ :

Antenna Type	Operation Bands	Antenna Frequency Range (MHz)	Antenna Gain (G_T) (dBi)	L_c (dB)
FPC	GSM850	824-849	-0.26	0.2
	PCS1900	1850-1910	0.52	0.3
	WCDMA B2	1850-1910	0.52	0.3
	WCDMA B5	824-849	-0.26	0.2
	LTE B2	1850-1910	0.52	0.3
	LTE B4	1710-1755	0.47	0.3
	LTE B5	824-849	-0.26	0.2
	LTE B7	2500-2570	4.02	0.4

Note: L_c = Signal Attenuation in the connecting cable between the transmitter and antenna, in dB.

Accessory Information:

Accessory Description	Manufacturer	Model
Adapter	Maxwest	ASTRO 55T
USB Cable	Maxwest	Unknown
Earphone	Maxwest	Unknown

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in each operation mode.
Equipment Modifications:	No
EUT Exercise Software:	No
<p>The maximum power was configured per 3GPP Standard for each operation modes as below setting:</p> <p>GSM/GPRS/EGPRS</p> <p>Function: Menu select > GSM Mobile Station > GSM 850/1900 Press Connection control to choose the different menus Press RESET > choose all the reset all settings Connection Press Signal Off to turn off the signal and change settings Network Support > GSM + GPRS or GSM + EGSM Main Service > Packet Data Service selection > Test Mode A – Auto Slot Config. off MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting > Slot configuration > Uplink/Gamma > 33 dBm for GPRS 850 > 30 dBm for GPRS 1900 > 27 dBm for EGPRS 850 > 26 dBm for EGPRS 1900 BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel Frequency Offset > + 0 Hz Mode > BCCH and TCH BCCH Level > -85 dBm (May need to adjust if link is not stable) BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel] Channel Type > Off P0 > 4 dB Slot Config > Unchanged (if already set under MS signal) TCH > choose desired test channel Hopping > Off Main Timeslot > 3 Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)</p> <p>Bit Stream > 2E9-1 PSR Bit Stream AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input Connection Press Signal on to turn on the signal and change settings</p>	

WCDMA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2		4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β	11/15	6/1	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12 15	30 15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
CM(dB)	1.0	3.	2.0	3.0	1.0	
MPR(dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	A Index	20	12	1	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate k ps	242.1	174 9	482.8	205.8	308.9
	Reference E_FCI s	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 96	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
R&S	Wideband Radio Communication Tester	CMW500	149218
Unknown	ANTENNA	Unknown	Unknown

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Earphone Cable	No	No	1.2	EUT	Earphone
USB Cable	No	No	1	EUT	Adapter

1.2.4 Block Diagram of Test Setup

Radiation Test:

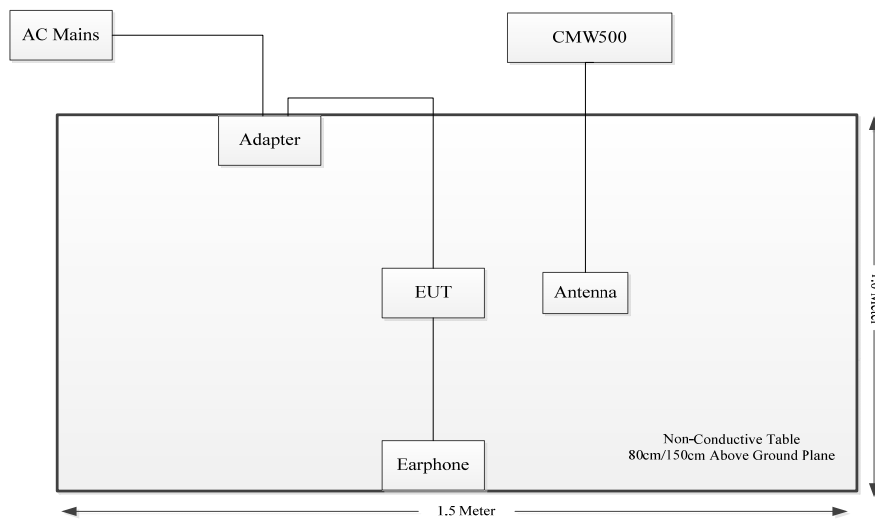

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
RF Frequency	±0.082×10 ⁻⁶

2. SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC§2.1046; § 22.913; § 24.232; §27.50	RF Output Power	Compliant
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 22.905, §22.917; § 24.238; §27.53	Occupied Bandwidth	Compliant
FCC§ 2.1051; § 22.917; § 24.238; §27.53	Spurious Emissions at Antenna Terminal	Compliant
FCC§ 22.917; § 24.238; §27.53	Out of band emission, Band Edge	Compliant
FCC§ 2.1055 § 22.355; § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliant
FCC§ 2.1053 § 22.917; § 24.238; §27.53	Field Strength of Spurious Radiation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 Applicable Standard For Part 22 Subpart H:

3.1.1 RF Output Power

FCC §22.913

(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.

(d) *Power measurement.* Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-toaverage ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:

- (1) A Commission-approved average power technique (*see* FCC Laboratory's Knowledge Database); or
- (2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rmsequivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, *etc.*, so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

3.1.2 Spurious Emissions

FCC §22.917

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:

- (1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz

3.1.3 Frequency stability

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile \leq3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	2.5	2.5
928 to 929	5	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10	n/a	n/a

3.2 Applicable Standard For Part 24 Subpart E:

3.2.1 RF Output Power

FCC §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.2.2 Spurious Emissions

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

3.2.3 Frequency stability

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.3 Applicable Standard For Part 27:

3.3.1 RF Output Power

FCC §27.50

(a)(3) *Mobile and portable stations.*

(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.

(iii) *Automatic transmit power control.* Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.

(iv) *Prohibition on external vehicle-mounted antennas.* The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

3.3.2 Spurious Emissions

FCC §27.53

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to - 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and - 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits

(1) **General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.3.3 Frequency stability

FCC §27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.4 Test Method:

3.4.1 RF Output Power

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:


ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup Block:

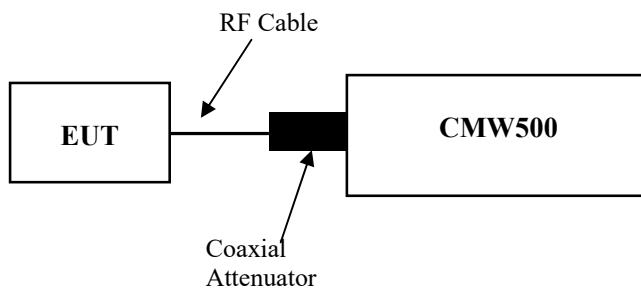

Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of CMW500.

3.4.2 Occupied Bandwidth


According to CFR Part 2.1049, ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3. NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.
- d) Set the detection mode to peak, and the trace mode to max-hold.
- e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

Test Setup Block:

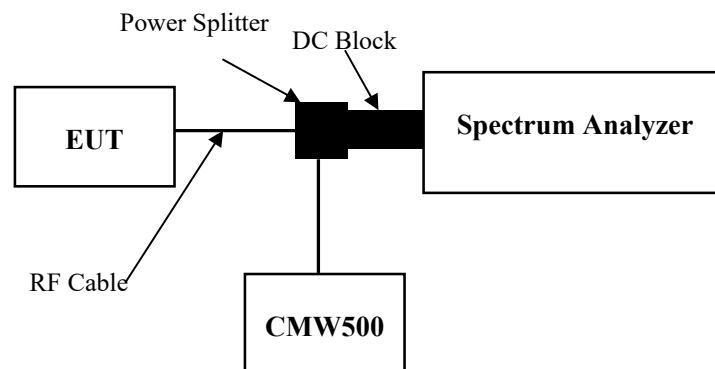


3.4.3 Spurious emissions at antenna terminals

According to ANSI C63.26-2015 Section 5.7.4:

the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz),⁸ effectively depicting the unwanted emission limit in terms of a power spectral density. In those cases where no reference bandwidth is explicitly specified, the values in the preceding sentence should be used.

Test Setup Block:

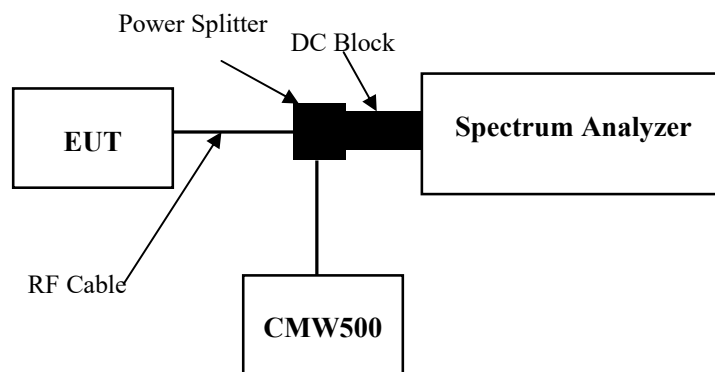


3.4.4 Out of band emission

According to ANSI C63.26-2015 Section 5.7.3:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/band (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

Test Setup Block:

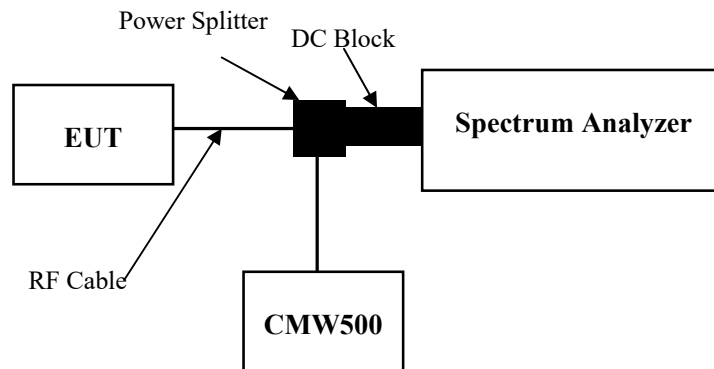

3.4.5 Frequency stability

According to ANSI C63.26-2015 Section 5.6:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.


The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between –30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and ±15% supply voltage variations. If a product is specified to operate over a range of input voltage then the –15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

Test Setup Block:

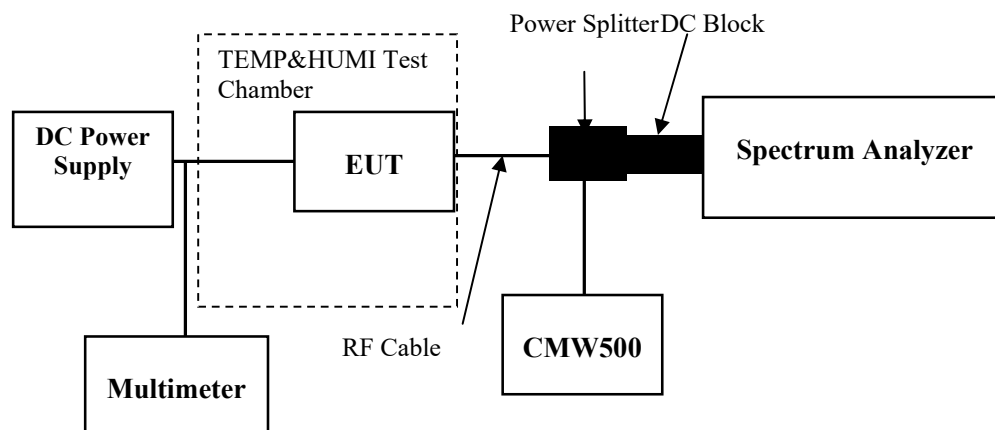

3.4.6 Field strength of spurious radiation

According to ANSI C63.26-2015 Section 5.5.3:

Test setup:

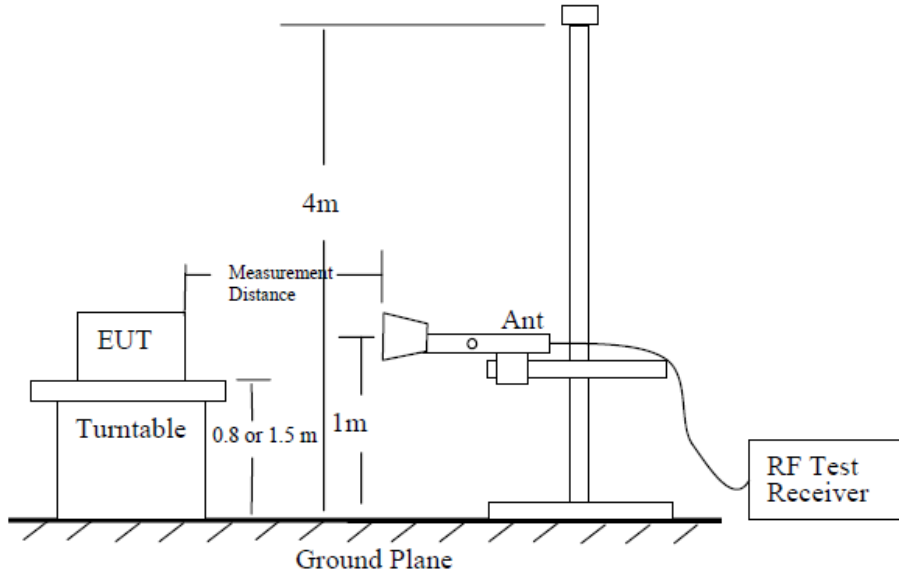


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

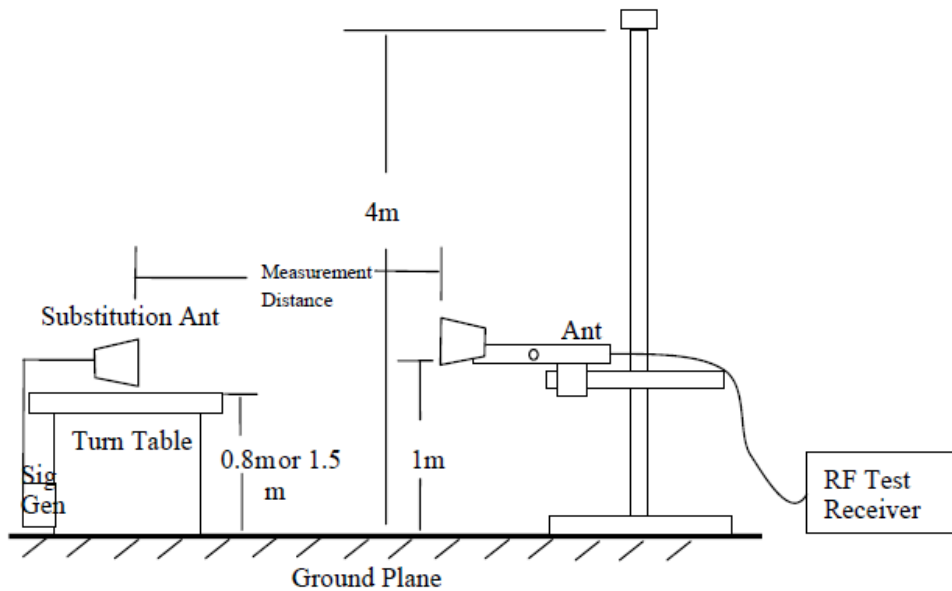


Figure 7—Substitution method set-up for radiated emission

Test Procedure:

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where
 - P_e = equivalent emission power in dBm
 - P_s = source (signal generator) power in dBmNOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

4. Test DATA AND RESULTS

4.1 Antenna Port Test Data and Results for GSM 850 band:

Serial Number:	25FP-1	Test Date:	2023/05/12~2023/05/18
Test Site:	RF	Test Mode:	Transmitting
Tester:	One Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3~27.2	Relative Humidity: (%)	42~61	ATM Pressure: (kPa)	100.5~101.9
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	824.2	836.6	848.8
GPRS	824.2	836.6	848.8
EDGE	824.2	836.6	848.8

Test Data:**FCC§2.1046;§ 22.913 (a):RF Output Power**

Test Mode	Conducted Peak Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	32.3	32.41	32.39	29.8	38.45
GPRS 1 Slot	31.11	31.15	31.16	28.55	38.45
GPRS 2 Slots	29.19	29.06	29.22	26.61	38.45
GPRS 3 Slots	27.17	27.06	27.13	24.56	38.45
GPRS 4 Slots	25.15	25.02	25.21	22.6	38.45
EDGE 1 Slot	27.23	27.16	27.11	24.62	38.45
EDGE 2 Slots	25.22	25.15	25.16	22.61	38.45
EDGE 3 Slots	23.12	23.23	23.07	20.62	38.45
EDGE 4 Slots	21.21	21.15	21	18.6	38.45

Note:
 ERP= Conducted Power(dBm) - Lc(dB) + G_T(dBd)
 G_T(dBd)=G_T(dBi)-2.15

Result:	Pass
----------------	-------------

FCC §2.1049, §22.917, §22.905:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.246	0.245	0.245	0.316	0.318	0.314
EDGE	0.239	0.24	0.242	0.304	0.304	0.311

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, §22.917(a):Out of band emission, Band Edge


Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §22.355: Frequency Stability					
Test Modulation:	GMSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (Vdc)	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	7.05	0.008	2.5
	-20	3.8	-8.69	-0.010	2.5
	-10	3.8	5.7	0.007	2.5
	0	3.8	9.12	0.011	2.5
	10	3.8	-8.55	-0.010	2.5
	20	3.8	7.51	0.009	2.5
	30	3.8	-7.9	-0.009	2.5
	40	3.8	-5.46	-0.007	2.5
	50	3.8	8.4	0.010	2.5
Frequency Stability vs. Voltage	20	3.6	-7.71	-0.009	2.5
	20	4.35	5.87	0.007	2.5
				Result:	Pass

Test Modulation:	8PSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (Vdc)	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	8.14	0.010	2.5
	-20	3.8	-9.88	-0.012	2.5
	-10	3.8	-7.99	-0.010	2.5
	0	3.8	7.26	0.009	2.5
	10	3.8	5.71	0.007	2.5
	20	3.8	9.11	0.011	2.5
	30	3.8	-6.47	-0.008	2.5
	40	3.8	-7.37	-0.009	2.5
	50	3.8	9.03	0.011	2.5
Frequency Stability vs. Voltage	20	3.6	-9.44	-0.011	2.5
	20	4.35	-8.88	-0.011	2.5
				Result:	Pass

Test Plots(Note: The 4.5 dB is the Insertion loss of the RF cable, Coaxial tee connector and DC Block, which was offset into the Spectrum Analyzer):

Occupied Bandwidth


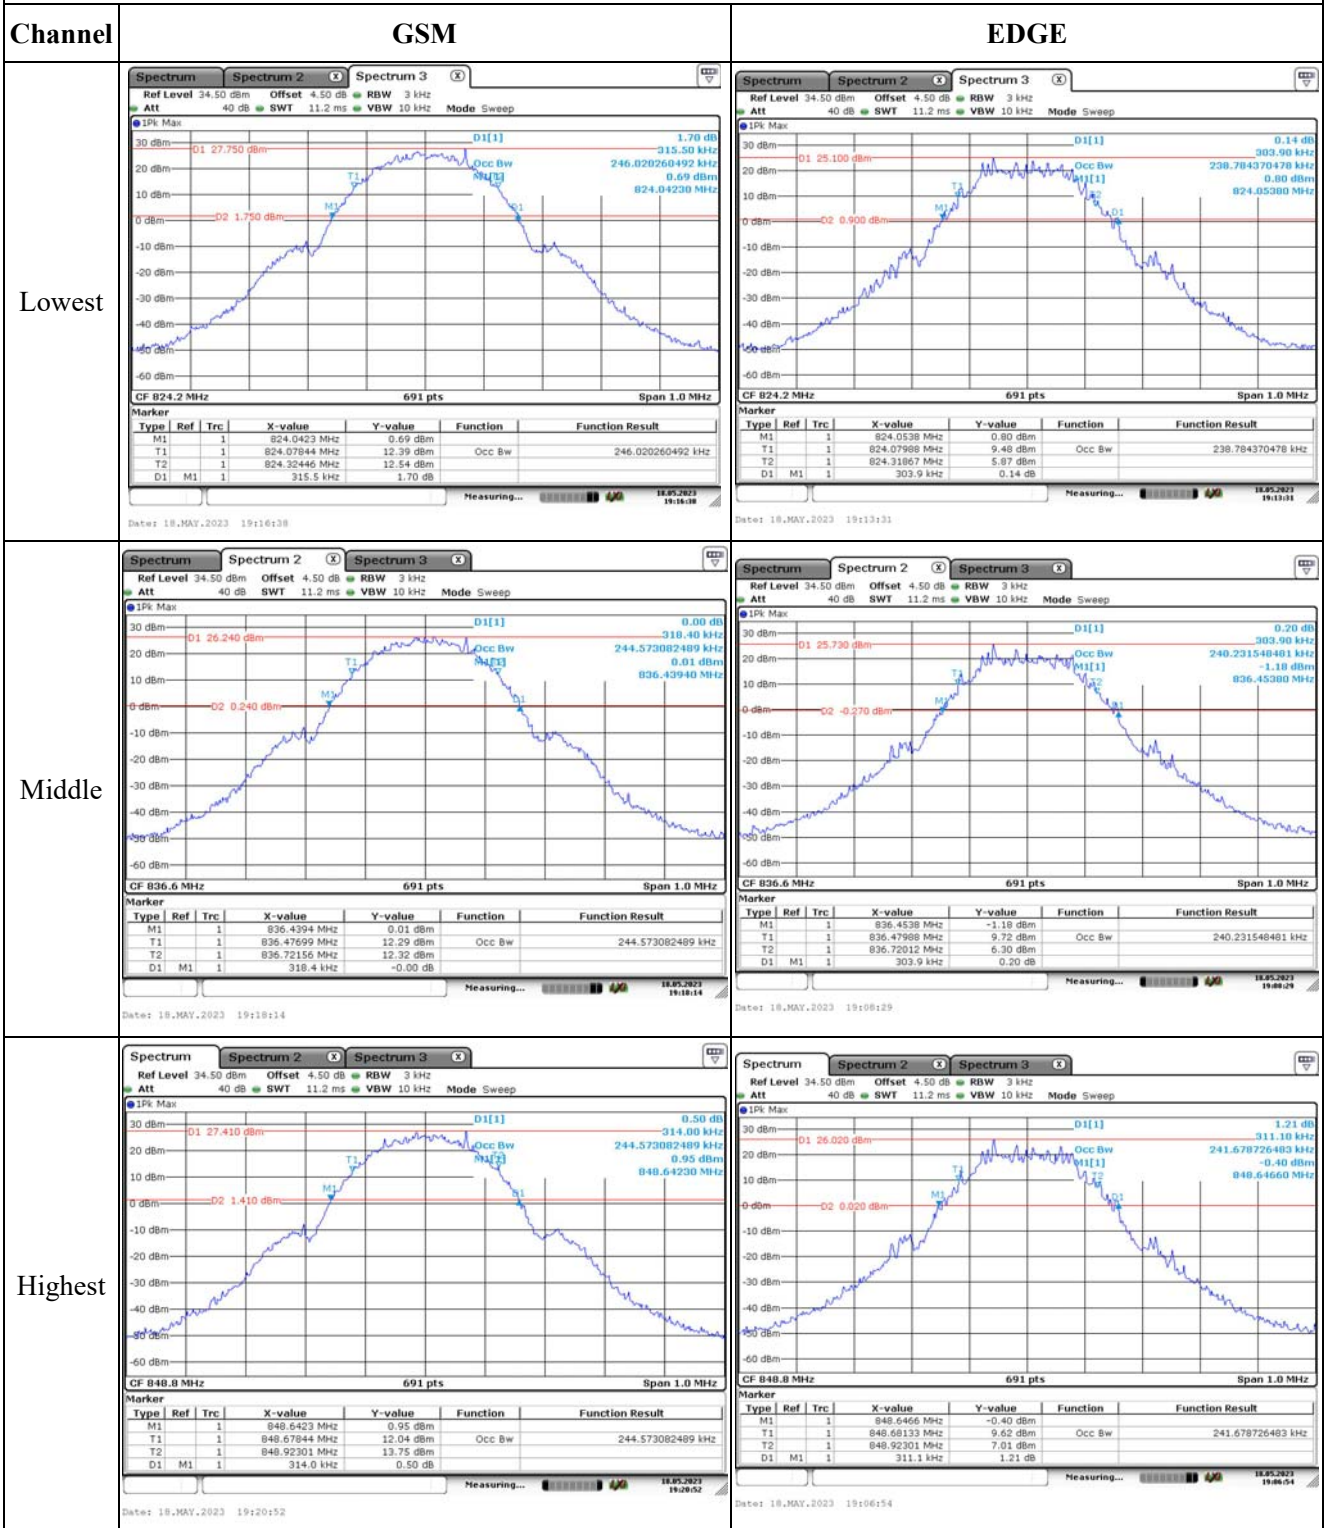


Spurious Emissions at Antenna Terminal



Channel

GSM



Lowest

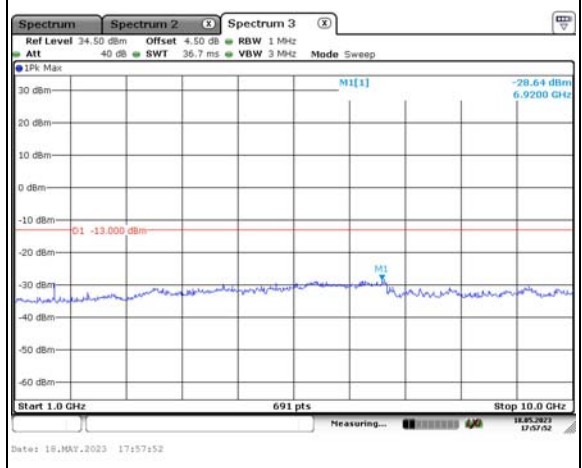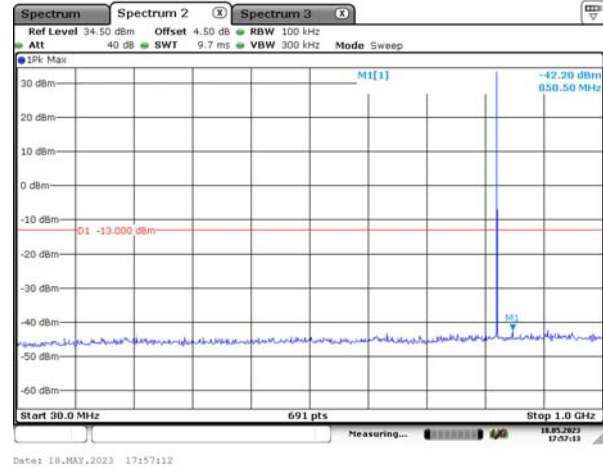


Middle

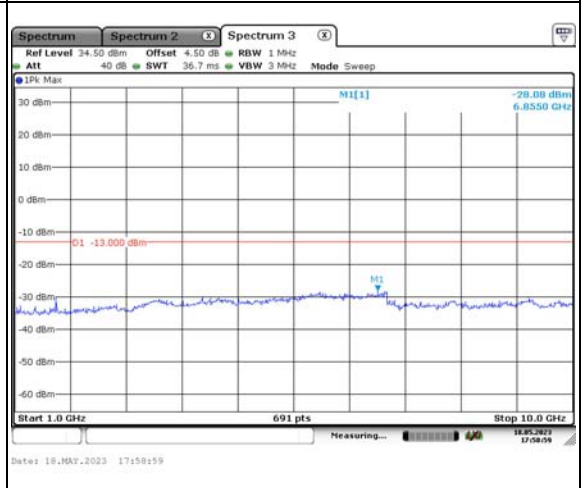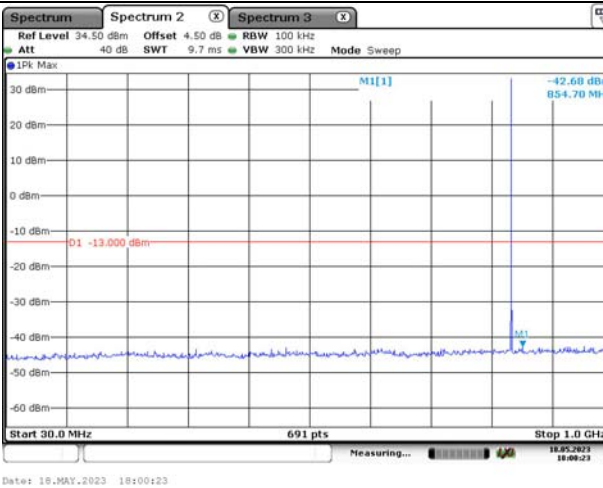

Highest

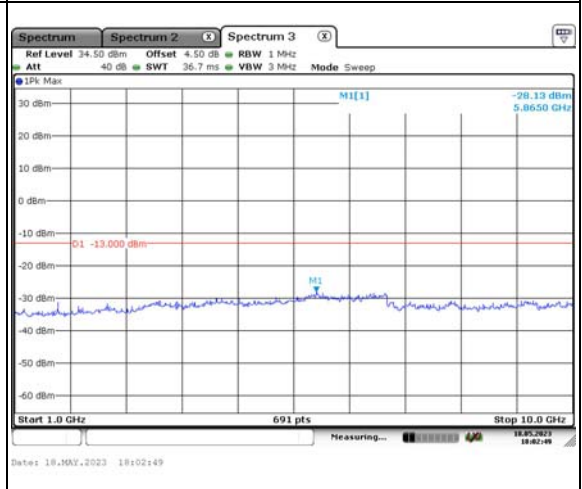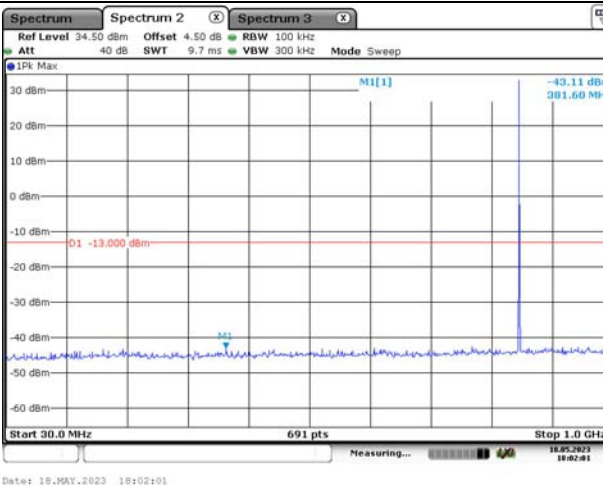

Out of band emission, Band Edge

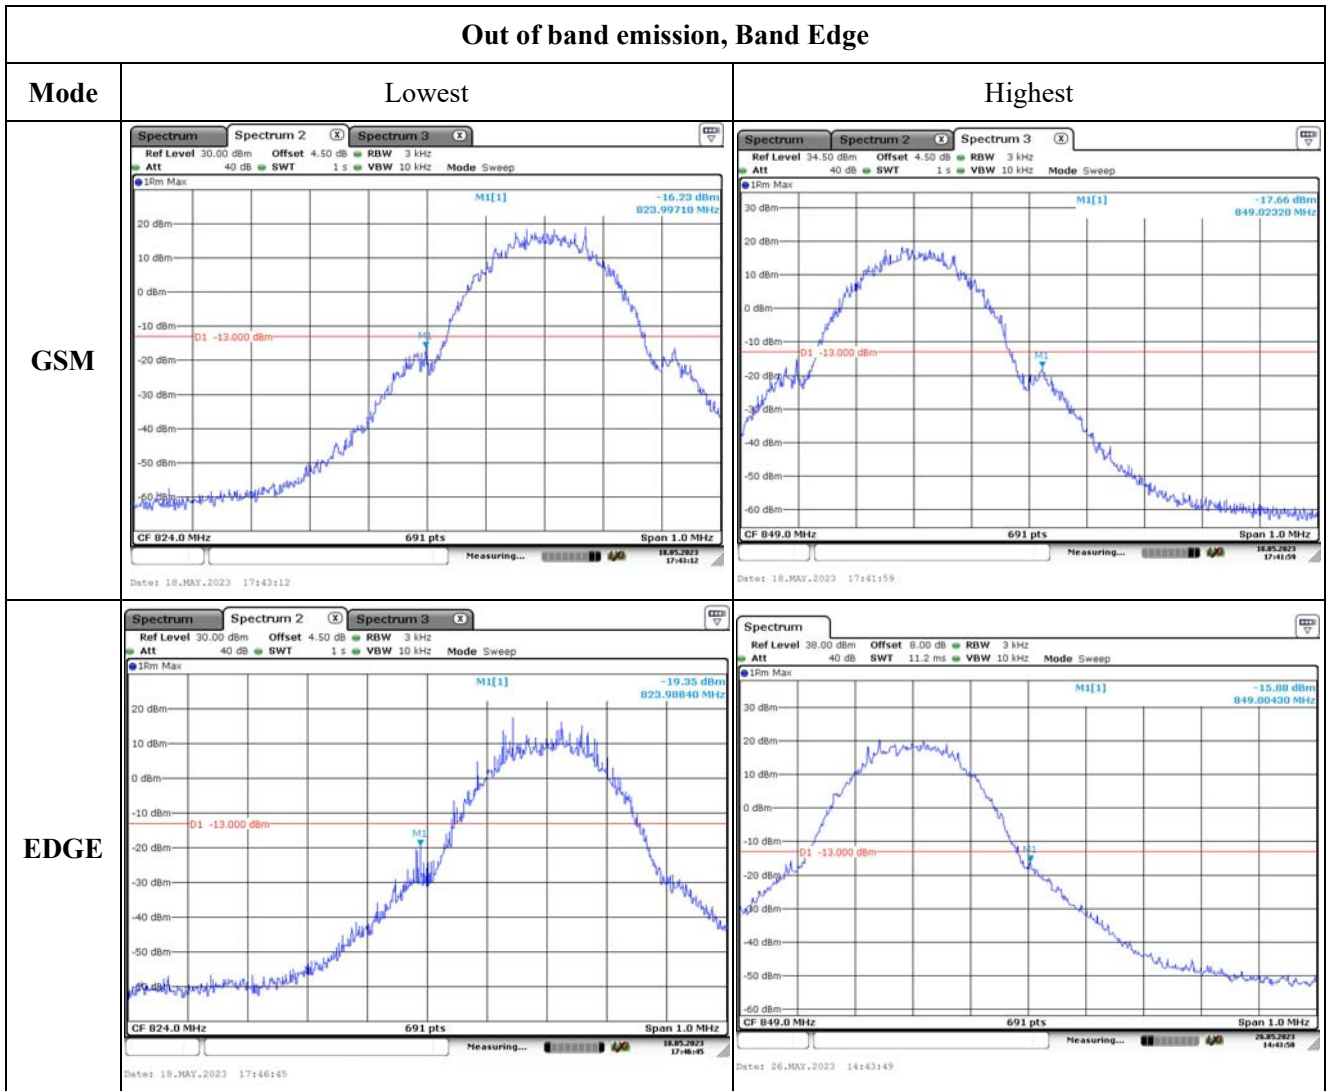

4.2 Antenna Port Test Data and Results for GSM 1900 band:

Serial Number:	25FP-1	Test Date:	2023/05/12~2023/06/02
Test Site:	RF	Test Mode:	Transmitting
Tester:	One Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3~27.2	Relative Humidity: (%)	42~61	ATM Pressure: (kPa)	100.5~101.9
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022-07/15	2023/07/14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/03/31	2024/03/30
UNI-T	Multimeter	UT39A+	C210582554	2022/09/29	2023/09/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	1850.2	1880	1909.8
GPRS	1850.2	1880	1909.8
EDGE	1850.2	1880	1909.8

Test Data:**FCC §2.1046; § 24.232 (c): RF Output Power**

Test Mode	Conducted Peak Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	30.58	30.64	30.88	31.1	33
GPRS 1 Slot	29.79	29.59	29.54	30.01	33
GPRS 2 Slots	27.84	27.51	27.57	28.06	33
GPRS 3 Slots	25.84	25.41	25.65	26.06	33
GPRS 4 Slots	23.88	23.41	23.65	24.1	33
EDGE 1 Slot	26.59	26.56	26.75	26.97	33
EDGE 2 Slots	24.55	24.51	24.77	24.99	33
EDGE 3 Slots	22.58	22.47	22.69	22.91	33
EDGE 4 Slots	20.49	20.57	20.67	20.89	33

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

Result: Pass**FCC §2.1049, §24.238: Occupied Bandwidth**

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.246	0.246	0.246	0.31	0.314	0.307
EDGE	0.236	0.236	0.234	0.311	0.31	0.303

Note: The test plots please refer to the Plots of Occupied Bandwidth


FCC §2.1051, § 24.238 (a): Spurious Emissions at Antenna Terminal**Result: Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.****FCC §2.1051, § 24.238 (a): Out of band emission, Band Edge****Result: Pass, Please refer to the test plots of Out of band emission, Band Edge.**

FCC §2.1055, §24.235: Frequency Stability						
Test Mode:	GMSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.061	1850.000	1909.970	1910.000
	-20	3.8	1850.062	1850.000	1909.937	1910.000
	-10	3.8	1850.062	1850.000	1909.966	1910.000
	0	3.8	1850.060	1850.000	1909.973	1910.000
	10	3.8	1850.060	1850.000	1909.903	1910.000
	20	3.8	1850.069	1850.000	1909.920	1910.000
	30	3.8	1850.065	1850.000	1909.974	1910.000
	40	3.8	1850.065	1850.000	1909.958	1910.000
	50	3.8	1850.061	1850.000	1909.962	1910.000
Frequency Stability vs. Voltage	20	3.6	1850.060	1850.000	1909.953	1910.000
	20	4.35	1850.060	1850.000	1909.906	1910.000
					Result:	Pass


Test Mode:	8PSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.086	1850.000	1909.915	1910.000
	-20	3.8	1850.082	1850.000	1909.918	1910.000
	-10	3.8	1850.092	1850.000	1909.887	1910.000
	0	3.8	1850.079	1850.000	1909.909	1910.000
	10	3.8	1850.091	1850.000	1909.914	1910.000
	20	3.8	1850.081	1850.000	1909.898	1910.000
	30	3.8	1850.081	1850.000	1909.903	1910.000
	40	3.8	1850.081	1850.000	1909.889	1910.000
	50	3.8	1850.095	1850.000	1909.920	1910.000
Frequency Stability vs. Voltage	20	3.6	1850.080	1850.000	1909.912	1910.000
	20	4.35	1850.082	1850.000	1909.904	1910.000
					Result:	Pass

Test Plots(Note: The 4.5dB is the Insertion loss of the RF cable, Coaxial tee connector and DC Block, which was offset into the Spectrum Analyzer):


Occupied Bandwidth

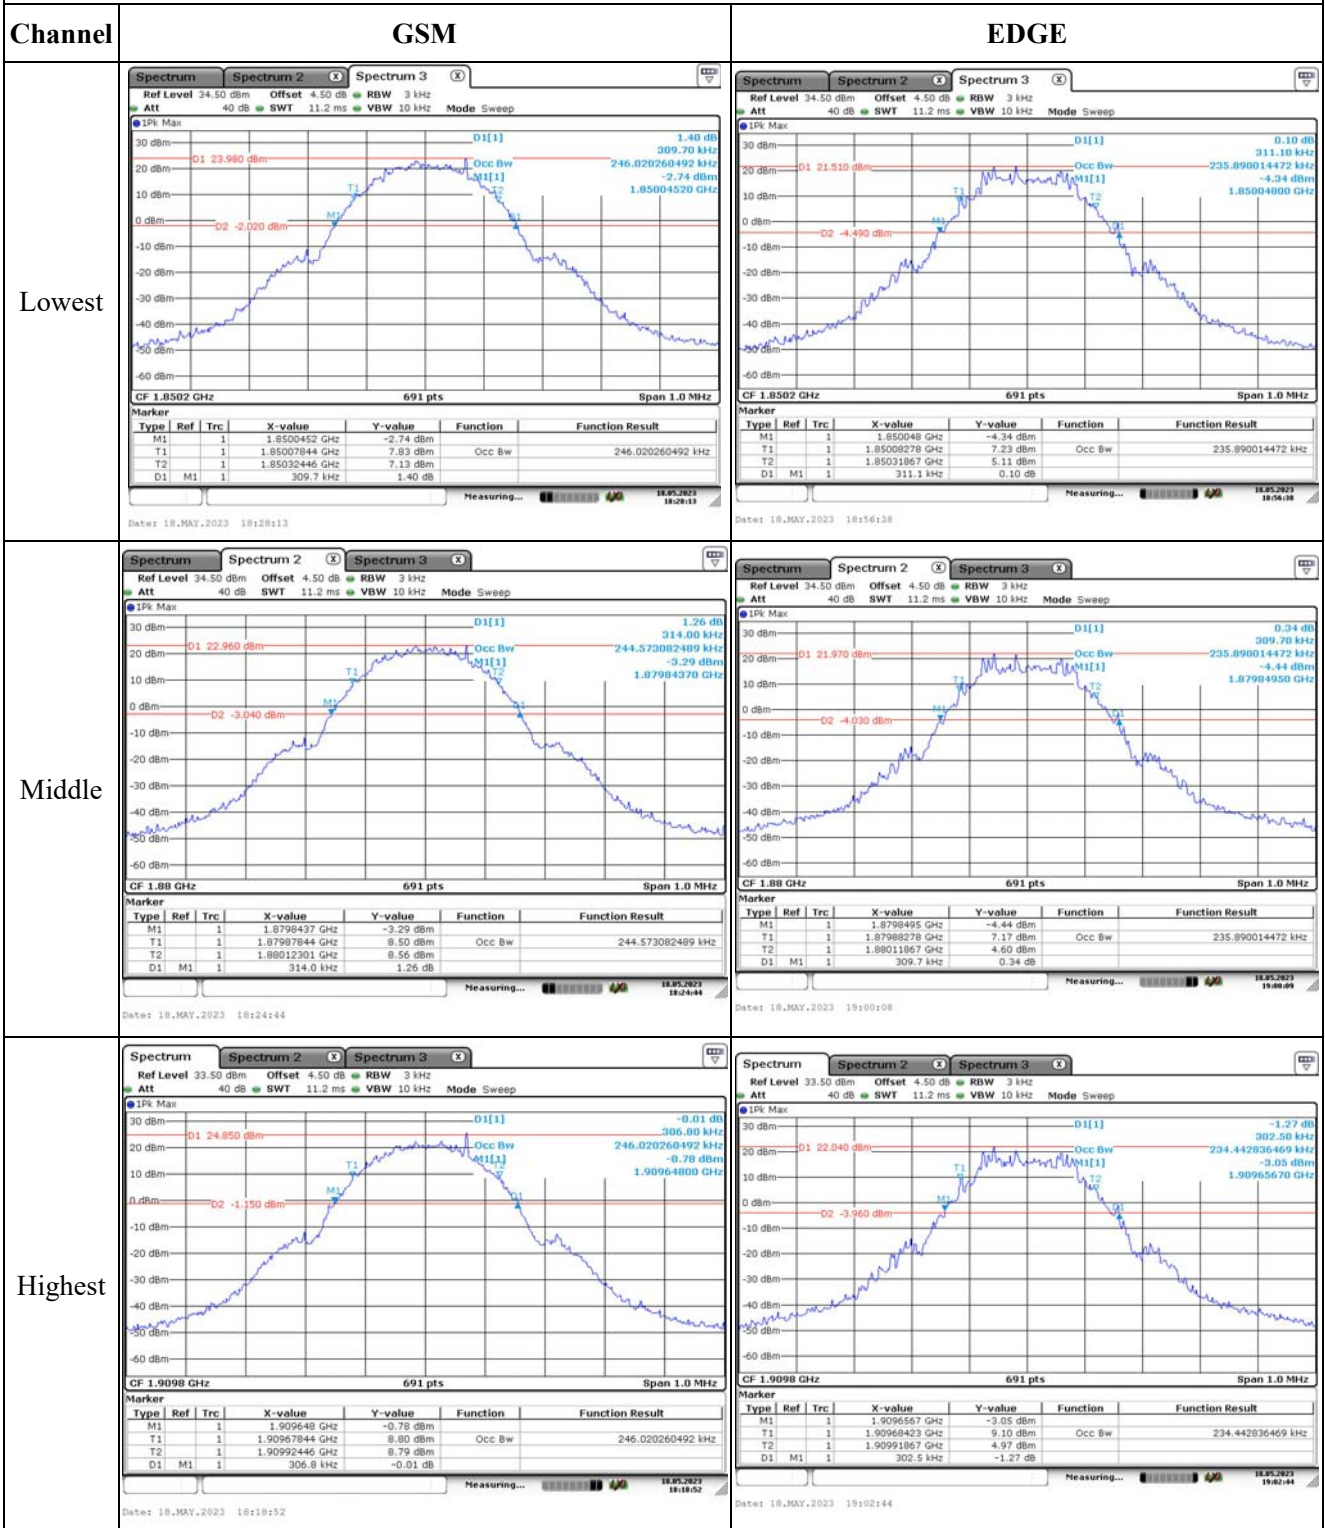

Spurious Emissions at Antenna Terminal

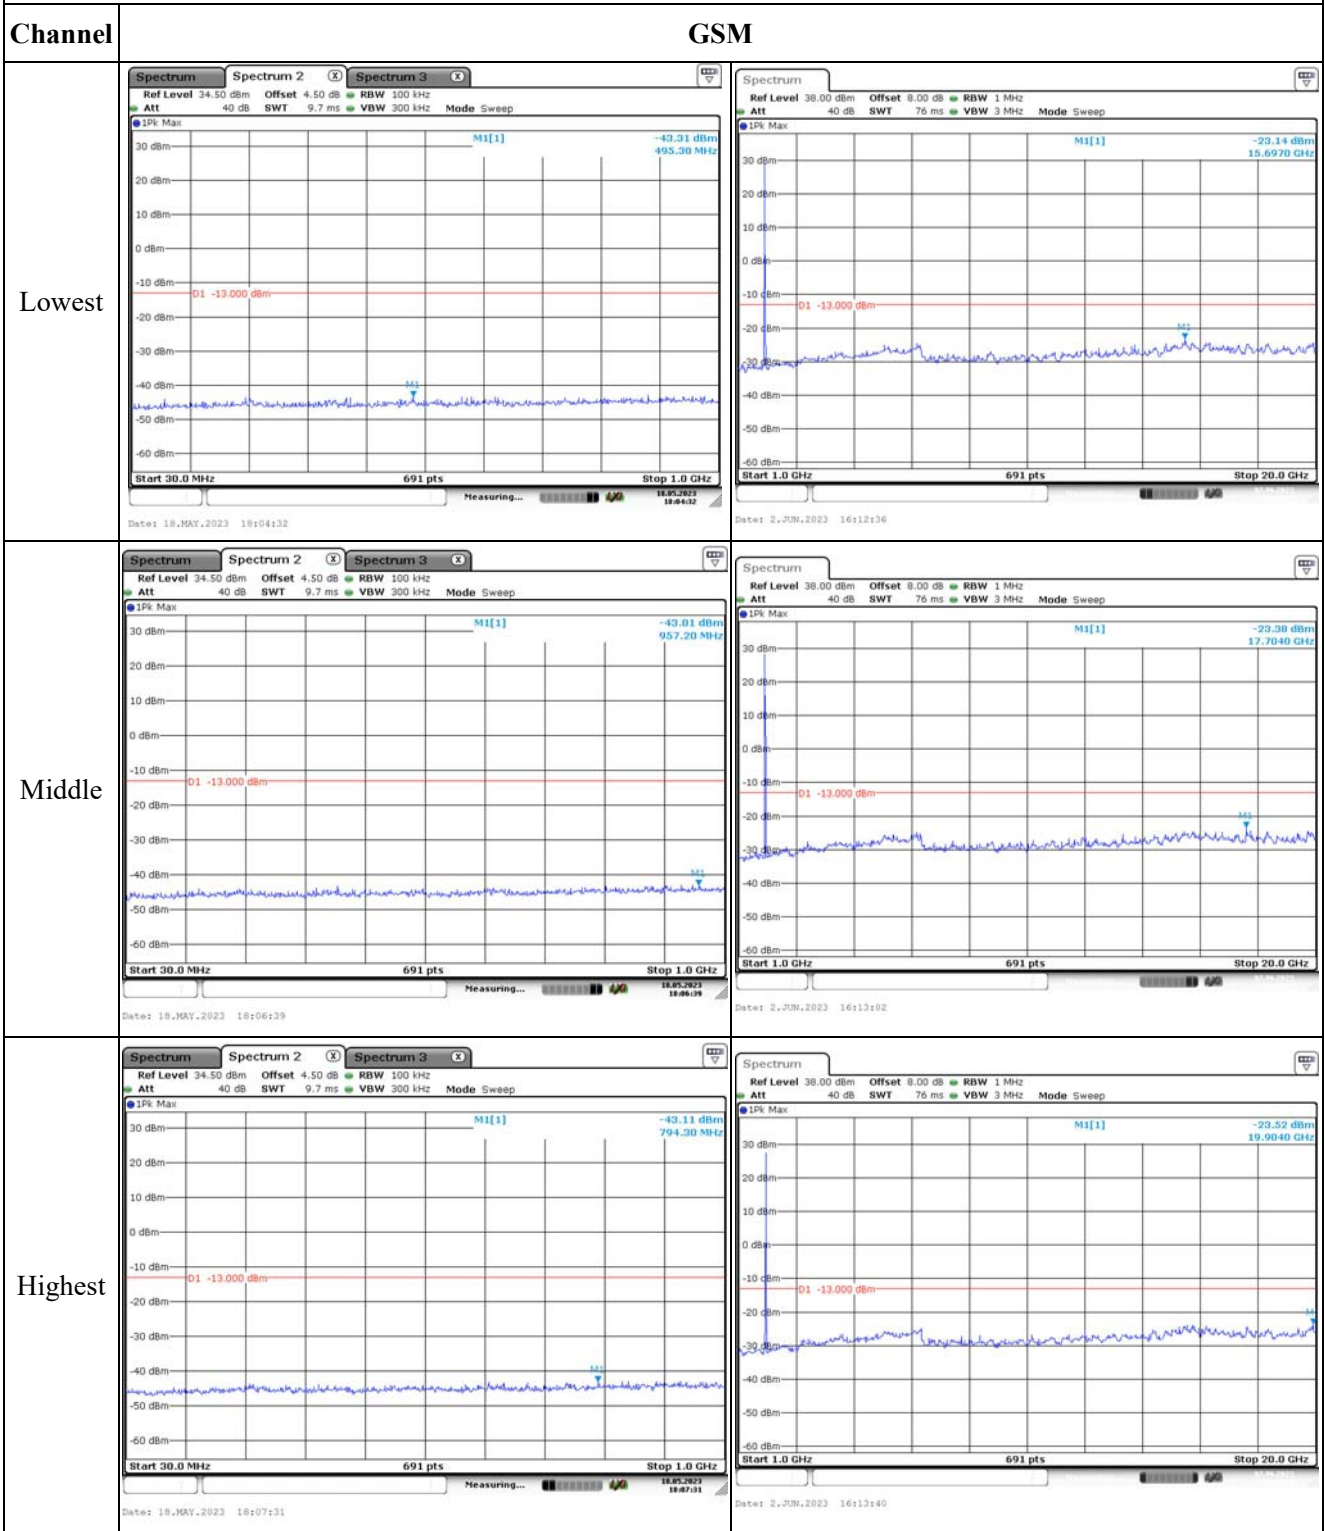

Out of band emission, Band Edge

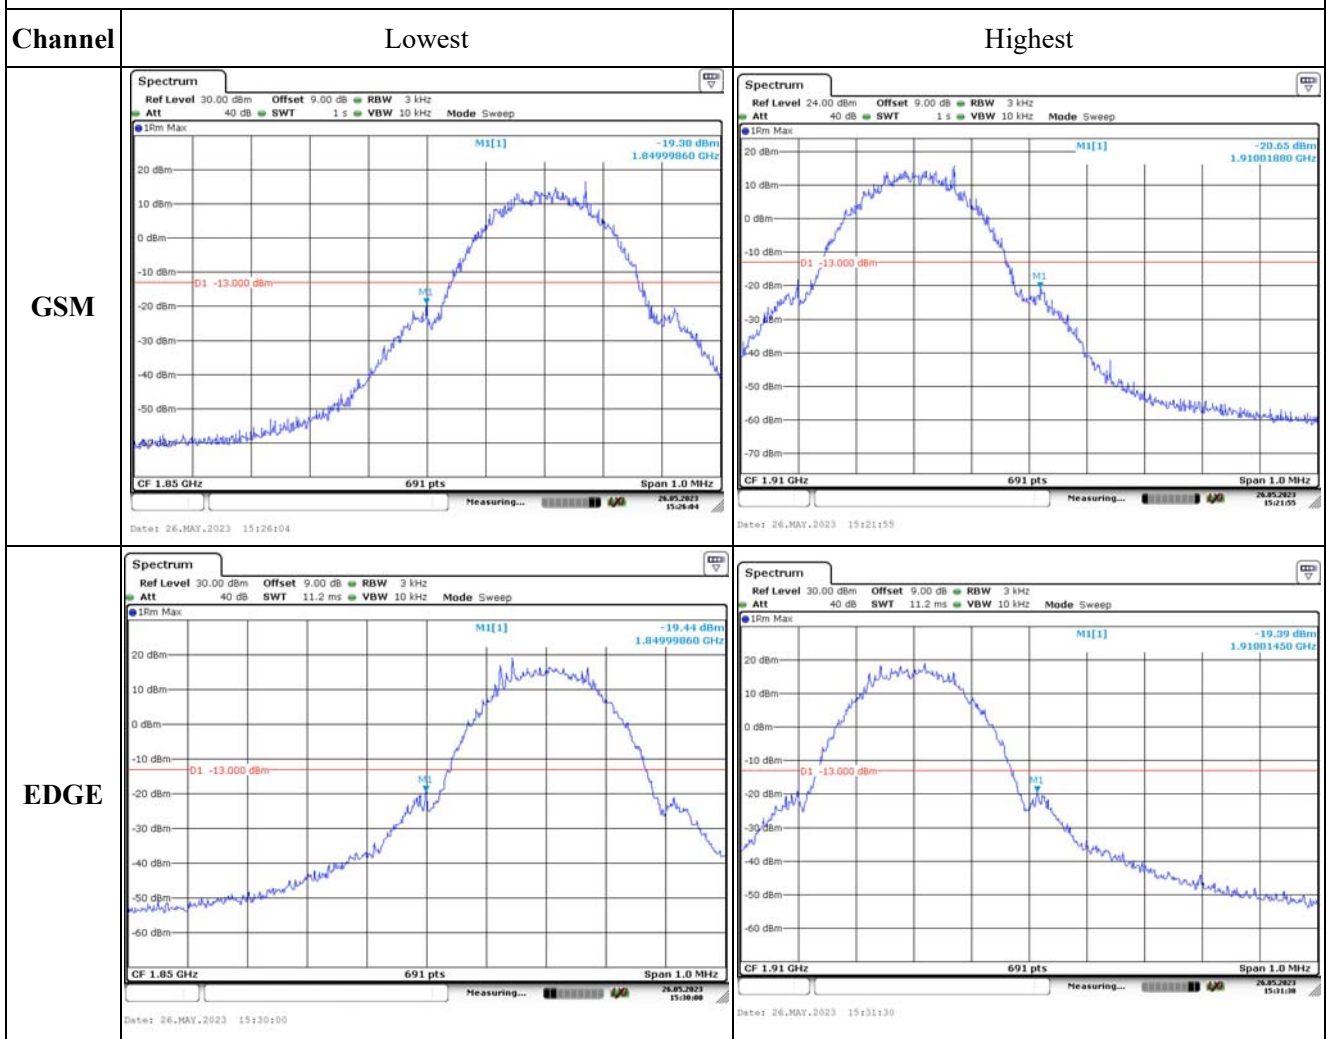

4.3 Antenna Port Test Data and Results for WCDMA Band 2:

Serial Number:	25FP-1	Test Date:	2023/05/12~2023/05/18
Test Site:	RF	Test Mode:	Transmitting
Tester:	One Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3~27.2	Relative Humidity: (%)	42~61	ATM Pressure: (kPa)	100.5~101.9
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/07/15	2023/07/14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/03/31	2024/03/30
UNI-T	Multimeter	UT39A+	C210582554	2022/09/29	2023/09/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	1852.4	1880	1907.6

Test Data:**FCC§2.1046;§ 24.232****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	22.35	22.82	22.5	23.04	33
HSDPA Subtest 1	22.17	22.63	22.19	22.85	33
HSDPA Subtest 2	22.14	22.68	22.53	22.9	33
HSDPA Subtest 3	22.12	22.45	22.16	22.67	33
HSDPA Subtest 4	22.1	22.31	22.51	22.73	33
HSUPA Subtest 1	22.08	22.43	22.58	22.8	33
HSUPA Subtest 2	21.89	22.4	22.11	22.62	33
HSUPA Subtest 3	21.8	21.93	22.22	22.44	33
HSUPA Subtest 4	21.65	21.83	22.17	22.39	33
HSUPA Subtest 5	21.62	21.87	21.63	22.09	33
DC-HSDPA Subtest 1	21.5	22.02	21.93	22.24	33
DC-HSDPA Subtest 2	21.39	21.48	21.75	21.97	33
DC-HSDPA Subtest 3	21.38	21.83	21.46	22.05	33
DC-HSDPA Subtest 4	21.34	21.3	21.93	22.15	33
HSPA+ Subtest 1	21.25	21.51	21.62	21.84	33

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

Result:	Pass
----------------	-------------

Peak-to-average Ratio(PAR)

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	2.84	2.67	2.49	13
HSDPA	4.7	4.58	4.38	13
HSUPA	4.38	4.96	4.84	13

Result:	Pass
----------------	-------------

FCC §2.1049, §24.238:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.153	4.153	4.153	4.689	4.689	4.703
HSDPA	4.153	4.153	4.153	4.689	4.689	4.674
HSUPA	4.139	4.153	4.168	4.689	4.703	4.689

Note: The test plots please refer to the Plots of Occupied Bandwidth


FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §24.235: Frequency Stability						
Test Mode:	WCDMA R99	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{dc})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.313	1850.000	1909.669	1910.000
	-20	3.8	1850.320	1850.000	1909.667	1910.000
	-10	3.8	1850.312	1850.000	1909.653	1910.000
	0	3.8	1850.318	1850.000	1909.651	1910.000
	10	3.8	1850.316	1850.000	1909.648	1910.000
	20	3.8	1850.302	1850.000	1909.670	1910.000
	30	3.8	1850.315	1850.000	1909.651	1910.000
	40	3.8	1850.321	1850.000	1909.659	1910.000
	50	3.8	1850.326	1850.000	1909.679	1910.000
Frequency Stability vs. Voltage	20	3.6	1850.317	1850.000	1909.655	1910.000
	20	4.35	1850.308	1850.000	1909.653	1910.000
					Result:	Pass

Test Plots(Note: The 4.5dB is the Insertion loss of the RF cable, Coaxial tee connector and DC Block, which was offset into the Spectrum Analyzer):

Occupied Bandwidth

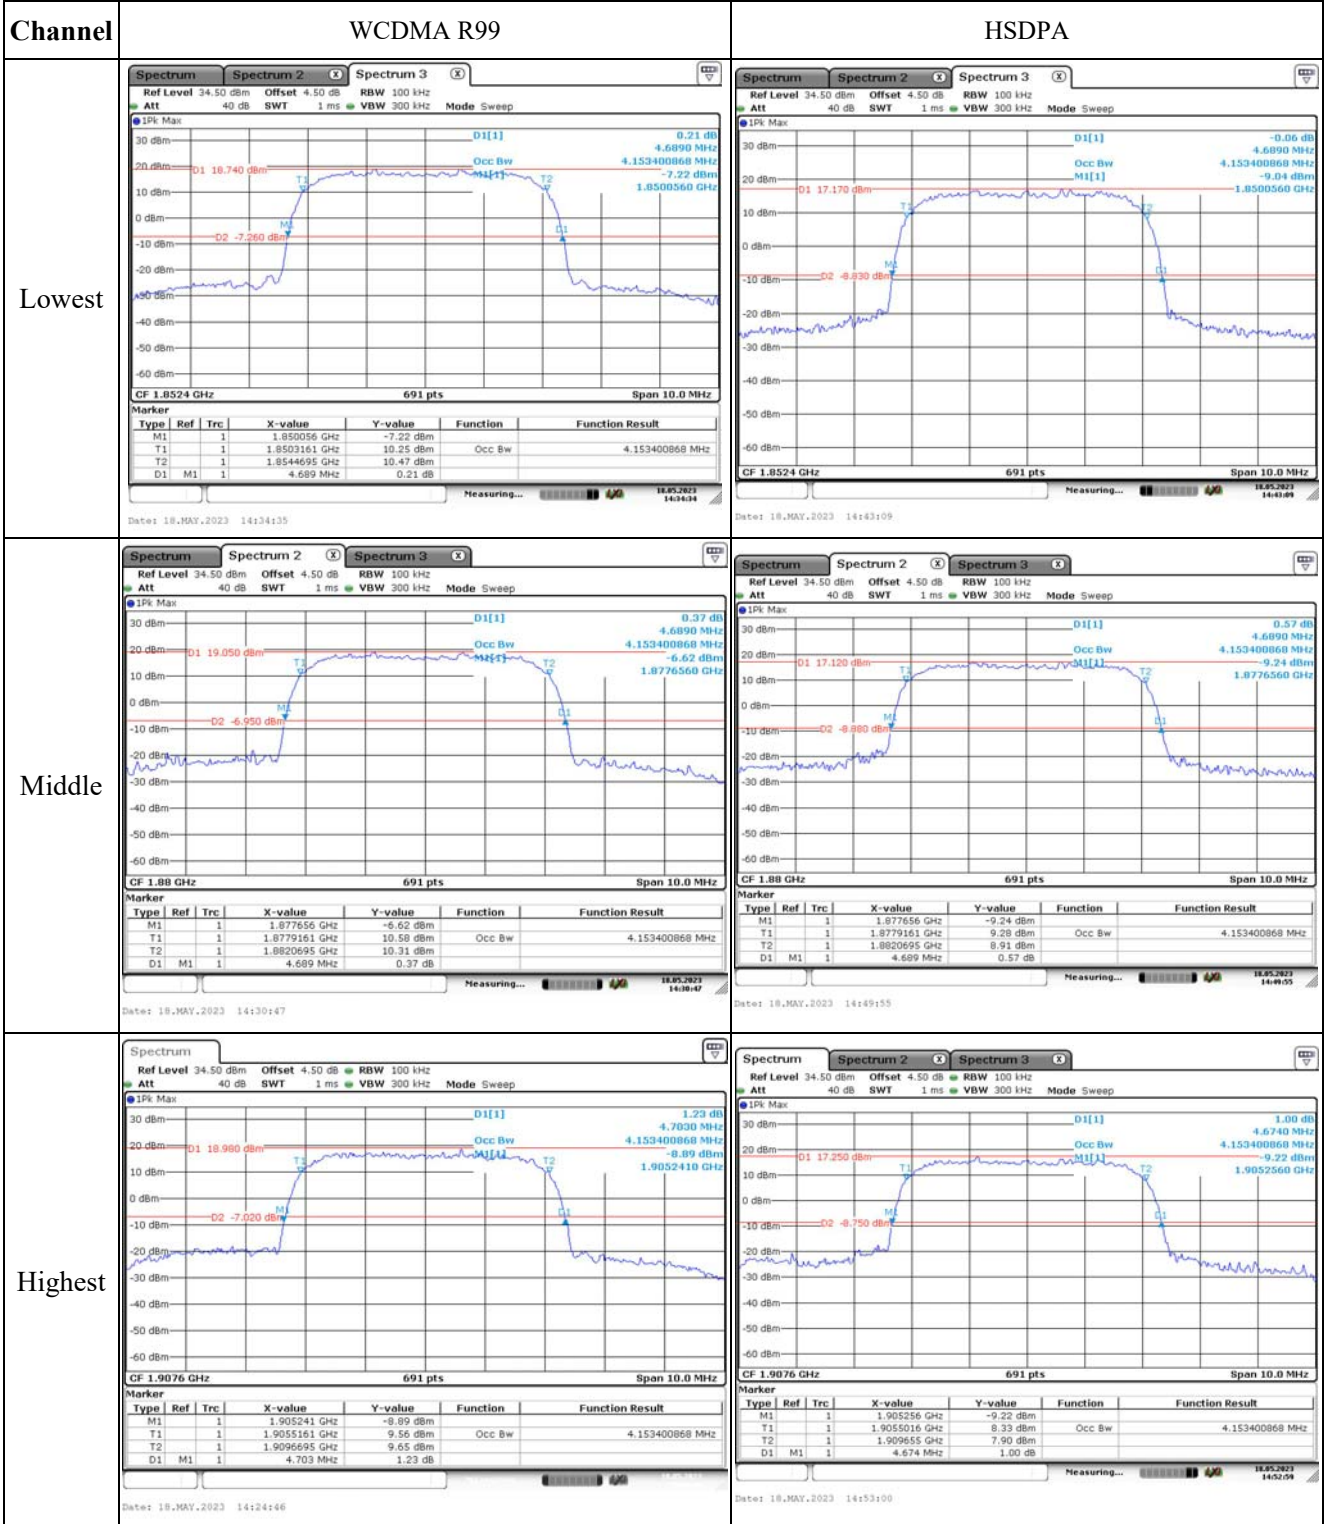


Occupied Bandwidth


Channel

HSUPA


Lowest

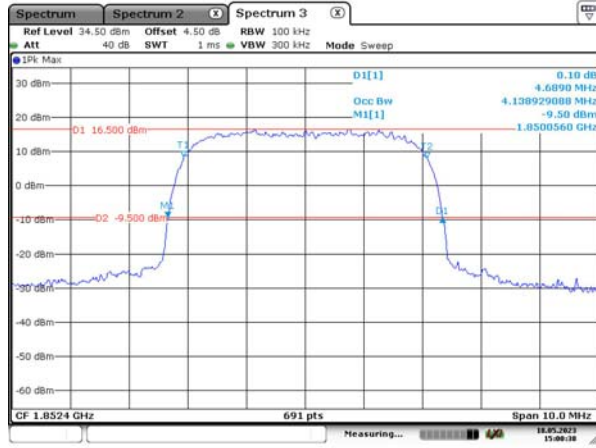

Middle

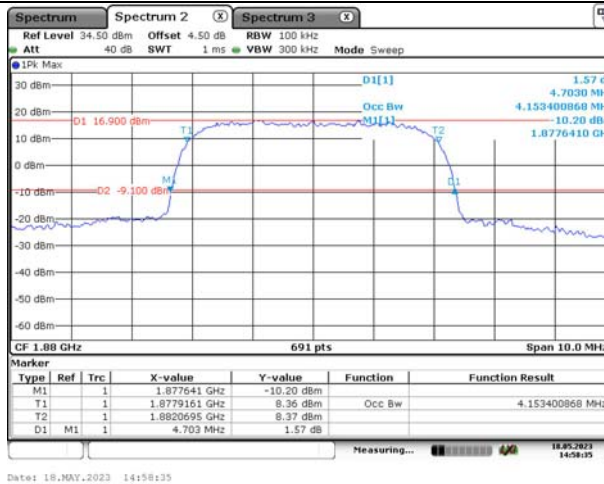

Highest

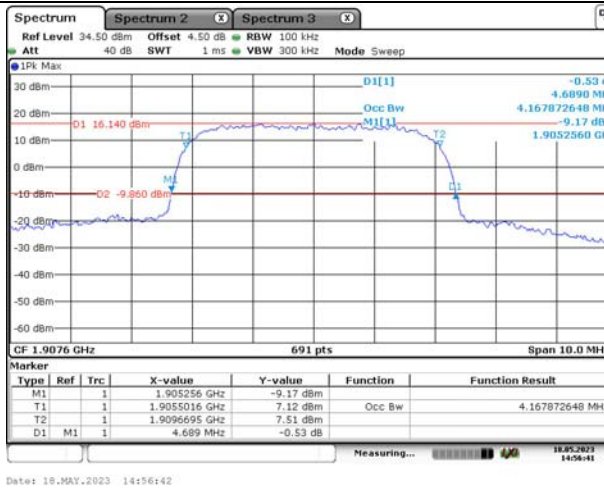

Spurious Emissions at Antenna Terminal

Channel	WCDMA R99	
Lowest	<p>Ref Level 34.50 dBm Offset 4.50 dB RBW 100 kHz Att 40 dB SWT 9.7 ms VBW 300 kHz Mode Sweep 1Pk Max M1[1] -42.69 dBm 937.50 MHz -13.000 dBm Start 30.0 MHz 691 pts Stop 1.0 GHz Date: 18.MAY.2023 15:39:56</p>	<p>Ref Level 34.50 dBm Offset 4.50 dB RBW 3 MHz Mode Sweep Att 40 dB SWT 76 ms VBW 3 MHz 1Pk Max M1[1] -26.51 dBm 15.7520 GHz -13.000 dBm Start 1.0 GHz 691 pts Stop 20.0 GHz Date: 18.MAY.2023 15:39:03</p>
Middle	<p>Ref Level 34.50 dBm Offset 4.50 dB RBW 100 kHz Att 40 dB SWT 9.7 ms VBW 300 kHz Mode Sweep 1Pk Max M1[1] -42.44 dBm 976.80 MHz -13.000 dBm Start 30.0 MHz 691 pts Stop 1.0 GHz Date: 18.MAY.2023 15:40:56</p>	<p>Ref Level 34.50 dBm Offset 4.50 dB RBW 3 MHz Mode Sweep Att 40 dB SWT 76 ms VBW 3 MHz 1Pk Max M1[1] -25.71 dBm 17.7520 GHz -13.000 dBm Start 1.0 GHz 691 pts Stop 20.0 GHz Date: 18.MAY.2023 15:41:43</p>
Highest	<p>Ref Level 34.50 dBm Offset 4.50 dB RBW 100 kHz Att 40 dB SWT 9.7 ms VBW 300 kHz Mode Sweep 1Pk Max M1[1] -42.65 dBm 993.70 MHz -13.000 dBm Start 30.0 MHz 691 pts Stop 1.0 GHz Date: 18.MAY.2023 15:45:24</p>	<p>Ref Level 34.50 dBm Offset 4.50 dB RBW 3 MHz Mode Sweep Att 40 dB SWT 76 ms VBW 3 MHz 1Pk Max M1[1] -26.06 dBm 15.7520 GHz -13.000 dBm Start 1.0 GHz 691 pts Stop 20.0 GHz Date: 18.MAY.2023 15:44:36</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
R99		
HSUPA		
HSDPA		

4.5 Antenna Port Test Data and Results for WCDMA Band 5:

Serial Number:	25FP-1	Test Date:	2023/05/12~2023/05/18
Test Site:	RF	Test Mode:	Transmitting
Tester:	One Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3~27.2	Relative Humidity: (%)	42~61	ATM Pressure: (kPa)	100.5~101.9
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/07/15	2023/07/14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/03/31	2024/03/30
UNI-T	Multimeter	UT39A+	C210582554	2022/09/29	2023/09/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	826.4	836.6	846.6

Test Data:**FCC§2.1046;§ 22.913 (a)****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	22.58	22.95	23.05	20.44	38.45
HSDPA Subtest 1	22.52	22.81	22.98	20.37	38.45
HSDPA Subtest 2	22.47	22.89	22.72	20.28	38.45
HSDPA Subtest 3	22.36	22.73	22.58	20.12	38.45
HSDPA Subtest 4	22.35	22.63	22.65	20.04	38.45
HSUPA Subtest 1	22.25	22.77	22.35	20.16	38.45
HSUPA Subtest 2	22.08	22.31	22.36	19.75	38.45
HSUPA Subtest 3	21.95	22.17	22.2	19.59	38.45
HSUPA Subtest 4	21.89	22.14	21.9	19.53	38.45
HSUPA Subtest 5	21.78	21.92	22.26	19.65	38.45
DC-HSDPA Subtest 1	21.67	22.03	21.69	19.42	38.45
DC-HSDPA Subtest 2	21.55	21.59	21.73	19.12	38.45
DC-HSDPA Subtest 3	21.43	21.8	22	19.39	38.45
DC-HSDPA Subtest 4	21.25	21.31	21.67	19.06	38.45
HSPA+ Subtest 1	21.07	21.17	21.27	18.66	38.45

Note:

ERP= Conducted Power(dBm) - Lc(dB) + G_T(dBd)G_T(dBd)=G_T(dBi)-2.15**Result:****Pass****Peak-to-average Ratio(PAR)**

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	3.36	3.1	3.01	13
HSDPA	4.2	4.46	3.25	13
HSUPA	5.01	5.57	5.39	13

Result:**Pass**

FCC §2.1049, §22.917, §22.905: Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.153	4.168	4.182	4.689	4.689	4.689
HSDPA	4.153	4.168	4.182	4.674	4.674	4.689
HSUPA	4.153	4.139	4.153	4.674	4.674	4.689

Note: The test plots please refer to the Plots of Occupied Bandwidth


FCC §2.1051, §22.917(a): Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, §22.917(a): Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §22.355: Frequency Stability					
Test Modulation:	WCDMA R99		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	8.7	0.010	2.5
	-20	3.8	-7.37	-0.009	2.5
	-10	3.8	6.94	0.008	2.5
	0	3.8	7.29	0.009	2.5
	10	3.8	7.08	0.008	2.5
	20	3.8	-9.71	-0.012	2.5
	30	3.8	-7.47	-0.009	2.5
	40	3.8	-5.65	-0.007	2.5
	50	3.8	-8.68	-0.010	2.5
Frequency Stability vs. Voltage	20	3.6	-6.62	-0.008	2.5
	20	4.35	6.05	0.007	2.5
Result:				Pass	

Test Plots(Note: The 4.5dB is the Insertion loss of the RF cable, Coaxial tee connector and DC Block, which was offset into the Spectrum Analyzer):

Occupied Bandwidth

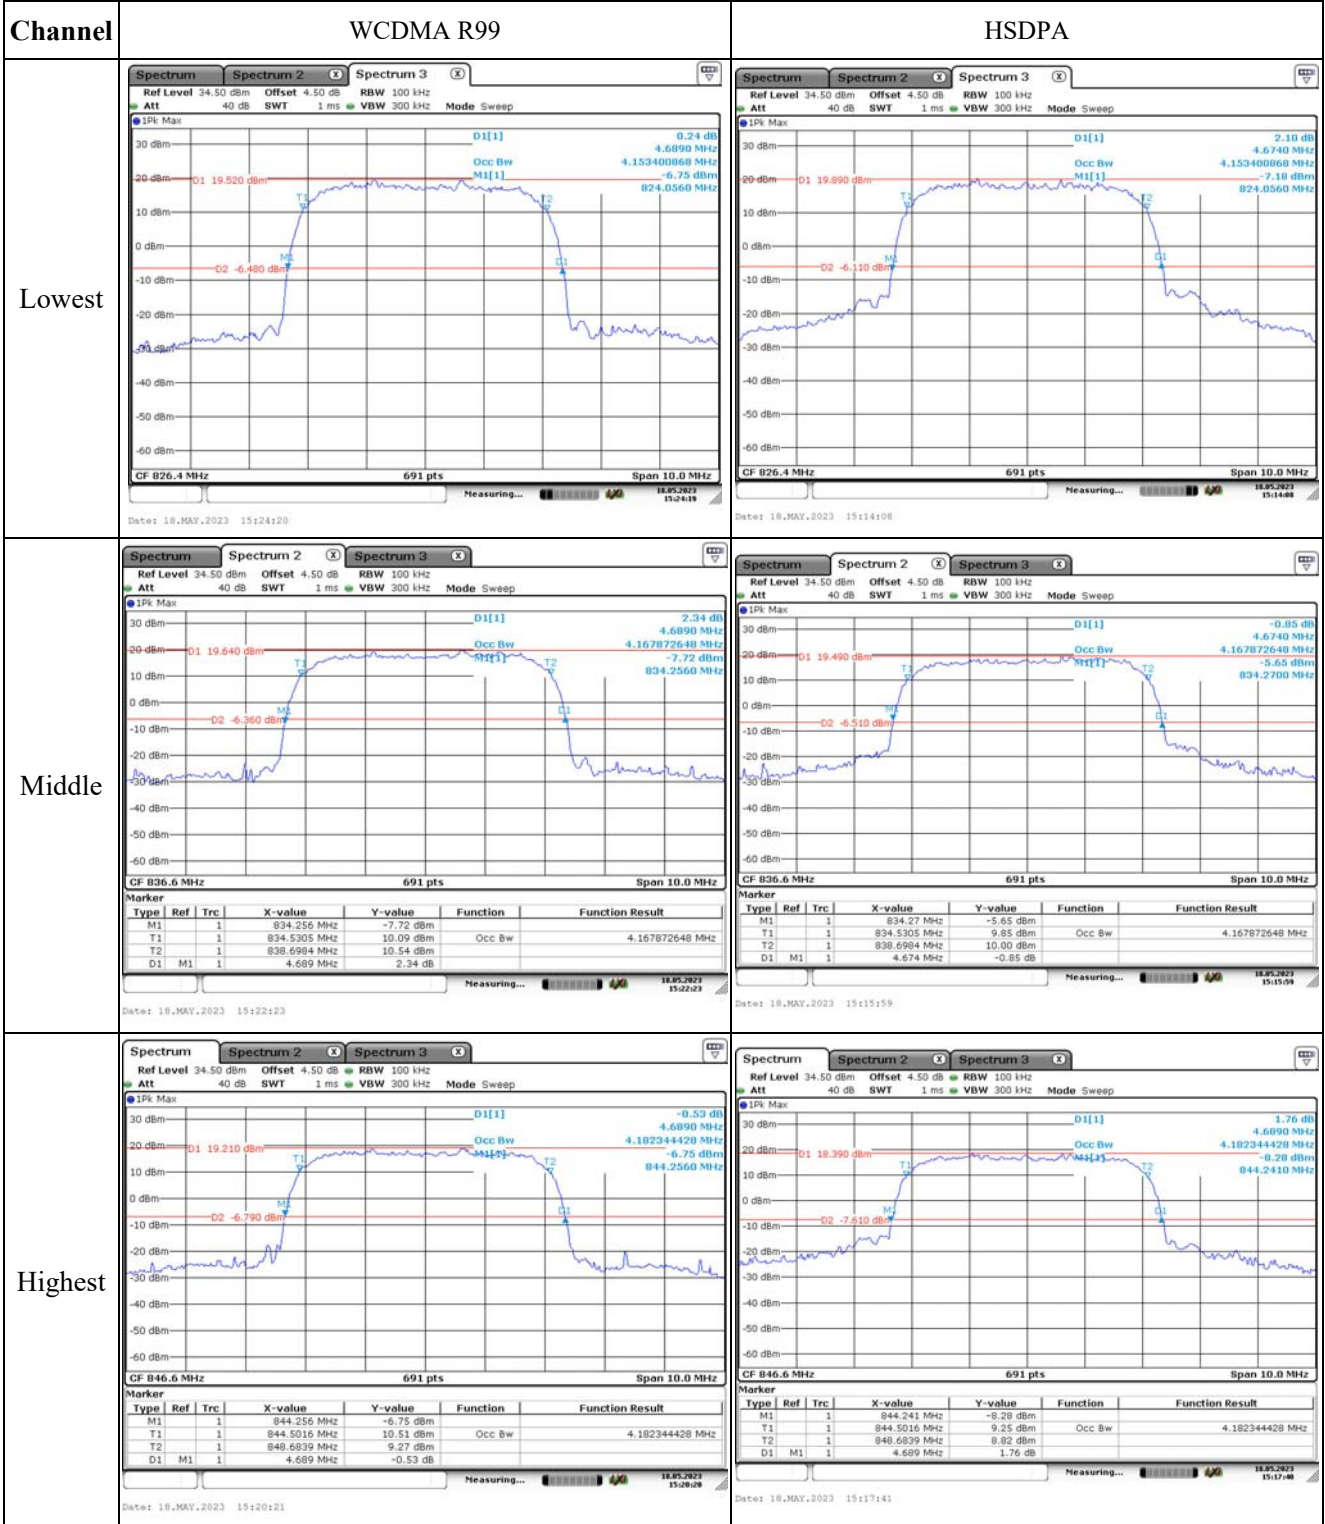


Occupied Bandwidth


Channel

HSUPA


Lowest

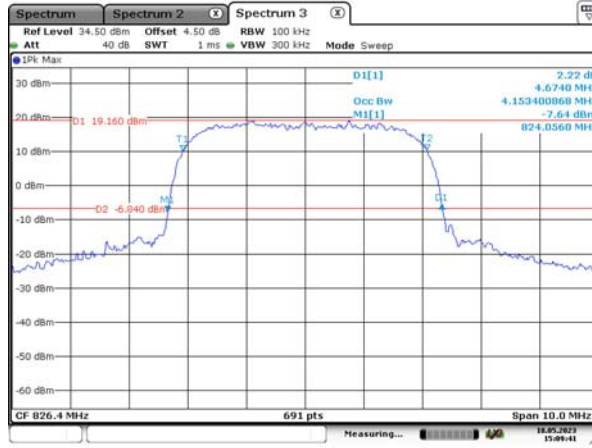

Middle

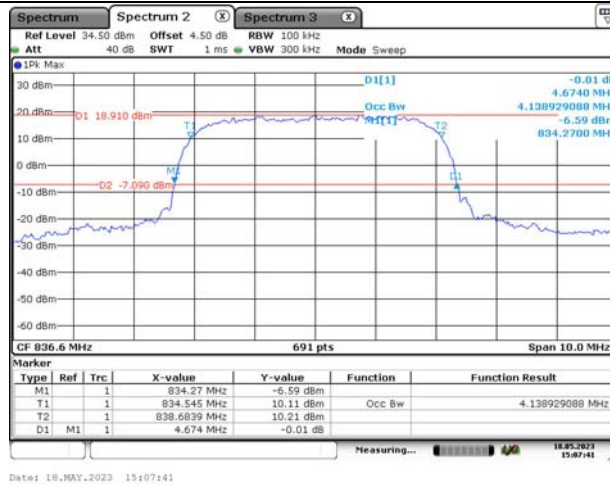

Highest

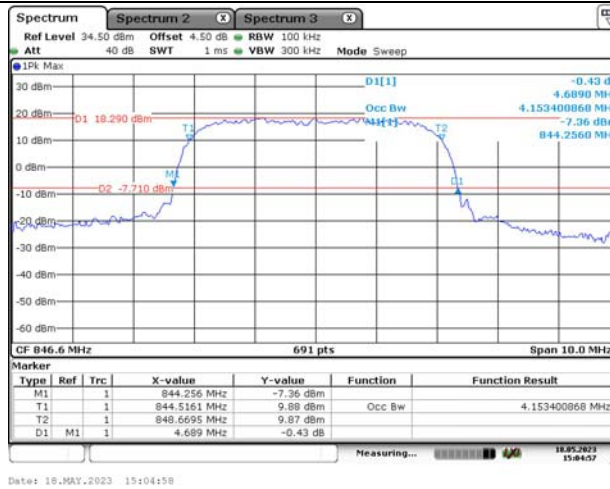

Spurious Emissions at Antenna Terminal

Channel	WCDMA R99	
Lowest	<p>Spectrum plot showing a sharp peak at 974.00 MHz with a level of -42.22 dBm. The plot includes a red limit line at -13.000 dBm. Parameters: Ref Level 34.50 dBm, Offset 4.50 dB, RBW 300 kHz, Att 40 dB, SWT 9.7 ms, VBW 300 kHz. Start 30.0 MHz, Stop 1.0 GHz.</p>	<p>Spectrum plot showing a sharp peak at 6.0940 GHz with a level of -28.47 dBm. The plot includes a red limit line at -13.000 dBm. Parameters: Ref Level 34.50 dBm, Offset 4.50 dB, RBW 3 MHz, Att 40 dB, SWT 36 ms, VBW 3 MHz. Start 1.0 GHz, Stop 10.0 GHz.</p>
Middle	<p>Spectrum plot showing a sharp peak at 850.50 MHz with a level of -33.76 dBm. The plot includes a red limit line at -13.000 dBm. Parameters: Ref Level 34.50 dBm, Offset 4.50 dB, RBW 300 kHz, Att 40 dB, SWT 9.7 ms, VBW 300 kHz. Start 30.0 MHz, Stop 1.0 GHz.</p>	<p>Spectrum plot showing a sharp peak at 6.9070 GHz with a level of -29.20 dBm. The plot includes a red limit line at -13.000 dBm. Parameters: Ref Level 34.50 dBm, Offset 4.50 dB, RBW 3 MHz, Att 40 dB, SWT 36 ms, VBW 3 MHz. Start 1.0 GHz, Stop 10.0 GHz.</p>
Highest	<p>Spectrum plot showing a sharp peak at 826.60 MHz with a level of -36.52 dBm. The plot includes a red limit line at -13.000 dBm. Parameters: Ref Level 34.50 dBm, Offset 4.50 dB, RBW 300 kHz, Att 40 dB, SWT 9.7 ms, VBW 300 kHz. Start 30.0 MHz, Stop 1.0 GHz.</p>	<p>Spectrum plot showing a sharp peak at 5.0130 GHz with a level of -28.51 dBm. The plot includes a red limit line at -13.000 dBm. Parameters: Ref Level 34.50 dBm, Offset 4.50 dB, RBW 3 MHz, Att 40 dB, SWT 36 ms, VBW 3 MHz. Start 1.0 GHz, Stop 10.0 GHz.</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
R99	<p>Ref Level 34.50 dBm Offset 4.50 dB RBW 100 kHz Att 40 dB SWT 1 s VBW 300 kHz Mode Sweep 1Fm Max MI[1] -23.78 dBm 824.0000 MHz 01 -13.000 dBm CF 824.0 MHz 691 pts Span 10.0 MHz Date: 18.MAY.2023 16:10:12</p>	<p>Ref Level 34.50 dBm Offset 4.50 dB RBW 100 kHz Att 40 dB SWT 1 s VBW 300 kHz Mode Sweep 1Fm Max MI[1] -28.92 dBm 849.0000 MHz 01 -13.000 dBm CF 849.0 MHz 691 pts Span 10.0 MHz Date: 18.MAY.2023 16:09:20</p>
HSUPA	<p>Ref Level 34.50 dBm Offset 4.50 dB RBW 100 kHz Att 40 dB SWT 1 s VBW 300 kHz Mode Sweep 1Fm Max MI[1] -23.37 dBm 824.0000 MHz 01 -13.000 dBm CF 824.0 MHz 691 pts Span 10.0 MHz Date: 18.MAY.2023 16:12:01</p>	<p>Ref Level 34.50 dBm Offset 4.50 dB RBW 100 kHz Att 40 dB SWT 1 s VBW 300 kHz Mode Sweep 1Fm Max MI[1] -24.04 dBm 849.0000 MHz 01 -13.000 dBm CF 849.0 MHz 691 pts Span 10.0 MHz Date: 18.MAY.2023 16:12:42</p>
HSDPA	<p>Ref Level 34.50 dBm Offset 4.50 dB RBW 100 kHz Att 40 dB SWT 1 s VBW 300 kHz Mode Sweep 1Fm Max MI[1] -22.34 dBm 824.0000 MHz 01 -13.000 dBm CF 824.0 MHz 691 pts Span 10.0 MHz Date: 18.MAY.2023 16:15:04</p>	<p>Ref Level 34.50 dBm Offset 4.50 dB RBW 100 kHz Att 40 dB SWT 1 s VBW 300 kHz Mode Sweep 1Fm Max MI[1] -24.10 dBm 849.0000 MHz 01 -13.000 dBm CF 849.0 MHz 691 pts Span 10.0 MHz Date: 18.MAY.2023 16:14:10</p>

4.6 Antenna Port Test Data and Results for LTE Band 2

Serial Number:	25FP-1	Test Date:	2023/05/12~2023/05/18
Test Site:	RF	Test Mode:	Transmitting
Tester:	One Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3~27.2	Relative Humidity: (%)	42~61	ATM Pressure: (kPa)	100.5~101.9
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/07/15	2023/07/14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/03/31	2024/03/30
UNI-T	Multimeter	UT39A+	C210582554	2022/09/29	2023/09/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1850.7	1880	1909.3
3MHz	1851.5	1880	1908.5
5MHz	1852.5	1880	1907.5
10MHz	1855	1880	1905
15MHz	1857.5	1880	1902.5
20MHz	1860	1880	1900

Test Data:

FCC§2.1046;§ 24.232						
RF Output Power:						
Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP(dBm)	EIRP Limit(dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	23.09	22.42	22.73	24	33
	RB1#3	22.54	22.41	22.81		
	RB1#5	23.7	22.38	22.75		
	RB3#0	23.01	22.46	22.91		
	RB3#3	23.01	22.52	22.88		
	RB6#0	23.78	21.52	21.89		
1.4MHz 16QAM	RB1#0	20.87	21.29	22.51	22.79	33
	RB1#3	20.97	21.31	22.56		
	RB1#5	21.95	21.35	22.57		
	RB3#0	21.18	21.7	21.72		
	RB3#3	21.19	21.69	21.76		
	RB6#0	20.38	20.62	20.99		
3MHz QPSK	RB1#0	22.24	22.39	22.66	23	33
	RB1#8	22.22	22.46	22.78		
	RB1#14	22.26	22.45	22.72		
	RB6#0	21.28	21.51	21.7		
	RB6#9	21.25	21.45	21.83		
	RB15#0	21.28	21.56	21.86		
3MHz 16QAM	RB1#0	21.93	21.34	22.17	22.45	33
	RB1#8	21.99	21.27	22.22		
	RB1#14	21.91	21.33	22.23		
	RB6#0	20.44	20.62	20.83		
	RB6#9	20.41	20.58	20.89		
	RB15#0	20.38	20.56	21.03		
5MHz QPSK	RB1#0	22.27	22.38	22.65	23	33
	RB1#13	22.32	22.38	22.73		
	RB1#24	22.37	22.49	22.78		
	RB15#0	21.2	21.49	21.8		
	RB15#10	21.26	21.46	21.84		
	RB25#0	21.2	21.48	21.79		
5MHz 16QAM	RB1#0	21.44	21.06	20.97	21.71	33
	RB1#13	21.41	21.12	21.03		
	RB1#24	21.49	21.23	21.12		
	RB15#0	20.29	20.53	20.92		
	RB15#10	20.24	20.54	21.01		
	RB25#0	20.31	20.44	21		
10MHz QPSK	RB1#0	22.31	22.35	22.44	23.04	33
	RB1#25	22.27	22.47	22.61		
	RB1#49	22.41	22.44	22.82		

	RB25#0	21.15	21.39	21.58		
	RB25#25	21.32	21.55	21.79		
	RB50#0	21.31	21.45	21.68		
10MHz 16QAM	RB1#0	21.4	20.89	21.73	22.3	33
	RB1#25	21.41	20.98	21.94		
	RB1#49	21.48	20.99	22.08		
	RB25#0	20.4	20.66	20.76		
	RB25#25	20.45	20.7	20.9		
	RB50#0	20.52	20.56	20.86		
15MHz QPSK	RB1#0	22.29	22.42	22.38	23.07	33
	RB1#38	22.33	22.44	22.53		
	RB1#74	22.41	22.56	22.85		
	RB36#0	21.31	21.35	21.53		
	RB36#39	21.38	21.56	21.72		
	RB75#0	21.27	21.45	21.57		
15MHz 16QAM	RB1#0	21.42	21.79	21.68	22.3	33
	RB1#38	21.48	21.85	21.84		
	RB1#74	21.55	21.89	22.08		
	RB36#0	20.41	20.53	20.72		
	RB36#39	20.55	20.61	21.02		
	RB75#0	20.42	20.55	20.82		
20MHz QPSK	RB1#0	22.34	22.35	22.52	23.22	33
	RB1#50	22.38	22.5	22.61		
	RB1#99	22.54	22.64	23		
	RB50#0	21.26	21.47	21.49		
	RB50#50	21.36	21.57	21.71		
	RB100#0	21.32	21.46	21.6		
20MHz 16QAM	RB1#0	21.31	22.13	21.67	22.55	33
	RB1#50	21.35	22.24	21.73		
	RB1#99	21.49	22.33	22.12		
	RB50#0	20.35	20.56	20.74		
	RB50#50	20.44	20.64	20.88		
	RB100#0	20.28	20.63	20.65		

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

Result:

Pass

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	4.72	4.64	4.64	13
	RB100#0	4.12	4.14	3.97	13
20MHz 16QAM	RB1#0	5.83	5.54	5.39	13
	RB100#0	5.77	5.71	5.65	13
				Result:	Pass

FCC §2.1049, §24.238: Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.102	1.102	1.102	1.26	1.254	1.272
1.4MHz 16QAM	1.102	1.108	1.102	1.254	1.26	1.26
3MHz QPSK	2.695	2.695	2.695	3.012	3.024	3
3MHz 16QAM	2.683	2.683	2.695	3	3.024	3.024
5MHz QPSK	4.511	4.511	4.531	5.02	5	5
5MHz 16QAM	4.551	4.551	4.511	5.02	5.04	5
10MHz QPSK	8.942	8.942	8.942	9.76	9.8	9.8
10MHz 16QAM	8.982	8.942	8.942	9.8	9.88	9.84
15MHz QPSK	13.473	13.533	13.533	14.7	15.12	15.06
15MHz 16QAM	13.533	13.533	13.533	15.12	15.06	15
20MHz QPSK	17.964	18.044	17.964	19.52	19.92	19.52
20MHz 16QAM	17.964	17.964	17.964	19.84	19.76	19.76

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 24.238 (a): Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.


FCC §2.1051, § 24.238 (a): Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §24.235: Frequency Stability						
Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge, Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1851.048	1850.000	1909.027	1910.000
	-20	3.8	1851.046	1850.000	1909.025	1910.000
	-10	3.8	1851.066	1850.000	1909.008	1910.000
	0	3.8	1851.061	1850.000	1909.033	1910.000
	10	3.8	1851.041	1850.000	1909.050	1910.000
	20	3.8	1851.058	1850.000	1909.022	1910.000
	30	3.8	1851.079	1850.000	1909.013	1910.000
	40	3.8	1851.050	1850.000	1909.031	1910.000
Frequency Stability vs. Voltage	20	3.6	1851.050	1850.000	1909.010	1910.000
	20	4.35	1851.065	1850.000	1909.015	1910.000
					Result:	Pass

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{Dc})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1851.052	1850.000	1909.032	1910.000
	-20	3.8	1851.051	1850.000	1909.045	1910.000
	-10	3.8	1851.052	1850.000	1909.033	1910.000
	0	3.8	1851.052	1850.000	1909.015	1910.000
	10	3.8	1851.050	1850.000	1909.035	1910.000
	20	3.8	1851.058	1850.000	1909.022	1910.000
	30	3.8	1851.049	1850.000	1909.031	1910.000
	40	3.8	1851.050	1850.000	1909.014	1910.000
	50	3.8	1851.045	1850.000	1909.036	1910.000
Frequency Stability vs. Voltage	20	3.6	1851.060	1850.000	1909.022	1910.000
	20	4.35	1851.068	1850.000	1909.028	1910.000
					Result:	Pass

Test Plots(Note: The 7dB is the Insertion loss of the RF cable, Power Splitter and DC Block, which was offset into the Spectrum Analyzer):

Occupied Bandwidth

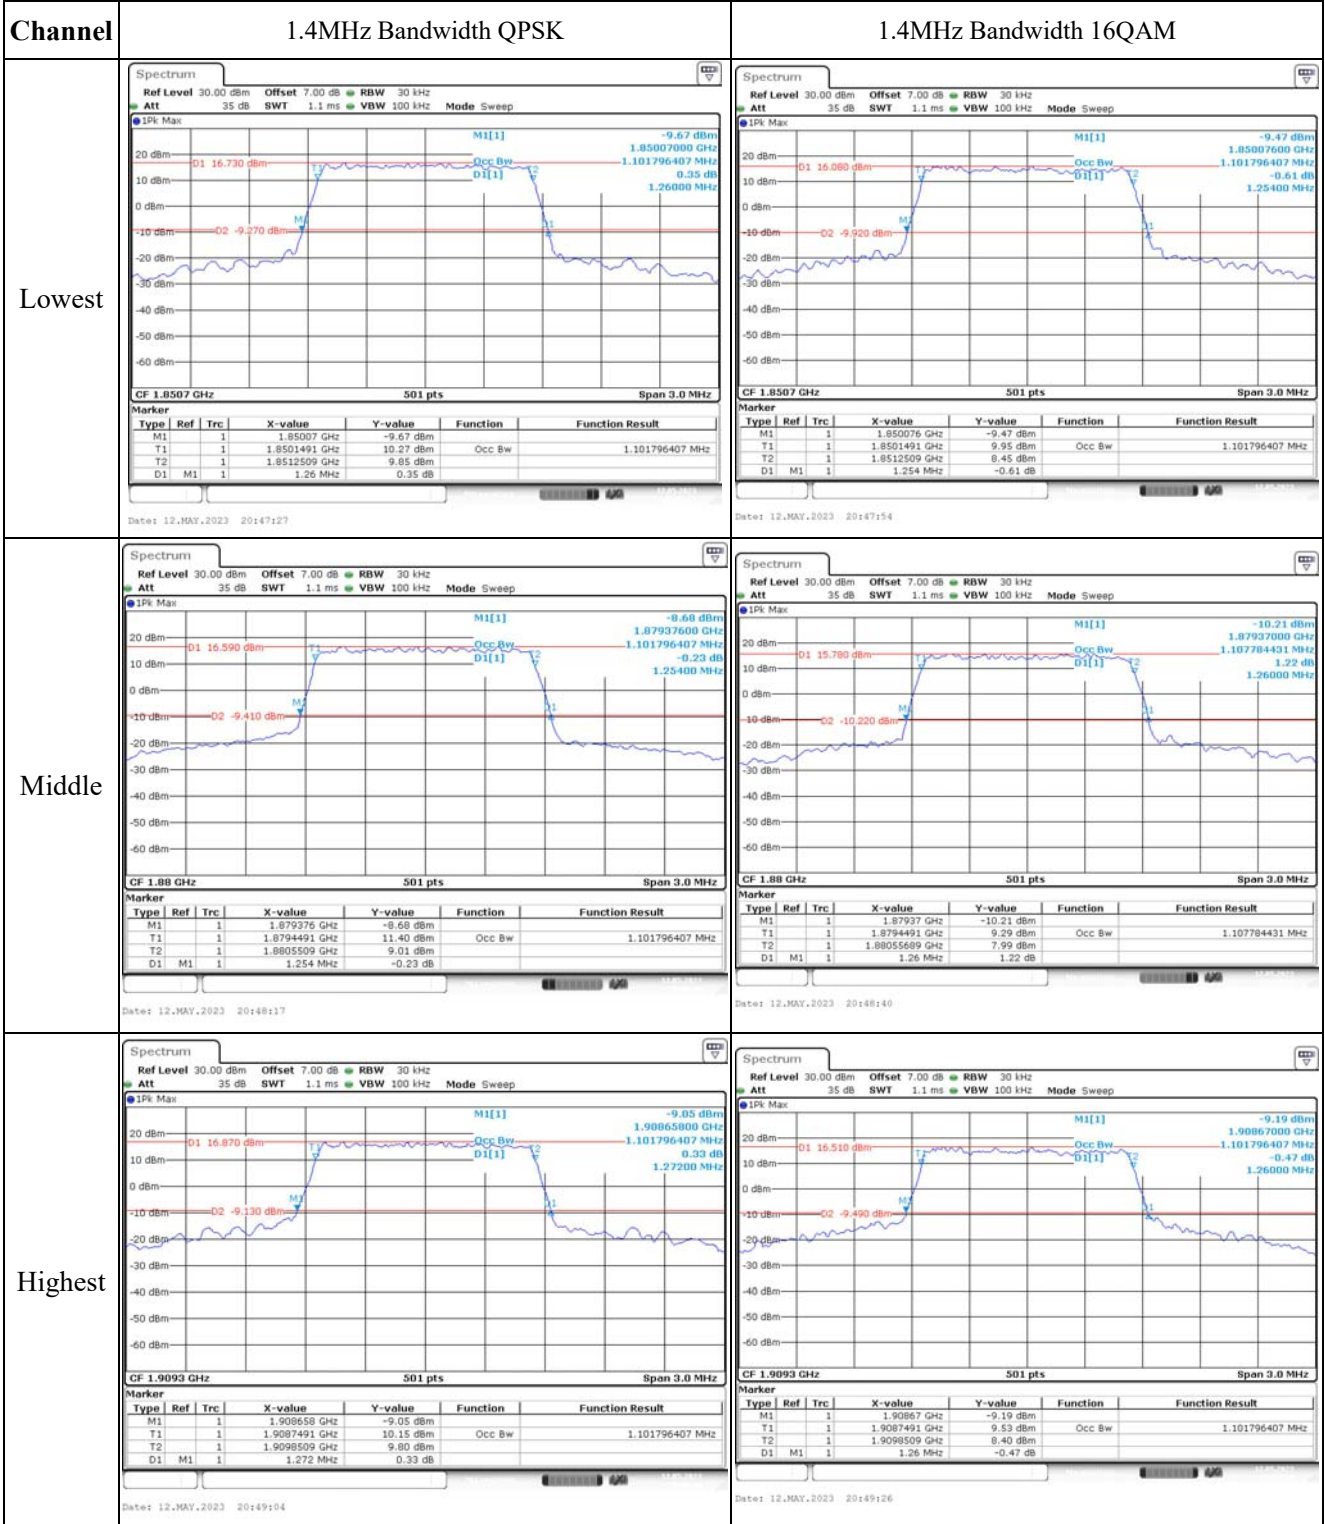



Occupied Bandwidth

Channel



3MHz Bandwidth QPSK

3MHz Bandwidth 16QAM



Lowest

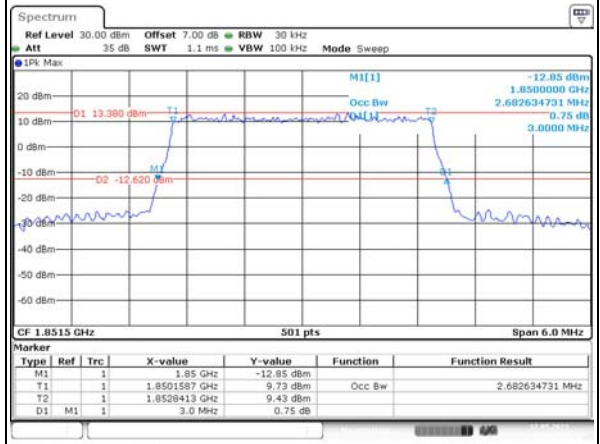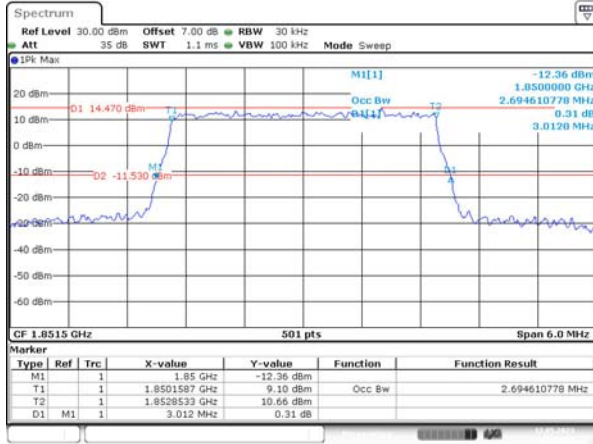


Middle

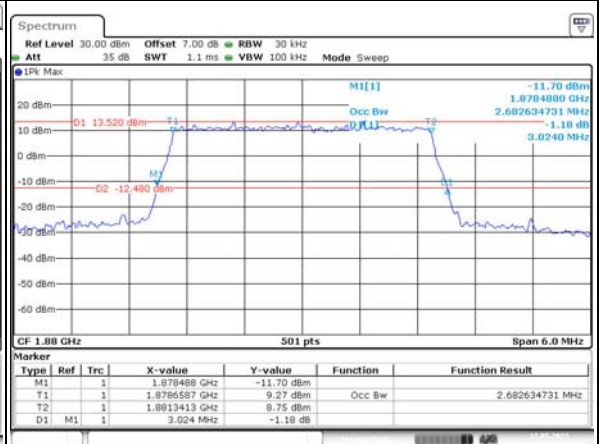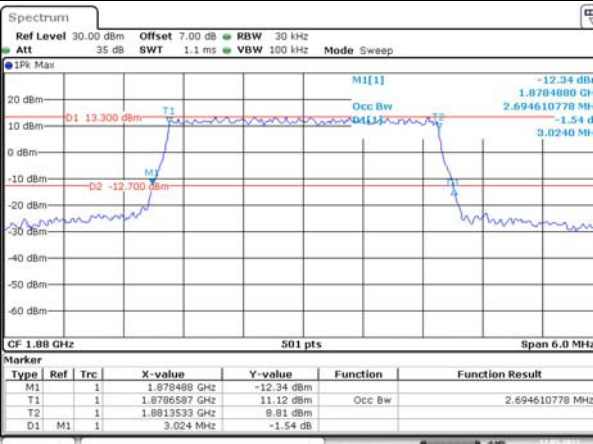

Highest

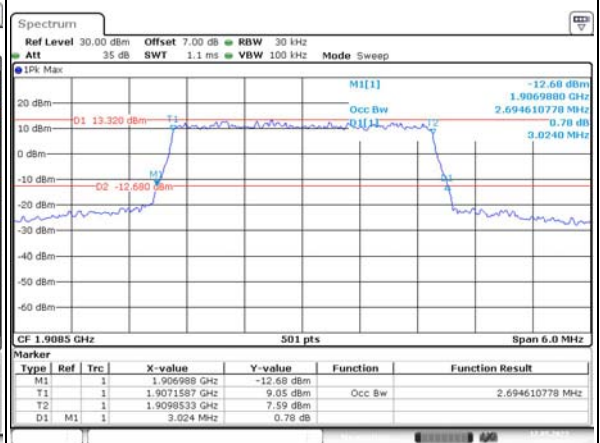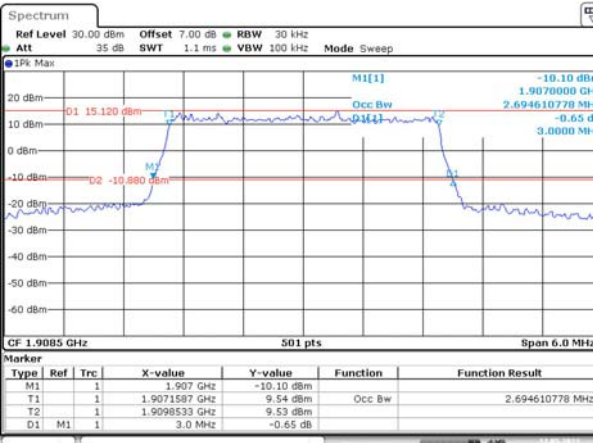

Occupied Bandwidth

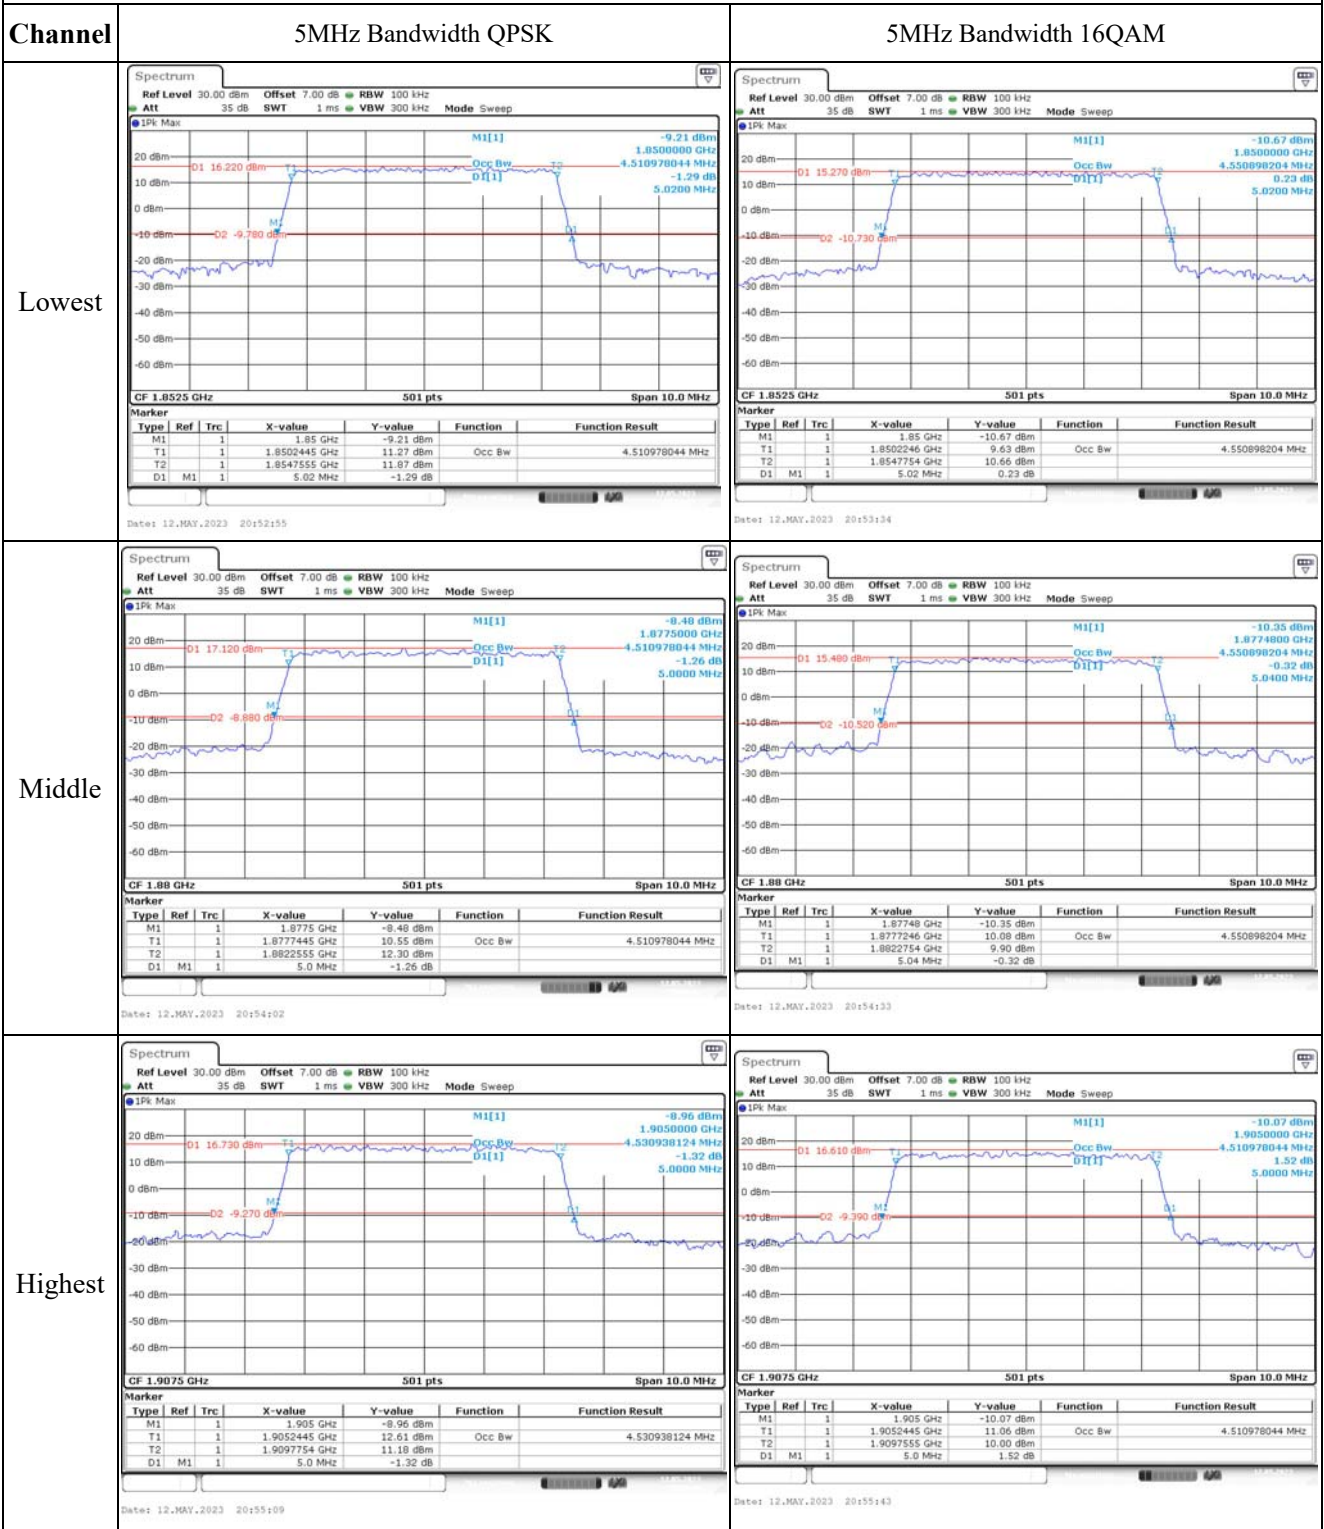



Occupied Bandwidth

Channel



10MHz Bandwidth QPSK

10MHz Bandwidth 16QAM



Lowest

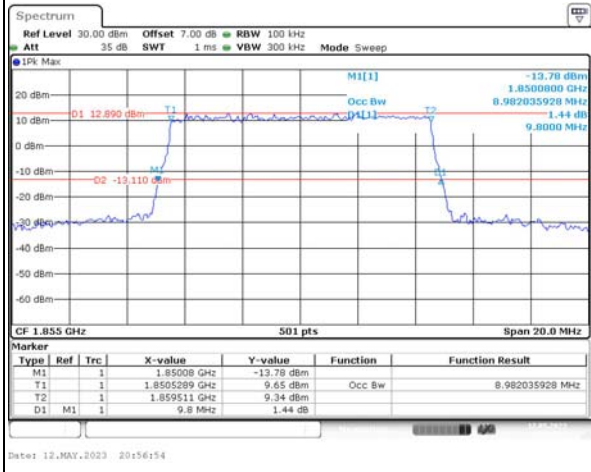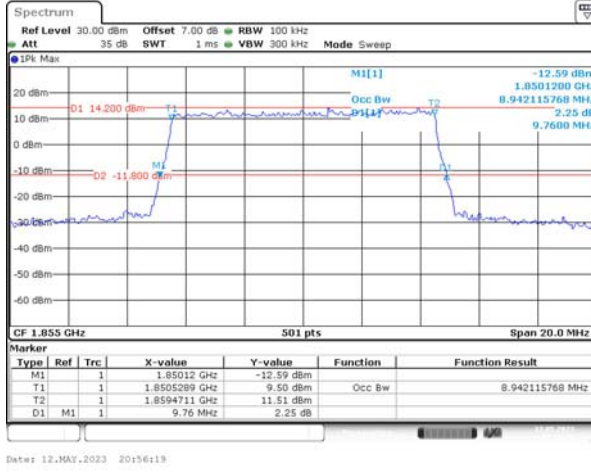

Middle

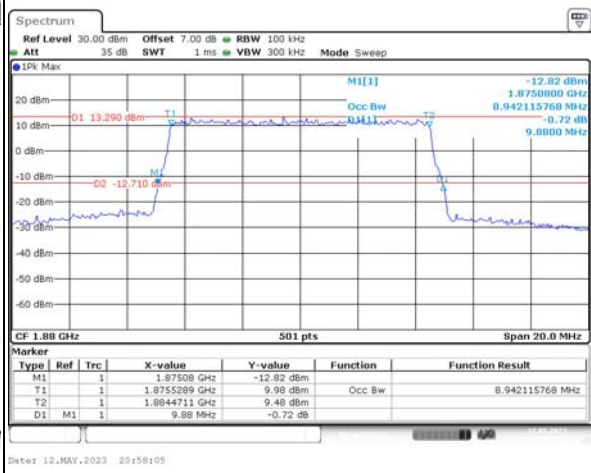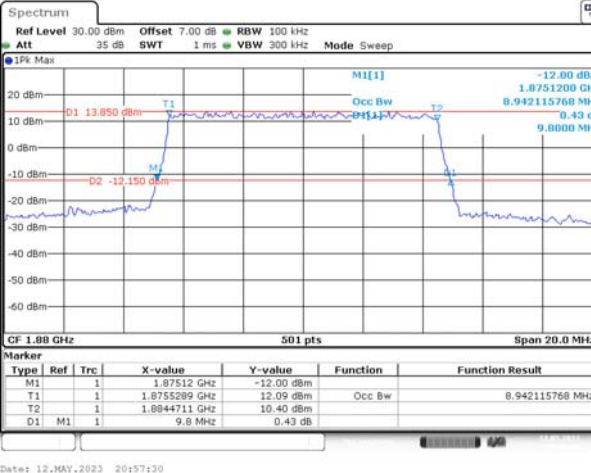

Highest

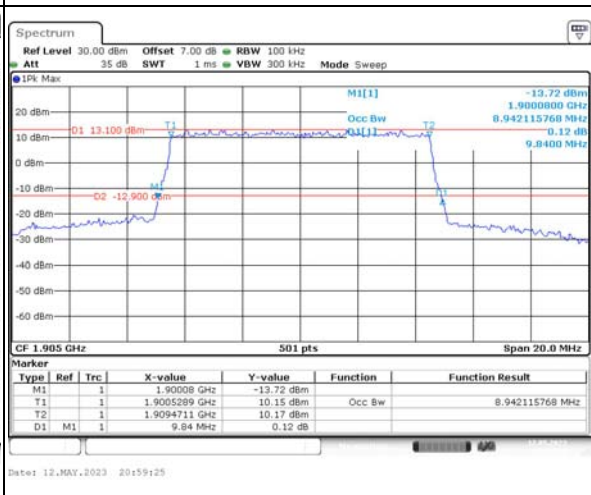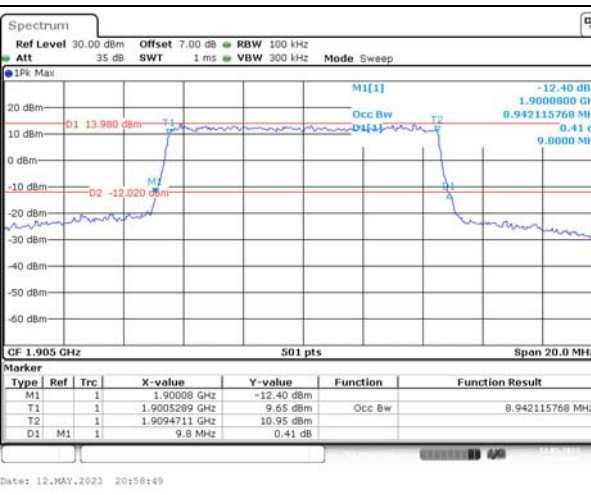



Occupied Bandwidth

Channel



15MHz Bandwidth QPSK

15MHz Bandwidth 16QAM



Lowest

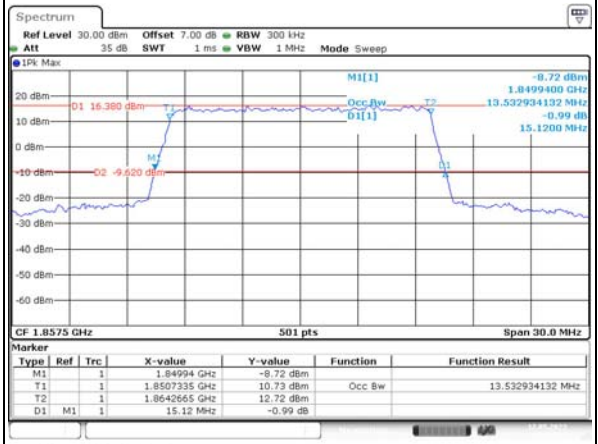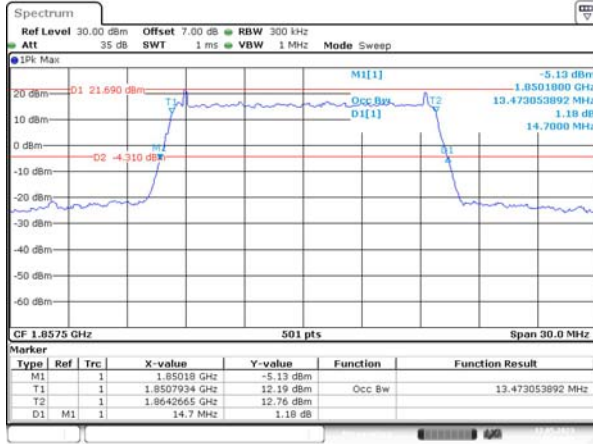

Middle

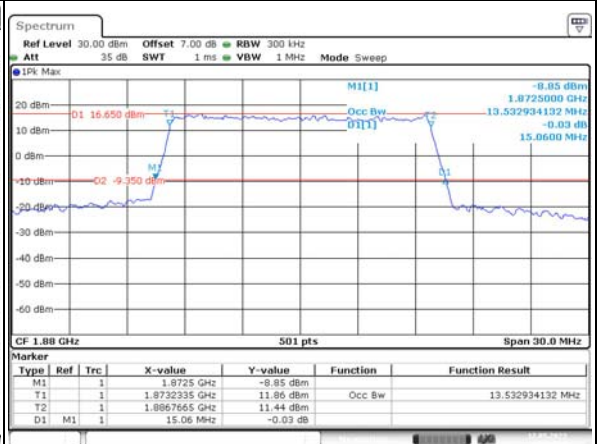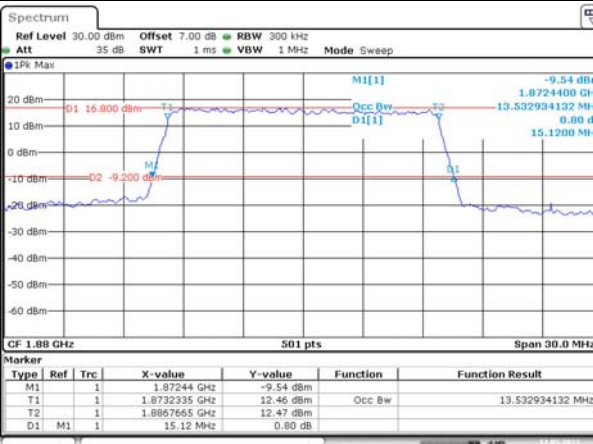

Highest

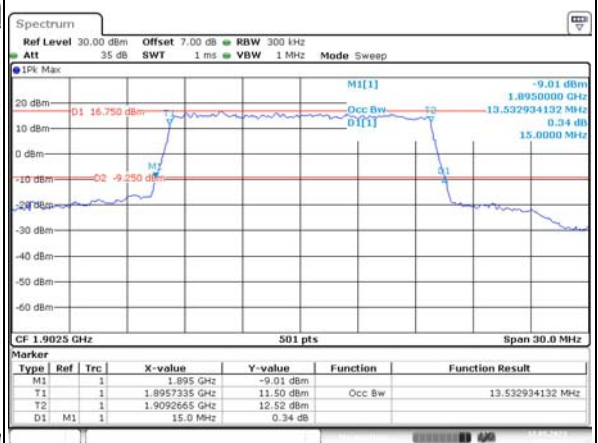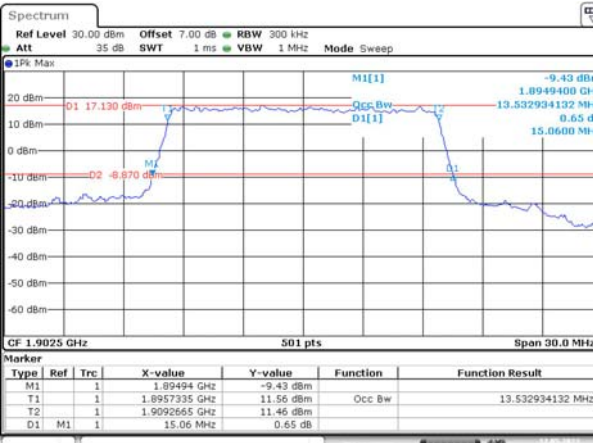

Occupied Bandwidth



Channel	20MHz Bandwidth QPSK	20MHz Bandwidth 16QAM																																																																																
Lowest	<table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>1.85032 GHz</td> <td>-8.08 dBm</td> <td></td> <td></td> </tr> <tr> <td>T1</td> <td>1</td> <td></td> <td></td> <td>1.8510579 GHz</td> <td>11.49 dBm</td> <td>Occ Bw</td> <td>17.964071856 MHz</td> </tr> <tr> <td>T2</td> <td>1</td> <td></td> <td></td> <td>1.869022 GHz</td> <td>13.15 dBm</td> <td></td> <td></td> </tr> <tr> <td>D1</td> <td>M1</td> <td>1</td> <td></td> <td>19.52 MHz</td> <td>-0.32 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			1.85032 GHz	-8.08 dBm			T1	1			1.8510579 GHz	11.49 dBm	Occ Bw	17.964071856 MHz	T2	1			1.869022 GHz	13.15 dBm			D1	M1	1		19.52 MHz	-0.32 dB			<table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>1.85008 GHz</td> <td>-10.95 dBm</td> <td></td> <td></td> </tr> <tr> <td>T1</td> <td>1</td> <td></td> <td></td> <td>1.8510579 GHz</td> <td>11.30 dBm</td> <td>Occ Bw</td> <td>17.964071856 MHz</td> </tr> <tr> <td>T2</td> <td>1</td> <td></td> <td></td> <td>1.869022 GHz</td> <td>11.85 dBm</td> <td></td> <td></td> </tr> <tr> <td>D1</td> <td>M1</td> <td>1</td> <td></td> <td>19.84 MHz</td> <td>1.29 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			1.85008 GHz	-10.95 dBm			T1	1			1.8510579 GHz	11.30 dBm	Occ Bw	17.964071856 MHz	T2	1			1.869022 GHz	11.85 dBm			D1	M1	1		19.84 MHz	1.29 dB		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																																											
M1	1			1.85032 GHz	-8.08 dBm																																																																													
T1	1			1.8510579 GHz	11.49 dBm	Occ Bw	17.964071856 MHz																																																																											
T2	1			1.869022 GHz	13.15 dBm																																																																													
D1	M1	1		19.52 MHz	-0.32 dB																																																																													
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																																											
M1	1			1.85008 GHz	-10.95 dBm																																																																													
T1	1			1.8510579 GHz	11.30 dBm	Occ Bw	17.964071856 MHz																																																																											
T2	1			1.869022 GHz	11.85 dBm																																																																													
D1	M1	1		19.84 MHz	1.29 dB																																																																													
Middle	<table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>1.87008 GHz</td> <td>-10.10 dBm</td> <td></td> <td></td> </tr> <tr> <td>T1</td> <td>1</td> <td></td> <td></td> <td>1.870979 GHz</td> <td>12.18 dBm</td> <td>Occ Bw</td> <td>18.043912176 MHz</td> </tr> <tr> <td>T2</td> <td>1</td> <td></td> <td></td> <td>1.889022 GHz</td> <td>12.13 dBm</td> <td></td> <td></td> </tr> <tr> <td>D1</td> <td>M1</td> <td>1</td> <td></td> <td>19.92 MHz</td> <td>-1.47 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			1.87008 GHz	-10.10 dBm			T1	1			1.870979 GHz	12.18 dBm	Occ Bw	18.043912176 MHz	T2	1			1.889022 GHz	12.13 dBm			D1	M1	1		19.92 MHz	-1.47 dB			<table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>1.87016 GHz</td> <td>-10.07 dBm</td> <td></td> <td></td> </tr> <tr> <td>T1</td> <td>1</td> <td></td> <td></td> <td>1.8710579 GHz</td> <td>12.18 dBm</td> <td>Occ Bw</td> <td>17.964071856 MHz</td> </tr> <tr> <td>T2</td> <td>1</td> <td></td> <td></td> <td>1.889022 GHz</td> <td>11.56 dBm</td> <td></td> <td></td> </tr> <tr> <td>D1</td> <td>M1</td> <td>1</td> <td></td> <td>19.76 MHz</td> <td>0.55 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			1.87016 GHz	-10.07 dBm			T1	1			1.8710579 GHz	12.18 dBm	Occ Bw	17.964071856 MHz	T2	1			1.889022 GHz	11.56 dBm			D1	M1	1		19.76 MHz	0.55 dB		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																																											
M1	1			1.87008 GHz	-10.10 dBm																																																																													
T1	1			1.870979 GHz	12.18 dBm	Occ Bw	18.043912176 MHz																																																																											
T2	1			1.889022 GHz	12.13 dBm																																																																													
D1	M1	1		19.92 MHz	-1.47 dB																																																																													
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																																											
M1	1			1.87016 GHz	-10.07 dBm																																																																													
T1	1			1.8710579 GHz	12.18 dBm	Occ Bw	17.964071856 MHz																																																																											
T2	1			1.889022 GHz	11.56 dBm																																																																													
D1	M1	1		19.76 MHz	0.55 dB																																																																													
Highest	<table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>1.89024 GHz</td> <td>-9.73 dBm</td> <td></td> <td></td> </tr> <tr> <td>T1</td> <td>1</td> <td></td> <td></td> <td>1.8910579 GHz</td> <td>13.17 dBm</td> <td>Occ Bw</td> <td>17.964071856 MHz</td> </tr> <tr> <td>T2</td> <td>1</td> <td></td> <td></td> <td>1.909022 GHz</td> <td>11.65 dBm</td> <td></td> <td></td> </tr> <tr> <td>D1</td> <td>M1</td> <td>1</td> <td></td> <td>19.52 MHz</td> <td>0.21 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			1.89024 GHz	-9.73 dBm			T1	1			1.8910579 GHz	13.17 dBm	Occ Bw	17.964071856 MHz	T2	1			1.909022 GHz	11.65 dBm			D1	M1	1		19.52 MHz	0.21 dB			<table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>1.89008 GHz</td> <td>-10.96 dBm</td> <td></td> <td></td> </tr> <tr> <td>T1</td> <td>1</td> <td></td> <td></td> <td>1.8910579 GHz</td> <td>11.06 dBm</td> <td>Occ Bw</td> <td>17.964071856 MHz</td> </tr> <tr> <td>T2</td> <td>1</td> <td></td> <td></td> <td>1.909022 GHz</td> <td>13.05 dBm</td> <td></td> <td></td> </tr> <tr> <td>D1</td> <td>M1</td> <td>1</td> <td></td> <td>19.76 MHz</td> <td>-0.08 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			1.89008 GHz	-10.96 dBm			T1	1			1.8910579 GHz	11.06 dBm	Occ Bw	17.964071856 MHz	T2	1			1.909022 GHz	13.05 dBm			D1	M1	1		19.76 MHz	-0.08 dB		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																																											
M1	1			1.89024 GHz	-9.73 dBm																																																																													
T1	1			1.8910579 GHz	13.17 dBm	Occ Bw	17.964071856 MHz																																																																											
T2	1			1.909022 GHz	11.65 dBm																																																																													
D1	M1	1		19.52 MHz	0.21 dB																																																																													
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																																											
M1	1			1.89008 GHz	-10.96 dBm																																																																													
T1	1			1.8910579 GHz	11.06 dBm	Occ Bw	17.964071856 MHz																																																																											
T2	1			1.909022 GHz	13.05 dBm																																																																													
D1	M1	1		19.76 MHz	-0.08 dB																																																																													

Spurious Emissions at Antenna Terminal



Channel

1.4MHz Bandwidth QPSK



Lowest

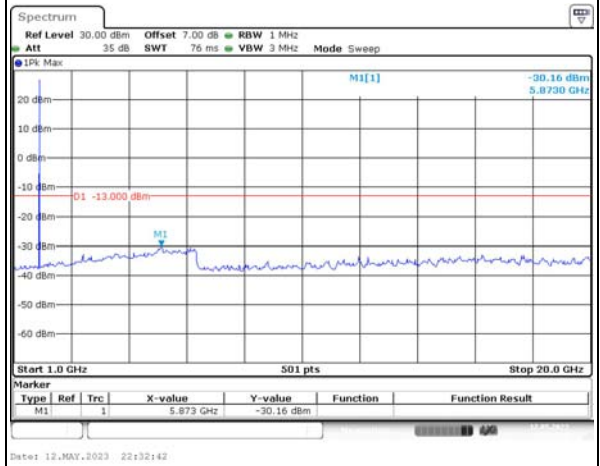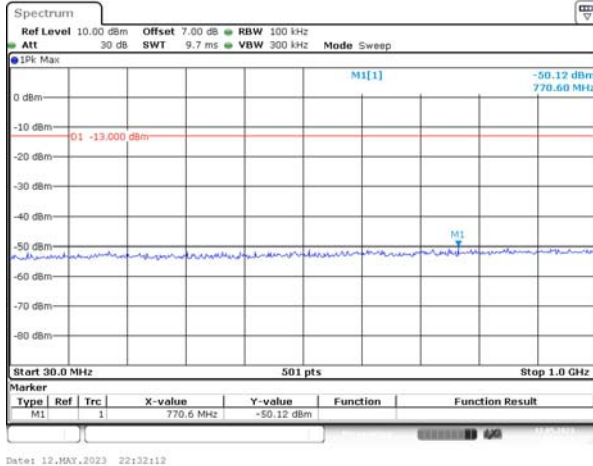

Middle

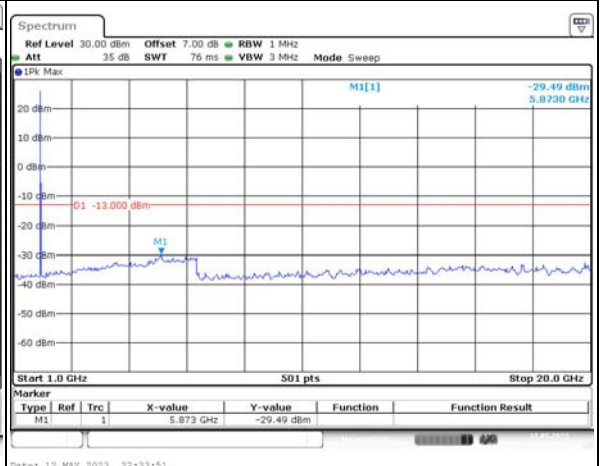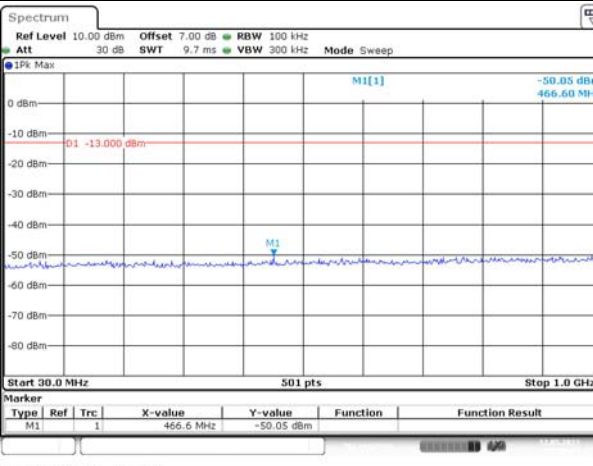

Highest

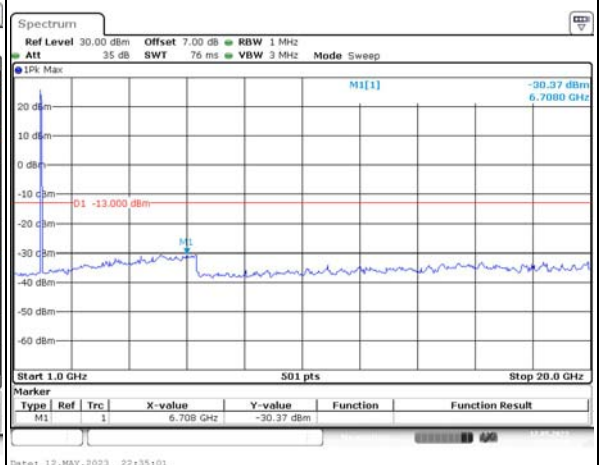
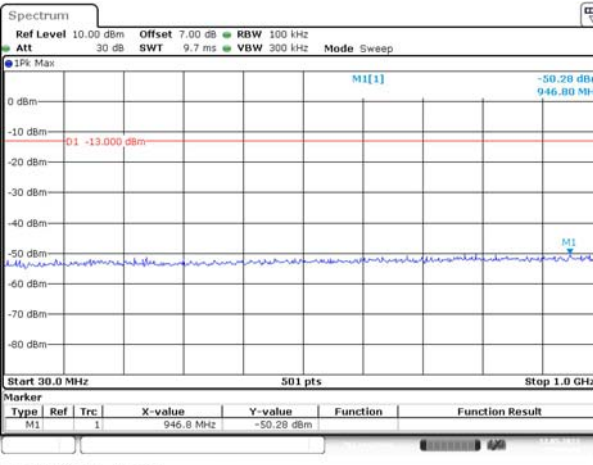


Spurious Emissions at Antenna Terminal



Channel

3MHz Bandwidth QPSK



Lowest

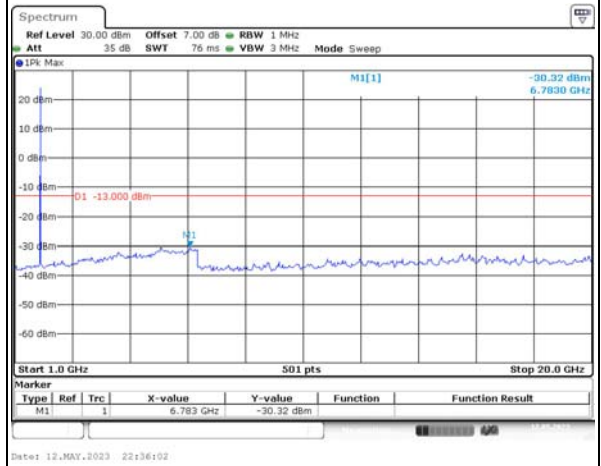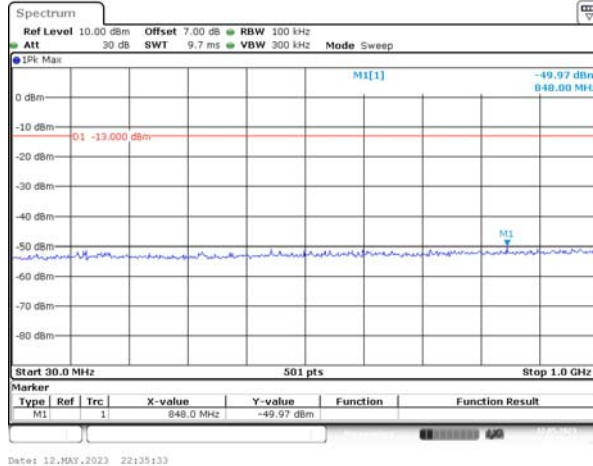

Middle

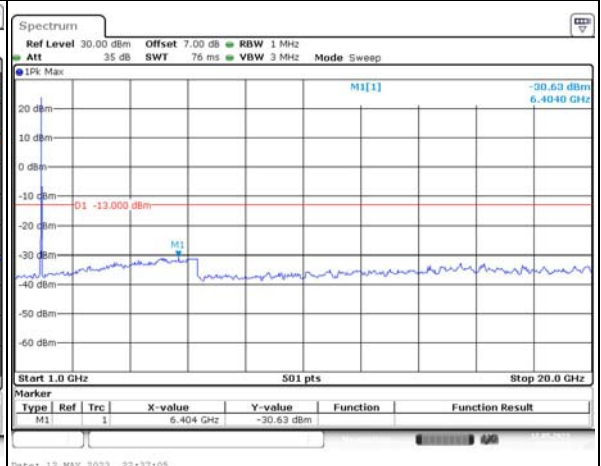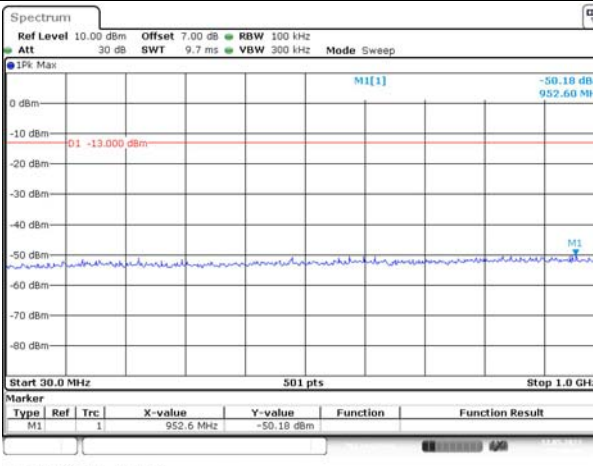

Highest

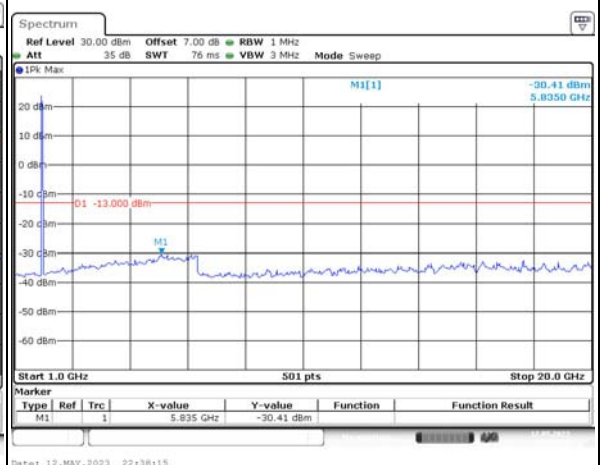
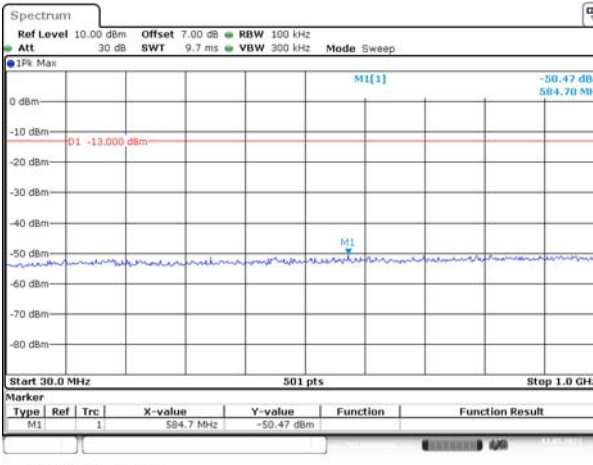


Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

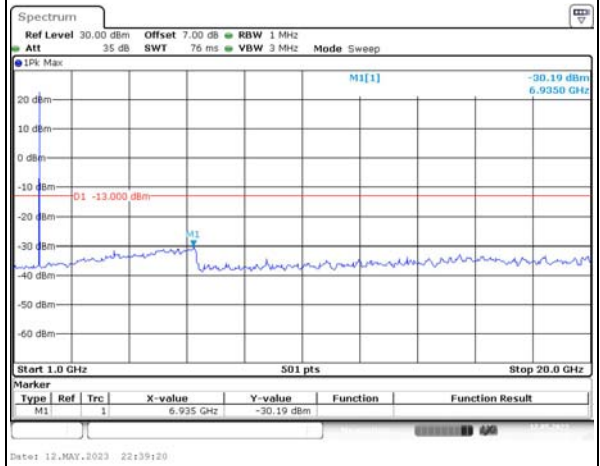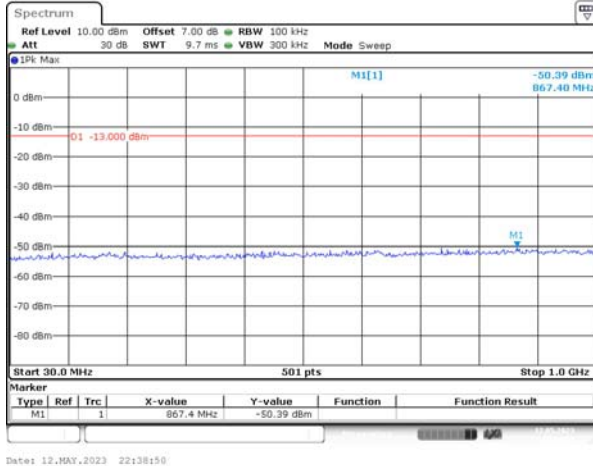


Middle

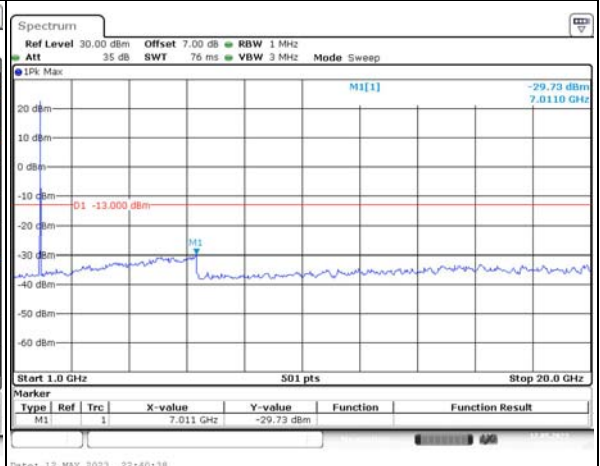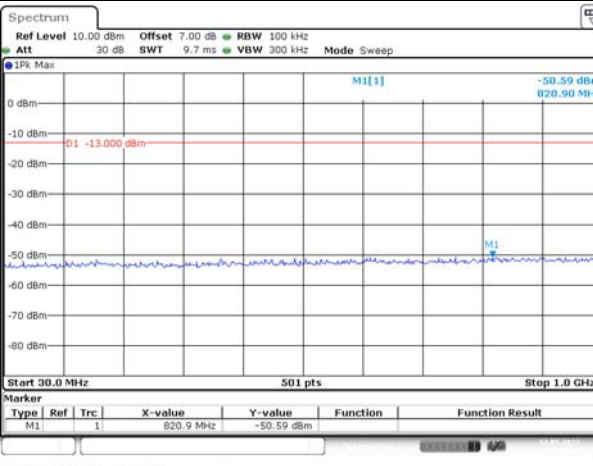

Highest

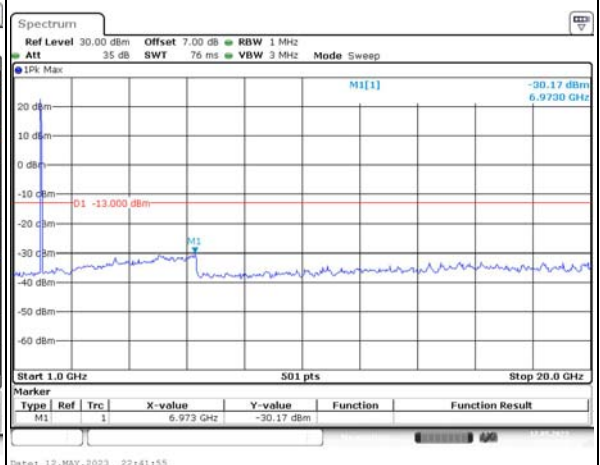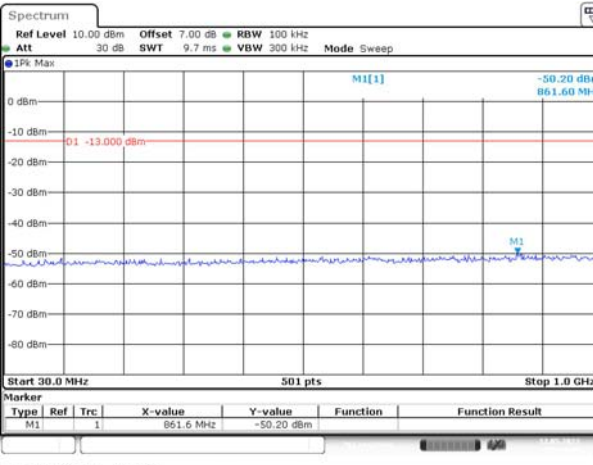

Spurious Emissions at Antenna Terminal


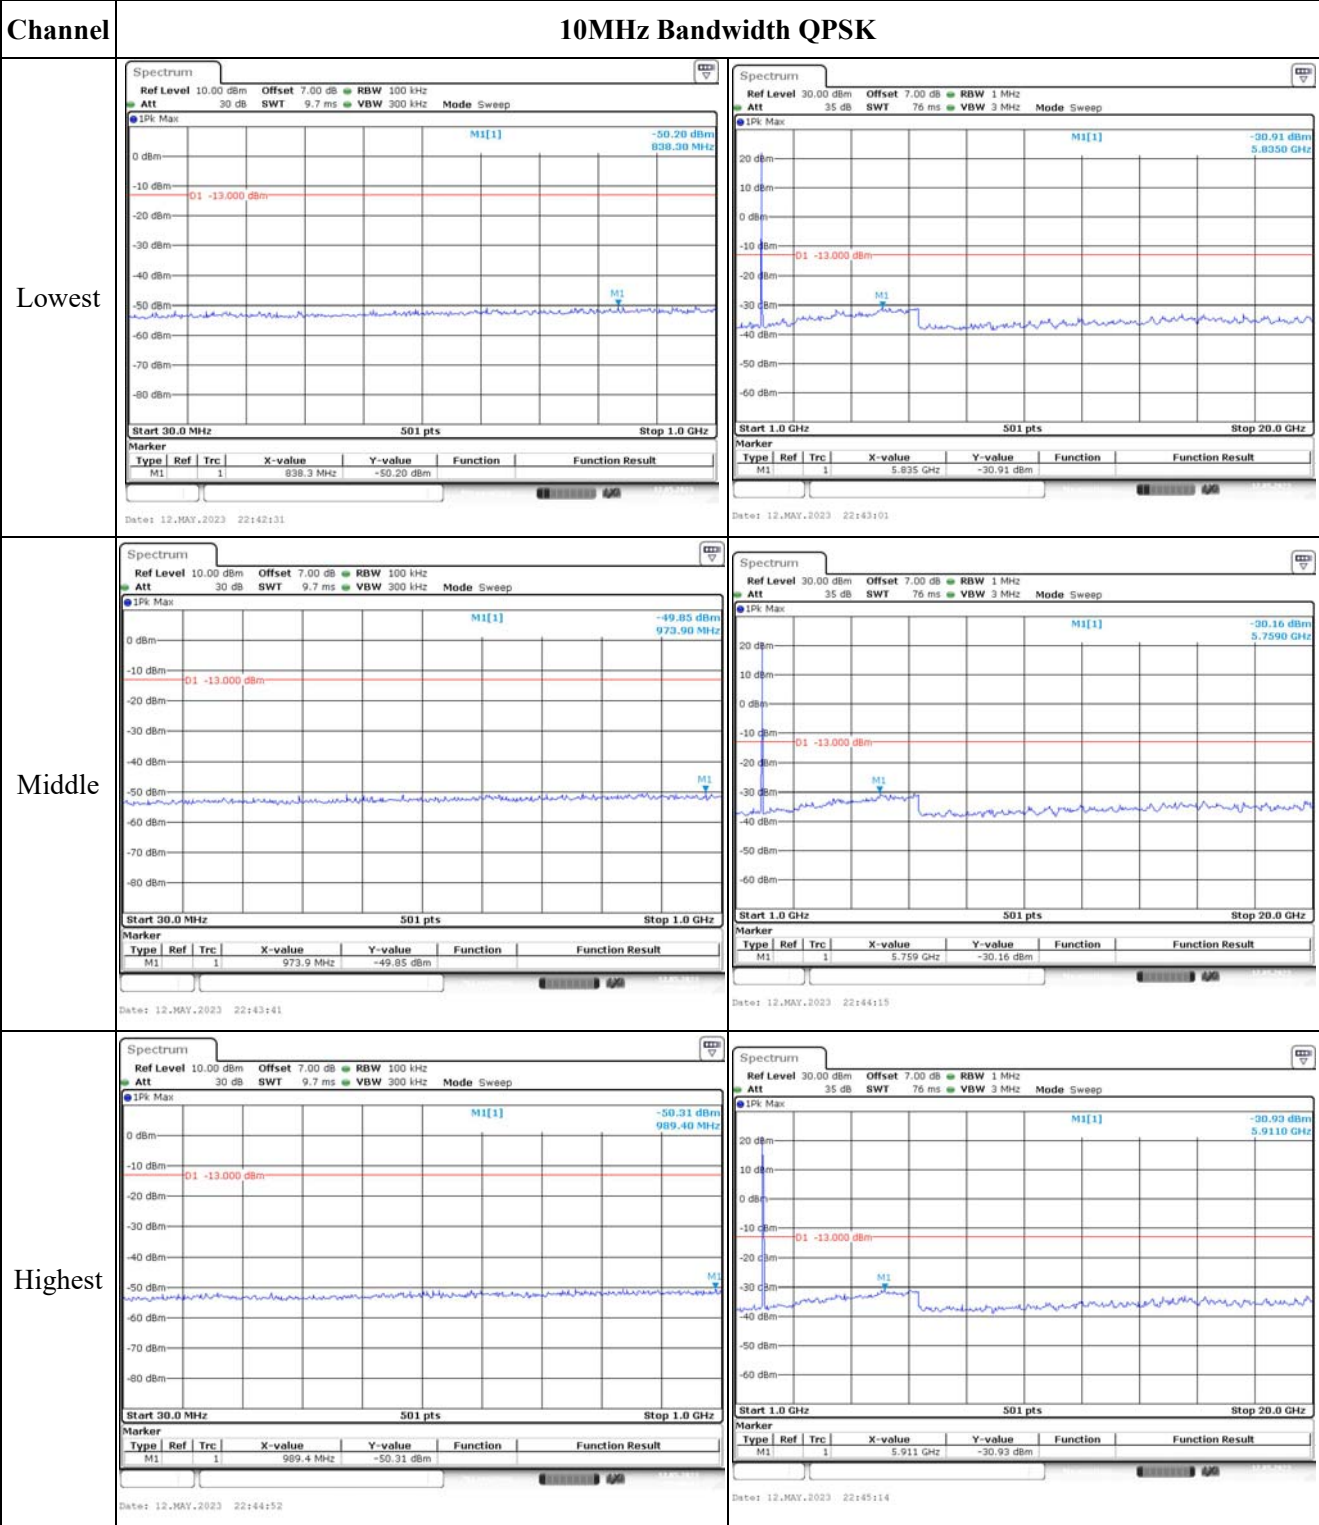


Spurious Emissions at Antenna Terminal



Channel

15MHz Bandwidth QPSK



Lowest

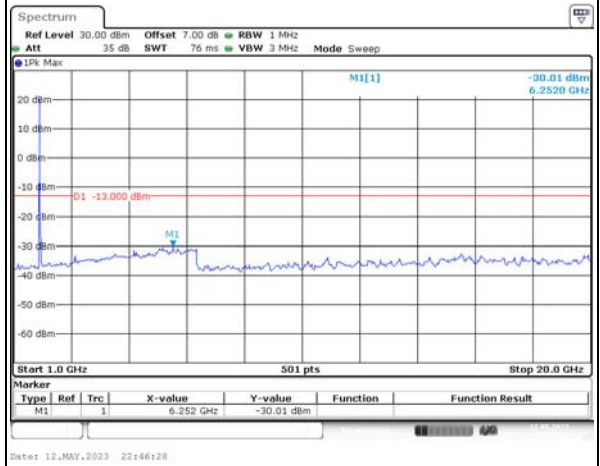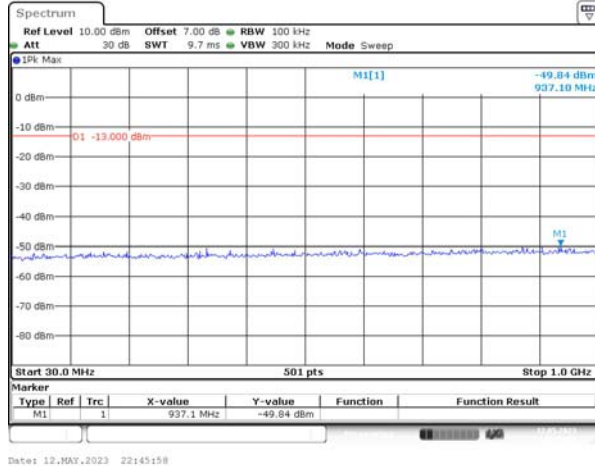

Middle

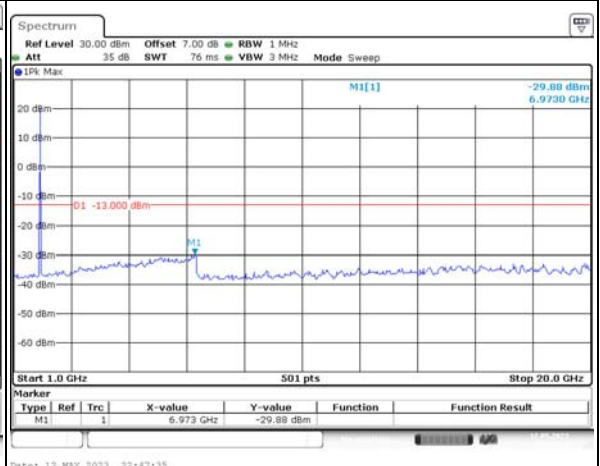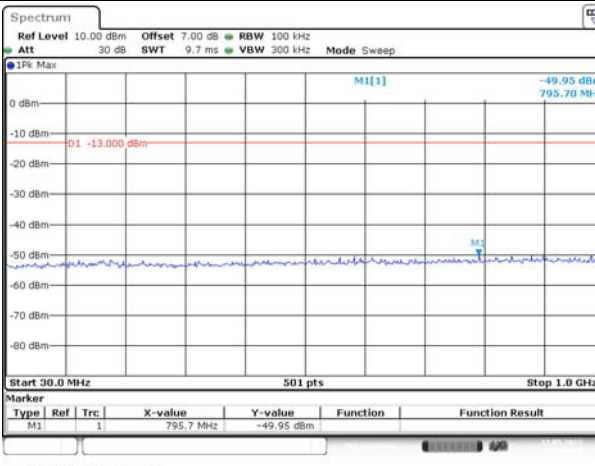

Highest

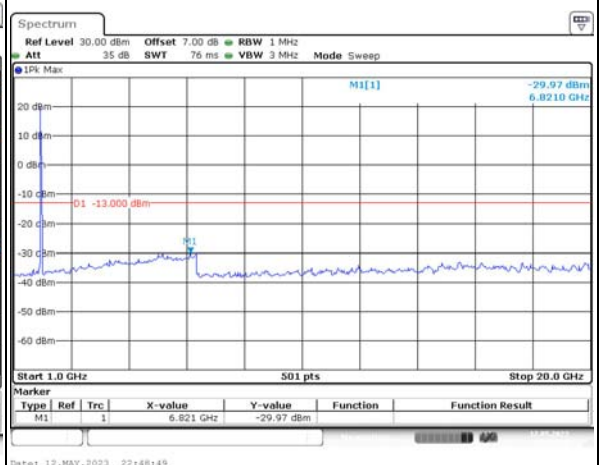
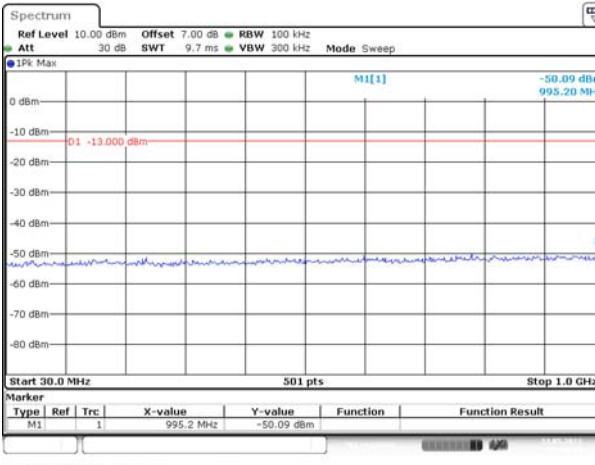


Spurious Emissions at Antenna Terminal



Channel

20MHz Bandwidth QPSK



Lowest

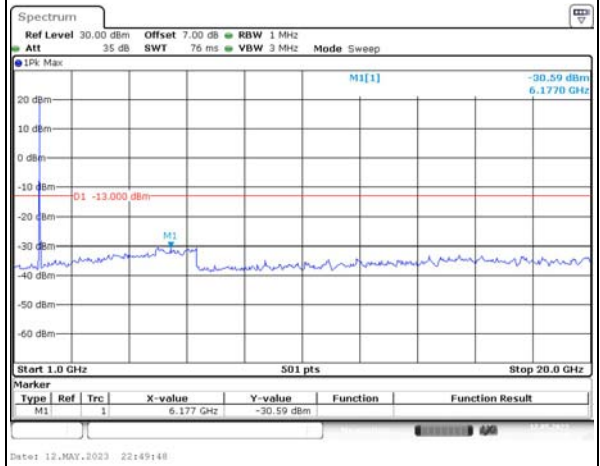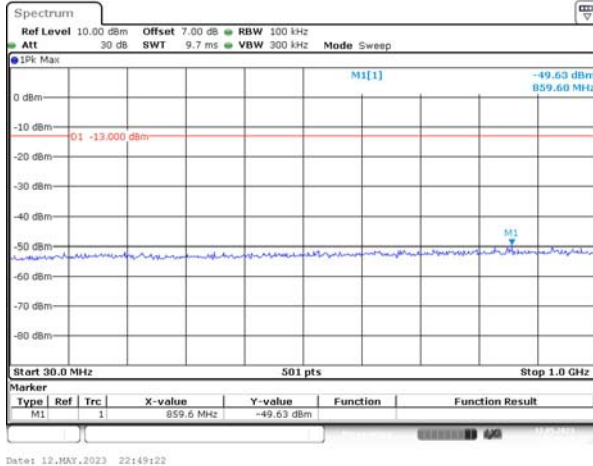


Middle

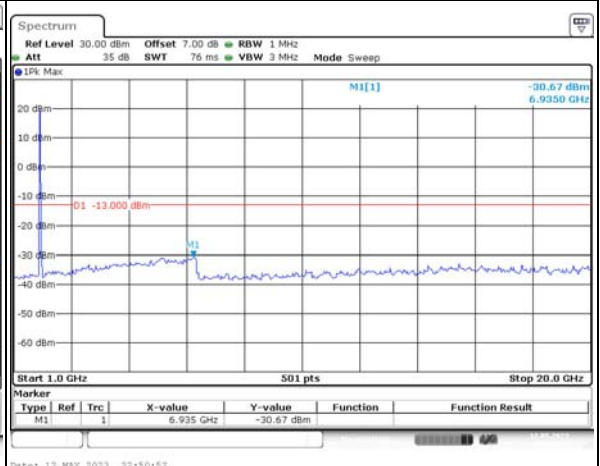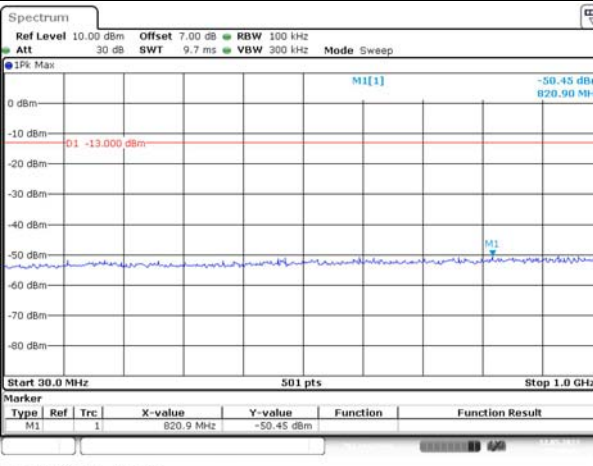


Highest

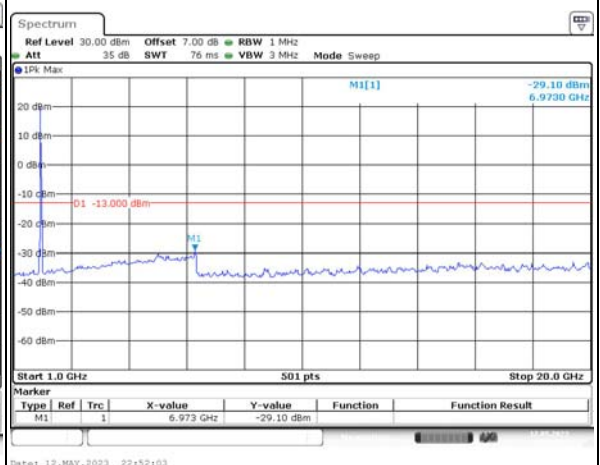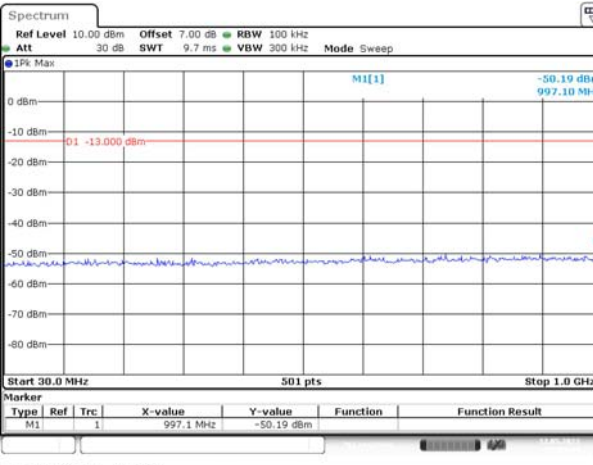

Out of band emission, Band Edge

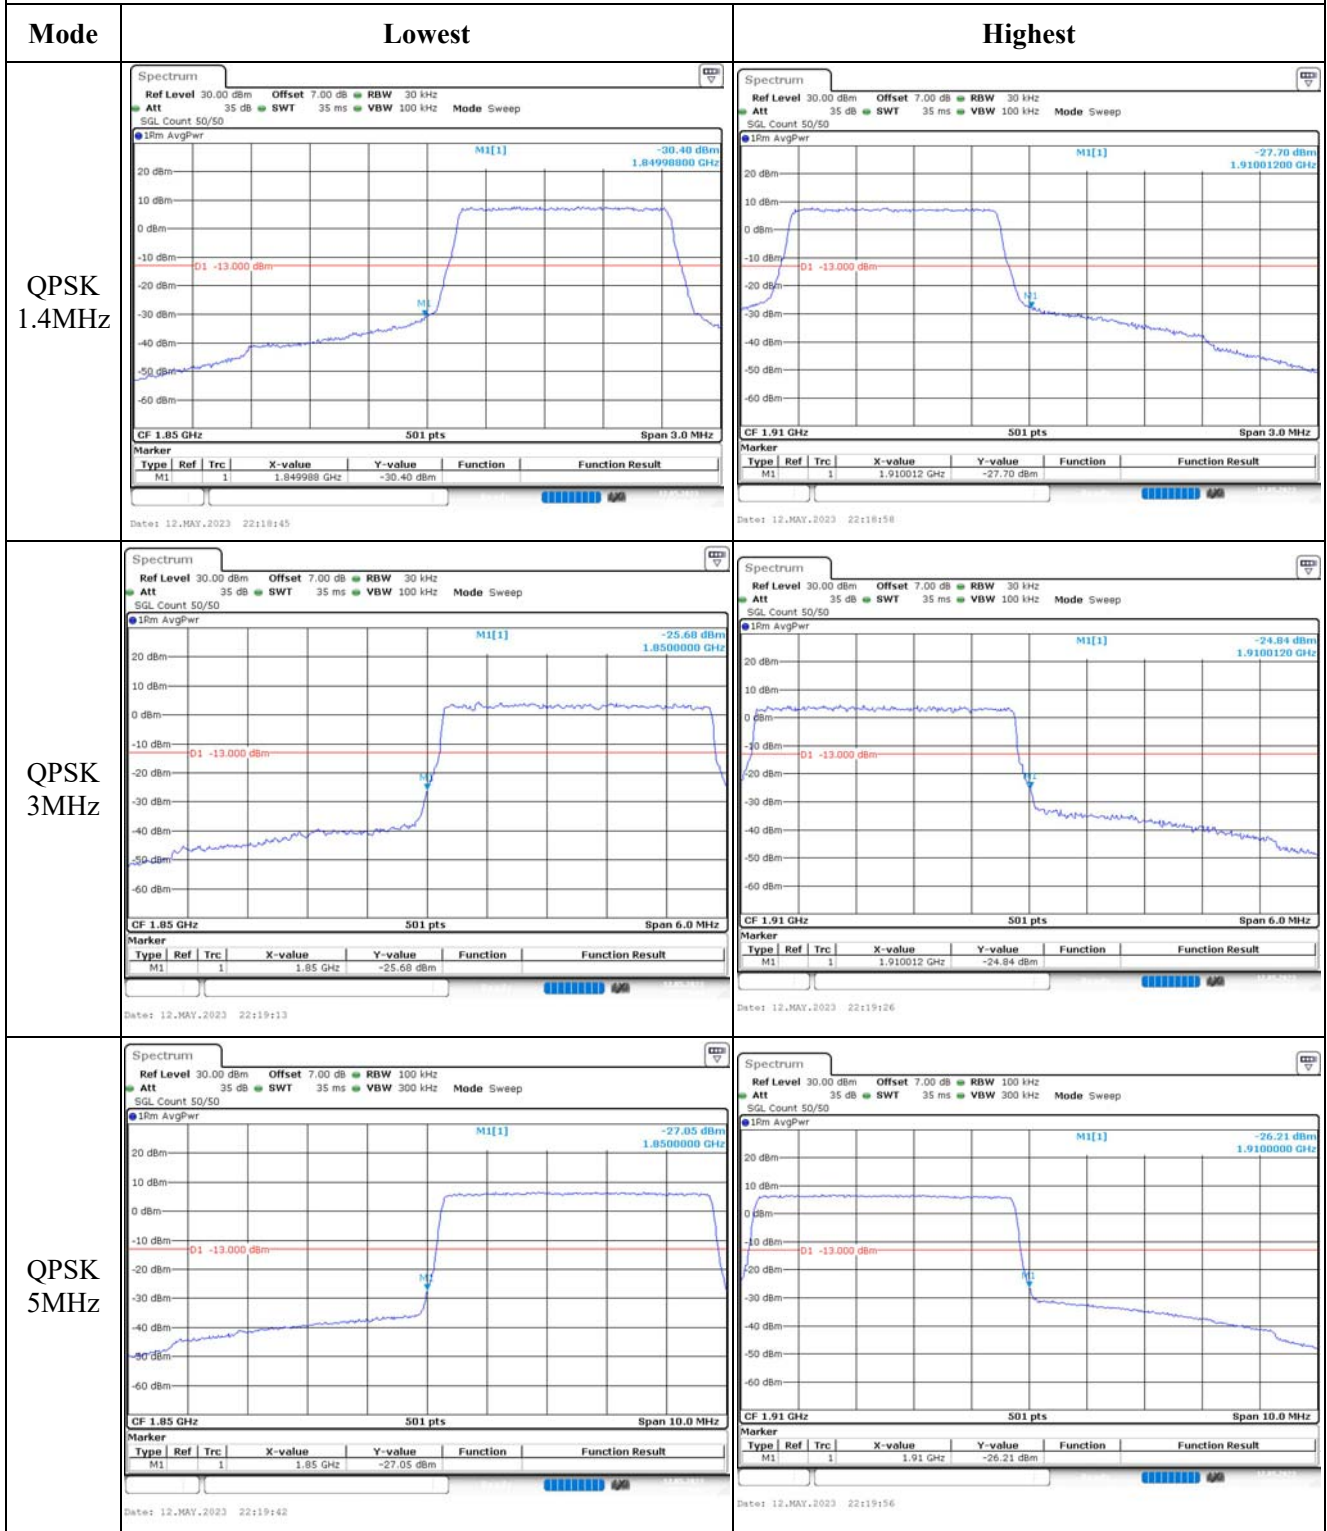

Out of band emission, Band Edge

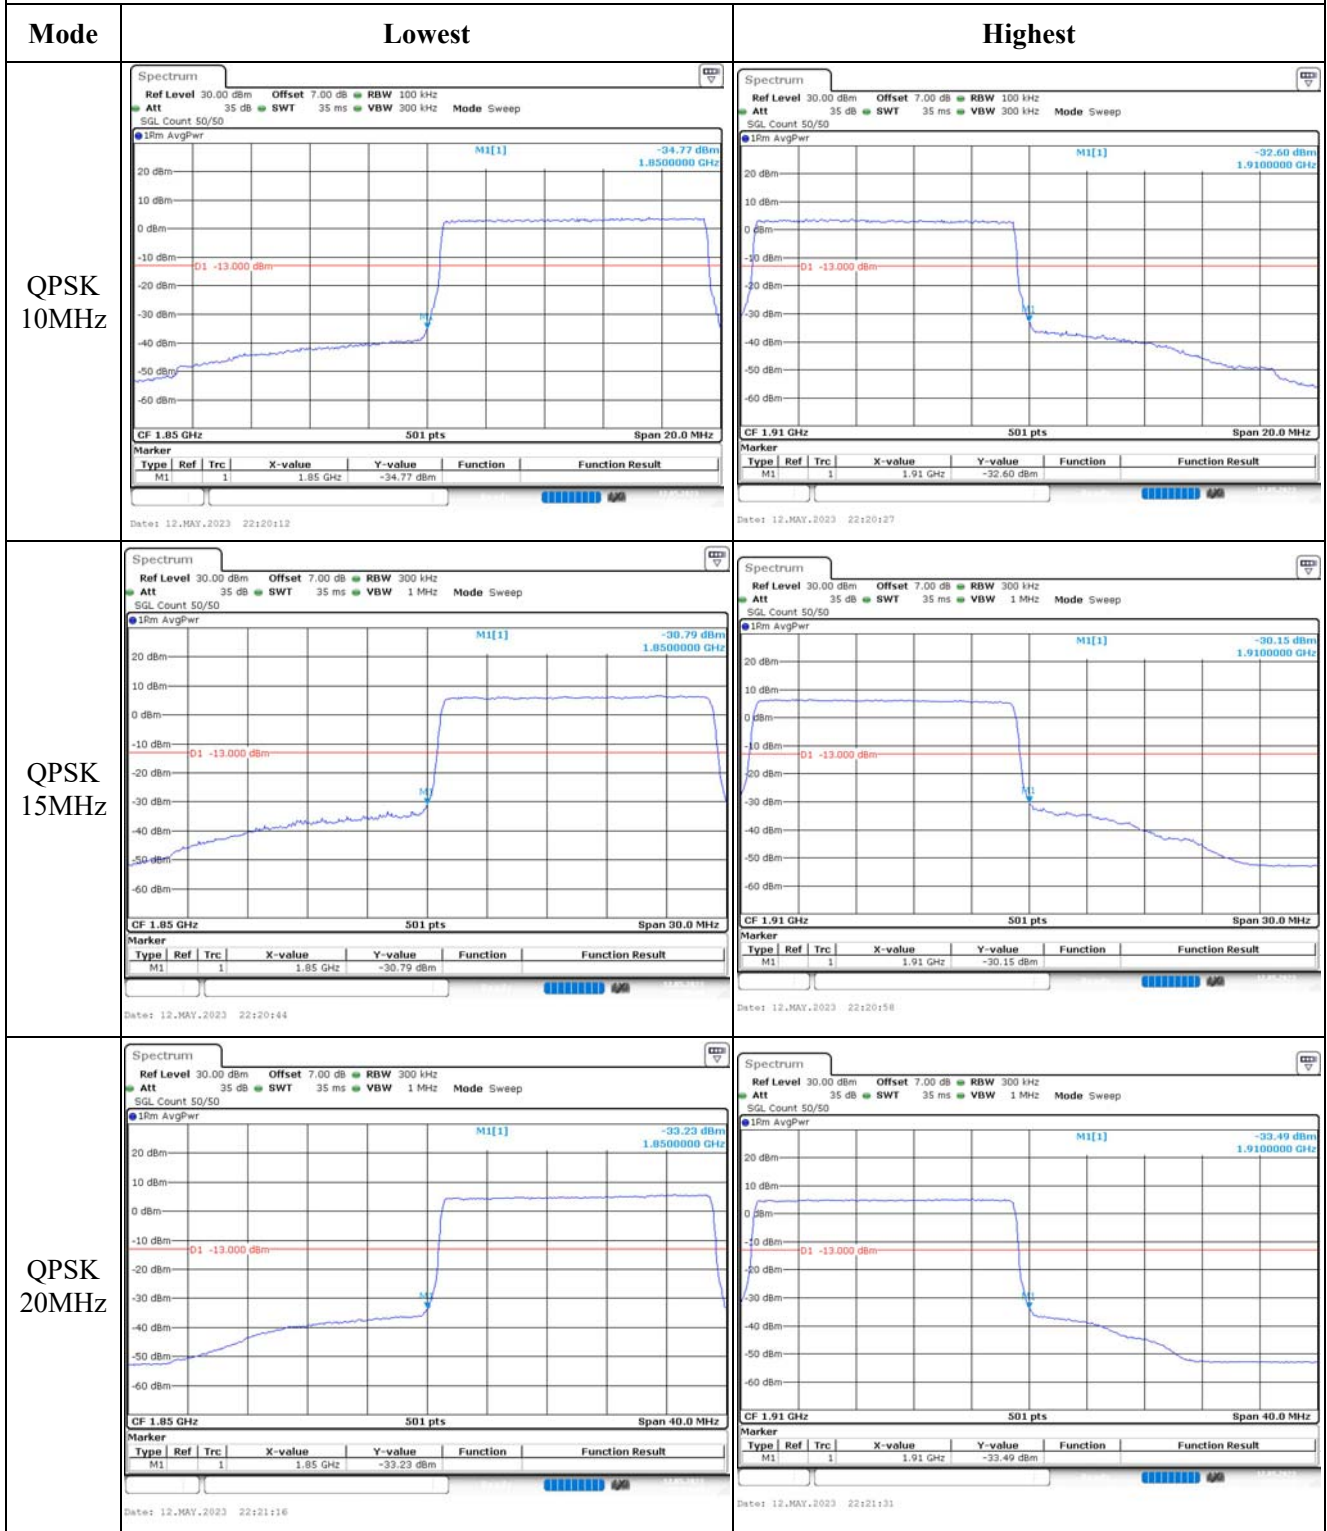

Out of band emission, Band Edge

Mode	Lowest	Highest																																
16QAM 1.4MHz	<p>Ref Level 30.00 dBm Offset 7.00 dB RBW 30 kHz Att 35 dB SWT 35 ms VBW 100 kHz Mode Sweep SGL Count 50/50 1Pm AvgPwr</p> <p>CF 1.85 GHz 501 pts Span 3.0 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>1.85 GHz</td> <td>-31.20 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 12.MAY.2023 22:18:51</p>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			1.85 GHz	-31.20 dBm			<p>Ref Level 30.00 dBm Offset 7.00 dB RBW 30 kHz Att 35 dB SWT 35 ms VBW 100 kHz Mode Sweep SGL Count 50/50 1Pm AvgPwr</p> <p>CF 1.91 GHz 501 pts Span 3.0 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>1.910006 GHz</td> <td>-29.30 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 12.MAY.2023 22:19:04</p>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			1.910006 GHz	-29.30 dBm		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																											
M1	1			1.85 GHz	-31.20 dBm																													
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																											
M1	1			1.910006 GHz	-29.30 dBm																													
16QAM 3MHz	<p>Ref Level 30.00 dBm Offset 7.00 dB RBW 30 kHz Att 35 dB SWT 35 ms VBW 100 kHz Mode Sweep SGL Count 50/50 1Pm AvgPwr</p> <p>CF 1.85 GHz 501 pts Span 6.0 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>1.85 GHz</td> <td>-24.96 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 12.MAY.2023 22:19:19</p>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			1.85 GHz	-24.96 dBm			<p>Ref Level 30.00 dBm Offset 7.00 dB RBW 30 kHz Att 35 dB SWT 35 ms VBW 100 kHz Mode Sweep SGL Count 50/50 1Pm AvgPwr</p> <p>CF 1.91 GHz 501 pts Span 6.0 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>1.91 GHz</td> <td>-25.70 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 12.MAY.2023 22:19:32</p>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			1.91 GHz	-25.70 dBm		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																											
M1	1			1.85 GHz	-24.96 dBm																													
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																											
M1	1			1.91 GHz	-25.70 dBm																													
16QAM 5MHz	<p>Ref Level 30.00 dBm Offset 7.00 dB RBW 100 kHz Att 35 dB SWT 35 ms VBW 300 kHz Mode Sweep SGL Count 50/50 1Pm AvgPwr</p> <p>CF 1.85 GHz 501 pts Span 10.0 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>1.85 GHz</td> <td>-28.01 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 12.MAY.2023 22:19:48</p>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			1.85 GHz	-28.01 dBm			<p>Ref Level 30.00 dBm Offset 7.00 dB RBW 100 kHz Att 35 dB SWT 35 ms VBW 300 kHz Mode Sweep SGL Count 50/50 1Pm AvgPwr</p> <p>CF 1.91 GHz 501 pts Span 10.0 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>1.91 GHz</td> <td>-27.17 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 12.MAY.2023 22:20:02</p>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			1.91 GHz	-27.17 dBm		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																											
M1	1			1.85 GHz	-28.01 dBm																													
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																											
M1	1			1.91 GHz	-27.17 dBm																													

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 10MHz		
16QAM 15MHz		
16QAM 20MHz		

4.7 Antenna Port Test Data and Results for LTE Band 4

Serial Number:	25FP-1	Test Date:	2023/05/12~2023/05/18
Test Site:	RF	Test Mode:	Transmitting
Tester:	One Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3~27.2	Relative Humidity: (%)	42~61	ATM Pressure: (kPa)	100.5~101.9
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/07/15	2023/07/14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/03/31	2024/03/30
UNI-T	Multimeter	UT39A+	C210582554	2022/09/29	2023/09/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1710.7	1732.5	1754.3
3MHz	1711.5	1732.5	1753.5
5MHz	1712.5	1732.5	1752.5
10MHz	1715	1732.5	1750
15MHz	1717.5	1732.5	1747.5
20MHz	1720	1732.5	1745

Test Data:**FCC§2.1046;§ 27.50(d)(4)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP(dBm)	EIRP Limit(dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	16.88	18.47	19.94	20.12	30
	RB1#3	16.69	19.25	19.95		
	RB1#5	18.4	19.26	19.92		
	RB3#0	17.8	19.34	19.69		
	RB3#3	18.82	19.29	19.63		
	RB6#0	17.72	18.65	18.47		
1.4MHz 16QAM	RB1#0	17.47	19.41	18.72	19.66	30
	RB1#3	17.53	19.49	18.72		
	RB1#5	17.61	18.75	18.66		
	RB3#0	17.96	17.89	18.52		
	RB3#3	17.95	18.43	18.92		
	RB6#0	15.54	17.5	18.02		
3MHz QPSK	RB1#0	18.1	18.46	19.47	19.79	30
	RB1#8	18.03	18.46	19.53		
	RB1#14	17.97	18.47	19.62		
	RB6#0	16.92	17.46	18.71		
	RB6#9	16.87	17.46	18.66		
	RB15#0	16.73	17.34	18.77		
3MHz 16QAM	RB1#0	17.6	18.53	18.87	19.17	30
	RB1#8	17.59	18.48	18.95		
	RB1#14	17.96	18.51	19		
	RB6#0	16.04	16.91	17.65		
	RB6#9	16.18	17.95	17.78		
	RB15#0	15.97	16.75	17.78		
5MHz QPSK	RB1#0	18.26	18.53	19.44	19.84	30
	RB1#13	17.72	18.59	19.55		
	RB1#24	18.23	18.6	19.67		
	RB15#0	16.54	17.41	18.41		
	RB15#10	17.02	17.47	18.53		
	RB25#0	16.71	17.52	18.56		
5MHz 16QAM	RB1#0	16.91	17.03	17.57	18.01	30
	RB1#13	17.1	17.12	17.75		
	RB1#24	16.85	17.28	17.84		
	RB15#0	15.59	16.55	17.61		
	RB15#10	15.53	16.84	17.67		
	RB25#0	16.18	16.72	17.67		
10MHz QPSK	RB1#0	17.55	18.21	19.17	19.82	30
	RB1#25	17.93	18.46	19.45		
	RB1#49	18.06	18.74	19.65		

	RB25#0	16.76	17.32	18.27		
	RB25#25	16.74	17.62	18.46		
	RB50#0	16.73	17.5	18.51		
10MHz 16QAM	RB1#0	16.7	16.74	18.45	19.07	30
	RB1#25	16.85	16.96	18.72		
	RB1#49	17.07	17.19	18.9		
	RB25#0	15.76	16.98	17.42		
	RB25#25	15.96	16.95	17.6		
	RB50#0	15.79	16.69	17.6		
15MHz QPSK	RB1#0	17.59	18.06	18.85	19.76	30
	RB1#38	17.83	18.41	19.28		
	RB1#74	18.2	18.8	19.59		
	RB36#0	16.79	17.33	18.06		
	RB36#39	16.95	17.72	18.45		
	RB75#0	16.81	17.51	18.19		
15MHz 16QAM	RB1#0	16.72	17.59	18.2	19.15	30
	RB1#38	17.38	17.89	18.55		
	RB1#74	17.57	18.23	18.98		
	RB36#0	15.82	16.4	17.29		
	RB36#39	16.14	16.76	17.64		
	RB75#0	15.95	16.64	17.41		
20MHz QPSK	RB1#0	17.65	18.06	19.31	20.02	30
	RB1#50	18.27	18.88	19.52		
	RB1#99	18.64	19.36	19.85		
	RB50#0	16.74	17.89	17.94		
	RB50#50	17.08	18.19	18.45		
	RB100#0	16.86	18.07	18.19		
20MHz 16QAM	RB1#0	16.66	18.53	17.2	19.2	30
	RB1#50	17.36	18.76	17.73		
	RB1#99	17.45	19.03	18.22		
	RB50#0	15.76	17.13	17.03		
	RB50#50	16.17	17.3	17.58		
	RB100#0	15.95	17.28	17.21		

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

Result: **Pass**

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	4.99	5.62	5.07	13
	RB100#0	4.29	4.23	4.14	13
20MHz 16QAM	RB1#0	5.97	6.67	5.91	13
	RB100#0	5.83	5.83	5.8	13

Result: **Pass**

FCC §2.1049, §27.53:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.102	1.102	1.102	1.260	1.254	1.260
1.4MHz 16QAM	1.09	1.102	1.102	1.25	1.260	1.260
3MHz QPSK	2.695	2.695	2.695	3.000	3.012	2.988
3MHz 16QAM	2.683	2.695	2.695	3.012	3.024	3.024
5MHz QPSK	4.511	4.491	4.511	5.000	4.980	5.000
5MHz 16QAM	4.531	4.531	4.511	5.020	5.000	4.980
10MHz QPSK	8.942	8.942	8.942	9.800	9.760	9.760
10MHz 16QAM	8.982	8.942	8.942	9.840	9.840	9.840
15MHz QPSK	13.473	13.533	13.533	15.060	15.120	15.000
15MHz 16QAM	13.533	13.533	13.533	15.180	15.000	15.000
20MHz QPSK	17.964	18.044	17.964	19.680	19.840	18.800
20MHz 16QAM	18.044	18.044	17.964	19.840	19.760	19.680

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal

Result: Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, § 27.53:Out of band emission, Band Edge

Result: Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §27.54: Frequency Stability

Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1711.054	1710.00	1754.028	1755
	-20	3.8	1711.051	1710.00	1754.023	1755
	-10	3.8	1711.070	1710.00	1754.026	1755
	0	3.8	1711.055	1710.00	1754.029	1755
	10	3.8	1711.058	1710.00	1754.029	1755
	20	3.8	1711.070	1710.00	1754.025	1755
	30	3.8	1711.080	1710.00	1754.009	1755
	40	3.8	1711.063	1710.00	1754.028	1755
Frequency Stability vs. Voltage	20	3.6	1711.069	1710.00	1754.038	1755
	20	4.35	1711.086	1710.00	1754.027	1755
					Result:	Pass

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1711.026	1710.00	1754.016	1755
	-20	3.8	1711.010	1710.00	1754.018	1755
	-10	3.8	1711.020	1710.00	1754.027	1755
	0	3.8	1711.027	1710.00	1754.014	1755
	10	3.8	1711.009	1710.00	1754.024	1755
	20	3.8	1711.005	1710.00	1754.027	1755
	30	3.8	1711.006	1710.00	1754.027	1755
	40	3.8	1711.013	1710.00	1754.022	1755
	50	3.8	1711.025	1710.00	1754.014	1755
Frequency Stability vs. Voltage	20	3.6	1711.018	1710.00	1754.027	1755
	20	4.35	1711.016	1710.00	1754.019	1755
					Result:	Pass