



TESTING LABORATORY  
CERTIFICATE #4820.01



FCC PART 22H, PART 24E  
MEASUREMENT AND TEST REPORT

For

**MAXWEST COMMUNICATION LIMITED**

ROOM 1802B FORTRESS TOWER 250 KING'S ROAD NORTH POINT,  
Hong Kong

**FCC ID:2ASP8NEOM6**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Mobile Phone
<b>Report Number:</b>	RDG191112001-00C
<b>Report Date:</b>	2019-12-11
<b>Reviewed By:</b>	Jerry Zhang EMC Manager <i>Jerry Zhang</i>
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	5
TEST FACILITY .....	5
DECLARATIONS.....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
JUSTIFICATION .....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	6
CONFIGURATION OF TEST SETUP .....	6
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>FCC §1.1310 &amp; §2.1093- RF EXPOSURE .....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
TEST RESULT .....	9
<b>FCC §2.1047 - MODULATION CHARACTERISTIC .....</b>	<b>10</b>
<b>FCC § 2.1046, § 22.913 (A) &amp; § 24.232 (C) - RF OUTPUT POWER.....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
TEST PROCEDURE .....	11
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST DATA .....	12
<b>FCC §2.1049, §22.917, §22.905 &amp; §24.238 - OCCUPIED BANDWIDTH .....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
TEST PROCEDURE .....	14
TEST EQUIPMENT LIST AND DETAILS.....	14
TEST DATA .....	14
<b>FCC §2.1051, §22.917(A) &amp; §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....</b>	<b>17</b>
APPLICABLE STANDARD .....	17
TEST PROCEDURE .....	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST DATA .....	17
<b>FCC §2.1053, §22.917 &amp; §24.238 - SPURIOUS RADIATED EMISSIONS .....</b>	<b>20</b>
APPLICABLE STANDARD .....	20
TEST PROCEDURE .....	20
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA .....	22
<b>FCC §22.917(A) &amp; §24.238(A)- BAND EDGES.....</b>	<b>23</b>
APPLICABLE STANDARD .....	23
TEST PROCEDURE .....	23
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST DATA .....	23

**FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY.....26**  
APPLICABLE STANDARD .....26  
TEST PROCEDURE .....26  
TEST EQUIPMENT LIST AND DETAILS.....27  
TEST DATA .....27

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>	Mobile Phone
<b>EUT Model:</b>	NEO M6
<b>Operation modes:</b>	GSM Voice, GPRS Data,
<b>Operation Frequency:</b>	GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX)
<b>Maximum Output Power: (Conducted)</b>	GSM 850 : 31.65dBm; PCS 1900:29.35 dBm
<b>Modulation Type:</b>	GMSK
<b>Adapter Information</b>	<b>Model:</b> Maxwest
	<b>Input:</b> 100-240Vac 50/60Hz 0.15A
	<b>Output:</b> 5Vdc 350mA
<b>Rated Input Voltage:</b>	DC 3.7V from battery or DC 5V from adapter
<b>Serial Number:</b>	RDG191112001-RF-S1
<b>EUT Received Date:</b>	2019.11.12
<b>EUT Received Status:</b>	Good

### Objective

This report is prepared on behalf of **MAXWEST COMMUNICATION LIMITED** in accordance with: Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC Rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

### Related Submittal(s)/Grant(s)

FCC Part 15C DSS submissions with FCC ID: 2ASP8NEOM6  
FCC Part 15B JBP submissions with FCC ID: 2ASP8NEOM6

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services  
Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D-2010.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

## Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

## Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “Δ”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

**SYSTEM TEST CONFIGURATION**

**Justification**

The EUT was configured for testing according to TIA/EIA-603-D 2010.


**Equipment Modifications**

No modification was made to the EUT.


**Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
R&S	Universal Radio Communication Tester	CMU200	106 891
Un-Known	ANTENNA	Un-Known	Un-Known

**Configuration of Test Setup**

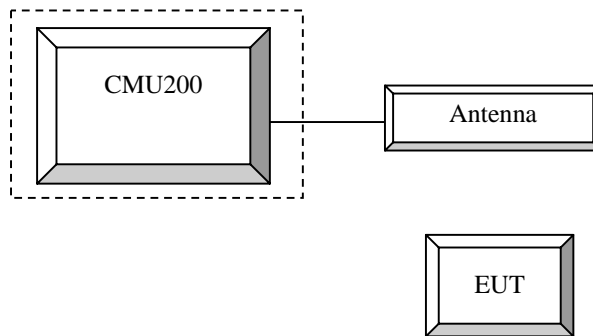

**Block Diagram of Test Setup**

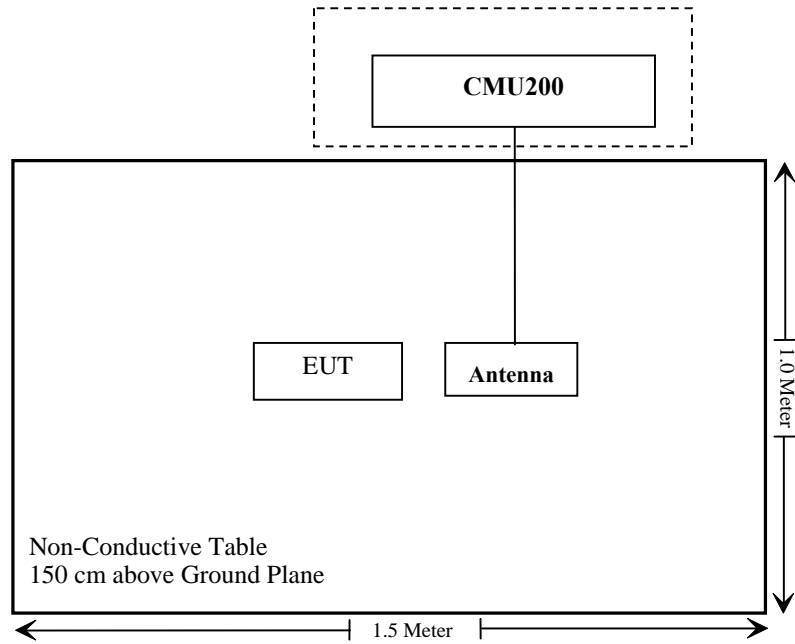

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§1.1310, §2.1093	RF Exposure	Compliance
§2.1046; § 22.913 (a); § 24.232 (c);	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238	Occupied Bandwidth	Compliance
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053 § 22.917 (a); § 24.238 (a)	Spurious Radiation Emissions	Compliance
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	Compliance
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance



---

---

## **FCC §1.1310 & §2.1093- RF EXPOSURE**

---

### **Applicable Standard**

FCC§1.1310 and §2.1093.

### **Test Result**

Compliance, please refer to the SAR report: RDG191112001-20.

---

## **FCC §2.1047 - MODULATION CHARACTERISTIC**

---

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

## **FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER**

### **Applicable Standard**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### **Test Procedure**

#### **GSM/GPRS/EGPRS**

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config, off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100035	2019-08-03	2020-08-03
Sunol Sciences	Antenna	JB3	A060611-2	2017-08-25	2020-08-25
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2019-09-24	2020-09-24
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2019-09-05	2020-09-05
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-05-09	2020-05-09
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2019-09-05	2020-09-05
Sinoscite	Band-stop filter	BSF2500-2750MS-1439-001	1437001	2019-06-16	2020-06-16
R&S	Universal Radio Communication Tester	CMU200	106 891	2018-12-14	2019-12-14
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	/

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

<b>Temperature:</b>	23.5°C
<b>Relative Humidity:</b>	34 %
<b>ATM Pressure:</b>	102.5 kPa

\* The testing was performed by Lily Xie from 2019-12-06.

Test Result: Compliance

**Conducted Output Power**

**Cellular Band & PCS Band**

Band	Channel No.	Conducted Peak Output Power (dBm)				
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot
Cellular	128	31.20	31.32	30.05	28.62	27.28
	190	31.20	31.63	30.05	28.66	27.26
	251	31.50	31.65	30.11	28.71	27.21
PCS	512	29.30	29.35	27.32	26.08	24.53
	661	29.20	29.19	27.24	26.13	24.58
	810	29.10	29.11	27.32	26.04	24.49

**ERP & EIRP**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
<b>GSM 850 Middle Channel</b>								
836.60	H	91.02	16.79	0.00	0.50	16.29	38.45	22.16
836.60	V	99.77	28.51	0.00	0.50	28.01	38.45	10.44
<b>PCS 1900 Middle Channel</b>								
1880.00	H	92.60	19.99	11.66	2.66	28.99	33.00	4.01
1880.00	V	88.04	15.57	11.66	2.66	24.57	33.00	8.43

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2: Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit - Absolute Level

**FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH**


**Applicable Standard**

FCC §2.1049, §22.917, §22.905, §24.238

**Test Procedure**

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

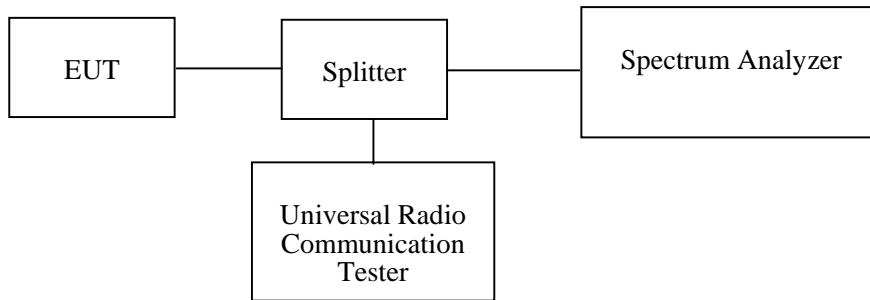

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2019-01-09	2020-01-09
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010013	Each time	/
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	/
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	/

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	23.5°C
<b>Relative Humidity:</b>	34 %
<b>ATM Pressure:</b>	102.5 kPa

\* The testing was performed by Lily Xie from 2019-12-06.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.


Band	Test Channel	Mode	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
Cellular	Middle	GSM	0.243	0.315
PCS		GSM	0.246	0.316

GSM Cellular 850



Date: 6.DEC.2019 09:40:03

### GSM PCS1900

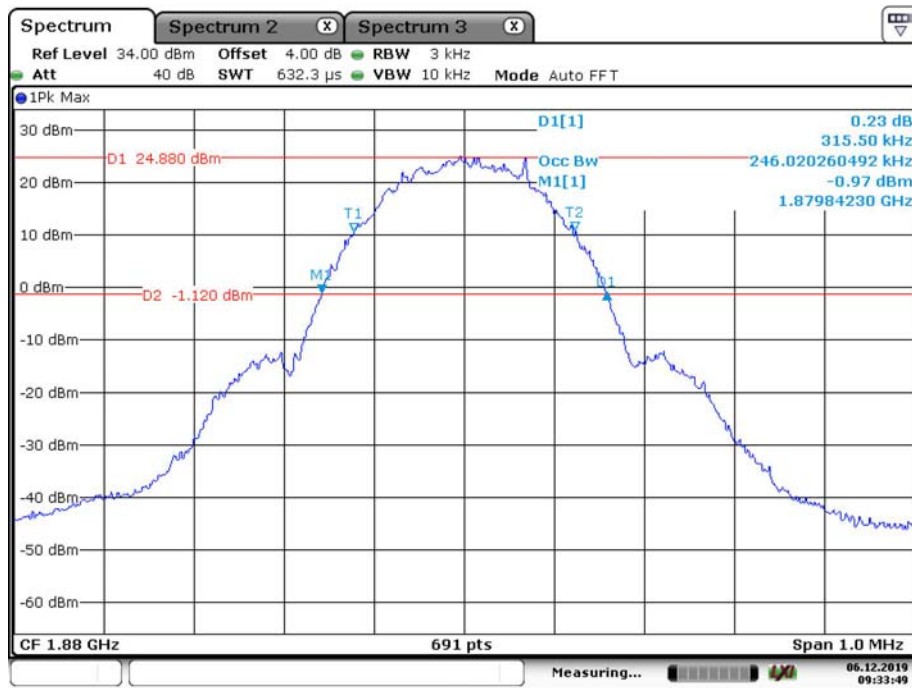

Date: 6.DEC.2019 09:33:50



## FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


### Applicable Standard

FCC §2.1051, §22.917(a) , §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

### Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

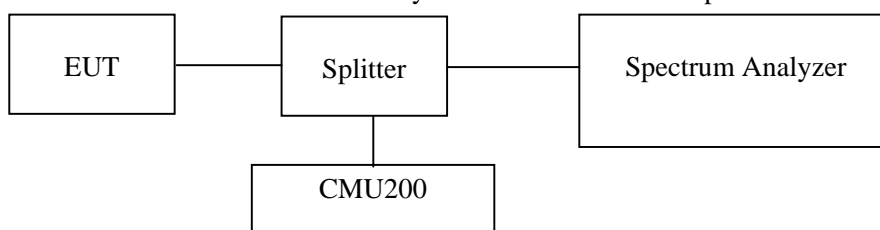

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2019-01-09	2020-01-09
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010013	Each time	/
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	/
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	/

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data


#### Environmental Conditions

<b>Temperature:</b>	23.5°C
<b>Relative Humidity:</b>	34 %
<b>ATM Pressure:</b>	102.5 kPa

\* The testing was performed by Lily Xie on 2019-12-06


Test Result: Compliance. Please refer to the following plots.

### GSM850 Middle Channel

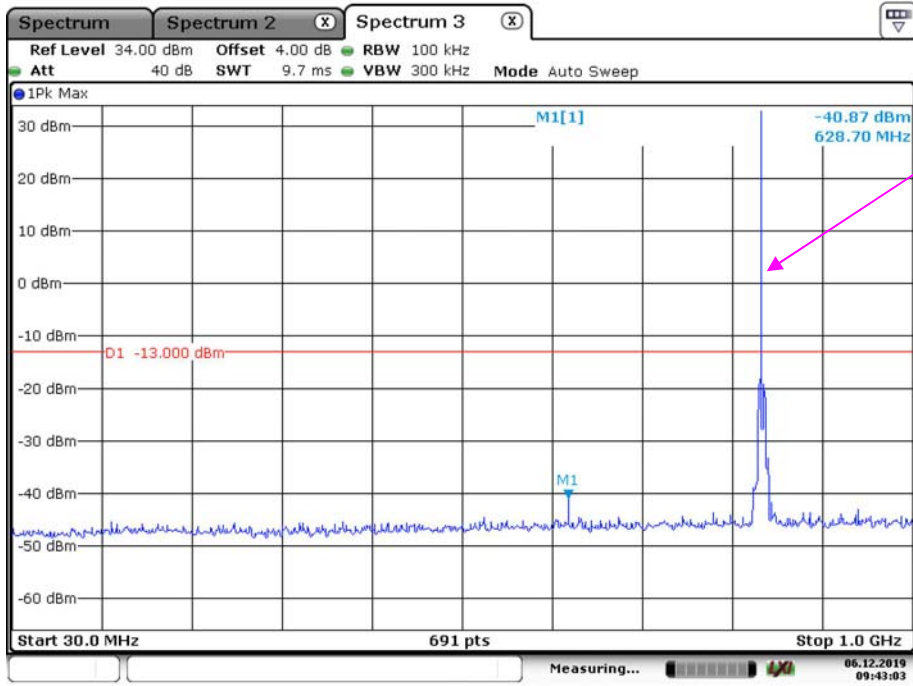


Fundamental

Date: 6.DEC.2019 09:43:04

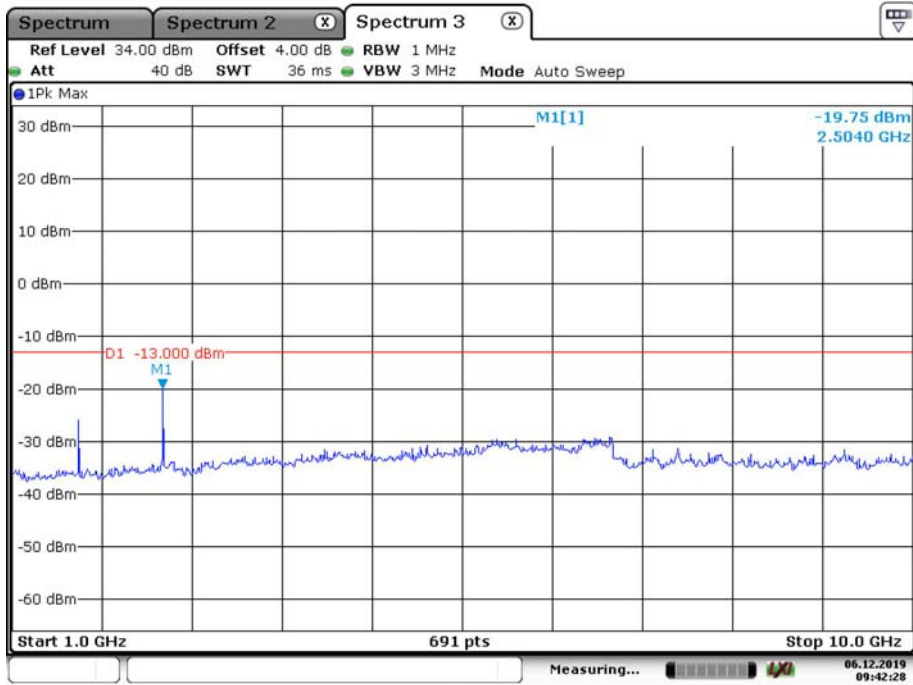


Date: 6.DEC.2019 09:42:29

### PCS 1900 Middle Channel

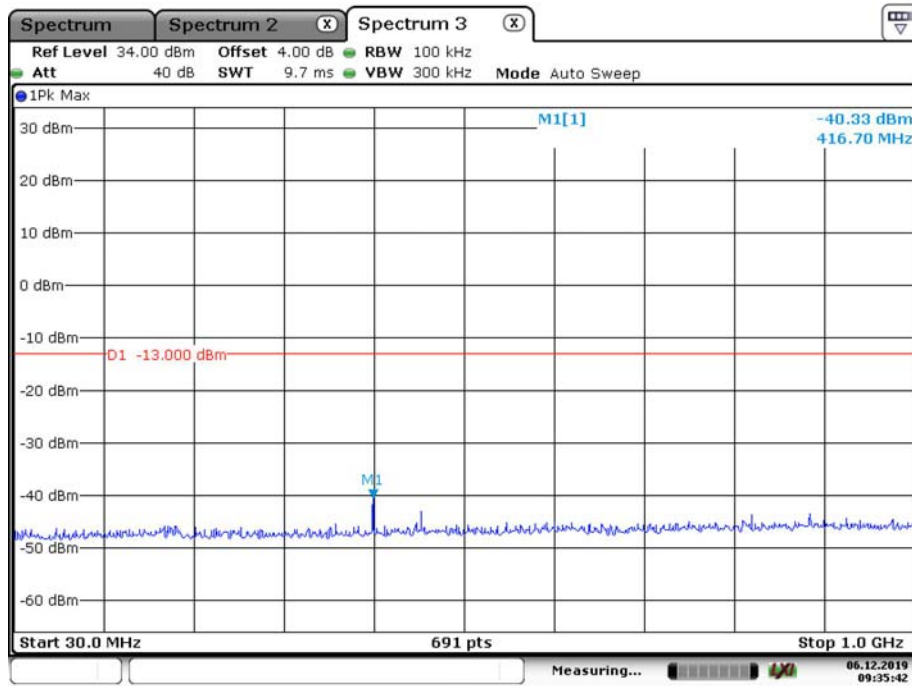

Date: 6.DEC.2019 09:35:43

Fundamental

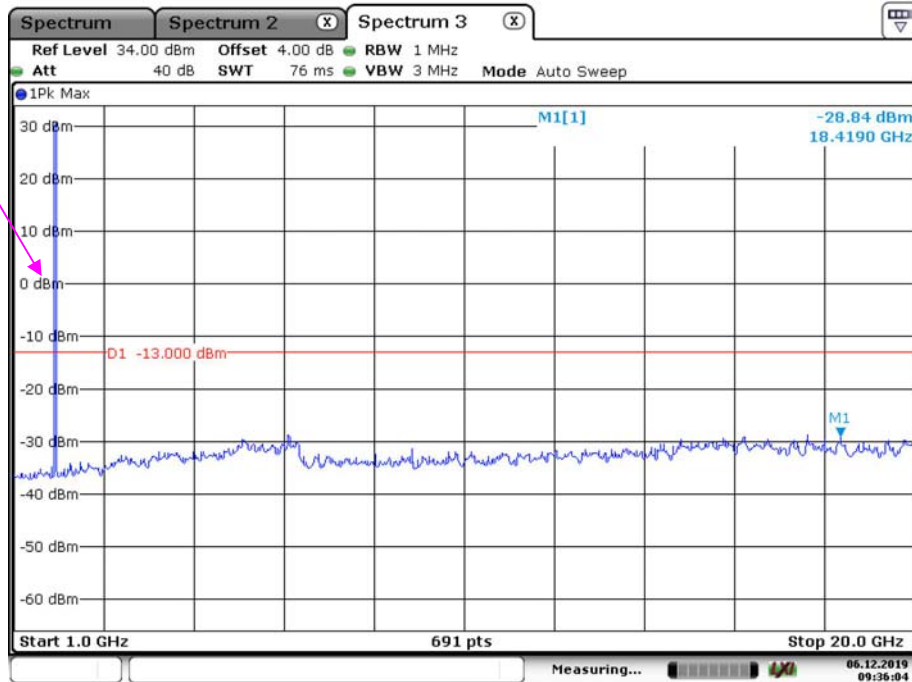

Date: 6.DEC.2019 09:36:05

---

## **FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS**

---

### **Applicable Standard**

FCC § 2.1053, §22.917, § 24.238

### **Test Procedure**

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =  $10 \lg(\text{TXpwr in Watts}/0.001)$  – the absolute level

Spurious attenuation limit in dB =  $43 + 10 \text{Log}_{10}(\text{power out in Watts})$

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100035	2019-08-03	2020-08-03
Sunol Sciences	Antenna	JB3	A060611-2	2017-08-25	2020-08-25
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2019-09-24	2020-09-24
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2019-09-05	2020-09-05
Sonoma	Amplifier	310N	185914	2019-10-13	2020-10-13
R&S	Universal Radio Communication Tester	CMU200	106 891	2018-12-14	2019-12-14
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-05-09	2020-05-09
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2019-09-05	2020-09-05
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2019-09-05	2020-09-05
Sinoscite	Band-stop filter	BSF824-862MS-1438-001	1438001	2019-06-16	2020-06-16
Sinoscite	Band-stop filter	BSF1850-1910MS-0935V2	0935V2	2019-06-16	2020-06-16
R&S	Universal Radio Communication Tester	CMU200	106 891	2019-09-12	2020-09-12
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2019-11-18	2022-11-18
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2019-11-18	2022-11-18
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2019-06-27	2020-06-27

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

<b>Temperature:</b>	23.7~24.2 °C
<b>Relative Humidity:</b>	36~40 %
<b>ATM Pressure:</b>	100.6~101.1 kPa

The testing was performed by Jackson Zhang & Lucy Lu on 2019-12-03 & 2019-12-05.

Test Result: Compliance.

EUT Operation Mode: Transmitting

**Cellular Band (PART 22H)****30 MHz-10 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM850 Middle Channel, Frequency:836.600 MHz								
1673.200	H	60.12	-43.82	10.6	0.73	-33.9	-13.0	20.9
1673.200	V	72.04	-32.5	10.6	0.73	-22.6	-13.0	9.6
2509.800	H	51.92	-50.99	13.1	1.25	-39.1	-13.0	26.1
2509.800	V	55.18	-47.76	13.1	1.25	-35.9	-13.0	22.9
3346.400	H	41.18	-58.5	13.8	1.61	-46.3	-13.0	33.3
3346.400	V	40.64	-59.08	13.8	1.61	-46.9	-13.0	33.9
1948.000	H	38.27	-64.55	11.9	1.07	-53.7	-13.0	40.7
1948.000	V	48.14	-55.03	11.9	1.07	-44.2	-13.0	31.2
132.260	H	49.36	-60.51	0.0	0.22	-60.7	-13.0	47.7
98.550	V	50.06	-57.52	0.0	0.11	-57.6	-13.0	44.6

**PCS Band (PART 24E)****30 MHz-20 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM1900, Middle Channel:1880.000 MHz								
3760.000	H	52.94	-44.7	13.8	1.63	-32.6	-13.0	19.6
3760.000	V	46.83	-50.67	13.8	1.63	-38.5	-13.0	25.5
5640.000	H	47.38	-46.21	14.0	1.31	-33.5	-13.0	20.5
5640.000	V	51.70	-41.78	14.0	1.31	-29.1	-13.0	16.1
182.310	H	48.50	-62.6	0.0	0.23	-62.8	-13.0	49.8
73.460	V	51.25	-54.77	-3.3	0.18	-58.2	-13.0	45.2

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

**FCC §22.917(a) & §24.238(a)- BAND EDGES**


**Applicable Standard**

FCC § 2.1053, §22.917, § 24.238.

**Test Procedure**

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

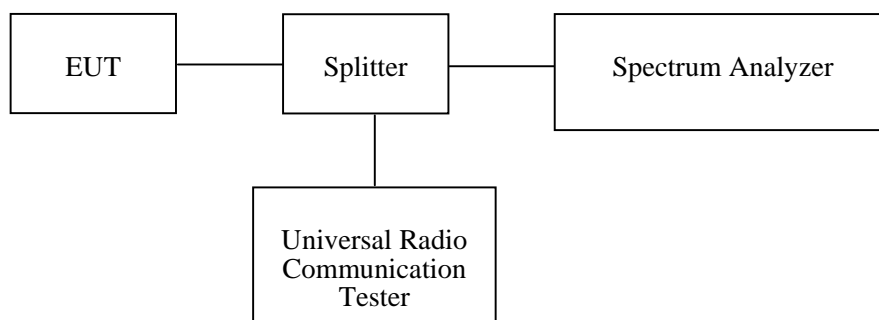

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2019-01-09	2020-01-09
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010013	Each time	/
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	/
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	/

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data**

**Environmental Conditions**


<b>Temperature:</b>	23.5 °C
<b>Relative Humidity:</b>	34%
<b>ATM Pressure:</b>	102.5 kPa

\* The testing was performed by Lily Xie on 2019-12-06.

*Test Mode: Transmitting*


*Test Result: Compliance. Please refer to the following plots.*

### GSM 850, Left Band Edge

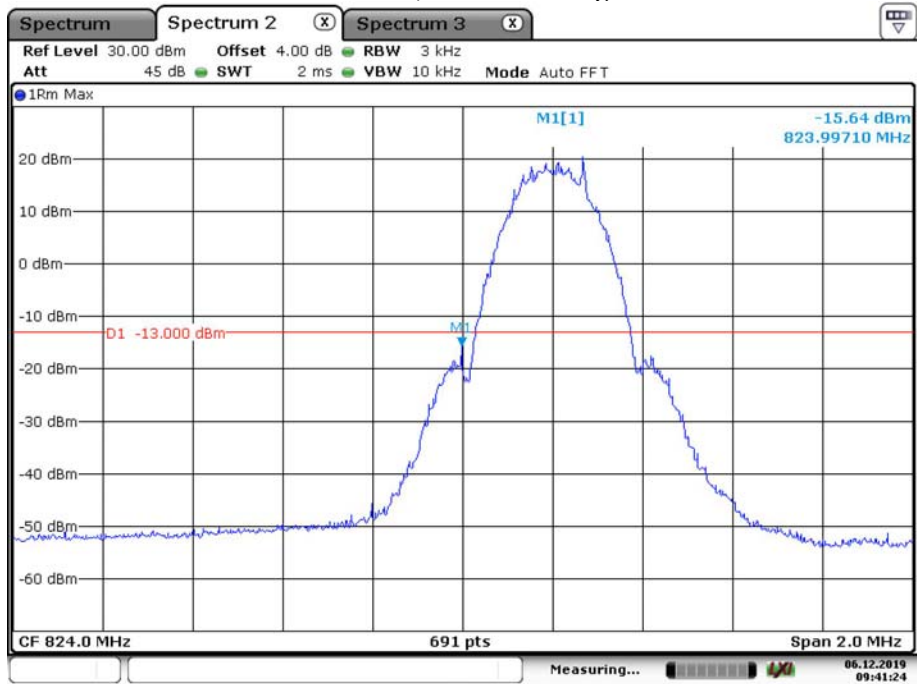

Date: 6.DEC.2019 09:41:25


### GSM 850, Right Band Edge

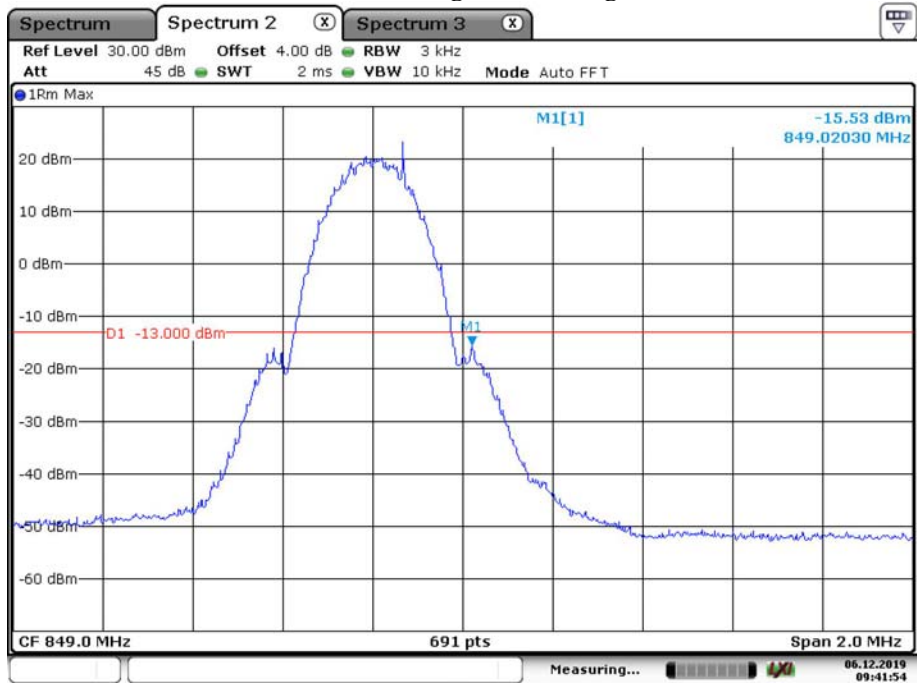

Date: 6.DEC.2019 09:41:55




### GSM 1900, Left Band Edge

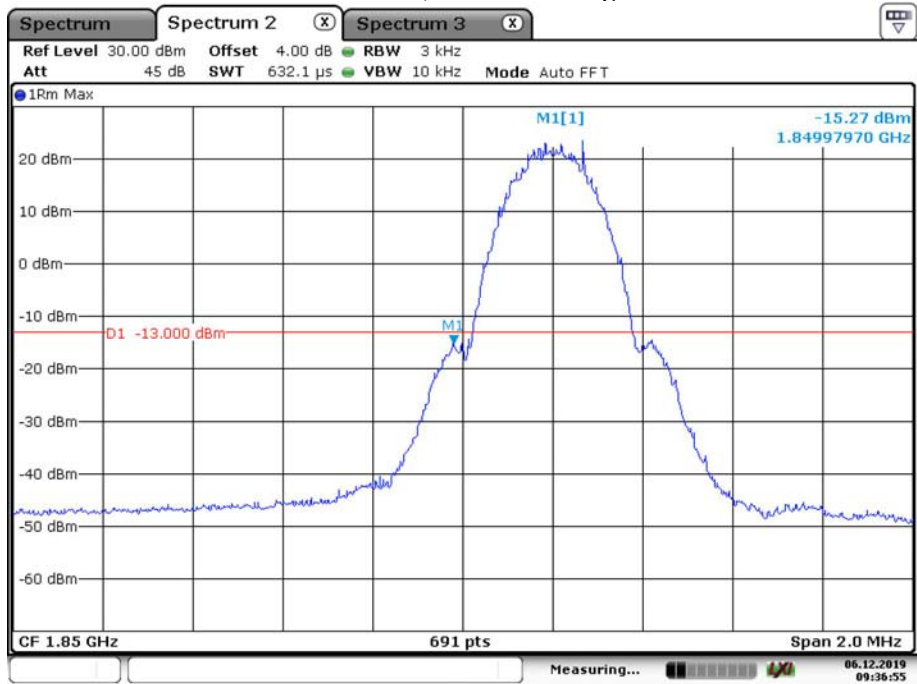

Date: 6.DEC.2019 09:36:56

### GSM 1900, Right Band Edge

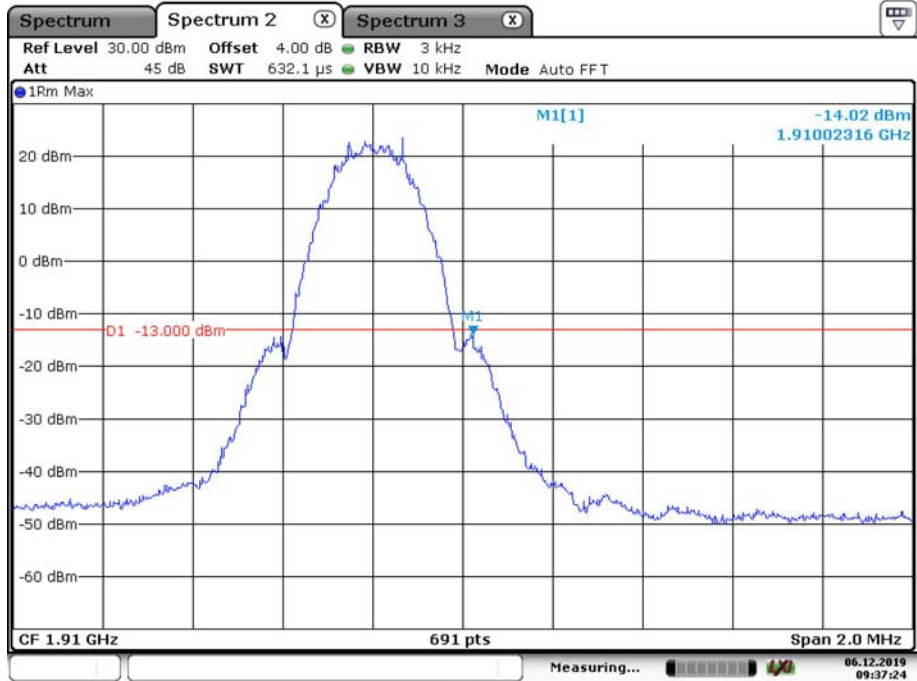

Date: 6.DEC.2019 09:37:25

**FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY**

**Applicable Standard**

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

**Test Procedure**

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

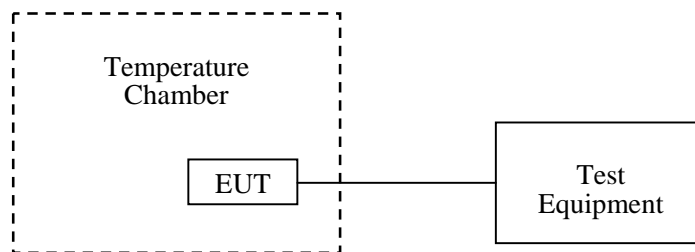

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005011	Each time	/
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	/
E-Microwave	Blocking Control	EMDCB-00036	0E01201048	Each time	/
E-Microwave	Coaxial Attenuators	EMCA10-5RN-6	0E01203239	Each time	/
R&S	Universal Radio Communication Tester	CMU200	106 891	2019-09-12	2020-09-12
ESPEC	Constant temperature and humidity Tester	ESX-4CA	018 463	2019-03-26	2020-03-26
UNI-T	Multimeter	UT39A	M130199938	2019-07-23	2020-07-23
Pro instrument	DC Power Supply	pps3300	3300012	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

<b>Temperature:</b>	23.5 °C
<b>Relative Humidity:</b>	34 %
<b>ATM Pressure:</b>	102.5 kPa

\* *The testing was performed by Lily Xie on 2019-12-06.*

*Test Result: Compliance.*

**Cellular Band**

GMSK, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V <sub>DC</sub>	Hz	ppm	ppm
-30	3.7	8	0.00956	2.5
-20		6	0.00717	
-10		4	0.00478	
0		6	0.00717	
10		7	0.00837	
20		5	0.00598	
30		7	0.00837	
40		6	0.00717	
50		4	0.00478	
20		3.5	9	
20	4.2	8	0.00956	

**PCS Band**

PCS1900, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Results
°C	V <sub>DC</sub>	Hz	ppm	
-30	3.7	8	0.00426	Pass
-20		9	0.00479	
-10		5	0.00266	
0		6	0.00319	
10		7	0.00372	
20		6	0.00319	
30		8	0.00426	
40		7	0.00372	
50		5	0.00266	
20		3.5	9	
20	4.2	8	0.00426	

**\*\*\*\*\* END OF REPORT \*\*\*\*\***