

**Test Plot 1#: GSM 850\_Head Left Cheek\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 41.536$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0354 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.378 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0380 W/kg

**SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.025 W/kg**

Maximum value of SAR (measured) = 0.0347 W/kg

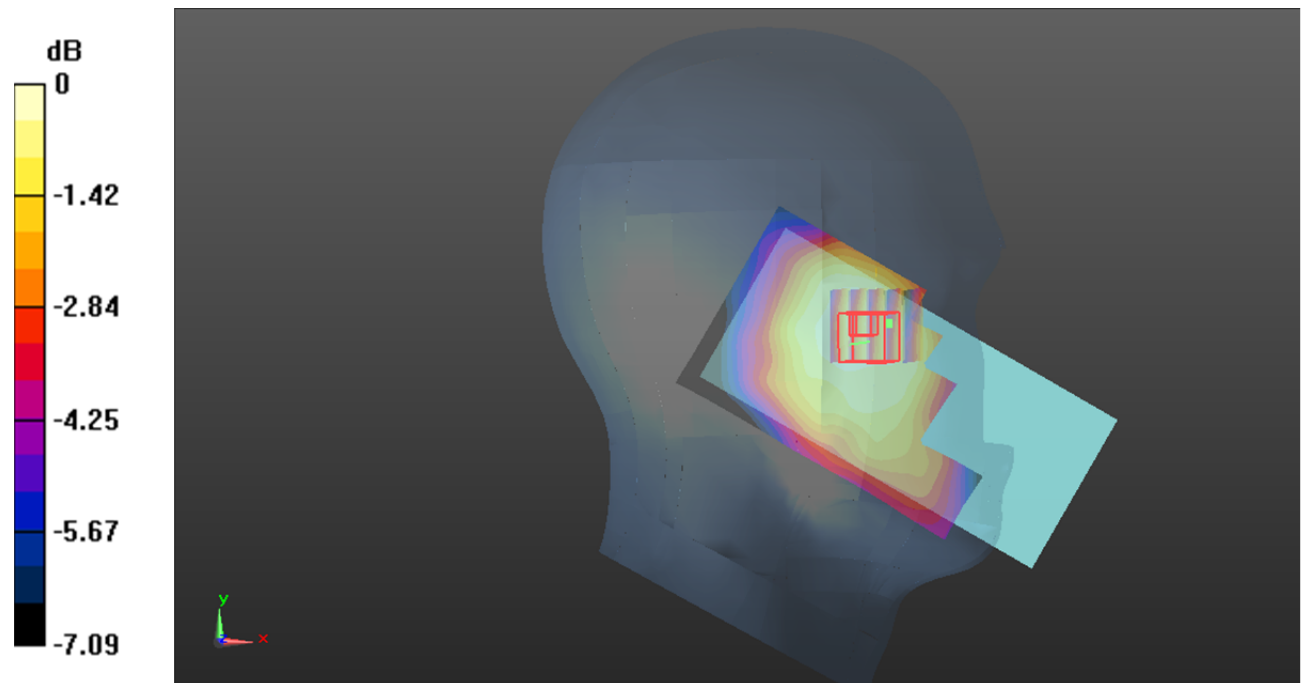

0 dB = 0.0347 W/kg = -14.60 dB dBW/kg

**Test Plot 2#: GSM 850\_Head Left Tilt\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 41.536$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0355 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.897 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0380 W/kg

**SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0340 W/kg

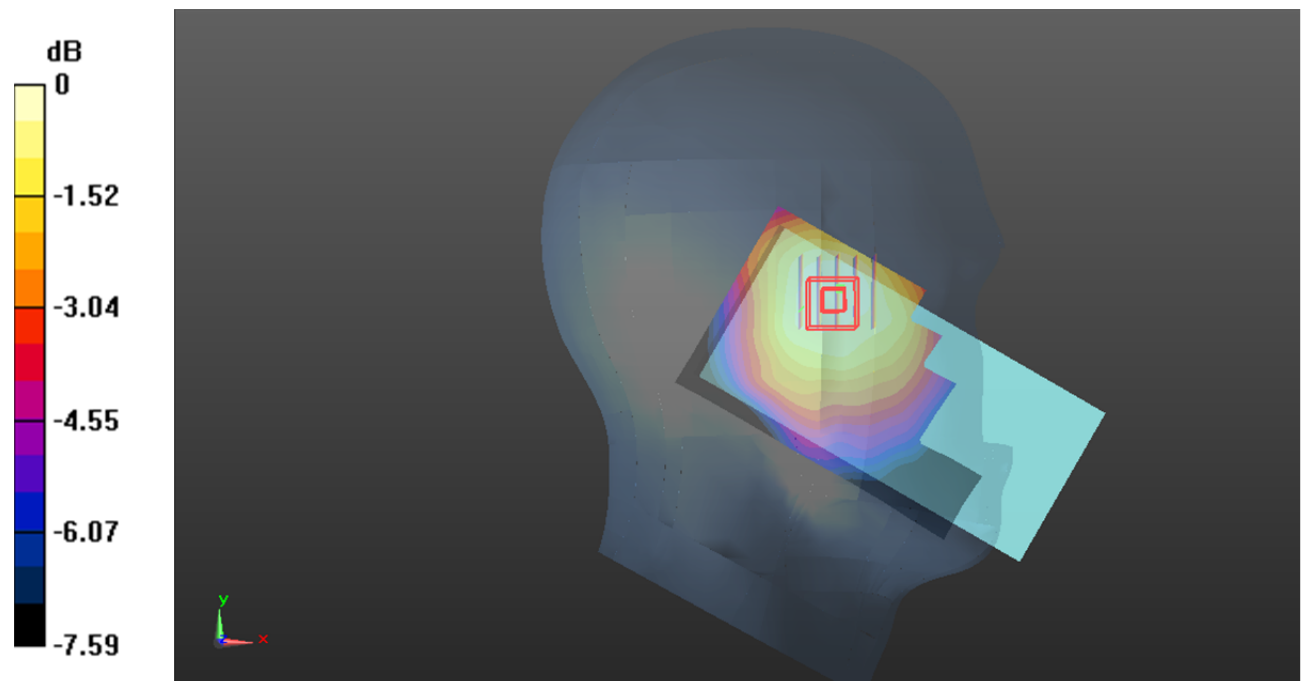

0 dB = 0.0340 W/kg = -14.69 dB dBW/kg

**Test Plot 3#: GSM 850\_Head Right Cheek\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 41.536$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.184 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.942 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.202 W/kg

**SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.123 W/kg**

Maximum value of SAR (measured) = 0.184 W/kg

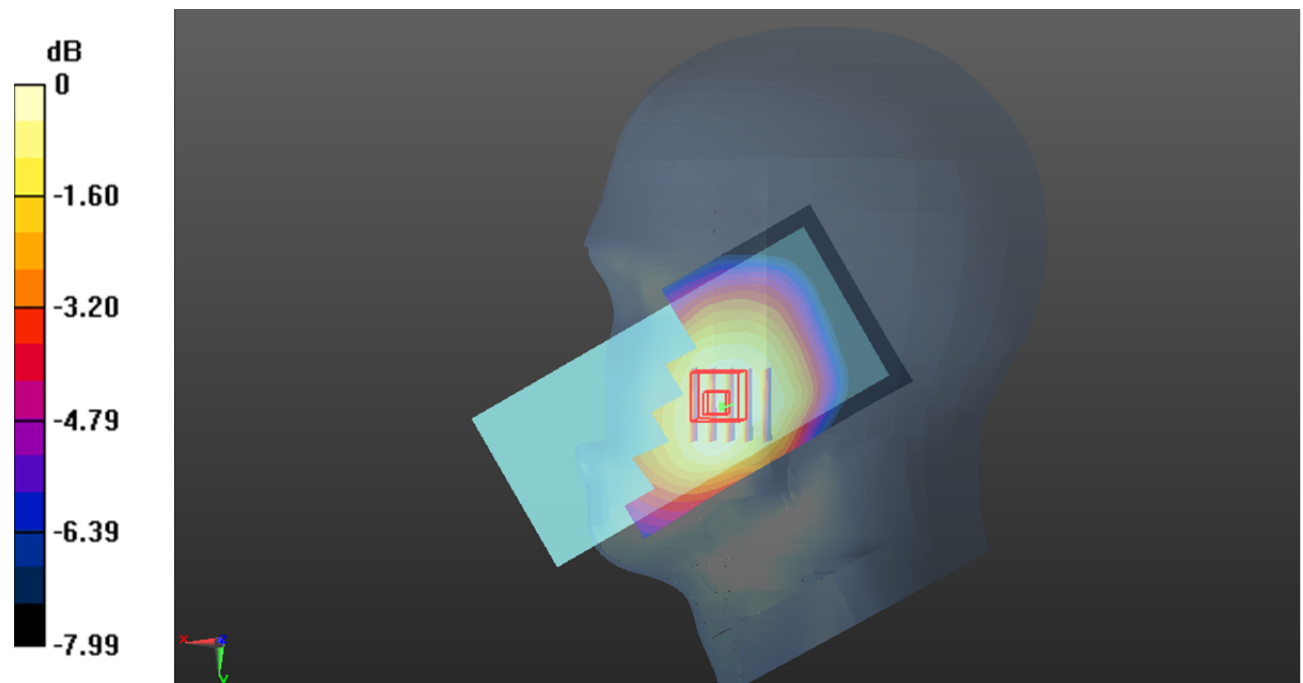

0 dB = 0.184 W/kg = -7.35 dB dBW/kg

**Test Plot 4#: GSM 850\_Head Right Tilt\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 41.536$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0569 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.252 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0610 W/kg

**SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.035 W/kg**

Maximum value of SAR (measured) = 0.0550 W/kg

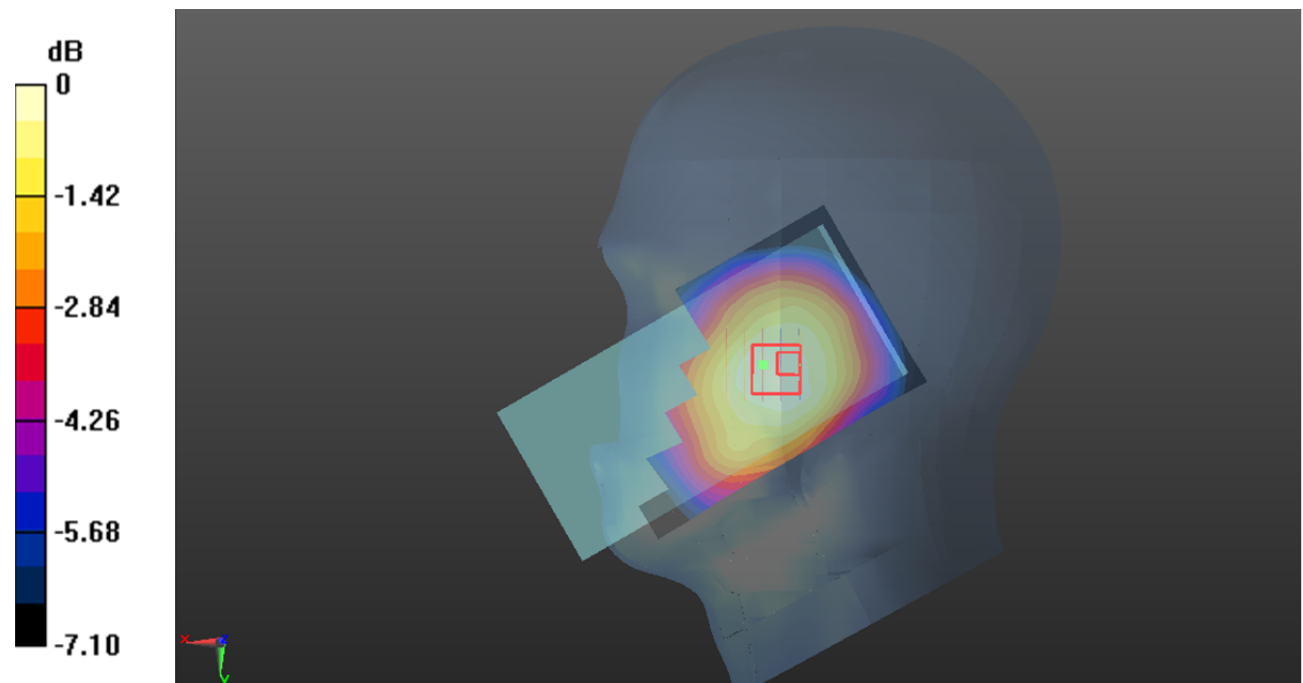

0 dB = 0.0550 W/kg = -12.60 dB dBW/kg

**Test Plot 5#: GSM 850\_Body Worn Front\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 41.536$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.221 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.414 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.234 W/kg

**SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.079 W/kg**

Maximum value of SAR (measured) = 0.190 W/kg

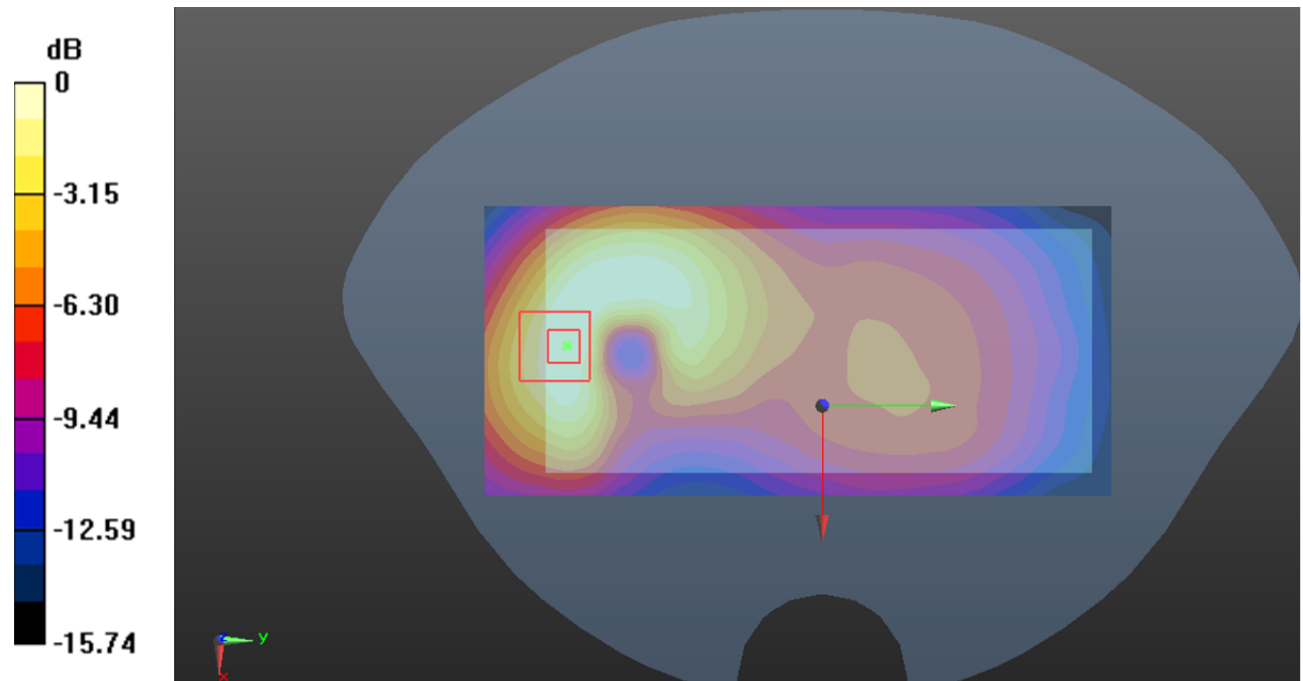

0 dB = 0.190 W/kg = -7.21 dB dBW/kg

**Test Plot 6#: GSM 850\_Body Worn Back\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 41.536$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.641 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.47 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.901 W/kg

**SAR(1 g) = 0.447 W/kg; SAR(10 g) = 0.240 W/kg**

Maximum value of SAR (measured) = 0.702 W/kg

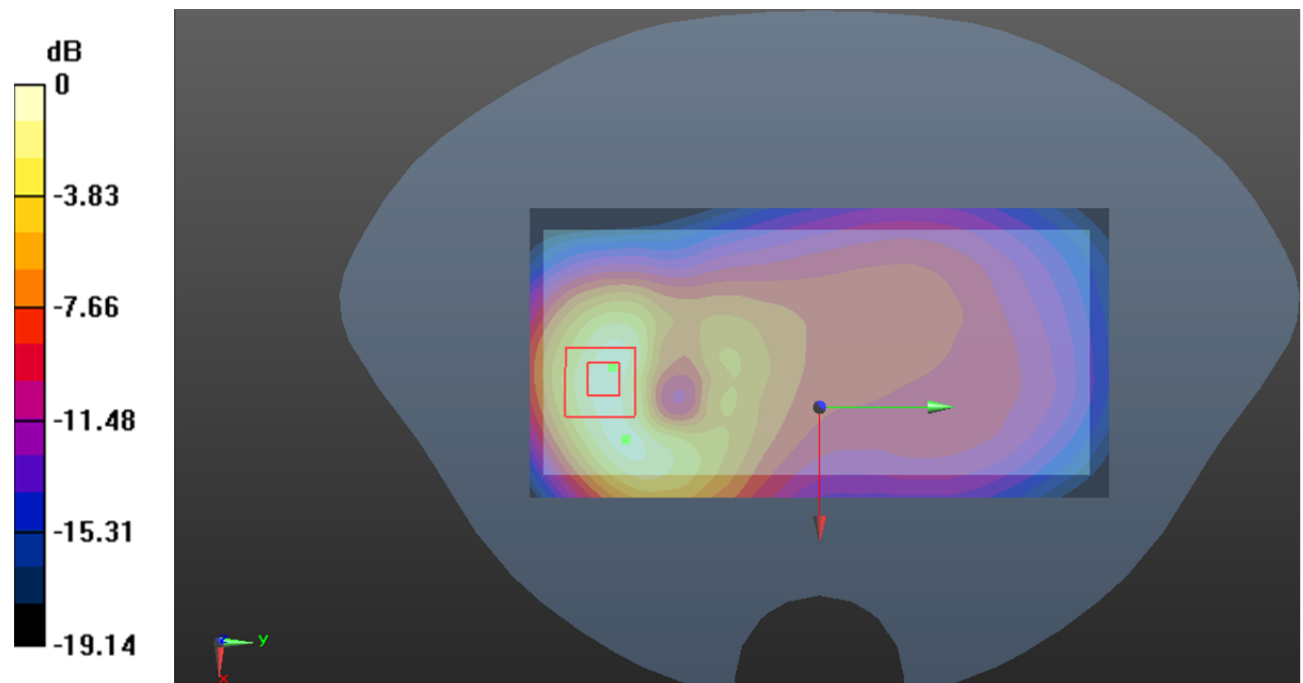

0 dB = 0.702 W/kg = -1.54 dB dBW/kg

**Test Plot 7#: GSM 850\_Body Front\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 41.536$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.237 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.56 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.285 W/kg

**SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.091 W/kg**

Maximum value of SAR (measured) = 0.218 W/kg

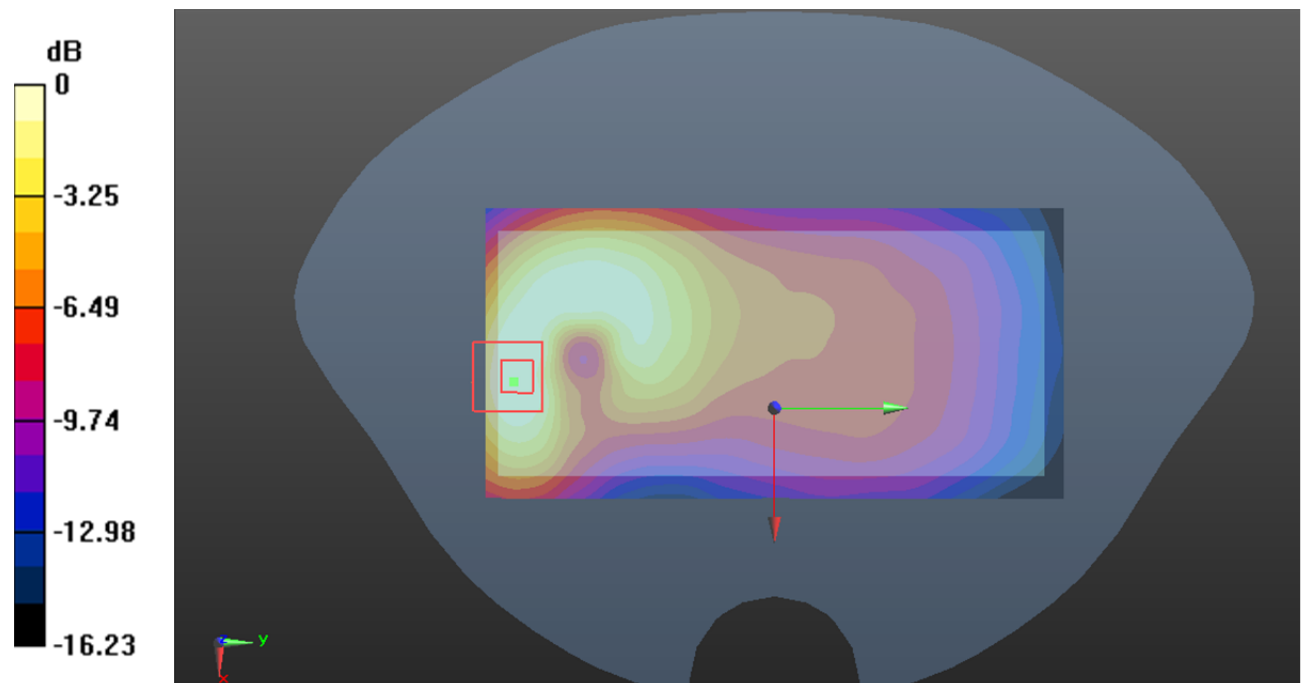

0 dB = 0.218 W/kg = -6.62 dB dBW/kg

**Test Plot 8#: GSM 850\_Body Back\_Low****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GPRS-4 slots (0); Frequency: 824.2 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.904$  S/m;  $\epsilon_r = 41.789$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @824.2 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.837 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.13 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.556 W/kg; SAR(10 g) = 0.306 W/kg**

Maximum value of SAR (measured) = 0.855 W/kg

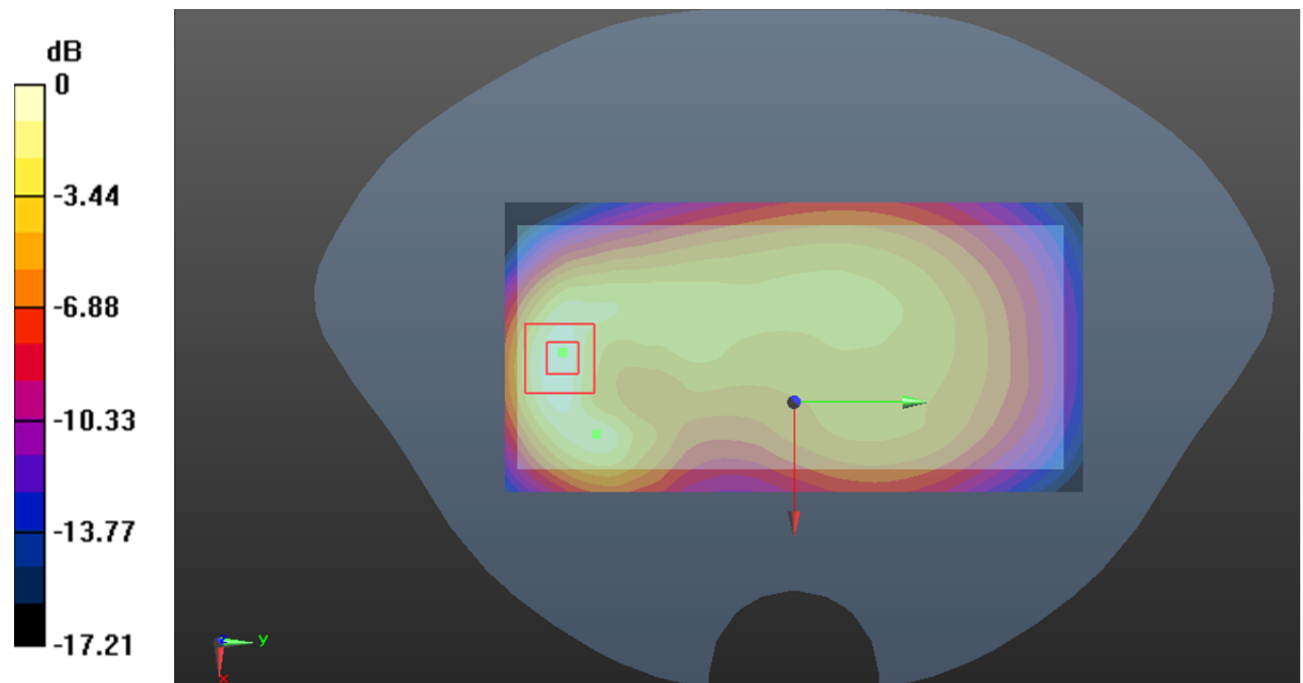

0 dB = 0.855 W/kg = -0.68 dB dBW/kg



**Test Plot 9#: GSM 850\_Body Back\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 41.536$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.753 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.45 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.526 W/kg; SAR(10 g) = 0.288 W/kg**

Maximum value of SAR (measured) = 0.817 W/kg

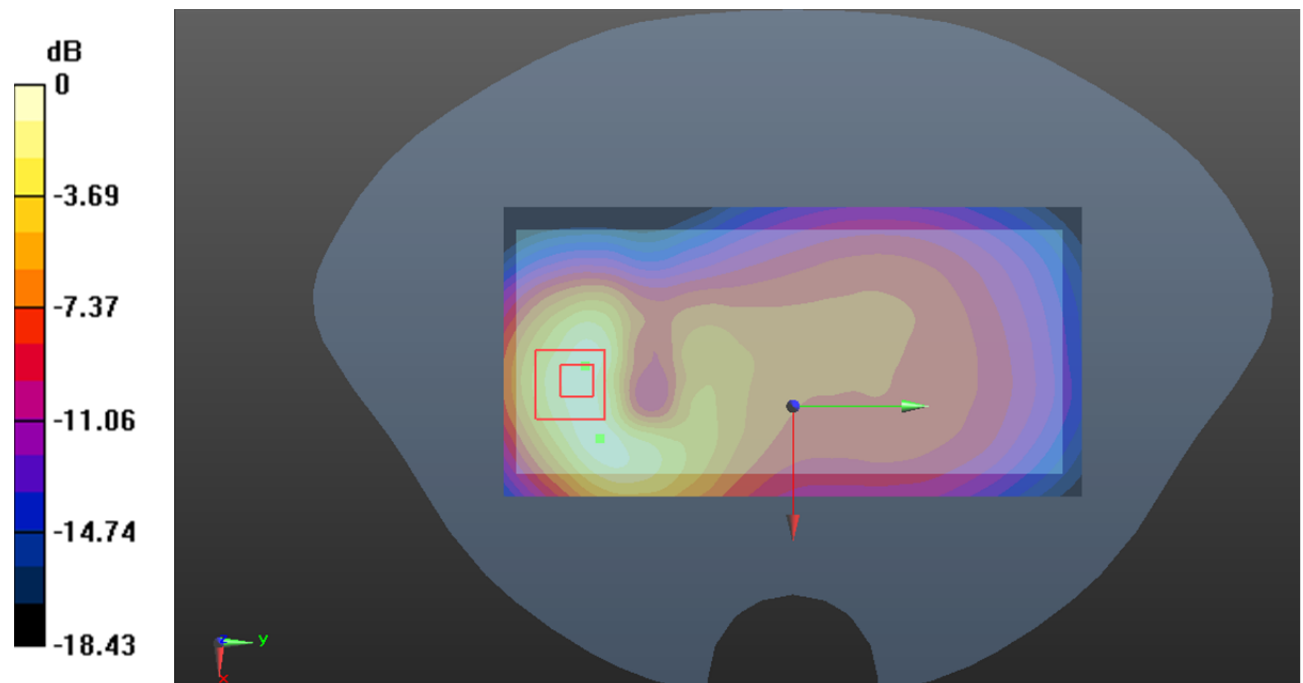

0 dB = 0.817 W/kg = -0.88 dB dBW/kg

**Test Plot 10#: GSM 850\_Body Back\_High****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GPRS-4 slots (0); Frequency: 848.8 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 848.8$  MHz;  $\sigma = 0.947$  S/m;  $\epsilon_r = 40.894$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @848.8 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.937 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.73 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.22 W/kg

**SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.358 W/kg**

Maximum value of SAR (measured) = 0.964 W/kg

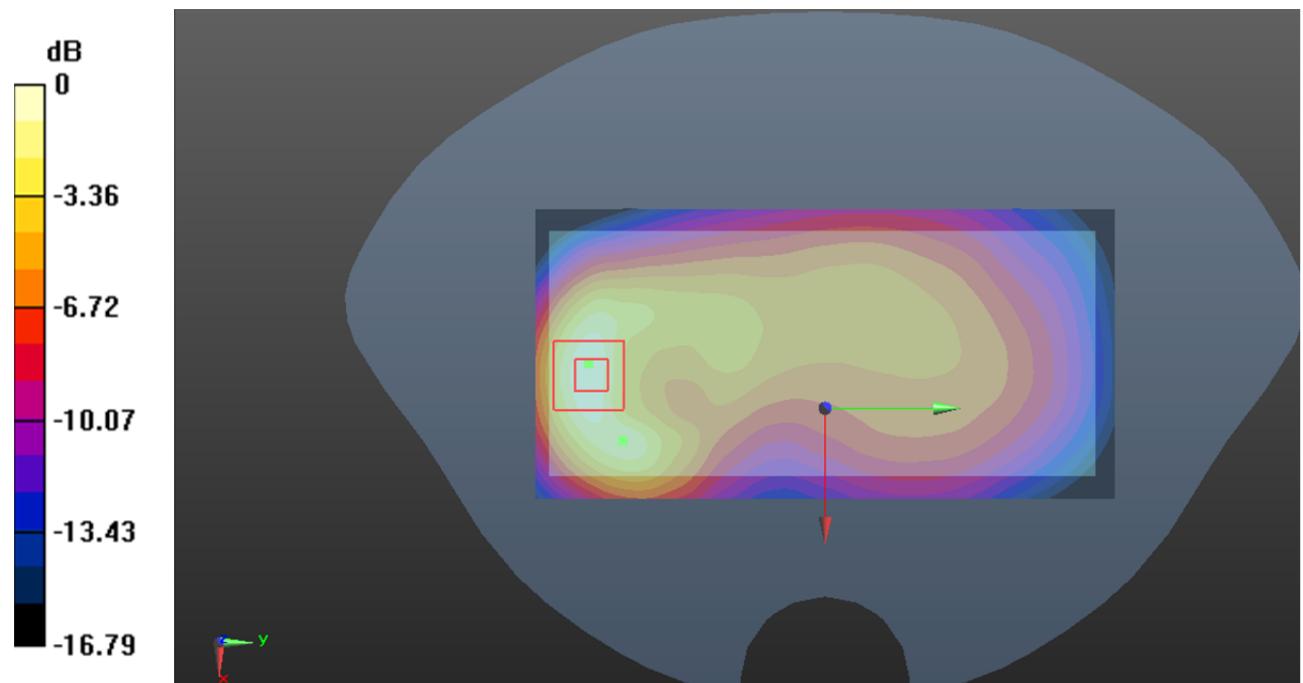

0 dB = 0.964 W/kg = -0.16 dB dBW/kg

**Test Plot 11#: GSM 850\_Body Left\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 41.536$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.147 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.19 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.165 W/kg

**SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.072 W/kg**

Maximum value of SAR (measured) = 0.143 W/kg

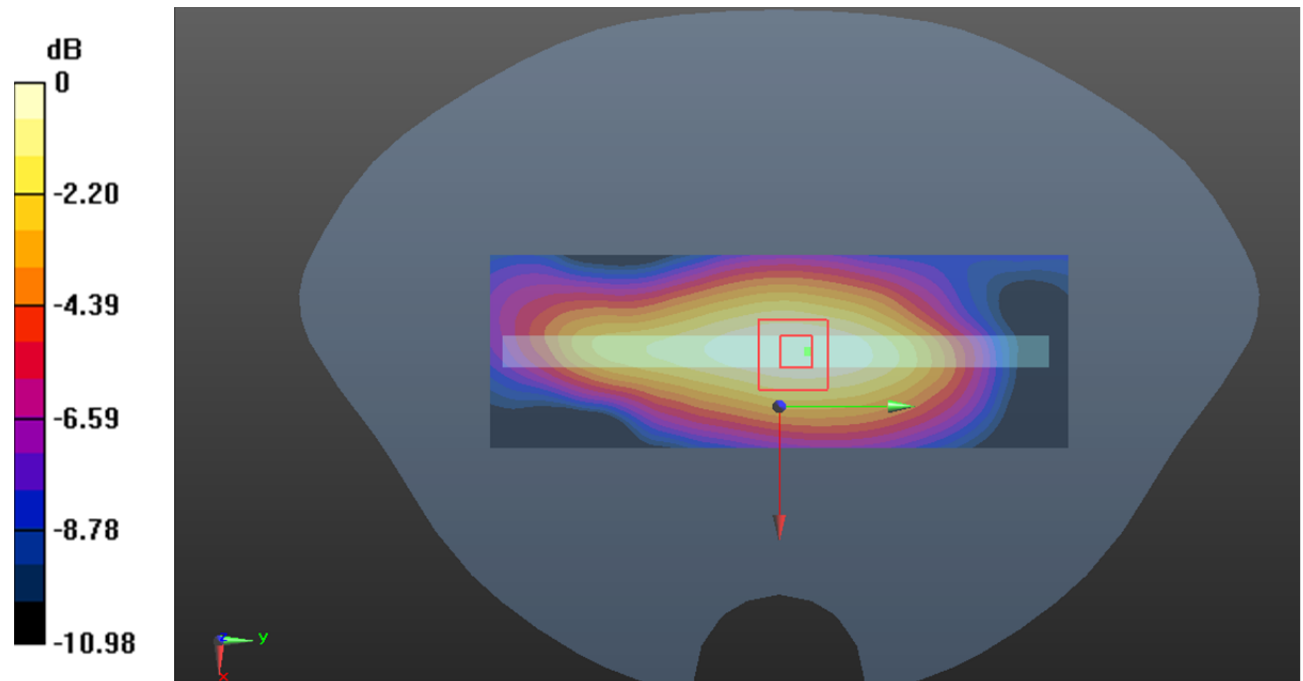

0 dB = 0.143 W/kg = -8.45 dB dBW/kg

**Test Plot 12#: GSM 850\_Body Right\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 41.536$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0803 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.291 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0920 W/kg

**SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.041 W/kg**

Maximum value of SAR (measured) = 0.0795 W/kg

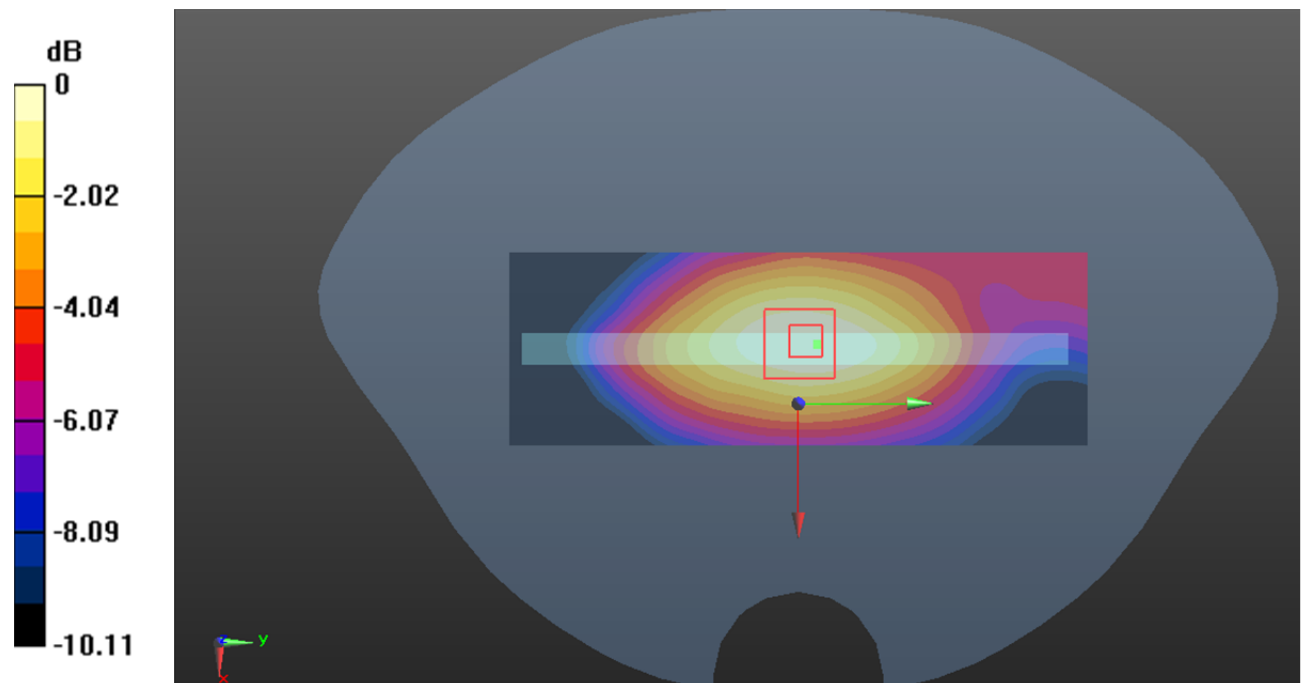

0 dB = 0.0795 W/kg = -11.00 dB dBW/kg

**Test Plot 13#: GSM 850\_Body Bottom\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 41.536$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.7, 9.7, 9.7) @836.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.464 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.12 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.609 W/kg

**SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.152 W/kg**

Maximum value of SAR (measured) = 0.474 W/kg

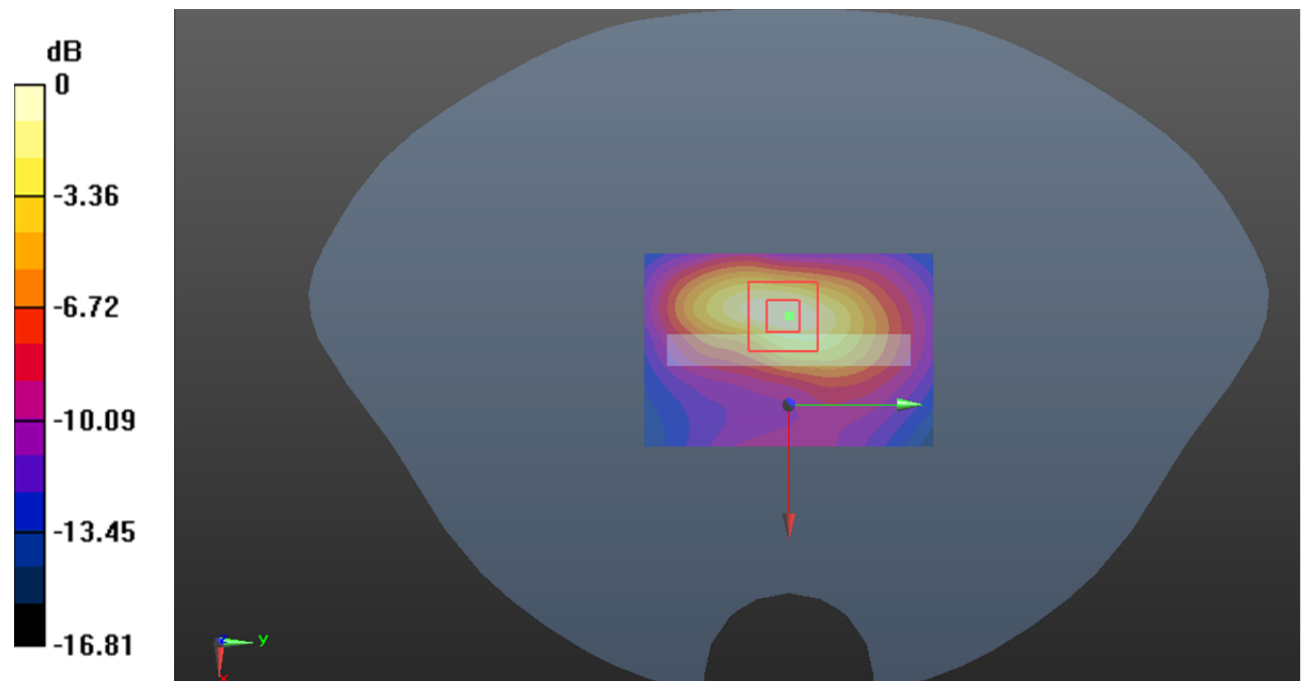

0 dB = 0.474 W/kg = -3.24 dB dBW/kg

**Test Plot 14#: PCS 1900\_Head Left Cheek\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.412$  S/m;  $\epsilon_r = 39.621$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0890 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.069 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0990 W/kg

**SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.044 W/kg**

Maximum value of SAR (measured) = 0.0859 W/kg

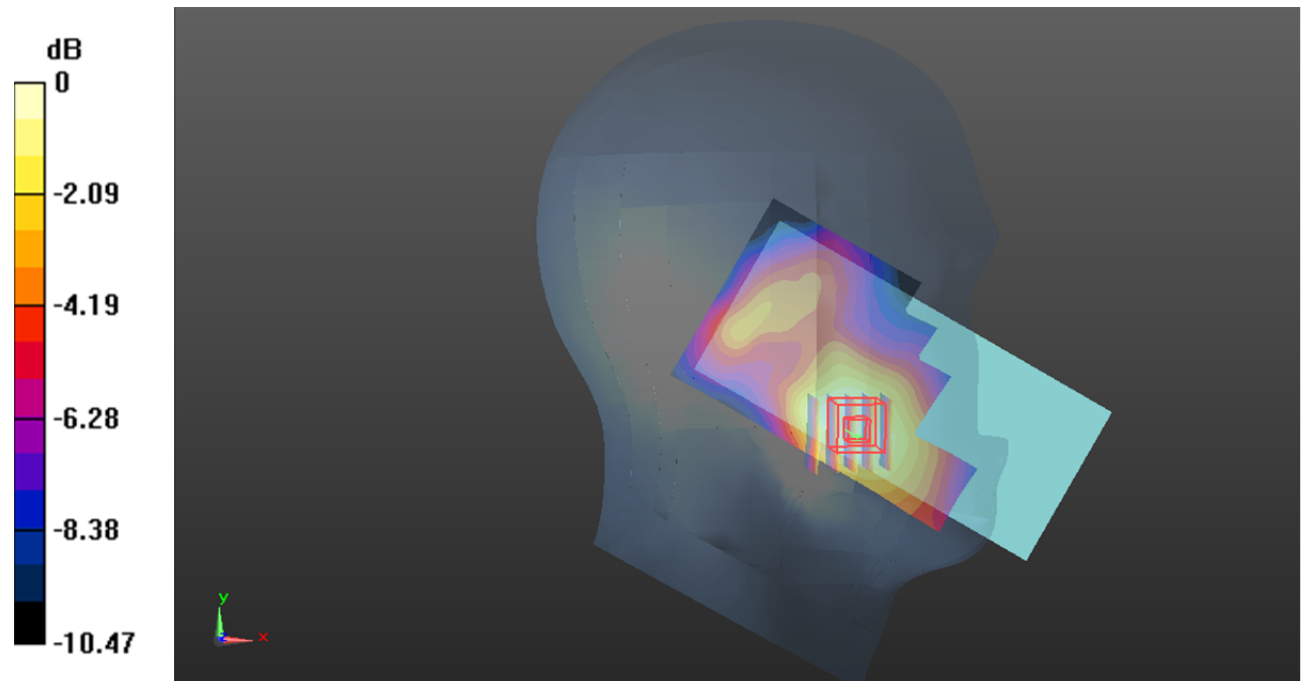

0 dB = 0.0859 W/kg = -10.66 dB dBW/kg

**Test Plot 15#: PCS 1900\_Head Left Tilt\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.412$  S/m;  $\epsilon_r = 39.621$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0468 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.090 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0560 W/kg

**SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.021 W/kg**

Maximum value of SAR (measured) = 0.0456 W/kg

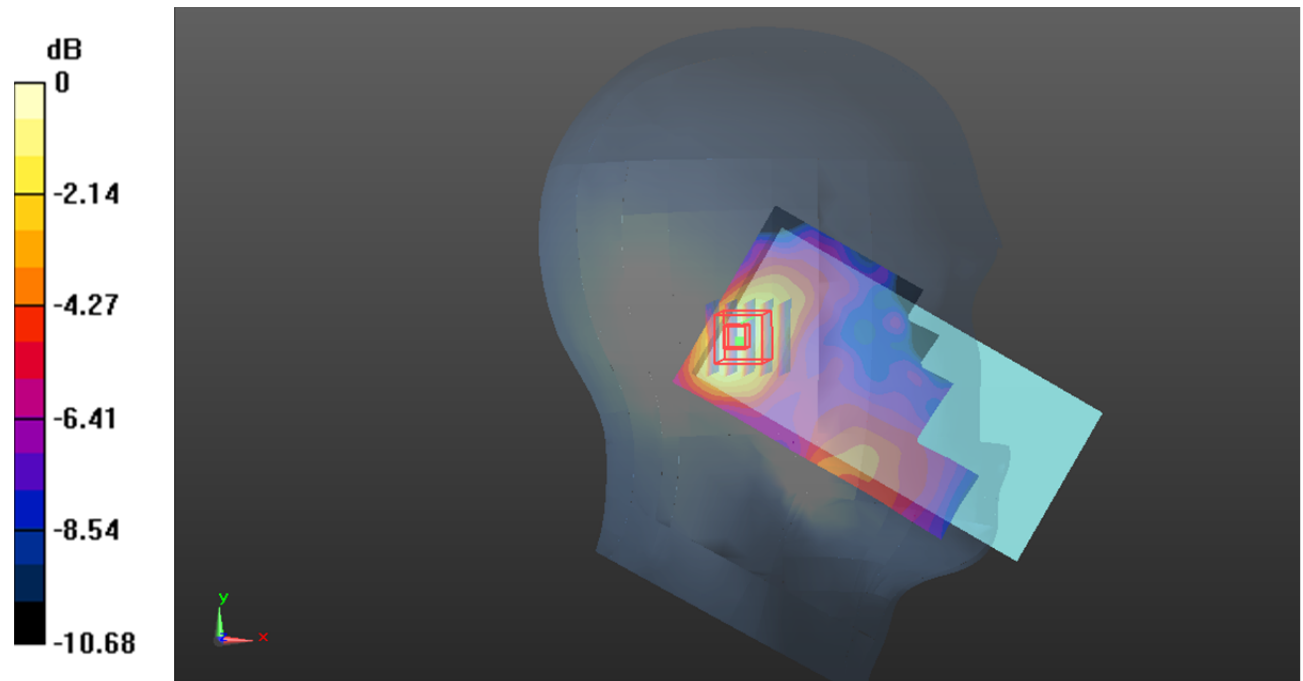

0 dB = 0.0456 W/kg = -13.41 dB dBW/kg

**Test Plot 16#: PCS 1900\_Head Right Cheek\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.412$  S/m;  $\epsilon_r = 39.621$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0279 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.447 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0340 W/kg

**SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.017 W/kg**

Maximum value of SAR (measured) = 0.0296 W/kg

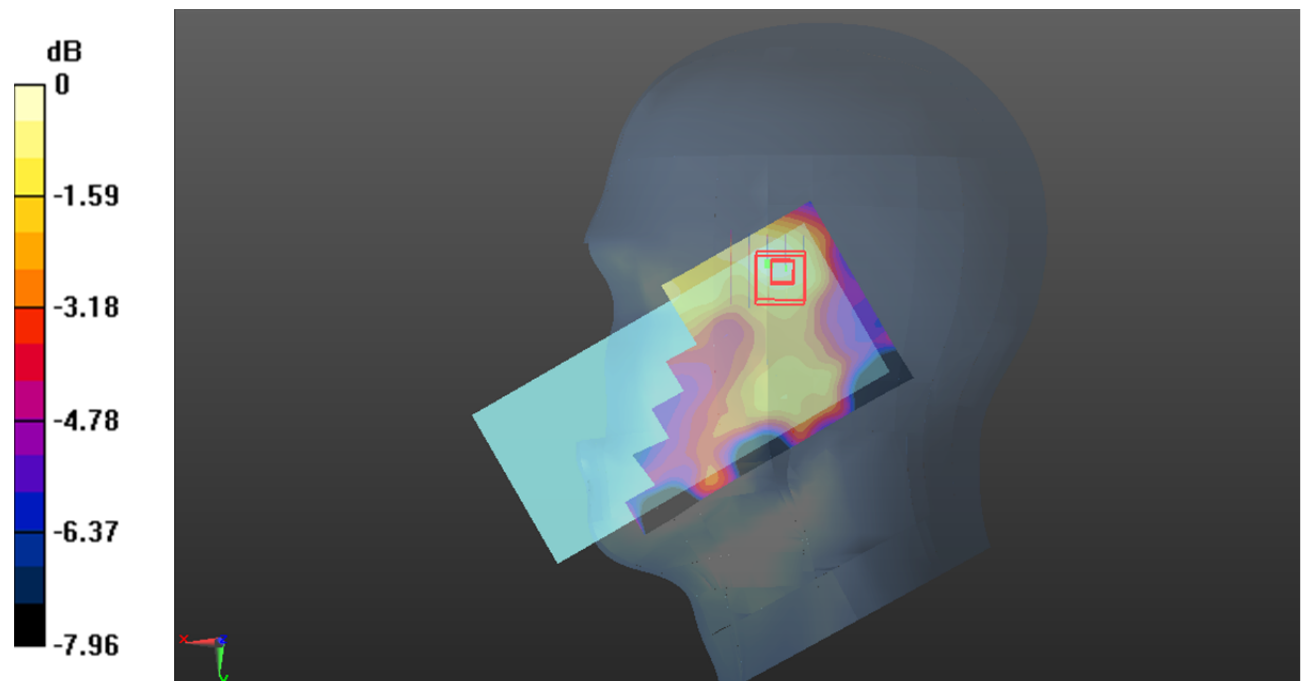

0 dB = 0.0296 W/kg = -15.29 dB dBW/kg



**Test Plot 17#: PCS 1900\_Head Right Tilt\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.412$  S/m;  $\epsilon_r = 39.621$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0612 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.486 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0720 W/kg

**SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.026 W/kg**

Maximum value of SAR (measured) = 0.0589 W/kg

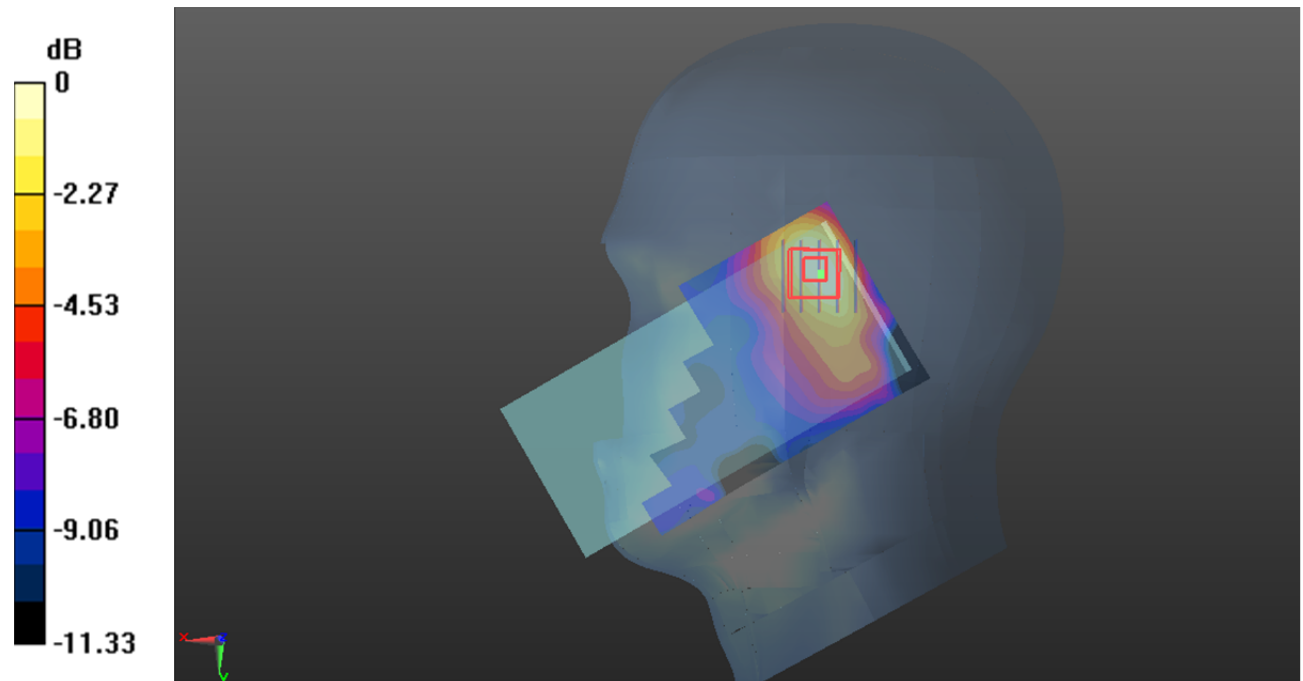

0 dB = 0.0589 W/kg = -12.30 dB dBW/kg

**Test Plot 18#: PCS 1900\_Body Worn Front\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.412$  S/m;  $\epsilon_r = 39.621$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.139 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.390 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.158 W/kg

**SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.057 W/kg**

Maximum value of SAR (measured) = 0.135 W/kg

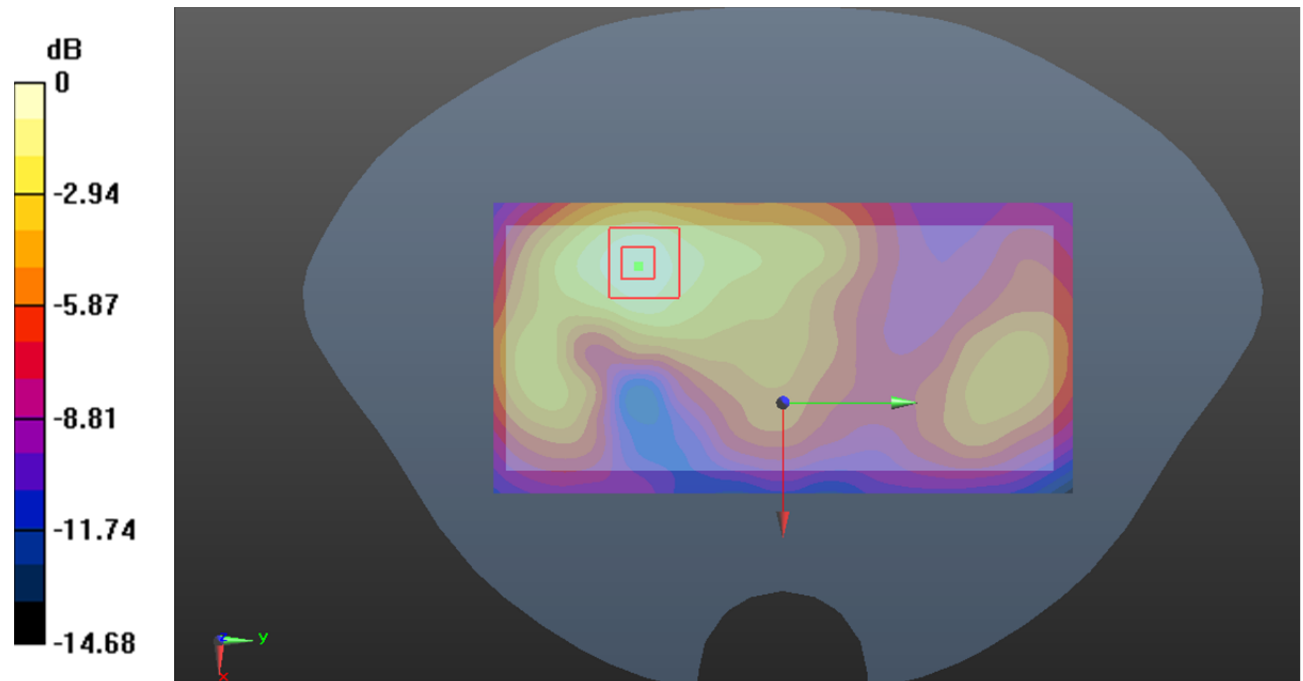

0 dB = 0.135 W/kg = -8.70 dB dBW/kg

**Test Plot 19#: PCS 1900\_Body Worn Back\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.412$  S/m;  $\epsilon_r = 39.621$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.385 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.880 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.566 W/kg

**SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.150 W/kg**

Maximum value of SAR (measured) = 0.420 W/kg

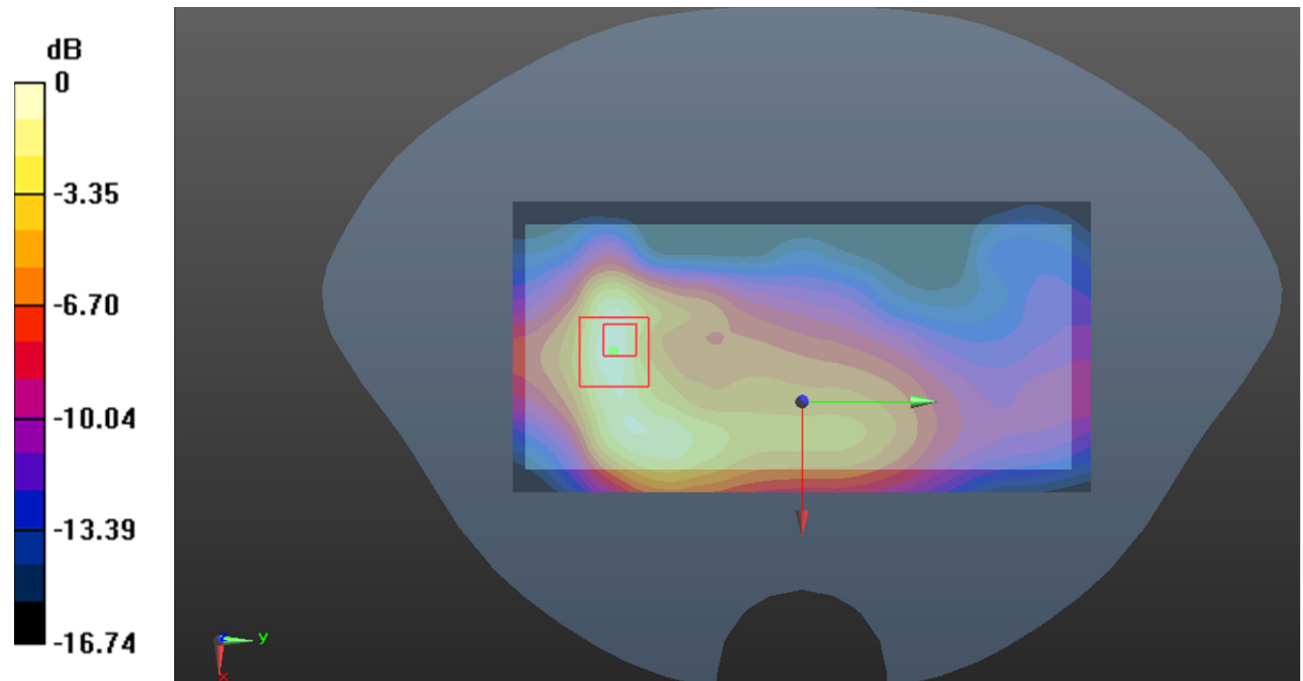

0 dB = 0.420 W/kg = -3.77 dB dBW/kg

**Test Plot 20#: PCS 1900\_Body Front\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.412$  S/m;  $\epsilon_r = 39.621$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.346 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.370 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.406 W/kg

**SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.141 W/kg**

Maximum value of SAR (measured) = 0.339 W/kg

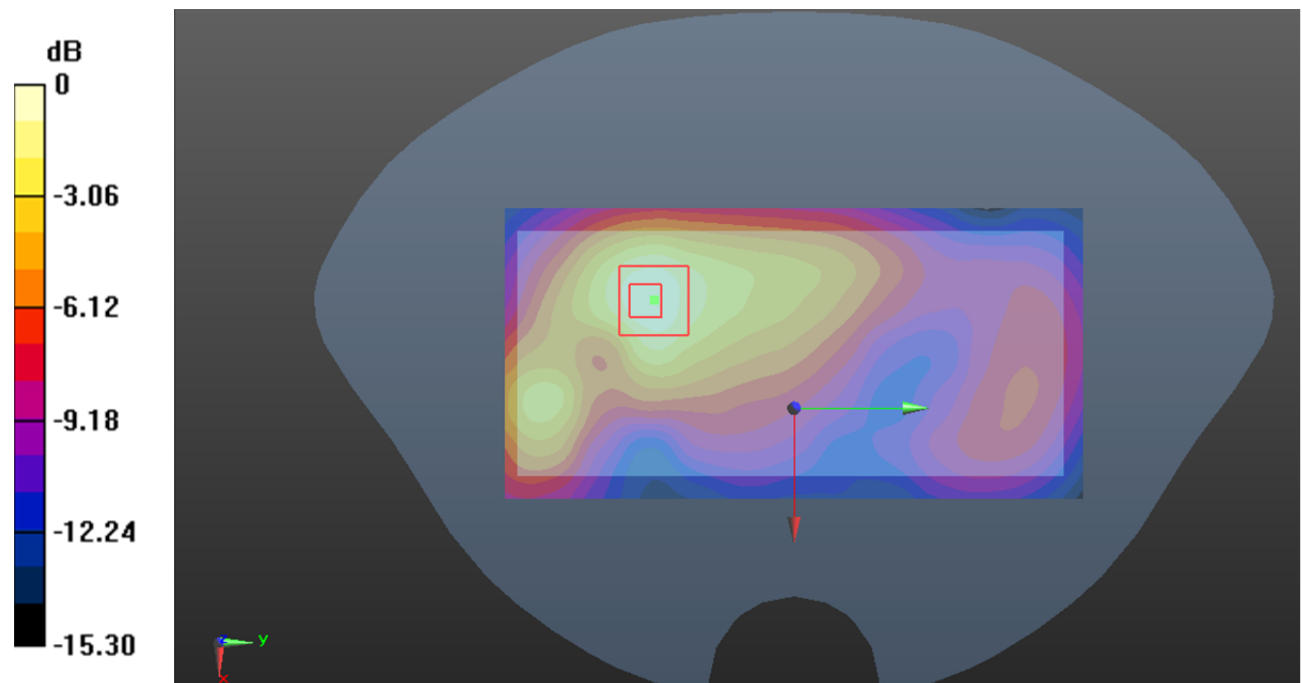

0 dB = 0.339 W/kg = -4.70 dB dBW/kg

**Test Plot 21#: PCS 1900\_Body Back\_Low****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.387$  S/m;  $\epsilon_r = 40.032$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1850.2 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.698 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.810 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.840 W/kg

**SAR(1 g) = 0.460 W/kg; SAR(10 g) = 0.249 W/kg**

Maximum value of SAR (measured) = 0.714 W/kg

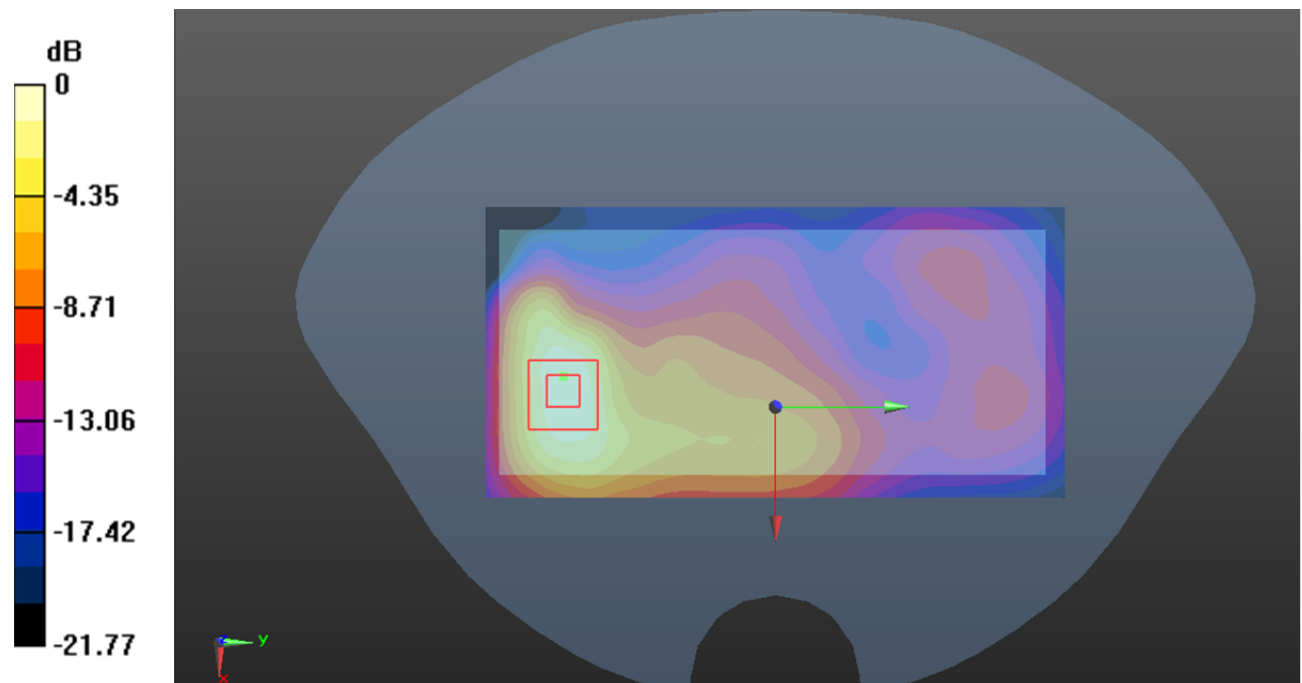

0 dB = 0.714 W/kg = -1.46 dB dBW/kg

**Test Plot 22#: PCS 1900\_Body Back\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.412$  S/m;  $\epsilon_r = 39.621$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.721 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.438 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.894 W/kg

**SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.241 W/kg**

Maximum value of SAR (measured) = 0.732 W/kg

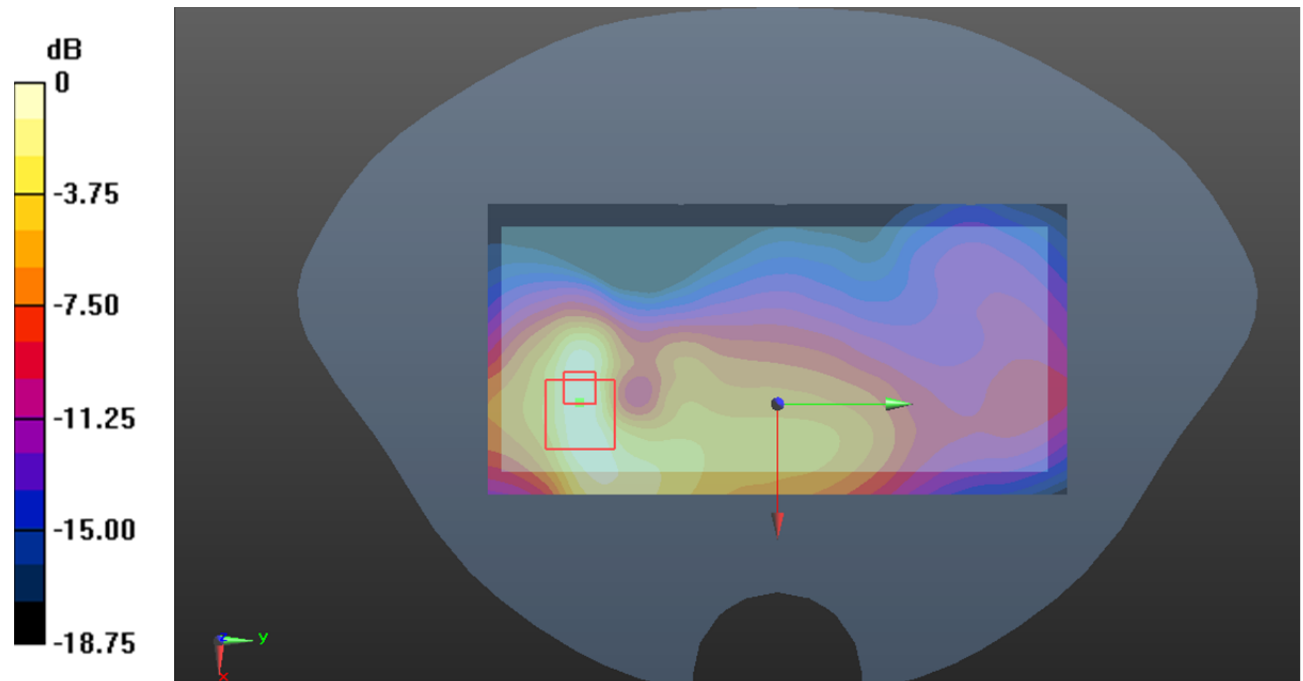

0 dB = 0.732 W/kg = -1.35 dB dBW/kg

**Test Plot 23#: PCS 1900\_Body Back\_High****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.442$  S/m;  $\epsilon_r = 39.546$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1909.8 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.860 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.850 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.303 W/kg**

Maximum value of SAR (measured) = 0.879 W/kg

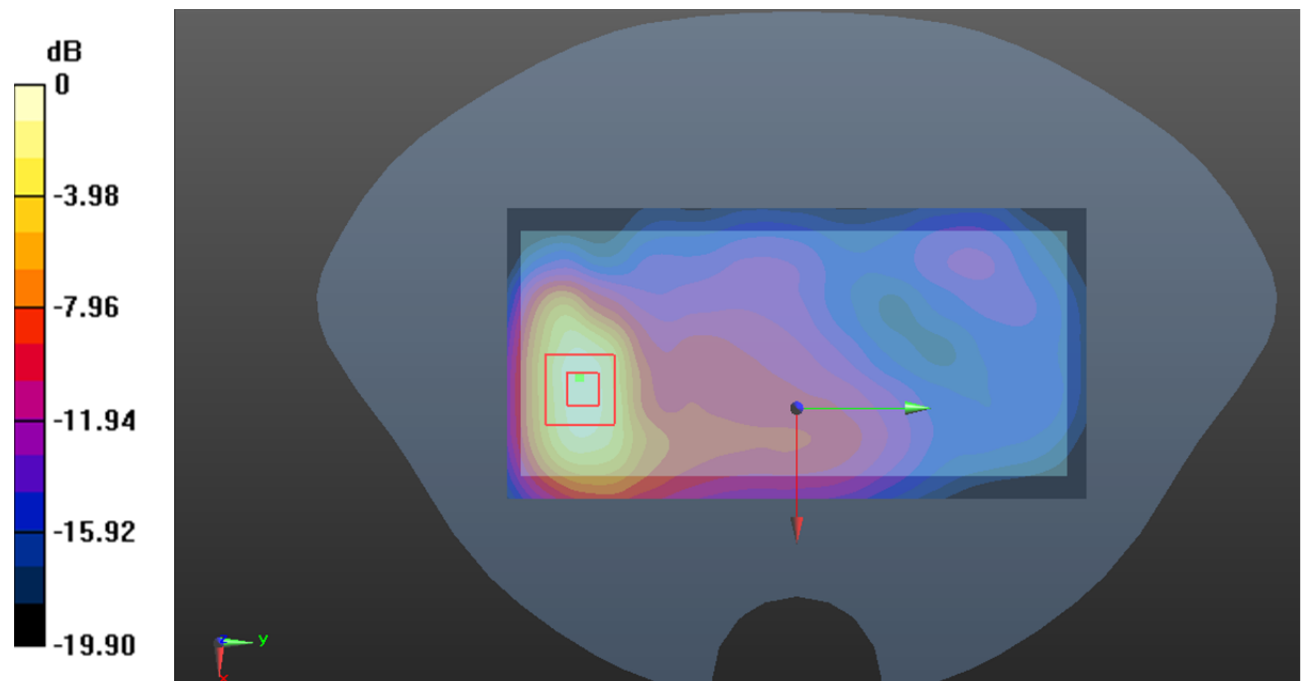

0 dB = 0.879 W/kg = -0.56 dB dBW/kg

**Test Plot 24#: PCS 1900\_Body Left\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.412$  S/m;  $\epsilon_r = 39.621$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.305 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.63 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.354 W/kg

**SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.124 W/kg**

Maximum value of SAR (measured) = 0.298 W/kg

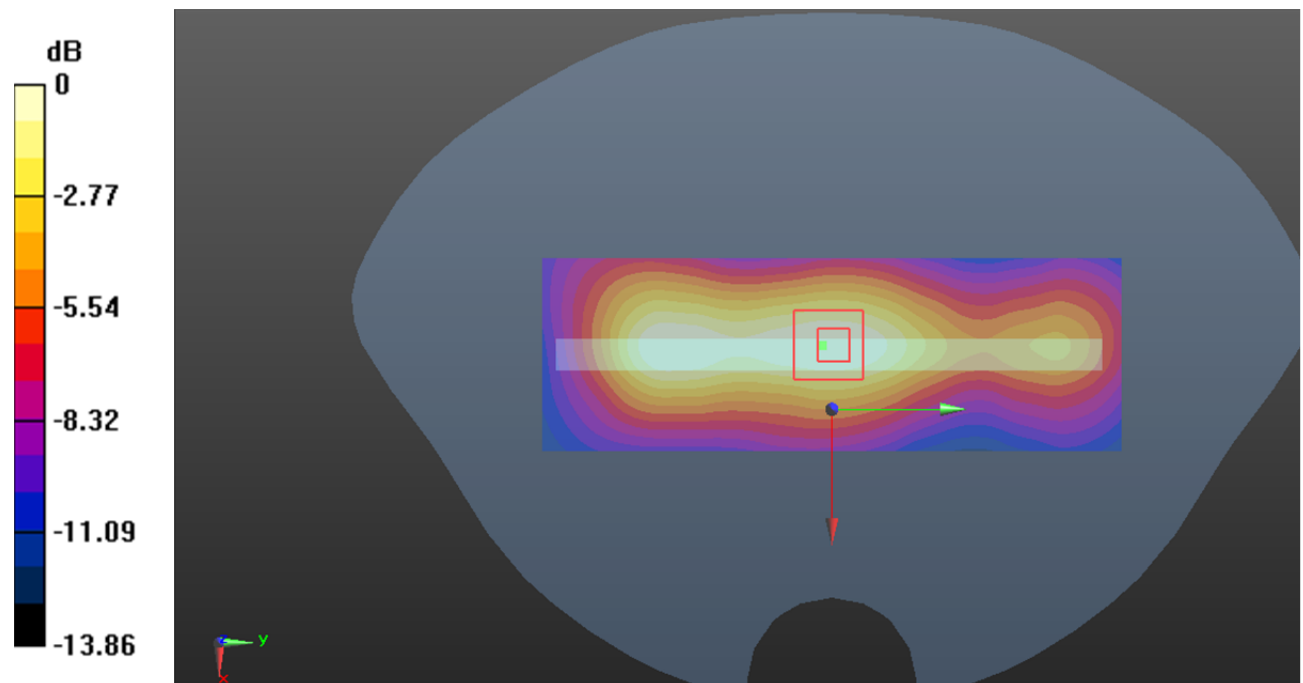

0 dB = 0.298 W/kg = -5.26 dB dBW/kg



**Test Plot 25#: PCS 1900\_Body Right\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.412$  S/m;  $\epsilon_r = 39.621$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0345 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.427 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0380 W/kg

**SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.017 W/kg**

Maximum value of SAR (measured) = 0.0322 W/kg

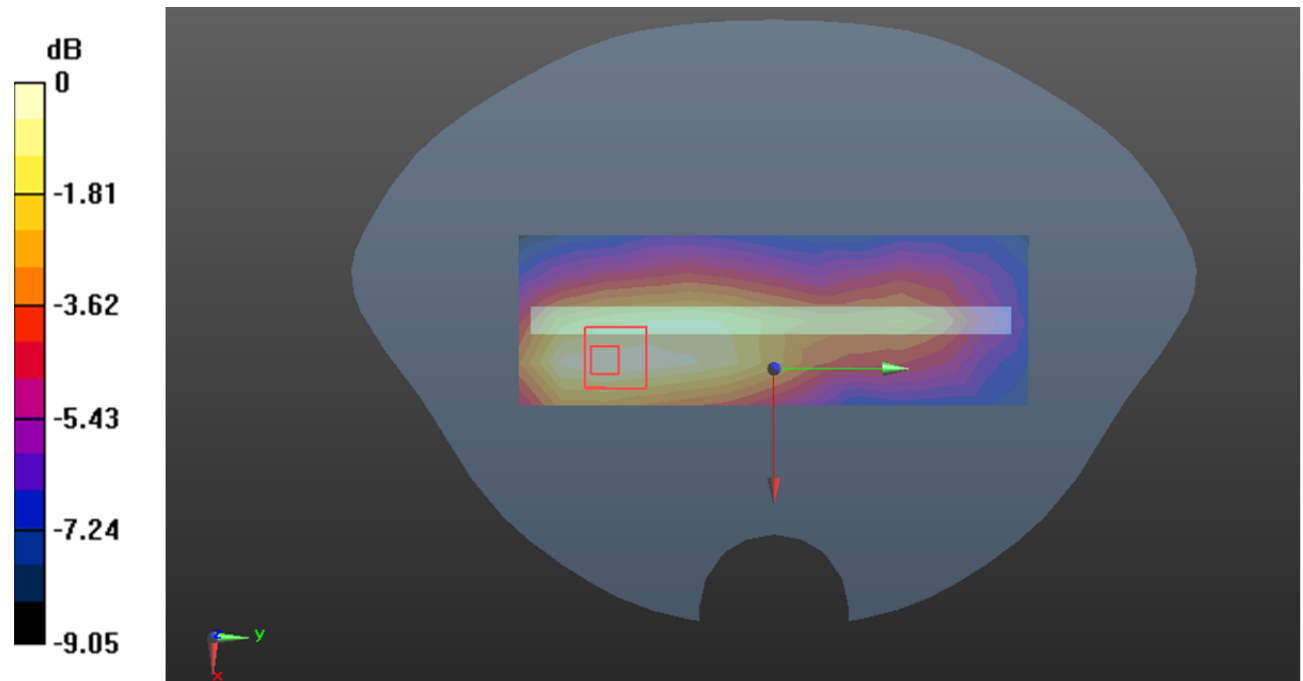

0 dB = 0.0322 W/kg = -14.92 dB dBW/kg

**Test Plot 26#: PCS 1900\_Body Bottom\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.412$  S/m;  $\epsilon_r = 39.621$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.967 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.78 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.18 W/kg

**SAR(1 g) = 0.587 W/kg; SAR(10 g) = 0.287 W/kg**

Maximum value of SAR (measured) = 0.928 W/kg

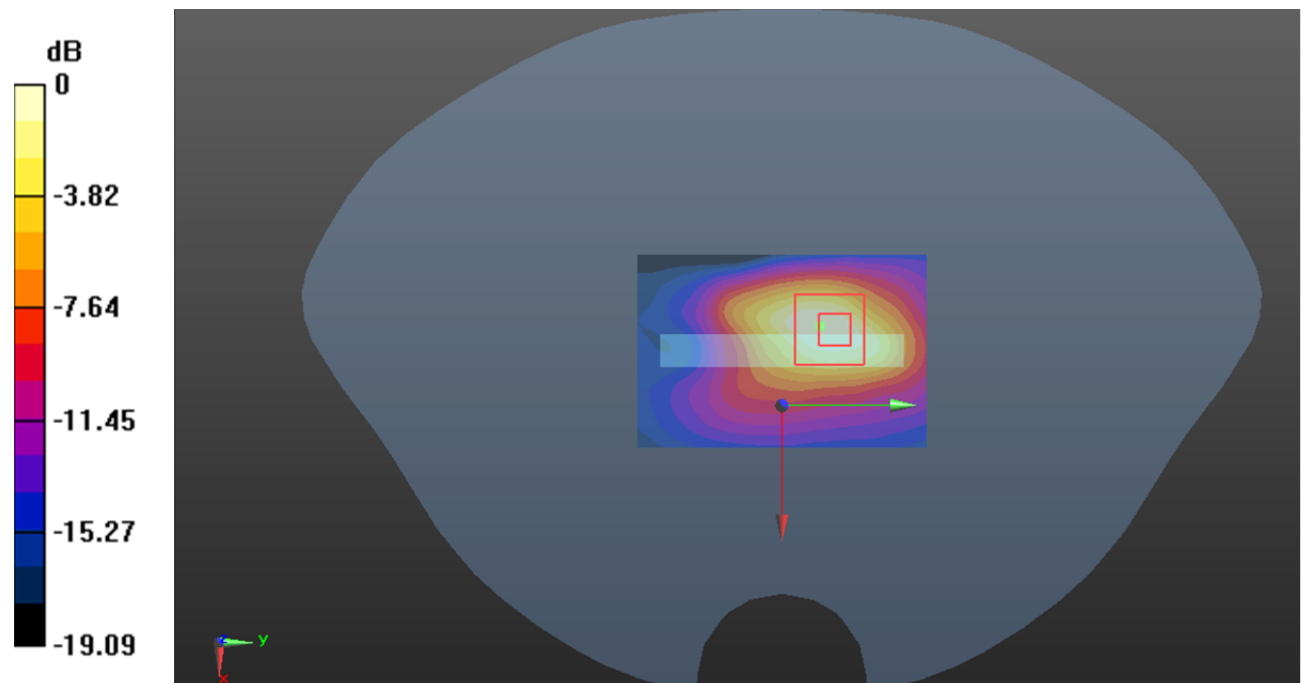

0 dB = 0.928 W/kg = -0.32 dB dBW/kg

**Test Plot 27#: WCDMA Band 2\_Head Left Cheek\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 39.635$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.149 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.061 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.146 W/kg

**SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.064 W/kg**

Maximum value of SAR (measured) = 0.129 W/kg

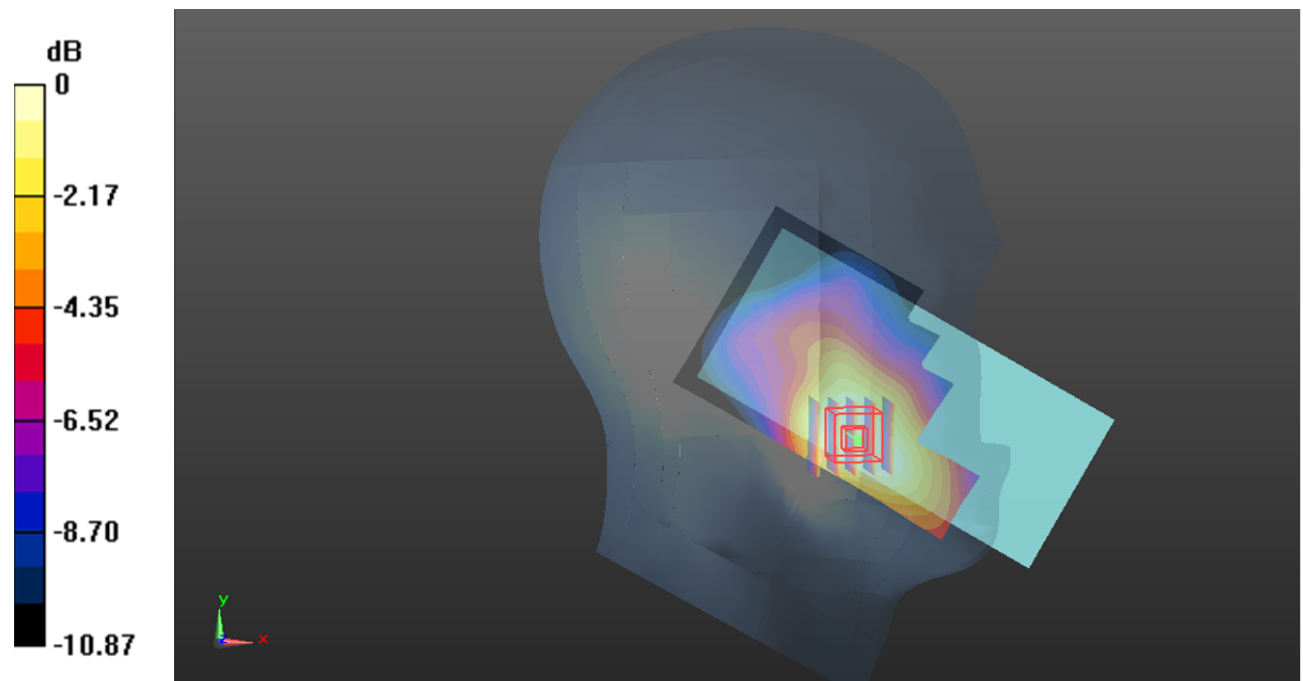

0 dB = 0.129 W/kg = -8.89 dB dBW/kg

**Test Plot 28#: WCDMA Band 2\_Head Left Tilt\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 39.635$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0577 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.601 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0690 W/kg

**SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.026 W/kg**

Maximum value of SAR (measured) = 0.0572 W/kg

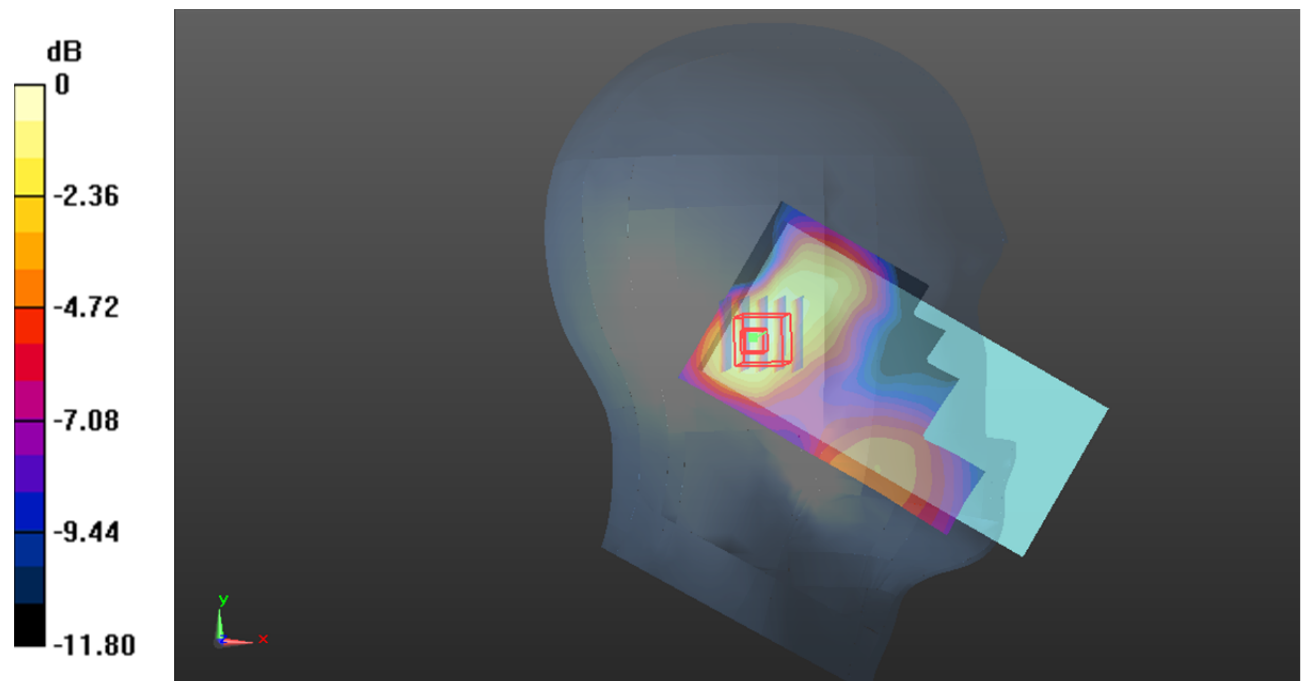

0 dB = 0.0572 W/kg = -12.43 dB dBW/kg

**Test Plot 29#: WCDMA Band 2\_Head Right Cheek\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 39.635$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.127 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.653 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.134 W/kg

**SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.051 W/kg**

Maximum value of SAR (measured) = 0.113 W/kg

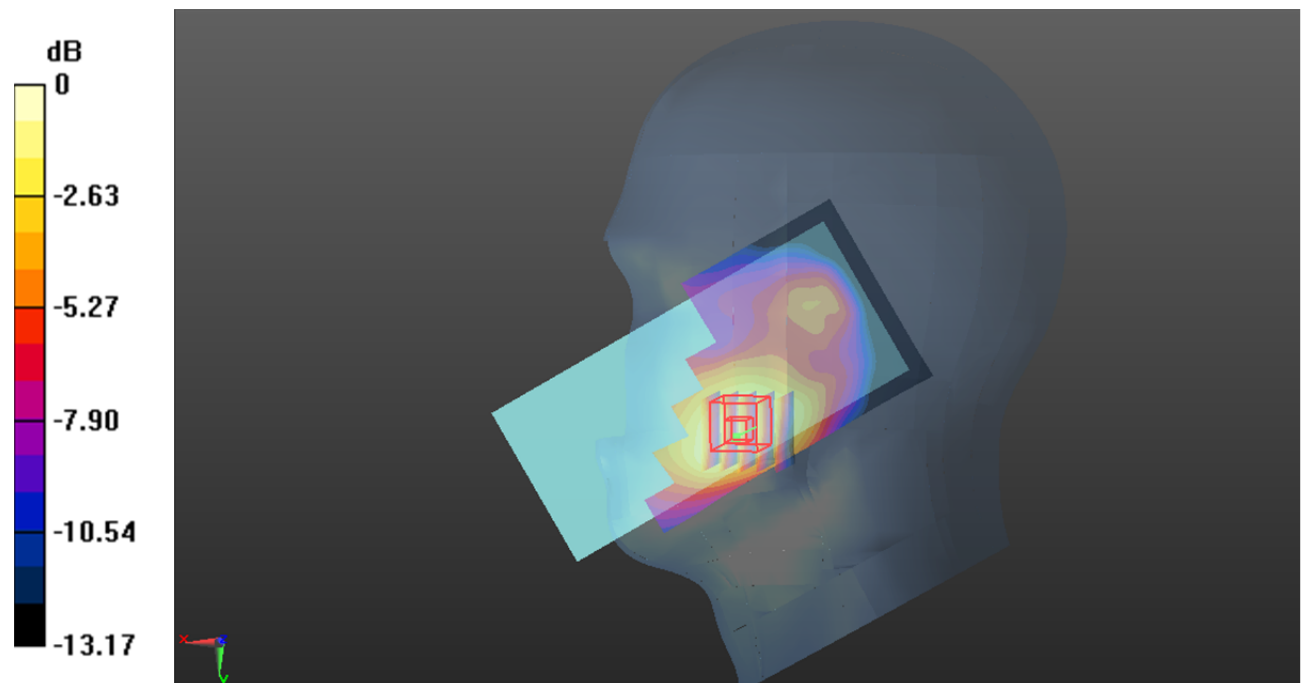

0 dB = 0.113 W/kg = -9.47 dB dBW/kg

**Test Plot 30#: WCDMA Band 2\_Head Right Tilt\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 39.635$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0281 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.417 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.0330 W/kg

**SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.012 W/kg**

Maximum value of SAR (measured) = 0.0264 W/kg

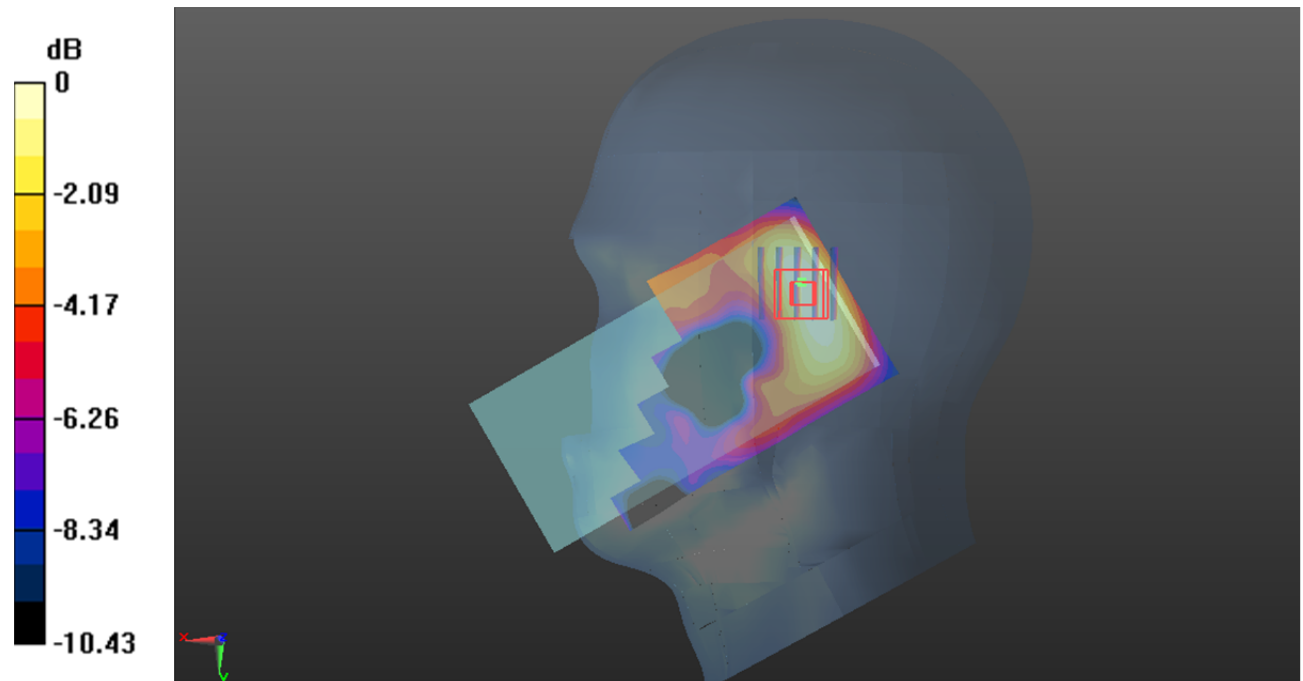

0 dB = 0.0264 W/kg = -15.78 dB dBW/kg

**Test Plot 31#: WCDMA Band 2\_Body Front\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 39.635$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.204 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.401 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.266 W/kg

**SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.096 W/kg**

Maximum value of SAR (measured) = 0.223 W/kg

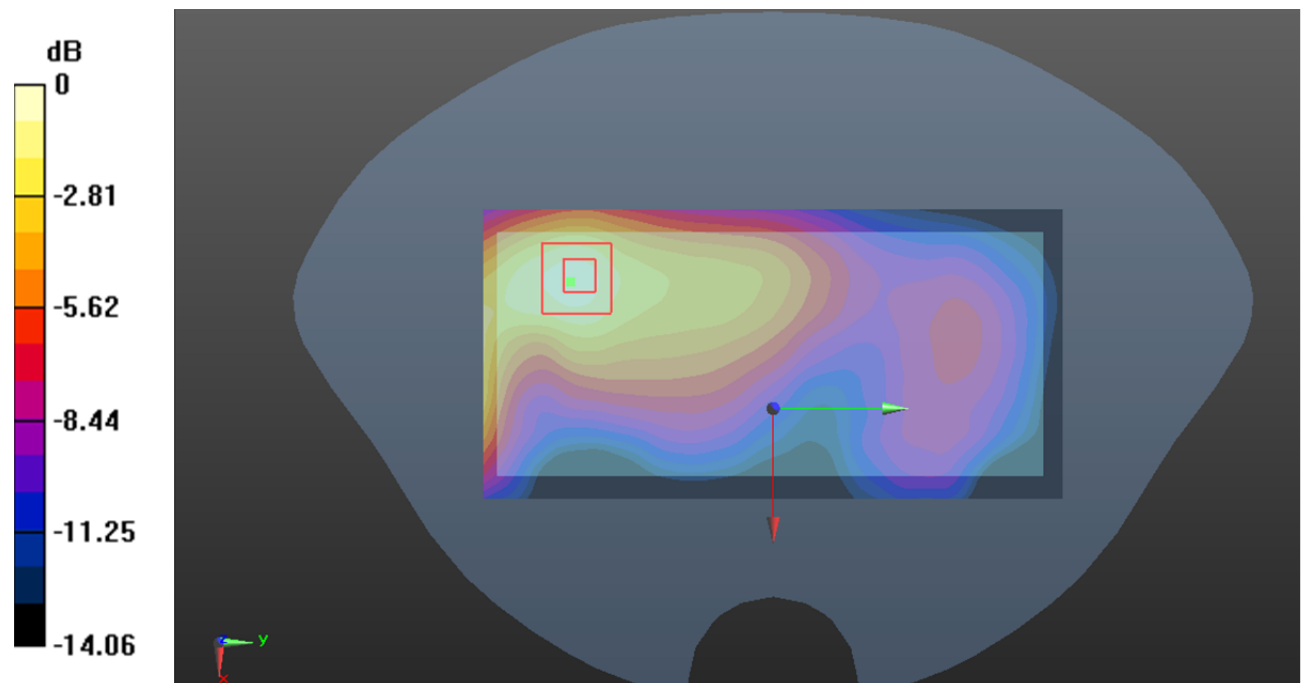

0 dB = 0.223 W/kg = -6.52 dB dBW/kg

**Test Plot 32#: WCDMA Band 2\_Body Back\_Low****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic FDD-LTE (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.391$  S/m;  $\epsilon_r = 39.705$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1852.4 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.396 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.599 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.515 W/kg

**SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.136 W/kg**

Maximum value of SAR (measured) = 0.412 W/kg

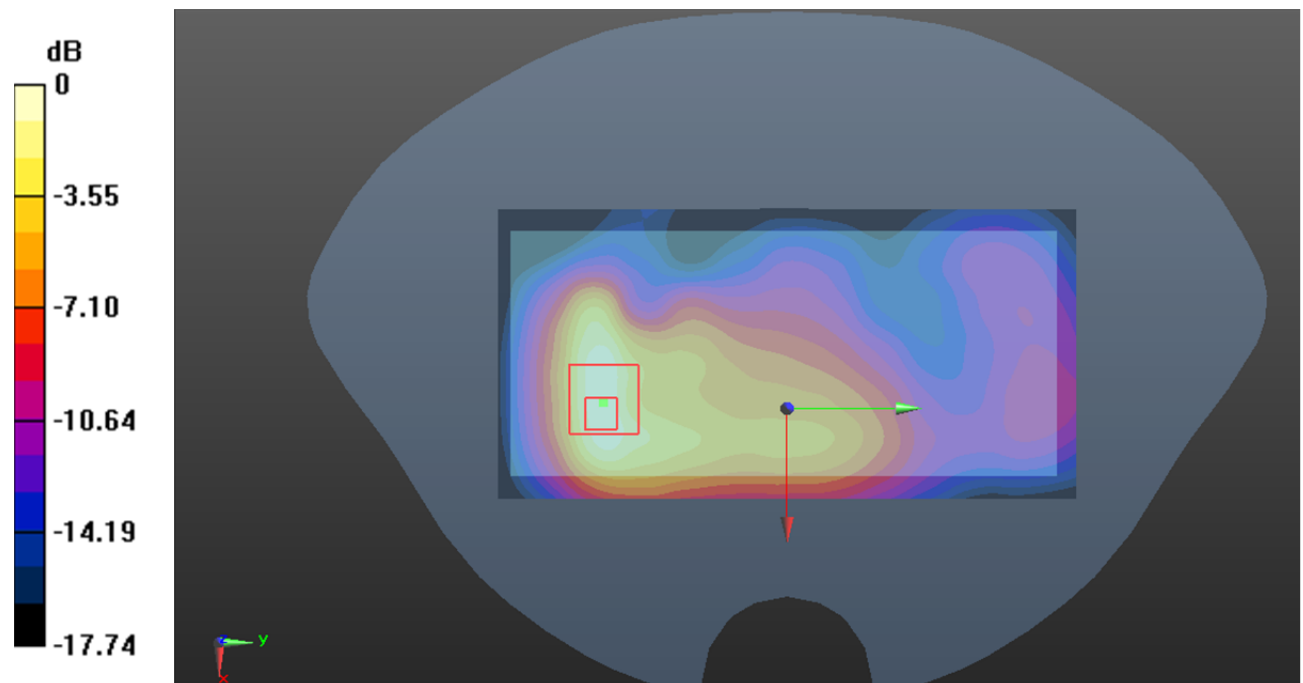

0 dB = 0.412 W/kg = -3.85 dB dBW/kg



**Test Plot 33#: WCDMA Band 2\_Body Back\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 39.635$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.829 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.288 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.889 W/kg

**SAR(1 g) = 0.427 W/kg; SAR(10 g) = 0.221 W/kg**

Maximum value of SAR (measured) = 0.720 W/kg

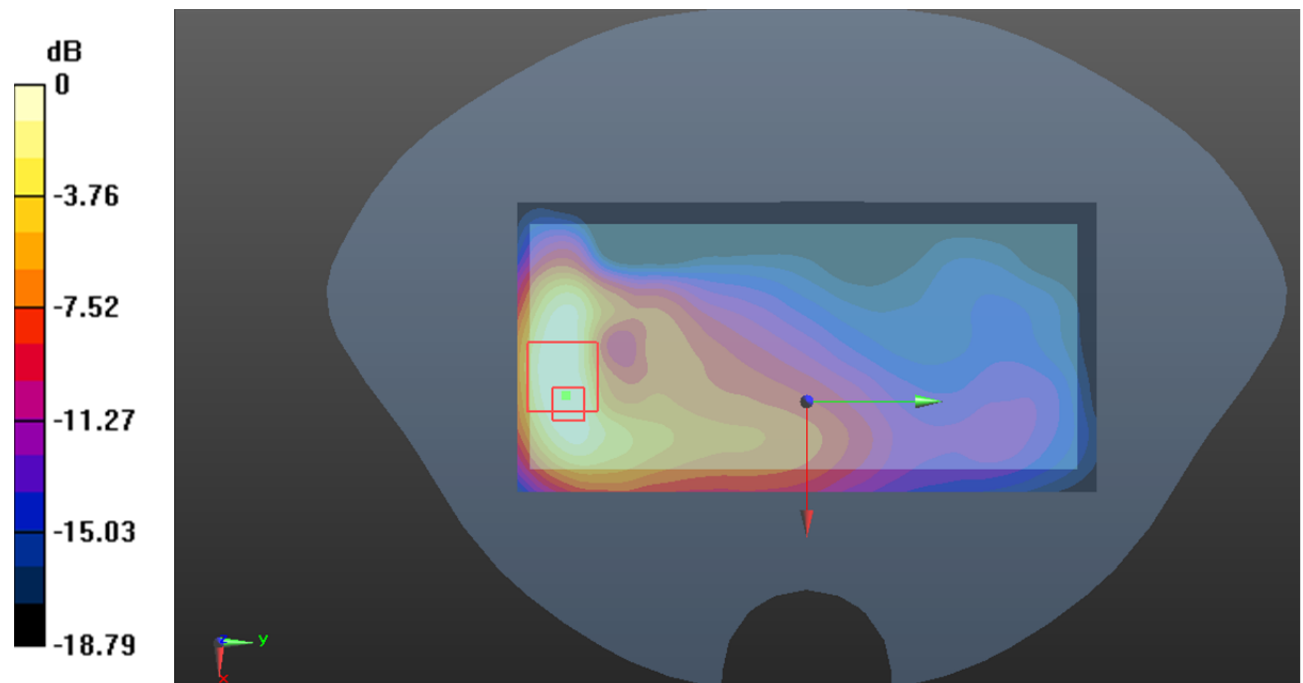

0 dB = 0.720 W/kg = -1.43 dB dBW/kg

**Test Plot 34#: WCDMA Band 2\_Body Back\_High****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic FDD-LTE (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1907.6$  MHz;  $\sigma = 1.434$  S/m;  $\epsilon_r = 39.554$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1907.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.700 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.249 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.865 W/kg

**SAR(1 g) = 0.443 W/kg; SAR(10 g) = 0.238 W/kg**

Maximum value of SAR (measured) = 0.719 W/kg

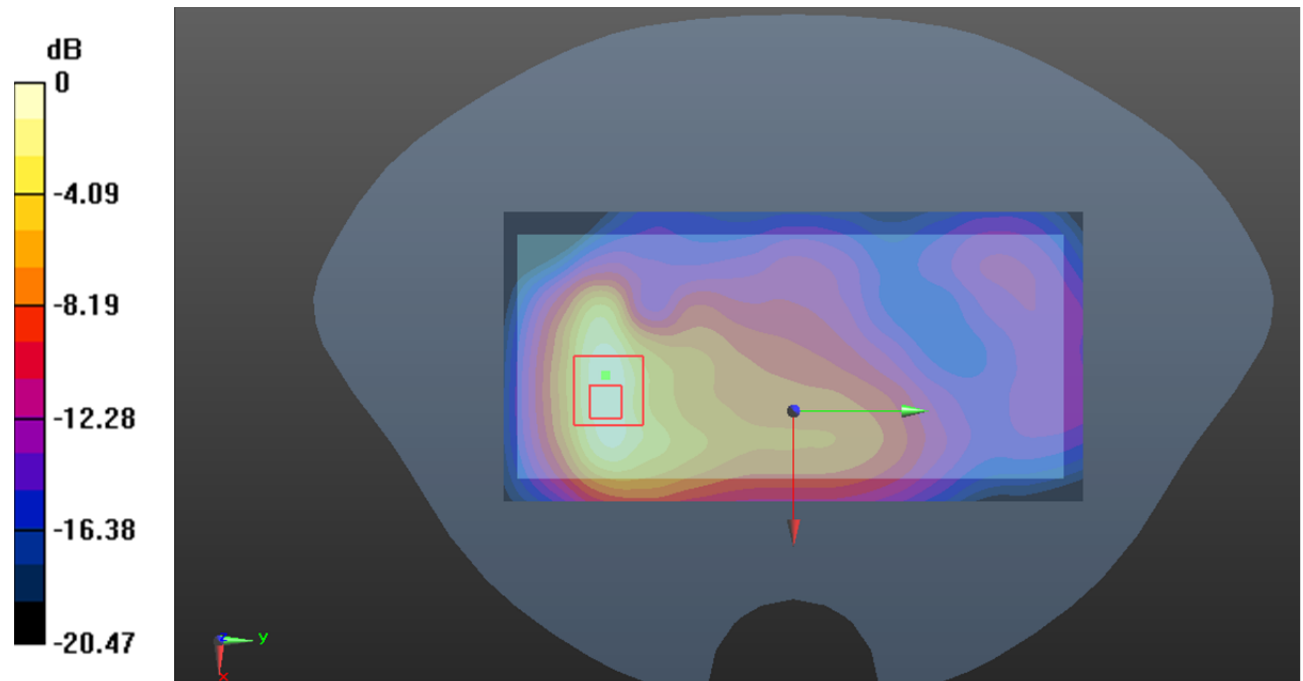

0 dB = 0.719 W/kg = -1.43 dB dBW/kg

**Test Plot 35#: WCDMA Band 2\_Body Left\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 39.635$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.129 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.092 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.159 W/kg

**SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.054 W/kg**

Maximum value of SAR (measured) = 0.134 W/kg

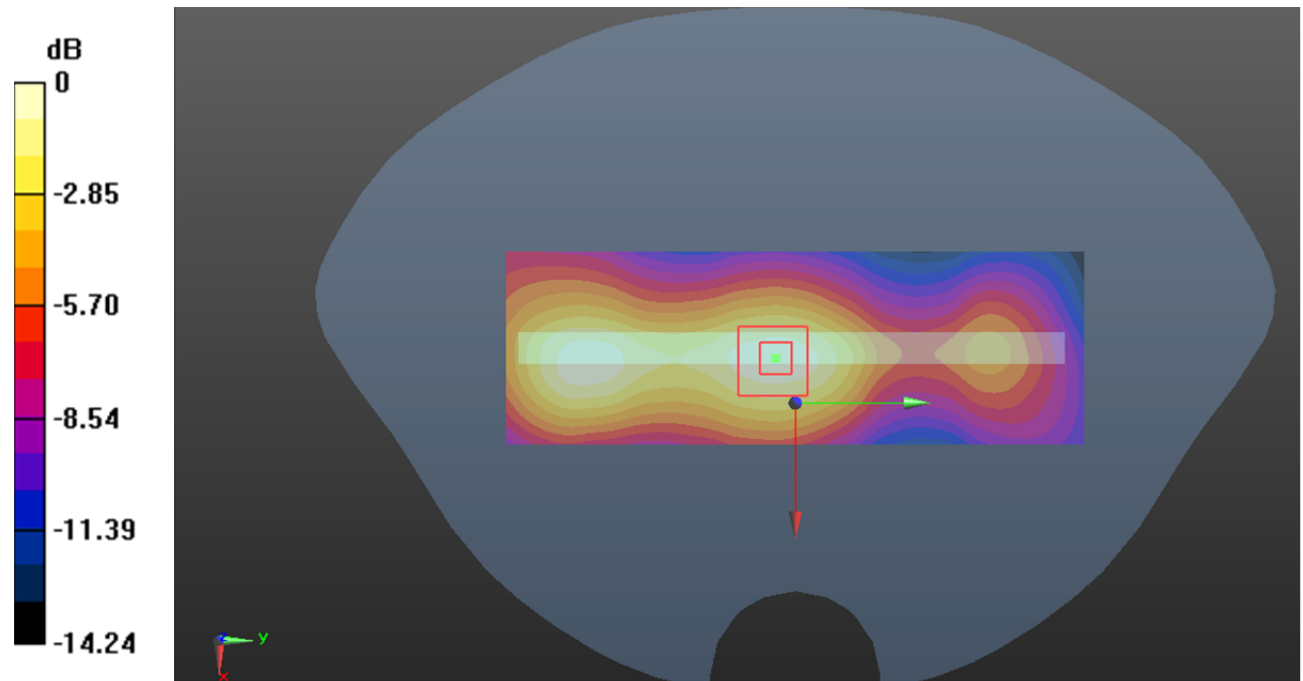

0 dB = 0.134 W/kg = -8.73 dB dBW/kg

**Test Plot 36#: WCDMA Band 2\_Body Right\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 39.635$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0925 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.730 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.108 W/kg

**SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.037 W/kg**

Maximum value of SAR (measured) = 0.0908 W/kg

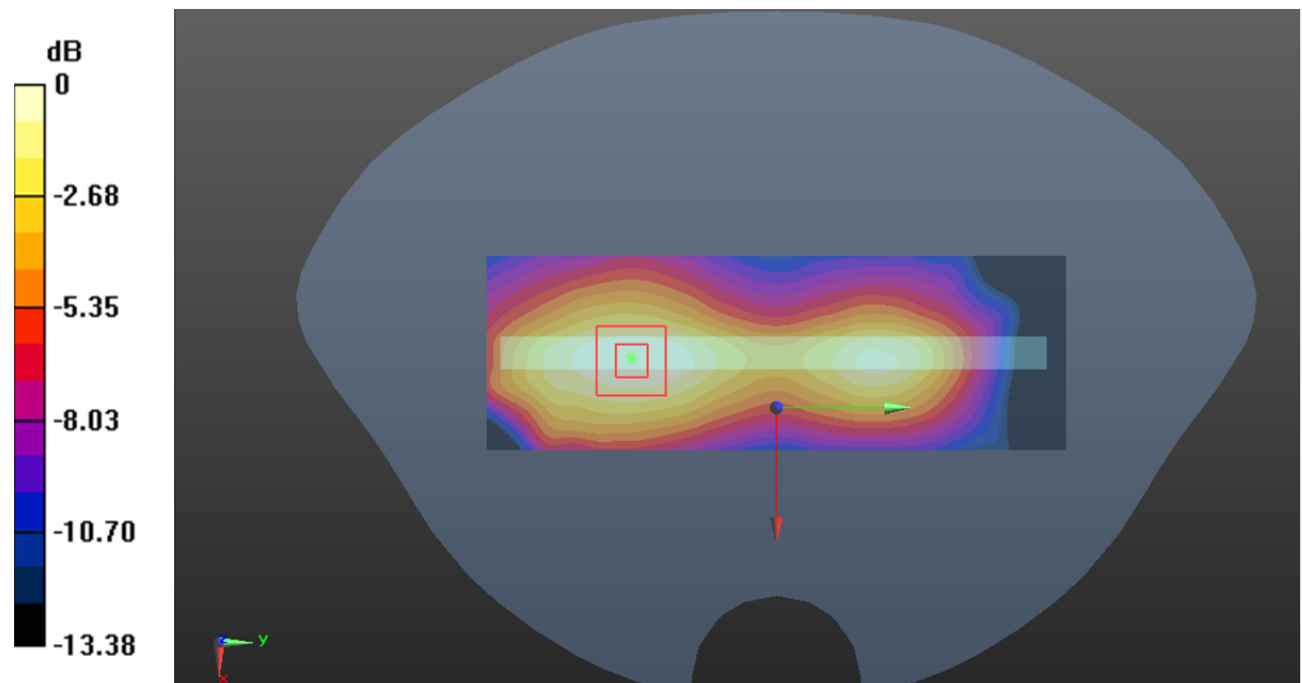

0 dB = 0.0908 W/kg = -10.42 dB dBW/kg

**Test Plot 37#: WCDMA Band 2\_Body Bottom\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 39.635$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.79, 7.79, 7.79) @1880 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.359 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.98 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.419 W/kg

**SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.118 W/kg**

Maximum value of SAR (measured) = 0.346 W/kg

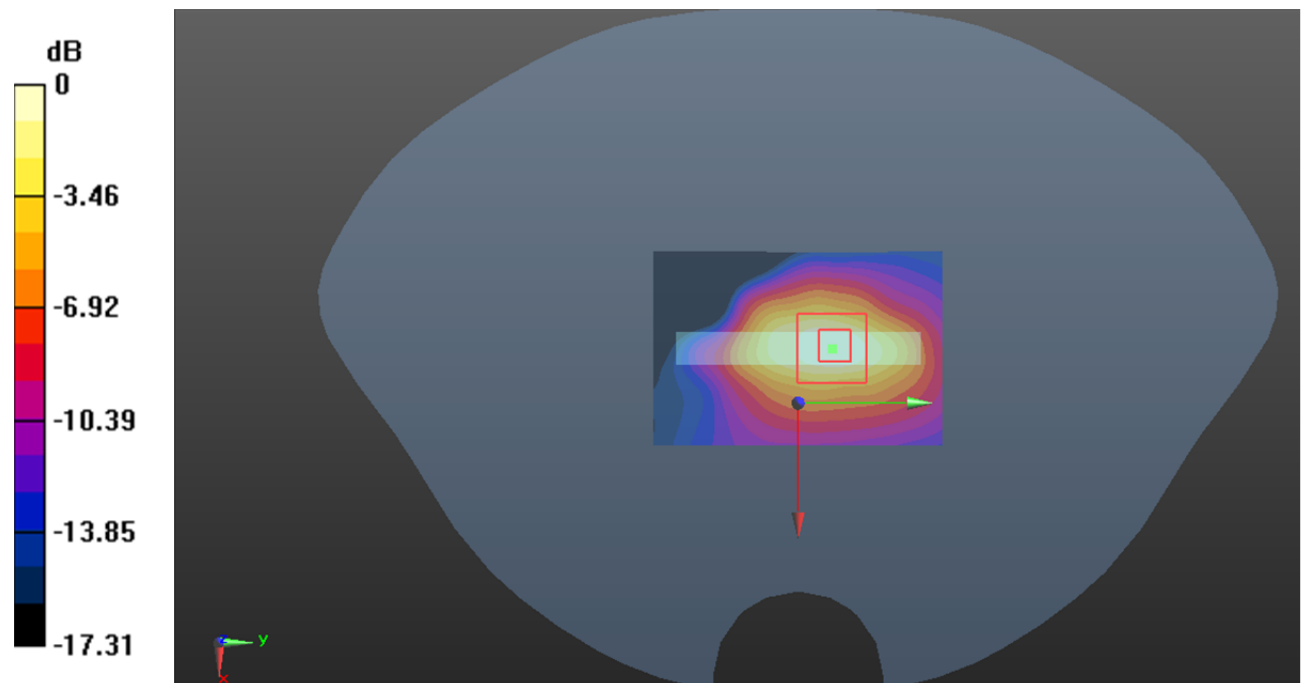

0 dB = 0.346 W/kg = -4.61 dB dBW/kg

**Test Plot 38#: WCDMA Band 4\_Head Left Cheek\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.324$  S/m;  $\epsilon_r = 40.714$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1732.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0463 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.060 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0530 W/kg

**SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.024 W/kg**

Maximum value of SAR (measured) = 0.0462 W/kg

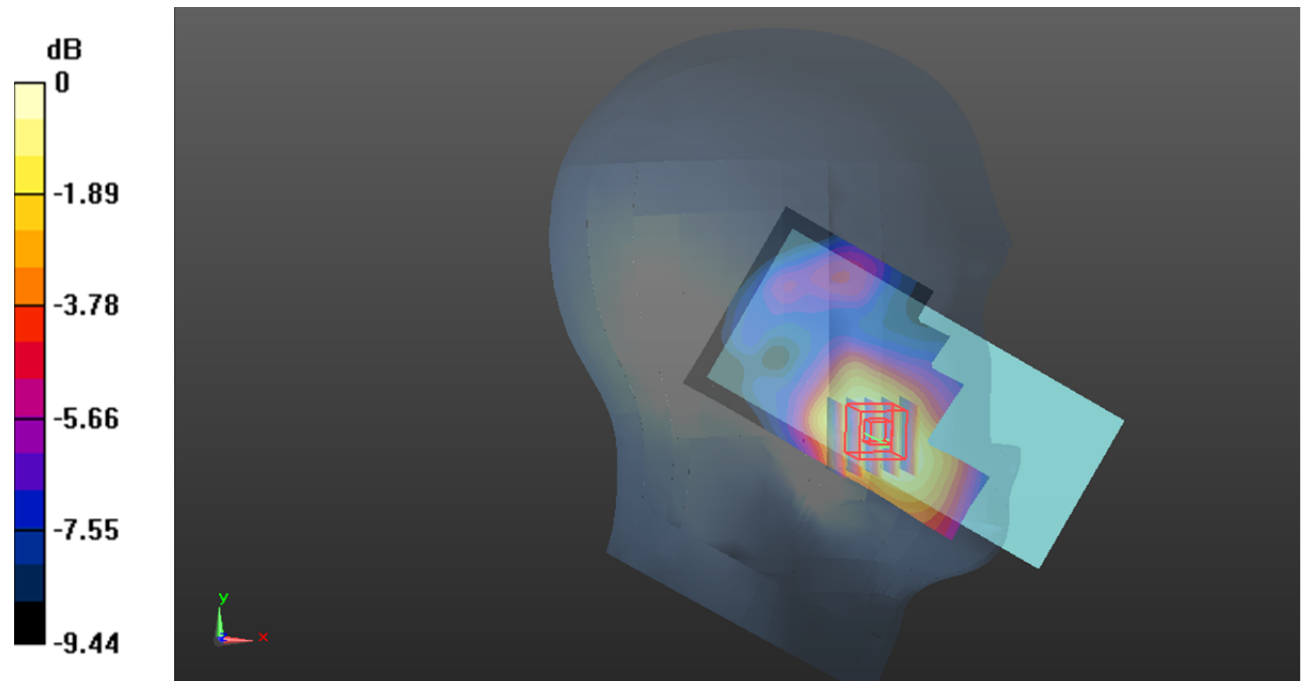

0 dB = 0.0462 W/kg = -13.35 dB dBW/kg

**Test Plot 39#: WCDMA Band 4\_Head Left Tilt\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.324$  S/m;  $\epsilon_r = 40.714$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1732.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0228 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.155 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0290 W/kg

**SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.012 W/kg**

Maximum value of SAR (measured) = 0.0234 W/kg

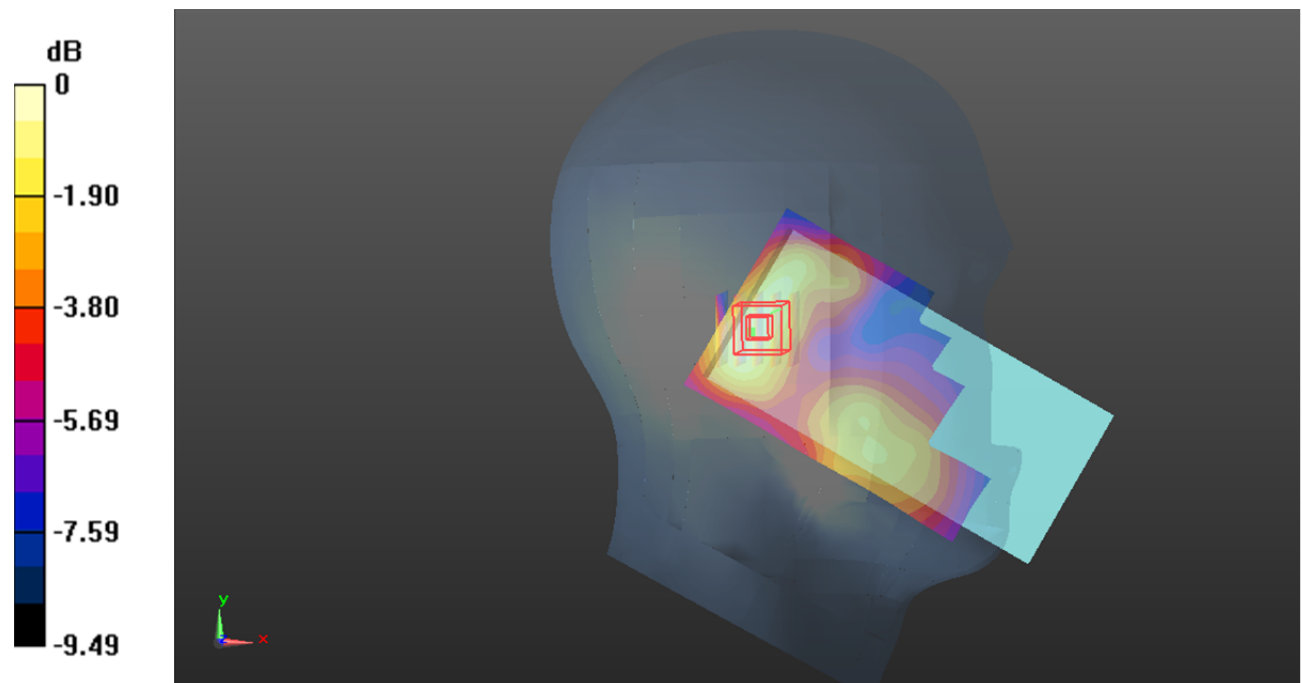

0 dB = 0.0234 W/kg = -16.31 dB dBW/kg

**Test Plot 40#: WCDMA Band 4\_Head Right Cheek\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.324$  S/m;  $\epsilon_r = 40.714$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1732.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0301 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.163 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0350 W/kg

**SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.015 W/kg**

Maximum value of SAR (measured) = 0.0292 W/kg

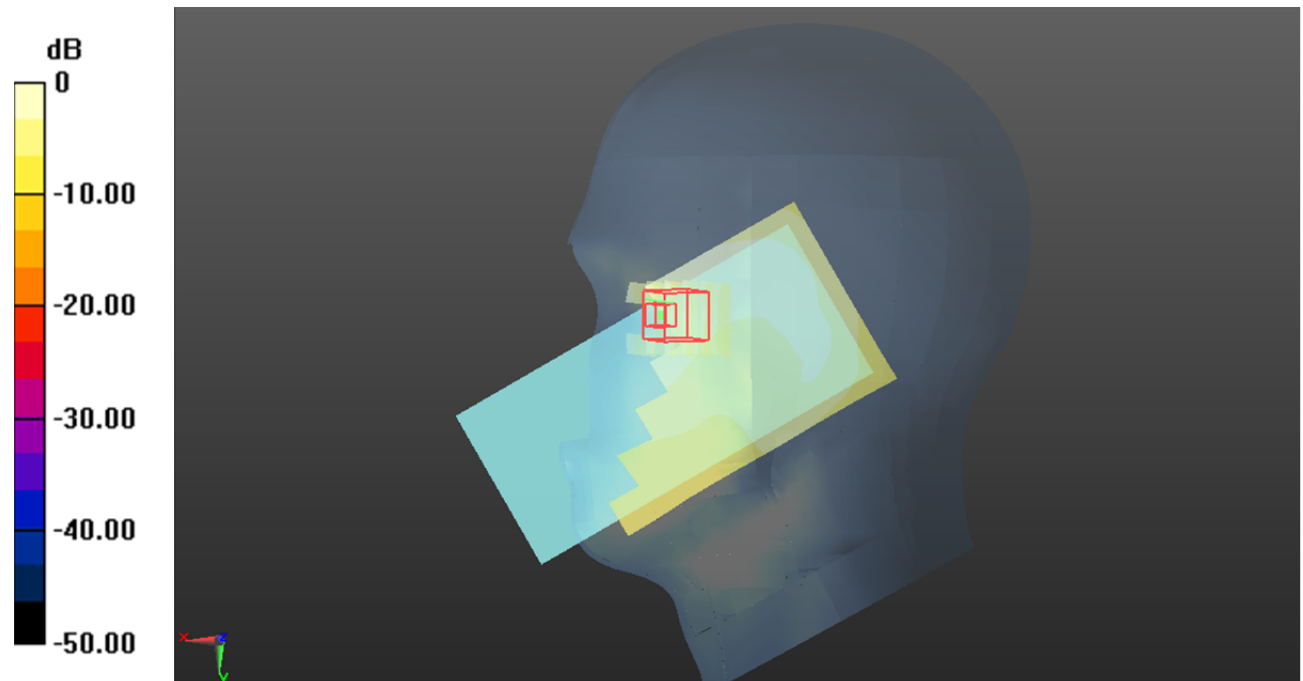

0 dB = 0.0292 W/kg = -15.35 dB dBW/kg



**Test Plot 41#: WCDMA Band 4\_Head Right Tilt\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.324$  S/m;  $\epsilon_r = 40.714$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1732.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0283 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.694 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0300 W/kg

**SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.013 W/kg**

Maximum value of SAR (measured) = 0.0254 W/kg

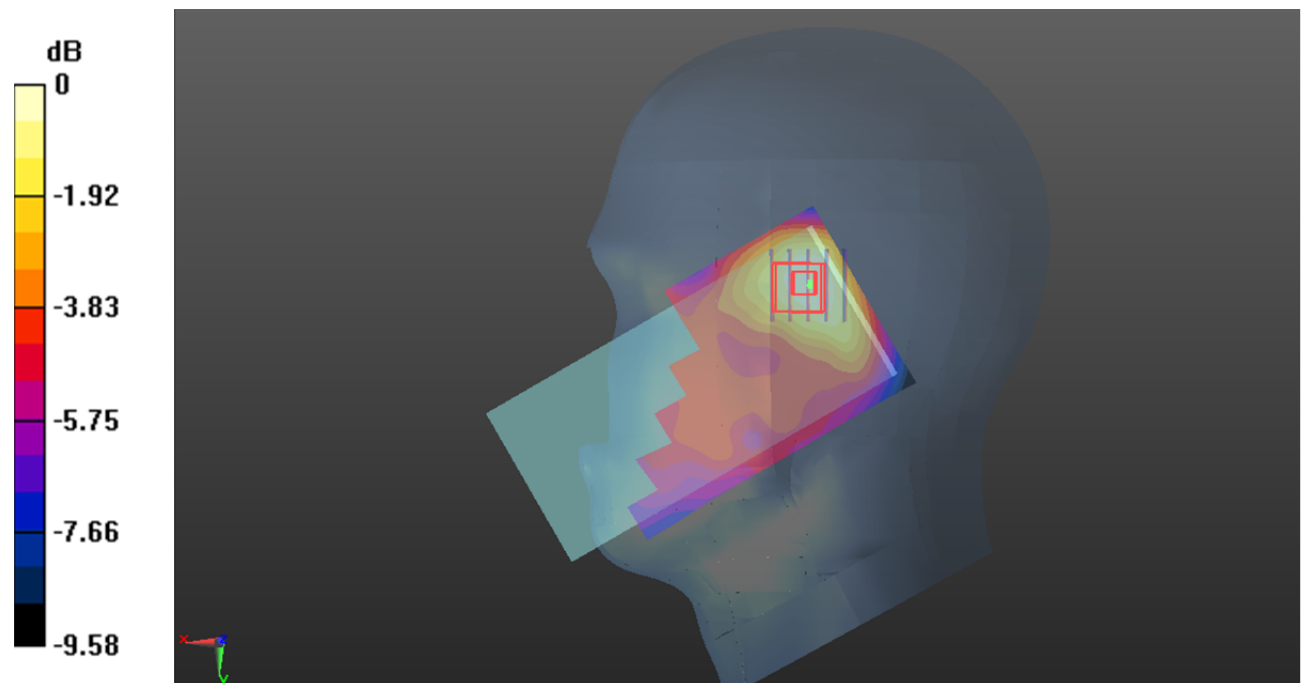

0 dB = 0.0254 W/kg = -15.95 dB dBW/kg

**Test Plot 42#: WCDMA Band 4\_Body Front\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.324$  S/m;  $\epsilon_r = 40.714$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1732.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0981 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.333 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.185 W/kg

**SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.028 W/kg**

Maximum value of SAR (measured) = 0.0999 W/kg

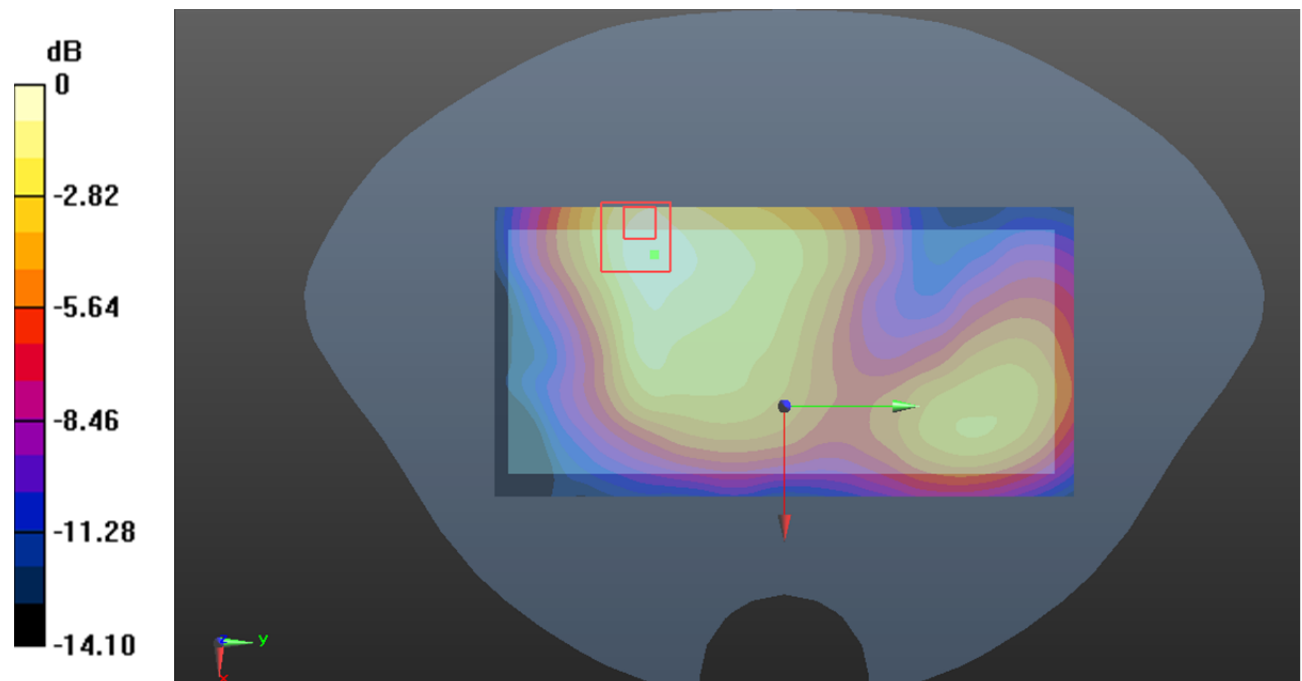

0 dB = 0.0999 W/kg = -10.00 dBW/kg

**Test Plot 43#: WCDMA Band 4\_Body Back\_Low****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1712.4$  MHz;  $\sigma = 1.297$  S/m;  $\epsilon_r = 40.817$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1712.4 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.245 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.208 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.293 W/kg

**SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.102 W/kg**

Maximum value of SAR (measured) = 0.242 W/kg

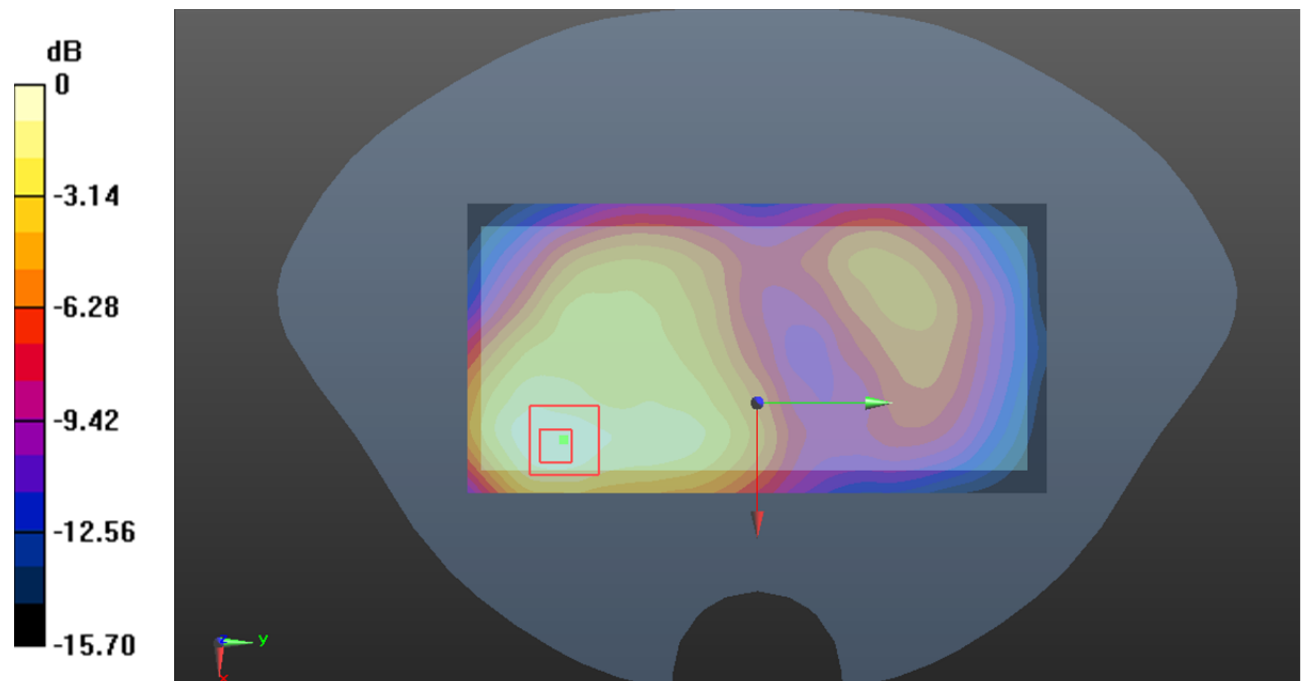

0 dB = 0.242 W/kg = -6.16 dB dBW/kg

**Test Plot 44#: WCDMA Band 4\_Body Back\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.324$  S/m;  $\epsilon_r = 40.714$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1732.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.253 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.351 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.306 W/kg

**SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.103 W/kg**

Maximum value of SAR (measured) = 0.257 W/kg

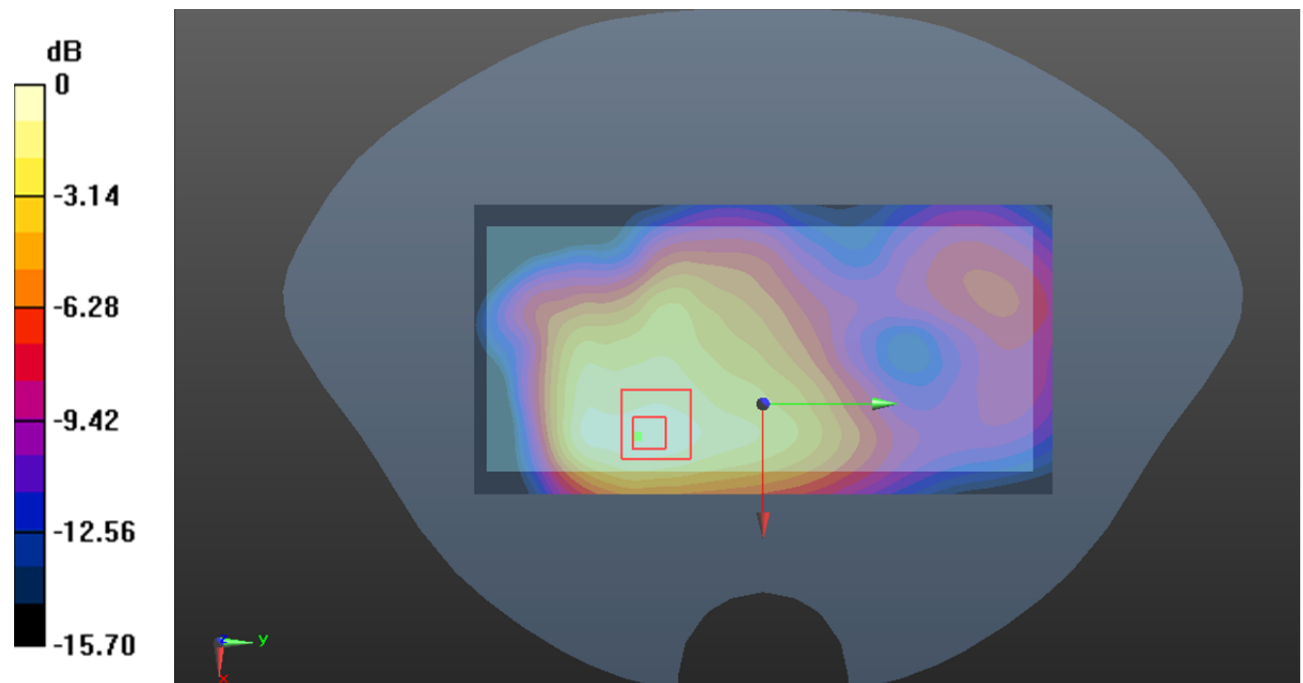

0 dB = 0.257 W/kg = -5.90 dB dBW/kg

**Test Plot 45#: WCDMA Band 4\_Body Back\_High****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1752.6$  MHz;  $\sigma = 1.348$  S/m;  $\epsilon_r = 40.465$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1752.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.353 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.227 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.417 W/kg

**SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.138 W/kg**

Maximum value of SAR (measured) = 0.346 W/kg

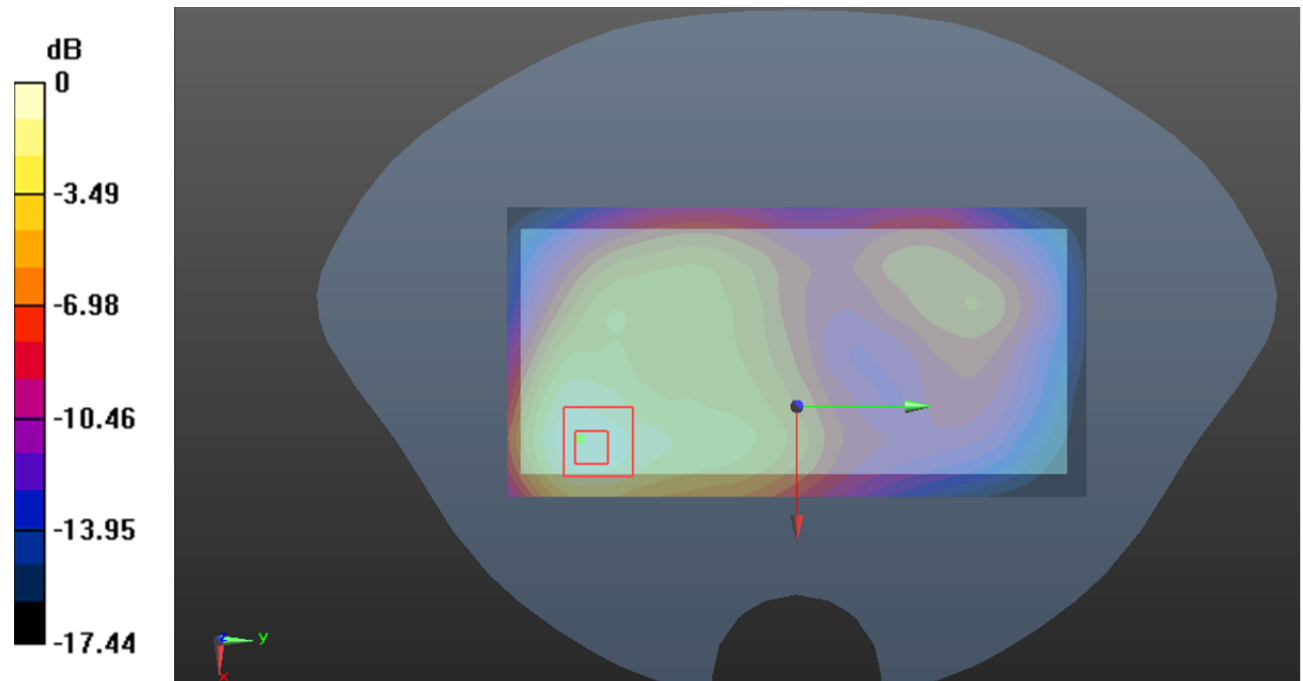

0 dB = 0.346 W/kg = -4.61 dB dBW/kg

**Test Plot 46#: WCDMA Band 4\_Body Left\_Middle****DUT: Phone; Type: NITRON62; Serial: 23CH\_1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.324$  S/m;  $\epsilon_r = 40.714$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.1, 8.1, 8.1) @1732.6 MHz; Calibrated: 2022/5/6;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.190 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.309 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.228 W/kg

**SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.081 W/kg**

Maximum value of SAR (measured) = 0.194 W/kg

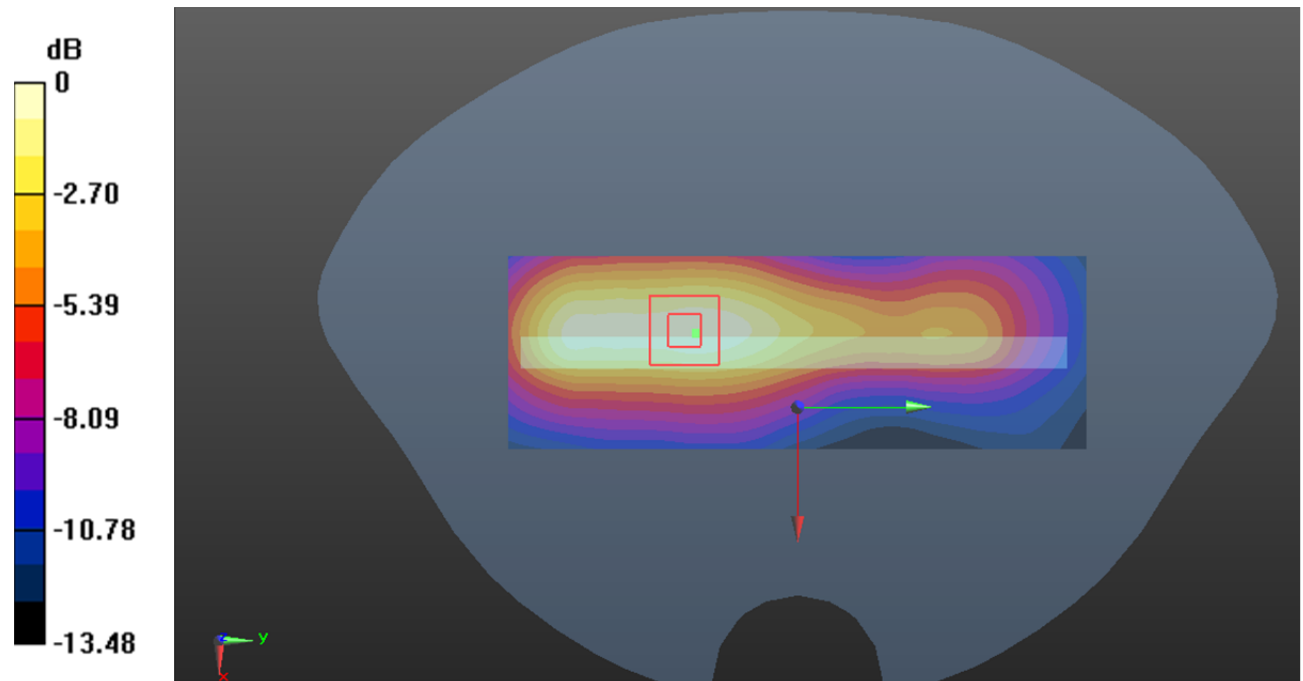

0 dB = 0.194 W/kg = -7.12 dB dBW/kg