


Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/05/16
Test Channel :	CH64(5320MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

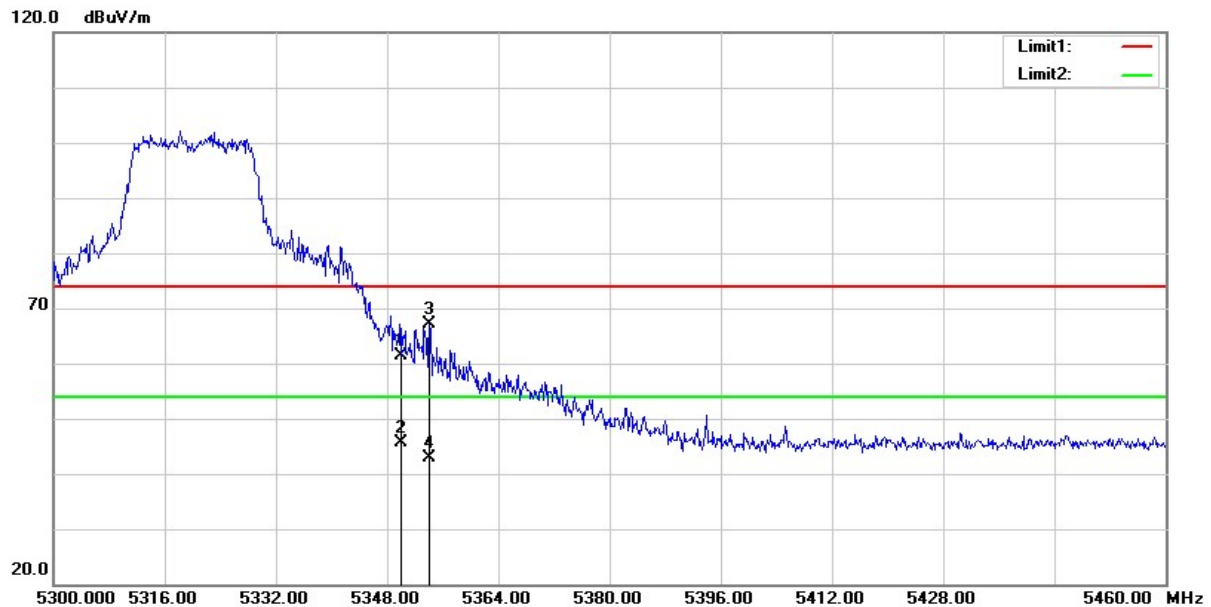


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	56.15	5.16	61.31	74.00	-12.69	peak
2	5350.000	40.52	5.16	45.68	54.00	-8.32	AVG
3	5354.080	61.91	5.16	67.07	74.00	-6.93	peak
4	5354.080	37.67	5.16	42.83	54.00	-11.17	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/05/16
Test Channel :	CH100(5500MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

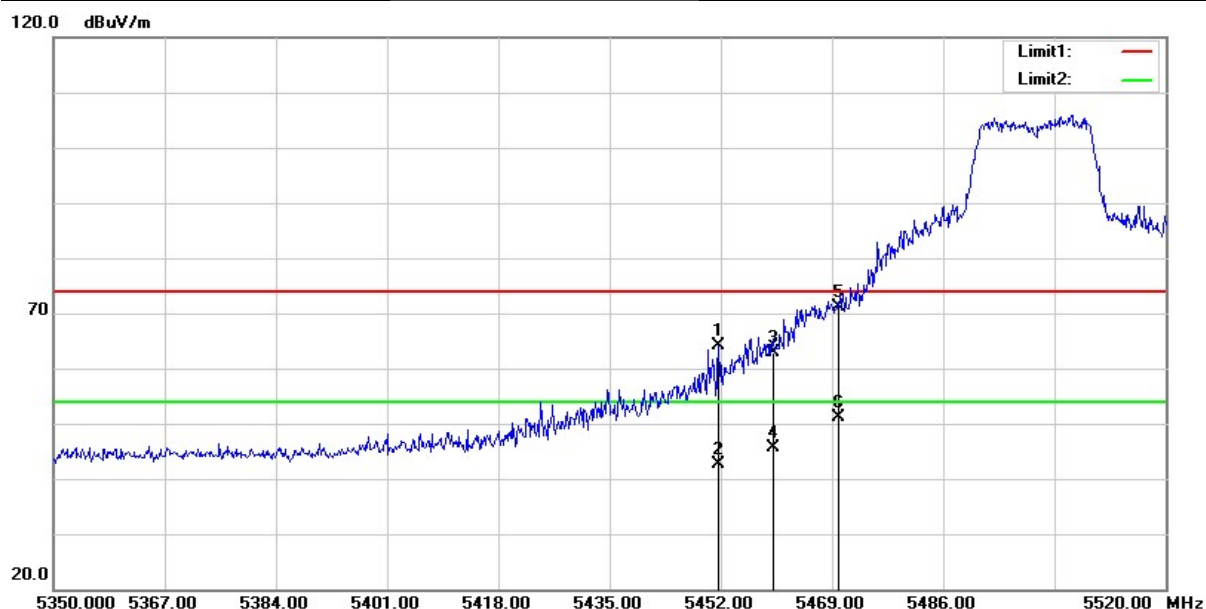


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5451.660	58.82	5.29	64.11	74.00	-9.89	peak
2	5451.660	37.26	5.29	42.55	54.00	-11.45	AVG
3	5460.000	57.67	5.32	62.99	74.00	-11.01	peak
4	5460.000	40.31	5.32	45.63	54.00	-8.37	AVG
5	5470.000	65.65	5.36	71.01	74.00	-2.99	peak
6	5470.000	45.86	5.36	51.22	54.00	-2.78	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/05/16
Test Channel :	CH100(5500MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

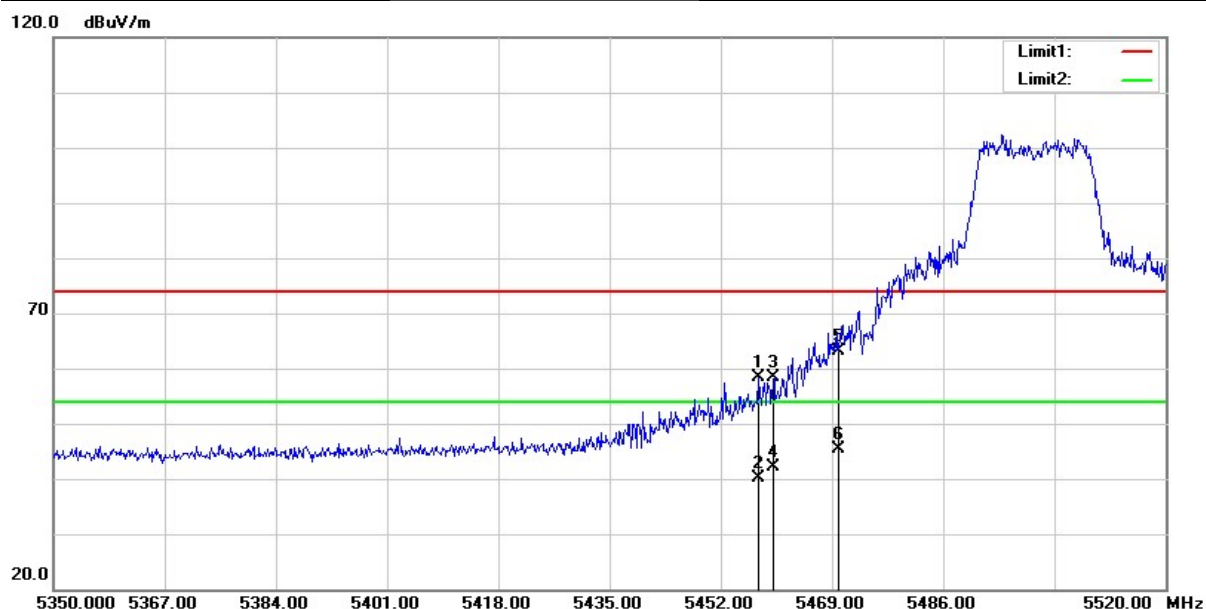


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.780	53.07	5.31	58.38	74.00	-15.62	peak
2	5457.780	34.77	5.31	40.08	54.00	-13.92	AVG
3	5460.000	53.11	5.32	58.43	74.00	-15.57	peak
4	5460.000	36.79	5.32	42.11	54.00	-11.89	AVG
5	5470.000	57.86	5.36	63.22	74.00	-10.78	peak
6	5470.000	39.92	5.36	45.28	54.00	-8.72	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/05/15
Test Channel :	CH149(5745MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

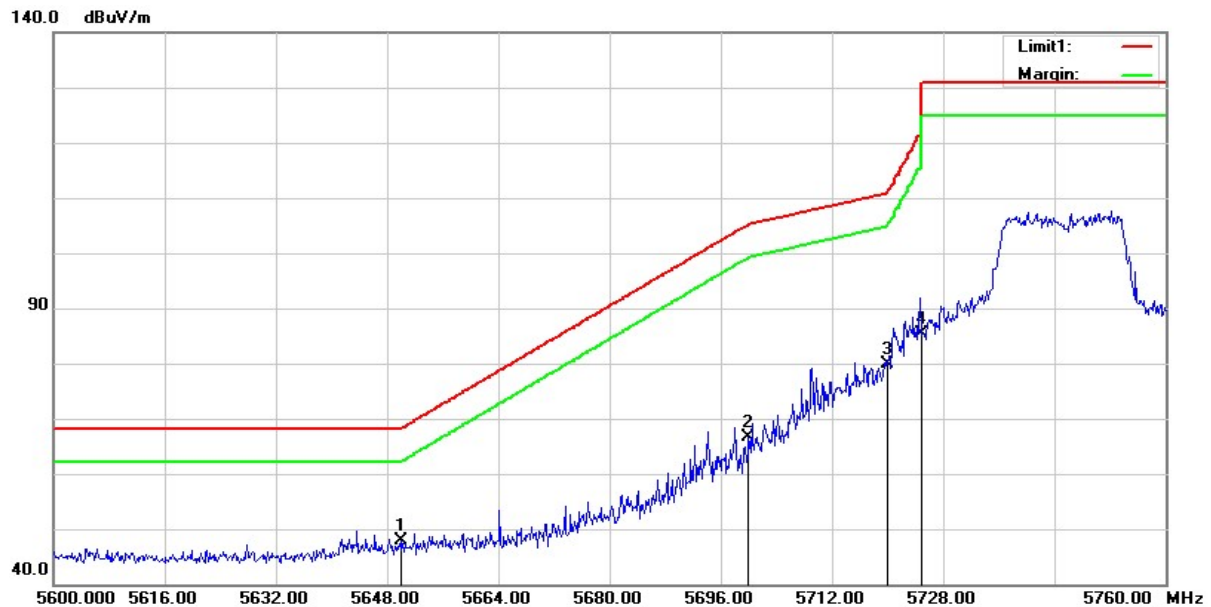


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	42.32	5.48	47.80	68.20	-20.40	peak
2	5700.000	61.05	5.61	66.66	105.20	-38.54	peak
3	5720.000	74.11	5.70	79.81	110.80	-30.99	peak
4	5725.000	79.75	5.73	85.48	122.20	-36.72	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/05/15
Test Channel :	CH149(5745MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

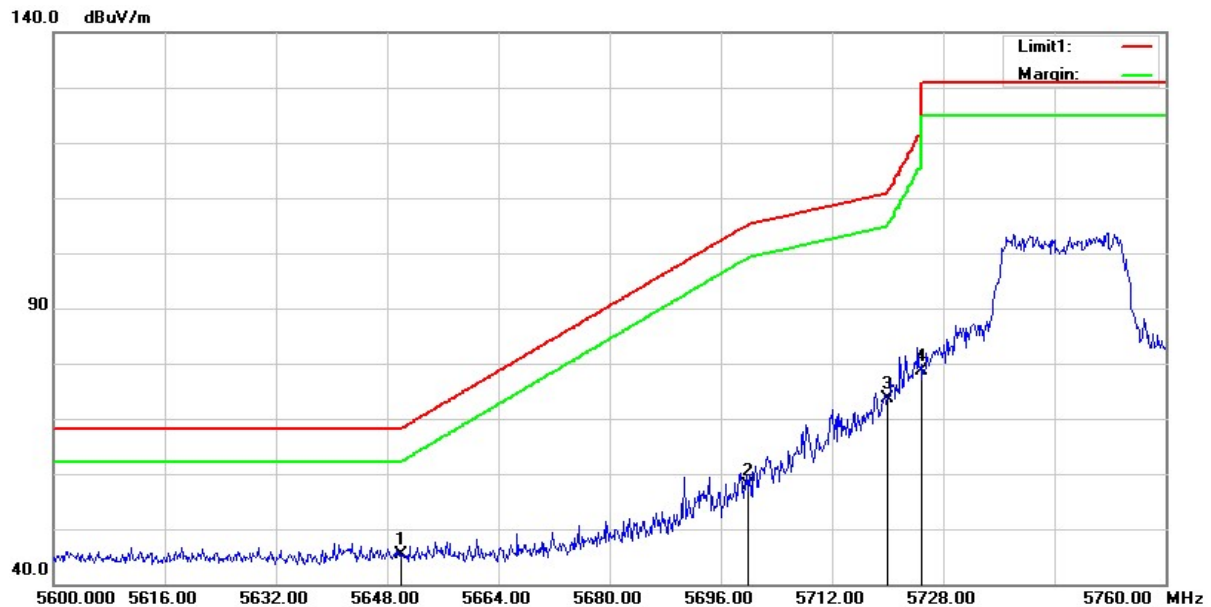

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	39.89	5.48	45.37	68.20	-22.83	peak
2	5700.000	52.25	5.61	57.86	105.20	-47.34	peak
3	5720.000	67.92	5.70	73.62	110.80	-37.18	peak
4	5725.000	73.00	5.73	78.73	122.20	-43.47	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/05/15
Test Channel :	CH165(5825MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	78.02	6.20	84.22	122.20	-37.98	peak
2	5855.000	76.03	6.21	82.24	110.80	-28.56	peak
3	5875.000	64.24	6.26	70.50	105.20	-34.70	peak
4	5925.000	43.54	6.45	49.99	68.20	-18.21	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/05/15
Test Channel :	CH165(5825MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

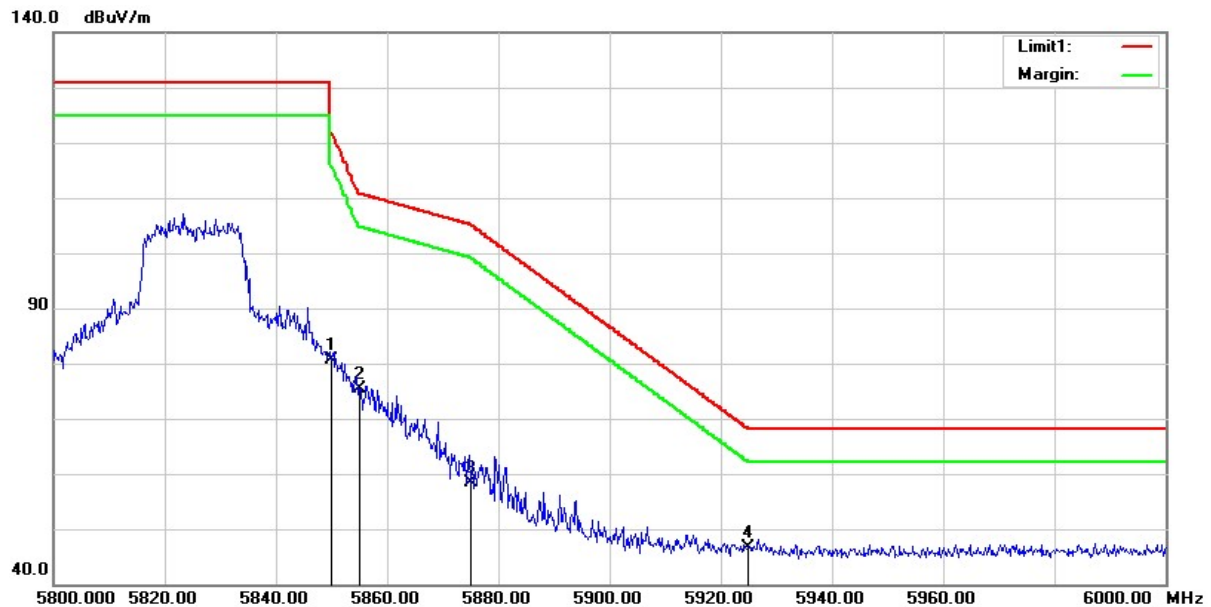


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	74.46	6.20	80.66	122.20	-41.54	peak
2	5855.000	69.13	6.21	75.34	110.80	-35.46	peak
3	5875.000	52.11	6.26	58.37	105.20	-46.83	peak
4	5925.000	40.24	6.45	46.69	68.20	-21.51	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2019/05/15
Test Channel :	CH38(5190MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

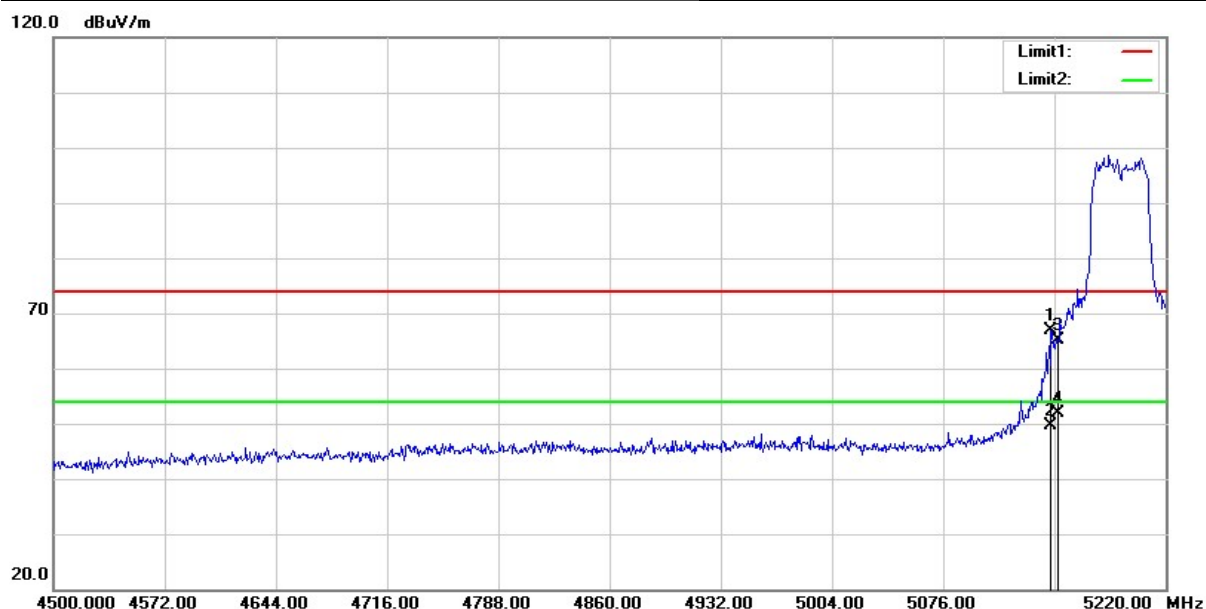


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.840	61.29	5.53	66.82	74.00	-7.18	peak
2	5145.840	44.18	5.53	49.71	54.00	-4.29	AVG
3	5150.000	59.52	5.53	65.05	74.00	-8.95	peak
4	5150.000	46.37	5.53	51.90	54.00	-2.10	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2019/05/15
Test Channel :	CH38(5190MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

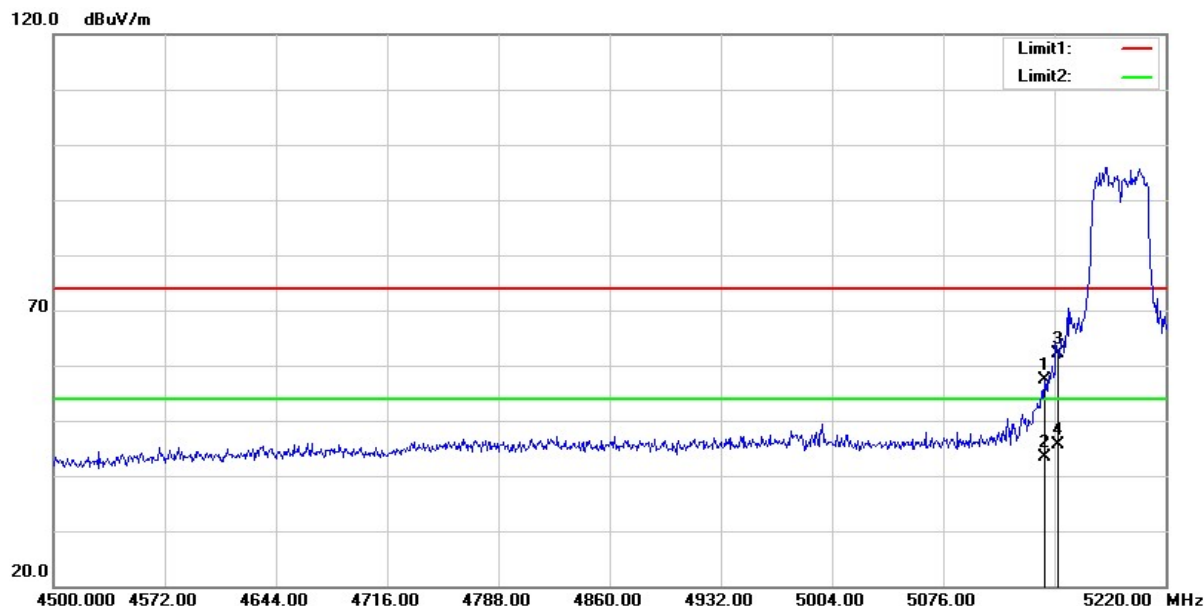


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5141.520	51.87	5.52	57.39	74.00	-16.61	peak
2	5141.520	37.76	5.52	43.28	54.00	-10.72	AVG
3	5150.000	56.72	5.53	62.25	74.00	-11.75	peak
4	5150.000	40.14	5.53	45.67	54.00	-8.33	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2019/05/15
Test Channel :	CH62(5310MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

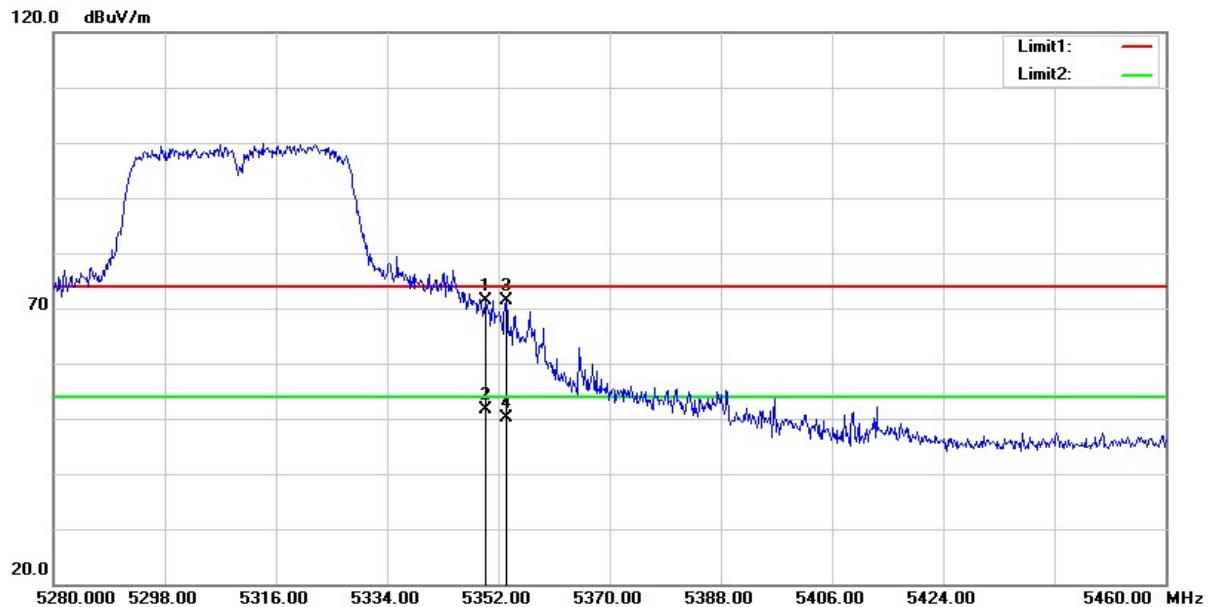

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	66.18	5.16	71.34	74.00	-2.66	peak
2	5350.000	46.46	5.16	51.62	54.00	-2.38	AVG
3	5353.260	66.10	5.16	71.26	74.00	-2.74	peak
4	5353.260	44.90	5.16	50.06	54.00	-3.94	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2019/05/15
Test Channel :	CH62(5310MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	58.64	5.16	63.80	74.00	-10.20	peak
2	5350.000	40.47	5.16	45.63	54.00	-8.37	AVG
3	5353.980	63.15	5.16	68.31	74.00	-5.69	peak
4	5353.980	38.71	5.16	43.87	54.00	-10.13	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2019/05/15
Test Channel :	CH102(5510MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

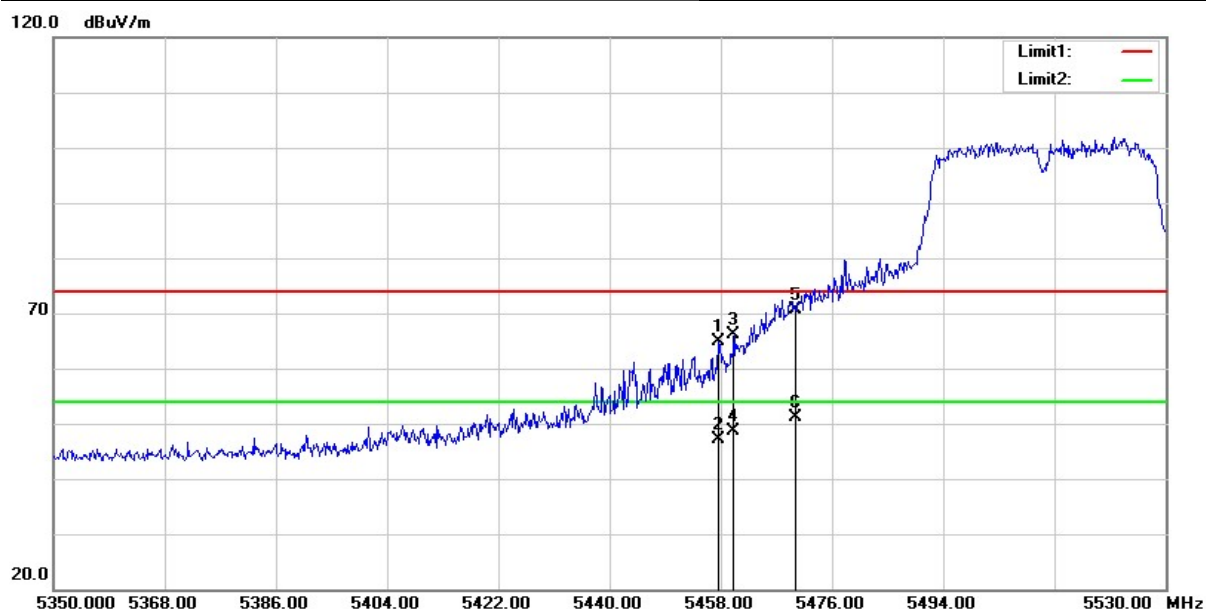


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.640	59.49	5.31	64.80	74.00	-9.20	peak
2	5457.640	41.79	5.31	47.10	54.00	-6.90	AVG
3	5460.000	60.75	5.32	66.07	74.00	-7.93	peak
4	5460.000	43.27	5.32	48.59	54.00	-5.41	AVG
5	5470.000	65.22	5.36	70.58	74.00	-3.42	peak
6	5470.000	45.79	5.36	51.15	54.00	-2.85	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2019/05/15
Test Channel :	CH102(5510MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

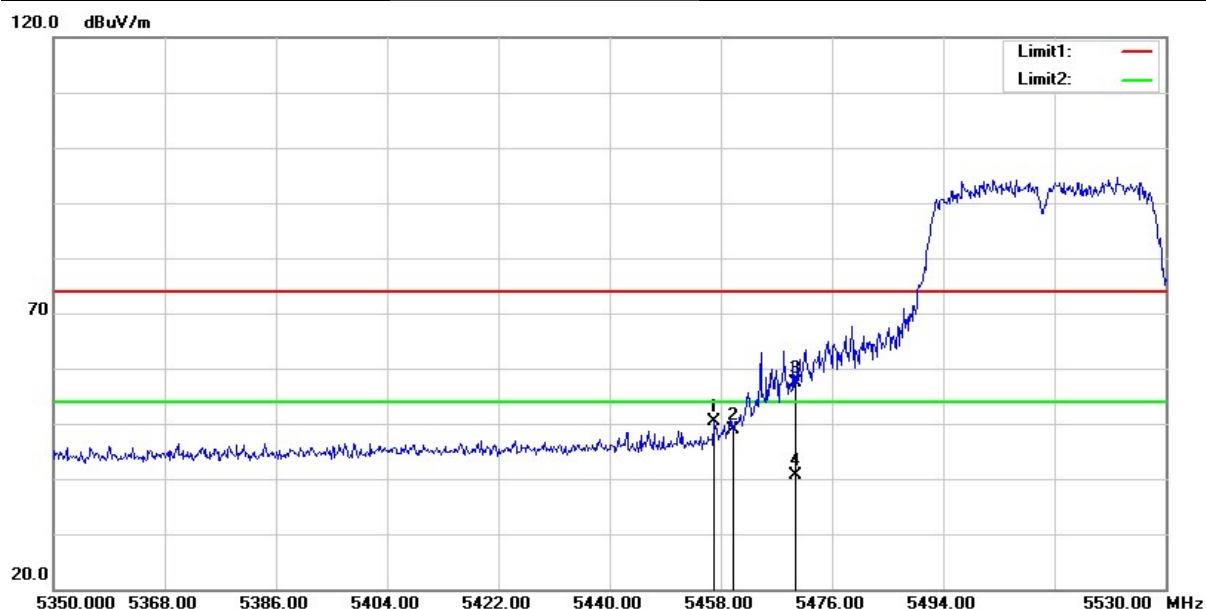


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.920	44.95	5.31	50.26	74.00	-23.74	peak
2	5460.000	43.53	5.32	48.85	74.00	-25.15	peak
3	5470.000	52.08	5.36	57.44	74.00	-16.56	peak
4	5470.000	35.31	5.36	40.67	54.00	-13.33	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2019/05/15
Test Channel :	CH151(5755MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

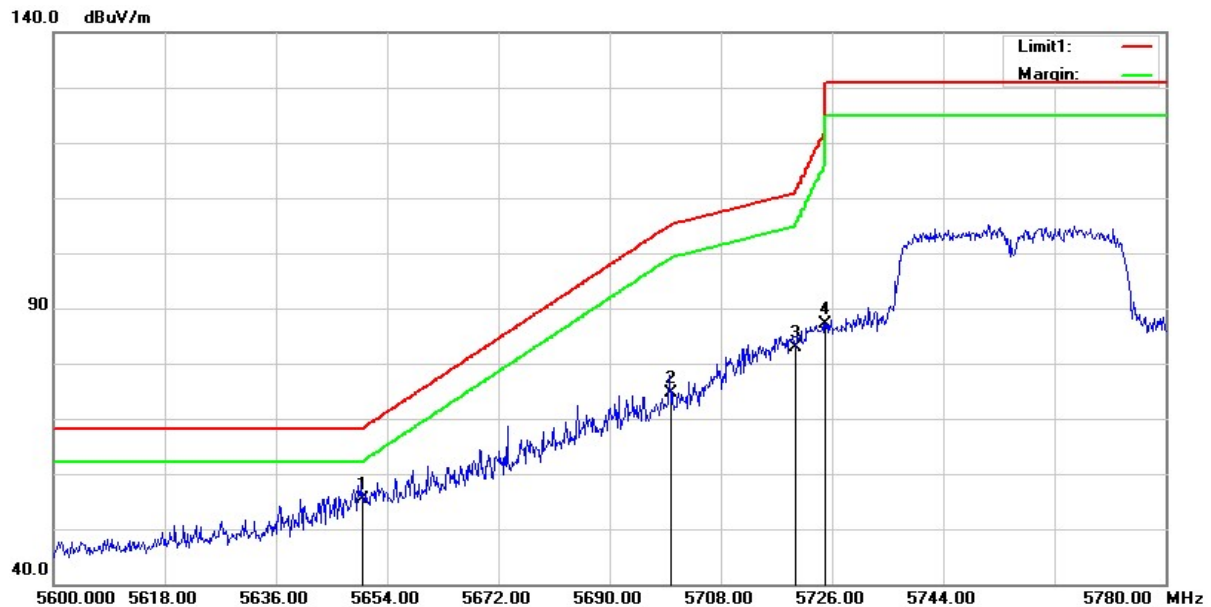


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	50.01	5.48	55.49	68.20	-12.71	peak
2	5700.000	69.14	5.61	74.75	105.20	-30.45	peak
3	5720.000	77.27	5.70	82.97	110.80	-27.83	peak
4	5725.000	81.50	5.73	87.23	122.20	-34.97	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2019/05/15
Test Channel :	CH151(5755MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

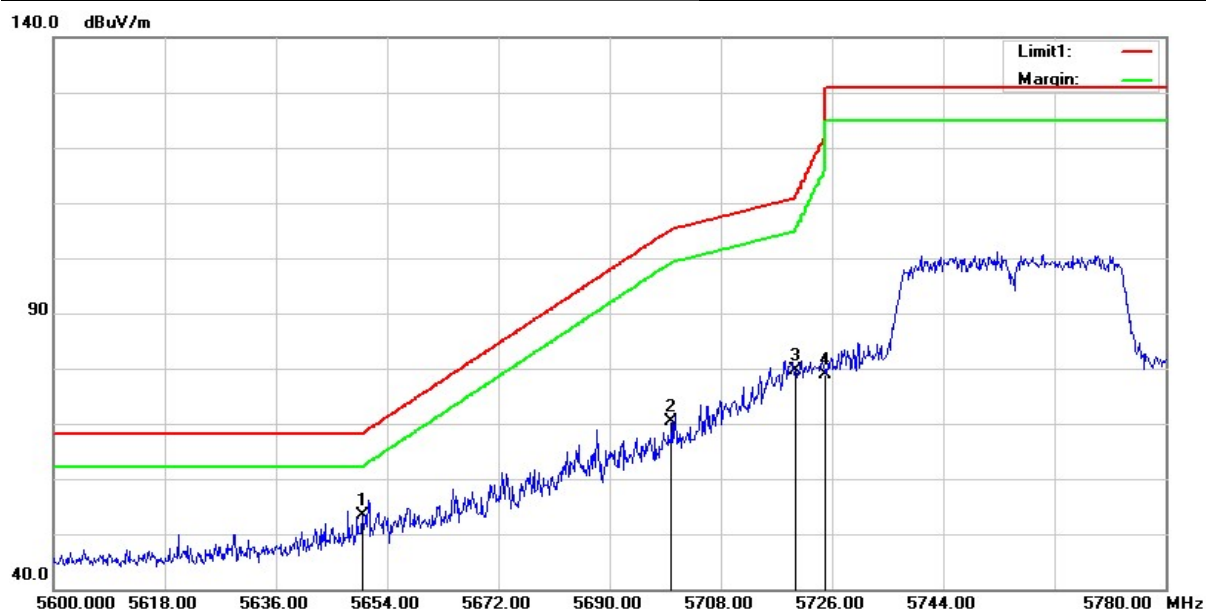


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.85	5.48	53.33	68.20	-14.87	peak
2	5700.000	64.73	5.61	70.34	105.20	-34.86	peak
3	5720.000	73.99	5.70	79.69	110.80	-31.11	peak
4	5725.000	73.15	5.73	78.88	122.20	-43.32	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2019/05/15
Test Channel :	CH159(5795MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

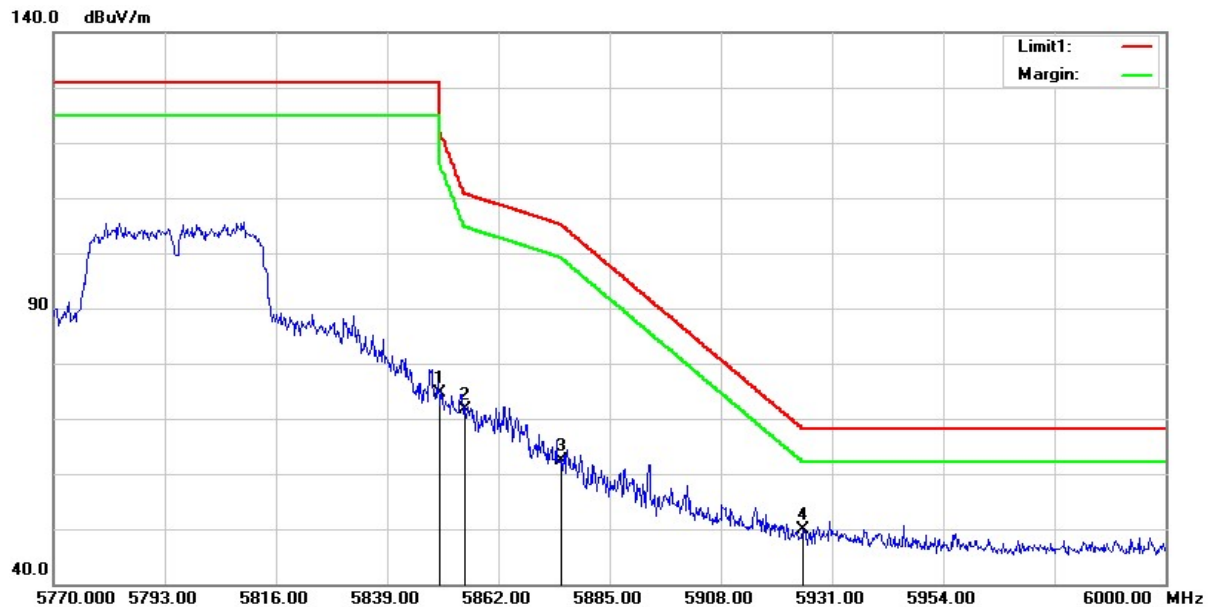


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	68.33	6.20	74.53	122.20	-47.67	peak
2	5855.000	65.30	6.21	71.51	110.80	-39.29	peak
3	5875.000	56.02	6.26	62.28	105.20	-42.92	peak
4	5925.000	43.34	6.45	49.79	68.20	-18.41	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2019/05/15
Test Channel :	CH159(5795MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

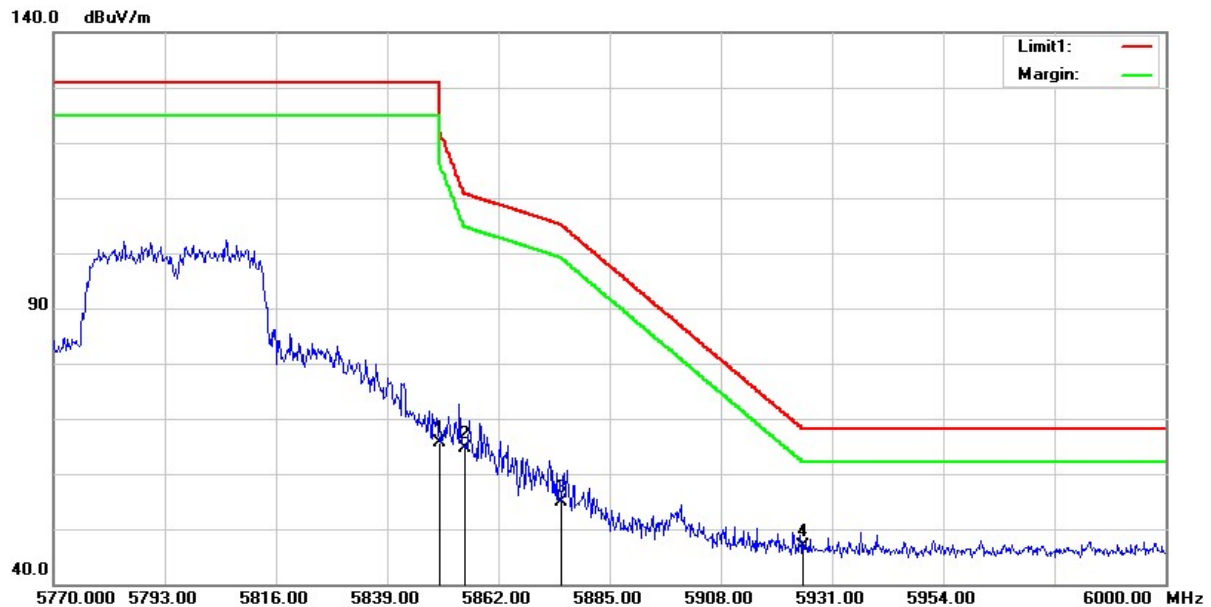

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	59.38	6.20	65.58	122.20	-56.62	peak
2	5855.000	58.33	6.21	64.54	110.80	-46.26	peak
3	5875.000	48.64	6.26	54.90	105.20	-50.30	peak
4	5925.000	40.48	6.45	46.93	68.20	-21.27	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit


2.4.6 Test Result of Radiated Spurious Emission Measurement

- (1) The radiation measurement frequency is 9kHz ~ 30MHz. The interference value of this frequency range is less than the limit value of 20 dB. It is considered that the background noise value is not recorded.
- (2) The following table shows the radiation measurement frequency from 30MHz to 40GHz, pre-scanning in the X, Y and Z axes. The worst case (X-axis) is documented in this report.

Test Frequency		
RF	802.11a / 802.11n HT20	802.11n HT40
Tx	CH36 (5180MHz)	
	CH44 (5220MHz)	
	CH48 (5240MHz)	CH38 (5190MHz)
	CH52 (5260MHz)	CH46 (5230MHz)
	CH56 (5300MHz)	CH54 (5270MHz)
	CH64 (5320MHz)	CH62 (5310MHz)
	CH100 (5500MHz)	CH102 (5510MHz)
	CH112 (5580MHz)	CH110 (5550MHz)
	CH140 (5700MHz)	CH134 (5670MHz)
	CH149 (5745MHz)	CH151 (5755MHz)
	CH157 (5785MHz)	CH159 (5795MHz)
	CH165 (5825MHz)	

Above 1GHz Data

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH36(5180MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

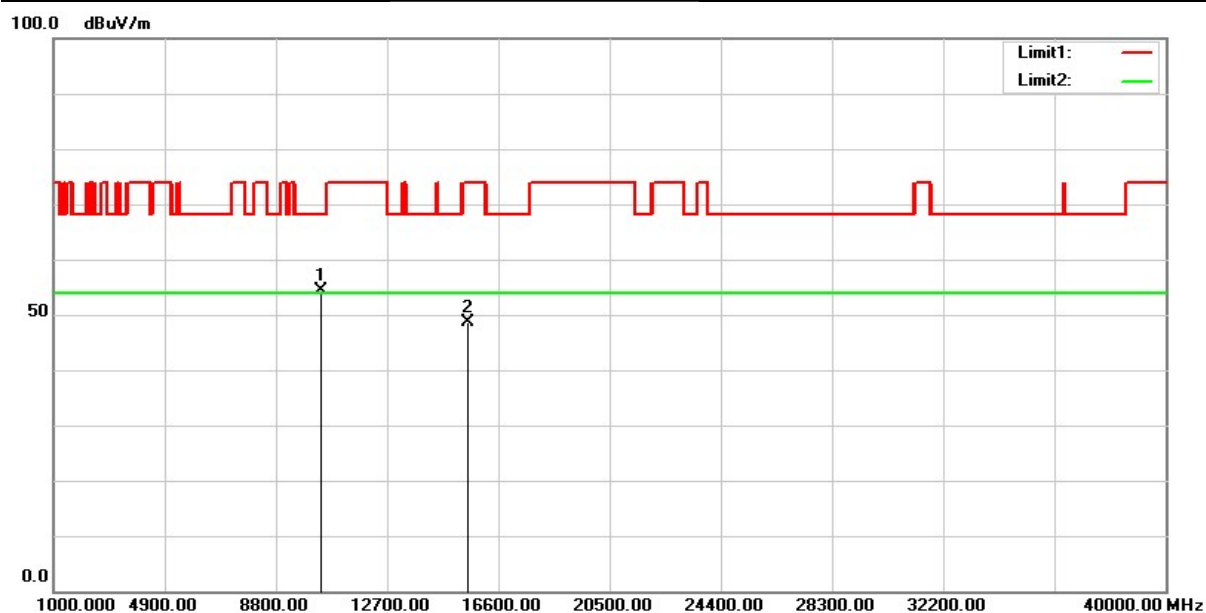


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	51.73	2.73	54.46	68.20	-13.74	peak
2	15540.000	41.34	7.35	48.69	74.00	-25.31	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH36(5180MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

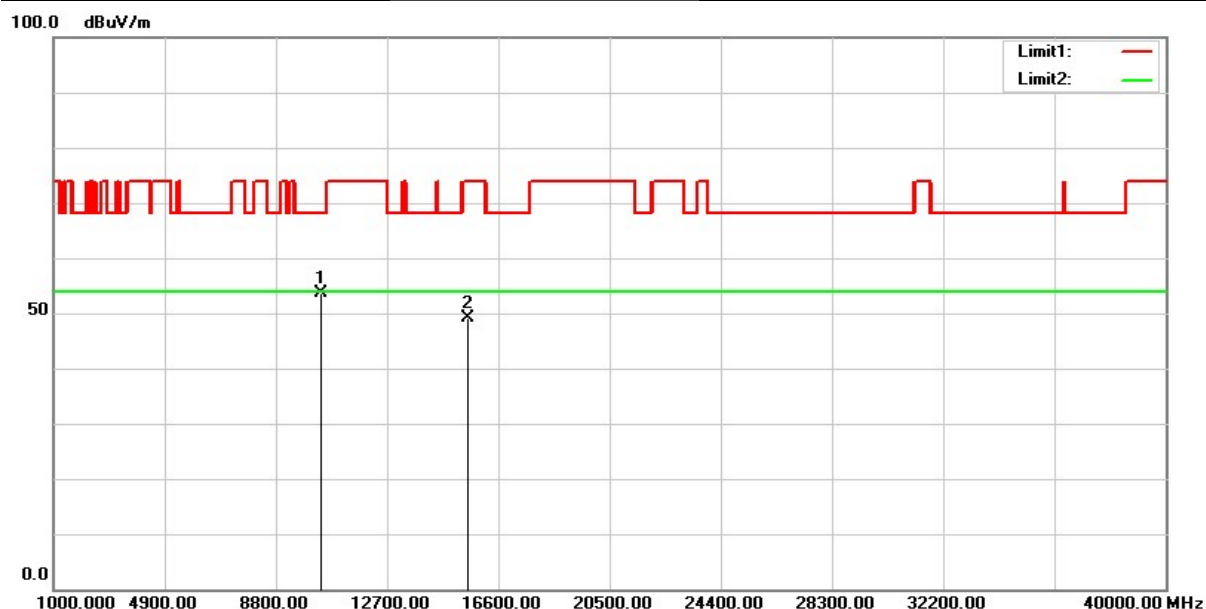


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	50.82	2.73	53.55	68.20	-14.65	peak
2	15540.000	41.73	7.35	49.08	74.00	-24.92	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH44(5220MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

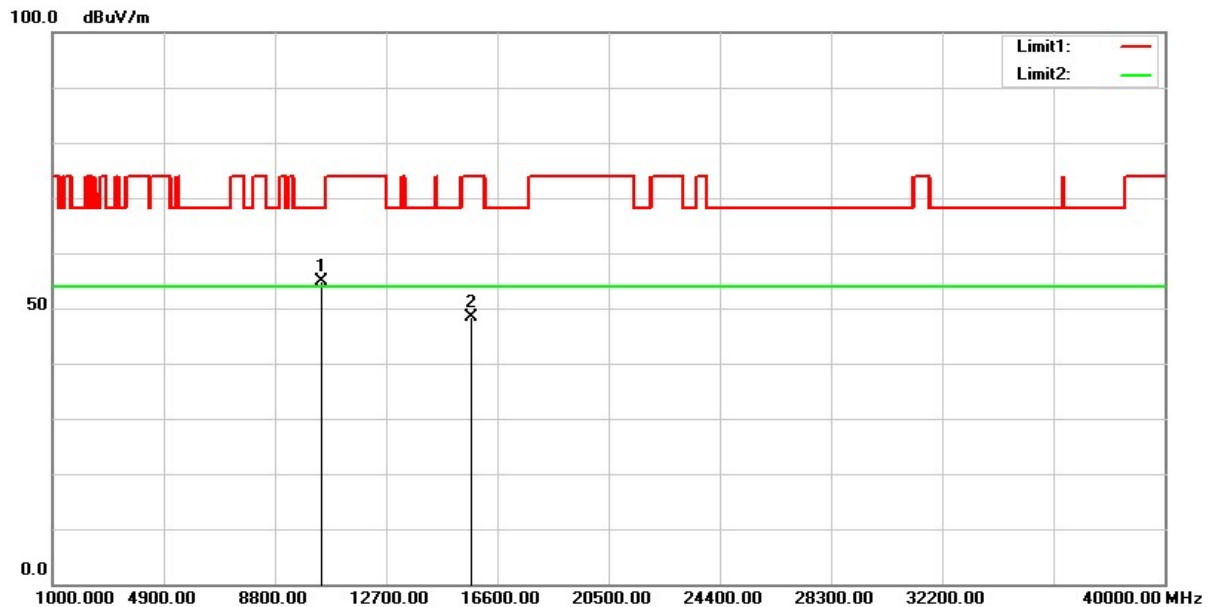


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10440.000	51.77	3.05	54.82	68.20	-13.38	peak
2	15660.000	41.32	6.97	48.29	74.00	-25.71	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH44(5220MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

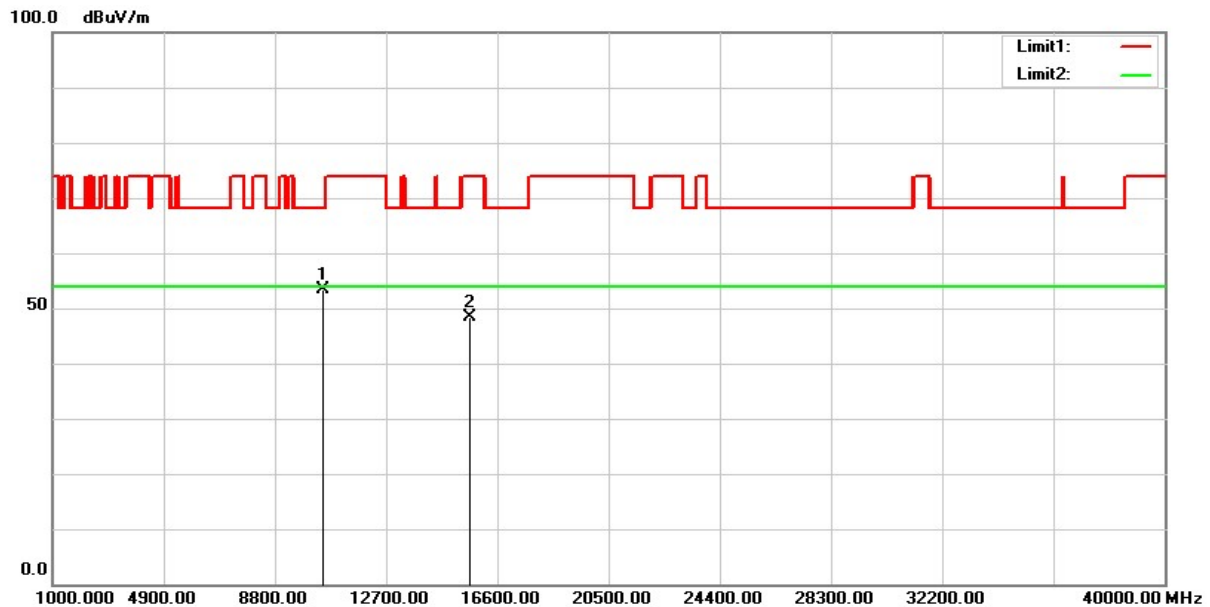


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10440.000	50.35	3.05	53.40	68.20	-14.80	peak
2	15660.000	41.52	6.97	48.49	74.00	-25.51	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH48(5240MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

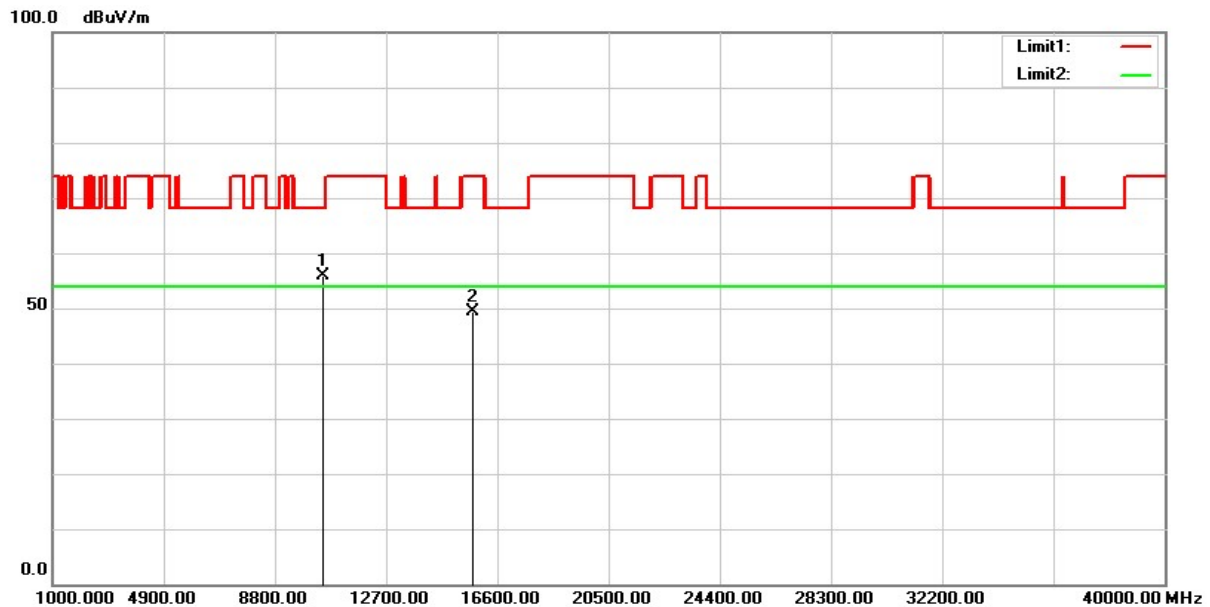


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	52.66	3.17	55.83	68.20	-12.37	peak
2	15720.000	42.63	6.81	49.44	74.00	-24.56	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH48(5240MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

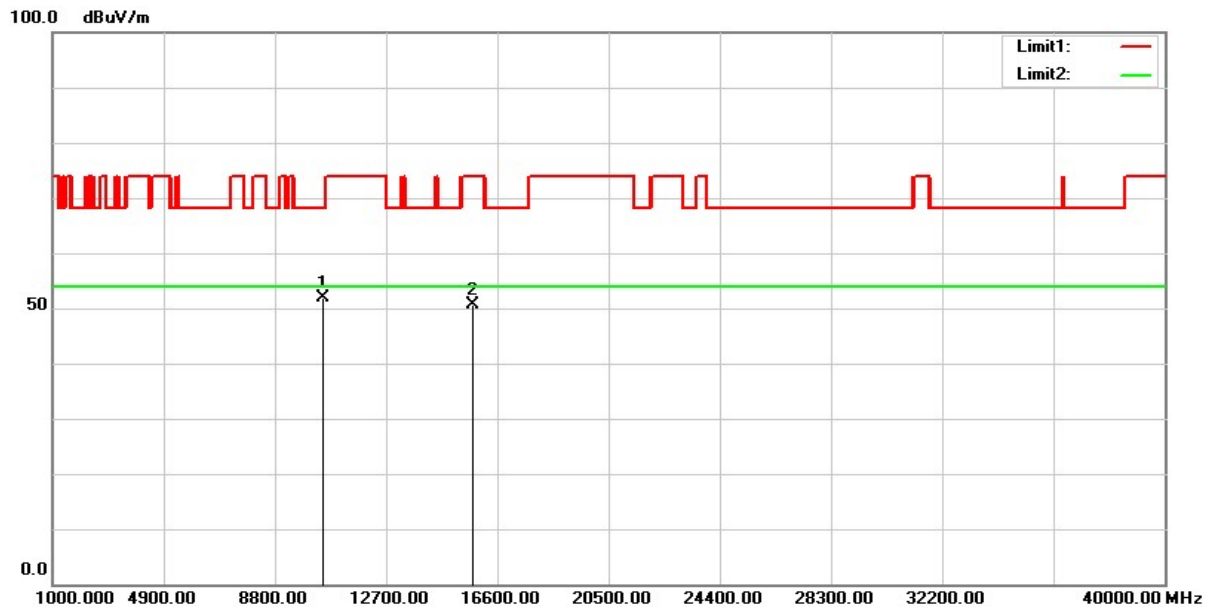


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	48.71	3.17	51.88	68.20	-16.32	peak
2	15720.000	43.91	6.81	50.72	74.00	-23.28	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH52(5260MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

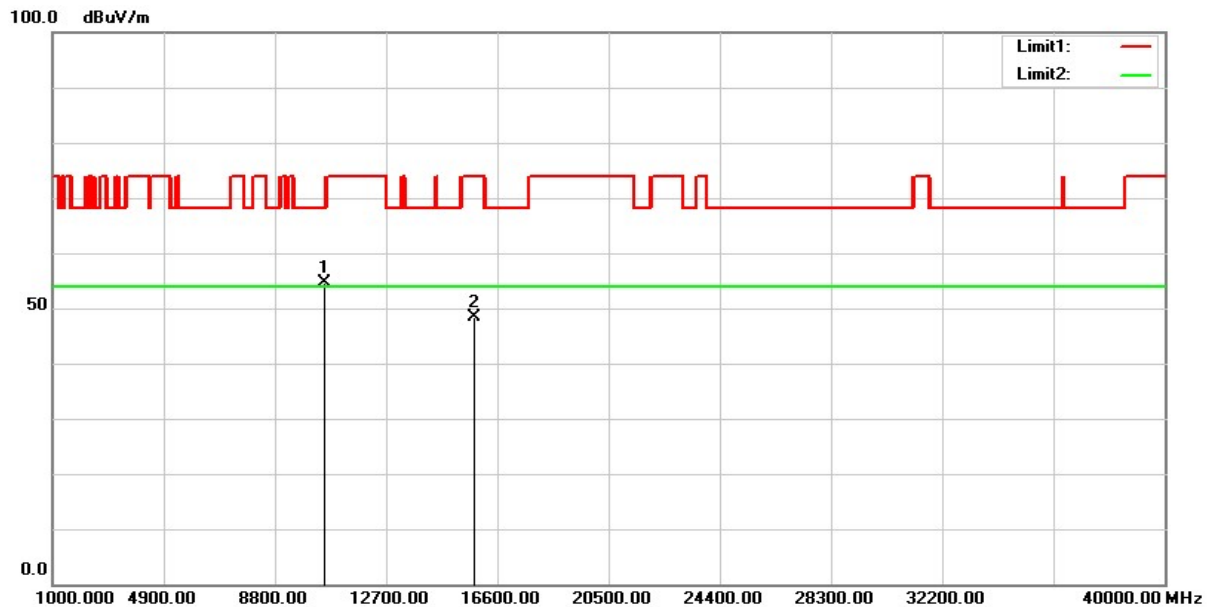


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	51.35	3.20	54.55	68.20	-13.65	peak
2	15780.000	41.82	6.62	48.44	74.00	-25.56	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH52(5260MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

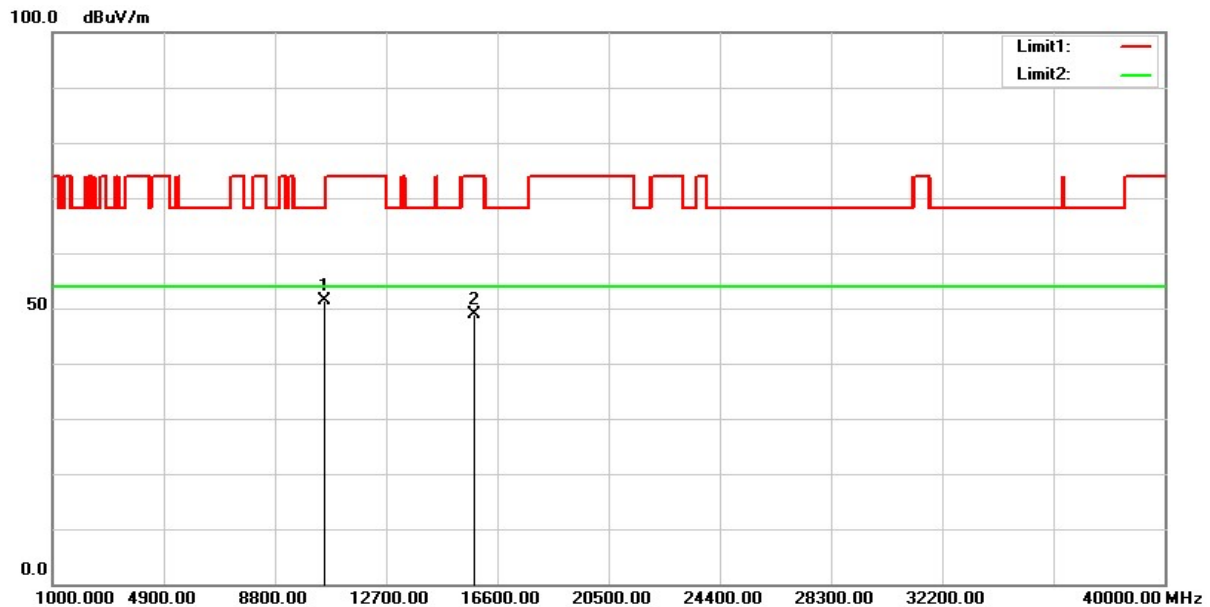


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	48.23	3.20	51.43	68.20	-16.77	peak
2	15780.000	42.32	6.62	48.94	74.00	-25.06	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH56(5300MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

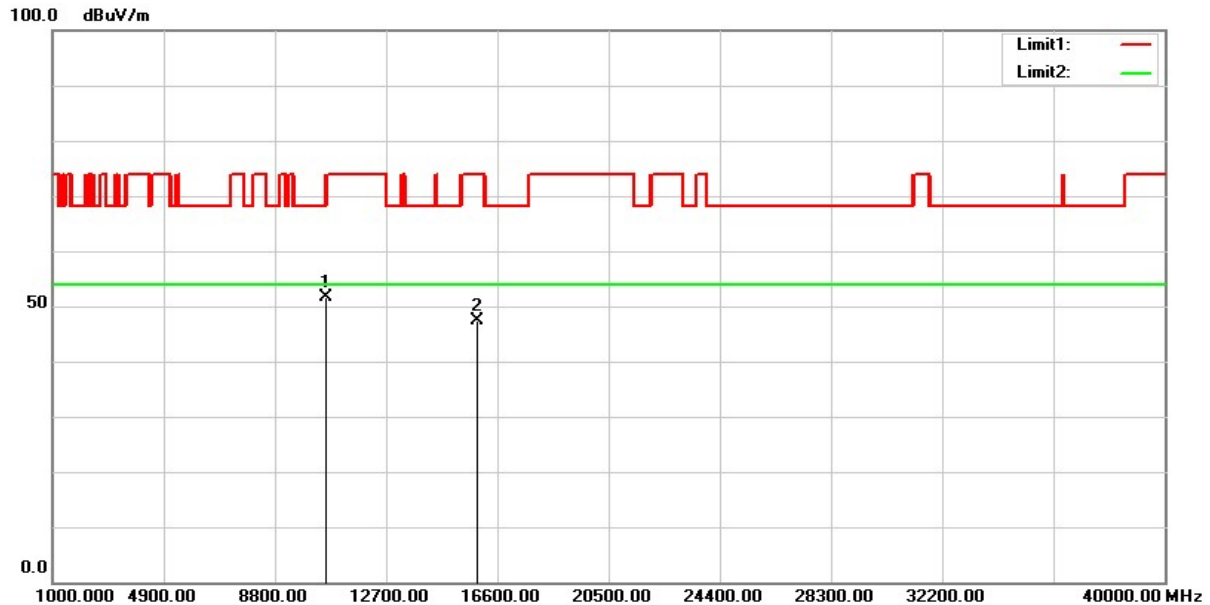


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10600.000	48.55	3.01	51.56	68.20	-16.64	peak
2	15900.000	40.73	6.53	47.26	74.00	-26.74	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH56(5300MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

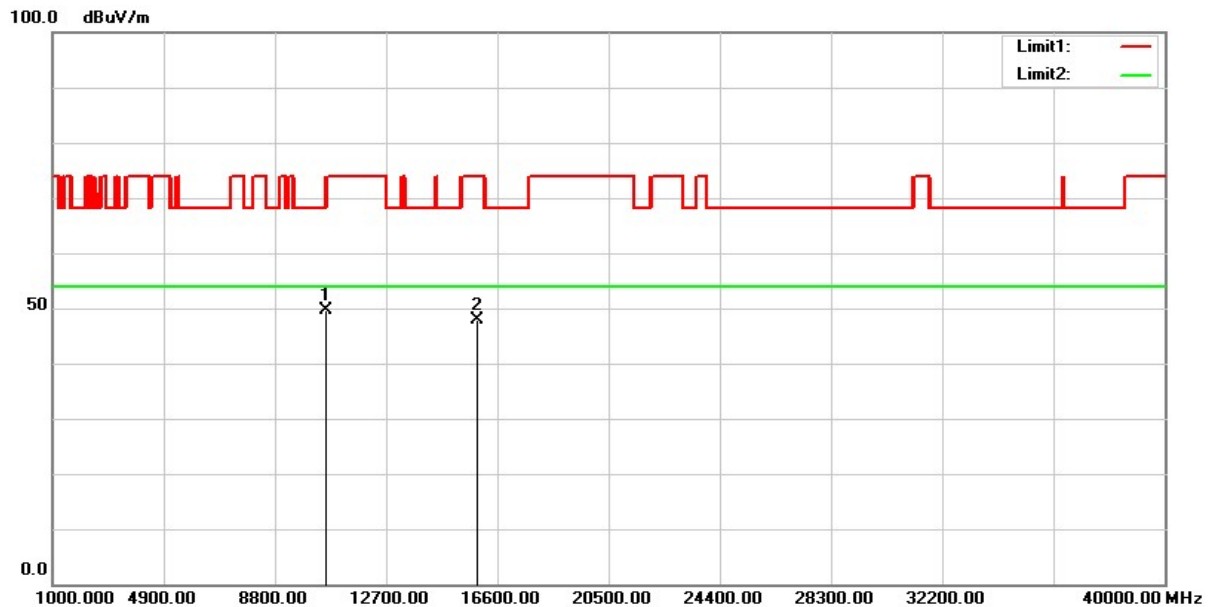


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10600.000	46.65	3.01	49.66	68.20	-18.54	peak
2	15900.000	41.42	6.53	47.95	74.00	-26.05	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH64(5320MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

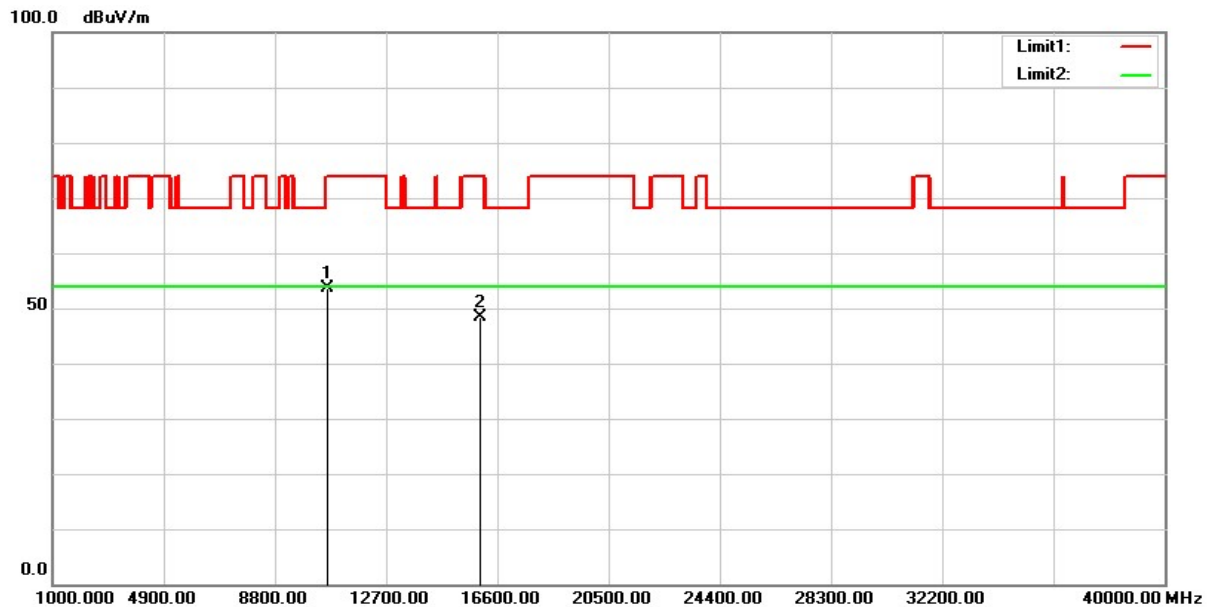


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	50.66	3.08	53.74	74.00	-20.26	peak
2	15960.000	41.98	6.40	48.38	74.00	-25.62	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH64(5320MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

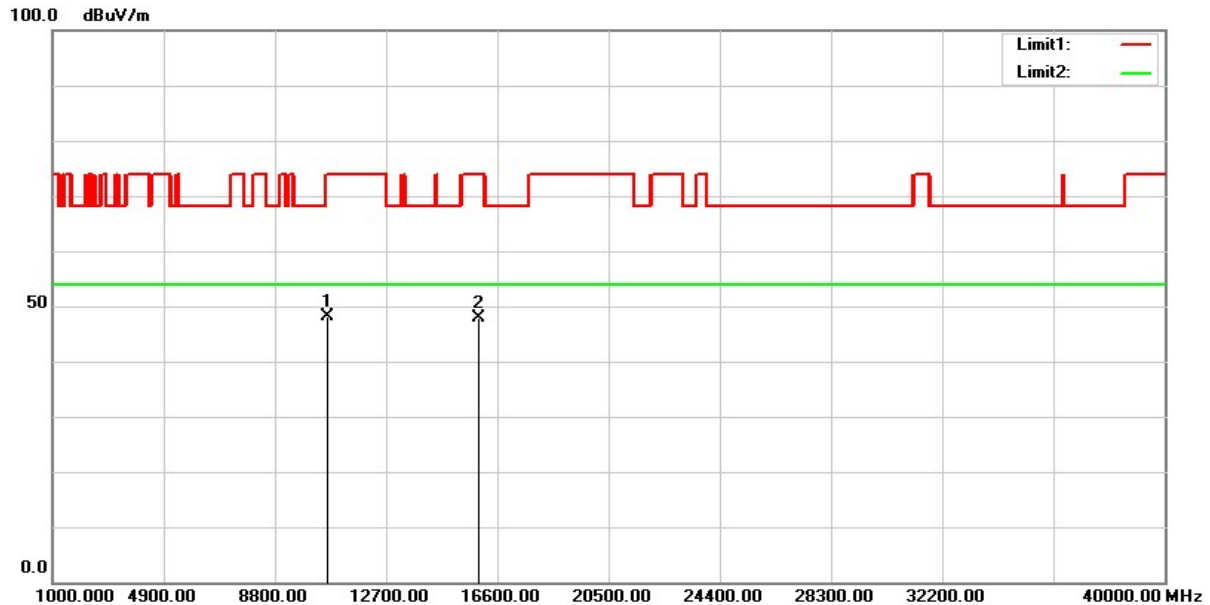


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	45.08	3.08	48.16	74.00	-25.84	peak
2	15960.000	41.55	6.40	47.95	74.00	-26.05	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH100(5500MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

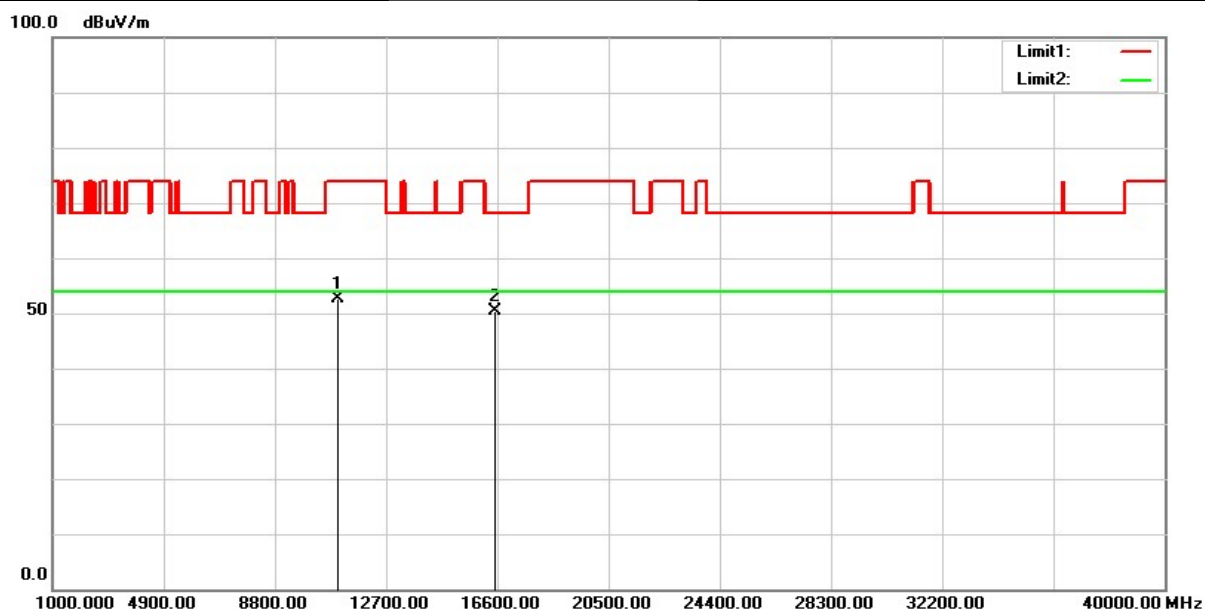


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	49.15	3.59	52.74	74.00	-21.26	peak
2	16500.000	42.31	7.98	50.29	68.20	-17.91	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH100(5500MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

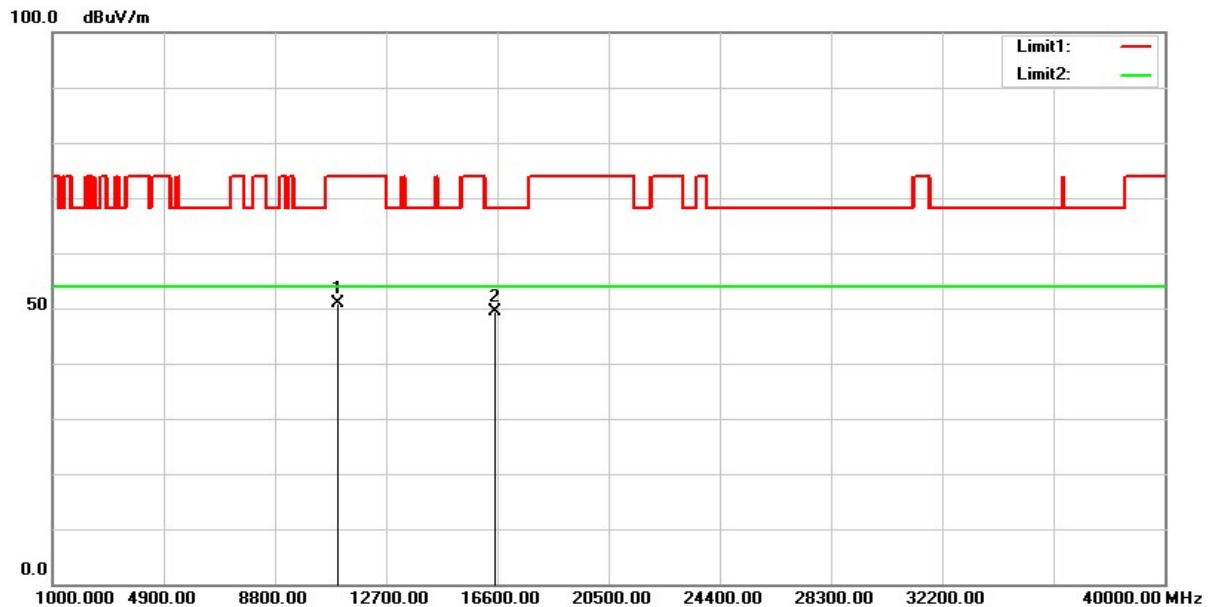


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	47.23	3.59	50.82	74.00	-23.18	peak
2	16500.000	41.30	7.98	49.28	68.20	-18.92	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH112(5580MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

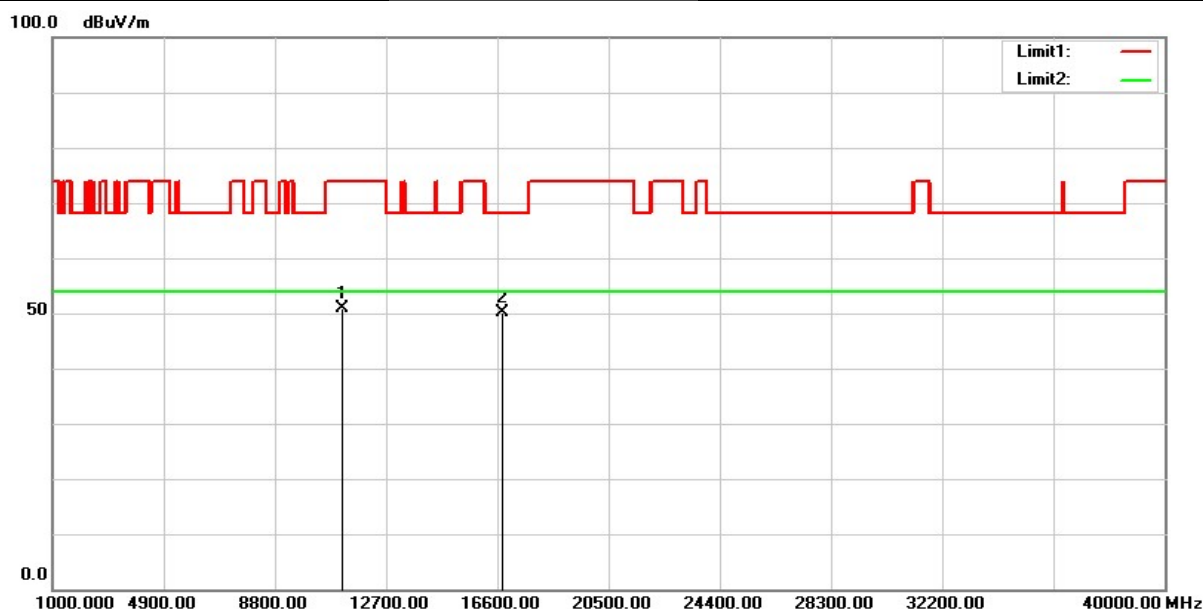


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11160.000	47.91	3.08	50.99	74.00	-23.01	peak
2	16740.000	40.73	9.51	50.24	68.20	-17.96	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH112(5580MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

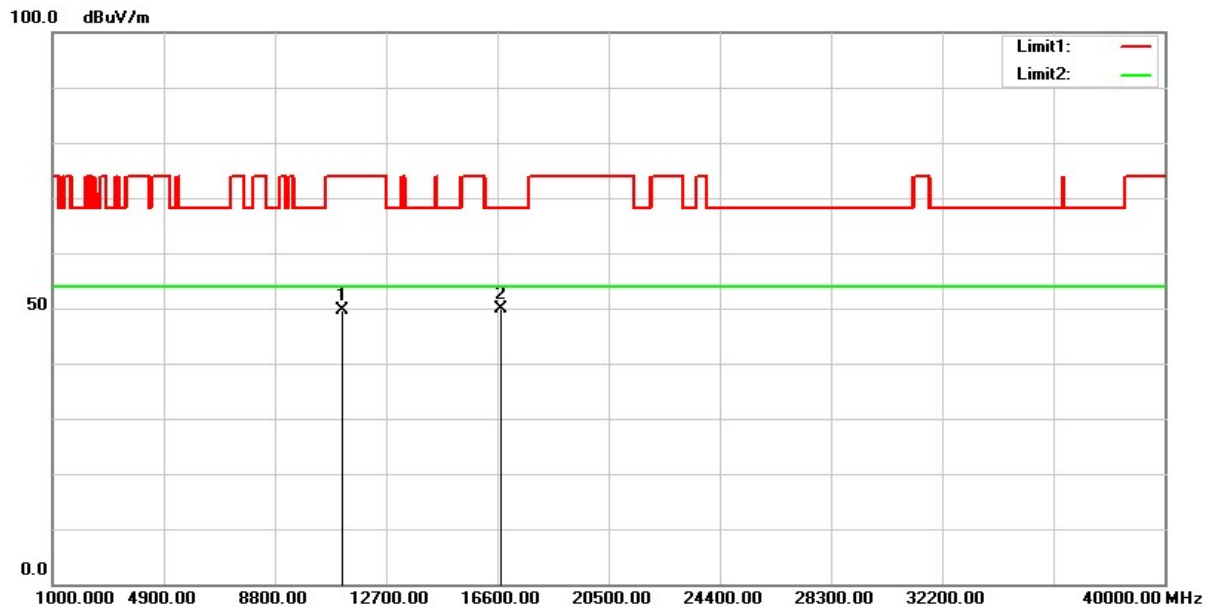


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11160.000	46.47	3.08	49.55	74.00	-24.45	peak
2	16740.000	40.32	9.51	49.83	68.20	-18.37	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH140(5700MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

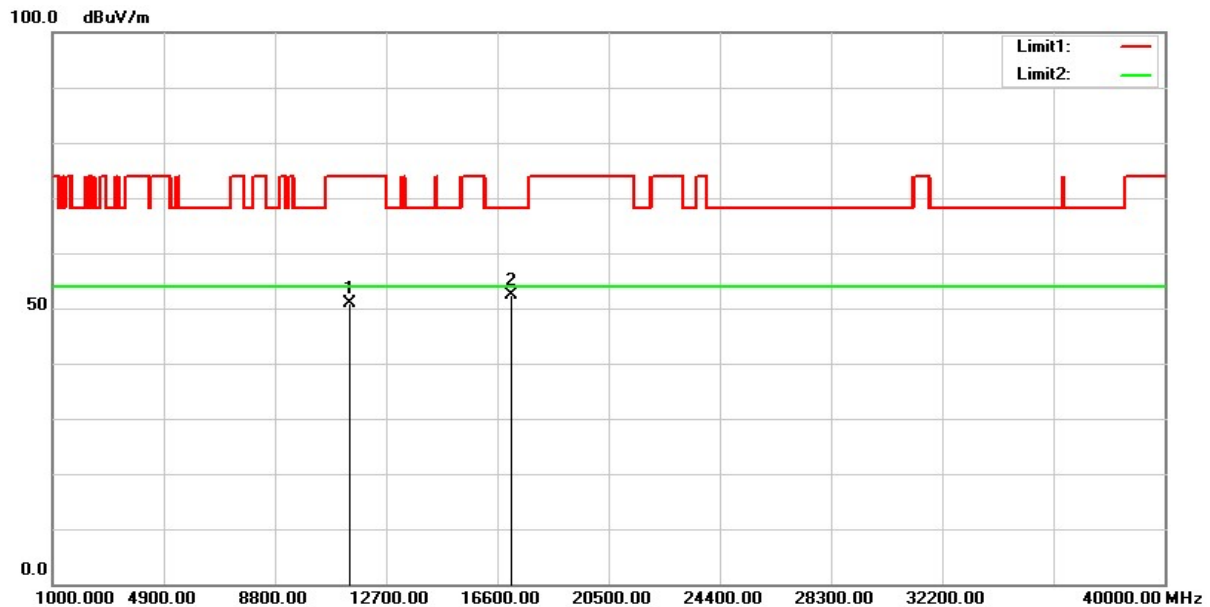


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	47.28	3.72	51.00	74.00	-23.00	peak
2	17100.000	41.24	11.08	52.32	68.20	-15.88	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH140(5700MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

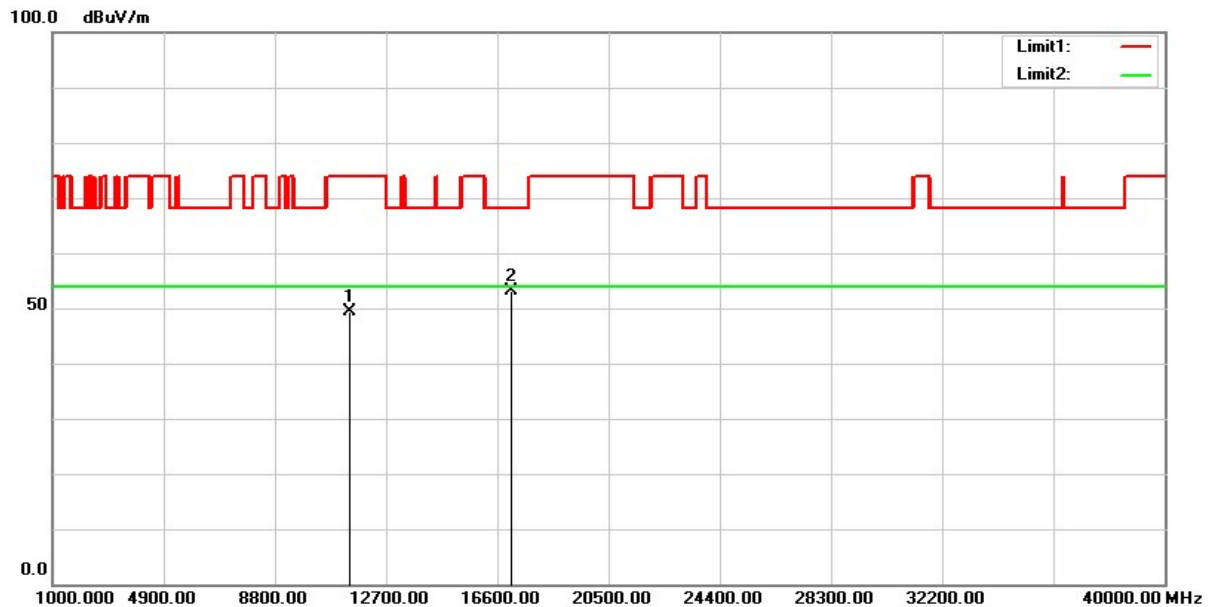


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	45.58	3.72	49.30	74.00	-24.70	peak
2	17100.000	42.04	11.08	53.12	68.20	-15.08	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH149(5745MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

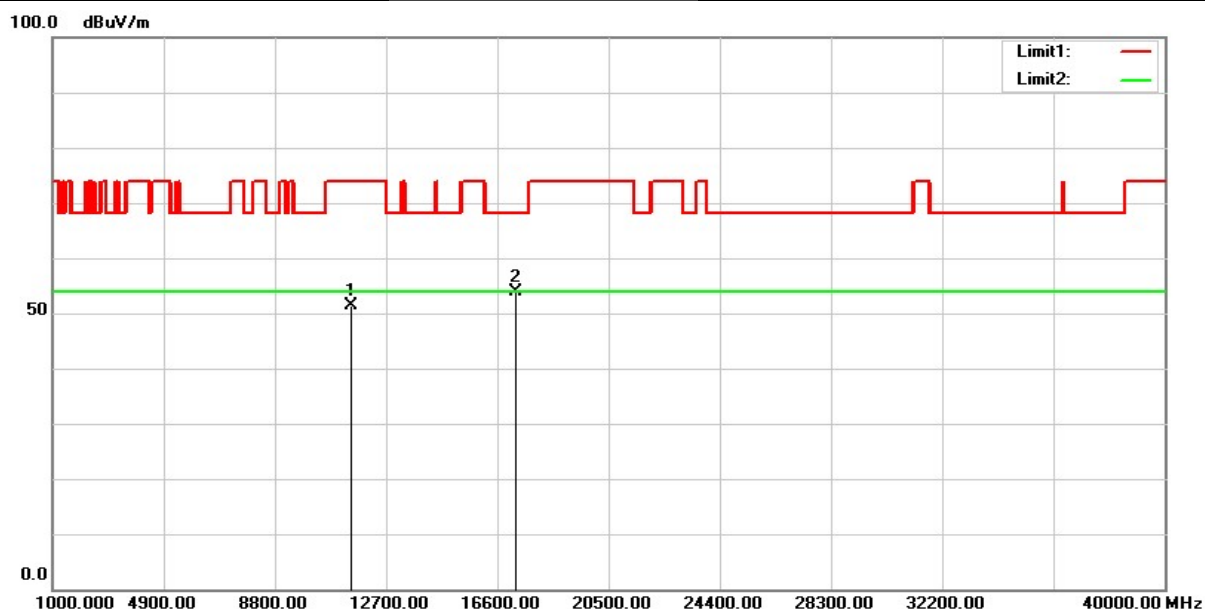


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	47.45	3.88	51.33	74.00	-22.67	peak
2	17235.000	42.01	11.81	53.82	68.20	-14.38	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH149(5745MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

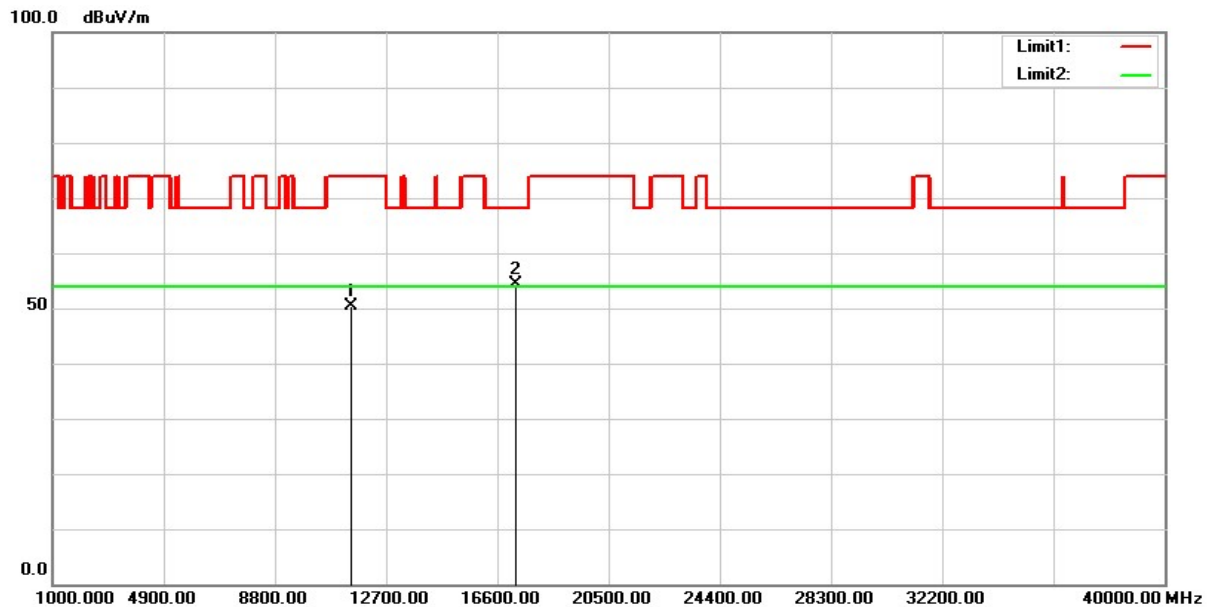


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	46.45	3.88	50.33	74.00	-23.67	peak
2	17235.000	42.64	11.81	54.45	68.20	-13.75	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH157(5785MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

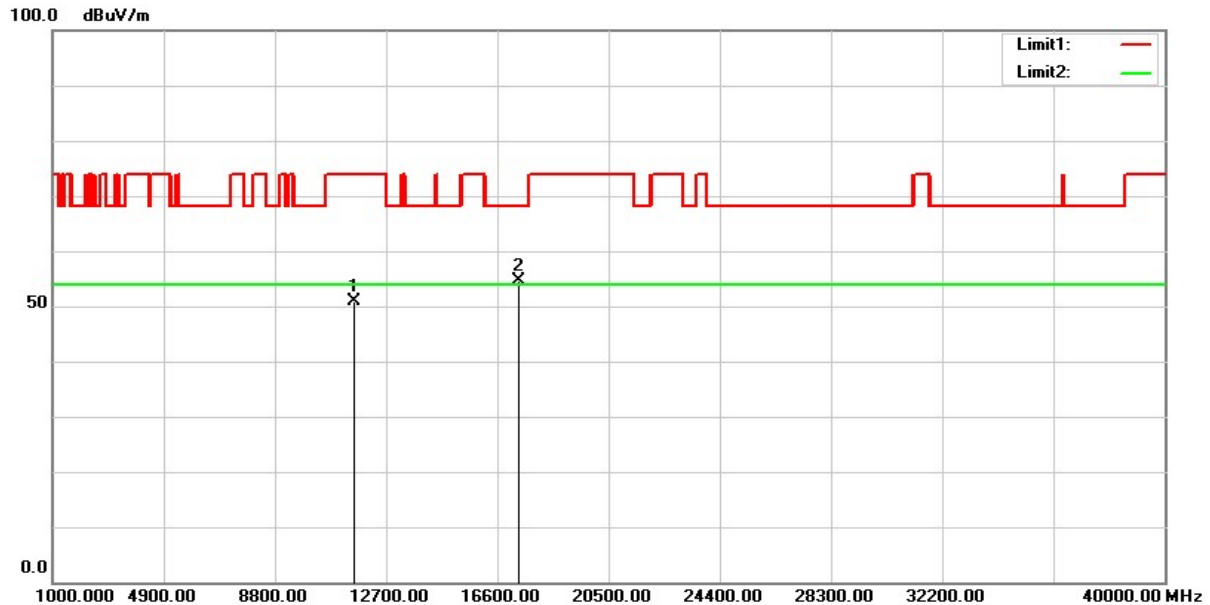


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	46.99	3.89	50.88	74.00	-23.12	peak
2	17355.000	41.88	12.71	54.59	68.20	-13.61	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH157(5785MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

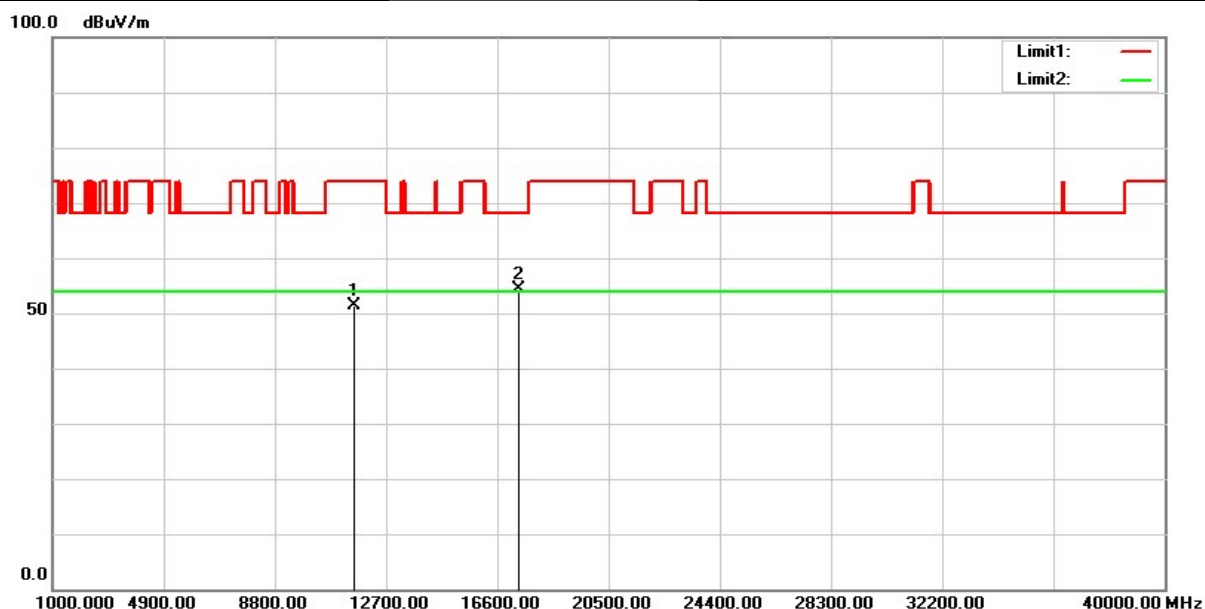


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	47.49	3.89	51.38	74.00	-22.62	peak
2	17355.000	41.59	12.71	54.30	68.20	-13.90	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH165(5825MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

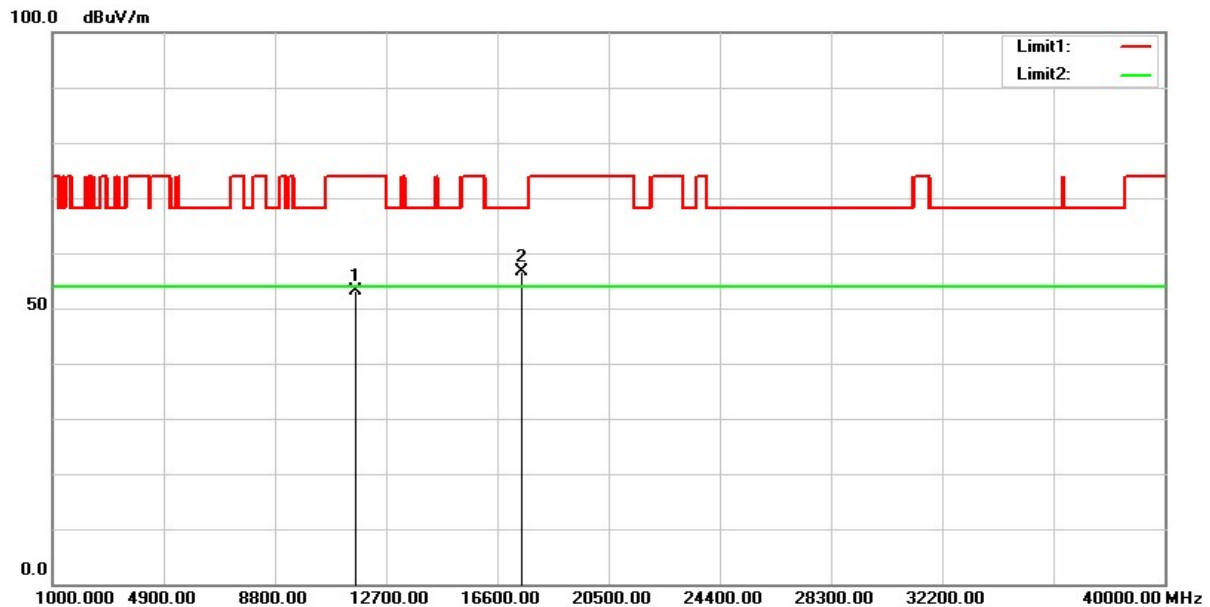


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	49.40	3.66	53.06	74.00	-20.94	peak
2	17450.000	43.18	13.48	56.66	68.20	-11.54	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH165(5825MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

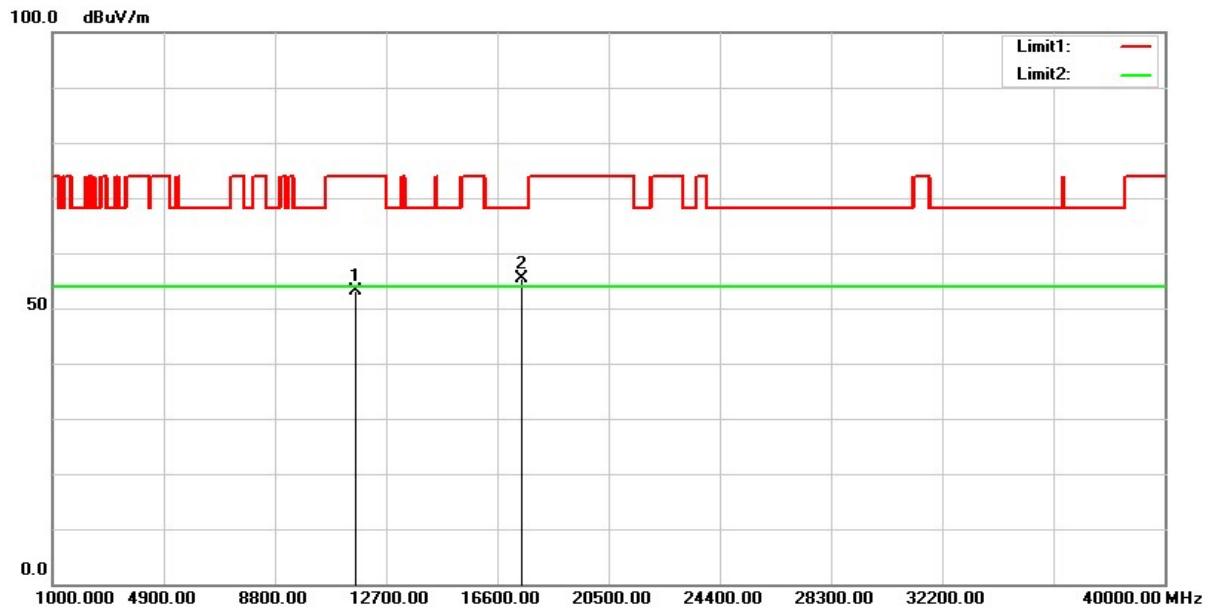


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	49.48	3.66	53.14	74.00	-20.86	peak
2	17475.000	41.80	13.67	55.47	68.20	-12.73	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH36(5180MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

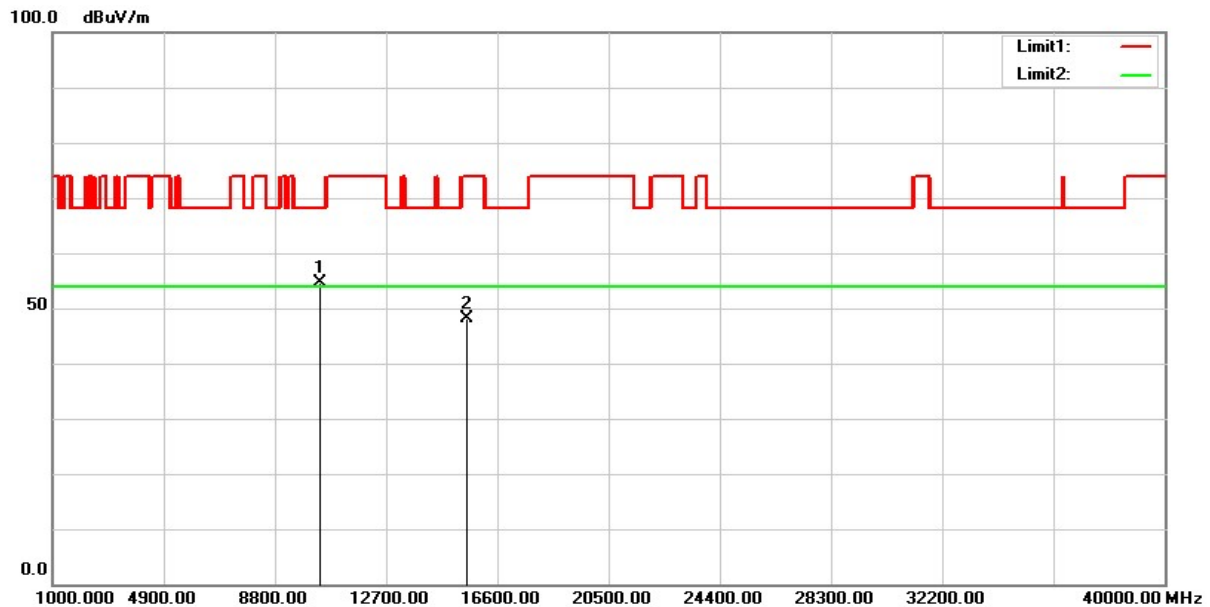


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	51.82	2.73	54.55	68.20	-13.65	peak
2	15540.000	40.86	7.35	48.21	74.00	-25.79	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH36(5180MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

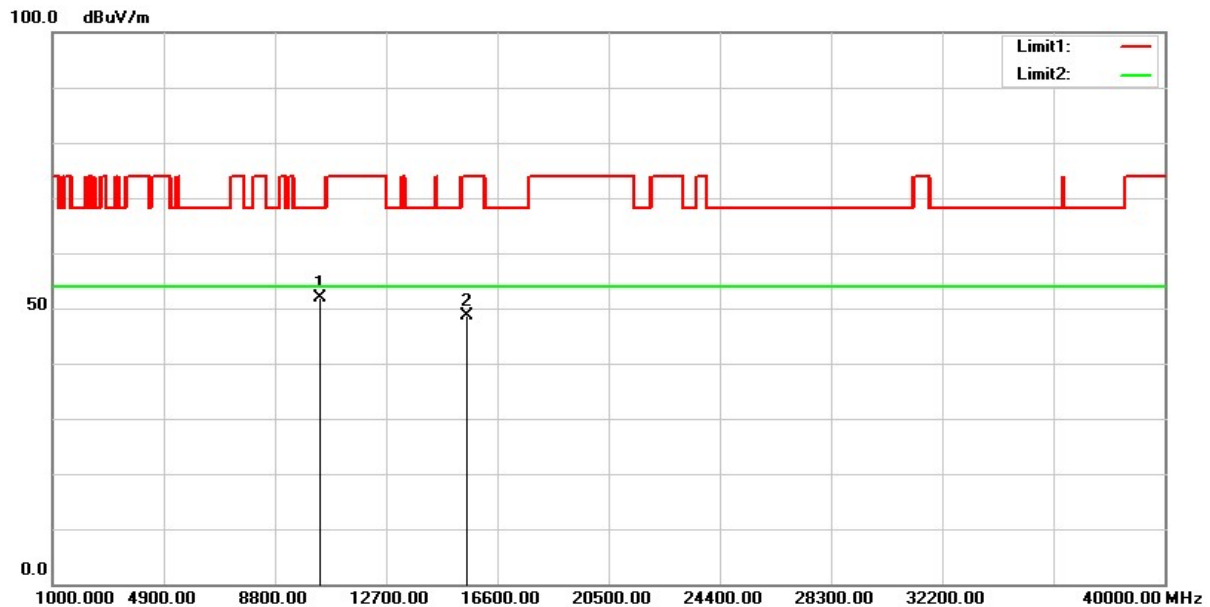


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	49.13	2.73	51.86	68.20	-16.34	peak
2	15540.000	41.28	7.35	48.63	74.00	-25.37	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH44(5220MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

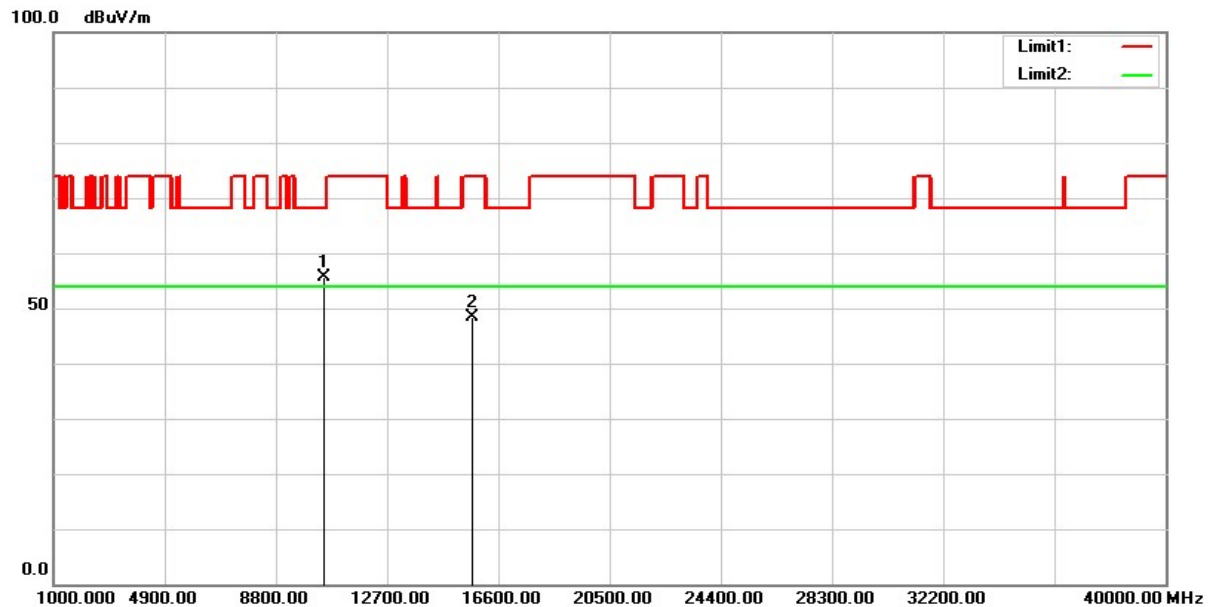


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10440.000	52.68	3.05	55.73	68.20	-12.47	peak
2	15660.000	41.47	6.97	48.44	74.00	-25.56	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH44(5220MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

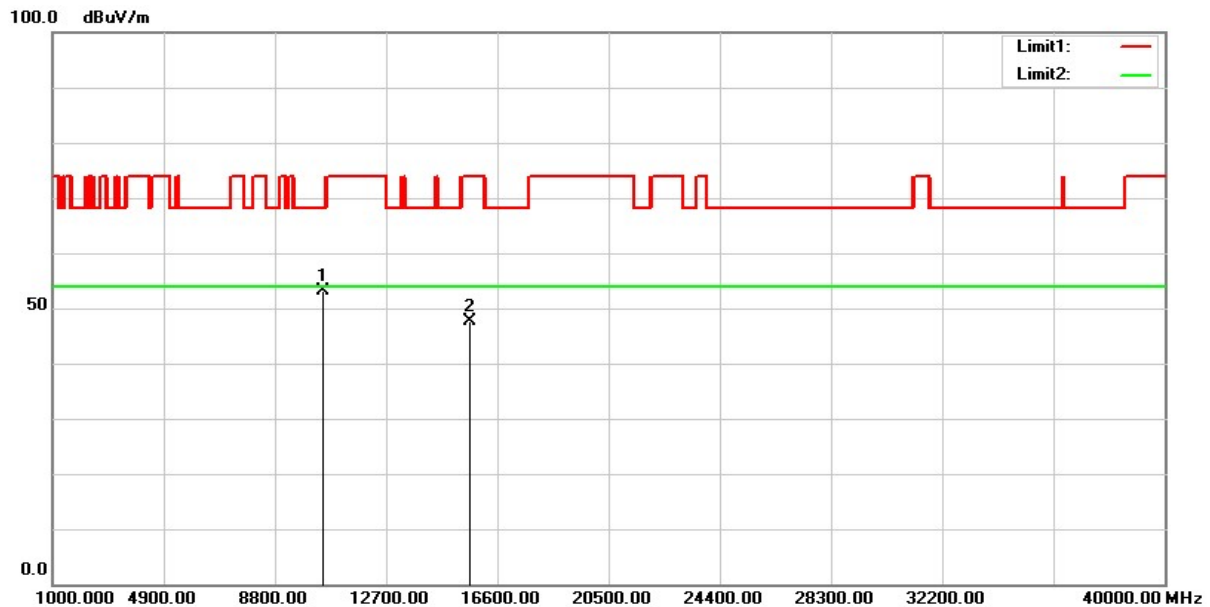


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10440.000	50.16	3.05	53.21	68.20	-14.99	peak
2	15660.000	40.75	6.97	47.72	74.00	-26.28	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH48(5240MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

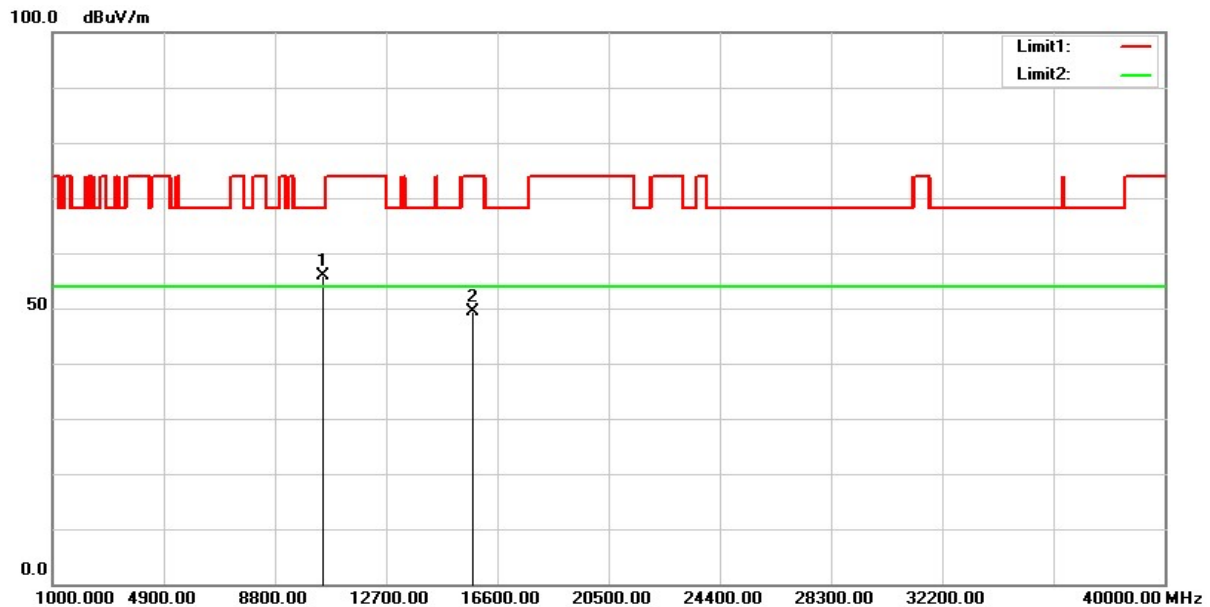


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	52.74	3.17	55.91	68.20	-12.29	peak
2	15720.000	42.55	6.81	49.36	74.00	-24.64	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH48(5240MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

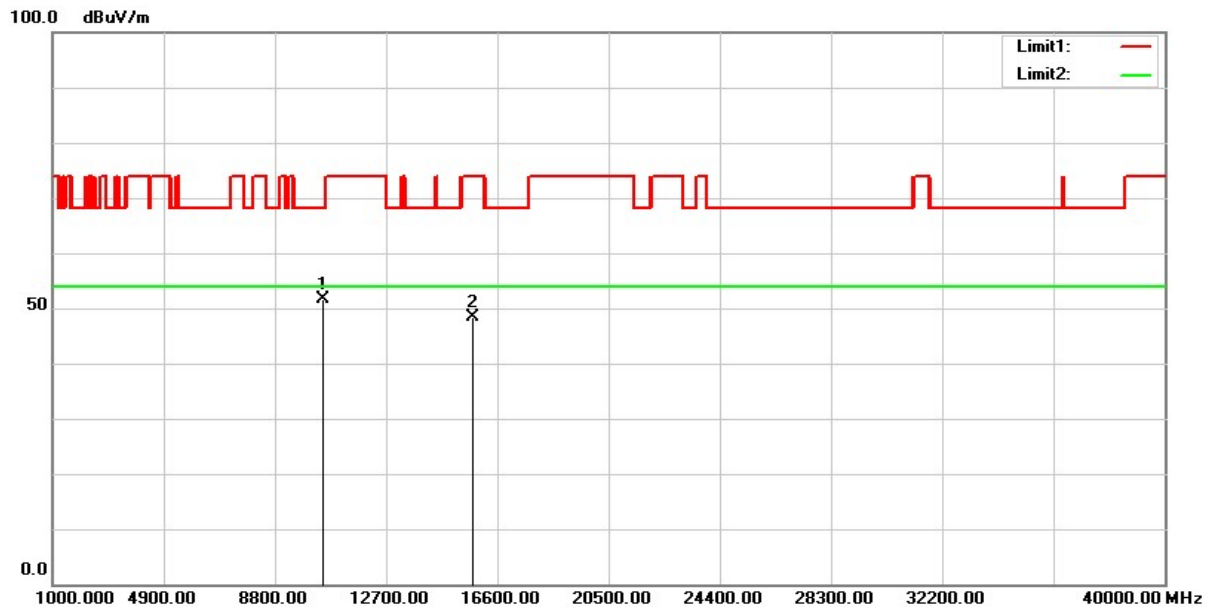


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	48.40	3.17	51.57	68.20	-16.63	peak
2	15720.000	41.54	6.81	48.35	74.00	-25.65	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH52(5260MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

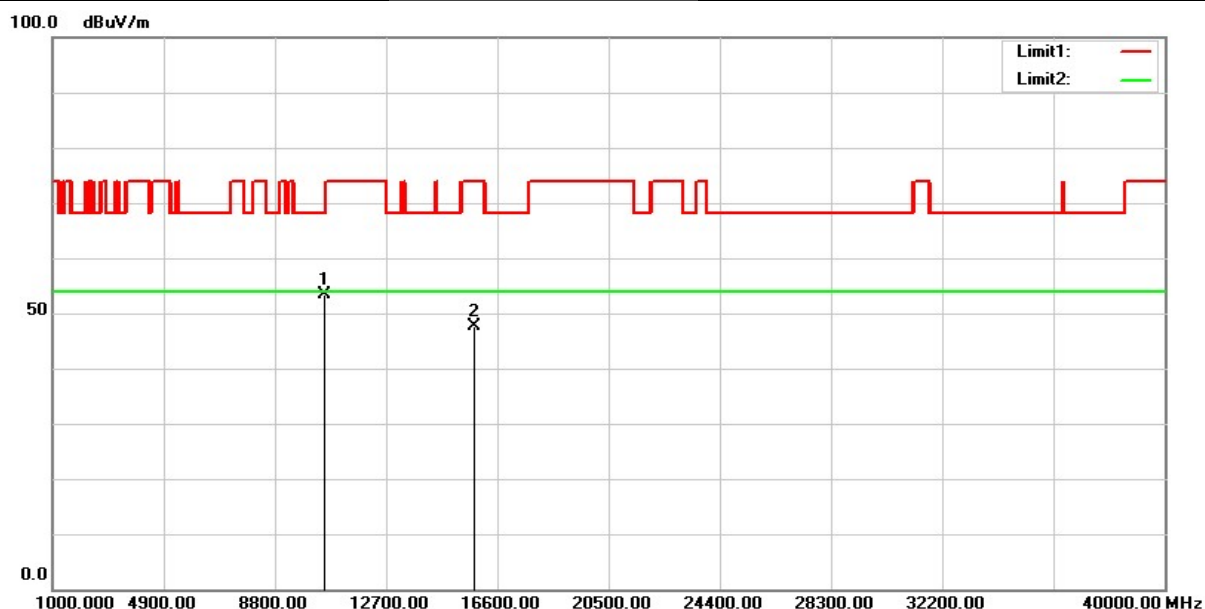


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	50.28	3.20	53.48	68.20	-14.72	peak
2	15780.000	41.03	6.62	47.65	74.00	-26.35	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11a)	Test Date :	2019/06/24
Test Channel :	CH52(5260MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

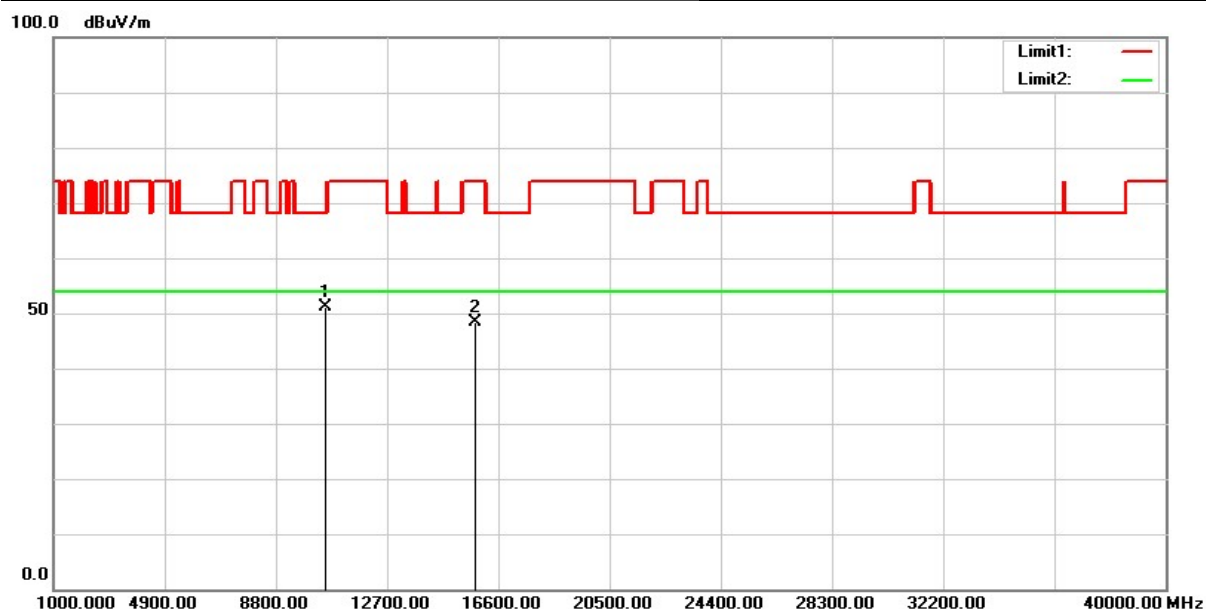


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	48.00	3.20	51.20	68.20	-17.00	peak
2	15780.000	41.88	6.62	48.50	74.00	-25.50	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH56(5300MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

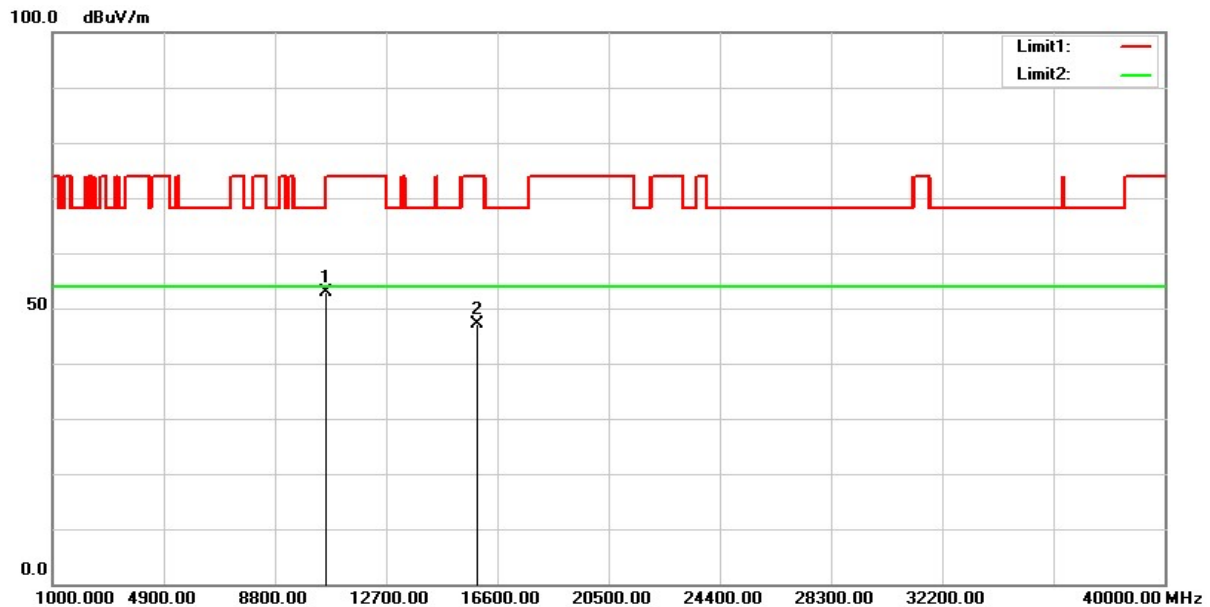


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10600.000	49.93	3.01	52.94	68.20	-15.26	peak
2	15900.000	40.48	6.53	47.01	74.00	-26.99	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH56(5300MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

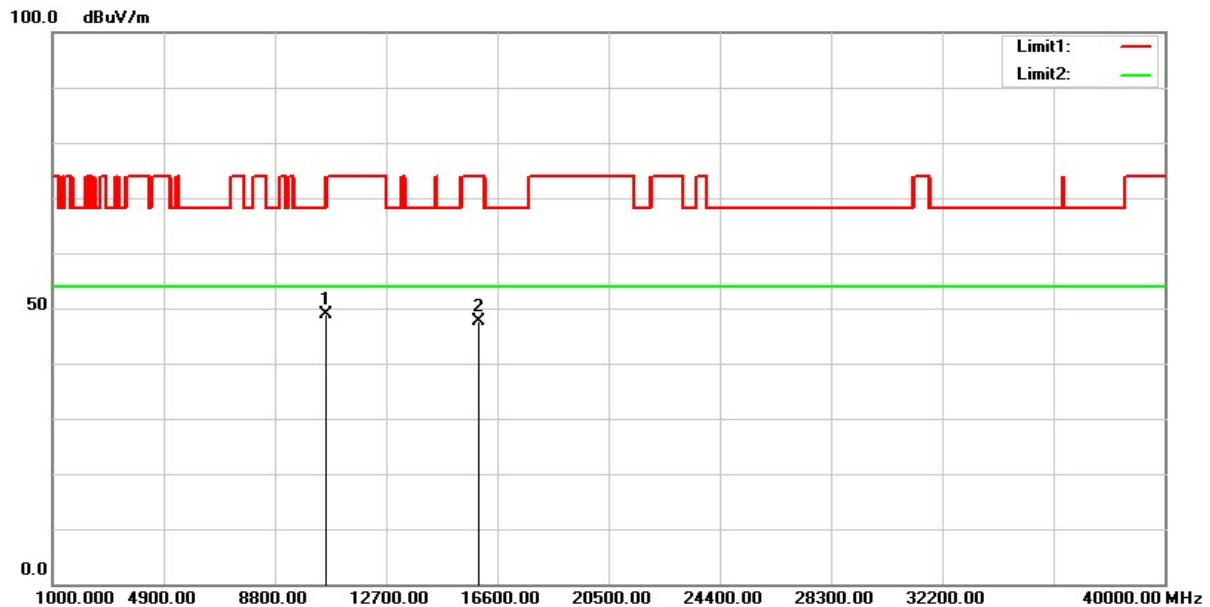


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10600.000	45.87	3.01	48.88	68.20	-19.32	peak
2	15900.000	41.08	6.53	47.61	74.00	-26.39	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH64(5320MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

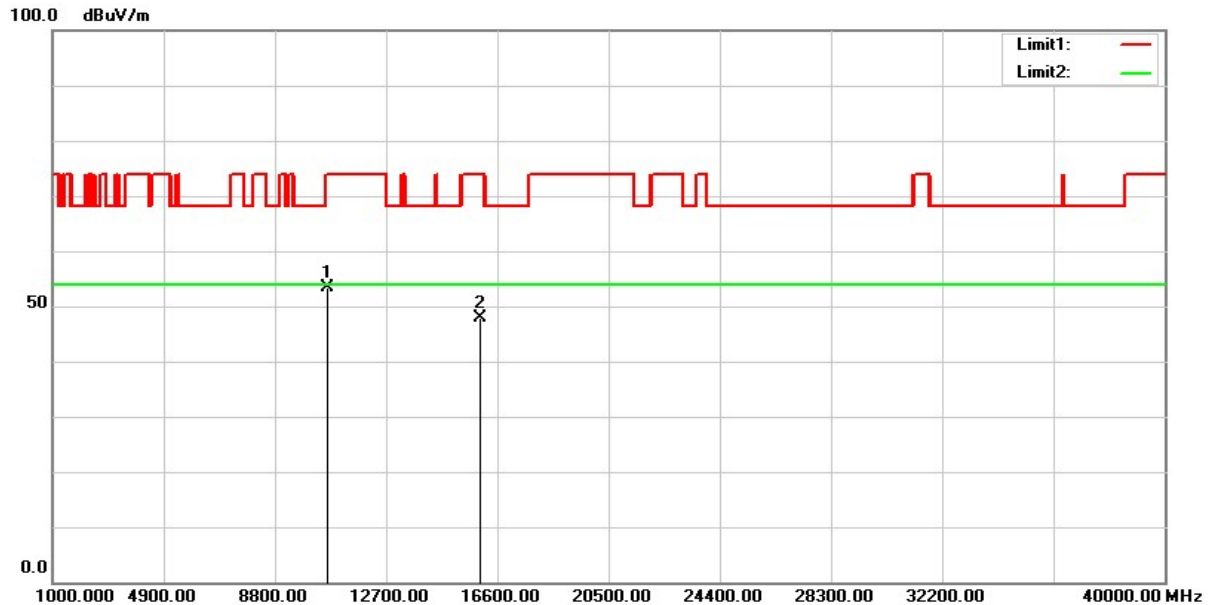


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	50.40	3.08	53.48	74.00	-20.52	peak
2	15960.000	41.38	6.40	47.78	74.00	-26.22	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH64(5320MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

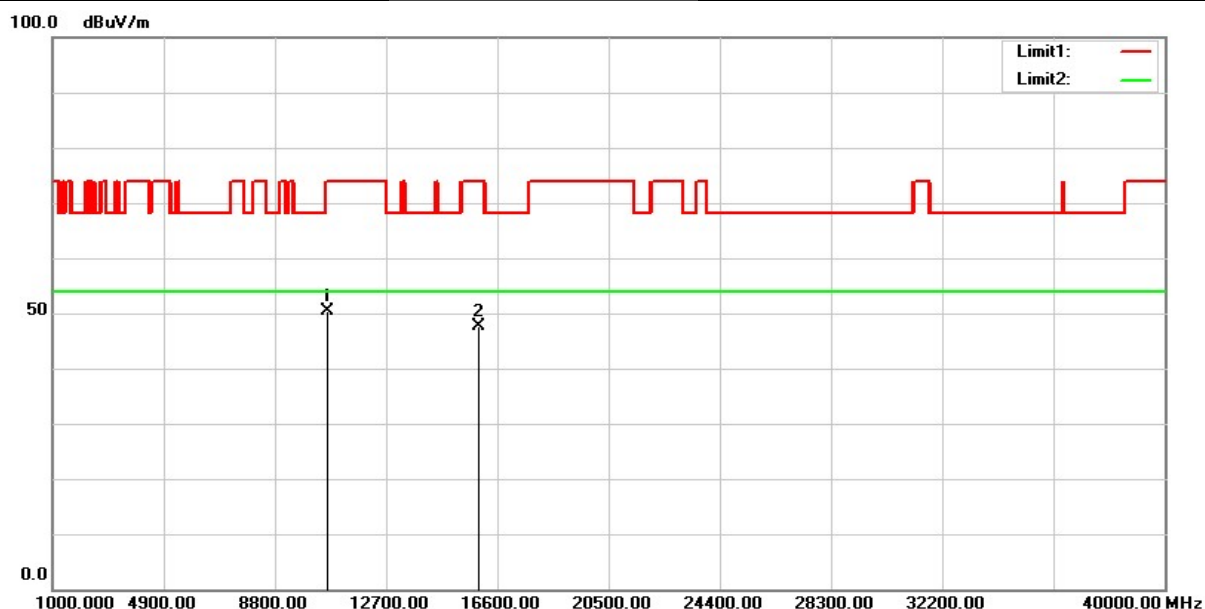


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	47.36	3.08	50.44	74.00	-23.56	peak
2	15960.000	41.30	6.40	47.70	74.00	-26.30	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH100(5500MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

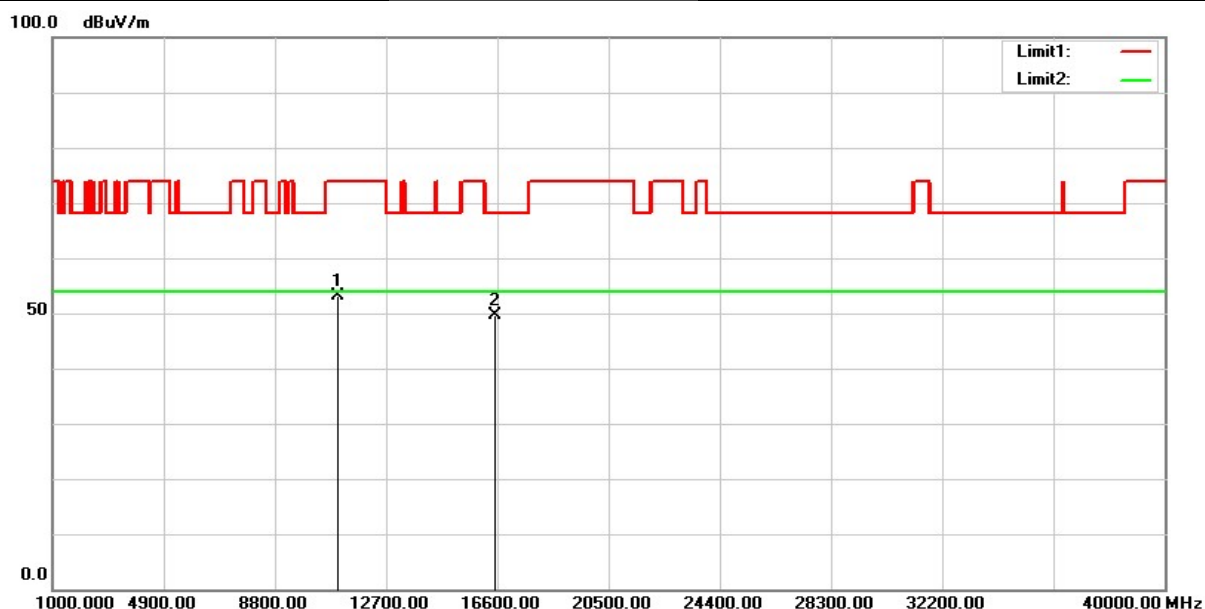


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	49.46	3.59	53.05	74.00	-20.95	peak
2	16500.000	41.65	7.98	49.63	68.20	-18.57	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH100(5500MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

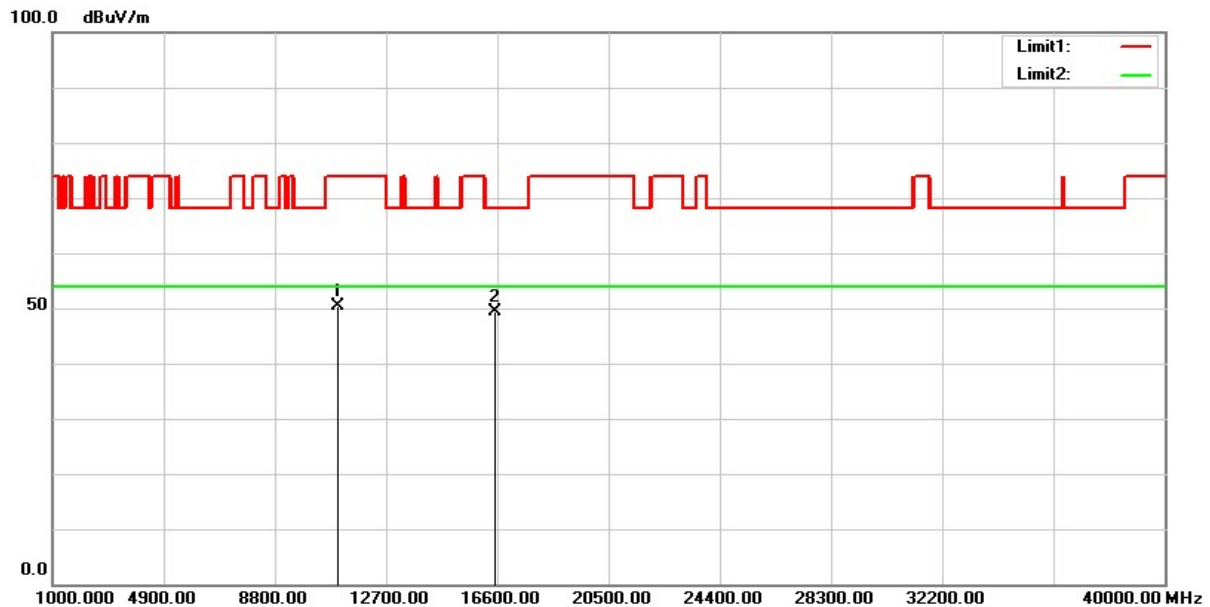


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	46.69	3.59	50.28	74.00	-23.72	peak
2	16500.000	41.41	7.98	49.39	68.20	-18.81	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH112(5580MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

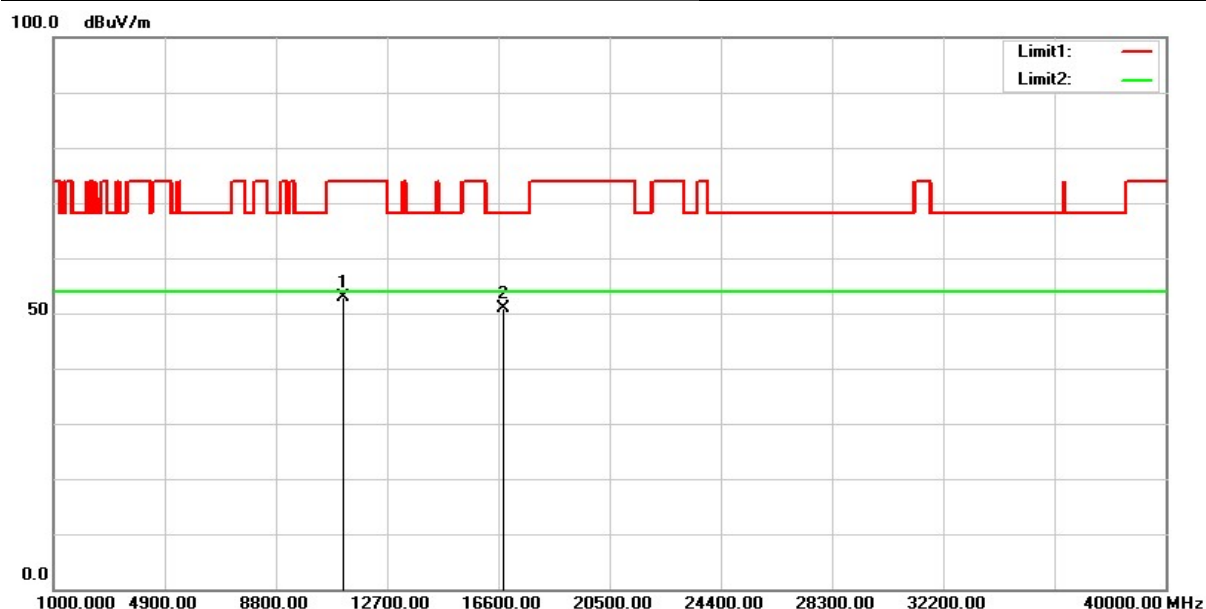


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11160.000	49.82	3.08	52.90	74.00	-21.10	peak
2	16740.000	41.36	9.51	50.87	68.20	-17.33	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH112(5580MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

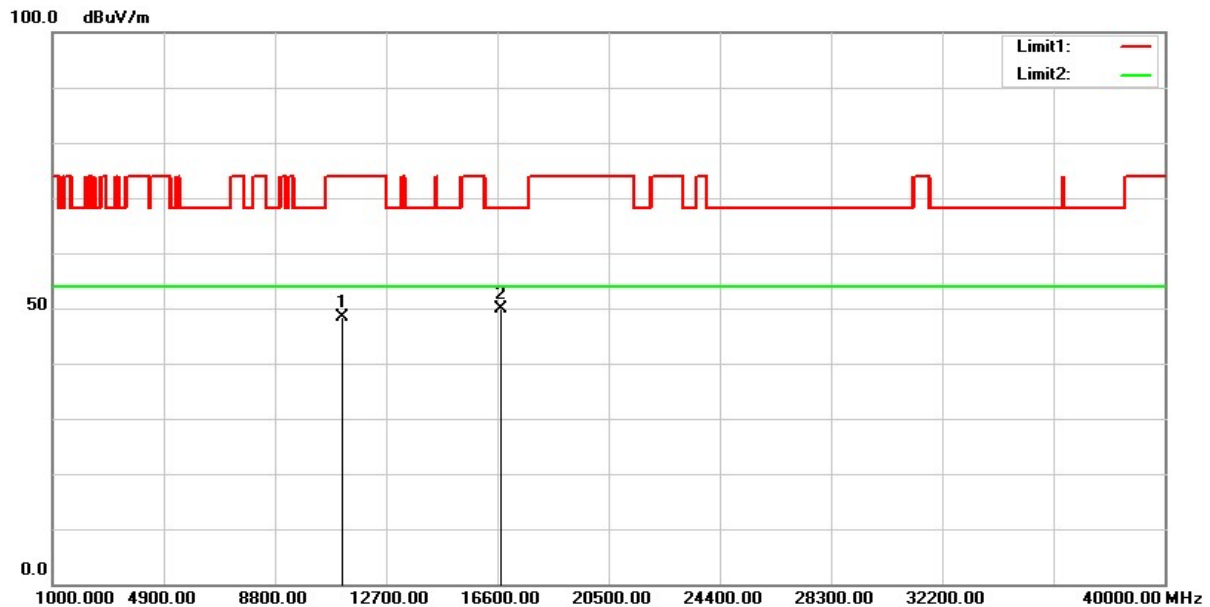


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11160.000	45.19	3.08	48.27	74.00	-25.73	peak
2	16740.000	40.25	9.51	49.76	68.20	-18.44	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH140(5700MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

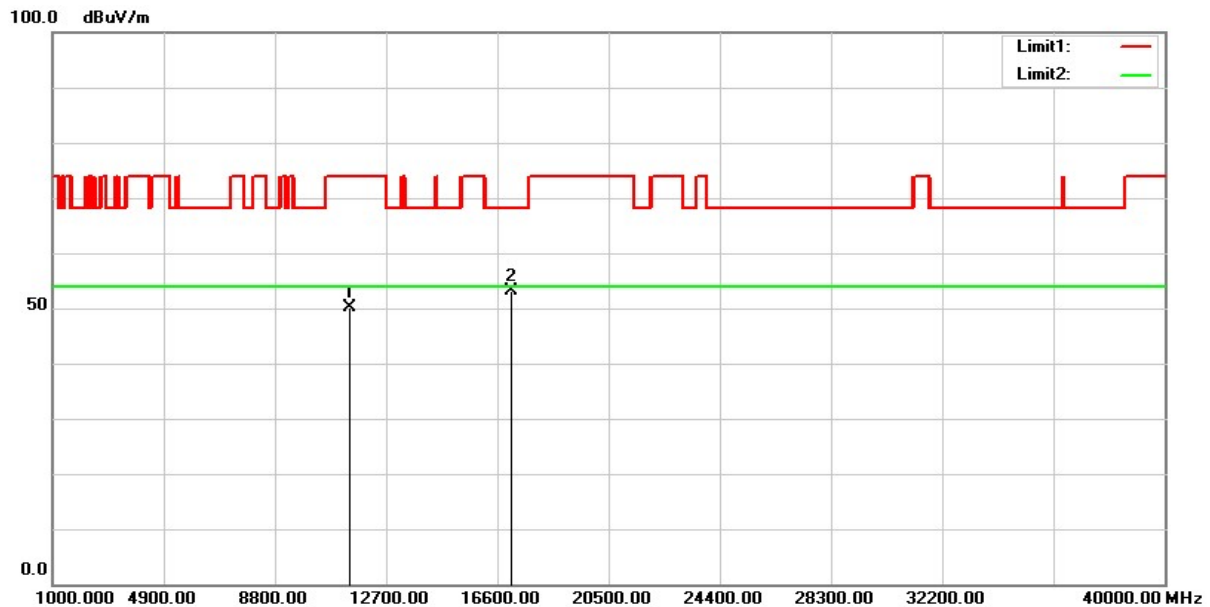


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	46.49	3.72	50.21	74.00	-23.79	peak
2	17100.000	42.09	11.08	53.17	68.20	-15.03	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH140(5700MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

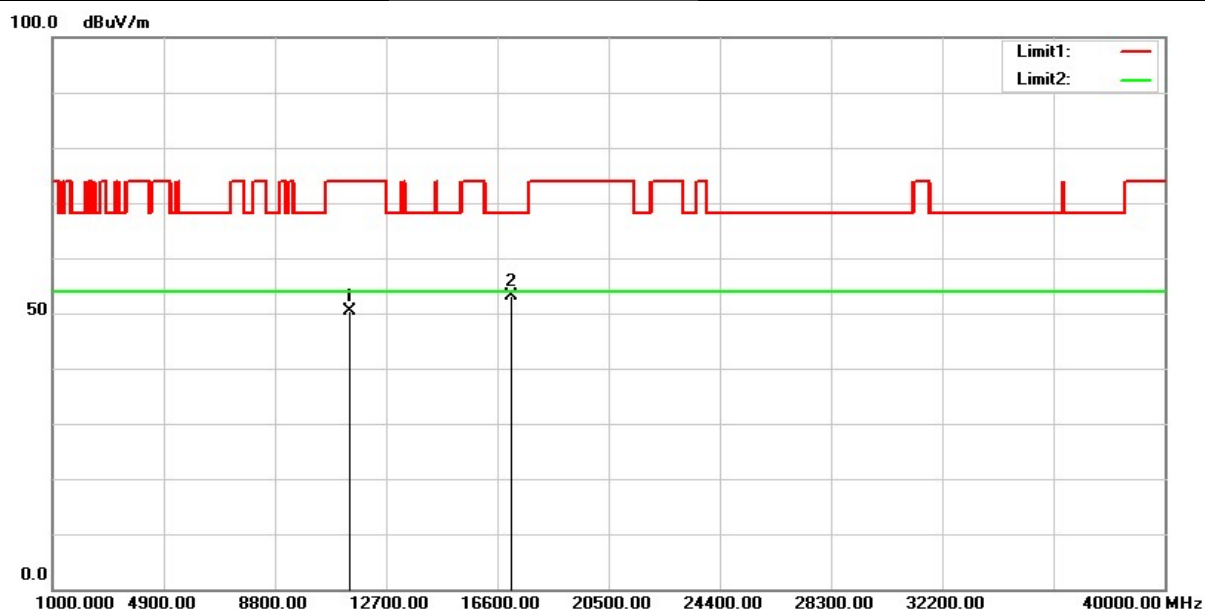


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	46.55	3.72	50.27	74.00	-23.73	peak
2	17100.000	42.11	11.08	53.19	68.20	-15.01	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH149(5745MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

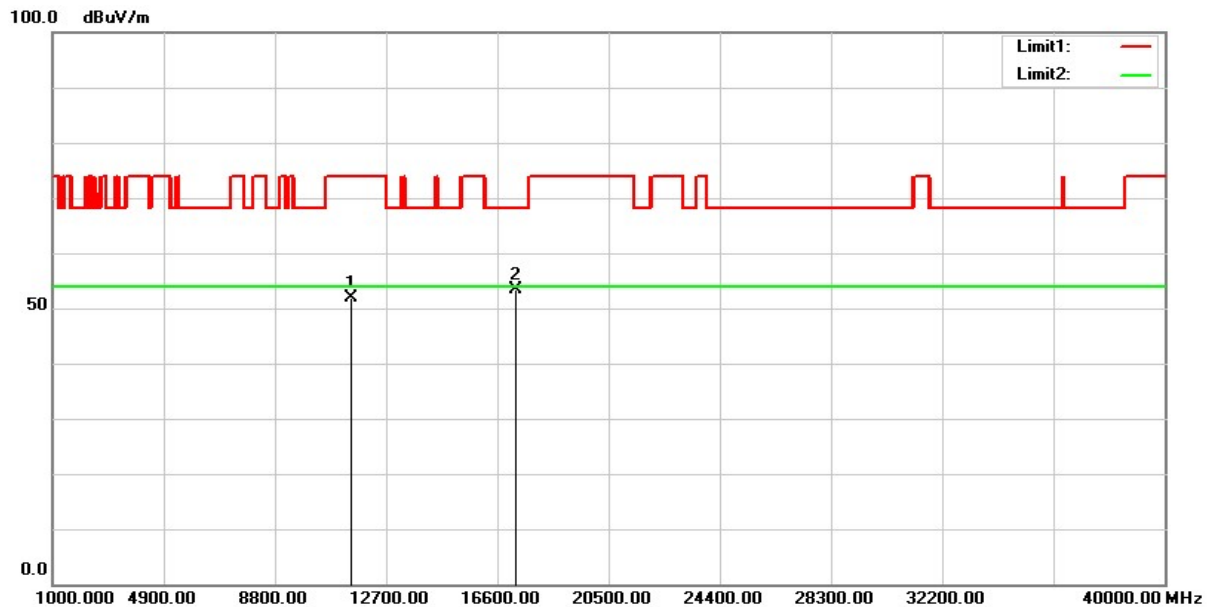


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	48.05	3.88	51.93	74.00	-22.07	peak
2	17235.000	41.57	11.81	53.38	68.20	-14.82	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH149(5745MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

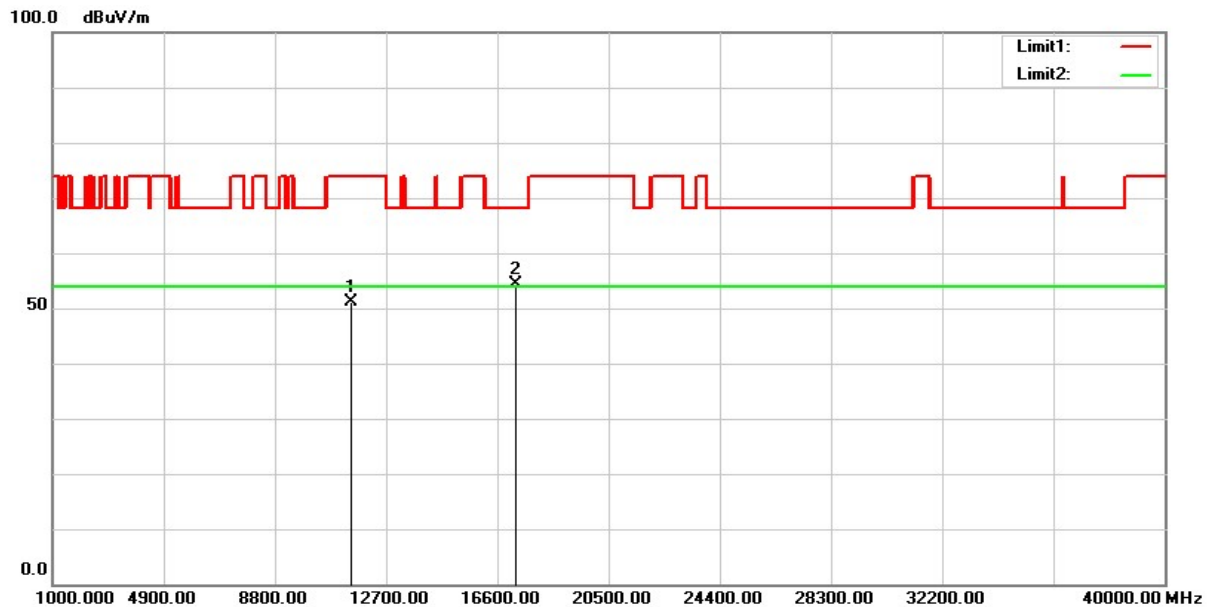


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	47.32	3.88	51.20	74.00	-22.80	peak
2	17235.000	42.57	11.81	54.38	68.20	-13.82	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH157(5785MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

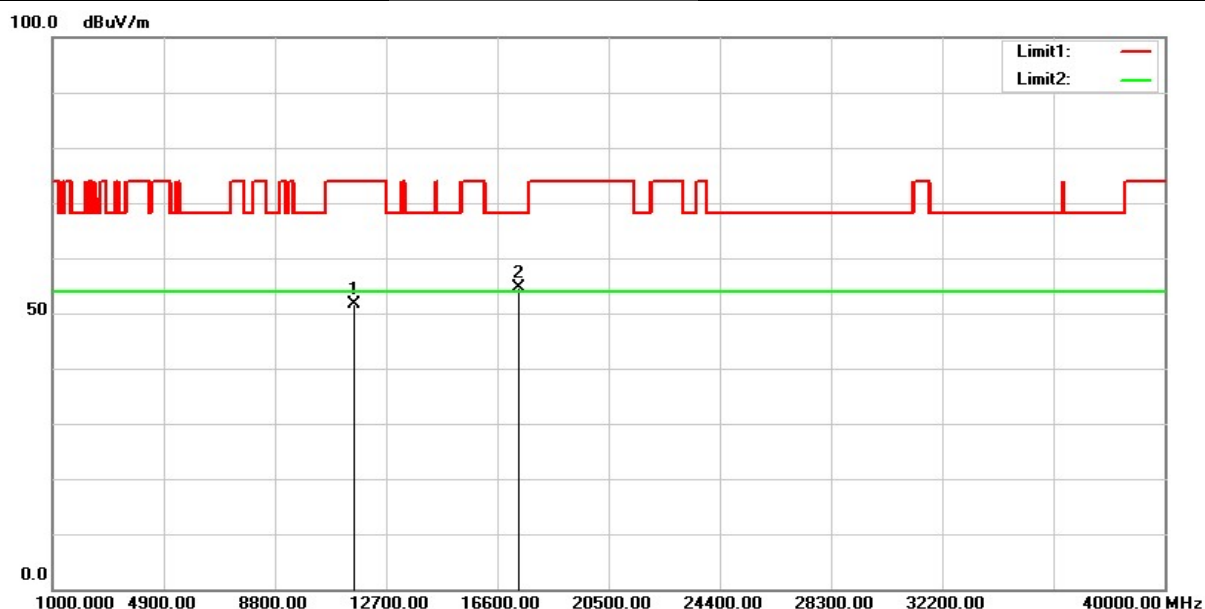


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	47.75	3.89	51.64	74.00	-22.36	peak
2	17355.000	41.88	12.71	54.59	68.20	-13.61	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH157(5785MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

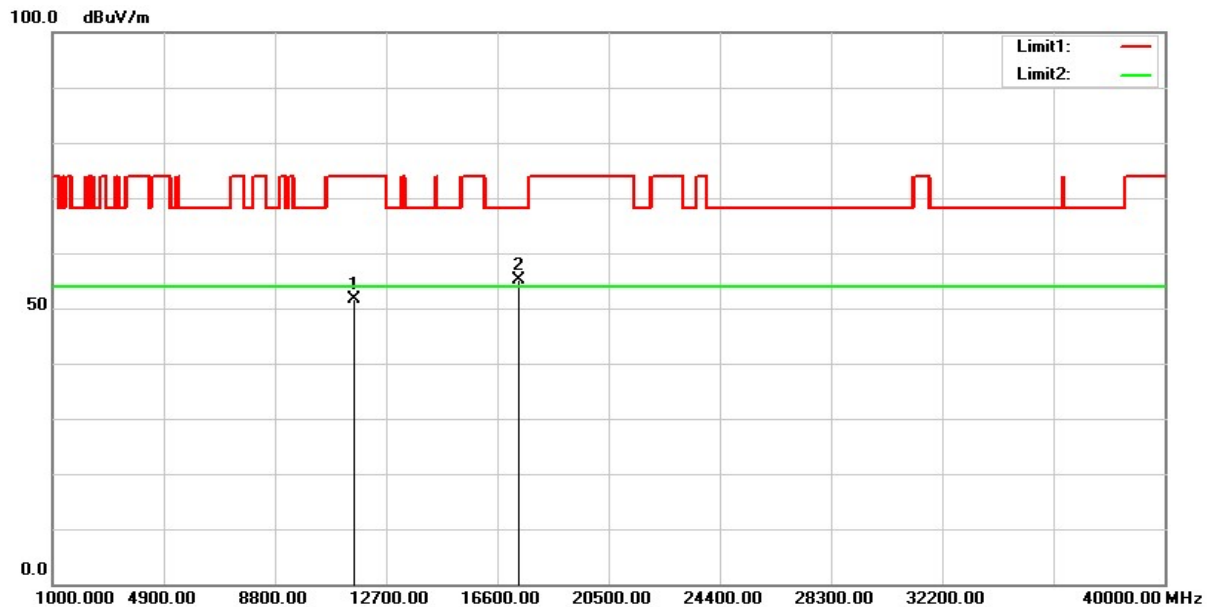


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	47.76	3.89	51.65	74.00	-22.35	peak
2	17355.000	42.42	12.71	55.13	68.20	-13.07	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH165(5825MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

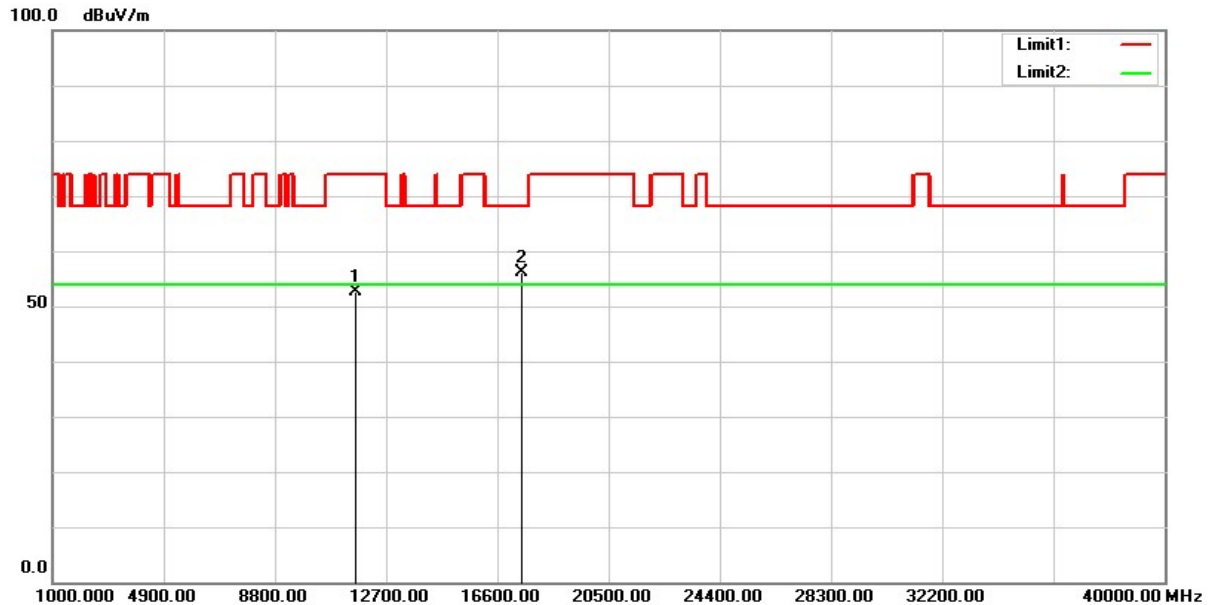


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	48.94	3.66	52.60	74.00	-21.40	peak
2	17475.000	42.47	13.67	56.14	68.20	-12.06	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2019/06/24
Test Channel :	CH165(5825MHz)	Temperature :	25 °C
Polarization :	Vertical	Relative Humidity :	65 %

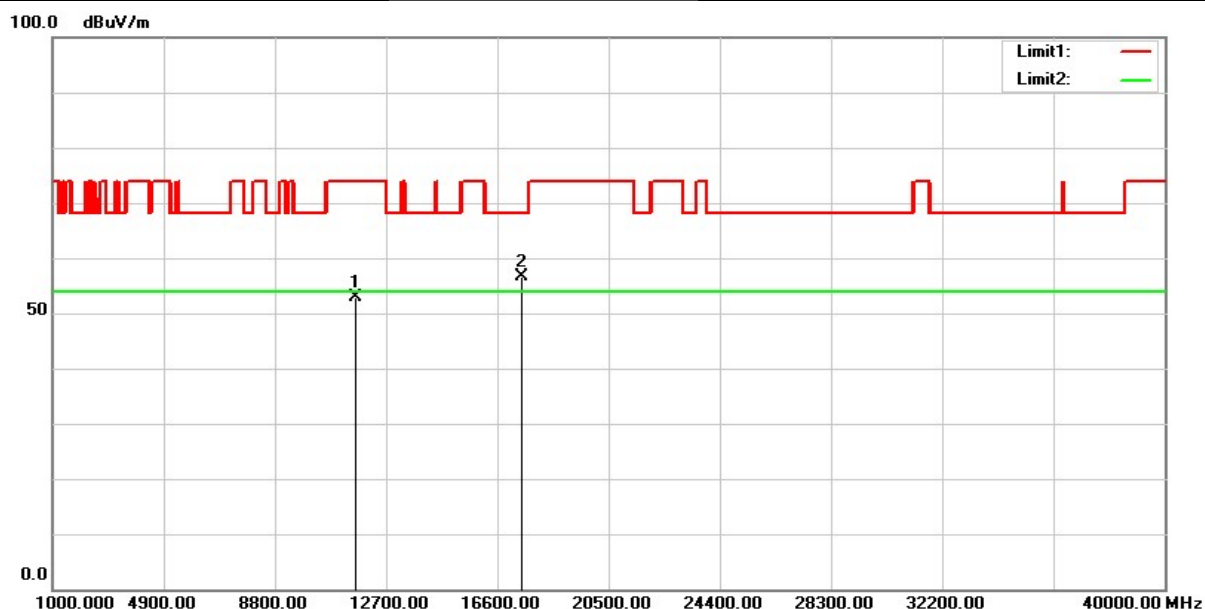


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	49.15	3.66	52.81	74.00	-21.19	peak
2	17475.000	43.03	13.67	56.70	68.20	-11.50	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2019/06/24
Test Channel :	CH38(5190MHz)	Temperature :	25 °C
Polarization :	Horizontal	Relative Humidity :	65 %

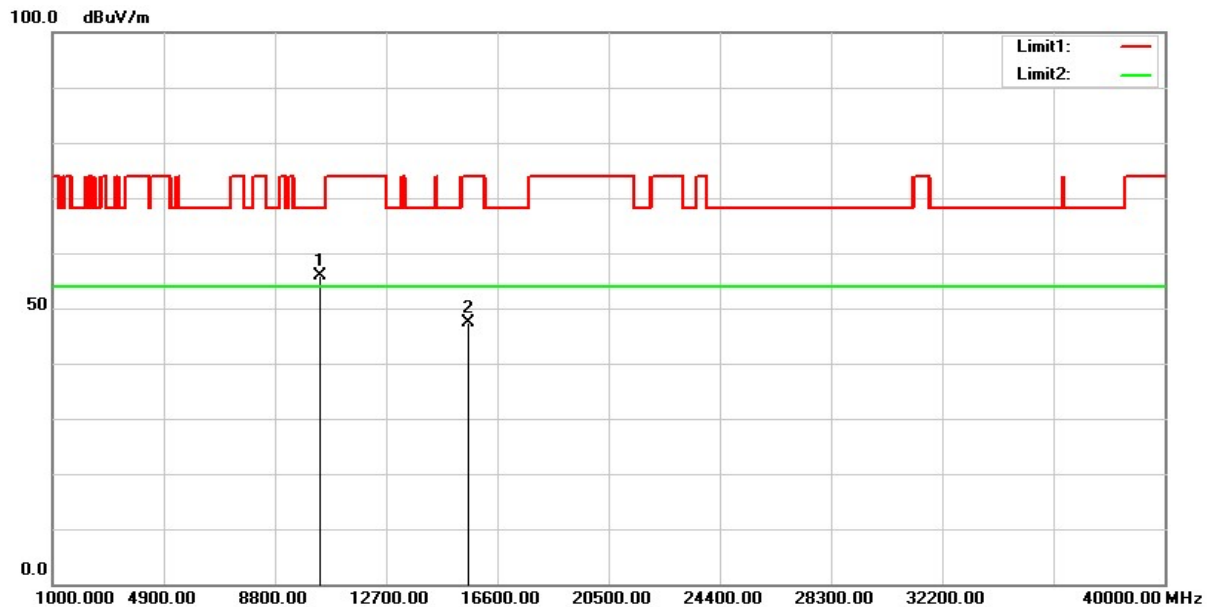

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	53.16	2.82	55.98	68.20	-12.22	peak
2	15570.000	40.27	7.22	47.49	74.00	-26.51	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit