




FCC RADIO TEST REPORT

FCC ID : 2ASQM-CE05
Equipment : Pandora
Brand Name : vivint.Internet
Model Name : CE05
Applicant : Vivint Internet
4931 N. 300 W. Provo Utah United States 84604
Manufacturer : Vivint Internet
4931 N. 300 W. Provo Utah United States 84604
Standard : 47 CFR FCC Part 15.255

The product was received on Mar. 11, 2019, and testing was started from Mar. 11, 2019 and completed on Mar. 23, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013, 47 CFR FCC Part 15.255 and Millimeter Wave Test Procedures and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

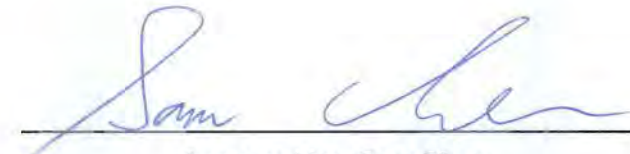
Approved by: Sam Chen

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

1.1 Information.....5

1.2 Additional Information Provided by the Submitter7

1.3 Accessories9

1.4 Support Equipment.....9

1.5 EUT Operation during Test11

1.6 Test Setup Diagram12

1.7 Testing Applied Standards17

1.8 Testing Location17

2 Test Configuration of Equipment under Test.....18

2.1 Test Channel Frequencies18

2.2 Conformance Tests and Related Test Frequencies.....18

2.3 Far Field Boundary Calculations20

3 Transmitter Test Result21

3.1 AC Power Conducted Emissions21

3.2 Occupied Bandwidth28

3.3 EIRP Power33

3.4 Peak Conducted Power.....36

3.5 Transmitter Spurious Emissions.....38

3.6 Frequency Stability51

3.7 Operation Restriction and Group Installation54

4 Test Equipment and Calibration Data55

5 Measurement Uncertainty57

Appendix A. Test Photos

Photographs of EUT v01



History of this test report

Report No.	Version	Description	Issued Date
FR930724	01	Initial issue of report	May 10, 2019



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	FCC 15.207	AC Power Conducted Emissions	PASS	-
3.2	FCC 15.255(e)	Occupied Bandwidth	PASS	-
3.3	FCC 15.255(c)	EIRP Power	PASS	-
3.4	FCC 15.255(c)	Peak Conducted Power	PASS	-
3.5	FCC 15.255(d)	Transmitter Spurious Emissions	PASS	-
3.6	FCC 15.255(f)	Frequency Stability	PASS	-
3.7	FCC 15.255(a),(h)	Operation Restriction and Group Installation	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Sandy Chuang



1.2 Additional Information Provided by the Submitter

1.2.1 Modulation

IEEE 802.11ad Modulation Scheme

MCS Index	Modulation	Code rate	Data rate (Mbit/s)
0	π /-2BPSK	1/2	27.5
1	π /-2BPSK	1/2	385
2	π /-2BPSK	1/2	770
3	π /-2BPSK	5/8	962.5
4	π /-2BPSK	3/4	1155
5	π /-2BPSK	13/16	1251.25
6	π /-2QPSK	1/2	1540
7	π /-2QPSK	5/8	1925
8	π /-2QPSK	3/4	2310
9	π /-2QPSK	13/16	2502.5
10	π /2-16QAM	1/2	3080
11	π /2-16QAM	5/8	3850
12	π /2-16QAM	3/4	4620

Channel Bandwidth is 2.16GHz

Can the transmitter operate un-modulated:	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
---	---	-----------------------------



1.2.2 Duty Cycle

Duty Cycle		Duty Cycle Factor
The transmitter is intended for	100%	0

1.2.3 Table for EUT Type

The EUT has two type which are identical to each other in all aspects except for the following table:

EUT	I/O Port
EUT 1	RJ-45 Port / SFP+ Port
EUT 2	RJ-45 Port / RJ-45 Port



1.3 Accessories

N/A

1.4 Support Equipment

For AC Power Conducted Emissions test:

Test Mode: Mode 1

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	PHIHONG	POE50U-560DG	N/A
B	PoE NB	Acer	Z8B	N/A
C	Switch	D-Link	DGS-1510-20	N/A
D	LAN NB	DELL	E6430	N/A

Test Mode: Mode 3

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	PHIHONG	POE50U-560DG	N/A
B	PoE NB	Acer	Z8B	N/A
C	LAN NB	DELL	E6430	N/A



For other test items and Transmitter Spurious Emissions (below 1 GHz):

Test Mode: Mode 1

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	PHIHONG	POE50U-560DG	N/A
B	PoE NB	Acer	Z8B	N/A
C	Switch	D-Link	DGS-1510-20	NA
D	LAN NB	DELL	E4300	N/A

Test Mode: Mode 3

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	PHIHONG	POE50U-560DG	N/A
B	PoE NB	Acer	Z8B	N/A
C	LAN NB	DELL	E4300	N/A

For Transmitter Spurious Emissions (Above 1 GHz) test:

Test Mode: Mode 1

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	PHIHONG	POE50U-560DG	N/A
B	PoE NB	Acer	Z8B	N/A
C	Switch	D-Link	DGS-1510-20	NA
D	LAN NB	DELL	E4300	N/A

For Frequency Stability test:

Test Mode: Mode 1

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	PHIHONG	POE50U-560DG	NA
B	PoE NB	Acer	Z8B	N/A
C	LAN NB	DELL	E4300	N/A



1.5 EUT Operation during Test

For Conducted Emissions test:

Test Mode: Mode 1

During the test, the following programs under Win 7 were executed:

The remote notebook executed "ping" to link with the EUT to maintain the connection by LAN.

The remote notebook executed "putty" to change the EUT channel and reboot EUT.

The remote notebook executed turn on "DM Tools" to confirm the radio connection status.

The remote notebook executed "QRCT" to let the EUT continuously TX.

The EUT connects with switch by fiber.

Test Mode: Mode 3

During the test, the following programs under Win 7 were executed:

The remote notebook executed "ping" to link with the EUT to maintain the connection by LAN.

The remote notebook executed "putty" to change the EUT channel and reboot EUT.

The remote notebook executed turn on "DM Tools" to confirm the radio connection status.


The remote notebook executed "QRCT" to let the EUT continuously TX.

For other test:

During the test, "QRCT V3.0.276.0" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.




1.6 Test Setup Diagram

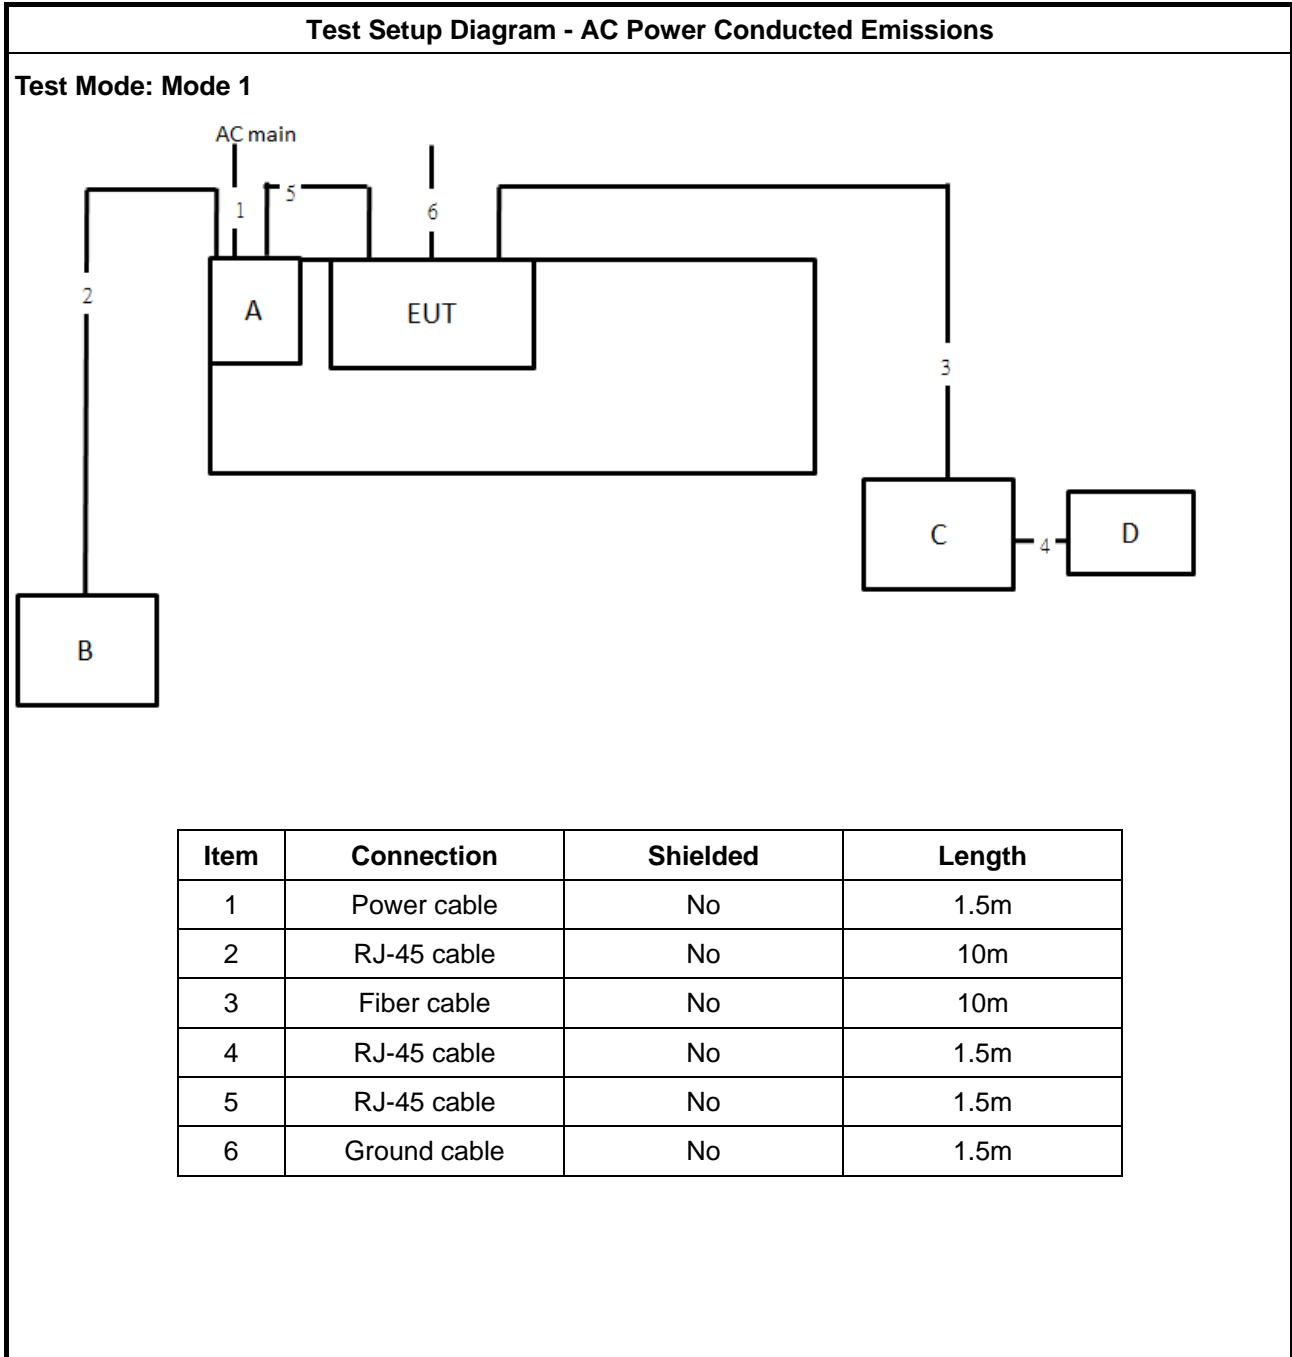

Test Setup Diagram - AC Power Conducted Emissions

Test Mode: Mode 3

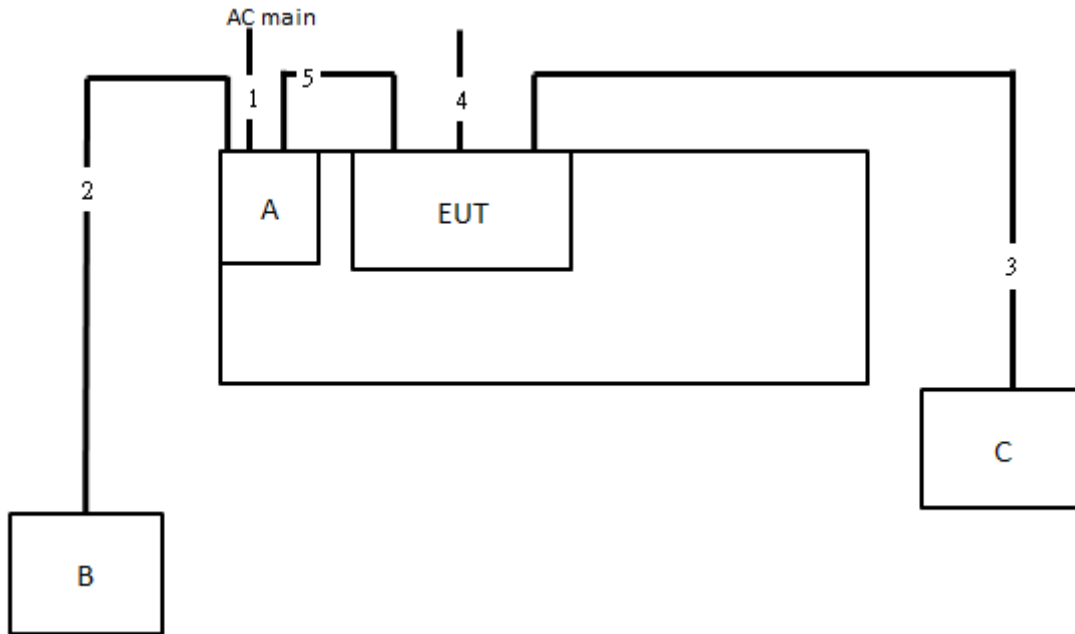


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	Ground cable	No	1.5m
5	RJ-45 cable	No	1.5m



Test Setup Diagram - Transmitter Spurious Emissions (below 1GHz)

Test Mode: Mode 1

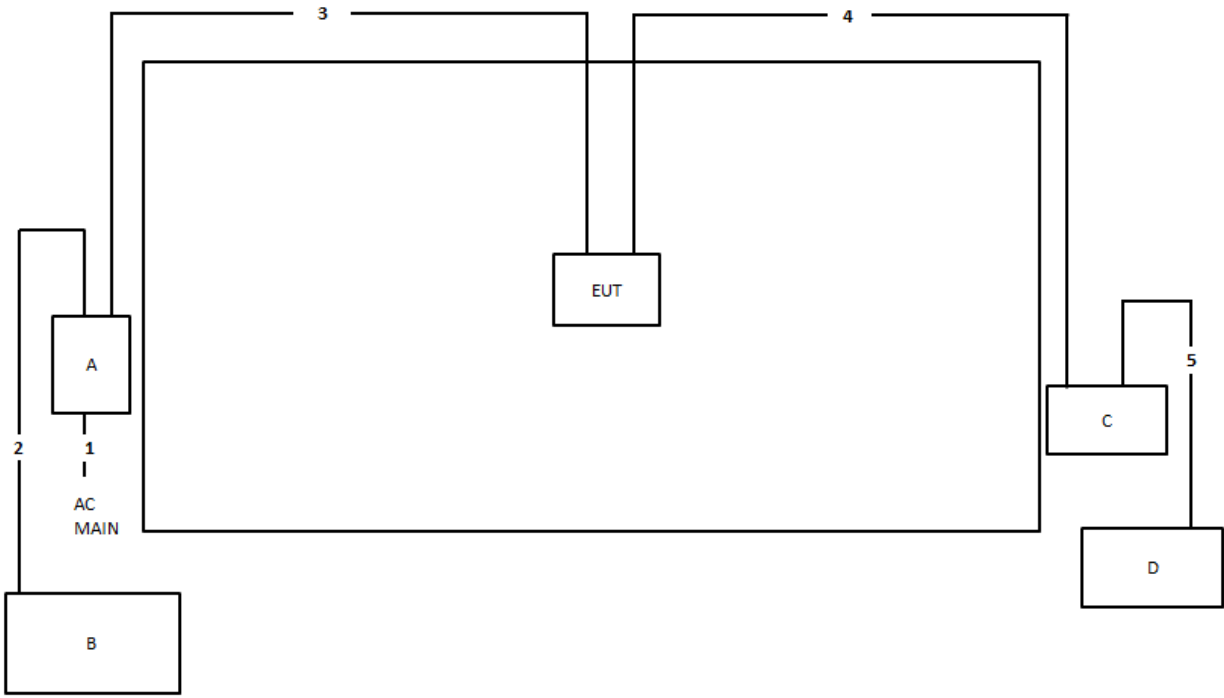


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	Yes	1.8m
3	RJ-45 cable	Yes	10m
4	Fiber cable	No	10m
5	RJ-45 cable	No	1.5m



Test Setup Diagram - Transmitter Spurious Emissions (below 1GHz)

Test Mode: Mode 3

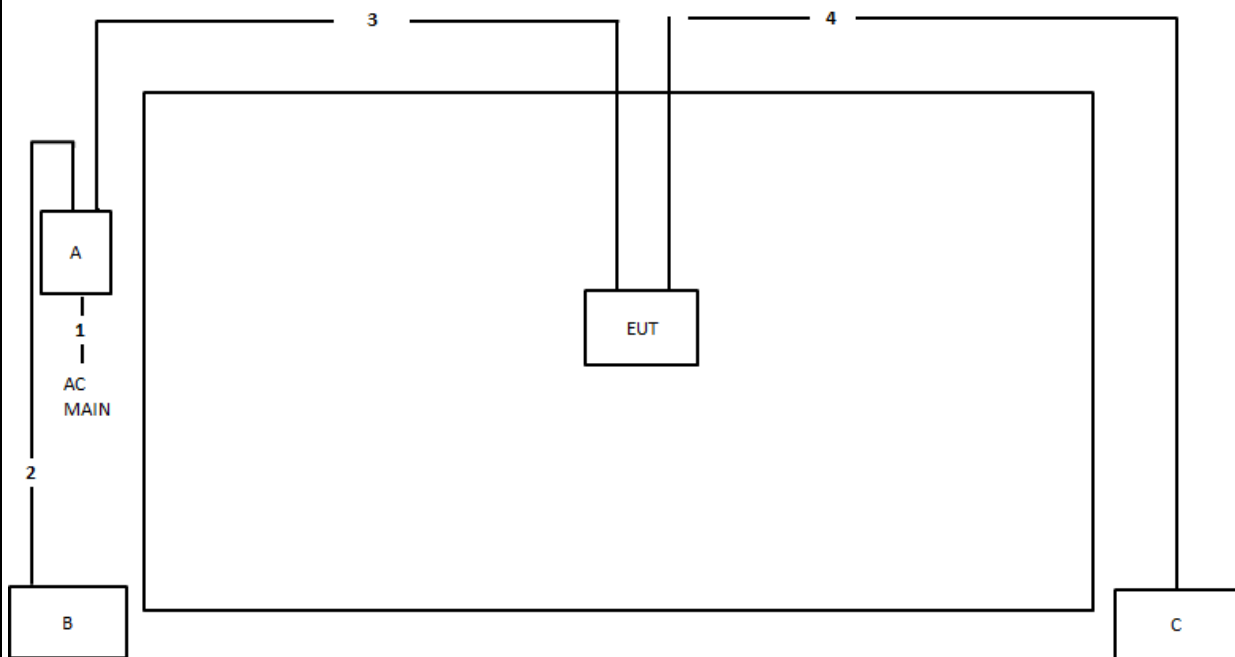


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	Yes	1.8m
3	RJ-45 cable	Yes	10m
4	RJ-45 cable	Yes	10m



Test Setup Diagram - Transmitter Spurious Emissions (Above 1GHz)

Test Mode: Mode 1

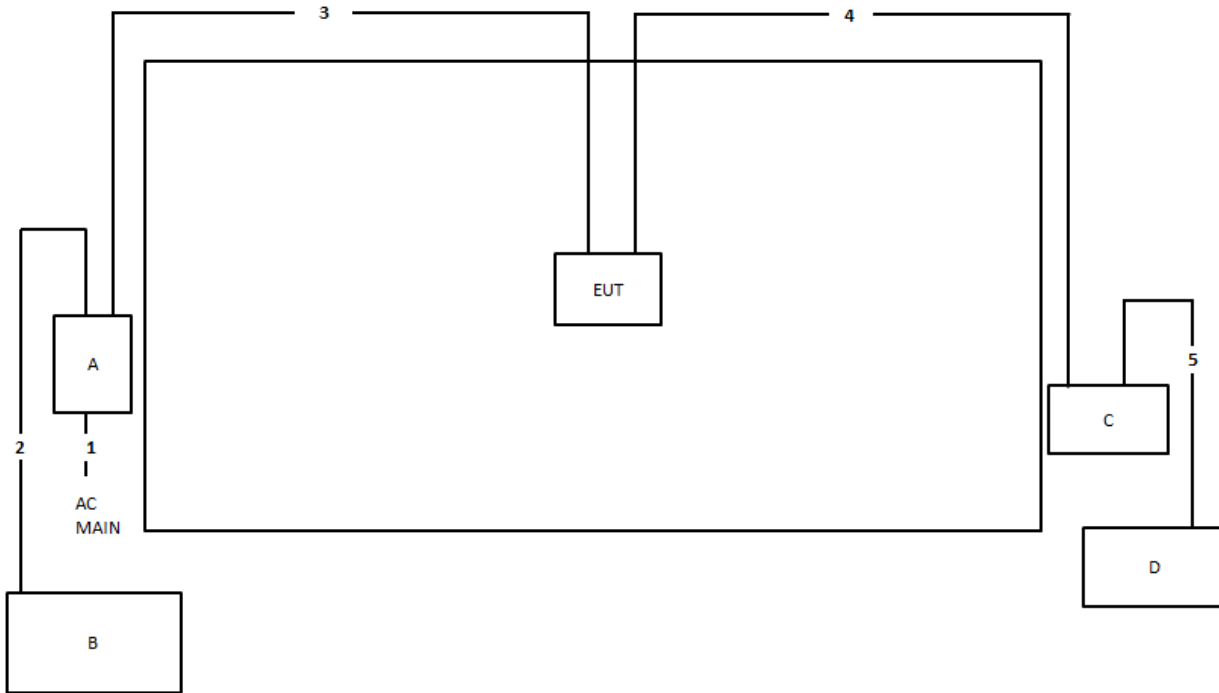

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	Yes	1.8m
3	RJ-45 cable	Yes	10m
4	Fiber cable	No	10m
5	RJ-45 cable	No	1.5m



1.7 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.255
- ♦ ANSI C63.10-2013 Section 9. "Procedures for testing millimeter-wave systems"

1.8 Testing Location

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085
Test Site No.		
CO02-CB	03CH01-CB	TH01-CB

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086B with Industry Canada.



2 Test Configuration of Equipment under Test

2.1 Test Channel Frequencies

Test Channel Frequencies Configuration	
Low Channel (GHz)	58.32
Middle Channel (GHz)	60.48
High Channel (GHz)	62.64

2.2 Conformance Tests and Related Test Frequencies

Test Item	Test Frequencies (GHz)
AC Power Conducted Emissions	60GHz CTX and I/O signal port Normal Link
Occupied Bandwidth	58.32, 60.48, 62.64
EIRP Power	58.32, 60.48, 62.64
Peak Conducted Power	58.32, 60.48, 62.64
Transmitter Spurious Emissions (below 1 GHz)	CTX
Transmitter Spurious Emissions (1 GHz-40 GHz)	58.32, 60.48, 62.64
Transmitter Spurious Emissions (above 40 GHz)	58.32, 60.48, 62.64
Frequency Stability	Un-Modulation



The following test modes were performed for all tests:

For AC Power Conducted Emissions test:

Mode 1: EUT 1_ 60GHz CTX and I/O signal port Normal Link with PoE

Mode 2: EUT 1_ 60GHz CTX and I/O signal port Normal Link with PoE (transferred connector)

Mode 3: EUT 2_60GHz CTX and I/O signal port Normal Link with PoE

Mode 4: EUT 2_60GHz CTX and I/O signal port Normal Link with PoE (transferred connector)

Mode 1 and Mode 3 generated the worst test result, so they were recorded in this report.

For Radiated Emission test <Below 1GHz>:

Mode 1: EUT 1_60GHz CTX Mode with PoE

Mode 2: EUT 1_60GHz CTX Mode with PoE (transferred connector)

Mode 3: EUT 2_60GHz CTX Mode with PoE

Mode 4: EUT 2_60GHz CTX Mode with PoE (transferred connector)

Mode 1 and Mode 3 generated the worst test result, so they were recorded in this report.

For other test items:

Mode 1: EUT 1_ 60GHz CTX Mode

Note:

1. The EUT1/EUT2 does not affect the test result of Radiated Emission test <Above 1GHz>, Occupied Bandwidth, EIRP Power, Peak Conducted Power and Frequency Stability; so only EUT 1 was tested and recorded in this report.
2. The EUT has four radios, radio 2 has been evaluated to be the worst case so it's chosen to conduct tests.
3. The EUT can only be used in Z-axis position.
4. The PoE below is for measurement only, would not be marketed.

The PoE information as below:

Support Unit	Brand	Model Number
PoE	PHIHONG	POE50U-560DG



2.3 Far Field Boundary Calculations

The far-field boundary is given as:

$$\text{far field} = (2 * L^2) / \lambda$$

where:

L = Largest Antenna Dimension, including the reflector, in meters

λ = wavelength in meters

Far Field (m)				
Frequency (GHz)	L (m)	Lambda (m)	d(Far Field) (m)	d(Far Field) (cm)
58.32	0.05	0.0051440	0.972	97.20
60.48	0.05	0.0049603	1.008	100.80
62.64	0.05	0.0047893	1.044	104.40



3 Transmitter Test Result

3.1 AC Power Conducted Emissions

3.1.1 Limit of AC Power Conducted Emissions

AC Power Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.1.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 6.2.

3.1.4 Test Setup

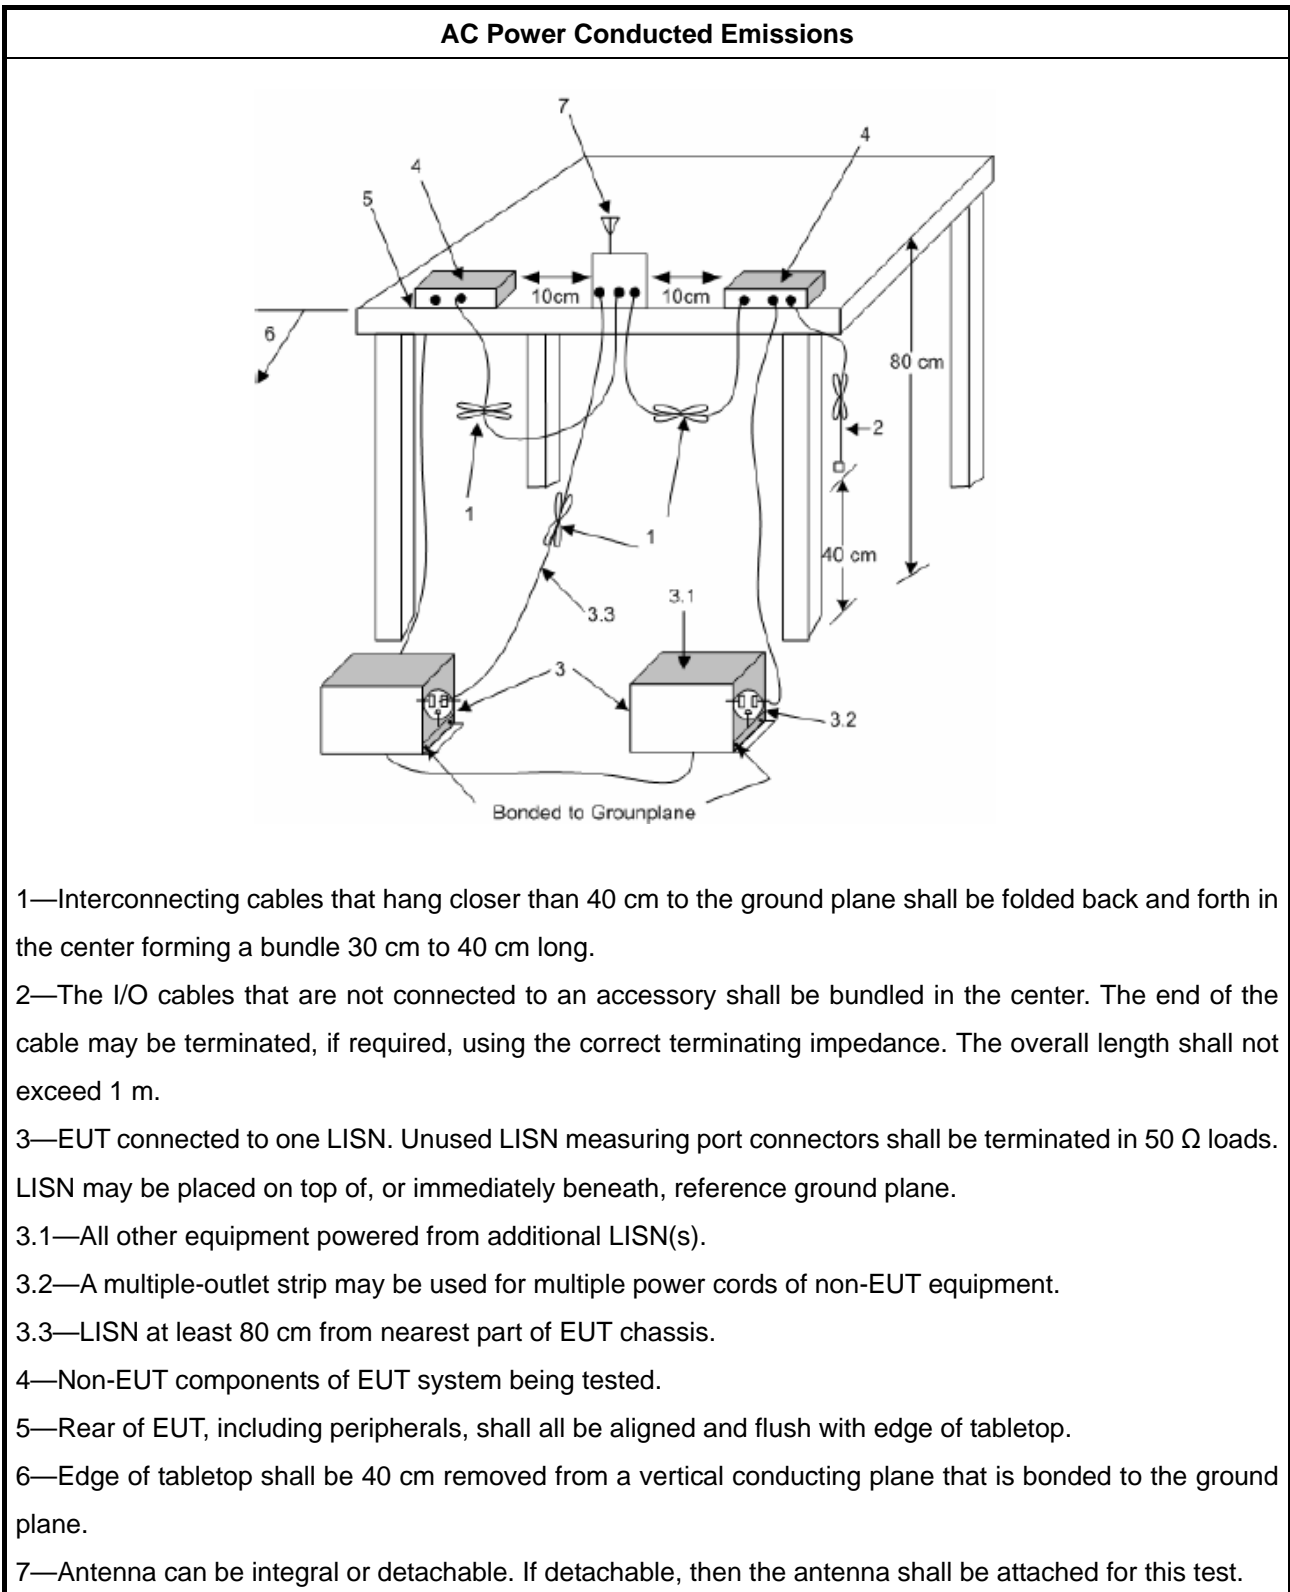




3.1.5 Test Result of AC Power Conducted Emissions

Test Conditions	see ANSI C63.10, clause 5.11
Test Setup	see ANSI C63.10, clause 6.2.3
<p>NOTE 1: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes. If equipment having different transmit operating modes (see test report clause 1.1.2), the measurements are uninfluenced by different transmit operating modes, may not need to be repeated for all the operating modes. Similar, if the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.12 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing.</p> <p>NOTE 2: ">20dB" means the tables in this clause should only list values of spurious emissions that exceed the level of 20 dB below the applicable limit, see ANSI C63.4, clause 10.1.8.1.</p>	



Temp	23.1~23.3°C	Humidity	59~60%
Test Engineer	Wei Li	Phase	Line
Configuration	CTX	Test Mode	Mode 1

22/03/2019

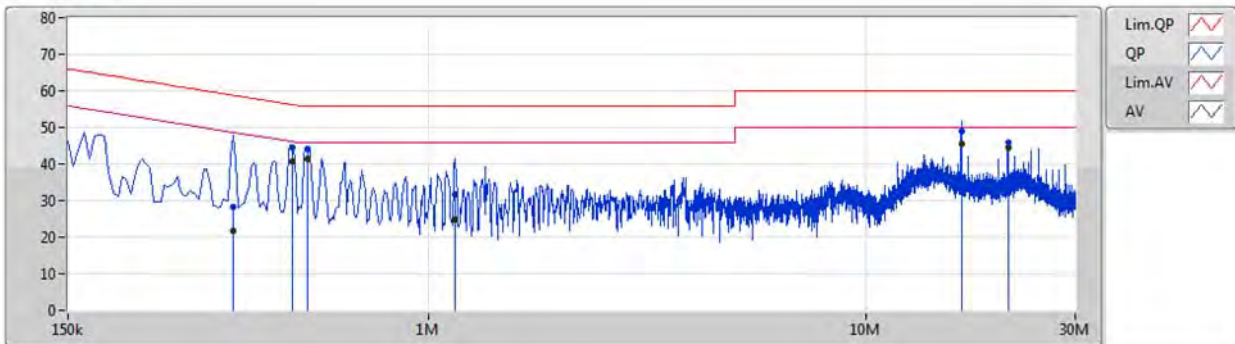


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)
QP	357k	28.19	58.79	-30.60	10.18	Line	-	18.01	0.06	0.02	10.10
AV	357k	21.80	48.79	-26.99	10.18	Line	-	11.62	0.06	0.02	10.10
QP	487.5k	44.59	56.21	-11.62	10.18	Line	-	34.41	0.06	0.02	10.10
AV	487.5k	40.58	46.21	-5.63	10.18	Line	-	30.40	0.06	0.02	10.10
QP	528k	44.12	56.00	-11.88	10.18	Line	-	33.94	0.06	0.02	10.10
AV	528k	41.44	46.00	-4.56	10.18	Line	-	31.26	0.06	0.02	10.10
QP	1.149M	31.63	56.00	-24.37	10.20	Line	-	21.43	0.07	0.03	10.10
AV	1.149M	25.00	46.00	-21.00	10.20	Line	-	14.80	0.07	0.03	10.10
QP	16.467M	49.12	60.00	-10.88	10.47	Line	-	38.65	0.25	0.11	10.11
AV	16.467M	45.62	50.00	-4.38	10.47	Line	"Worst"	35.15	0.25	0.11	10.11
QP	21.17M	45.88	60.00	-14.12	10.54	Line	-	35.34	0.29	0.14	10.11
AV	21.17M	44.32	50.00	-5.68	10.54	Line	-	33.78	0.29	0.14	10.11



Temp	23.1~23.3°C	Humidity	59~60%
Test Engineer	Wei Li	Phase	Neutral
Configuration	CTX	Test Mode	Mode 1

22/03/2019

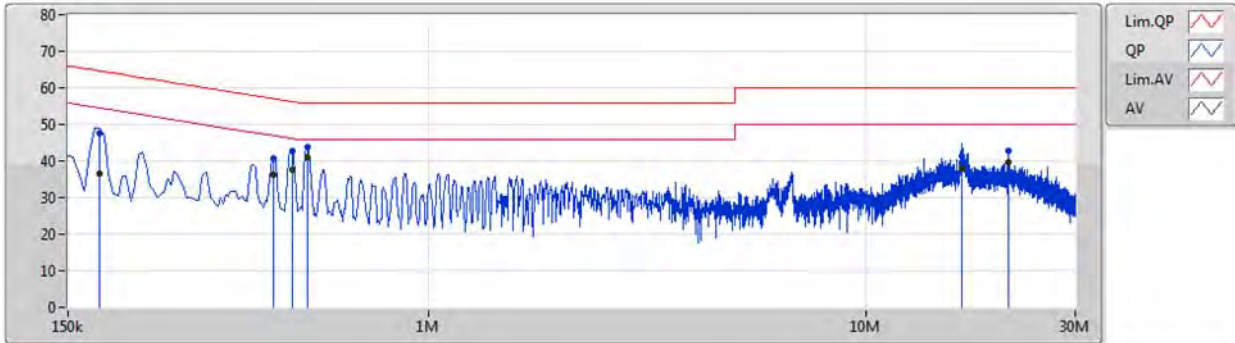


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)
QP	177k	47.68	64.62	-16.94	10.15	Neutral	-	37.53	0.03	0.02	10.10
AV	177k	36.66	54.62	-17.96	10.15	Neutral	-	26.51	0.03	0.02	10.10
QP	442.5k	40.56	57.01	-16.45	10.16	Neutral	-	30.40	0.04	0.02	10.10
AV	442.5k	36.04	47.01	-10.97	10.16	Neutral	-	25.88	0.04	0.02	10.10
QP	487.5k	42.71	56.21	-13.50	10.16	Neutral	-	32.55	0.04	0.02	10.10
AV	487.5k	37.56	46.21	-8.65	10.16	Neutral	-	27.40	0.04	0.02	10.10
QP	528k	43.75	56.00	-12.25	10.16	Neutral	-	33.59	0.04	0.02	10.10
AV	528k	41.18	46.00	-4.82	10.16	Neutral	"Worst"	31.02	0.04	0.02	10.10
QP	16.467M	41.51	60.00	-18.49	10.42	Neutral	-	31.09	0.20	0.11	10.11
AV	16.467M	37.98	50.00	-12.02	10.42	Neutral	-	27.56	0.20	0.11	10.11
QP	21.17M	42.73	60.00	-17.27	10.48	Neutral	-	32.25	0.23	0.14	10.11
AV	21.17M	39.64	50.00	-10.36	10.48	Neutral	-	29.16	0.23	0.14	10.11



Temp	23.1~23.3°C	Humidity	59~60%
Test Engineer	Wei Li	Phase	Line
Configuration	CTX	Test Mode	Mode 3

22/03/2019

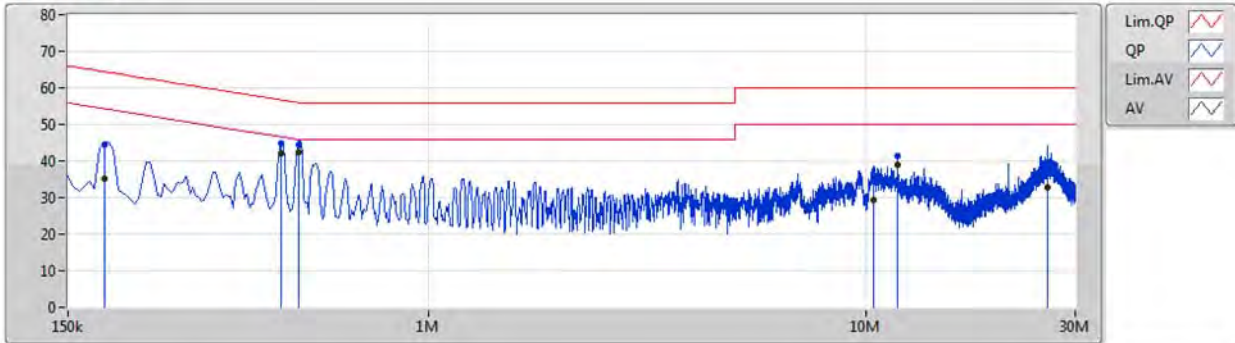


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)
QP	181.5k	44.45	64.41	-19.96	10.17	Line	-	34.28	0.05	0.02	10.10
AV	181.5k	35.20	54.41	-19.21	10.17	Line	-	25.03	0.05	0.02	10.10
QP	460.5k	44.77	56.69	-11.92	10.18	Line	-	34.59	0.06	0.02	10.10
AV	460.5k	41.96	46.69	-4.73	10.18	Line	-	31.78	0.06	0.02	10.10
QP	505.5k	44.50	56.00	-11.50	10.18	Line	-	34.32	0.06	0.02	10.10
AV	505.5k	42.36	46.00	-3.64	10.18	Line	"Worst"	32.18	0.06	0.02	10.10
QP	10.406M	35.38	60.00	-24.62	10.38	Line	-	25.00	0.20	0.07	10.11
AV	10.406M	29.18	50.00	-20.82	10.38	Line	-	18.80	0.20	0.07	10.11
QP	11.76M	41.52	60.00	-18.48	10.42	Line	-	31.10	0.22	0.09	10.11
AV	11.76M	39.03	50.00	-10.97	10.42	Line	-	28.61	0.22	0.09	10.11
QP	25.877M	39.00	60.00	-21.00	10.68	Line	-	28.32	0.35	0.21	10.12
AV	25.877M	32.69	50.00	-17.31	10.68	Line	-	22.01	0.35	0.21	10.12



Temp	23.1~23.3°C	Humidity	59~60%
Test Engineer	Wei Li	Phase	Neutral
Configuration	CTX	Test Mode	Mode 3

22/03/2019

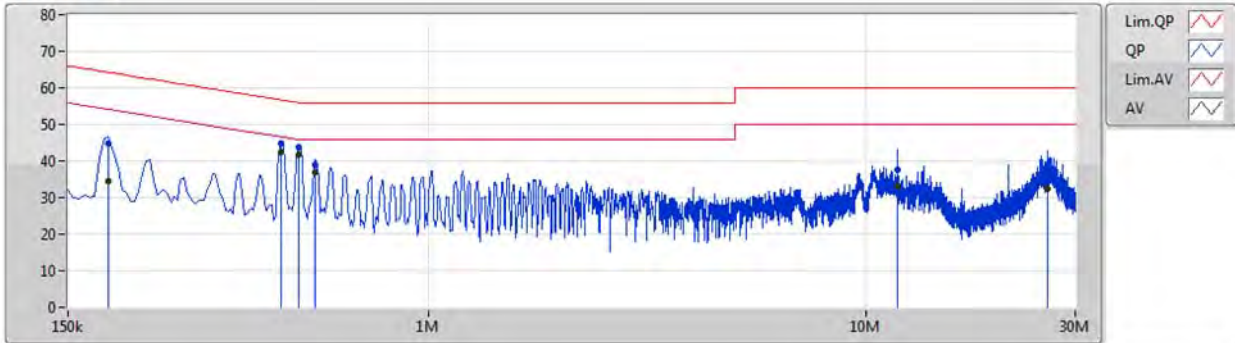

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)
QP	186k	44.78	64.20	-19.42	10.15	Neutral	-	34.63	0.03	0.02	10.10
AV	186k	34.34	54.20	-19.86	10.15	Neutral	-	24.19	0.03	0.02	10.10
QP	460.5k	44.92	56.69	-11.77	10.16	Neutral	-	34.76	0.04	0.02	10.10
AV	460.5k	42.28	46.69	-4.41	10.16	Neutral	-	32.12	0.04	0.02	10.10
QP	505.5k	43.73	56.00	-12.27	10.16	Neutral	-	33.57	0.04	0.02	10.10
AV	505.5k	41.61	46.00	-4.39	10.16	Neutral	"Worst"	31.45	0.04	0.02	10.10
QP	550.5k	38.90	56.00	-17.10	10.16	Neutral	-	28.74	0.04	0.02	10.10
AV	550.5k	37.01	46.00	-8.99	10.16	Neutral	-	26.85	0.04	0.02	10.10
QP	11.765M	37.64	60.00	-22.36	10.37	Neutral	-	27.27	0.17	0.09	10.11
AV	11.765M	32.98	50.00	-17.02	10.37	Neutral	-	22.61	0.17	0.09	10.11
QP	25.877M	38.86	60.00	-21.14	10.61	Neutral	-	28.25	0.28	0.21	10.12
AV	25.877M	32.55	50.00	-17.45	10.61	Neutral	-	21.94	0.28	0.21	10.12



3.2 Occupied Bandwidth

3.2.1 Limit of Occupied Bandwidth

6dBc Bandwidth (see Note 1)	None
99% Occupied Bandwidth (see Note 2)	None

NOTE 1: The 6dBc bandwidth is the frequency bandwidth of the signal power at the -6 dBc points when measured with a 100 kHz resolution bandwidth. These measurements shall also be performed at normal test conditions.

NOTE 2: The 99% occupied bandwidth is the frequency bandwidth of the signal power at the 99% channel power of occupied bandwidth when resolution bandwidth should be approximately 1 % to 5 % of the occupied bandwidth (OBW). These measurements shall also be performed at normal test conditions.


3.2.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.2.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clauses 6.9.2.

3.2.4 Test Setup

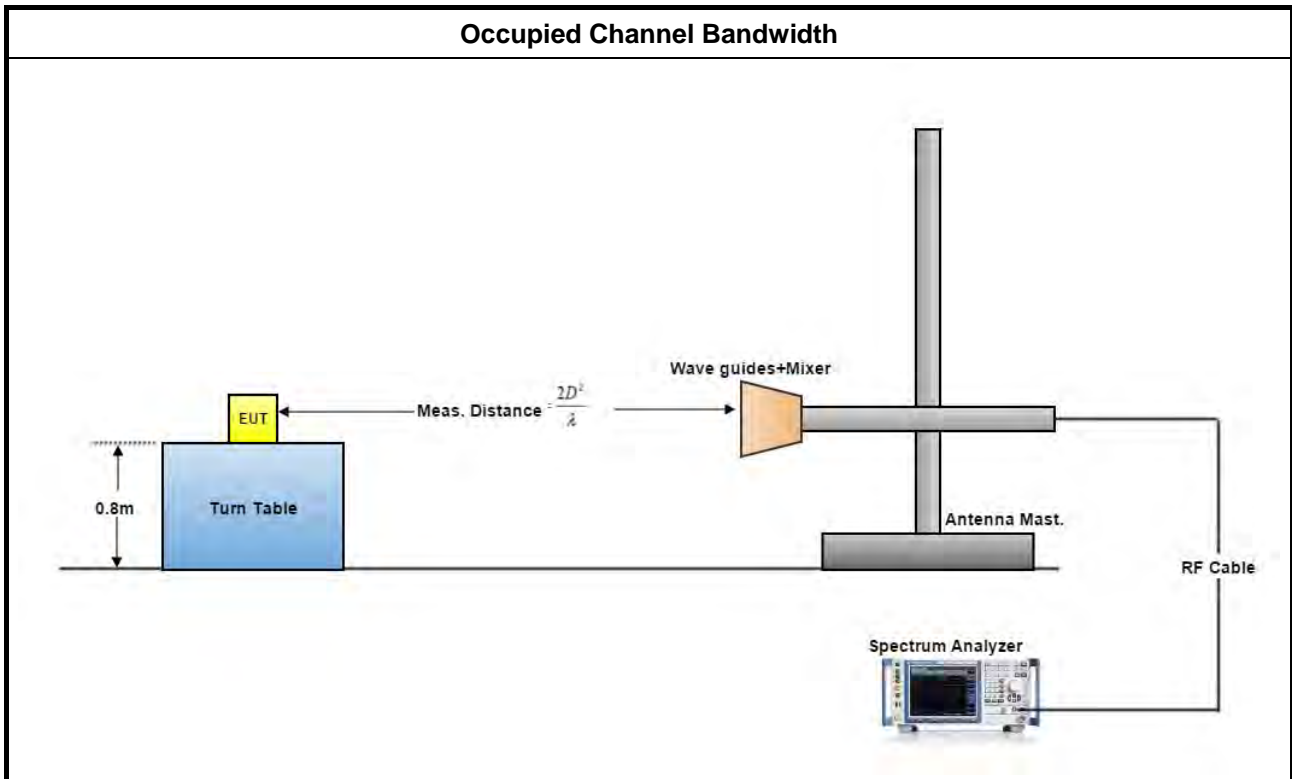





3.2.5 Test Result of Occupied Bandwidth

Test Conditions	see ANSI C63.10, clause 5.11
Test Setup	see ANSI C63.10, clause 6.9.2
<p>NOTE: If equipment having different transmit operating modes (see test report clause 1.1.2), the measurements are uninfluenced by different transmit operating modes, may not need to be repeated for all the operating modes. Similar, if the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing. Refer as ANSI C63.10, clause 15, observe and record with plotted graphs or photographs the worst-case (i.e., widest) occupied bandwidth produced by these different modulation sources.</p>	

Temp	22~23°C	Humidity	55~60%
Test Engineer	Gino Huang		
Test Results			
Test Freq. (GHz)	6 dBc Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (MHz)
58.32	1765.60	2057.89	N/A
60.48	1722.10	2163.53	N/A
62.64	1765.60	2112.88	N/A




3.2.5.1 Bandwidth Plots

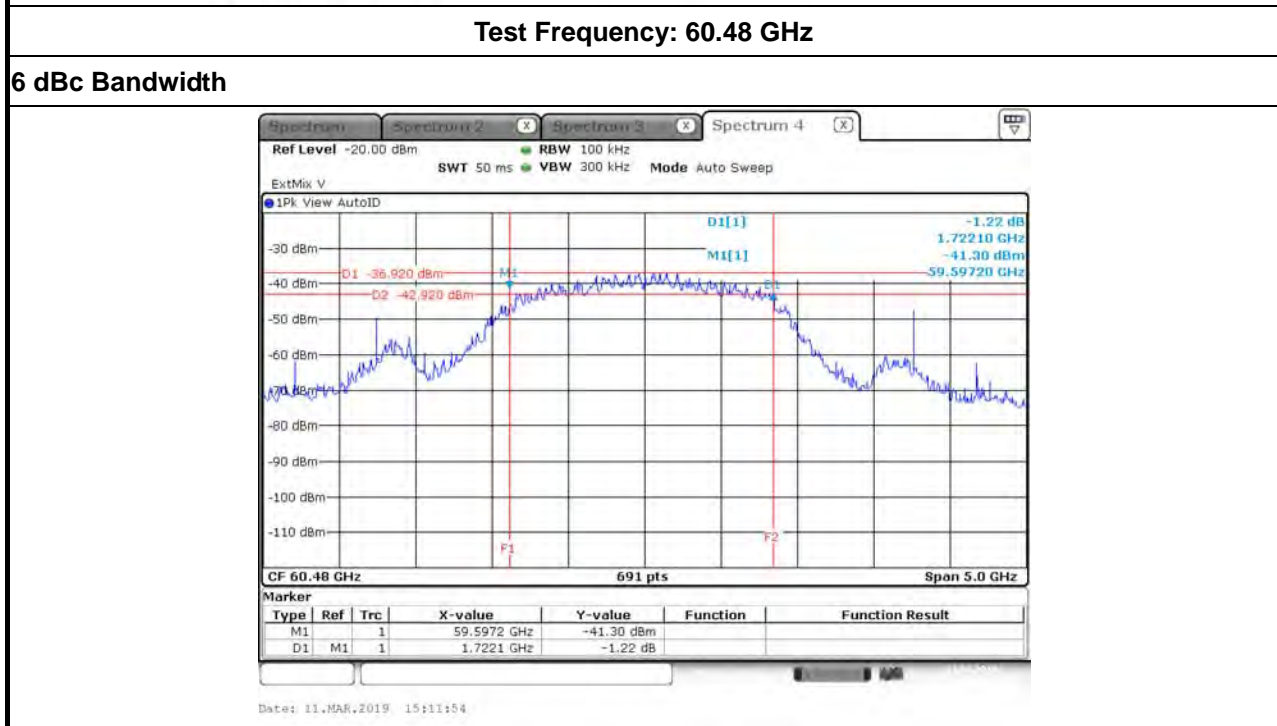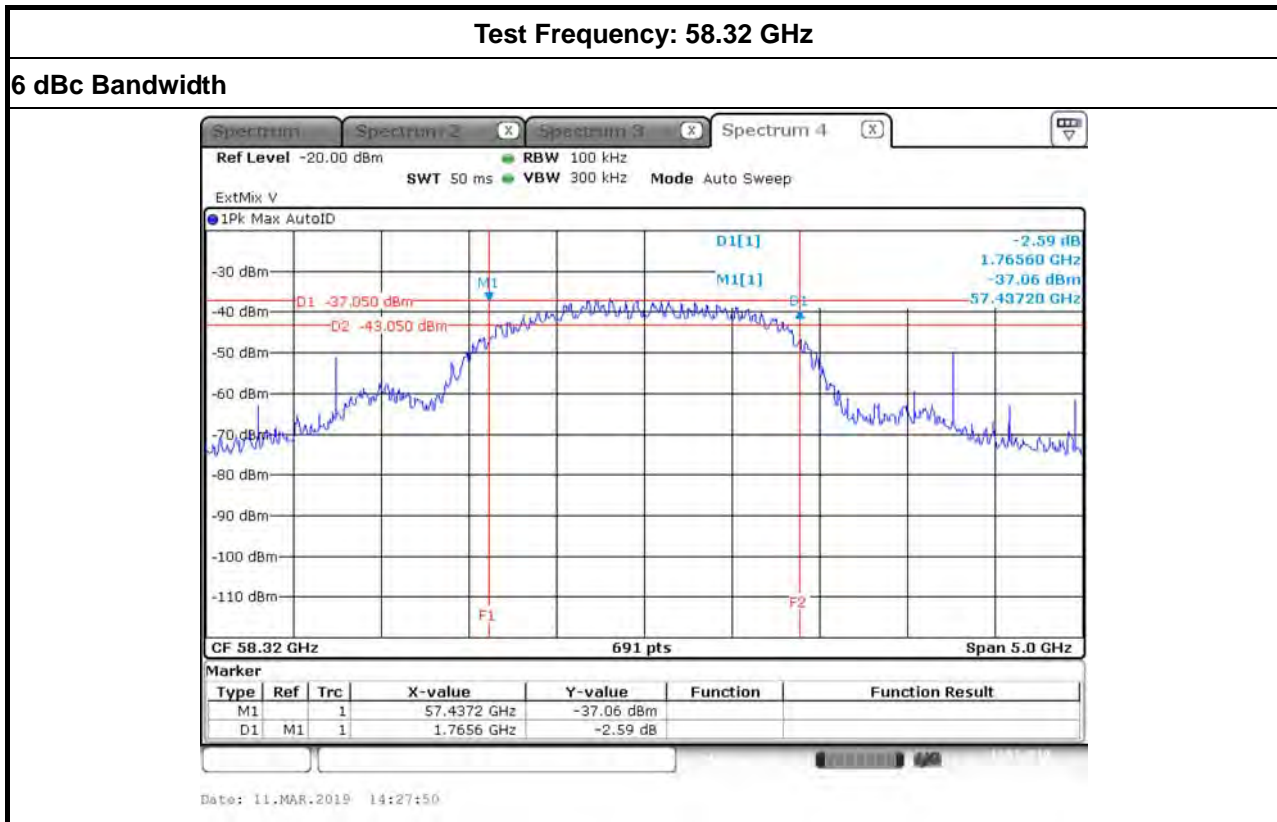



Test Frequency: 62.64 GHz

6 dBc Bandwidth

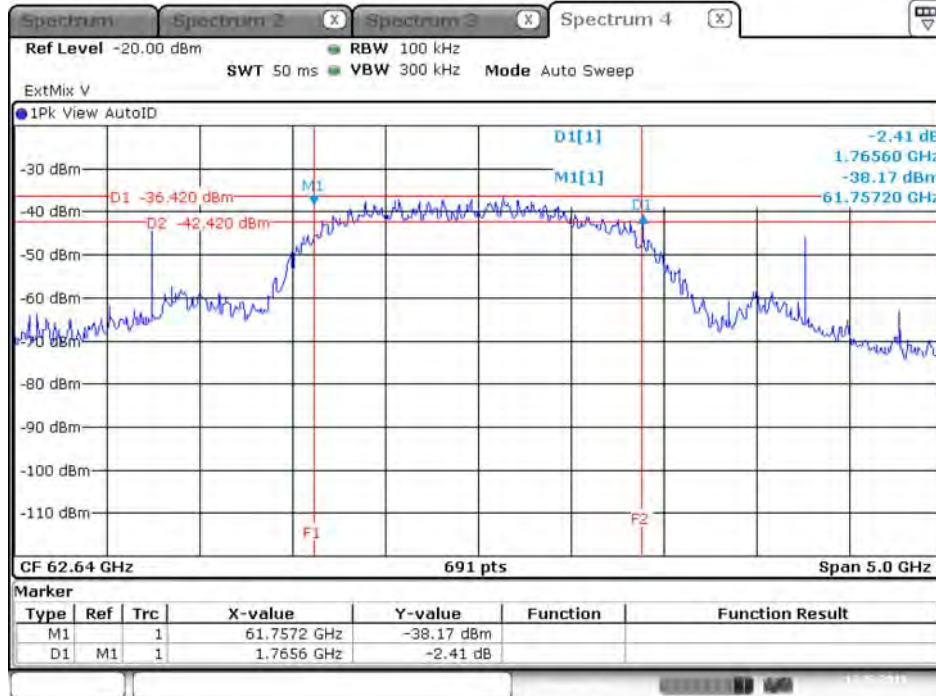

Date: 11.MAR.2019 15:26:41



3.3 EIRP Power

3.3.1 Limit of EIRP Power

EIRP Power Limit		
Use Condition	EIRP Average Power	EIRP Peak Power
Fixed field disturbance sensors at within the frequency band 61-61.5GHz	40 dBm	43 dBm
Fixed field disturbance sensors at outside of the band 61-61.5GHz	10 dBm	13 dBm
Except fixed field disturbance sensors at 61-61.5GHz	N/A	10 dBm
Except outdoor fixed Point to Point	40 dBm	43 dBm
Outdoor fixed Point to Point	82 dBm	85 dBm

Note: For fixed point-to-point transmitters located outdoors, the average power of any emission shall not exceed 82 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi. The peak power of any emission shall not exceed 85 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi.

NOTE: For the applicable limit, see FCC 15.255 (c)


3.3.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.3.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013 clause 9.3 & 9.5.

3.3.4 Test Setup

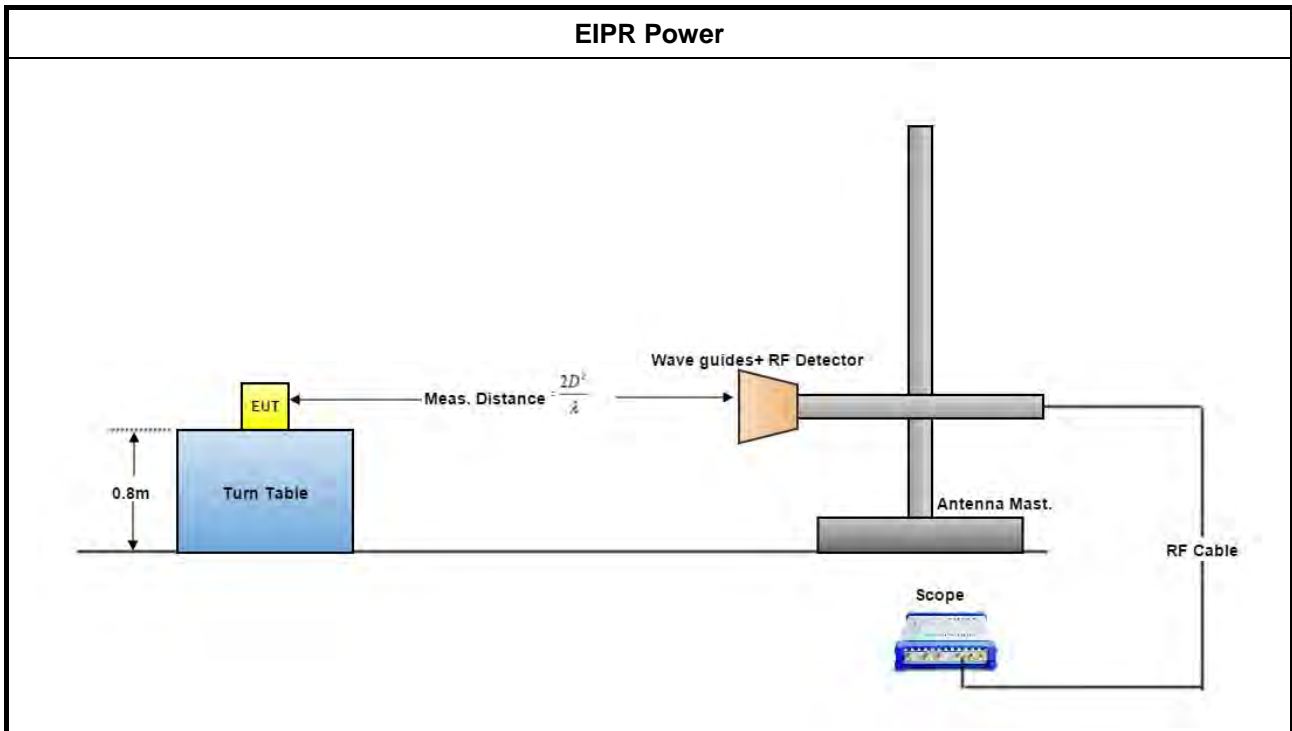

3.3.5 Test Result of EIRP Power

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.11
<p>NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worst case combination to be used for the conformance testing.</p>	



3.3.5.1 Test Result of EIRP Power

Temp	22~23°C	Humidity	55~60%
Test Engineer	Gino Huang	Test Distance	1.5 m
Test Date	Mar. 11, 2019		

Test Results

Test Freq. (GHz)	Rx Gain (dBi)	DSO (mV)		Power Measured (dBm)		E _{Meas} (dBuV/m)		EIRP (dBm)		EIRP Limit (dBm) (note 1)	
		Peak	AV	Peak	AV	Peak	AV	Peak	AV	Peak	AV
58.32	23.6	168.06	160.91	-7.56	-8.18	141.41	140.79	40.14	39.52	43	40
60.48	23.6	163.48	161.25	-7.82	-8.45	141.47	140.84	40.19	39.56	43	40
62.64	23.6	157.91	150.64	-8.05	-8.81	141.54	140.78	40.27	39.51	43	40

The measured power level is converted to EIRP using the Friis equation:

For radiated emissions, calculate the field strength (E) in dBuV/meter.

$$E = 126.8 - 20\log(\lambda) + P - G$$

where:

E : is the field strength of the emission at the measurement distance, in dBuV/m

P : is the power measured at the output of the test antenna, in dBm

λ : is the wavelength of the emission under investigation [300/fMHz], in m

G : is the gain of the test antenna, in dBi For radiated emissions, calculate the EIRP (dBm). If the measurement was performed in the far field, calculate the EIRP.

$$EIRP = E\text{-meas} + 20\log(d\text{-meas}) - 104.7$$

where:

EIRP : is the equivalent isotopically radiated power, in dBm

E-meas. : is the field strength of the emission at the measurement distance, in dBuV/m

d-meas. : is the measurement distance, in m

NOTE 1: For the applicable limit, see FCC 15.255 (c)

NOTE 2: The comparison method which replaces EUT with a signal generator is used to find the correct conversion factor between “DSO(mV)” & “Power Measured(dBm)”.



3.4 Peak Conducted Power

3.4.1 Limit of Peak Conducted Power

Peak Conducted Power Limit	
6dBc Bandwidth	Peak Conducted Power (note 1)
> 100MHz	500mW
≤ 100MHz	500mW x (BW/100) (see note 2)

NOTE 1: For the applicable limit, see FCC 15.255(c)
NOTE 2: BW= 6dB bandwidth (measured at RBW 100kHz)

3.4.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.4.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 9.5

3.4.4 Test Result of Peak Conducted Power

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.11

NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worst case combination to be used for the conformance testing.



3.4.4.1 Peak Conducted Power

Temp	22~23°C	Humidity	55~60%			
Test Engineer	Gino Huang					
Test Date	Mar. 11, 2019					
Test Results						
Test Freq. (GHz)	EIRP (dBm)	Max. Ant. Gain (dBi)	Peak Power (dBm) (note1)	Peak Power (mW)	6dBc BW (MHz) (note2)	Peak Power Limit (mW) (note3)
58.32	40.14	24.9	15.24	33.387	1765.60	500.00
60.48	40.19	24.9	15.29	33.819	1722.10	500.00
62.64	40.27	24.9	15.37	34.407	1765.60	500.00
<p>NOTE 1: Because EUT used for the integral antenna without temporary RF connector provided. Therefore peak conducted power is equal to EIRP power subtract the antenna gain.</p> <p>NOTE 2: For the 6dBc bandwidth, see test report clause 3.2.5.</p> <p>NOTE 3: For the applicable limit, see FCC 15.255(c)</p> <p>NOTE 4: For radiated emission measurements, calculate conducted transmitter output power P(cond)(dBm)</p> $P(\text{cond}) = \text{EIRP} - G(\text{dBi})$ <p>where:</p> <p>G(dBi) is gain of EUT antenna.</p>						



3.5 Transmitter Spurious Emissions


3.5.1 Limit of Transmitter Spurious Emissions


Frequency Range	Limit
Radiated emissions below 40 GHz	FCC 15.209
Radiated emissions above 40 GHz – 200GHz	90 pW/cm ² @ 3 m (Equivalent EIRP 102 μW, -9.91dBm)
NOTE 1: For the applicable limit, see FCC 15.255(d)	
NOTE 2: Spurious emissions shall not exceed the level of the fundamental emission.	


3.5.2 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 9.12

3.5.3 Test Setup

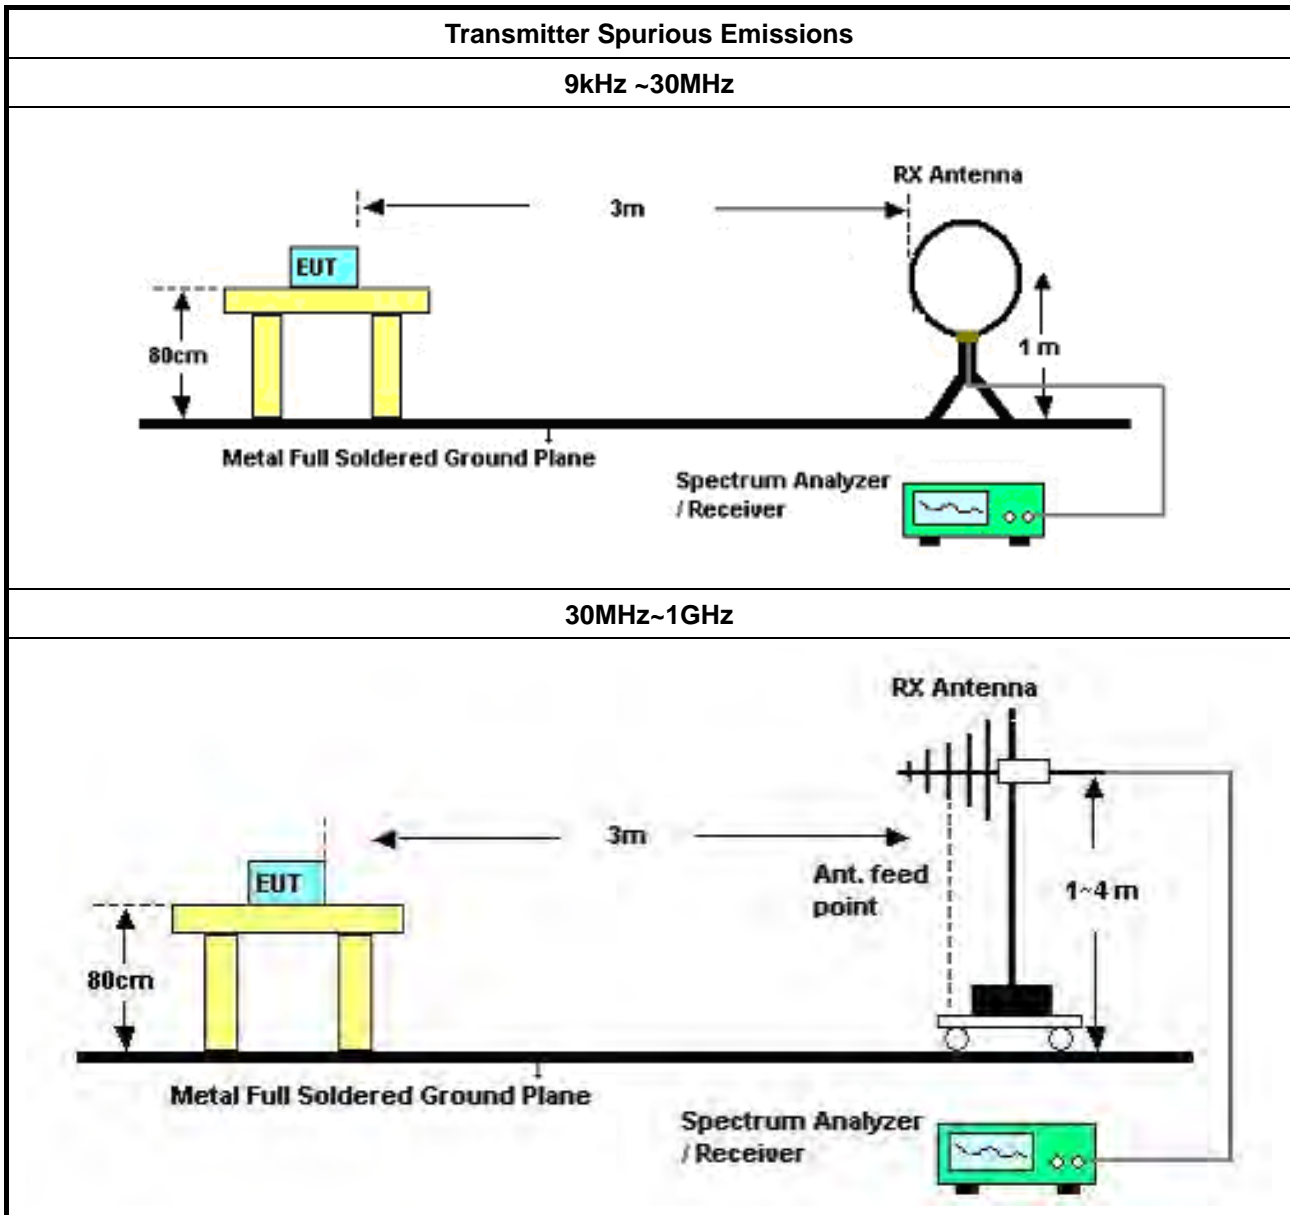

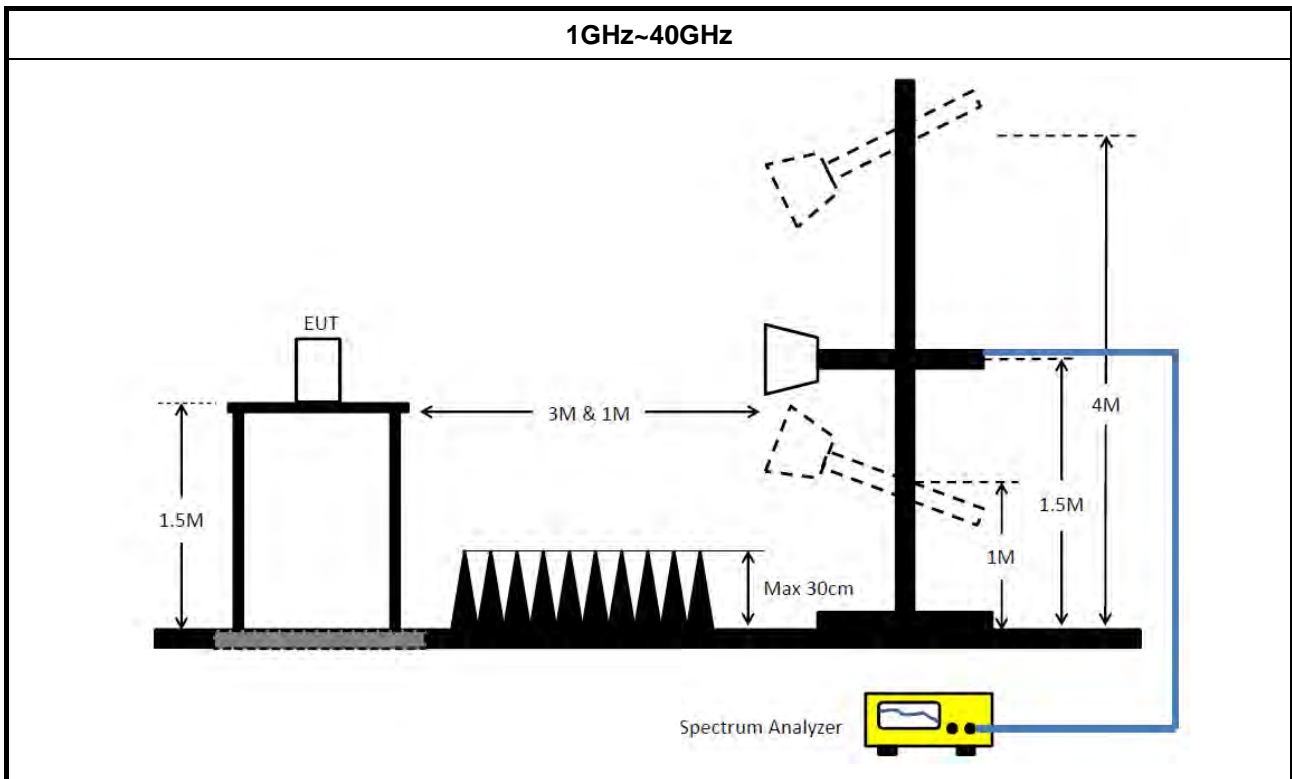

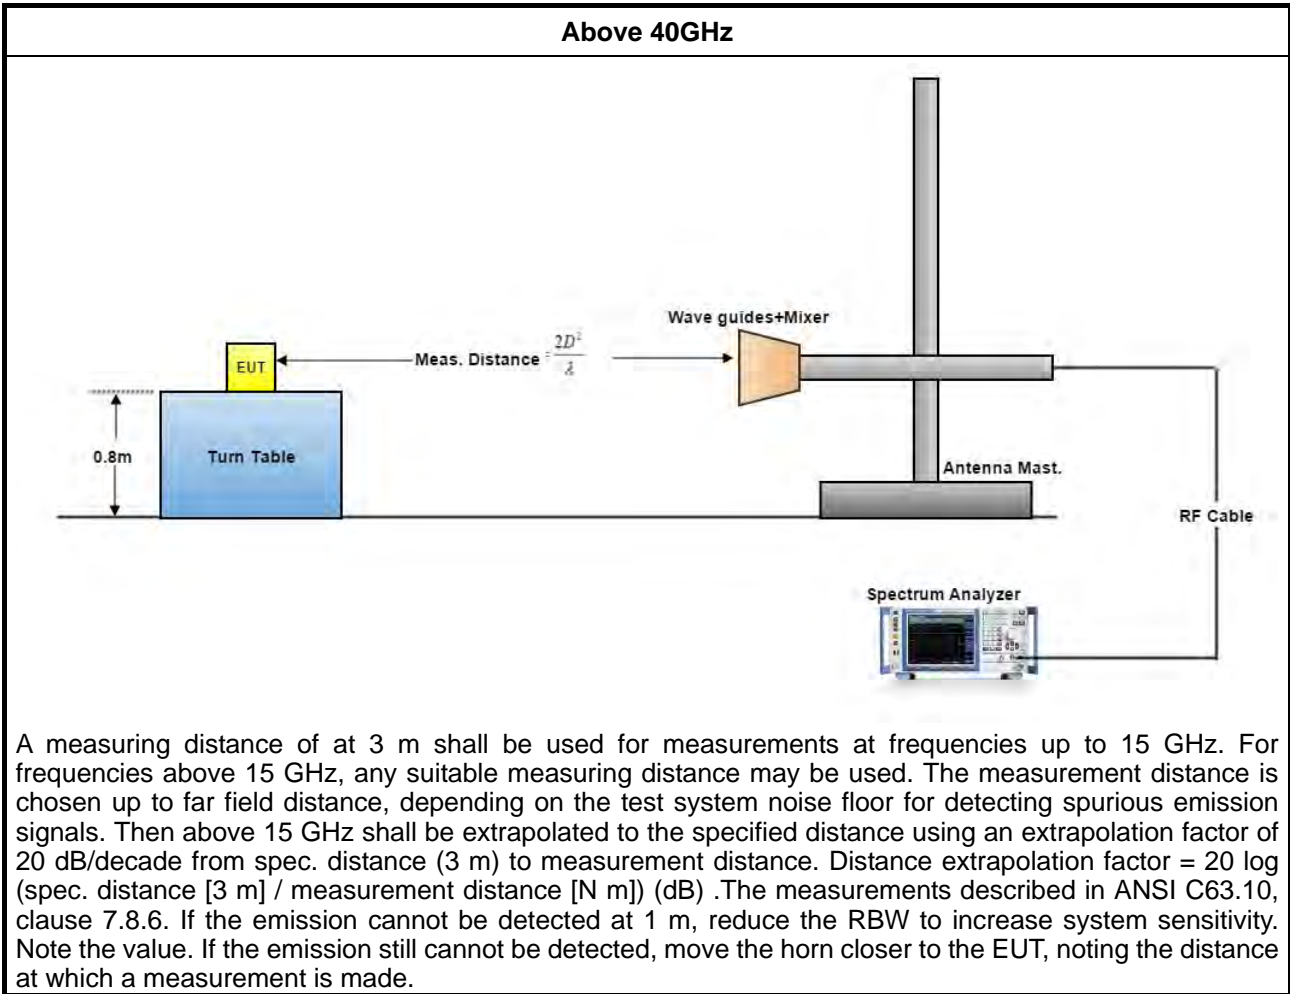

3.5.4 Test Result of Transmitter Spurious Emissions

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.12 ~ 9.13
NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.	

3.5.4.1 Test Result of Transmitter Spurious Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.



3.5.4.2 Test Result of Transmitter Spurious Emissions

Temp	22~23°C	Humidity	55~60%
Test Engineer	Gino Huang	Test Distance	3 m
Test Range	30 MHz – 1000 MHz	Test Configuration	CTX
Test Mode	Mode 1		


Vertical

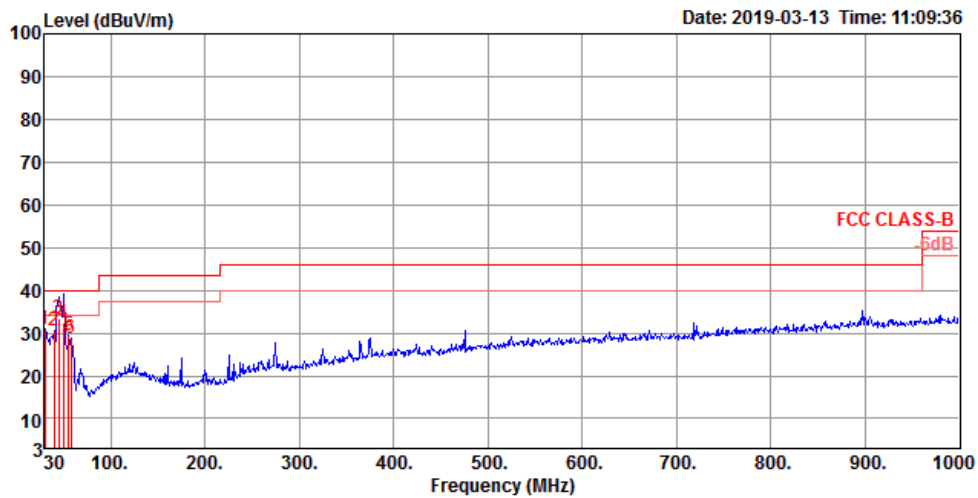

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	30.00	30.75	40.00	-9.25	35.81	0.67	25.70	31.43	150	158 Peak	VERTICAL
2	39.70	30.46	40.00	-9.54	41.33	0.83	19.96	31.66	100	1 Peak	VERTICAL
3	44.55	33.58	40.00	-6.42	47.14	0.89	17.25	31.70	100	357 QP	VERTICAL
4	49.40	32.21	40.00	-7.79	47.95	0.92	15.09	31.75	198	354 QP	VERTICAL
5	55.22	29.39	40.00	-10.61	46.64	0.92	13.62	31.79	100	47 Peak	VERTICAL
6	58.13	28.83	40.00	-11.17	46.69	0.97	12.98	31.81	100	12 Peak	VERTICAL



Horizontal

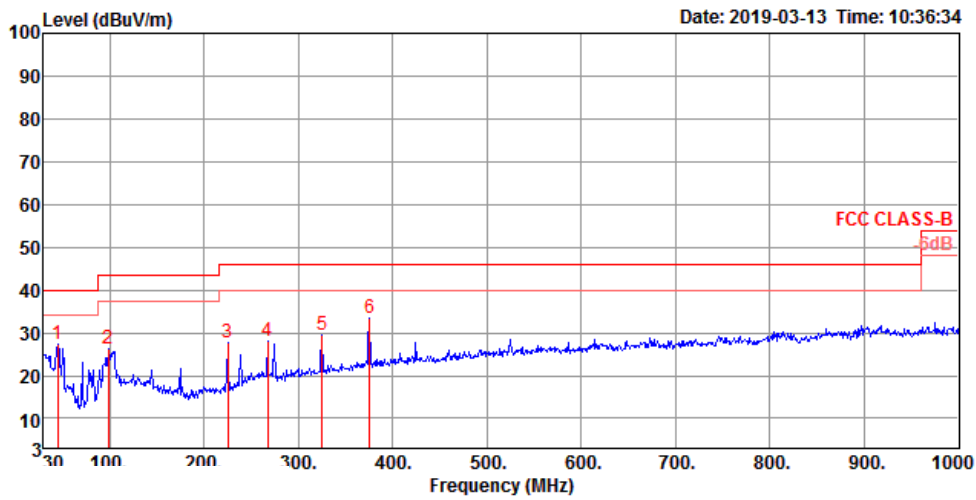


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	44.55	27.51	40.00	-12.49	41.07	0.89	17.25	31.70	100	50 Peak	HORIZONTAL
2	98.87	26.31	43.50	-17.19	39.98	1.29	16.91	31.87	200	277 Peak	HORIZONTAL
3	224.97	27.60	46.00	-18.40	40.86	1.89	16.78	31.93	150	281 Peak	HORIZONTAL
4	267.65	27.95	46.00	-18.05	38.31	2.10	19.54	32.00	125	106 Peak	HORIZONTAL
5	324.88	29.37	46.00	-16.63	38.57	2.34	20.50	32.04	100	112 Peak	HORIZONTAL
6	375.32	33.25	46.00	-12.75	40.97	2.51	21.88	32.11	100	266 Peak	HORIZONTAL



Temp	22~23°C	Humidity	55~60%
Test Engineer	Gino Huang	Test Distance	3 m
Test Range	30 MHz – 1000 MHz	Test Configuration	CTX
Test Mode	Mode 3		


Vertical

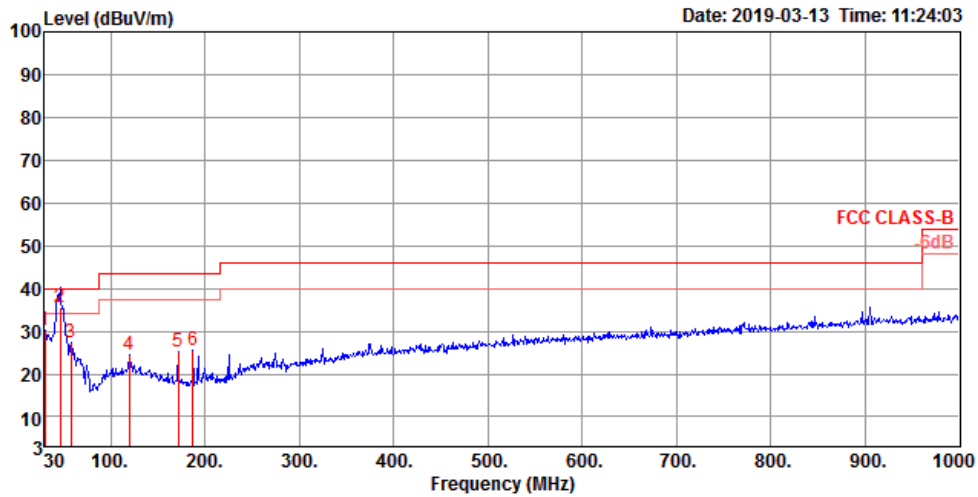

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	30.00	30.13	40.00	-9.87	35.19	0.67	25.70	31.43	150	224 Peak	VERTICAL
2	46.49	35.45	40.00	-4.55	49.92	0.91	16.34	31.72	100	41 QP	VERTICAL
3	58.13	27.31	40.00	-12.69	45.17	0.97	12.98	31.81	100	1 Peak	VERTICAL
4	119.24	24.38	43.50	-19.12	36.18	1.41	18.68	31.89	100	230 Peak	VERTICAL
5	171.62	25.09	43.50	-18.41	39.39	1.67	15.94	31.91	150	0 Peak	VERTICAL
6	187.14	25.72	43.50	-17.78	40.42	1.72	15.50	31.92	100	161 Peak	VERTICAL



Horizontal

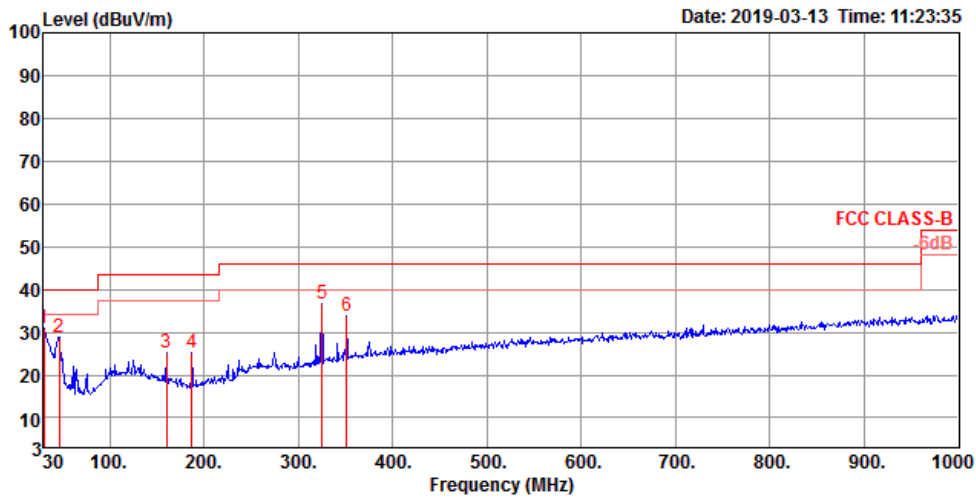

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	30.00	30.76	40.00	-9.24	35.82	0.67	25.70	31.43	125	66 Peak	HORIZONTAL
2	46.49	28.82	40.00	-11.18	43.29	0.91	16.34	31.72	200	62 Peak	HORIZONTAL
3	159.98	25.29	43.50	-18.21	39.08	1.60	16.50	31.89	150	84 Peak	HORIZONTAL
4	187.14	25.08	43.50	-18.42	39.78	1.72	15.50	31.92	125	83 Peak	HORIZONTAL
5	324.88	36.81	46.00	-9.19	46.01	2.34	20.50	32.04	100	320 Peak	HORIZONTAL
6	351.07	33.72	46.00	-12.28	42.14	2.46	21.20	32.08	150	328 Peak	HORIZONTAL



Temp	22~23°C	Humidity	55~60%
Test Engineer	Gino Huang	Test Distance	3 m
Test Range	1 GHz – 40 GHz	Test Freq. (GHz)	58.32
Test Date	Mar. 11, 2019~Mar. 23, 2019		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	7559.99	47.95	54.00	-6.05	40.66	6.19	36.33	35.23	170	198 Average	VERTICAL
2	7560.17	54.07	74.00	-19.93	46.78	6.19	36.33	35.23	170	198 Peak	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	7559.80	53.18	74.00	-20.82	45.89	6.19	36.33	35.23	151	217 Peak	HORIZONTAL
2	7559.97	45.12	54.00	-8.88	37.83	6.19	36.33	35.23	151	217 Average	HORIZONTAL



Temp	22~23°C	Humidity	55~60%
Test Engineer	Gino Huang	Test Distance	3 m
Test Range	1 GHz – 40 GHz	Test Freq. (GHz)	64.48
Test Date	Mar. 11, 2019~Mar. 23, 2019		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	7559.91	54.20	74.00	-19.80	46.91	6.19	36.33	35.23	157	214	Peak	VERTICAL
2	7559.97	48.62	54.00	-5.38	41.33	6.19	36.33	35.23	157	214	Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	7560.04	47.44	54.00	-6.56	40.15	6.19	36.33	35.23	167	315	Average	HORIZONTAL
2	7560.15	54.42	74.00	-19.58	47.13	6.19	36.33	35.23	167	315	Peak	HORIZONTAL



Temp	22~23°C	Humidity	55~60%
Test Engineer	Gino Huang	Test Distance	3 m
Test Range	1 GHz – 40 GHz	Test Freq. (GHz)	62.64
Test Date	Mar. 11, 2019~Mar. 23, 2019		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	7560.02	48.65	54.00	-5.35	41.36	6.19	36.33	35.23	158	214	Average	VERTICAL
2	7560.05	54.06	74.00	-19.94	46.77	6.19	36.33	35.23	158	214	Peak	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	7560.00	44.86	54.00	-9.14	37.57	6.19	36.33	35.23	148	216	Average	HORIZONTAL
2	7560.01	53.02	74.00	-20.98	45.73	6.19	36.33	35.23	148	216	Peak	HORIZONTAL



Temp	22~23°C	Humidity	55~60%
Test Engineer	Gino Huang	Test Date	Mar. 11, 2019
Test Range	40GHz – 200GHz		

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
58.32	23.6	1.5	56.56	-59.24
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-11.83	3	58.0645	90.00	PASS

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
60.48	23.6	1.5	55.84	-60.70
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-13.40	3	40.4388	90.00	PASS



Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
62.64	23.6	1.5	50.59	-64.52
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-18.08	3	13.7732	90.00	PASS

Note:

$$EIRP = Prx - Grx + \text{Free Space Path Loss} = Prx - Grx + 20\text{Log}(4\pi d / \lambda)^2$$

Which

Prx = Read Level.

Grx = Rx Antenna Gain.

A distance factor is offset and the formula is $20\text{LOG}(D1/D2)$

Which

D1 = Specification Distance

D2 = Measurement Distance

3.6 Frequency Stability

3.6.1 Limit of Frequency Stability

Frequency Stability	Limit
Refer as FCC 15.255(f) and ANSI C63.10-2013, clause 9.14	within the frequency bands
Note: These measurements shall also be performed at normal and extreme test conditions.	


3.6.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.6.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clauses 9.14.

3.6.4 Test Setup

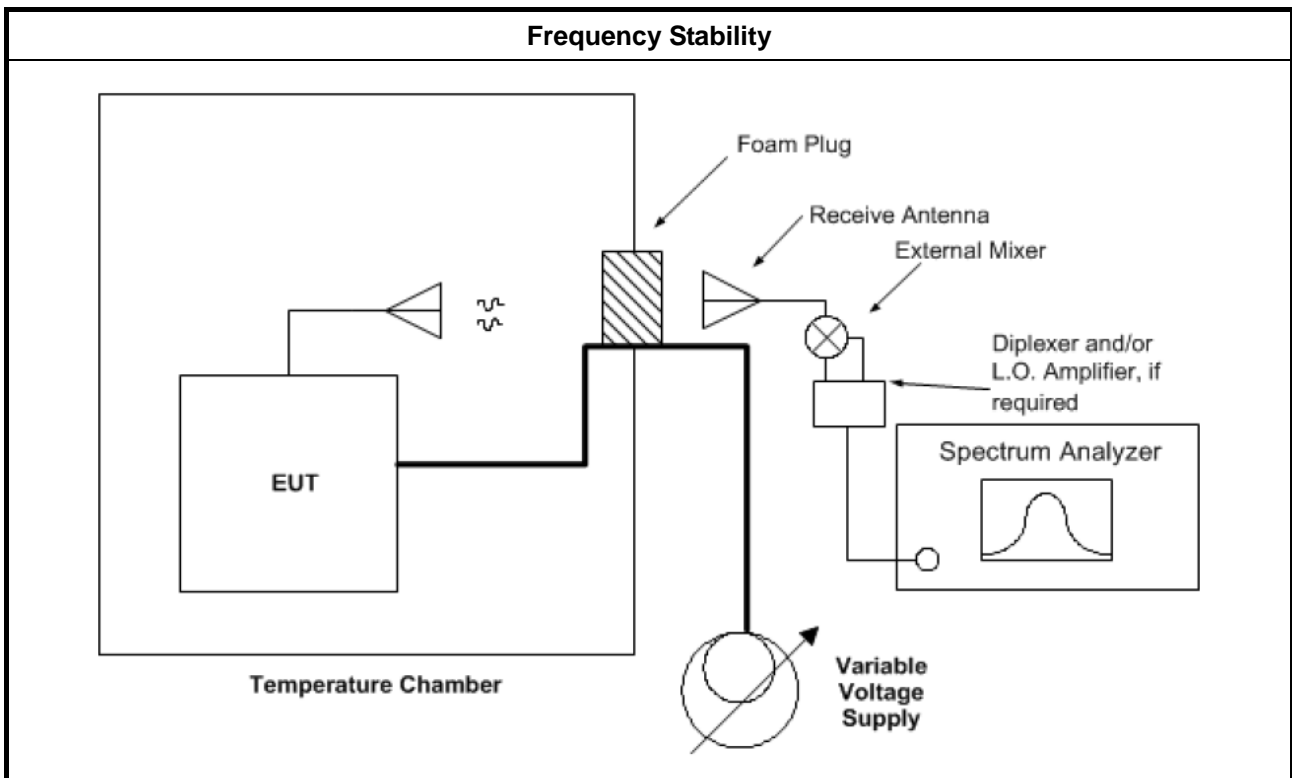



3.6.5 Test Result of Frequency Stability

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.14
NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.	

3.6.5.1 Frequency Stability with Respect to Ambient Temperature

Frequency Stability with Respect to Ambient Temperature			
Temp	22~24°C	Humidity	50~60%
Test Engineer	Gino Huang	Test Date	Mar. 11, 2019
Test Results			
Test Temperature (°C)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
-40	60586.215	-498	Within band
-30	60586.258	-455	Within band
-20	60586.333	-380	Within band
-10	60586.398	-315	Within band
0	60586.412	-301	Within band
10	60586.486	-227	Within band
20	60586.713	Reference	Within band
30	60586.821	108	Within band
40	60586.951	238	Within band
50	60586.974	261	Within band
55	60586.941	228	Within band
NOTE: The manufacturer's specified temperature range of -40 to 55°C.			



3.6.5.2 Frequency Stability When Varying Supply Voltage

Frequency Stability When Varying Supply Voltage			
Temp	22~24°C	Humidity	50~60%
Test Engineer	Gino Huang	Test Date	Mar. 11, 2019
Test Results			
Test Voltage: (Vdc)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
47.6	60586.588	102	Within band
56	60586.486	Reference	Within band
64.4	60586.647	161	Within band
NOTE: For the applicable limit, see FCC 15.255(f).			



3.7 Operation Restriction and Group Installation

3.7.1 Limit of Operation Restriction and Group Installation

Item	Limit
Operation Restriction	Operation is not permitted for the following products: <ul style="list-style-type: none">♦ Equipment used on aircraft or satellites. (Refer as FCC 15.255 (a))♦ Field disturbance sensors, including vehicle radar systems, unless the field disturbance sensors are employed for fixed operation. (Refer as FCC 15.255 (a))
Group Installation	Operation is not permitted for the following products: <ul style="list-style-type: none">♦ External phase-locking (Refer as FCC 15.255 (h))

3.7.2 Result of Operation Restriction

Manufacturer declares that EUT will not be used on aircraft or satellites. Then user manual will include a statement to caution EUT is not permitted for use on aircraft or satellites. EUT is a wireless video area network (WVAN) for the connection of consumer electronic (CE) audio and video devices.

3.7.3 Result of Group Installation

The frequency, amplitude and phase of the transmit signal are set within the EUT. There are no external phase-locking inputs or any other means of combining two or more units together to realize a beam-forming array.



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 21, 2018	Nov. 20, 2019	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 05, 2018	Nov. 04, 2019	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	Jan. 16, 2019	Jan. 15, 2020	Conduction (CO02-CB)
COND Cable	Woken	Cable	2	0.15MHz ~ 30MHz	Nov. 06, 2018	Nov. 05, 2019	Conduction (CO02-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	N.C.R.	Conduction (CO02-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2018	Mar. 15, 2019	Radiation (03CH01-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Aug. 27, 2018	Aug. 26, 2019	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 13, 2018	Nov. 12, 2019	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jun. 28, 2018	Jun. 27, 2019	Radiation (03CH01-CB)
Pre-Amplifier	EMCI	EMC330N	980332	20MHz ~ 3GHz	May 02, 2018	May 01, 2019	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 08, 2019	Jan. 07, 2020	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 04, 2018	Jul. 03, 2019	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Jan. 31, 2019	Jan. 30, 2020	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS	100359	9kHz ~ 2.75GHz	Jul. 03, 2018	Jul. 02, 2019	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-16+17	N/A	30 MHz ~ 1 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)
Mixer	OML	M19HW/A	U91113-1	40 ~ 60 GHz	Oct. 12, 2017*	Oct. 11, 2019	Radiation (03CH01-CB)
Mixer	OML	M15HW/A	V91113-1	50 ~ 75 GHz	Oct. 12, 2017*	Oct. 11, 2019	Radiation (03CH01-CB)
Mixer	OML	M12HW/A	E91113-1	60 ~ 90 GHz	Oct. 12, 2017*	Oct. 11, 2019	Radiation (03CH01-CB)
Mixer	OML	M08HW/A	F91113-1	90 ~ 140 GHz	Oct. 12, 2017*	Oct. 11, 2019	Radiation (03CH01-CB)
Mixer	OML	M05HW/A	G91113-1	140 ~ 220 GHz	Oct. 12, 2017*	Oct. 11, 2019	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M19RH	U91113-A	40 ~ 60 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M15RH	V91113-A	50 ~ 75 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M12RH	E91113-A	60 ~ 90 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M08RH	F91113-A	90 ~ 140 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M05RH	G91113-A	140 ~ 220 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Detector	Millitech	DET-15-RPF W0	#A18185(074)	50 ~ 75 GHz	Jan. 29, 2018*	Jan. 29, 2020	Radiation (03CH01-CB)
Pico Scope	Pico	Pico Scope 6402C	CX372/002	N/A	Jul. 13, 2018	Jul. 12, 2019	Radiation (03CH01-CB)
Temp. and Humidity Chamber	Gaint Force	GTH-408-40-CP-AR	MAA1410-011	-40~100 degree	Sep. 14, 2018	Sep. 13, 2019	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“**” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.



5 Measurement Uncertainty

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Radiated Emission (40GHz ~ 220GHz)	4.7 dB	Confidence levels of 95%
Temperature	0.7°C	Confidence levels of 95%