

Test Report

Report No.: MTi230530003-02E3

Date of issue: 2023-07-17

Applicant: Zhuhai Quin Technology Co., Ltd.

Product: Desktop Printer

Model(s): R831, R831Pro, R831Plus, R831W, R831S, R831K, R831Max, R831SE, R831C, R831B, D831, D831Pro, D831Plus, D831W, D831S, D831K, D831Max, D831SE, D831C, D831B, R8A31, R8A31Pro, R8A31Plus, R8A31W, R8A31S, R8A31K, R8A31Max, R8A31SE, R8A31C, R8A31B, D8A31, D8A31Pro, D8A31Plus, D8A31W, D8A31S, D8A31K, D8A31Max, D8A31SE, D8A31C, D8A31B

FCC ID: 2ASRB-R831

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

The test report is only used for customer scientific research, teaching, internal quality control and other purposes, and is for internal reference only.



Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Table of contents

1	General Description	5
1.1	Description of the EUT	5
1.2	Description of test modes	5
1.3	Environmental Conditions	7
1.4	Description of support units	7
1.5	Measurement uncertainty	7
2	Summary of Test Result	8
3	Test Facilities and accreditations	9
3.1	Test laboratory	9
4	List of test equipment.....	10
5	Evaluation Results (Evaluation)	13
5.1	Antenna requirement	13
6	Radio Spectrum Matter Test Results (RF)	13
6.1	Conducted Emission at AC power line	13
6.2	Occupied Bandwidth	20
6.3	Maximum Conducted Output Power.....	21
6.4	Power Spectral Density	22
6.5	RF conducted spurious emissions and band edge measurement	23
6.6	Band edge emissions (Radiated).....	24
6.7	Radiated spurious emissions (below 1GHz).....	37
6.8	Radiated spurious emissions (above 1GHz).....	41
	Photographs of the test setup.....	48
	Photographs of the EUT	50
	Appendix A: DTS Bandwidth	52
	Appendix B: Maximum conducted output power	56
	Appendix C: Maximum power spectral density	57
	Appendix D: Band edge measurements.....	61
	Appendix E: Conducted Spurious Emission	63
	Appendix F: Duty Cycle	72

Test Result Certification	
Applicant:	Zhuhai Quin Technology Co., Ltd.
Address:	ROOM 103-029(CENTRALIZED OFFICE AREA) , 1F, BUILDING 1, NO. 18 FUTIAN ROAD, XIANGZHOU DISTRICT, ZHUHAI CITY, CHINA
Manufacturer:	Zhuhai Quin Technology Co., Ltd.
Address:	ROOM 103-029(CENTRALIZED OFFICE AREA) , 1F, BUILDING 1, NO. 18 FUTIAN ROAD, XIANGZHOU DISTRICT, ZHUHAI CITY, CHINA
Product description	
Product name:	Desktop Printer
Trade mark:	N/A
Model name:	R831
Series Model:	R831Pro, R831Plus, R831W, R831S, R831K, R831Max, R831SE, R831C, R831B, D831, D831Pro, D831Plus, D831W, D831S, D831K, D831Max, D831SE, D831C, D831B, R8A31, R8A31Pro, R8A31Plus, R8A31W, R8A31S, R8A31K, R8A31Max, R8A31SE, R8A31C, R8A31B, D8A31, D8A31Pro, D8A31Plus, D8A31W, D8A31S, D8A31K, D8A31Max, D8A31SE, D8A31C, D8A31B
Standards:	FCC 47 CFR Part 15 Subpart C
Test method:	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02
Date of Test	
Date of test:	2023-07-14 to 2023-07-17
Test result:	Pass

Test Engineer	:	<i>Letter Lan.</i>
		(Letter Lan)
Reviewed By	:	<i>Leon Chen</i>
		(Leon Chen)
Approved By	:	<i>Tom Xue</i>
		(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	Desktop Printer
Model name:	R831
Series Model:	R831Pro, R831Plus, R831W, R831S, R831K, R831Max, R831SE, R831C, R831B, D831, D831Pro, D831Plus, D831W, D831S, D831K, D831Max, D831SE, D831C, D831B, R8A31, R8A31Pro, R8A31Plus, R8A31W, R8A31S, R8A31K, R8A31Max, R8A31SE, R8A31C, R8A31B, D8A31, D8A31Pro, D8A31Plus, D8A31W, D8A31S, D8A31K, D8A31Max, D8A31SE, D8A31C, D8A31B
Model difference:	All the models are the same circuit and module, except the model name, colour and silk-screen.
Electrical rating:	Input: 18V/3A 54W
Accessories:	Adaptor: Adapter: Model: MKF-1803000H Input: 100-240V~ 50/60Hz 2.0A(Max) Output: 18V/3A 54W Cable: USB-A to Type-C cable(1.5m)
Hardware version:	Q 254_A
Software version:	0.1.0
Test sample(s) number:	MTi230530003-01S1001
RF specification	
Operating frequency range:	802.11b/g/n(HT20): 2412MHz to 2462MHz;
Channel number:	802.11b/g/n(HT20): 11 Channels;
Modulation type:	802.11b: DSSS(CCK, DQPSK, DBPSK); 802.11g: OFDM(BPSK, QPSK, 16QAM, 64QAM); 802.11n(HT20): OFDM (BPSK, QPSK, 16QAM, 64QAM)
Antenna(s) type:	FPC Antenna
Antenna(s) gain:	3.27dBi

1.2 Description of test modes

No.	Emission test modes
Mode1	802.11b mode
Mode2	802.11g mode
Mode3	802.11n(HT20) mode

1.2.1 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

Note: The test software provided by manufacturer is used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Test Software: FCC Assist 1.1.5

For power setting, refer to below table.

Mode	2412MHz	2437MHz	2462MHz
802.11b	40	40	40
802.11g	40	40	40
802.11n	40	40	40

1.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

1.4 Description of support units

The EUT was tested as an independent device.

1.5 Measurement uncertainty

Measurement	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	3.1dB
Occupied channel bandwidth	±3 %
RF output power, conducted	±1 dB
Power Spectral Density, conducted	±1 dB
Unwanted Emissions, conducted	±1 dB
Radiated spurious emissions (1GHz~26GHz)	5.3dB
Radiated spurious emissions (9kHz~30MHz)	4.3dB
Radiated spurious emissions (30MHz~1GHz)	4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2 Summary of Test Result

No.	FCC reference	Description of test	Result
1	§ 15.203	Antenna requirement	Pass
2	§ 15.207	AC power line conducted emissions	Pass
3	§ 15.247(d)	Radiated spurious emissions	Pass
4	15.247(a)(2)	DTS bandwidth	Pass
5	15.247(b)(3)	Maximum conducted output power	Pass
6	15.247(e)	Power Spectral Density	Pass
7	15.247(d)	Band edge (Conducted)	Pass
8	15.247(d)	Conducted spurious emissions	Pass
9	/	Duty Cycle	Pass

3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Conducted Emission at AC power line						
1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2023-04-26	2024-04-25
2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2023-05-05	2024-05-04
3	Artificial Mains Network	Schwarzbeck	NSLK 8127	1001	2023-05-06	2024-05-05
Occupied Bandwidth						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Maximum Conducted Output Power						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Power Spectral Density						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Emissions in non- frequency bands						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Band edge emissions (Radiated)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2023-05-26	2024-05-25
3	Amplifier	Agilent	8449B	3008A01120	2023-05-26	2024-05-25
4	Multi-device Controller	TuoPu	TPMDC	/	/	/
5	MXA signal analyzer	Agilent	N9020A	MY54440859	2023-05-05	2024-05-04
Emissions in frequency bands (below 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	TRILOG Broadband Antenna	schwarabeck	VULB 9163	9163-1338	2023-06-11	2025-06-10
3	Amplifier	Hewlett-Packard	8447F	3113A06184	2023-04-26	2024-04-25
4	Multi-device Controller	TuoPu	TPMDC	/	/	/
5	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2021/05/30	2024/05/29
Emissions in frequency bands (above 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2023-05-26	2024-05-25

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
3	Amplifier	Agilent	8449B	3008A01120	2023-05-26	2024-05-25
4	Multi-device Controller	TuoPu	TPMDC	/	/	/
5	MXA signal analyzer	Agilent	N9020A	MY54440859	2023-05-05	2024-05-04

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Description of the antenna of EUT:	The antenna of the EUT is permanently attached.
Conclusion:	The EUT complies with the requirement of FCC PART 15.203.

6 Radio Spectrum Matter Test Results (RF)

6.1 Conducted Emission at AC power line


Test Requirement:	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Limit:	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Method:	Occupied bandwidth—relative measurement procedure
Procedure:	<p>a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.</p> <p>b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.</p> <p>c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.</p> <p>d) Steps a) through c) might require iteration to adjust within the specified tolerances.</p> <p>e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.</p> <p>f) Set detection mode to peak and trace mode to max hold.</p> <p>g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).</p> <p>h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - xx]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.</p> <p>i) If the reference value is determined by an unmodulated carrier, then turn</p>

	<p>the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).</p> <p>j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.</p> <p>k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).</p>		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		
Test Method:	ANSI C63.10-2013 section 6.2		
Procedure:	Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		

6.1.1 E.U.T. Operation:


Operating Environment:					
Temperature:	25.2 °C	Humidity:	50.2 %	Atmospheric Pressure:	99 kPa
Pre test mode:	Mode1, Mode2, Mode3				
Final test mode:	Mode1, Mode2, Mode3				

6.1.2 Test Setup Diagram:

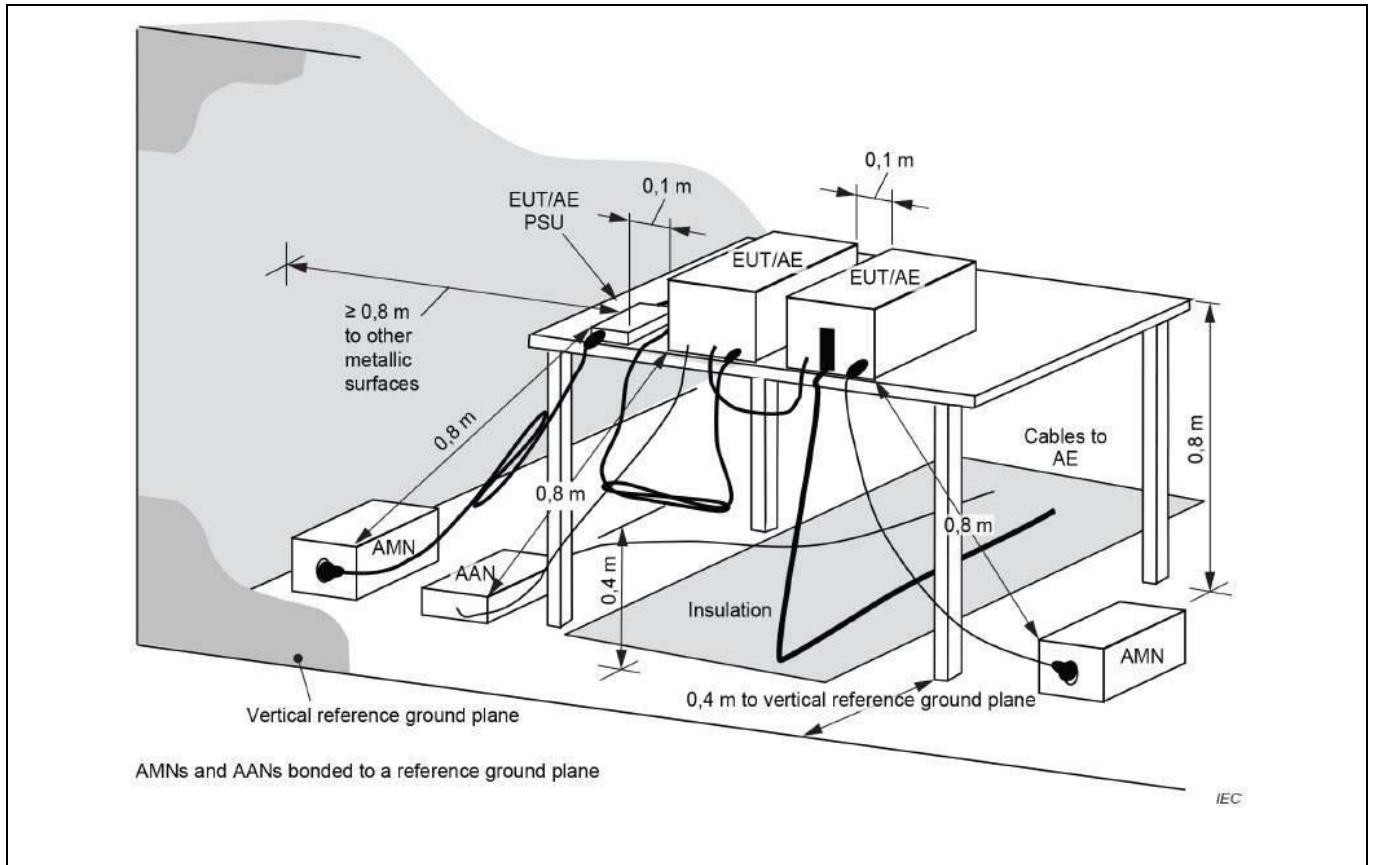


6.1.3 Test Data:

Mode1 / Line: Line / Band: 2.4G / BW: 20 / 120V/60Hz

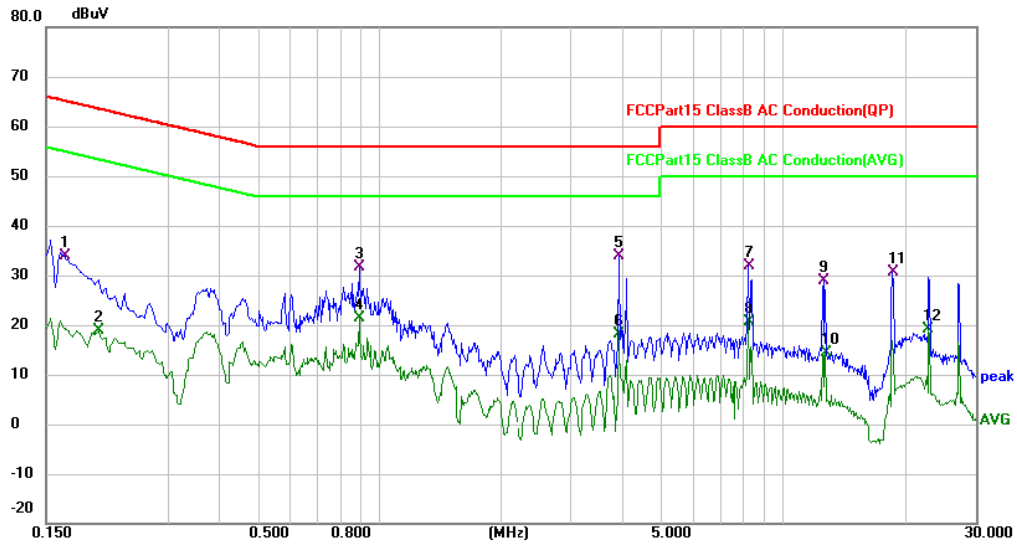


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Over dB	Detector	Comment
1		0.1660	23.60	10.26	33.86	65.16	-31.30	QP	
2		0.2020	8.30	10.60	18.90	53.53	-34.63	AVG	
3		0.8940	19.47	12.13	31.60	56.00	-24.40	QP	
4		0.8940	9.16	12.13	21.29	46.00	-24.71	AVG	
5	*	3.9340	23.55	10.28	33.83	56.00	-22.17	QP	
6		3.9340	7.82	10.28	18.10	46.00	-27.90	AVG	
7		8.1980	21.58	10.29	31.87	60.00	-28.13	QP	
8		8.1980	10.25	10.29	20.54	50.00	-29.46	AVG	
9		12.5860	18.58	10.41	28.99	60.00	-31.01	QP	
10		12.7420	4.02	10.41	14.43	50.00	-35.57	AVG	
11		18.7139	20.01	10.64	30.65	60.00	-29.35	QP	
12		22.9420	8.42	10.74	19.16	50.00	-30.84	AVG	

Mode1 / Line: Neutral / Band: 2.4G / BW: 20 / 120V/60Hz

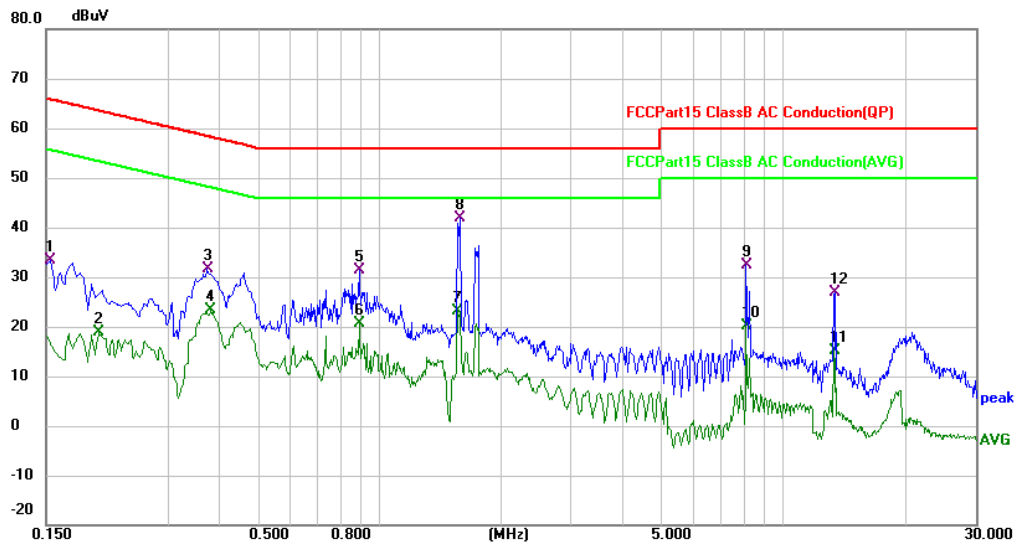


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Over dB	Detector	Comment
1		0.1539	23.21	10.28	33.49	65.79	-32.30	QP	
2		0.2020	8.15	10.68	18.83	53.53	-34.70	AVG	
3		0.3740	20.62	11.03	31.65	58.41	-26.76	QP	
4		0.3820	12.29	11.05	23.34	48.24	-24.90	AVG	
5		0.8940	19.24	12.17	31.41	56.00	-24.59	QP	
6		0.8940	8.42	12.17	20.59	46.00	-25.41	AVG	
7		1.5660	9.86	13.32	23.18	46.00	-22.82	AVG	
8	*	1.5780	28.61	13.34	41.95	56.00	-14.05	QP	
9		8.1260	21.93	10.33	32.26	60.00	-27.74	QP	
10		8.1260	9.86	10.33	20.19	50.00	-29.81	AVG	
11		13.3620	4.77	10.47	15.24	50.00	-34.76	AVG	
12		13.5300	16.46	10.49	26.95	60.00	-33.05	QP	

Mode1 / Line: Line / Band: 2.4G / BW: 20 / 240V/60Hz

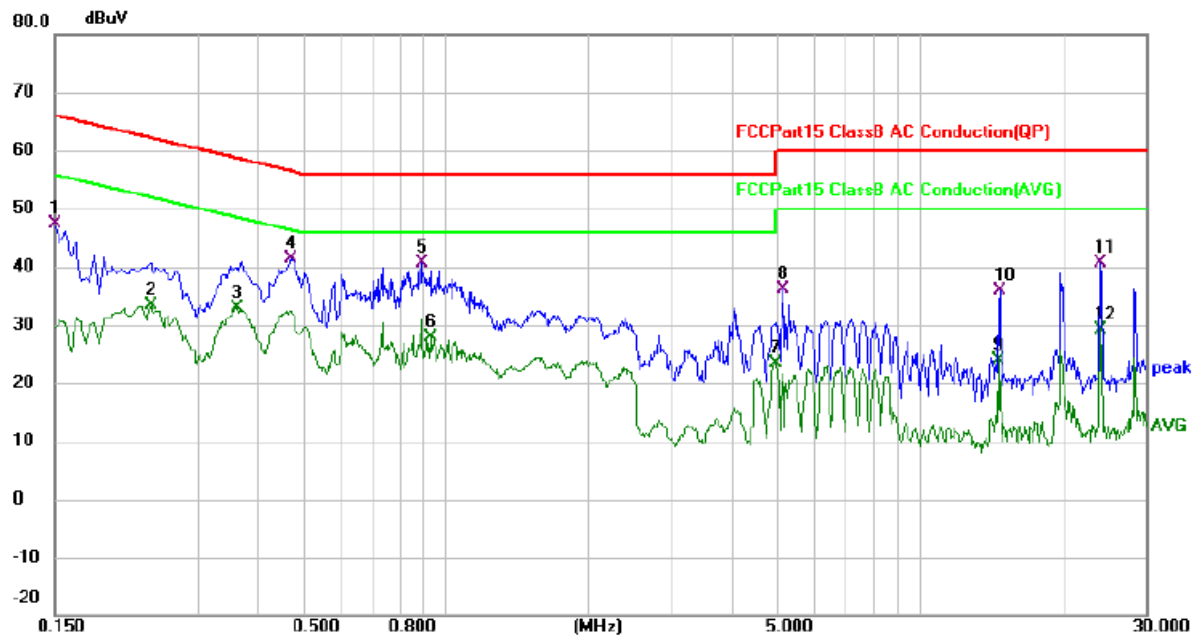

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	37.14	10.29	47.43	66.00	-18.57	QP	
2		0.2379	22.59	10.69	33.28	52.17	-18.89	AVG	
3		0.3618	21.94	10.96	32.90	48.69	-15.79	AVG	
4	*	0.4700	30.19	11.24	41.43	56.51	-15.08	QP	
5		0.8900	28.60	12.13	40.73	56.00	-15.27	QP	
6		0.9300	15.70	12.20	27.90	46.00	-18.10	AVG	
7		4.9537	13.00	10.27	23.27	46.00	-22.73	AVG	
8		5.1619	25.77	10.27	36.04	60.00	-23.96	QP	
9		14.6339	13.51	10.48	23.99	50.00	-26.01	AVG	
10		14.8056	25.35	10.48	35.83	60.00	-24.17	QP	
11		24.0820	29.93	10.77	40.70	60.00	-19.30	QP	
12		24.0820	18.25	10.77	29.02	50.00	-20.98	AVG	

Mode1 / Line: Neutral / Band: 2.4G / BW: 20 / 240V/60Hz

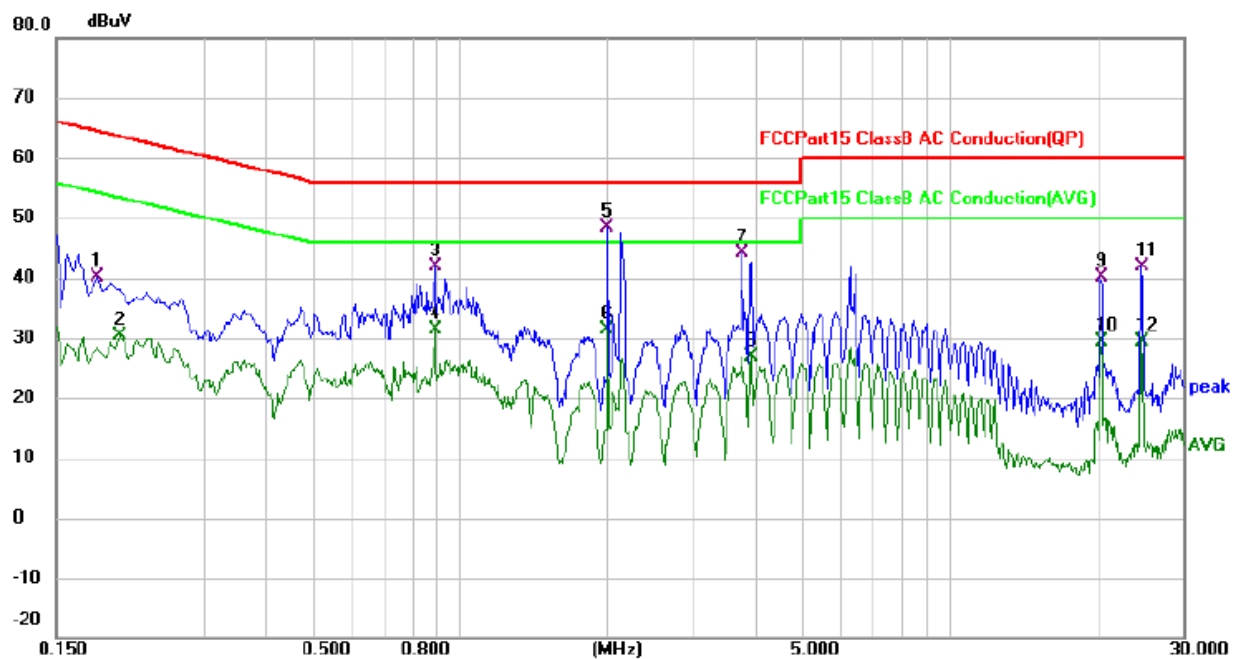

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1819	29.56	10.64	40.20	64.40	-24.20	QP	
2		0.2020	19.70	10.68	30.38	53.53	-23.15	AVG	
3		0.8900	29.70	12.17	41.87	56.00	-14.13	QP	
4		0.8900	19.13	12.17	31.30	46.00	-14.70	AVG	
5	*	2.0059	38.29	10.00	48.29	56.00	-7.71	QP	
6		2.0059	21.44	10.00	31.44	46.00	-14.56	AVG	
7		3.7740	33.81	10.27	44.08	56.00	-11.92	QP	
8		3.9420	16.65	10.27	26.92	46.00	-19.08	AVG	
9		20.3618	29.56	10.66	40.22	60.00	-19.78	QP	
10		20.3618	18.69	10.66	29.35	50.00	-20.65	AVG	
11		24.5658	31.15	10.77	41.92	60.00	-18.08	QP	
12		24.5658	18.60	10.77	29.37	50.00	-20.63	AVG	

6.2 Occupied Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2013, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	a) Set RBW = 100 kHz. b) Set the VBW \geq [3 × RBW]. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


6.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	31.3 °C	Humidity:	51.2 %	Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2, Mode3				
Final test mode:	Mode1, Mode2, Mode3				

6.2.2 Test Data:

Please Refer to Appendix for Details.

6.2.3 Test Setup Diagram:

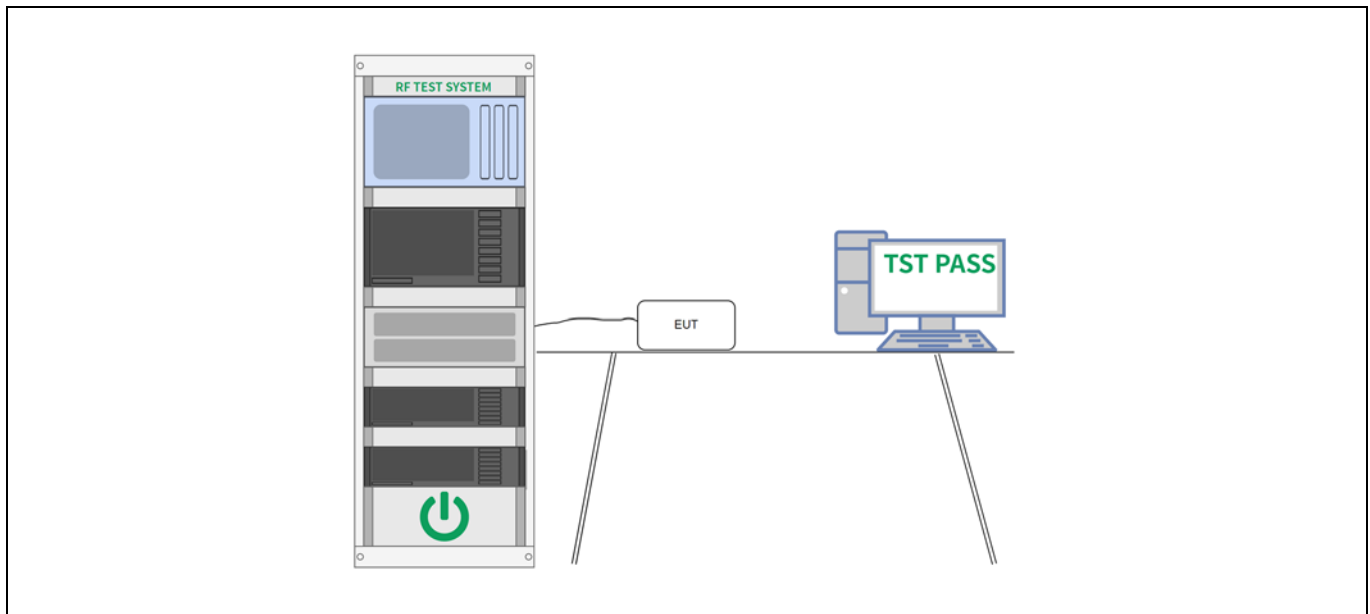

6.3 Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2013, section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013, section 11.9.1 Maximum peak conducted output power


6.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	31.3 °C	Humidity:	51.2 %	Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2, Mode3				
Final test mode:	Mode1, Mode2, Mode3				

6.3.2 Test Data:

Please Refer to Appendix for Details.

6.3.3 Test Setup Diagram:

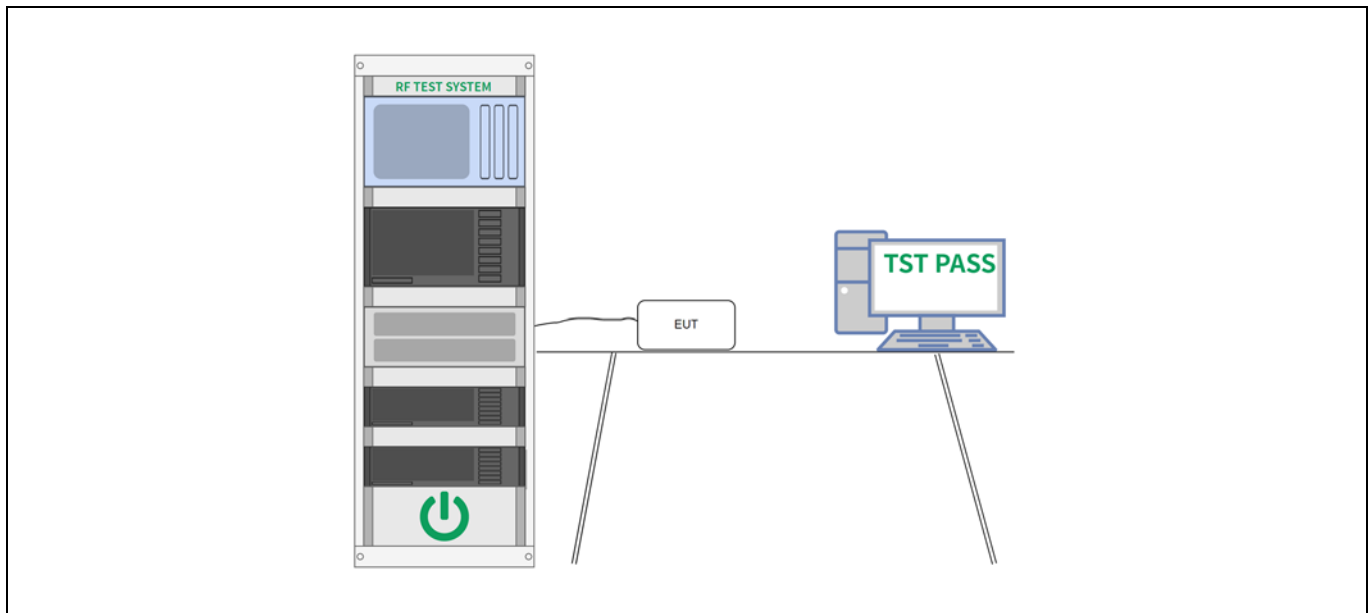

6.4 Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2013, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013, section 11.10, Maximum power spectral density level in the fundamental emission


6.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	31.3 °C	Humidity:	51.2 %	Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2, Mode3				
Final test mode:	Mode1, Mode2, Mode3				

6.4.2 Test Data:

Please Refer to Appendix for Details.

6.4.3 Test Setup Diagram:

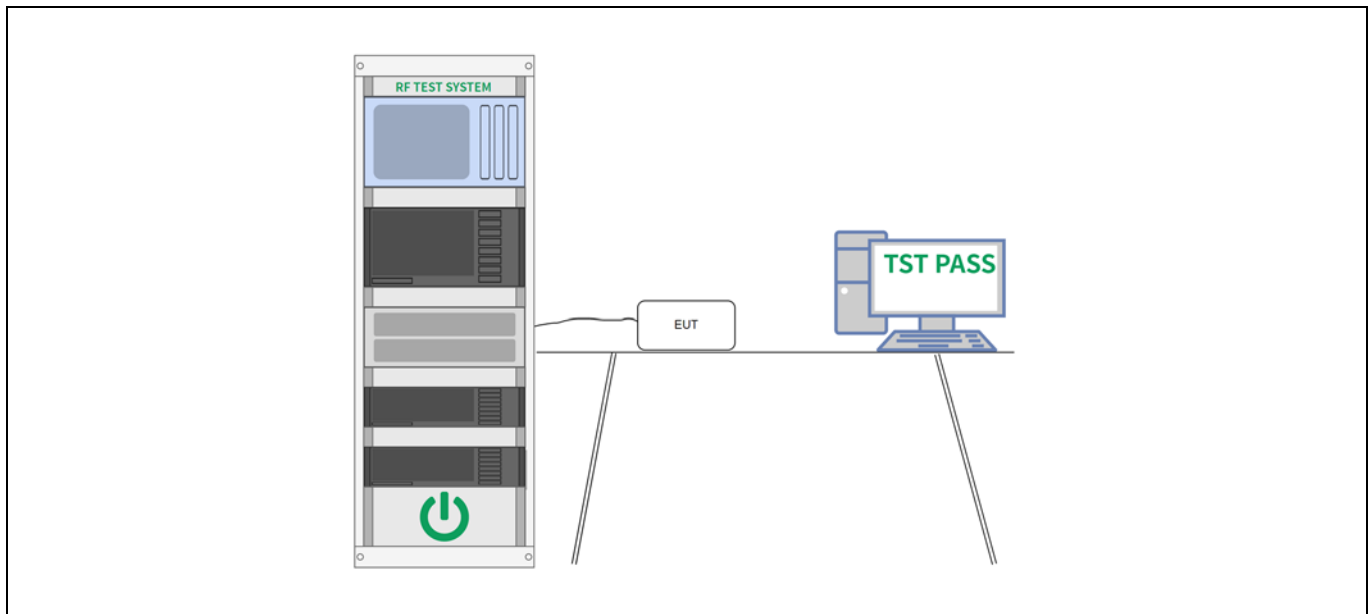

6.5 RF conducted spurious emissions and band edge measurement

Test Requirement:	47 CFR 15.247(d)
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2013 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013 Section 11.11.1, Section 11.11.2, Section 11.11.3


6.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	31.3 °C	Humidity:	51.2 %	Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2, Mode3				
Final test mode:	Mode1, Mode2, Mode3				

6.5.2 Test Data:

Please Refer to Appendix for Details.

6.5.3 Test Setup Diagram:

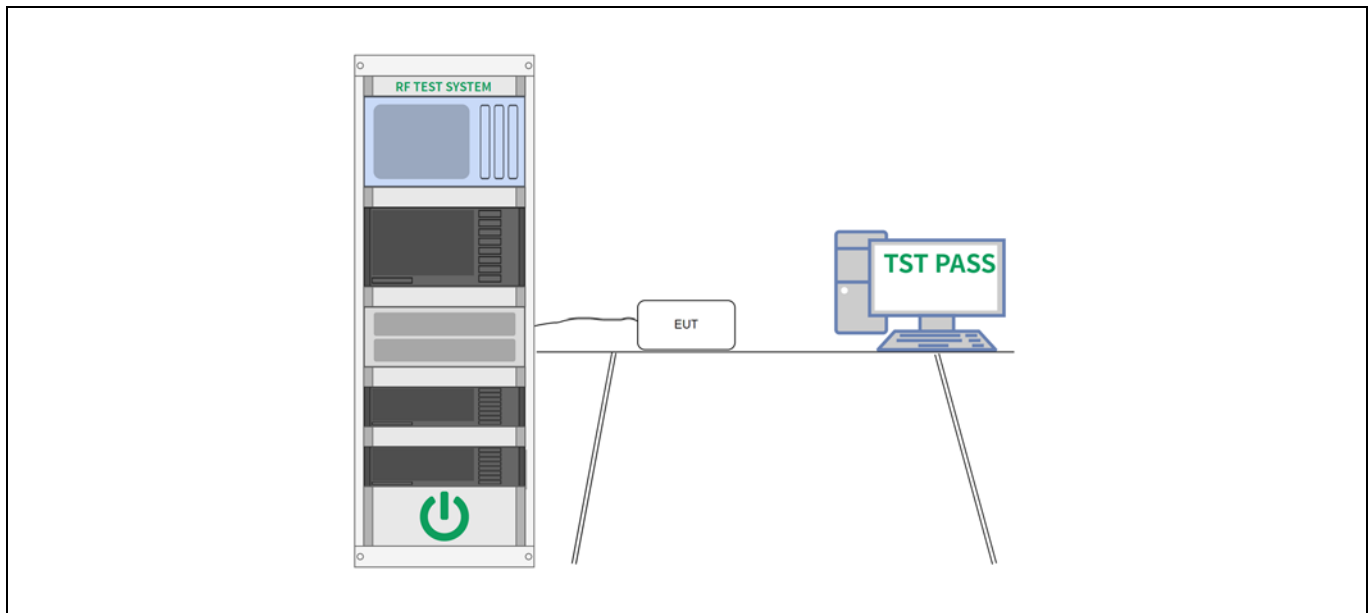


6.6 Band edge emissions (Radiated)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.		
Test Method:	ANSI C63.10-2013 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.10.5.2		
Note: All other emissions are attenuated 20dB below the limit, so does not recorded			

6.6.1 E.U.T. Operation:

Operating Environment:			
Temperature:	25 °C	Humidity:	57 %
		Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2, Mode3		
Final test mode:	Mode1, Mode2, Mode3		

6.6.2 Test Setup Diagram:

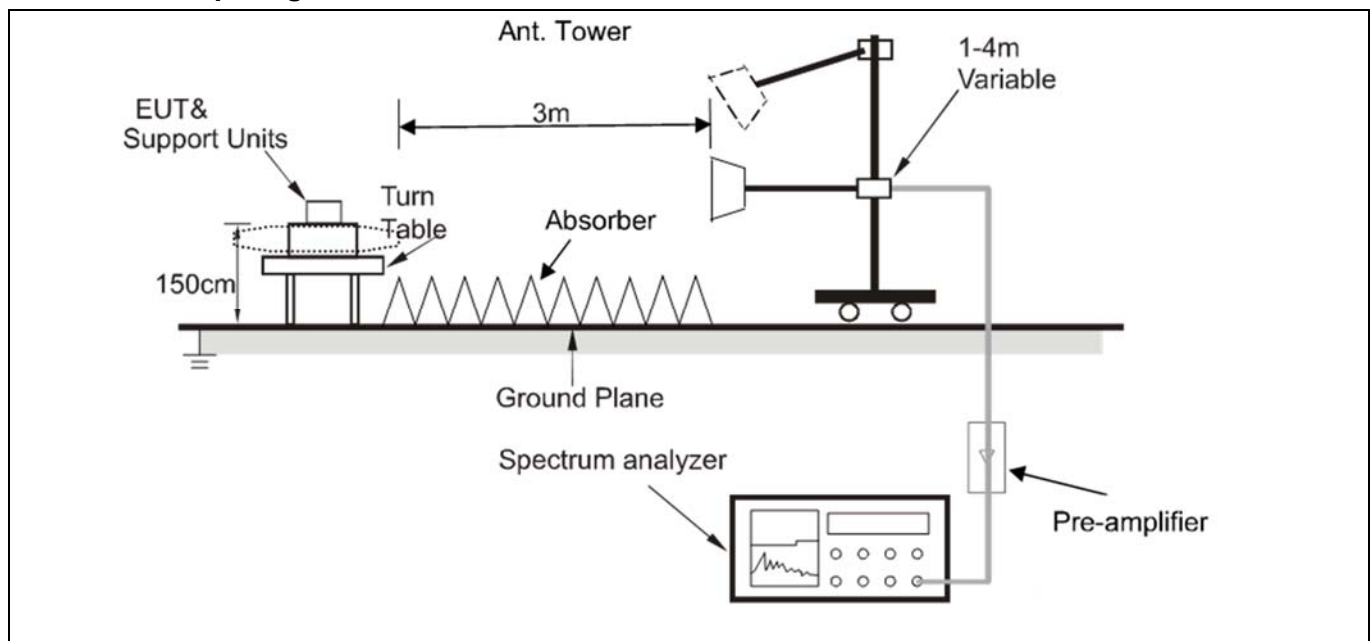

6.6.3 Test Data:

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: 2412

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2310.000	48.57	-8.08	40.49	74.00	-33.51	peak
2		2310.000	39.51	-8.08	31.43	54.00	-22.57	AVG
3		2390.000	54.66	-7.71	46.95	74.00	-27.05	peak
4	*	2390.000	45.44	-7.71	37.73	54.00	-16.27	AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: 2412

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2310.000	44.71	-8.08	36.63	74.00	-37.37	peak
2		2310.000	32.79	-8.08	24.71	54.00	-29.29	AVG
3		2390.000	43.27	-7.71	35.56	74.00	-38.44	peak
4	*	2390.000	34.30	-7.71	26.59	54.00	-27.41	AVG

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: 2462

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2483.500	59.31	-7.24	52.07	74.00	-21.93	peak
2	*	2483.500	51.53	-7.24	44.29	54.00	-9.71	AVG
3		2500.000	55.51	-7.17	48.34	74.00	-25.66	peak
4		2500.000	45.37	-7.17	38.20	54.00	-15.80	AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: 2462

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2483.500	48.05	-7.24	40.81	74.00	-33.19	peak
2	*	2483.500	38.30	-7.24	31.06	54.00	-22.94	AVG
3		2500.000	47.75	-7.17	40.58	74.00	-33.42	peak
4		2500.000	38.21	-7.17	31.04	54.00	-22.96	AVG

Mode2 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2310.000	49.34	-8.08	41.26	74.00	-32.74	peak
2		2310.000	39.59	-8.08	31.51	54.00	-22.49	AVG
3		2390.000	65.24	-7.71	57.53	74.00	-16.47	peak
4	*	2390.000	47.89	-7.71	40.18	54.00	-13.82	AVG

Mode2 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2310.000	42.17	-8.08	34.09	74.00	-39.91	peak
2		2310.000	32.82	-8.08	24.74	54.00	-29.26	AVG
3		2390.000	45.65	-7.71	37.94	74.00	-36.06	peak
4	*	2390.000	35.47	-7.71	27.76	54.00	-26.24	AVG

Mode2 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2483.500	68.01	-7.24	60.77	74.00	-13.23	peak
2	*	2483.500	54.15	-7.24	46.91	54.00	-7.09	AVG
3		2500.000	55.95	-7.17	48.78	74.00	-25.22	peak
4		2500.000	46.09	-7.17	38.92	54.00	-15.08	AVG

Mode2 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2483.500	49.00	-7.24	41.76	74.00	-32.24	peak
2	*	2483.500	38.69	-7.24	31.45	54.00	-22.55	AVG
3		2500.000	47.05	-7.17	39.88	74.00	-34.12	peak
4		2500.000	38.23	-7.17	31.06	54.00	-22.94	AVG

Mode3 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2310.000	48.96	-8.08	40.88	74.00	-33.12	peak
2		2310.000	40.12	-8.08	32.04	54.00	-21.96	AVG
3		2390.000	64.78	-7.71	57.07	74.00	-16.93	peak
4	*	2390.000	50.16	-7.71	42.45	54.00	-11.55	AVG

Mode3 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2310.000	42.05	-8.08	33.97	74.00	-40.03	peak
2		2310.000	32.85	-8.08	24.77	54.00	-29.23	AVG
3		2390.000	48.00	-7.71	40.29	74.00	-33.71	peak
4	*	2390.000	35.98	-7.71	28.27	54.00	-25.73	AVG

Mode3 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2483.500	67.80	-7.24	60.56	74.00	-13.44	peak
2	*	2483.500	55.50	-7.24	48.26	54.00	-5.74	AVG
3		2500.000	55.11	-7.17	47.94	74.00	-26.06	peak
4		2500.000	45.43	-7.17	38.26	54.00	-15.74	AVG

Mode3 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2483.500	49.93	-7.24	42.69	74.00	-31.31	peak
2	*	2483.500	39.39	-7.24	32.15	54.00	-21.85	AVG
3		2500.000	48.77	-7.17	41.60	74.00	-32.40	peak
4		2500.000	37.99	-7.17	30.82	54.00	-23.18	AVG


6.7 Radiated spurious emissions (below 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.		
Test Method:	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.6.4		
Note: All other emissions are attenuated 20dB below the limit, so does not recorded			

6.7.1 E.U.T. Operation:


Operating Environment:			
Temperature:	24 °C	Humidity:	55 %
		Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2, Mode3		
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report		
Note:			
The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.			
All modes of operation of the EUT were investigated, and only the worst-case results are reported. There were no emissions found below 30MHz within 20dB of the limit.			

6.7.2 Test Setup Diagram:

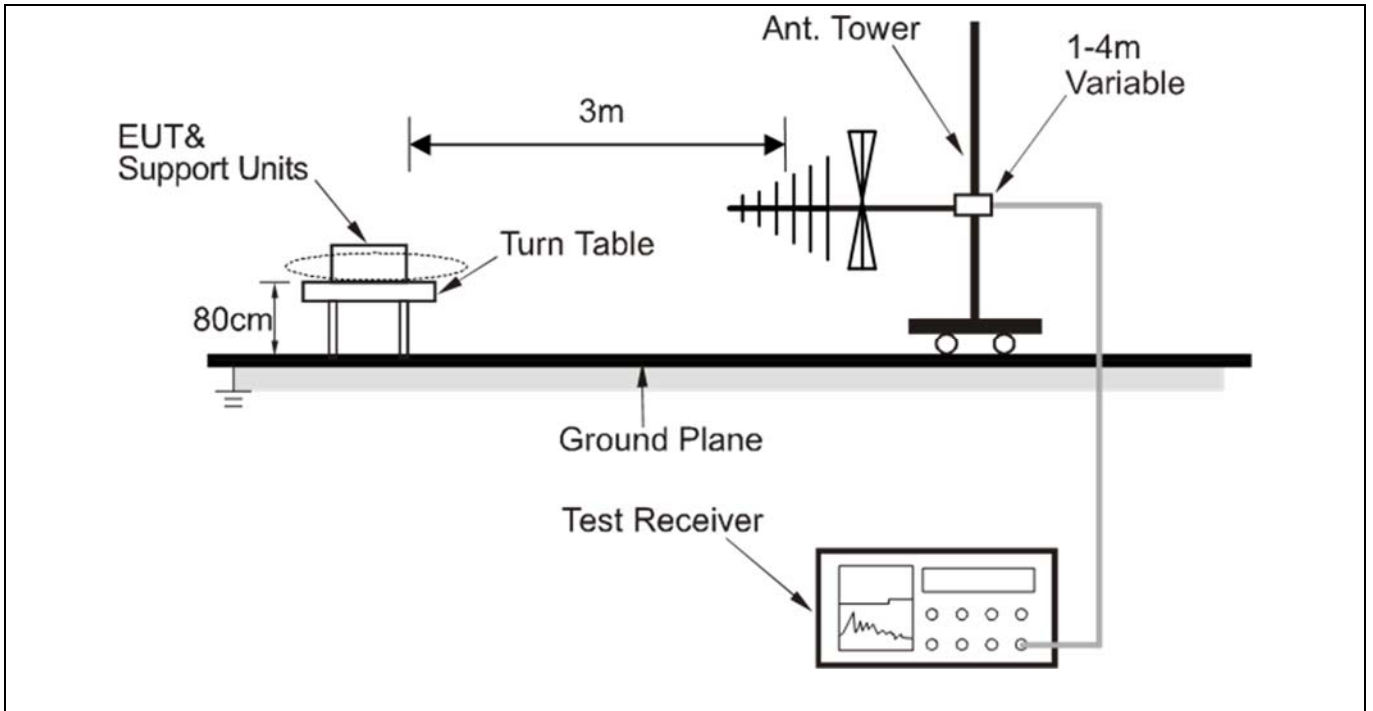


6.7.3 Test Data:

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: 2462

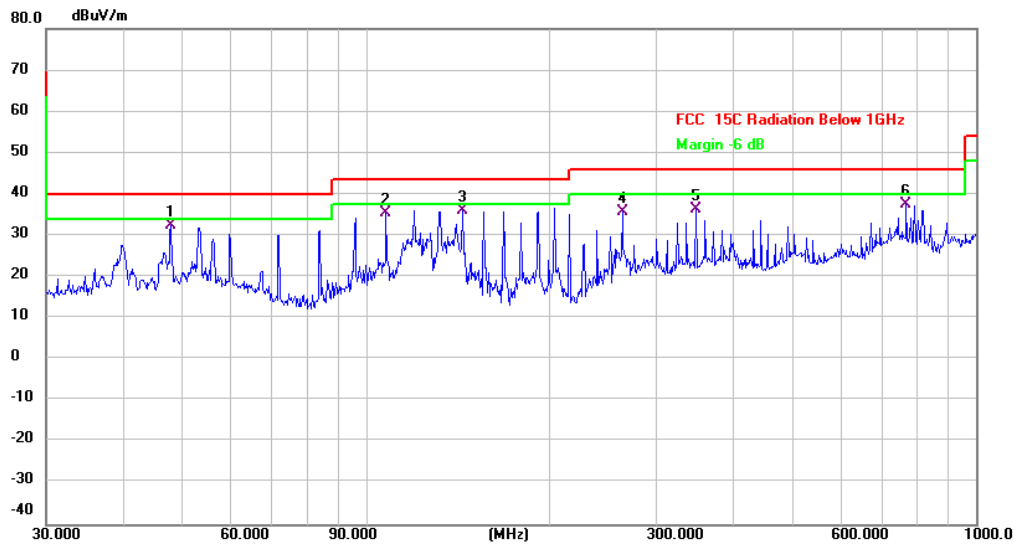

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		47.9940	39.53	-7.05	32.48	40.00	-7.52	QP	
2		107.8877	43.91	-8.42	35.49	43.50	-8.01	QP	
3	*	143.8295	47.38	-11.28	36.10	43.50	-7.40	QP	
4		263.8190	43.53	-7.80	35.73	46.00	-10.27	QP	
5		348.0274	43.31	-6.94	36.37	46.00	-9.63	QP	
6		768.7481	36.92	0.71	37.63	46.00	-8.37	QP	

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: 2462

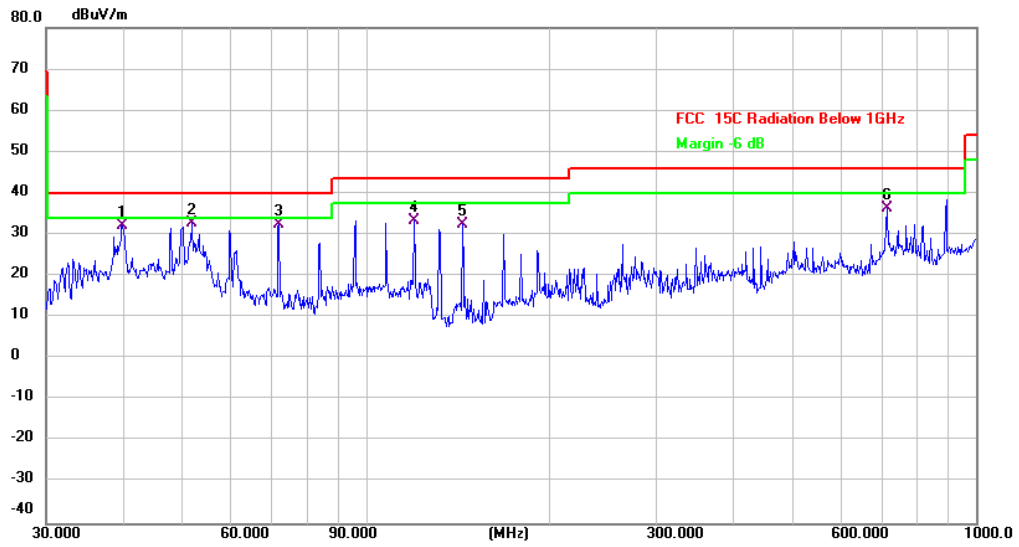


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		39.9942	39.85	-7.64	32.21	40.00	-7.79	QP	
2	*	51.8430	40.30	-7.46	32.84	40.00	-7.16	QP	
3		72.0843	42.45	-10.08	32.37	40.00	-7.63	QP	
4		119.8556	43.67	-10.20	33.47	43.50	-10.03	QP	
5		143.8295	43.81	-11.28	32.53	43.50	-10.97	QP	
6		714.1734	36.05	0.44	36.49	46.00	-9.51	QP	

6.8 Radiated spurious emissions (above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.		
Test Method:	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.6.4		
Note: All other emissions are attenuated 20dB below the limit, so does not recorded			

6.8.1 E.U.T. Operation:

Operating Environment:			
Temperature:	24 °C	Humidity:	56 %
		Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2, Mode3		
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report		

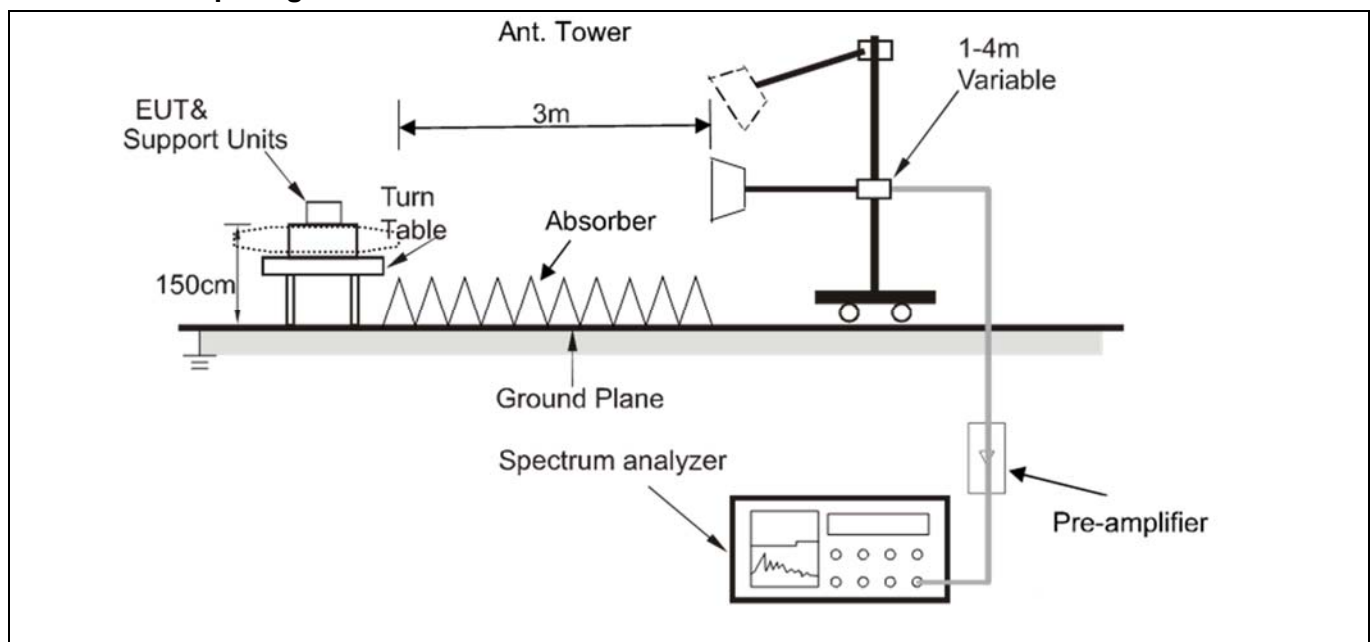6.8.2 Test Setup Diagram:


6.8.3 Test Data:

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: 2412

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4824.000	50.61	0.82	51.43	74.00	-22.57	peak
2	*	4824.000	48.93	0.82	49.75	54.00	-4.25	AVG
3		7236.000	39.13	6.00	45.13	74.00	-28.87	peak
4		7236.000	33.10	6.00	39.10	54.00	-14.90	AVG
5		9648.000	40.71	6.17	46.88	74.00	-27.12	peak
6		9648.000	34.28	6.17	40.45	54.00	-13.55	AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: 2412

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4824.000	41.61	0.82	42.43	74.00	-31.57	peak
2		4824.000	35.41	0.82	36.23	54.00	-17.77	AVG
3		7236.000	39.59	6.00	45.59	74.00	-28.41	peak
4		7236.000	33.33	6.00	39.33	54.00	-14.67	AVG
5		9648.000	41.11	6.17	47.28	74.00	-26.72	peak
6	*	9648.000	35.05	6.17	41.22	54.00	-12.78	AVG

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: 2437

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4874.000	51.62	1.01	52.63	74.00	-21.37	peak
2	*	4874.000	49.85	1.01	50.86	54.00	-3.14	AVG
3		7311.000	40.16	5.94	46.10	74.00	-27.90	peak
4		7311.000	34.11	5.94	40.05	54.00	-13.95	AVG
5		9748.000	40.86	6.54	47.40	74.00	-26.60	peak
6		9748.000	34.68	6.54	41.22	54.00	-12.78	AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: 2437

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4874.000	42.15	1.01	43.16	74.00	-30.84	peak
2		4874.000	36.09	1.01	37.10	54.00	-16.90	AVG
3		7311.000	40.65	5.94	46.59	74.00	-27.41	peak
4		7311.000	34.29	5.94	40.23	54.00	-13.77	AVG
5		9748.000	41.44	6.54	47.98	74.00	-26.02	peak
6	*	9748.000	34.85	6.54	41.39	54.00	-12.61	AVG

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: 2462

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4924.000	51.33	1.27	52.60	74.00	-21.40	peak
2	*	4924.000	49.42	1.27	50.69	54.00	-3.31	AVG
3		7386.000	39.94	5.86	45.80	74.00	-28.20	peak
4		7386.000	33.36	5.86	39.22	54.00	-14.78	AVG
5		9848.000	40.35	6.31	46.66	74.00	-27.34	peak
6		9848.000	33.90	6.31	40.21	54.00	-13.79	AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: 2462


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4924.000	43.17	1.27	44.44	74.00	-29.56	peak
2		4924.000	37.02	1.27	38.29	54.00	-15.71	AVG
3		7386.000	40.53	5.86	46.39	74.00	-27.61	peak
4		7386.000	34.36	5.86	40.22	54.00	-13.78	AVG
5		9848.000	41.47	6.31	47.78	74.00	-26.22	peak
6	*	9848.000	35.02	6.31	41.33	54.00	-12.67	AVG

Photographs of the test setup


Conducted Emission at AC power line



Radiated emissions (below 1GHz)

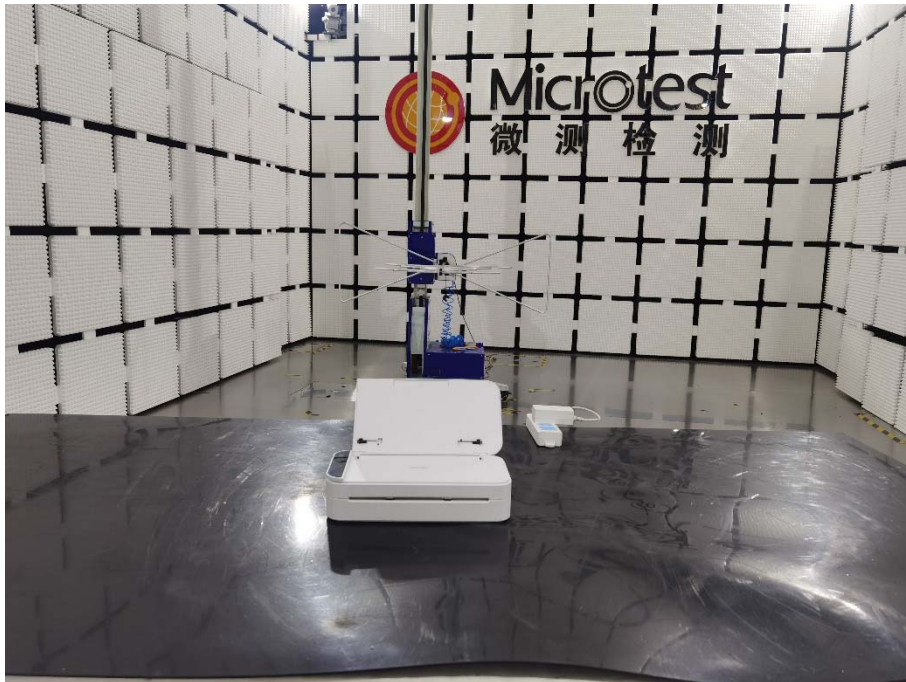

Radiated emissions (above 1GHz)

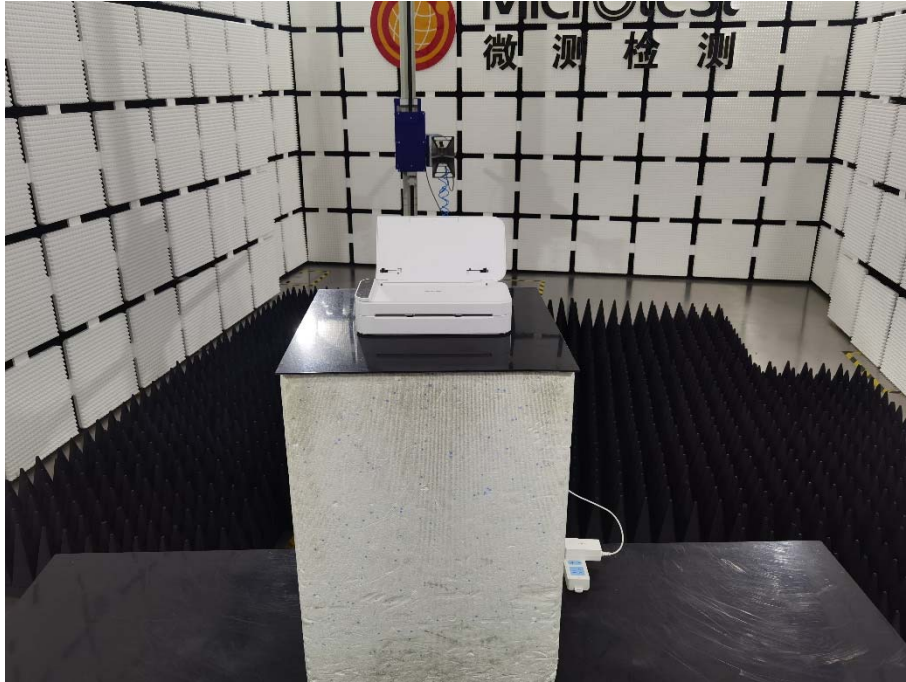

Photographs of the EUT

Refer to Appendix - Test EUT Photos