

Test Report

Report No.: MTi230614001-01E1

Date of issue: 2023-07-10

Applicant: Zhuhai Quin Technology Co., Ltd.

Product: Label Printer

Model(s): T200-BT

Series Model: Please refer to the Series model remark

FCC ID: 2ASRB-T200-BT

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

The test report is only used for customer scientific research, teaching, internal quality control and other purposes, and is for internal reference only.



Series model Remark:

T210-BT,T220-BT,T230-BT,T240-BT,T260-BT,T270-BT,T280-BT,T290-BT,T300-BT,T310-BT,T330-BT,T340-BT,T350-BT,T360-BT,T410-BT,T420-BT,T430-BT,T450-BT,T460-BT,T470-BT,T480-BT,T510-BT,T610-BT,T710-BT,T800-BT,T810-BT,TC240-BT,TC340-BT,TC350-BT,TC360-BT,TC370-BT,TC380-BT,CT200-BT,CT210-BT,CT310-BT,CT410-BT,CT510-BT,CT610-BT,CT620-BT,CT630-BT,CT640-BT,CT650-BT,CT660-BT,T200Pro-BT,T210Pro-BT,T220Pro-BT,T230Pro-BT,T240Pro-BT,T260Pro-BT,T270Pro-BT,T280Pro-BT,T290Pro-BT,T300Pro-BT,T310Pro-BT,T330Pro-BT,T340Pro-BT,T350Pro-BT,T360Pro-BT,T410Pro-BT,T420Pro-BT,T430Pro-BT,T450Pro-BT,T460Pro-BT,T470Pro-BT,T480Pro-BT,T510Pro-BT,T610Pro-BT,T710Pro-BT,T800Pro-BT,T810Pro-BT,TC240Pro-BT,TC340Pro-BT,TC350Pro-BT,TC360Pro-BT,TC370Pro-BT,TC380Pro-BT,CT200Pro-BT,CT210Pro-BT,CT310Pro-BT,CT410Pro-BT,CT510Pro-BT,CT610Pro-BT,CT620Pro-BT,CT630Pro-BT,CT640Pro-BT,CT650Pro-BT,CT660Pro-BT,T900-BT,T1000-BT,T350S-BT

Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Table of contents

1	General Description	6
1.1	Description of the EUT	6
1.2	Description of test modes	6
1.3	Environmental Conditions	8
1.4	Description of support units	8
1.5	Measurement uncertainty	8
2	Summary of Test Result	9
3	Test Facilities and accreditations	10
3.1	Test laboratory	10
4	List of test equipment.....	11
5	Evaluation Results (Evaluation)	14
5.1	Antenna requirement	14
6	Radio Spectrum Matter Test Results (RF)	14
6.1	Conducted Emission at AC power line	14
6.2	Occupied Bandwidth	21
6.3	Maximum Conducted Output Power.....	23
6.4	Channel Separation	25
6.5	Number of Hopping Frequencies.....	27
6.6	Dwell Time	29
6.7	Emissions in non-restricted frequency bands.....	31
6.8	Band edge emissions (Radiated).....	33
6.9	Emissions in restricted frequency bands (below 1GHz).....	36
6.10	Emissions in restricted frequency bands (above 1GHz)	40
	Photographs of the test setup.....	44
	Photographs of the EUT	45
	Appendix A: 20dB Emission Bandwidth	46
	Appendix B: Maximum conducted output power	50
	Appendix C: Carrier frequency separation	54
	Appendix D: Time of occupancy	56
	Appendix E: Number of hopping channels.....	63
	Appendix F: Band edge measurements	65
	Appendix G: Conducted Spurious Emission.....	69

Test Result Certification	
Applicant:	Zhuhai Quin Technology Co., Ltd.
Address:	ROOM 103-029(CENTRALIZED OFFICE AREA) , 1F, BUILDING 1, NO. 18 FUTIAN ROAD, XIANGZHOU DISTRICT, ZHUHAI CITY, CHINA
Manufacturer:	Zhuhai Quin Technology Co., Ltd.
Address:	ROOM 103-029(CENTRALIZED OFFICE AREA) , 1F, BUILDING 1, NO. 18 FUTIAN ROAD, XIANGZHOU DISTRICT, ZHUHAI CITY, CHINA
Product description	
Product name:	Label Printer
Trade mark:	N/A
Model name:	T200-BT
Series Model:	Please refer to the Series model remark
Standards:	FCC 47 CFR Part 15 Subpart C
Test method:	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02
Date of Test	
Date of test:	2023-06-30 to 2023-07-06
Test result:	Pass

Test Engineer	:	<i>Letter Lan</i>
		(Letter Lan)
Reviewed By	:	<i>Leon Chen</i>
		(Leon Chen)
Approved By	:	<i>Tom Xue</i>
		(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	Label Printer
Model name:	T200-BT
Series Model:	Please refer to the Series model remark
Model difference:	All the models are the same circuit and module, except the model name
Electrical rating:	Input: 24V/ 2.5A model: ADP-60E24 Manufacturer: Hengyang Dimension Electronic Input: 100-240V~50/60Hz 1.5A MAX Output: +24V= 2.5A
Accessories:	Cable: USB-A to USB-B cable (1.5m)
Hardware version:	Q146_A
Software version:	1.1.7
Test sample(s) number:	MTi230614001-01S1001
RF specification	
Bluetooth version:	V5.0
Operating frequency range:	2402-2480
Channel number:	79
Modulation type:	GFSK, $\pi/4$ -DQPSK,8DPSK
Antenna(s) type:	PCB antenna
Antenna(s) gain:	2 dBi

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode1	TX-GFSK (CH00, CH39, CH78)
Mode2	TX- $\pi/4$ -DQPSK (CH00, CH39, CH78)
Mode3	TX-8DPSK(CH00, CH39, CH78)

1.2.1 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	-	-

Note: The test software has been used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting and constant receiving mode.

Mode	Test Software	BR BlueletSuite		
	Channel	2402MHz	2441MHz	2480MHz
GFSK	Power setting	7	7	7
$\pi/4$ -DQPSK		7	7	7
8DPSK		7	7	7

1.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

1.4 Description of support units

The EUT was tested as an independent device.

1.5 Measurement uncertainty

Measurement	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	3.1dB
Occupied channel bandwidth	±3 %
RF output power, conducted	±1 dB
Time	±1 %
Unwanted Emissions, conducted	±1 dB
Radiated spurious emissions (1GHz~26GHz)	5.3dB
Radiated spurious emissions (9kHz~30MHz)	4.3dB
Radiated spurious emissions (30MHz~1GHz)	4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2 Summary of Test Result

No.	FCC reference	Description of test	Result
1	§ 15.203	Antenna requirement	Pass
2	§ 15.207	AC power line conducted emissions	Pass
3	§ 15.247(d), 15.209, 15.205	Radiated spurious emissions	Pass
4	§ 15.247(a)(1)	20dB emission bandwidth	Pass
5	§ 15.247(b)(1)	Maximum conducted output power	Pass
6	§ 15.247(a)(1)	Carrier Frequencies Separation	Pass
7	§ 15.247(a)(1)	Time of occupancy	Pass
8	§ 15.247(a)(1)	Number of hopping channels	Pass
9	§ 15.247(d)	Band edge (Conducted)	Pass
10	§ 15.247(d)	Conducted spurious emissions	Pass

3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Conducted Emission at AC power line						
1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2023-04-26	2024-04-25
2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2023-05-05	2024-05-04
3	Artificial Mains Network	Schwarzbeck	NSLK 8127	1001	2023-05-06	2024-05-05
Occupied Bandwidth						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Maximum Conducted Output Power						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Channel Separation						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Number of Hopping Frequencies						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Dwell Time						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Emissions in non-restricted frequency bands						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Band edge emissions (Radiated)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2023-05-26	2024-05-25
3	Amplifier	Agilent	8449B	3008A01120	2023-05-26	2024-05-25
4	Multi-device Controller	TuoPu	TPMDC	/	/	/
5	MXA signal analyzer	Agilent	N9020A	MY54440859	2023-05-05	2024-05-04
Emissions in restricted frequency bands (below 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	TRILOG Broadband Antenna	schwarabeck	VULB 9163	9163-1338	2023-06-11	2025-06-10
3	Amplifier	Hewlett-Packard	8447F	3113A06184	2023-04-26	2024-04-25
4	Multi-device Controller	TuoPu	TPMDC	/	/	/
Emissions in restricted frequency bands (above 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2023-05-26	2024-05-25
3	Amplifier	Agilent	8449B	3008A01120	2023-05-26	2024-05-25
4	Multi-device Controller	TuoPu	TPMDC	/	/	/
5	MXA signal analyzer	Agilent	N9020A	MY54440859	2023-05-05	2024-05-04

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Description of the antenna of EUT:	The antenna of the EUT is permanently attached.
Conclusion:	The EUT complies with the requirement of FCC PART 15.203.

6 Radio Spectrum Matter Test Results (RF)

6.1 Conducted Emission at AC power line


Test Requirement:	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Limit:	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Method:	Occupied bandwidth—relative measurement procedure
Procedure:	<p>a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.</p> <p>b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.</p> <p>c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.</p> <p>d) Steps a) through c) might require iteration to adjust within the specified tolerances.</p> <p>e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.</p> <p>f) Set detection mode to peak and trace mode to max hold.</p> <p>g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).</p> <p>h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - xx]$. Alternatively, this calculation may be made by using the marker-delta function</p>

	of the instrument. i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j). j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth. k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		
Test Method:	Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		

6.1.1 E.U.T. Operation:


Operating Environment:					
Temperature:	23.5 °C	Humidity:	65 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3				
Final test mode:	Mode1				

6.1.2 Test Setup Diagram:

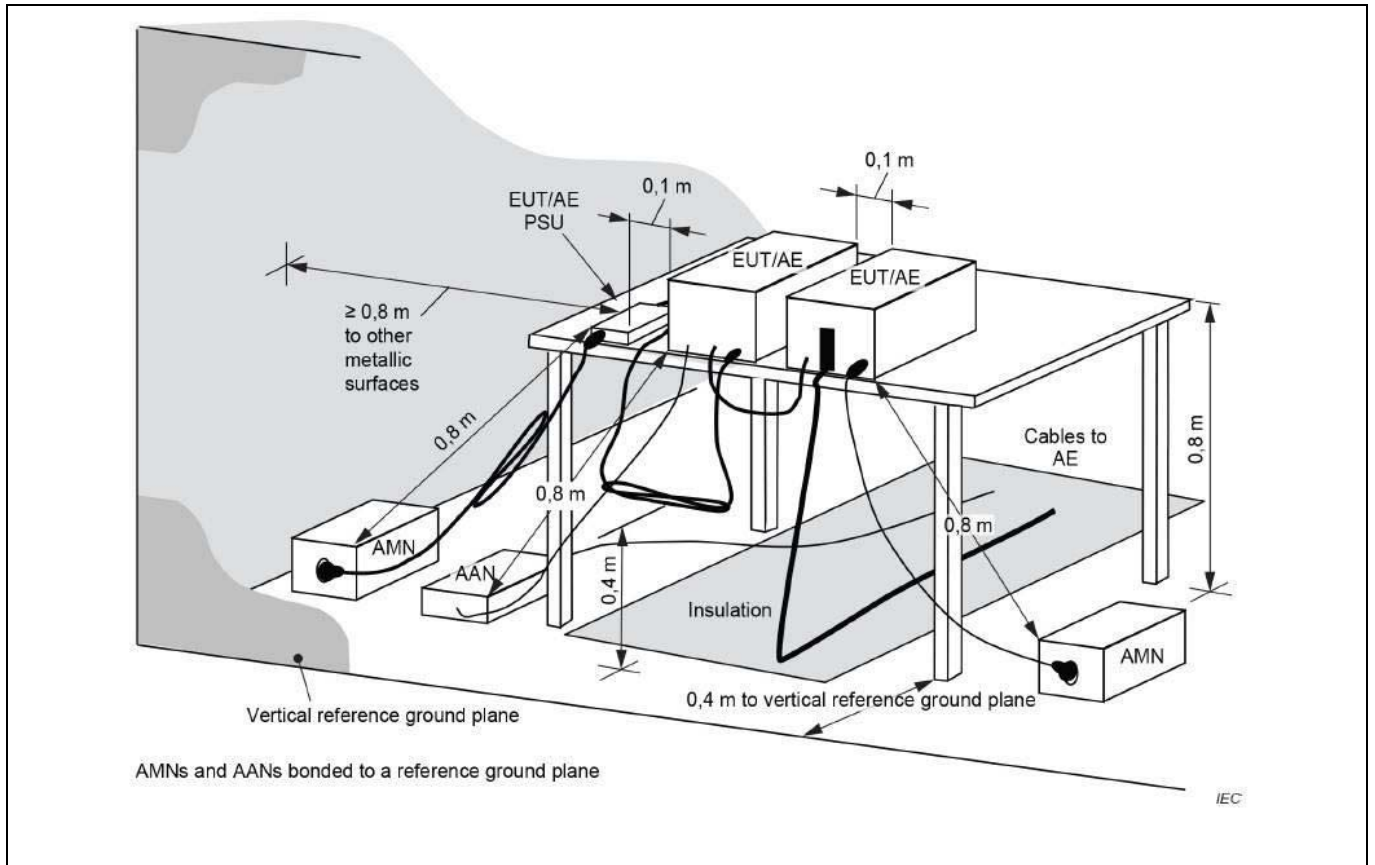


6.1.3 Test Data:

Mode1 / Line: Line / Band: 2.4G / BW: 1 / CH: 2402/ 120V/60Hz

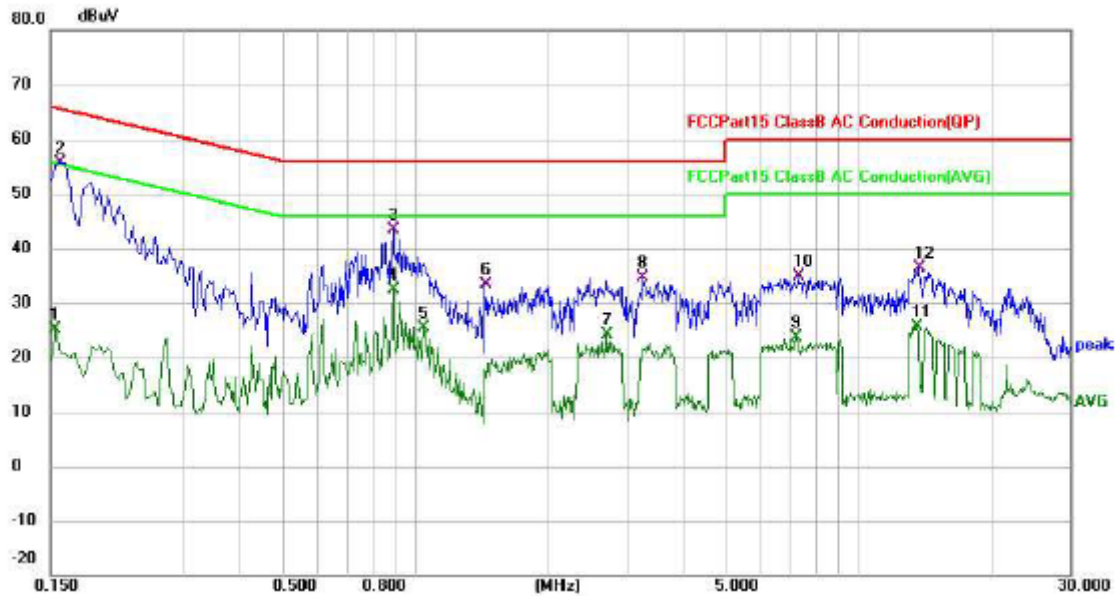


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1539	14.73	10.28	25.01	55.79	-30.78	AVG	
2	*	0.1580	45.35	10.28	55.63	65.57	-9.94	QP	
3		0.8940	31.18	12.13	43.31	56.00	-12.69	QP	
4		0.8940	20.28	12.13	32.41	46.00	-13.59	AVG	
5		1.0460	12.85	12.44	25.29	46.00	-20.71	AVG	
6		1.4380	20.22	13.27	33.49	56.00	-22.51	QP	
7		2.6940	13.67	10.35	24.02	46.00	-21.98	AVG	
8		3.2580	24.38	10.29	34.67	56.00	-21.33	QP	
9		7.2500	13.32	10.28	23.60	50.00	-26.40	AVG	
10		7.3140	24.49	10.29	34.78	60.00	-25.22	QP	
11		13.5380	15.27	10.44	25.71	50.00	-24.29	AVG	
12		13.6460	25.84	10.44	36.28	60.00	-23.72	QP	

Mode1 / Line: Neutral / Band: 2.4G / BW: 1 / CH: 2402/ 120V/60Hz

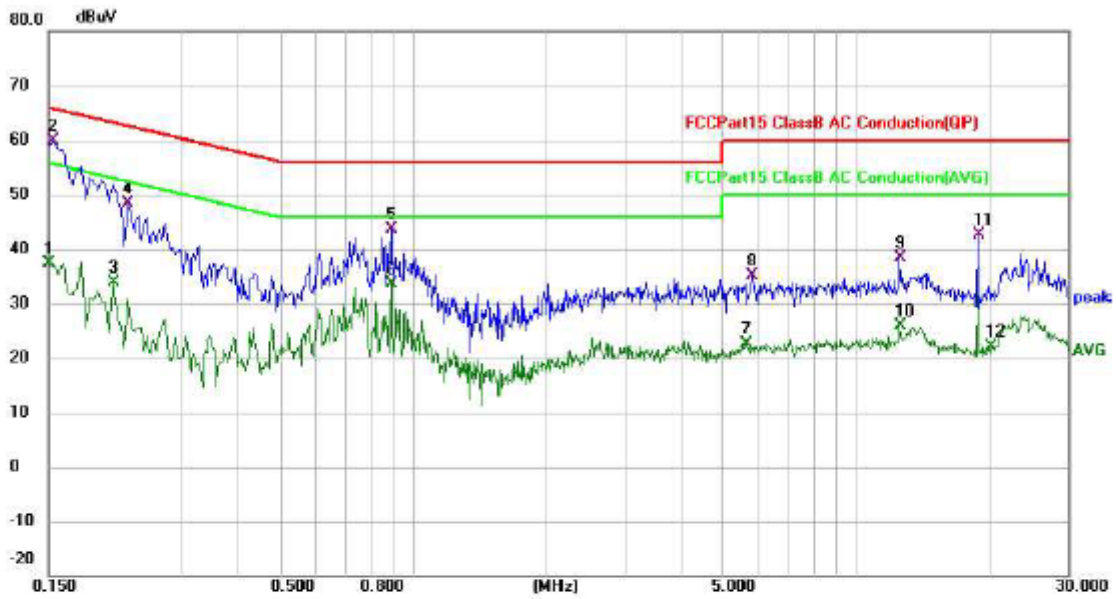


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	27.22	10.28	37.50	56.00	-18.50	AVG	
2	*	0.1539	49.49	10.28	59.77	65.79	-6.02	QP	
3		0.2100	23.13	10.70	33.83	53.21	-19.38	AVG	
4		0.2260	37.69	10.73	48.42	62.60	-14.18	QP	
5		0.8940	31.50	12.17	43.67	56.00	-12.33	QP	
6		0.8940	21.49	12.17	33.66	46.00	-12.34	AVG	
7		5.5939	12.39	10.27	22.66	50.00	-27.34	AVG	
8		5.8300	24.76	10.27	35.03	60.00	-24.97	QP	
9		12.5020	27.80	10.46	38.26	60.00	-21.74	QP	
10		12.5020	15.42	10.46	25.88	50.00	-24.12	AVG	
11		18.7540	31.93	10.61	42.54	60.00	-17.46	QP	
12		20.1299	11.54	10.65	22.19	50.00	-27.81	AVG	

Mode1 / Line: Line / Band: 2.4G / BW: 1 / CH: 2402/ 240V/60Hz

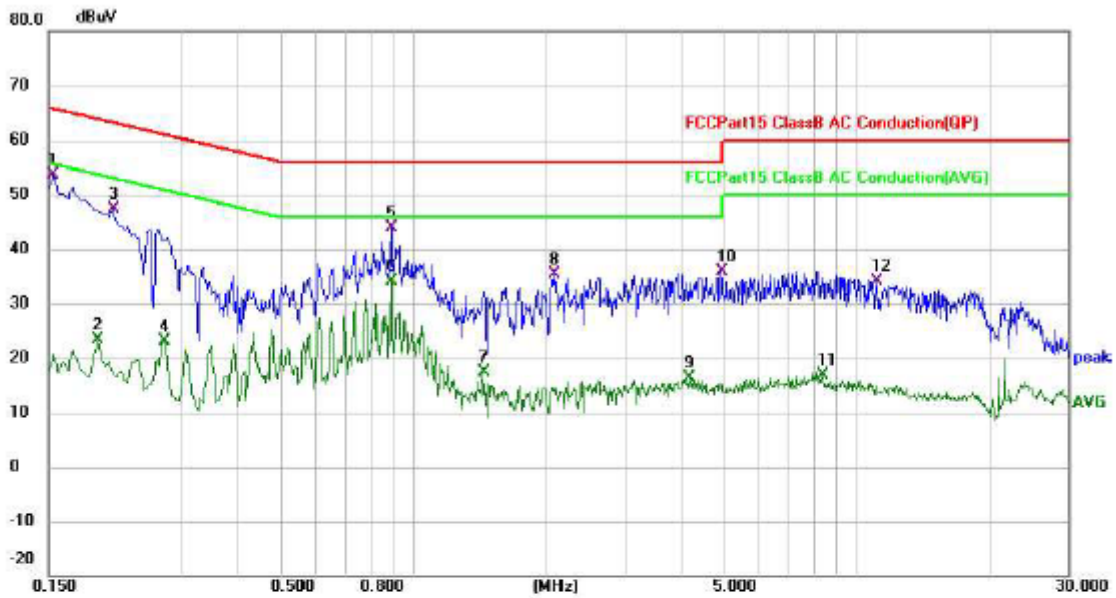

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1539	43.27	10.28	53.55	65.79	-12.24	QP	
2		0.1940	12.70	10.59	23.29	53.86	-30.57	AVG	
3		0.2100	36.72	10.62	47.34	63.21	-15.87	QP	
4		0.2740	12.48	10.76	23.24	51.00	-27.76	AVG	
5		0.8900	31.73	12.13	43.86	56.00	-12.14	QP	
6	*	0.8900	21.92	12.13	34.05	46.00	-11.95	AVG	
7		1.4340	4.20	13.25	17.45	46.00	-28.55	AVG	
8		2.0780	24.80	10.46	35.26	56.00	-20.74	QP	
9		4.1979	6.07	10.28	16.35	46.00	-29.65	AVG	
10		4.9420	25.57	10.27	35.84	56.00	-20.16	QP	
11		8.3340	6.59	10.29	16.88	50.00	-33.12	AVG	
12		11.0340	23.71	10.35	34.06	60.00	-25.94	QP	

Mode1 / Line: Neutral / Band: 2.4G / BW: 1 / CH: 2402/ 240V/60Hz

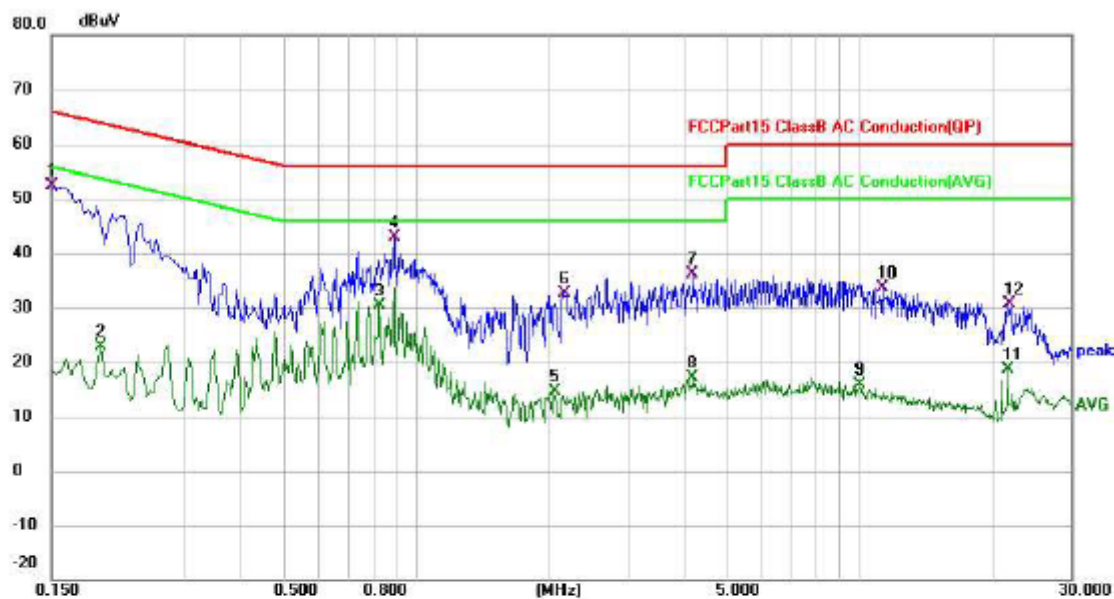

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	42.01	10.28	52.29	66.00	-13.71	QP	
2		0.1940	12.34	10.66	23.00	53.86	-30.86	AVG	
3		0.8260	18.21	12.05	30.26	46.00	-15.74	AVG	
4	*	0.8940	30.82	12.17	42.99	56.00	-13.01	QP	
5		2.0460	4.52	10.01	14.53	46.00	-31.47	AVG	
6		2.1540	22.65	10.04	32.69	56.00	-23.31	QP	
7		4.2100	25.80	10.26	36.06	56.00	-19.94	QP	
8		4.2100	6.81	10.26	17.07	46.00	-28.93	AVG	
9		10.0700	5.51	10.41	15.92	50.00	-34.08	AVG	
10		11.2900	23.32	10.43	33.75	60.00	-26.25	QP	
11		21.5540	7.83	10.69	18.52	50.00	-31.48	AVG	
12		21.6620	20.00	10.69	30.69	60.00	-29.31	QP	

6.2 Occupied Bandwidth


Test Requirement:	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Limit:	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Method:	Occupied bandwidth—relative measurement procedure
Procedure:	<p>a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.</p> <p>b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.</p> <p>c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.</p> <p>d) Steps a) through c) might require iteration to adjust within the specified tolerances.</p> <p>e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.</p> <p>f) Set detection mode to peak and trace mode to max hold.</p> <p>g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).</p> <p>h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - xx]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.</p> <p>i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).</p> <p>j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker</p>

	amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth. k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).
--	---

6.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	60 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3				
Final test mode:	Mode1, Mode2, Mode3				

6.2.2 Test Setup Diagram:

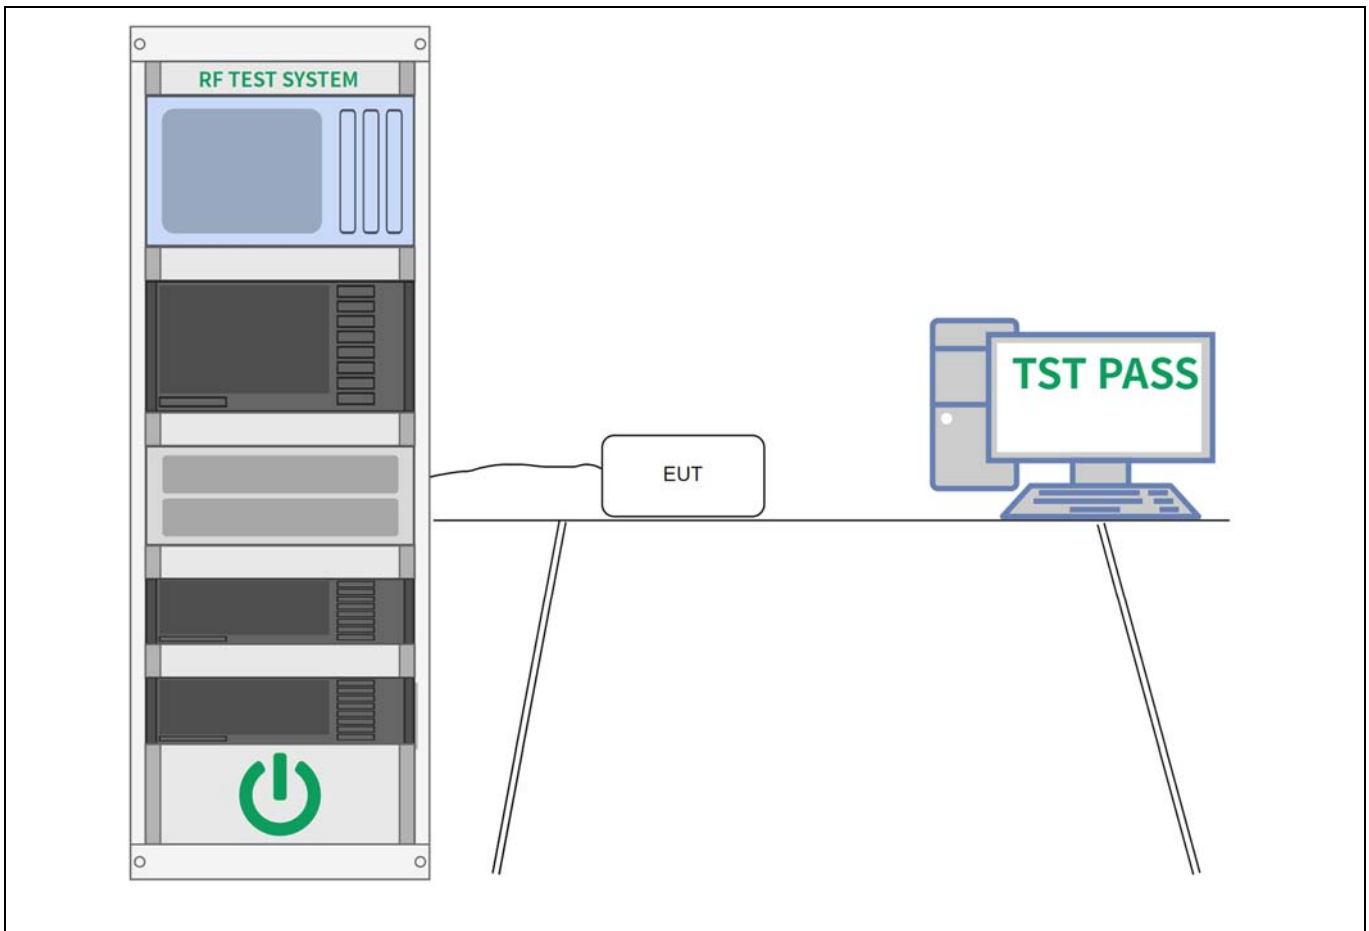

6.2.3 Test Data:

Please Refer to Appendix for Details.


6.3 Maximum Conducted Output Power

Test Requirement:	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Test Limit:	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Test Method:	Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices
Procedure:	<p>This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:</p> <p>a) Use the following spectrum analyzer settings:</p> <ol style="list-style-type: none"> 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel. 2) RBW > 20 dB bandwidth of the emission being measured. 3) VBW >= RBW. 4) Sweep: Auto. 5) Detector function: Peak. 6) Trace: Max hold. <p>b) Allow trace to stabilize.</p> <p>c) Use the marker-to-peak function to set the marker to the peak of the emission.</p> <p>d) The indicated level is the peak output power, after any corrections for external attenuators and cables.</p> <p>e) A plot of the test results and setup description shall be included in the test report.</p> <p>NOTE—A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.</p>

6.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	60 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3				
Final test mode:	Mode1, Mode2, Mode3				

6.3.2 Test Setup Diagram:

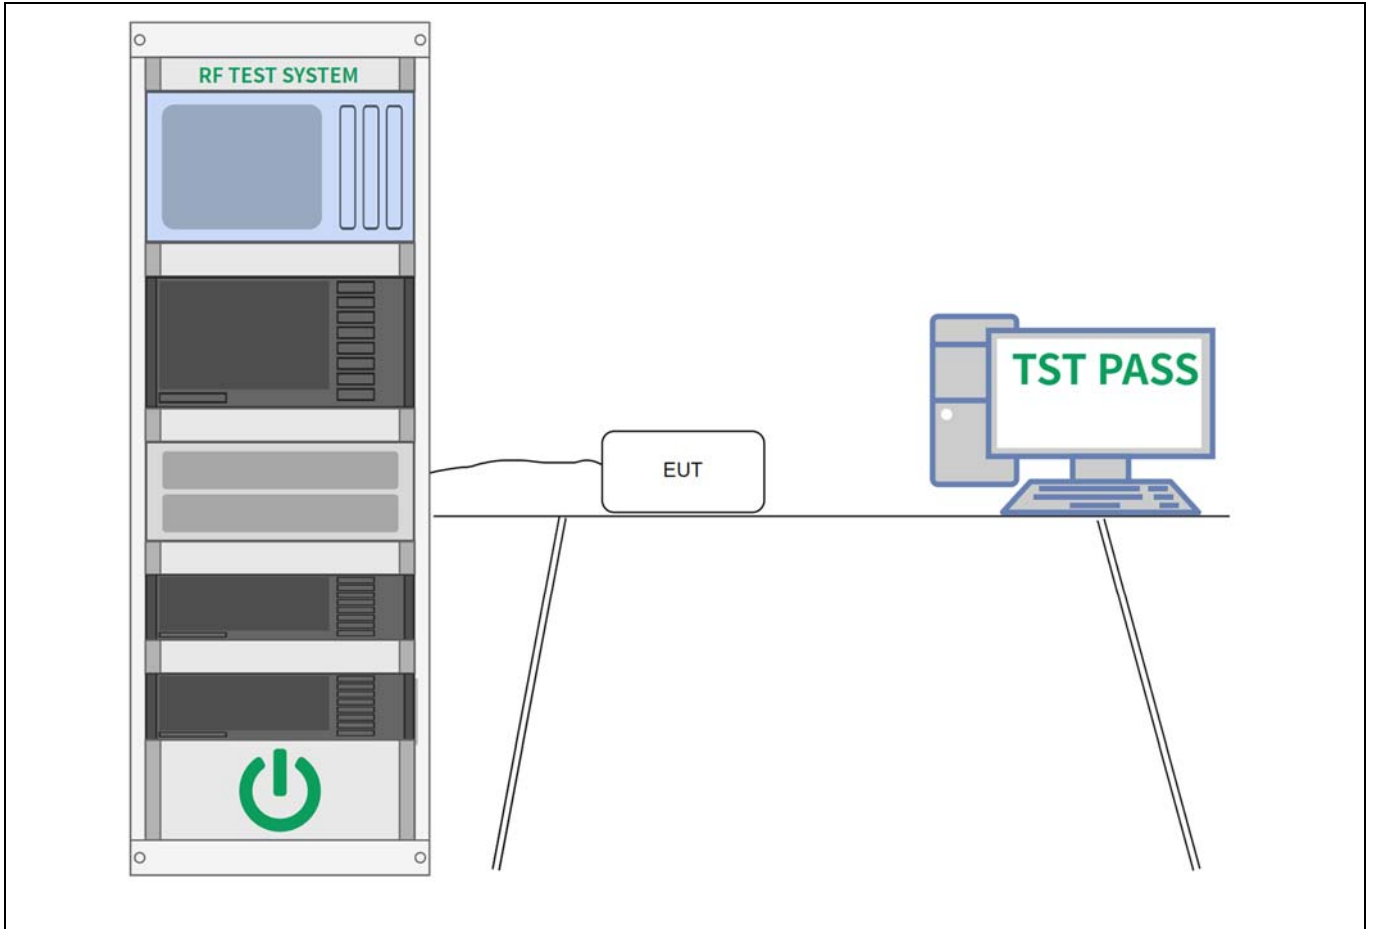

6.3.3 Test Data:

Please Refer to Appendix for Details.


6.4 Channel Separation

Test Requirement:	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
Test Limit:	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
Test Method:	Carrier frequency separation
Procedure:	<p>The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> a) Span: Wide enough to capture the peaks of two adjacent channels. b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. c) Video (or average) bandwidth (VBW) \geq RBW. d) Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize. <p>Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.</p>

6.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	60 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3				
Final test mode:	Mode1, Mode2, Mode3				

6.4.2 Test Setup Diagram:

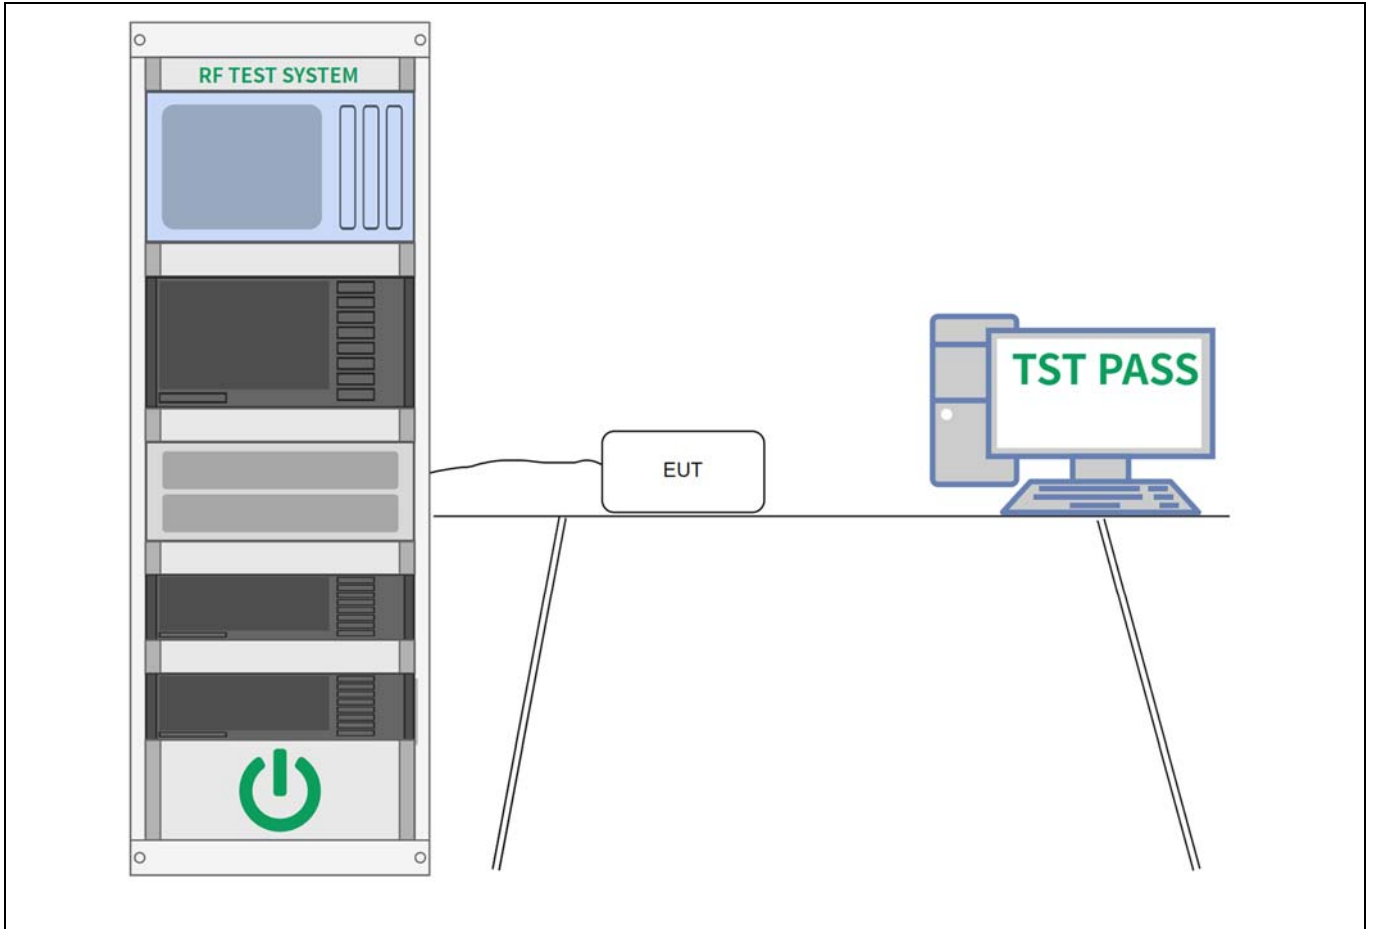

6.4.3 Test Data:

Please Refer to Appendix for Details.


6.5 Number of Hopping Frequencies

Test Requirement:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Limit:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Method:	Number of hopping frequencies
Procedure:	<p>The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen. b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller. c) VBW \geq RBW. d) Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize. <p>It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.</p>

6.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	60 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3				
Final test mode:	Mode1, Mode2, Mode3				

6.5.2 Test Setup Diagram:

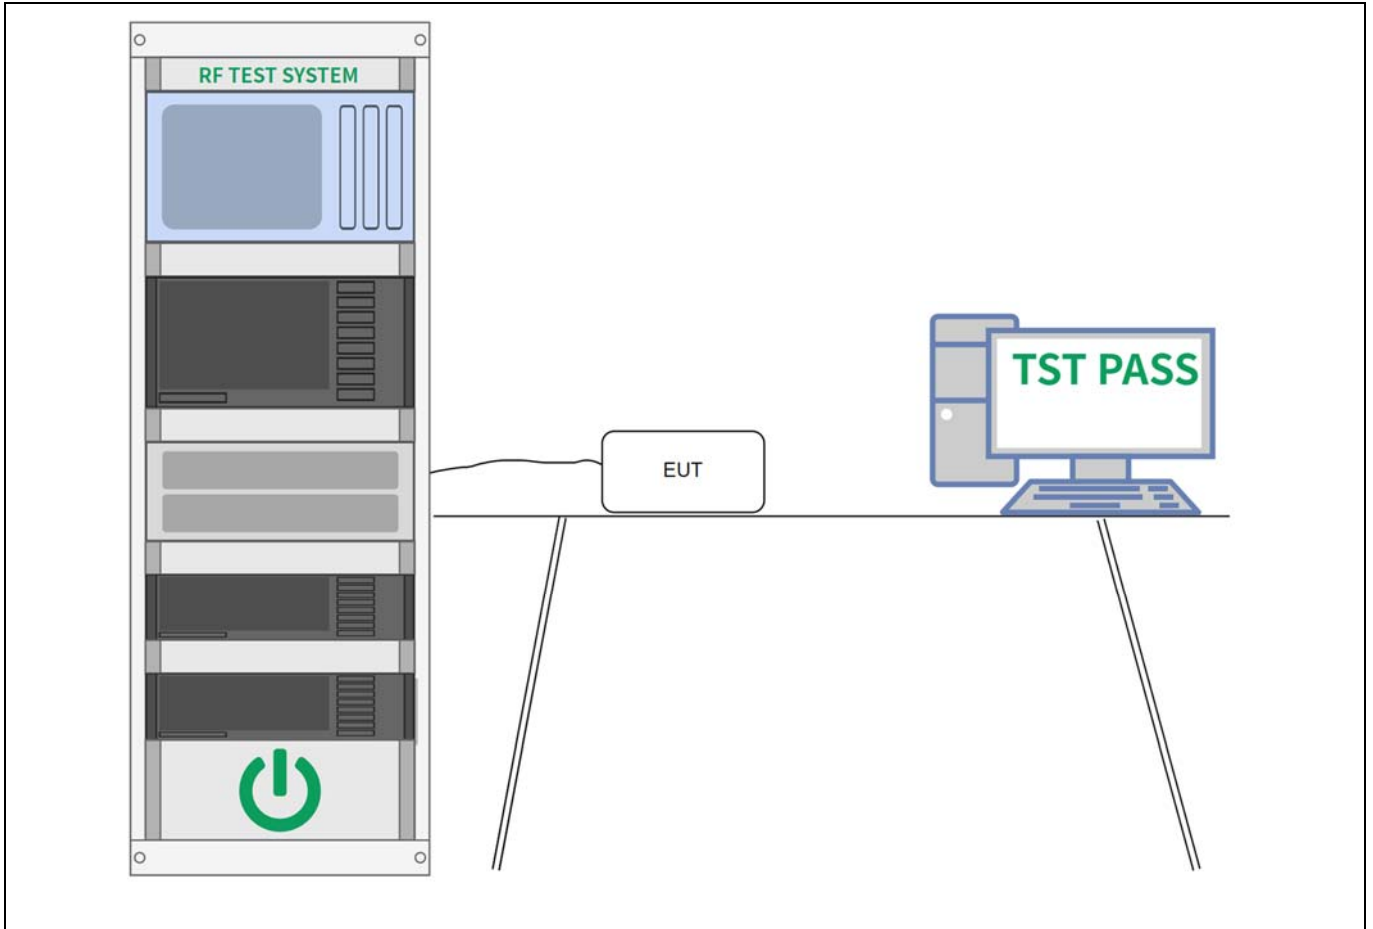

6.5.3 Test Data:

Please Refer to Appendix for Details.


6.6 Dwell Time

Test Requirement:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Limit:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Method:	Time of occupancy (dwell time)
Procedure:	<p>The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:</p> <p>a) Span: Zero span, centered on a hopping channel.</p> <p>b) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.</p> <p>c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.</p> <p>d) Detector function: Peak.</p> <p>e) Trace: Max hold.</p> <p>Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.</p> <p>Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:</p> $(\text{Number of hops in the period specified in the requirements}) = (\text{number of hops on spectrum analyzer}) \times (\text{period specified in the requirements} / \text{analyzer sweep time})$ <p>The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.</p> <p>The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.</p>

6.6.1 E.U.T. Operation:

Operating Environment:			
Temperature:	24 °C	Humidity:	60 %
		Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3		
Final test mode:	Mode1, Mode2, Mode3		

6.6.2 Test Setup Diagram:

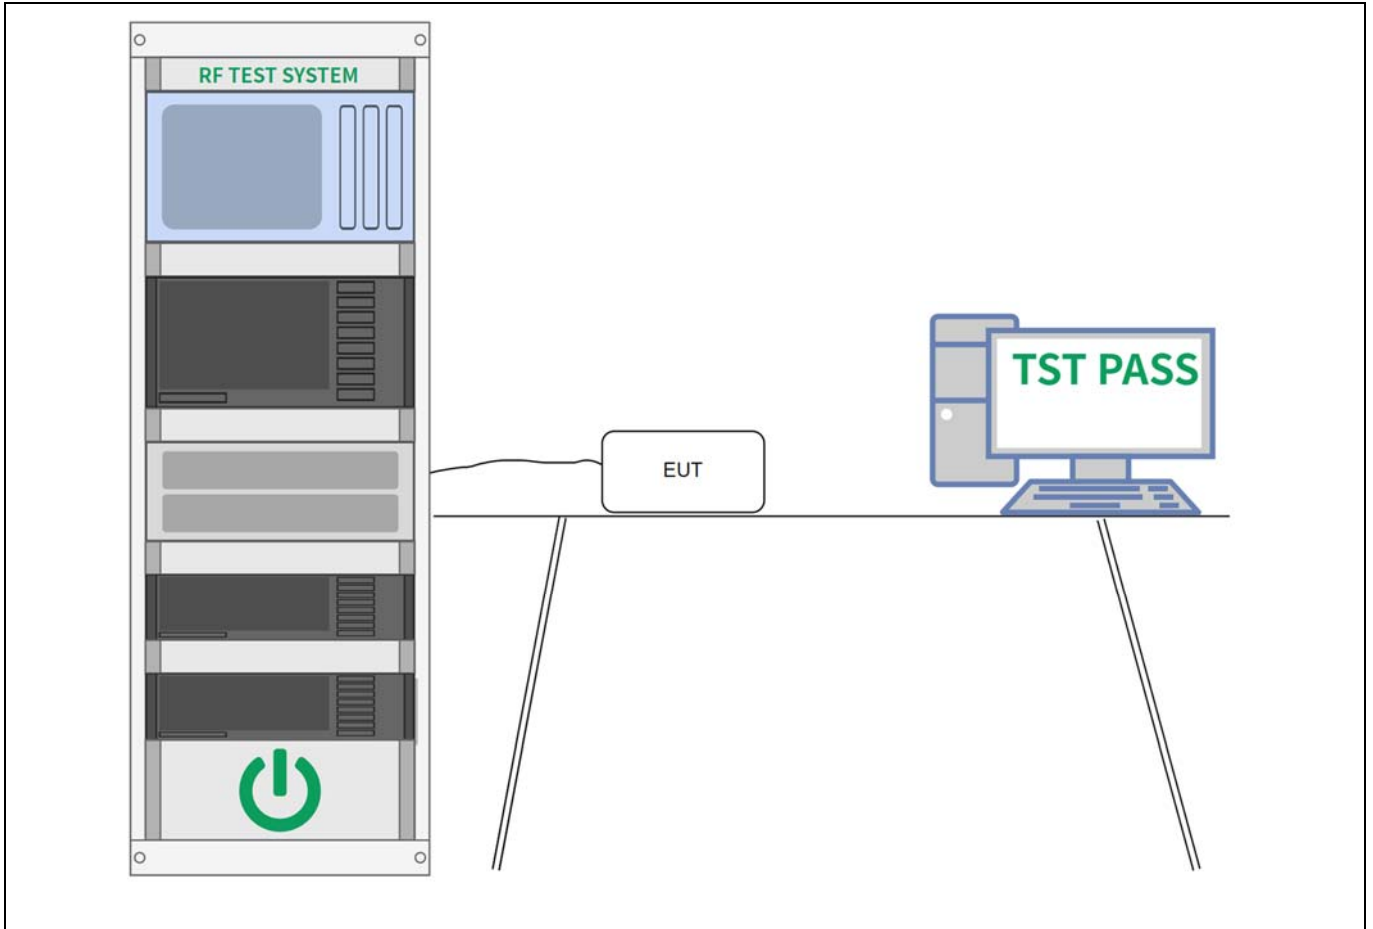

6.6.3 Test Data:

Please Refer to Appendix for Details.


6.7 Emissions in non-restricted frequency bands

Test Requirement:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	Conducted spurious emissions test methodology
Procedure:	Conducted spurious emissions shall be measured for the transmit frequency, per 5.5 and 5.6, and at the maximum transmit powers. Connect the primary antenna port through an attenuator to the spectrum analyzer input; in the results, account for all losses between the unlicensed wireless device output and the spectrum analyzer. The instrument shall span 30 MHz to 10 times the operating frequency in GHz, with a resolution bandwidth of 100 kHz, video bandwidth of 300 kHz, and a coupled sweep time with a peak detector. The band 30 MHz to the highest frequency may be split into smaller spans, as long as the entire spectrum is covered.

6.7.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	60 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3				
Final test mode:	Mode1, Mode2, Mode3				

6.7.2 Test Setup Diagram:

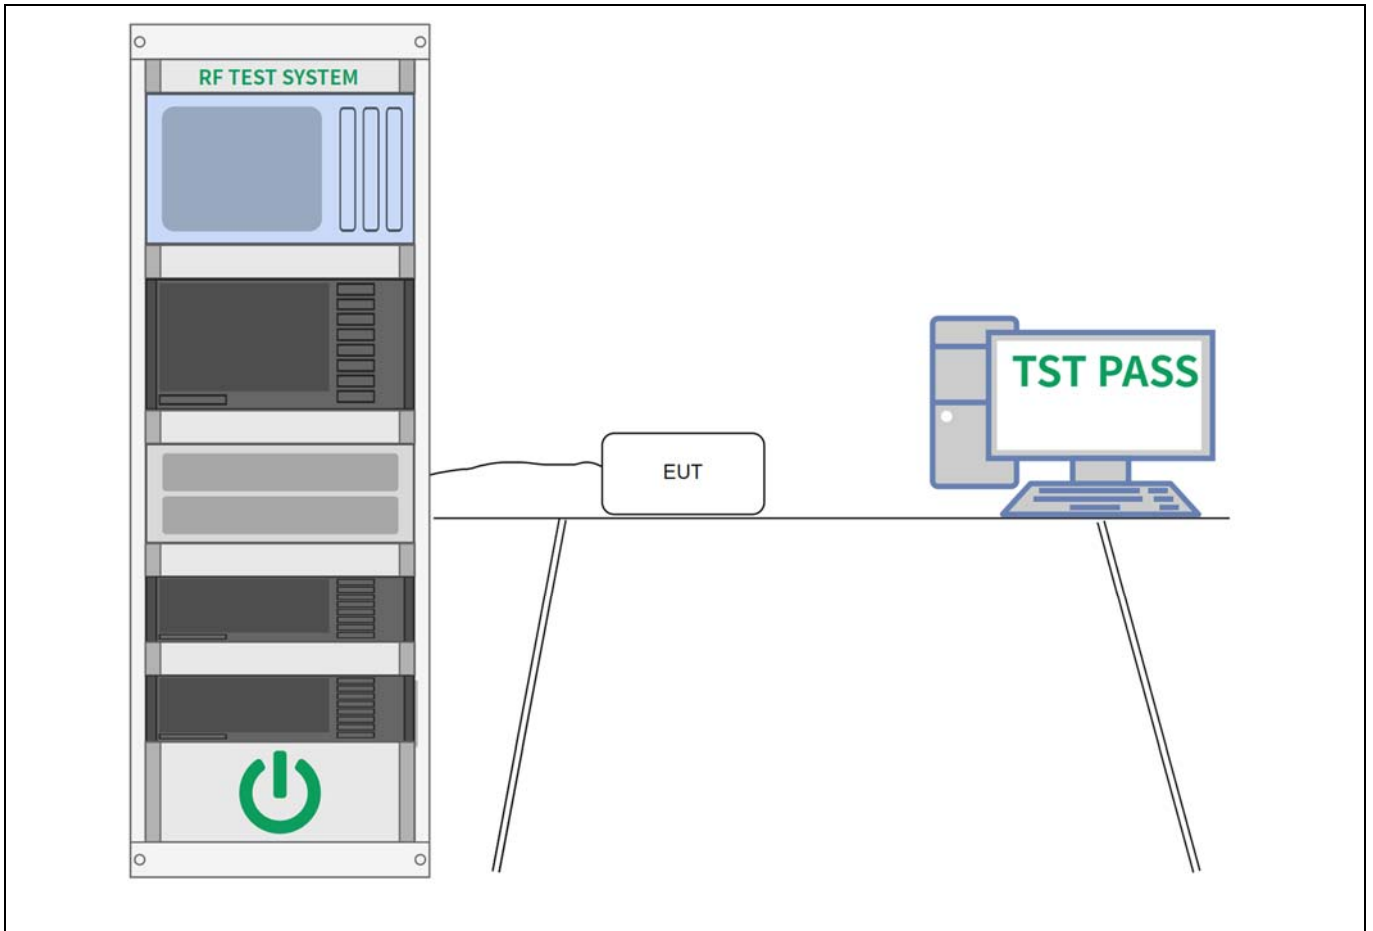

6.7.3 Test Data:

Please Refer to Appendix for Details.

6.8 Band edge emissions (Radiated)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.		
Test Method:	Radiated emissions tests		
Procedure:	ANSI C63.10-2013 section 6.10		

6.8.1 E.U.T. Operation:

Operating Environment:			
Temperature:	25 °C	Humidity:	50 %
		Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2, Mode3		
Final test mode:	Mode1		

6.8.2 Test Data:

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: 2402							
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	2310.000	49.61	-8.08	41.53	74.00	-32.47	peak
2	2310.000	37.52	-8.08	29.44	54.00	-24.56	AVG
3 *	2390.000	65.47	-7.71	57.76	74.00	-16.24	peak
4	2390.000	40.66	-7.71	32.95	54.00	-21.05	AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: 2402							
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	2310.000	48.21	-8.08	40.13	74.00	-33.87	peak
2	2310.000	37.37	-8.08	29.29	54.00	-24.71	AVG
3	2390.000	53.99	-7.71	46.28	74.00	-27.72	peak
4 *	2390.000	37.79	-7.71	30.08	54.00	-23.92	AVG

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: 2480


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	*	2483.500	65.55	-7.24	58.31	74.00	-15.69	peak
2		2483.500	40.94	-7.24	33.70	54.00	-20.30	AVG
3		2500.000	52.05	-7.17	44.88	74.00	-29.12	peak
4		2500.000	38.00	-7.17	30.83	54.00	-23.17	AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: 2480

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	*	2483.500	78.04	-7.24	70.80	74.00	-3.20	peak
2		2483.500	50.76	-7.24	43.52	54.00	-10.48	AVG
3		2500.000	64.84	-7.17	57.67	74.00	-16.33	peak
4		2500.000	40.36	-7.17	33.19	54.00	-20.81	AVG

6.9 Emissions in restricted frequency bands (below 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.		
Test Method:	Radiated emissions tests		
Procedure:	ANSI C63.10-2013 section 6.6.4		

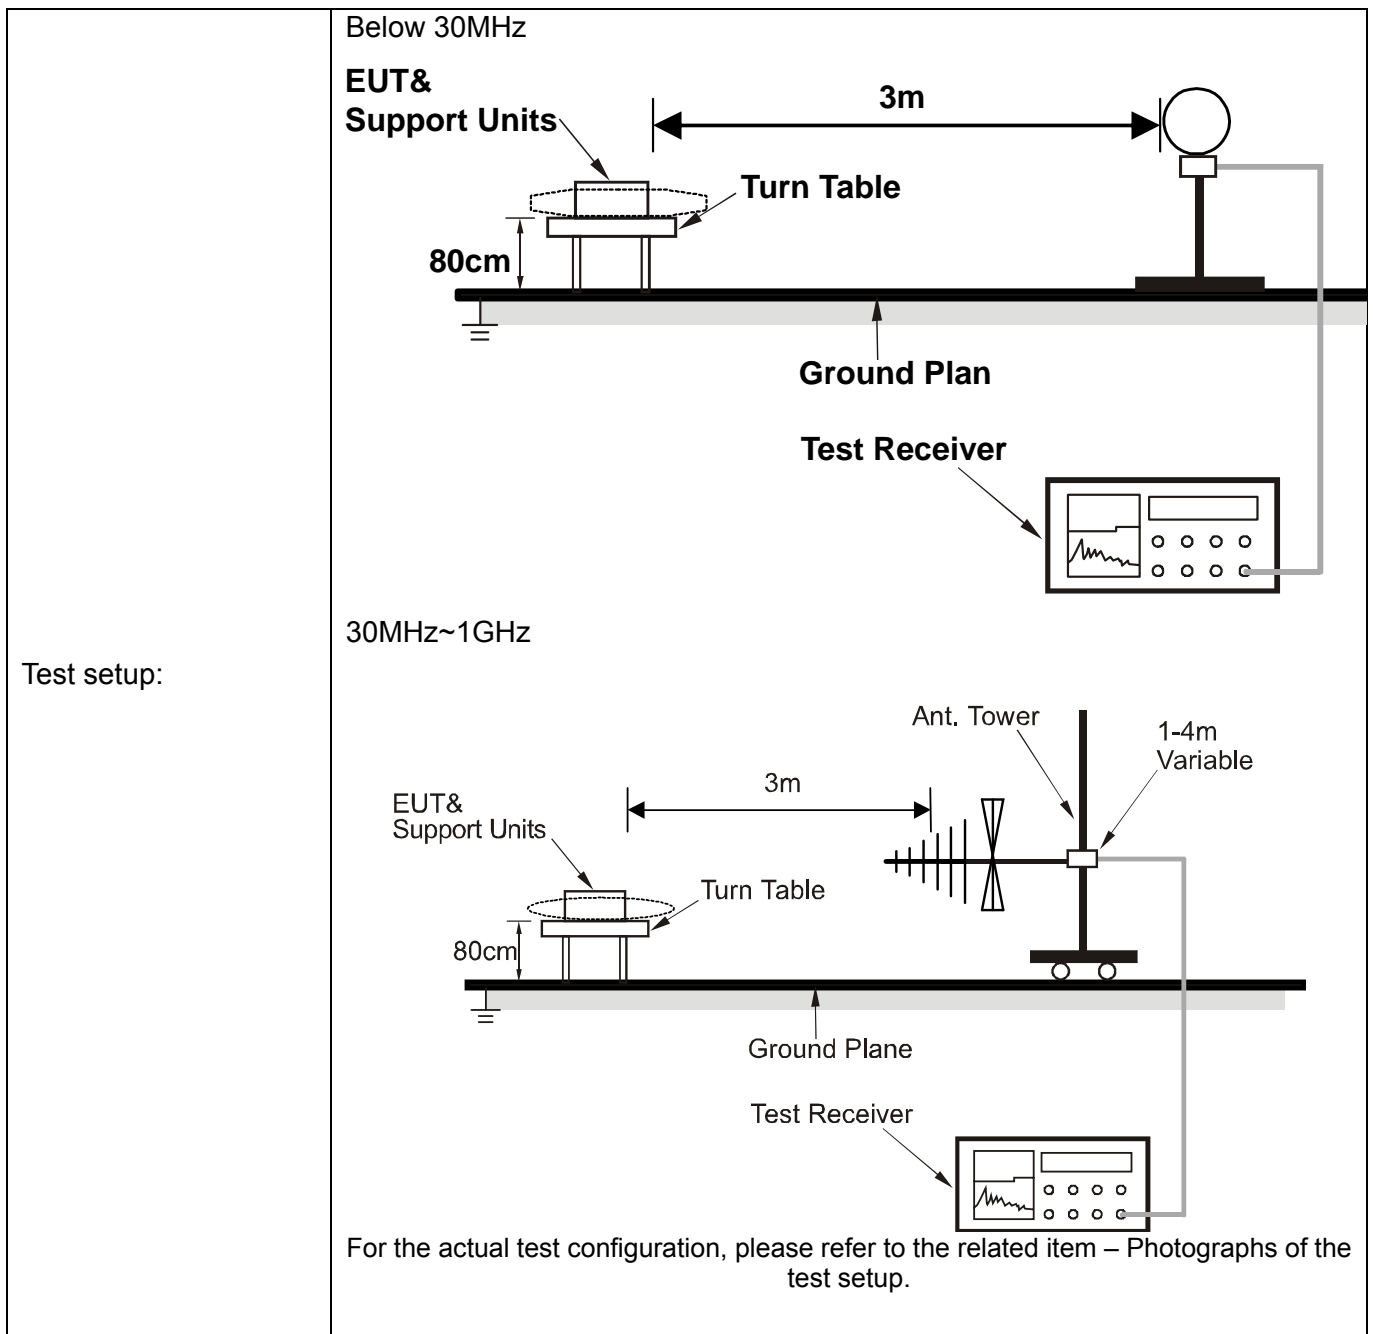


6.9.1 E.U.T. Operation:

Operating Environment:			
Temperature:	25 °C	Humidity:	50 %
		Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2, Mode3		
Final test mode:	Mode3		
Note:			
The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.			
All modes of operation of the EUT were investigated, and only the worst-case results are reported. There were no emissions found below 30MHz within 20dB of the limit.			


6.9.2 Test Data:

Mode3 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: 2480

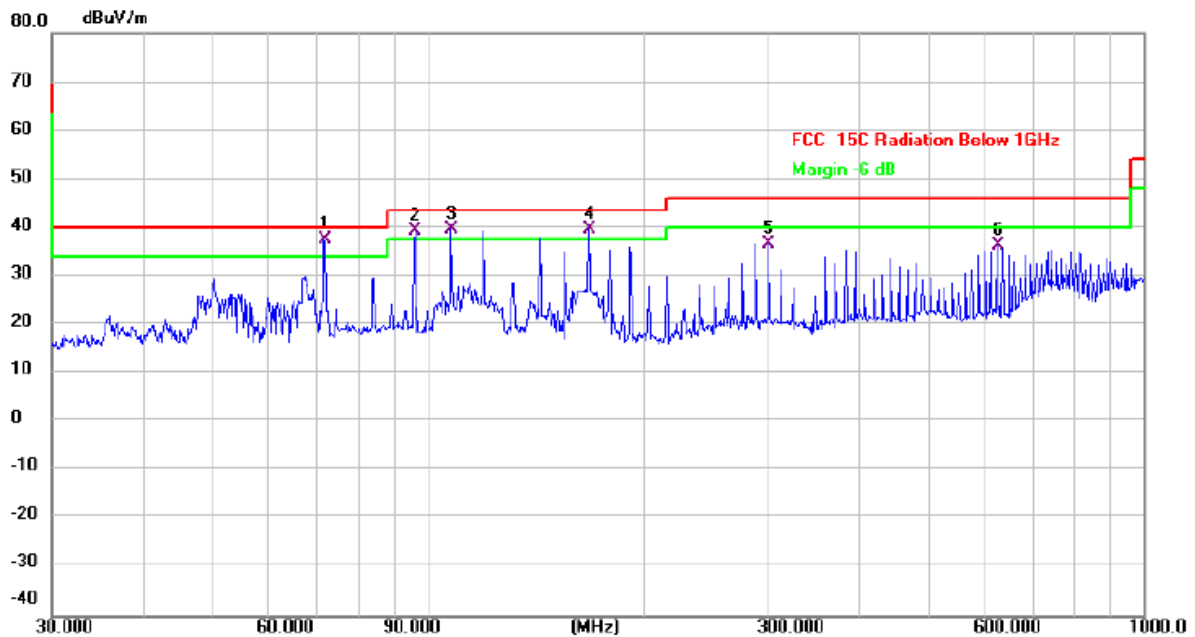


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	71.8320	47.47	-10.04	37.43	40.00	-2.57	QP	
2	!	96.0986	47.45	-8.13	39.32	43.50	-4.18	QP	
3	!	107.8877	48.17	-8.42	39.75	43.50	-3.75	QP	
4	!	167.8243	51.36	-11.57	39.79	43.50	-3.71	QP	
5		300.3672	42.40	-5.71	36.69	46.00	-9.31	QP	
6		625.0780	36.65	-0.44	36.21	46.00	-9.79	QP	

Mode3 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: 2480

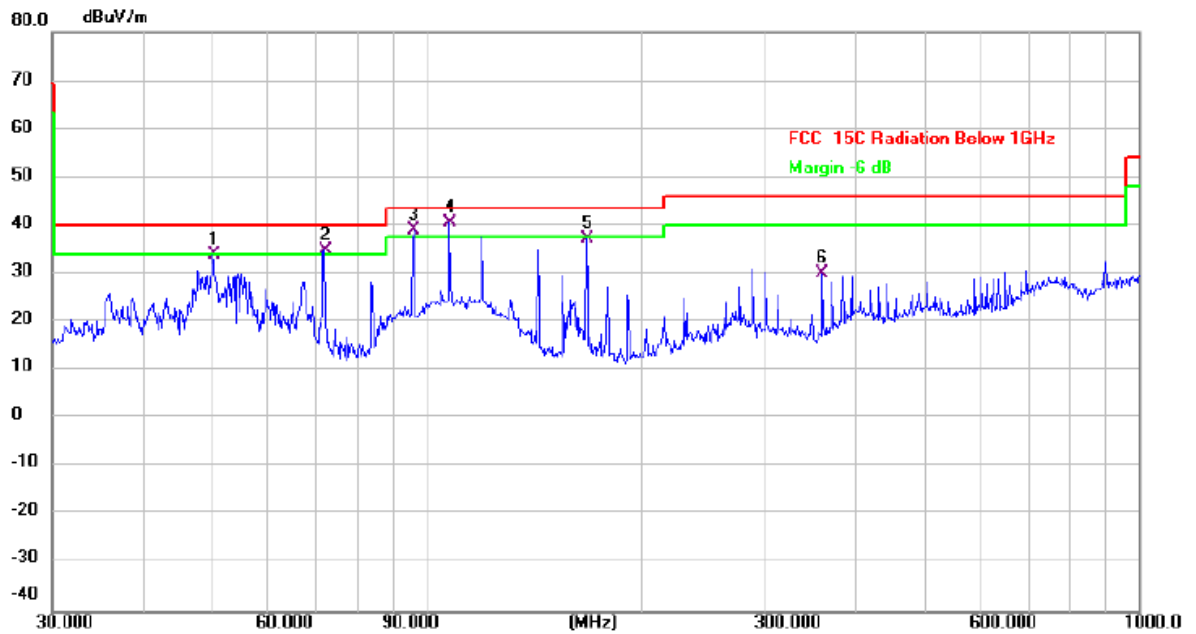

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		50.2324	41.53	-7.61	33.92	40.00	-6.08	QP	
2	!	72.0843	44.80	-10.08	34.72	40.00	-5.28	QP	
3	!	96.0986	47.24	-8.13	39.11	43.50	-4.39	QP	
4	*	107.8877	48.90	-8.42	40.48	43.50	-3.02	QP	
5		167.8243	48.70	-11.57	37.13	43.50	-6.37	QP	
6		360.4476	37.18	-7.04	30.14	46.00	-15.86	QP	

6.10 Emissions in restricted frequency bands (above 1GHz)

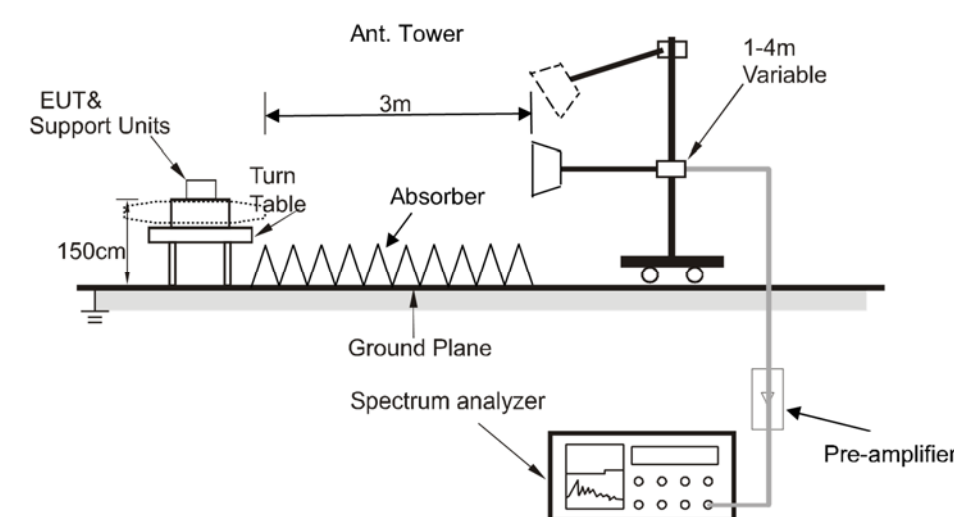Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Test Method:	Radiated emissions tests		
Procedure:	ANSI C63.10-2013 section 6.6.4		
Test setup:	Above 1GHz		
	 <p>For the actual test configuration, please refer to the related item – Photographs of the test setup.</p>		

6.10.1 E.U.T. Operation:

Operating Environment:			
Temperature:	25 °C	Humidity:	50 %
		Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2, Mode3		
Final test mode:	Mode2		
<p>aNote: Test frequency are from 1GHz to 25GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported.</p>			

6.10.2 Test Data:

Mode2 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: 2402							
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	4804.000	53.99	0.74	54.73	74.00	-19.27	peak
2 *	4804.000	48.45	0.74	49.19	54.00	-4.81	AVG
3	7206.000	40.05	6.02	46.07	74.00	-27.93	peak
4	7206.000	33.99	6.02	40.01	54.00	-13.99	AVG
5	9608.000	41.15	5.88	47.03	74.00	-26.97	peak
6	9608.000	34.97	5.88	40.85	54.00	-13.15	AVG

Mode2 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: 2402							
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	4804.000	45.91	0.74	46.65	74.00	-27.35	peak
2 *	4804.000	42.77	0.74	43.51	54.00	-10.49	AVG
3	7206.000	40.94	6.02	46.96	74.00	-27.04	peak
4	7206.000	34.33	6.02	40.35	54.00	-13.65	AVG
5	9608.000	41.85	5.88	47.73	74.00	-26.27	peak
6	9608.000	35.41	5.88	41.29	54.00	-12.71	AVG

Mode2 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: 2441

	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	4882.000	56.29	1.05	57.34	74.00	-16.66	peak
2 *	4882.000	44.24	1.05	45.29	54.00	-8.71	AVG
3	7323.000	40.37	5.94	46.31	74.00	-27.69	peak
4	7323.000	33.77	5.94	39.71	54.00	-14.29	AVG
5	9764.000	41.48	6.55	48.03	74.00	-25.97	peak
6	9764.000	34.70	6.55	41.25	54.00	-12.75	AVG

Mode2 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: 2441

	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	4882.000	50.47	1.05	51.52	74.00	-22.48	peak
2 *	4882.000	42.90	1.05	43.95	54.00	-10.05	AVG
3	7323.000	40.10	5.94	46.04	74.00	-27.96	peak
4	7323.000	34.06	5.94	40.00	54.00	-14.00	AVG
5	9764.000	40.82	6.55	47.37	74.00	-26.63	peak
6	9764.000	34.82	6.55	41.37	54.00	-12.63	AVG

Mode2 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: 2480

	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	4960.000	64.61	1.50	66.11	74.00	-7.89	peak
2 *	4960.000	46.01	1.50	47.51	54.00	-6.49	AVG
3	7440.000	44.17	5.61	49.78	74.00	-24.22	peak
4	7440.000	34.65	5.61	40.26	54.00	-13.74	AVG
5	9920.000	41.07	6.10	47.17	74.00	-26.83	peak
6	9920.000	34.90	6.10	41.00	54.00	-13.00	AVG

Mode2 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: 2480

	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	4960.000	51.05	1.50	52.55	74.00	-21.45	peak
2	4960.000	39.52	1.50	41.02	54.00	-12.98	AVG
3	7440.000	45.22	5.61	50.83	74.00	-23.17	peak
4	7440.000	32.93	5.61	38.54	54.00	-15.46	AVG
5	9920.000	41.73	6.10	47.83	74.00	-26.17	peak
6 *	9920.000	34.93	6.10	41.03	54.00	-12.97	AVG

Photographs of the test setup

Refer to Appendix - Test Setup Photos

Photographs of the EUT

Refer to Appendix - EUT Photos


Appendix

Appendix A: 20dB Emission Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	20db EBW [MHz]
DH5	Ant1	2402	0.996
		2441	0.942
		2480	0.960
2DH5	Ant1	2402	1.227
		2441	1.290
		2480	1.212
3DH5	Ant1	2402	1.272
		2441	1.281
		2480	1.275

Test Graphs

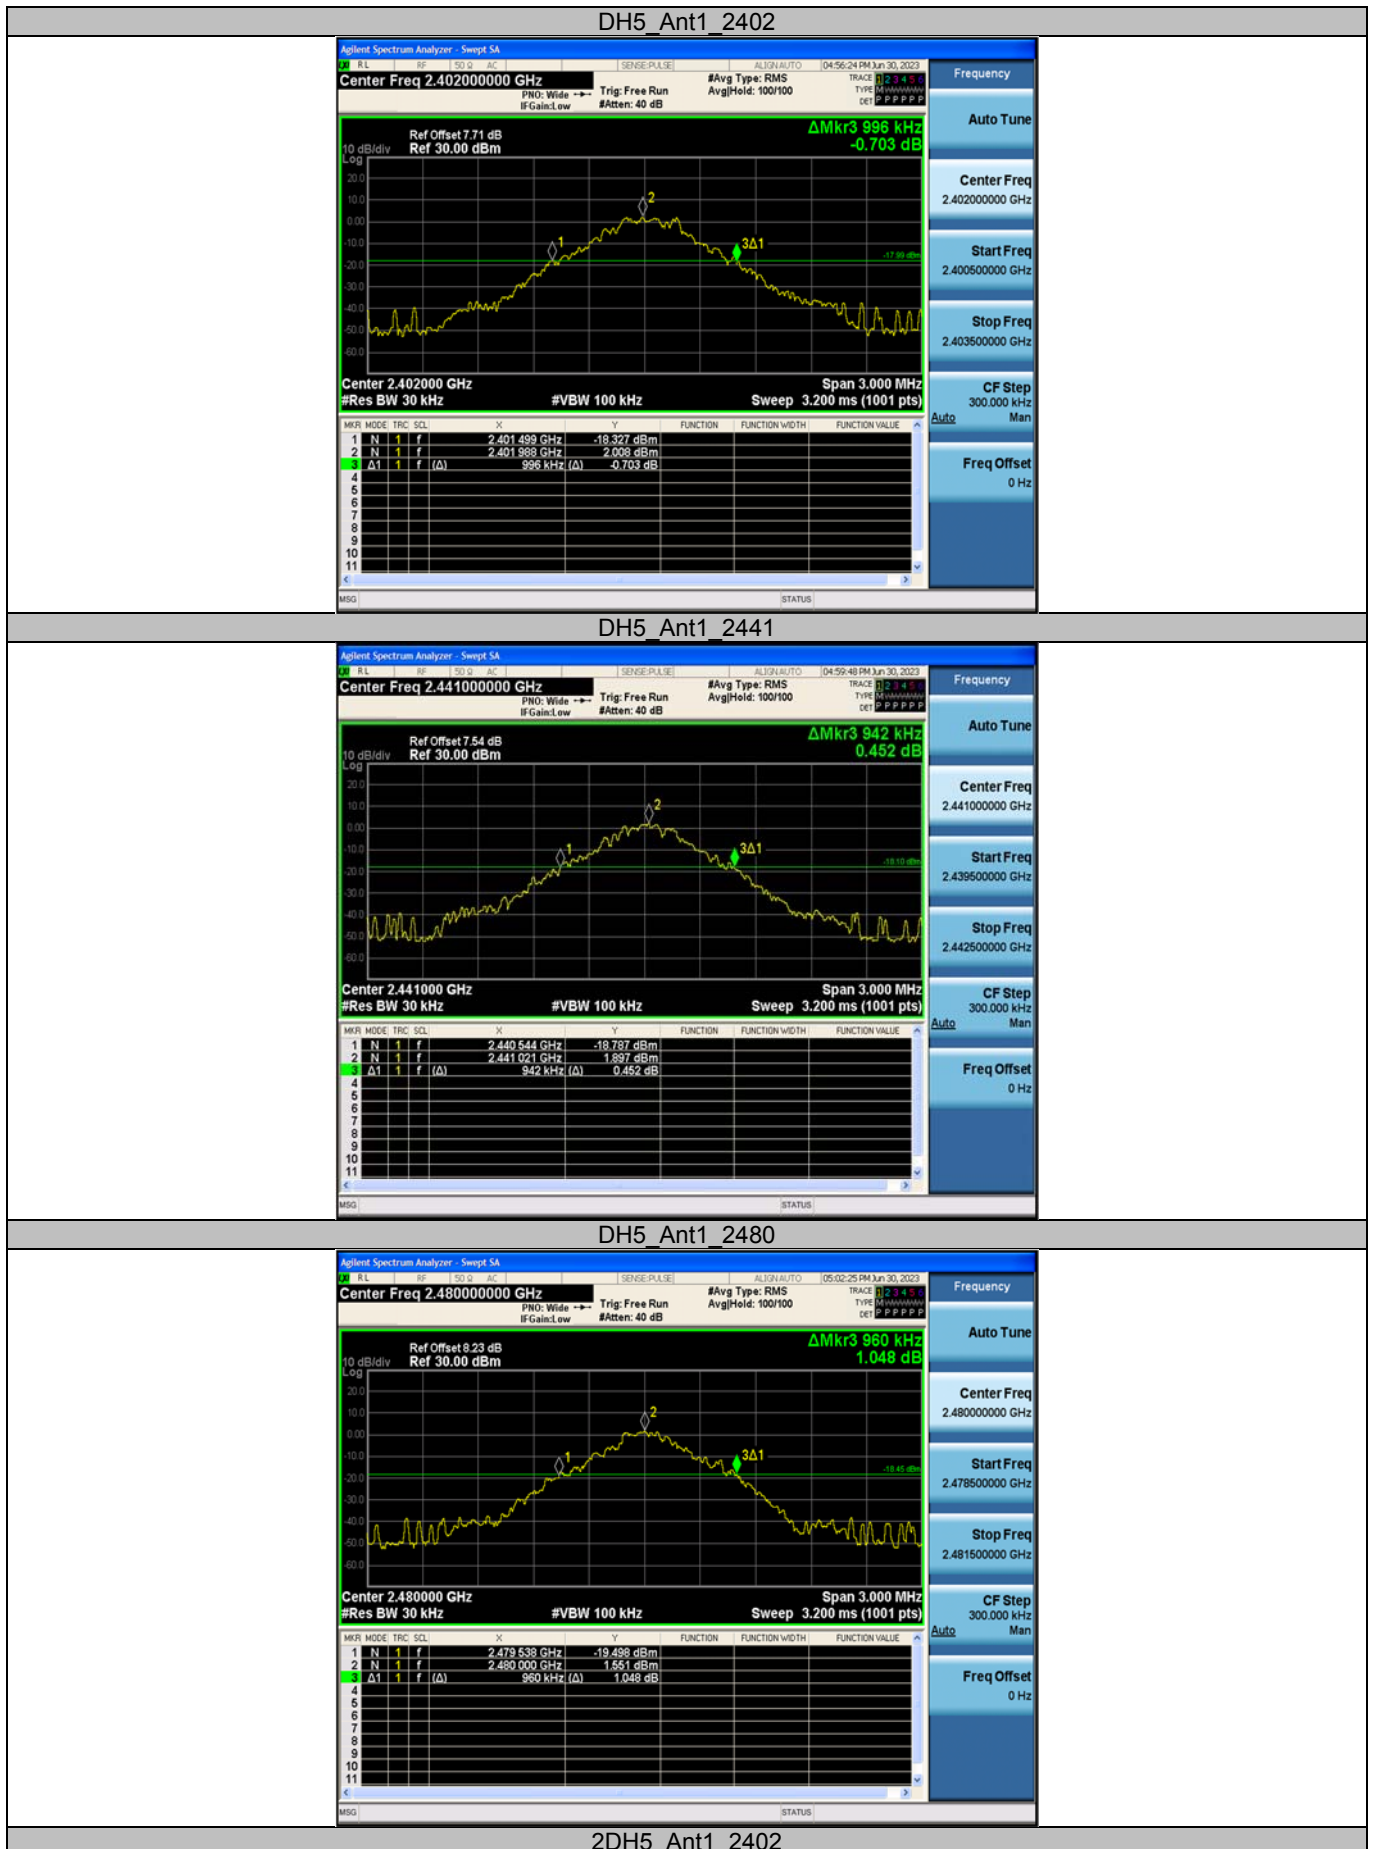



2Dh5_Ant1_2441



2Dh5_Ant1_2480



3Dh5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480



Appendix B: Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	5.39	≤30	PASS
		2441	4.75	≤30	PASS
		2480	4.64	≤30	PASS
2DH5	Ant1	2402	5.39	≤20.97	PASS
		2441	4.65	≤20.97	PASS
		2480	4.55	≤20.97	PASS
3DH5	Ant1	2402	5.3	≤20.97	PASS
		2441	4.7	≤20.97	PASS
		2480	4.63	≤20.97	PASS