



TEST REPORT

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR19-SRF0056-A Page (1) of (45)	
---	--	--

1. Client

◦ Name : WONDERFUL PLATFORM CO.,LTD

◦ Address : F 5. F6, 175, Nonhyeon-ro, Seocho-gu, Seoul, Republic of Korea

◦ Date of Receipt : 2019-03-18

2. Use of Report : -

3. Name of Product and Model : AI LASER BEAM PROJECTOR / UO+

4. Manufacturer and Country of Origin : CHUNGO TECH CO., LTD. / Korea

5. FCC ID : 2AST7-UOPLUS

6. Date of Test : 2019-04-26 to 2019-05-01

7. Test Standards : FCC Part 15 Subpart C, 15.247

8. Test Results : Refer to the test result in the test report

Affirmation	Tested by Name : Kidong Lee (Signature)	Technical Manager Name : Seungyong Kim (Signature)
-------------	---	--

2019-05-08

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

Report revision history

Date	Revision	Page No
2019-05-02	Initial report	-
2019-05-08	Added the 15.207 Requirements in Summary Table Added the min bandwidth limits Revised the conducted emission test date Revised Measurement equipment calibration date	6, 14, 44, 45

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document.

This test report is a general report that does not use the KOLAS accreditation mark and is not related to KOLAS accreditation.



CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Accessory information	5
2.2.	Frequency/channel operations.....	5
3.	Antenna requirement	5
4.	Summary of tests	6
5.	Measurement uncertainty	6
6.	Measurement results explanation example	7
7	Test results	8
7.1.	Maximum peak output power.....	8
7.2.	Carrier frequency separation	10
7.3.	20dB channel bandwidth	13
7.4.	Number of hopping channels.....	16
7.5.	Time of occupancy(Dwell time).....	18
7.6.	Radiated spurious emissions & band edge.....	23
7.7.	AC Conducted emission	43
8.	Measurement equipment	45

1. General information

Client : WONDERFUL PLATFORM CO.,LTD
 Address : F 5. F6, 175, Nonhyeon-ro, Seocho-gu, Seoul, Republic of Korea
 Manufacturer : CHUNGO TECH CO., LTD.
 Address : 303-604, BUCHEON TECHNO PARK SSANGYONG 3CHA, 397, Seokcheon-ro, Bucheon-si, Gyeonggi-do, Republic of Korea
 Laboratory : KCTL Inc.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-3327, G-198, C-3706, T-1849
 Industry Canada Registration No. : 8035A-2
 KOLAS No.: KT231

2. Device information

Equipment under test : AI LASER BEAM PROJECTOR
 Model : UO+
 Frequency range : Bluetooth(BDR/EDR)_2 402 MHz ~ 2 480 MHz
 WIFI(802.11b/g/n20)_2 412 MHz ~ 2 462 MHz
 WIFI(802.11a/n20)_5 180 MHz ~ 5 240 MHz (UNII-1)
 Modulation technique : Bluetooth(BDR/EDR)_GFSK, $\pi/4$ DQPSK, 8DPSK
 WIFI(802.11a/b/g/n20)_DSSS, OFDM
 Number of channels : Bluetooth(BDR/EDR)_79ch
 WIFI(802.11b/g/n20)_11ch (2.4 GHz)
 WIFI(802.11a/n20)_4ch (UNII-1)
 Power source : DC 3.7 V
 Antenna specification : Chip Antenna
 Antenna gain : 1.88 dBi (Bluetooth, WIFI 2.4 GHz), 3.60 dBi (WIFI 5 GHz)
 Software version : 1.0.0
 Hardware version : 1.0
 Test device serial No. : N/A
 Operation temperature : 23 °C

2.1. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
Battery	Fello Tech Co., Ltd	FT845554P 1S2P	-	3.7V/6400mAh
AC Adaptor	ShenZhen Cenwell Technology Co.,Ltd.	CW0504000RE	-	100-240V~50/60Hz 0.8A

2.2. Frequency/channel operations

This device contains the following capabilities:
 Bluetooth(BDR/EDR), WIFI(802.11a/b/g/n20)

Ch.	Frequency (MHz)
00	2 402
1	2 422
2	2 442
3	2 462
4	2 482
5	2 502
6	2 522
7	2 542
8	2 562
9	2 582
10	2 602
11	2 622
12	2 642
13	2 662
14	2 682
15	2 702
16	2 722
17	2 742
18	2 762
19	2 782
20	2 802
21	2 822
22	2 842
23	2 862
24	2 882
25	2 902
26	2 922
27	2 942
28	2 962
29	2 982
30	3 002
31	3 022
32	3 042
33	3 062
34	3 082
35	3 102
36	3 122
37	3 142
38	3 162
39	3 182
40	3 202
41	3 222
42	3 242
43	3 262
44	3 282
45	3 302
46	3 322
47	3 342
48	3 362
49	3 382
50	3 402
51	3 422
52	3 442
53	3 462
54	3 482
55	3 502
56	3 522
57	3 542
58	3 562
59	3 582
60	3 602
61	3 622
62	3 642
63	3 662
64	3 682
65	3 702
66	3 722
67	3 742
68	3 762
69	3 782
70	3 802
71	3 822
72	3 842
73	3 862
74	3 882
75	3 902
76	3 922
77	3 942
78	3 962
79	3 982
80	4 002
81	4 022
82	4 042
83	4 062
84	4 082
85	4 102
86	4 122
87	4 142
88	4 162
89	4 182
90	4 202
91	4 222
92	4 242
93	4 262
94	4 282
95	4 302
96	4 322
97	4 342
98	4 362
99	4 382
100	4 402
101	4 422
102	4 442
103	4 462
104	4 482
105	4 502
106	4 522
107	4 542
108	4 562
109	4 582
110	4 602
111	4 622
112	4 642
113	4 662
114	4 682
115	4 702
116	4 722
117	4 742
118	4 762
119	4 782
120	4 802
121	4 822
122	4 842
123	4 862
124	4 882
125	4 902
126	4 922
127	4 942
128	4 962
129	4 982
130	5 002
131	5 022
132	5 042
133	5 062
134	5 082
135	5 102
136	5 122
137	5 142
138	5 162
139	5 182
140	5 202
141	5 222
142	5 242
143	5 262
144	5 282
145	5 302
146	5 322
147	5 342
148	5 362
149	5 382
150	5 402
151	5 422
152	5 442
153	5 462
154	5 482
155	5 502
156	5 522
157	5 542
158	5 562
159	5 582
160	5 602
161	5 622
162	5 642
163	5 662
164	5 682
165	5 702
166	5 722
167	5 742
168	5 762
169	5 782
170	5 802
171	5 822
172	5 842
173	5 862
174	5 882
175	5 902
176	5 922
177	5 942
178	5 962
179	5 982
180	6 002
181	6 022
182	6 042
183	6 062
184	6 082
185	6 102
186	6 122
187	6 142
188	6 162
189	6 182
190	6 202
191	6 222
192	6 242
193	6 262
194	6 282
195	6 302
196	6 322
197	6 342
198	6 362
199	6 382
200	6 402
201	6 422
202	6 442
203	6 462
204	6 482
205	6 502
206	6 522
207	6 542
208	6 562
209	6 582
210	6 602
211	6 622
212	6 642
213	6 662
214	6 682
215	6 702
216	6 722
217	6 742
218	6 762
219	6 782
220	6 802
221	6 822
222	6 842
223	6 862
224	6 882
225	6 902
226	6 922
227	6 942
228	6 962
229	6 982
230	7 002
231	7 022
232	7 042
233	7 062
234	7 082
235	7 102
236	7 122
237	7 142
238	7 162
239	7 182
240	7 202
241	7 222
242	7 242
243	7 262
244	7 282
245	7 302
246	7 322
247	7 342
248	7 362
249	7 382
250	7 402
251	7 422
252	7 442
253	7 462
254	7 482
255	7 502
256	7 522
257	7 542
258	7 562
259	7 582
260	7 602
261	7 622
262	7 642
263	7 662
264	7 682
265	7 702
266	7 722
267	7 742
268	7 762
269	7 782
270	7 802
271	7 822
272	7 842
273	7 862
274	7 882
275	7 902
276	7 922
277	7 942
278	7 962
279	7 982
280	8 002
281	8 022
282	8 042
283	8 062
284	8 082
285	8 102
286	8 122
287	8 142
288	8 162
289	8 182
290	8 202
291	8 222
292	8 242
293	8 262
294	8 282
295	8 302
296	8 322
297	8 342
298	8 362
299	8 382
300	8 402
301	8 422
302	8 442
303	8 462
304	8 482
305	8 502
306	8 522
307	8 542
308	8 562
309	8 582
310	8 602
311	8 622
312	8 642
313	8 662
314	8 682
315	8 702
316	8 722
317	8 742
318	8 762
319	8 782
320	8 802
321	8 822
322	8 842
323	8 862
324	8 882
325	8 902
326	8 922
327	8 942
328	8 962
329	8 982
330	9 002
331	9 022
332	9 042
333	9 062
334	9 082
335	9 102
336	9 122
337	9 142
338	9 162
339	9 182
340	9 202
341	9 222
342	9 242
343	9 262
344	9 282
345	9 302
346	9 322
347	9 342
348	9 362
349	9 382
350	9 402
351	9 422
352	9 442
353	9 462
354	9 482
355	9 502
356	9 522
357	9 542
358	9 562
359	9 582
360	9 602
361	9 622
362	9 642
363	9 662
364	9 682
365	9 702
366	9 722
367	9 742
368	9 762
369	9 782
370	9 802
371	9 822
372	9 842
373	9 862
374	9 882
375	9 902
376	9 922
377	9 942
378	9 962
379	9 982
380	10 002
381	10 022
382	10 042
383	10 062
384	10 082
385	10 102
386	10 122
387	10 142
388	10 162
389	10 182
390	10 202
391	10 222
392	10 242
393	10 262
394	10 282
395	10 302
396	10 322
397	10 342
398	10 362
399	10 382
400	10 402
401	10 422
402	10 442
403	10 462
404	10 482
405	10 502
406	10 522
407	10 542
408	10 562
409	10 582
410	10 602
411	10 622
412	10 642
413	10 662
414	10 682
415	10 702
416	10 722
417	10 742
418	10 762
419	10 782
420	10 802
421	10 822
422	10 842
423	10 862
424	10 882
425	10 902
426	10 922
427	10 942
428	10 962
429	10 982
430	11 002
431	11 022
432	11 042
433	11 062
434	11 082
435	11 102
436	11 122
437	11 142
438	11 162
439	11 182
440	11 202
441	11 222
442	11 242
443	11 262
444	11 282
445	11 302
446	11 322
447	11 342
448	11 362
449	11 382
450	11 402
451	11 422
452	11 442
453	11 462
454	11 482
455	11 502
456	11 522
457	11 542
458	11 562
459	11 582
460	11 602
461	11 622
462	11 642
463	11 662
464	11 682
465	11 702
466	11 722
467	11 742
468	11 762
469	11 782
470	11 802
471	11 822
472	11 842
473	11 862
474	11 882
475	11 902
476	11 922
477	11 942
478	11 962
479	11 982
480	12 002
481	12 022
482	12 042
483	12 062
484	12 082
485	12 102
486	12 122
487	12 142
488	

4. Summary of tests

FCC Part section(s)	Parameter	Test results
15.247(b)(1), (4)	Maximum peak output power	Pass
15.247(a)(1)	Carrier frequency separation	Pass
15.247(a)(1)	20dB channel bandwidth	Pass
15.247(a)(iii) 15.247(b)(1)	Number of hopping channel	Pass
15.247(a) (iii)	Time of occupancy(dwell time)	Pass
15.205(a), 15.209(a)	Spurious emission	Pass
15.247(d),	Band-edge, restricted band	Pass
15.207(a)	Conducted Emissions	Pass

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
3. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that X orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in X orientation
4. The test procedure(s) in this report were performed in accordance as following.
 - ♦ ANSI C63.10-2013
 - ♦ KDB 558074 D01 v05r02

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicated a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty	
Conducted RF power	1.76 dB	
Conducted spurious emissions	4.03 dB	
Radiated spurious emissions	9 kHz ~ 30 MHz:	2.28 dB
	30 MHz ~ 300 MHz	4.98 dB
	300 MHz ~ 1 000 MHz	5.14 dB
	1 GHz ~ 6 GHz	6.70 dB
	Above 6 GHz	6.60 dB
Conducted emissions	9 kHz ~ 150 kHz	3.66 dB
	150 kHz ~ 30 MHz	3.26 dB

6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	17.38	9 000	19.38
100	17.63	10 000	19.70
200	17.74	11 000	19.73
300	17.88	12 000	20.11
400	17.93	13 000	20.18
500	18.00	14 000	20.45
600	18.13	15 000	20.39
700	18.00	16 000	21.69
800	18.03	17 000	21.15
900	18.26	18 000	21.08
1 000	18.21	19 000	20.94
2 000	18.45	20 000	21.23
3 000	18.60	21 000	21.64
4 000	19.16	22 000	21.75
5 000	19.35	23 000	21.38
6 000	19.31	24 000	21.64
7 000	19.68	25 000	21.72
8 000	19.52	26 000	21.70


Note.

Offset(dB) = RF cable loss(dB) + Attenuator(dB) + Power Divider(dB) + EUT cable loss(dB)

7 Test results

7.1. Maximum peak output power

Test setup

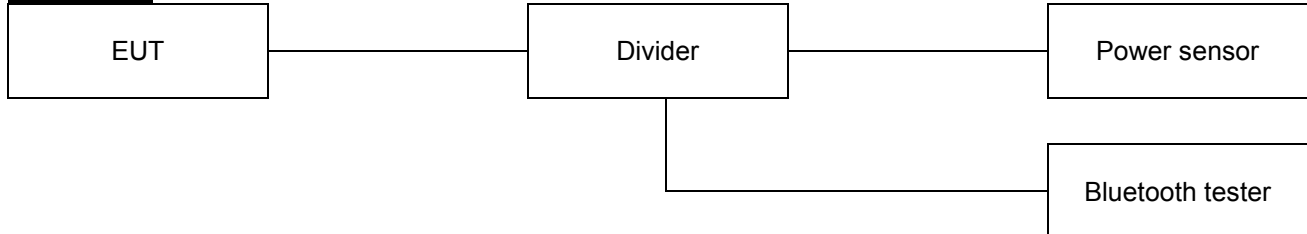

Limit

According to §15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(1), for frequency hopping systems operating in the 2 400-2 483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725-5 850 MHz band: 1 watt. For all other frequency hopping systems in the 2 400-2 483.5 MHz band: 0.125 watts.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test procedure

ANSI C63.10-2013 - Section 7.8.5

Test settings

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

Use the following spectrum analyzer settings:

- 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 2) RBW > 20 dB bandwidth of the emission being measured.
- 3) VBW ≥ RBW.
- 4) Sweep: Auto.
- 5) Detector function: Peak.
- 6) Trace: Max hold.
- 7) Allow trace to stabilize.

Notes:

A peak responding power sensor is used, where the power sensor system video bandwidth is greater than the occupied bandwidth of the EUT.


Test results

Frequency(MHz)	Data rate(Mbps)	Measured output power(dBm)		Limit(dBm)
		Peak	Average	
2 402	1	9.33	6.57	20.97
2 441	1	9.03	5.86	
2 480	1	9.03	5.88	
2 402	2	8.52	3.45	20.97
2 441	2	8.42	3.42	
2 480	2	8.62	3.63	
2 402	3	8.82	3.34	20.97
2 441	3	8.52	3.13	
2 480	3	8.62	3.44	

KCTL

7.2. Carrier frequency separation

Test setup

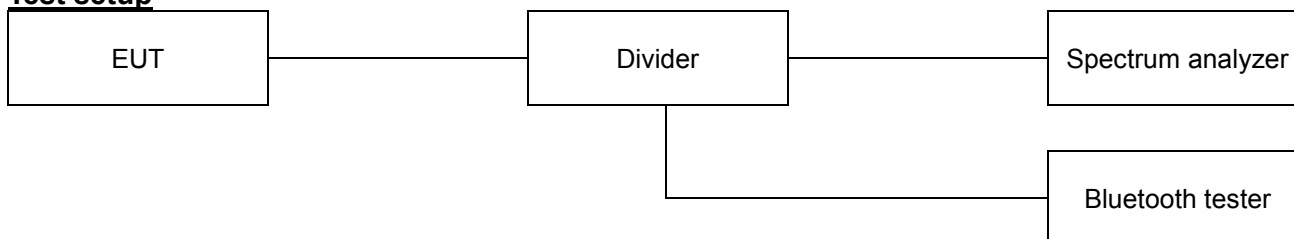

Limit

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test procedure

ANSI C63.10-2013 - Section 7.8.2

Test settings

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW) $\geq$ RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

Test results

Frequency(MHz)	Data rate(Mbps)	Carrier frequency separation(MHz)	Limit(MHz)
2 402	1	1.001	0.699
2 441	1	1.001	0.701
2 480	1	1.001	0.695
2 402	3	1.001	0.895
2 441	3	1.001	0.897
2 480	3	1.001	0.877

KCTL

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0056-A


Page (12) of (45)




GFSK

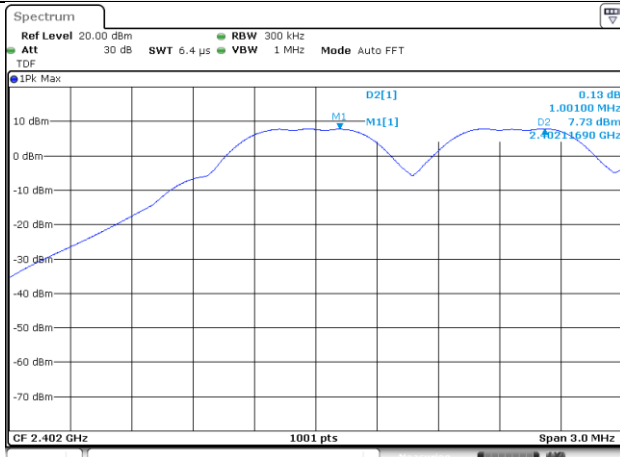


8DPSK

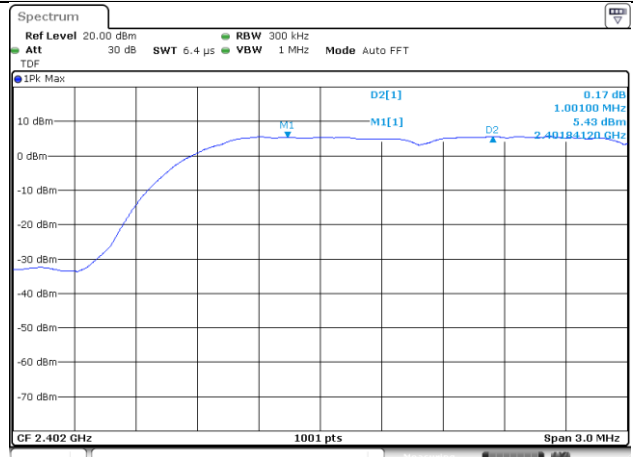


2 402 MHz

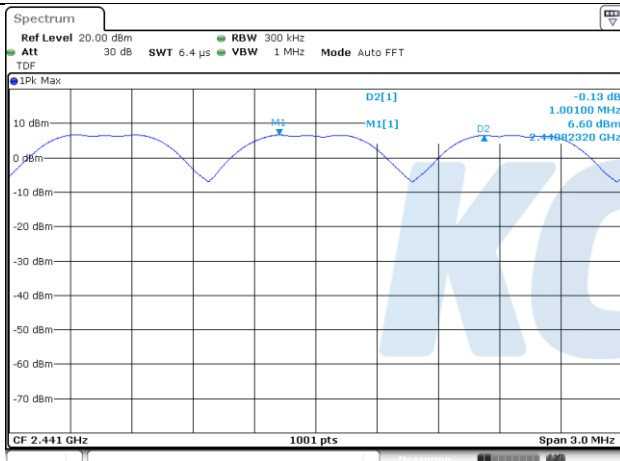


2 402 MHz

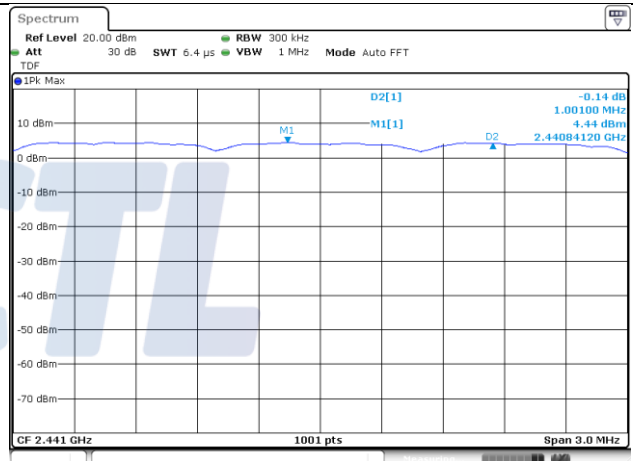

2 441 MHz

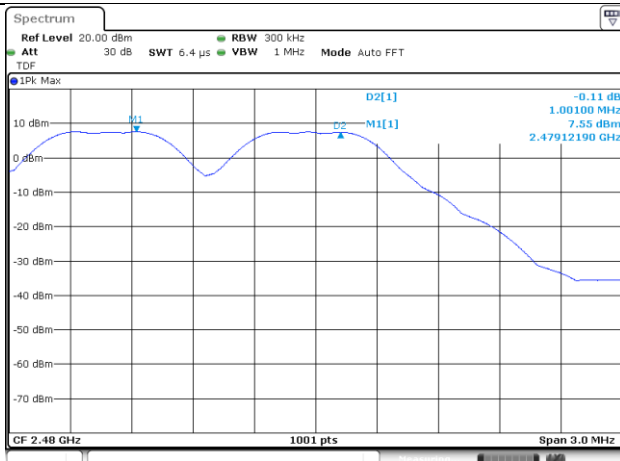

2 441 MHz

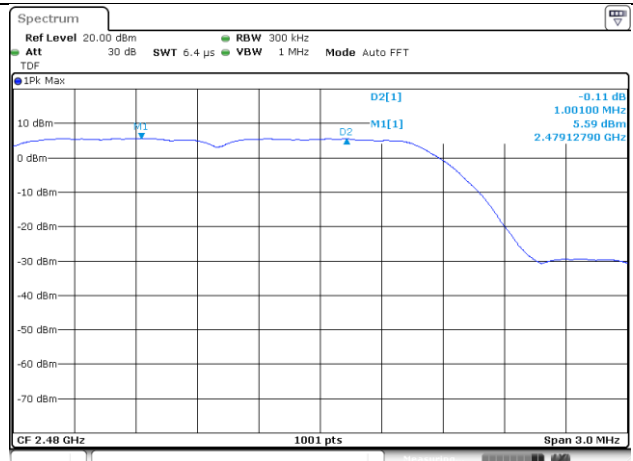

2 480 MHz


2 480 MHz

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

7.3. 20dB channel bandwidth

Test setup

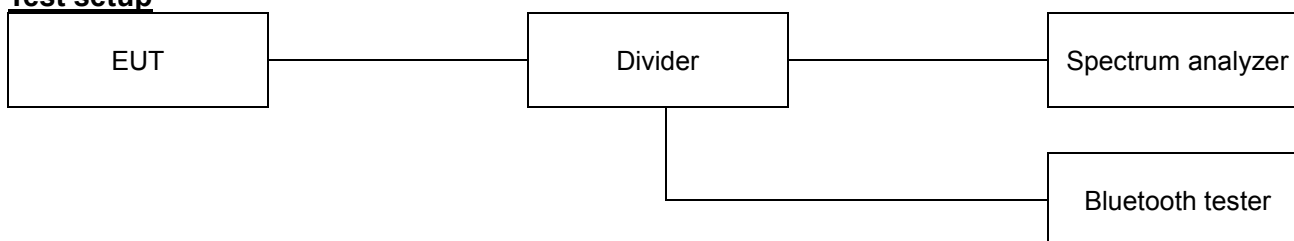

Limit

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test procedure

ANSI C63.10-2013 - Section 6.9.2

Test settings

The occupied bandwidth is measured as the width of the spectral envelope of the modulated signal, at an amplitude level reduced from a reference value by a specified ratio (or in decibels, a specified number of dB down from the reference value). Typical ratios, expressed in dB, are -6 dB, -20 dB, and -26 dB, corresponding to 6 dB BW, 20 dB BW, and 26 dB BW, respectively. In this subclause, the ratio is designated by “-xx dB.” The reference value is either the level of the unmodulated carrier or the highest level of the spectral envelope of the modulated signal, as stated by the applicable requirement. Some requirements might specify a specific maximum or minimum value for the “-xx dB” bandwidth; other requirements might specify that the “-xx dB” bandwidth be entirely contained within the authorized or designated frequency band.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
Span: Two times and five times the OBW.
- b) RBW = 1 % to 5 % of the OBW and VBW ≥ 3 x RBW
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation.
- d) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- e) Detector: peak
- f) Trace mode: max hold.
- g) Allow the trace to stabilize.
- h) Determine the “-xx dB down amplitude” using ((reference value) - xx). Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).

- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

Test results

Frequency(MHz)	Data rate(Mbps)	20 dB bandwidth(MHz)	Limit(MHz)
2 402	1	1.049	≥0.500
2 441	1	1.052	
2 480	1	1.043	
2 402	3	1.343	
2 441	3	1.346	
2 480	3	1.316	

KCTL

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0056-A

Page (15) of (45)




20 dB bandwidth(MHz)


GFSK

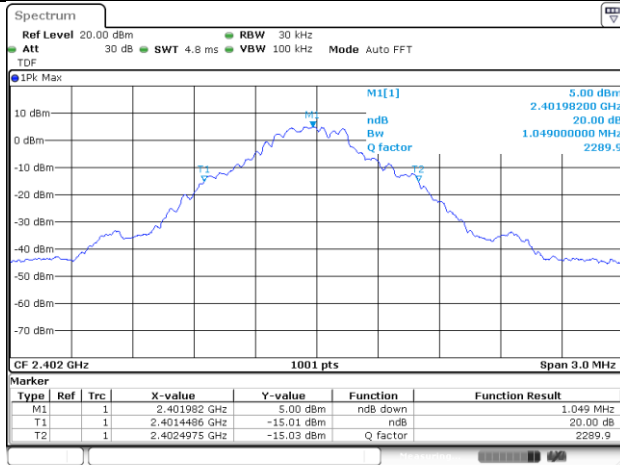


8DPSK

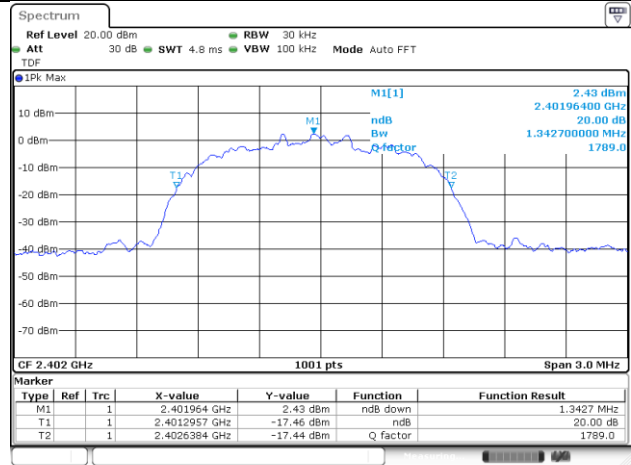


2 402 MHz

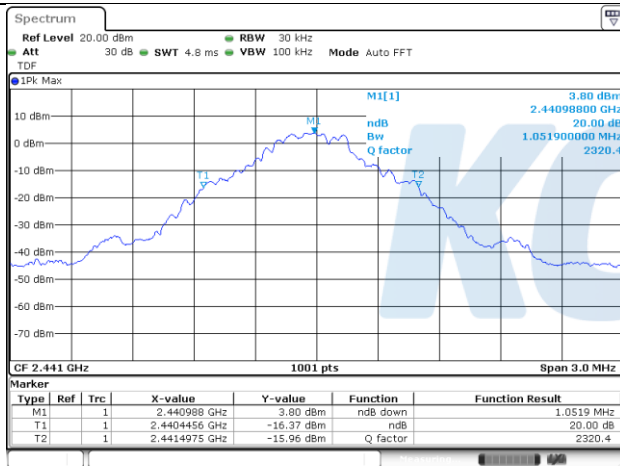


2 402 MHz

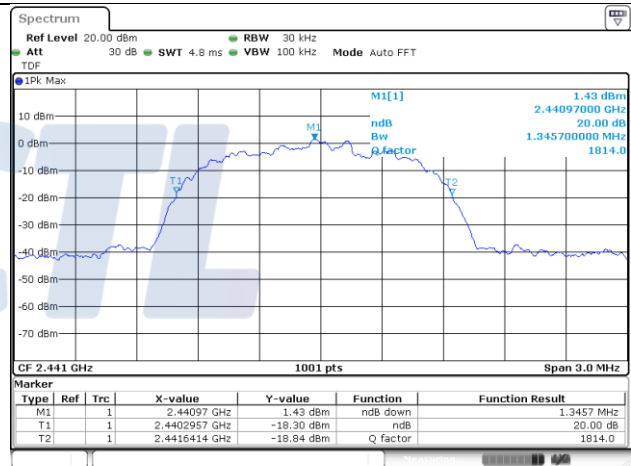

2 441 MHz

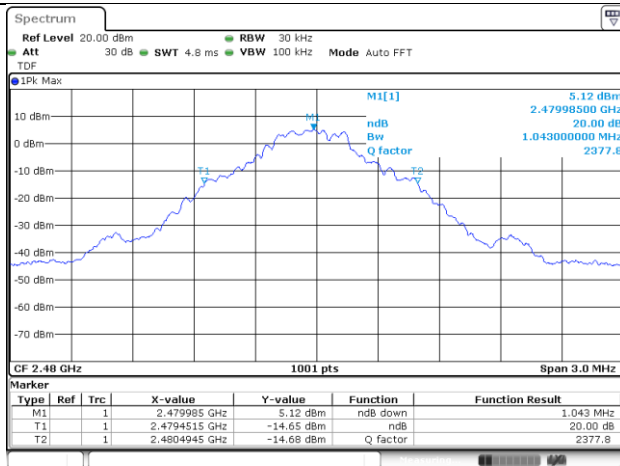

2 441 MHz

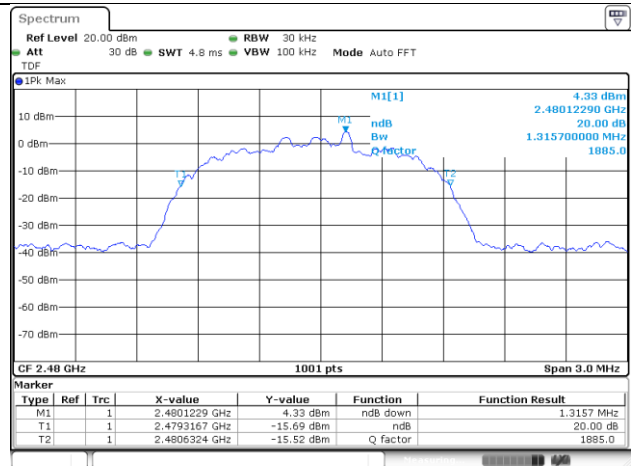

2 480 MHz


2 480 MHz

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

7.4. Number of hopping channels

Test setup

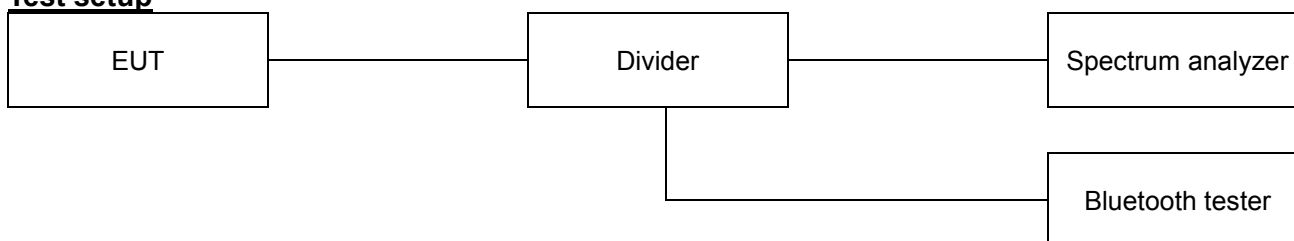

Limit

According to §15.247(a)(1)(iii), Frequency hopping systems in the 2 400-2 483.5 MHz band shall use at least 15 channels.

Test procedure

ANSI C63.10-2013 - Section 7.8.3

Test settings

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW $\geq$ RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

Test results

Mode	Number of hopping channel	Limit
GFSK	79	≥ 15
$\pi/4$ DQPSK	79	≥ 15
8DPSK	79	≥ 15

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0056-A


Page (17) of (45)




Non-AFH

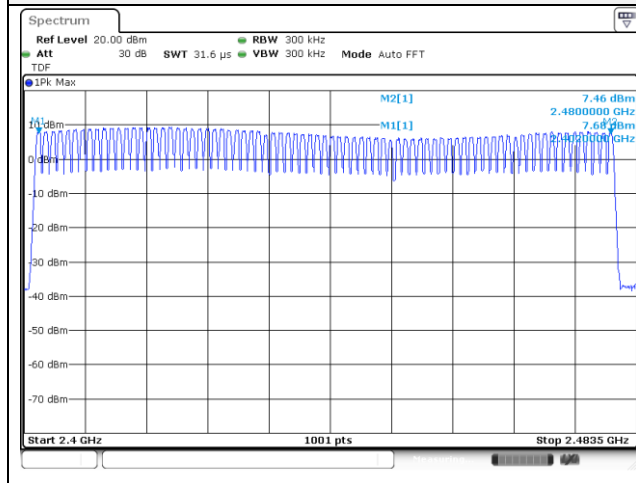

GFSK

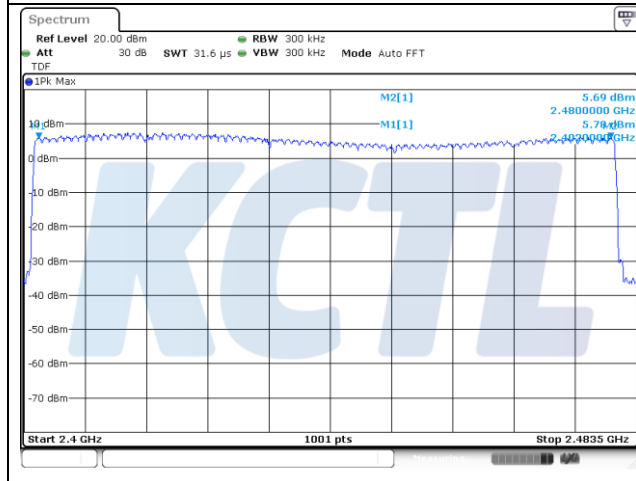


$\pi/4$ DQPSK

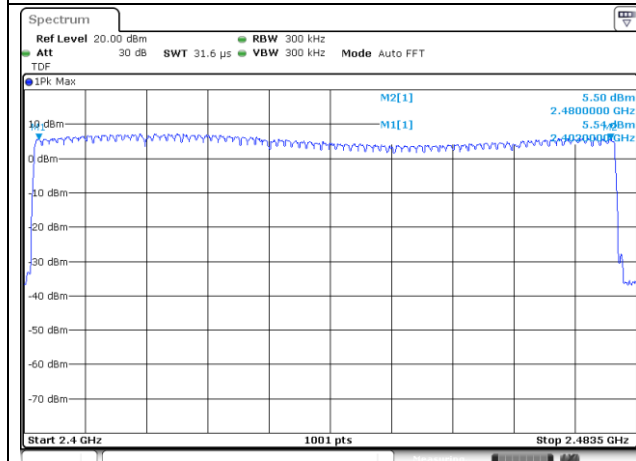

8DPSK

7.5. Time of occupancy(Dwell time)

Test setup

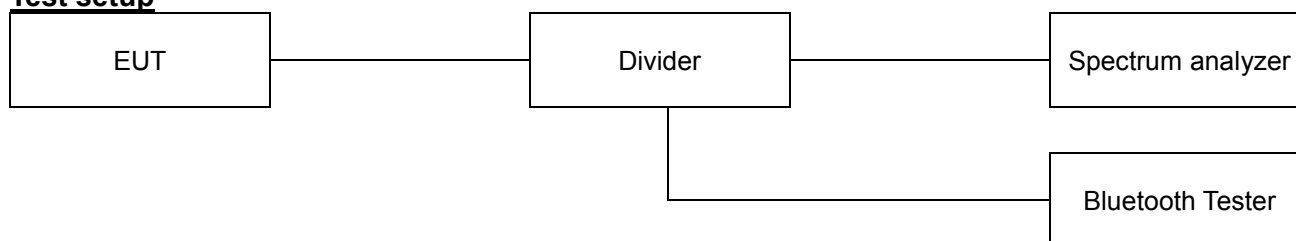

Limit

According to §15.247(a)(1)(iii), frequency hopping systems in the 2 400-2 483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test procedure

ANSI C63.10-2013 - Section 7.8.4

Test settings

- Span: Zero span, centered on a hopping channel.
- RBW $\leq$ channel spacing and $\gg 1 / T$, where T is the expected dwell time per channel.
- Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- Detector function: Peak.
- Trace: Max hold.
- Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Test results**- Non-AFH**

Modulation	Frequency (MHz)	Pulse Width (ms)	Hopping rate (hop/s)	Number of Channels	Result (s)	Limit (s)
DH1	2 441	0.383	800.000	79	0.123	0.400
DH3	2 441	1.640	400.000	79	0.262	0.400
DH5	2 441	2.893	266.667	79	0.309	0.400
2-DH1	2 441	0.389	800.000	79	0.124	0.400
2-DH3	2 441	1.642	400.000	79	0.263	0.400
2-DH5	2 441	2.893	266.667	79	0.309	0.400
3-DH1	2 441	0.389	800.000	79	0.124	0.400
3-DH3	2 441	1.640	400.000	79	0.262	0.400
3-DH5	2 441	2.897	266.667	79	0.309	0.400

- AFH

Modulation	Frequency (MHz)	Pulse Width (ms)	Hopping rate (hop/s)	Number of Channels	Result (s)	Limit (s)
DH1	2 441	0.383	400.000	20	0.061	0.400
DH3	2 441	1.640	200.000	20	0.131	0.400
DH5	2 441	2.893	133.333	20	0.154	0.400
2-DH1	2 441	0.389	400.000	20	0.062	0.400
2-DH3	2 441	1.642	200.000	20	0.131	0.400
2-DH5	2 441	2.893	133.333	20	0.154	0.400
3-DH1	2 441	0.389	400.000	20	0.062	0.400
3-DH3	2 441	1.640	200.000	20	0.131	0.400
3-DH5	2 441	2.897	133.333	20	0.154	0.400

Notes:

1. Non-AFH

- Period Time: 0.4 sec x 79 channels = 31.6 sec
- Result (s)= (Hopping rate (hop/s/slot) / 79 channels) x 31.6 sec x Pulse width (ms)

2. AFH

- Period Time: 0.4 sec x 20 channels = 8 sec
- Result (s)= (Hopping rate (hop/s/slot) / 20 channels) x 8 sec x Pulse width (ms)

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0056-A


Page (20) of (45)




Non-AFH(GFSK)

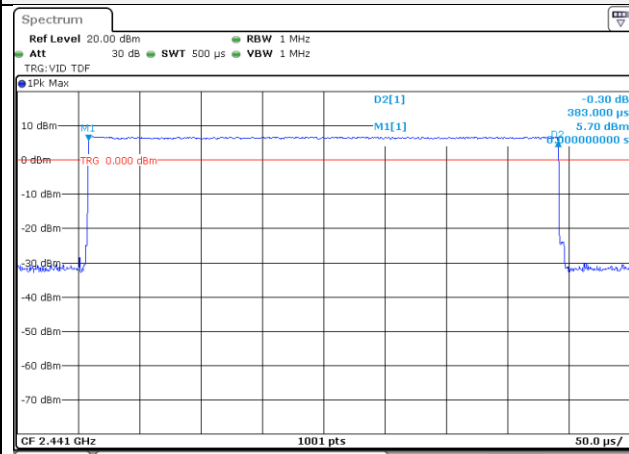


Non-AFH(π /4DQPSK)

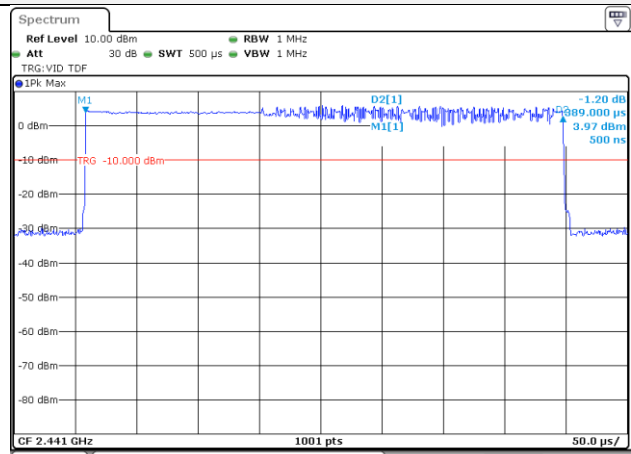


DH1

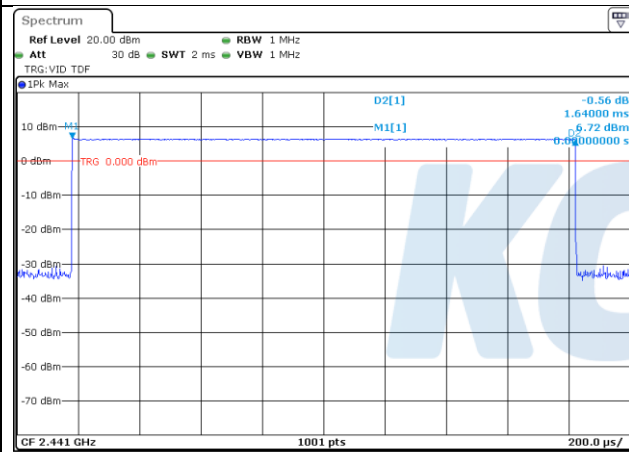


2-DH1

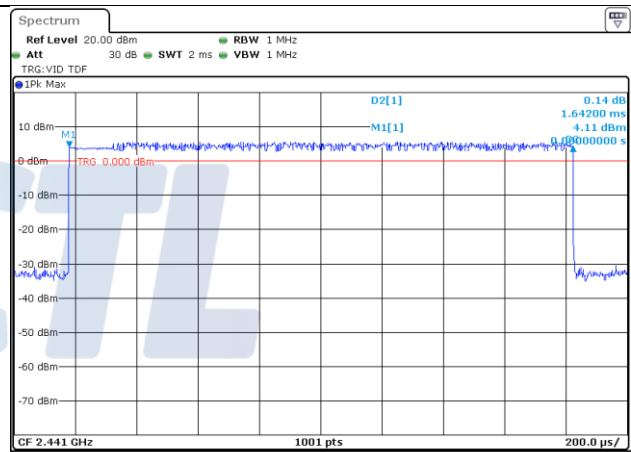

DH3

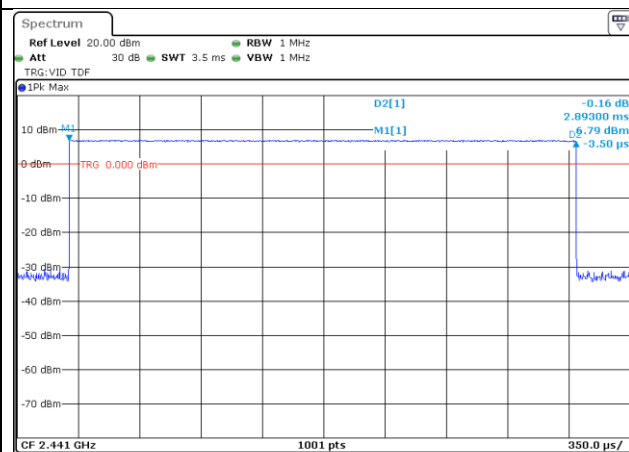

2-DH3

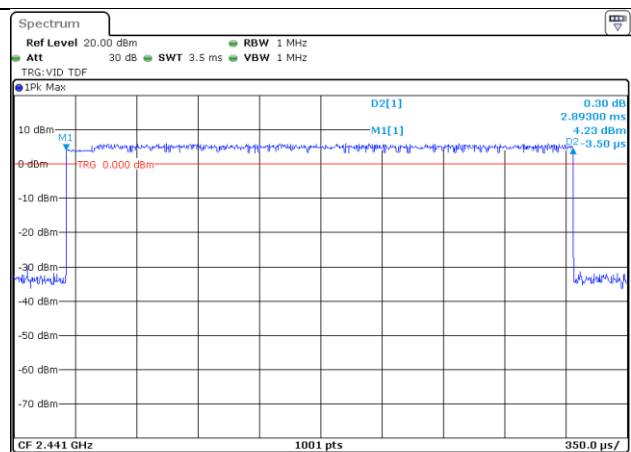

DH5

2-DH5

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0056-A


Page (21) of (45)




Non-AFH(8DPSK)

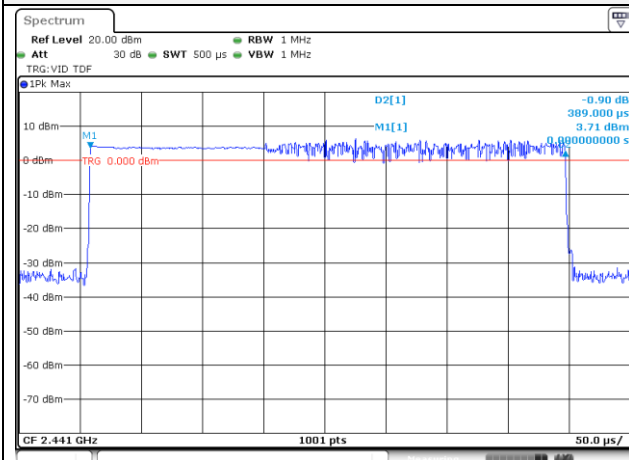


AFH(GFSK)

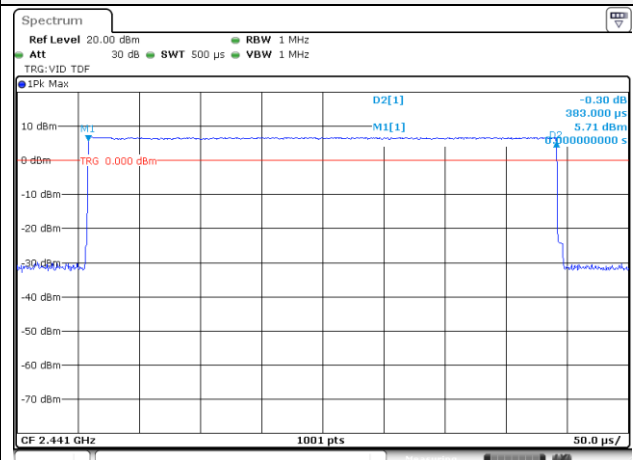


3-DH1

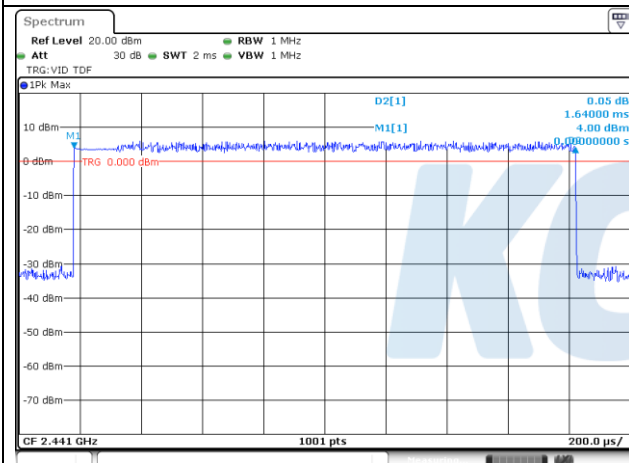


DH1

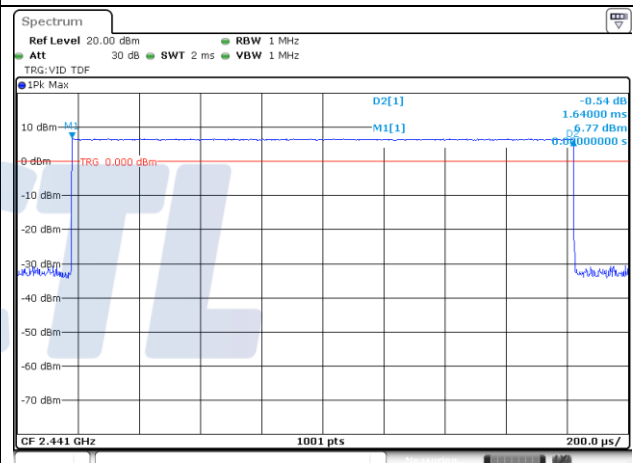

3-DH3

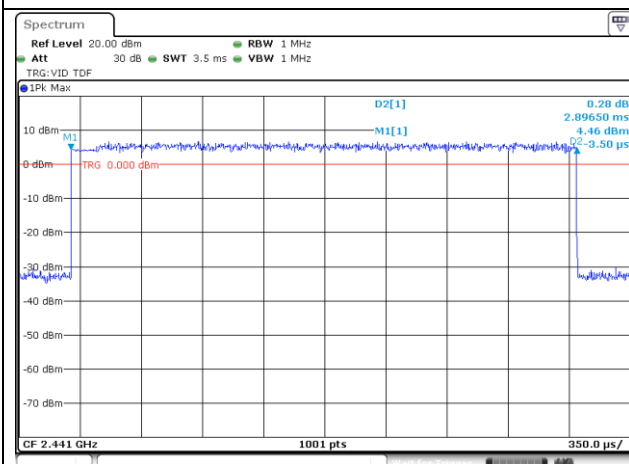

DH3

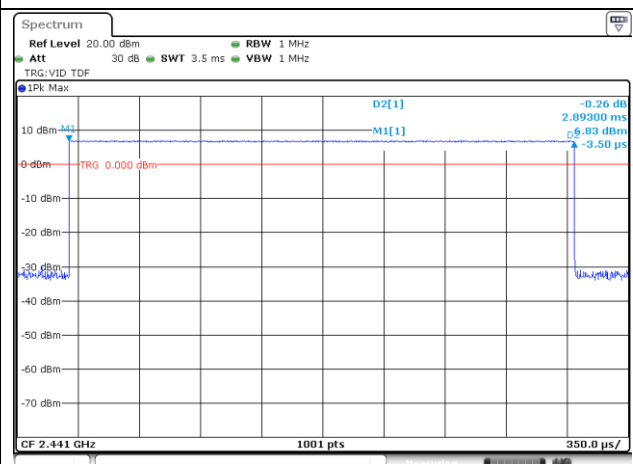

3-DH5




DH5




This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2


AFH($\pi/4$ DQPSK)

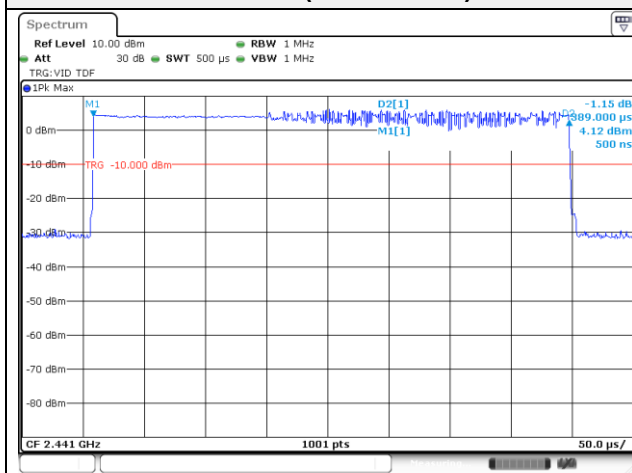


AFH(8DPSK)

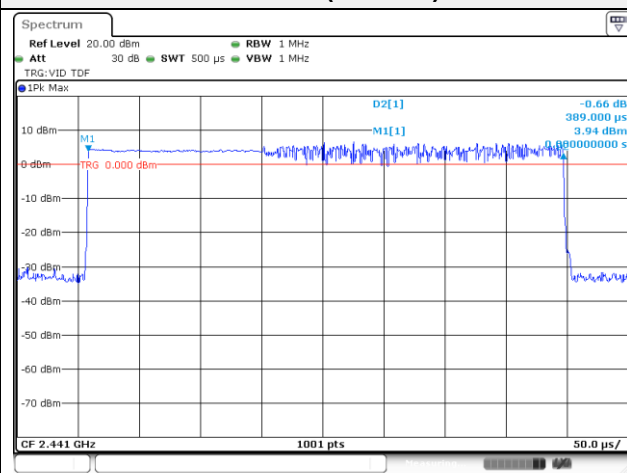


2-DH1

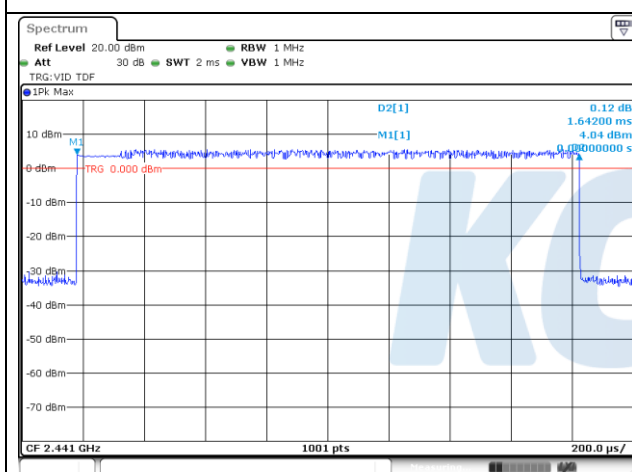


3-DH1

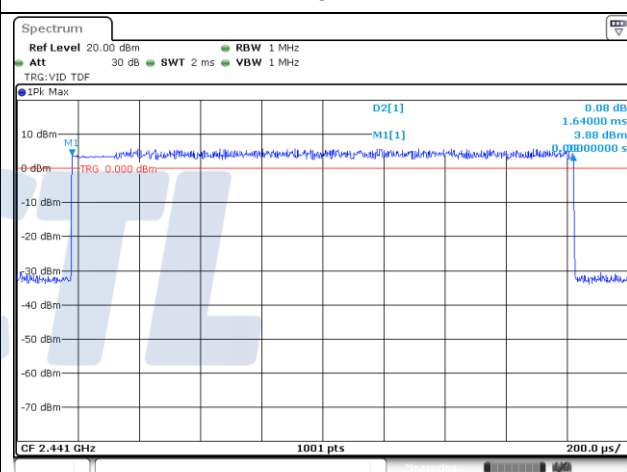

2-DH3

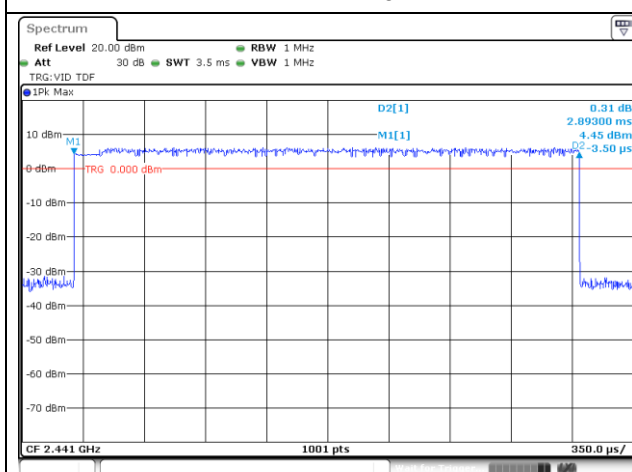

3-DH3

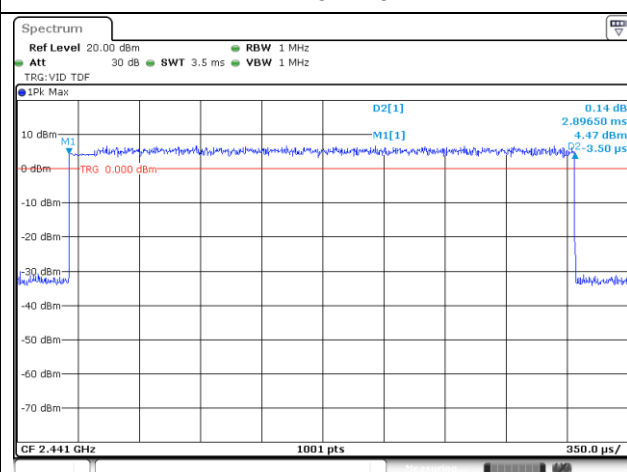


2-DH5

3-DH5


7.6. Radiated spurious emissions & band edge

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions

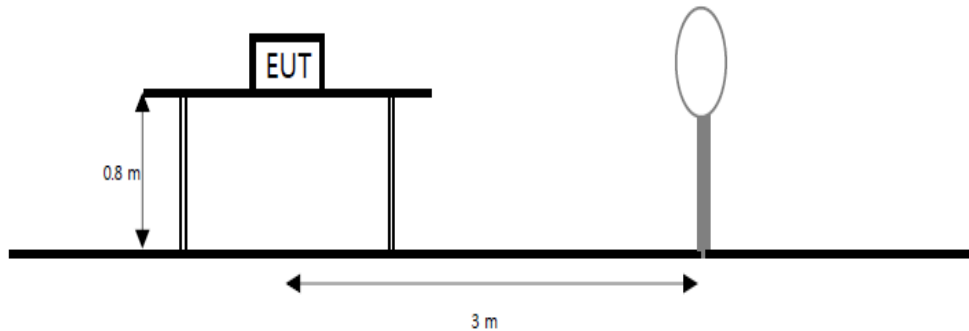

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

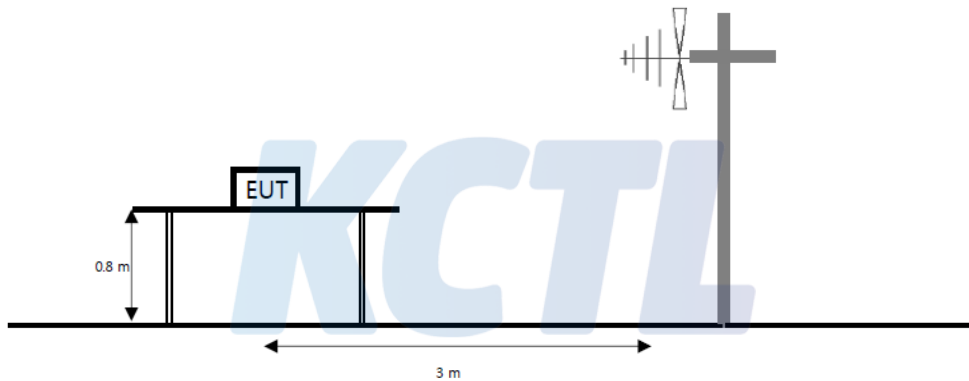

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

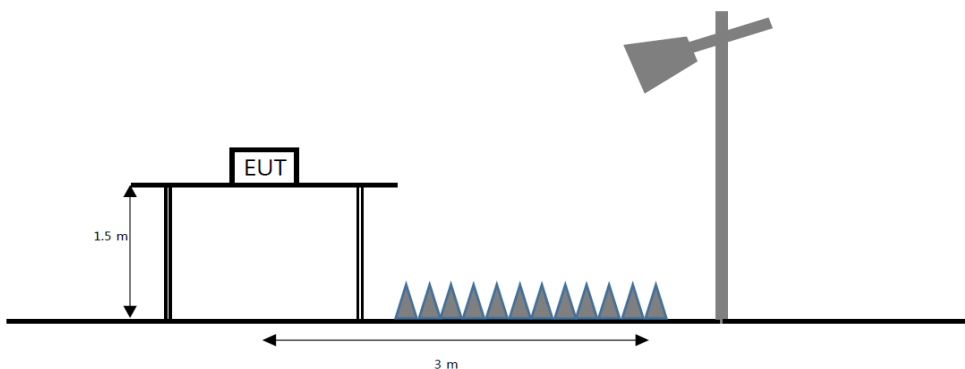

Limit

According to section 15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength ($\mu V/m$)	Measurement distance (m)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	25	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	156.7 - 156.9	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	162.012 5 - 167.17	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	167.72 - 173.2	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	240 - 285	3 600 - 4 400	Above 38.6
13.36 - 13.41	322 - 335.4		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

Test procedure

ANSI C63.10-2013

Test settings**Peak field strength measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW $\geq (3 \times \text{RBW})$
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

Table. RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1 000 MHz	100 kHz to 120 kHz
> 1 000 MHz	1 MHz

Average field strength measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = $1/T \geq 1$ Hz
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to run for at least 50 times(1/duty cycle) traces

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz ($\geq 1/T$) for Average detection (AV) at frequency above 1 GHz. (where T = pulse width)
2. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40 \log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20 \log(D_m/D_s)$

Where:

 F_d = Distance factor in dB D_m = Measurement distance in meters D_s = Specification distance in meters

3. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
4. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
5. Average test would be performed if the peak result were greater than the average limit.
6. ¹⁾ mean is restricted band.

7. According to part 15.31(f)(2), an extrapolation factor of 40 dB/decade is applied because measured distance of radiated emission is 3 m.

Duty cycle correction factor calculation:

According to 7.5 Procedure for determining the average value of pulsed emissions

Duty Cycle Correction Factor Calculation

- Worst case : AFH mode
- Channel hop rate = 800 hops/second
- Hopping rate for DH5 mode = 800 hops/second / 5 (6 slots for DH5) = 133.33 hops/second
- Time per channel hop = $1 / 133.33 \text{ hops/second} = 7.50 \text{ ms}$
- Time to cycle through all channels = $7.50 \times 20 \text{ channels(AFH mode)} = 150 \text{ ms}$
- Number of times transmitter hits on one channel = $100 \text{ ms} / \text{Time to cycle through all channels (ms)}$
 $= 100 \text{ ms} / 150 \text{ ms} = 1 \text{ time}$
- Worst case Dwell time = 7.5 ms
- Duty Cycle Correction Factor = $20\log(7.5 \text{ ms}/100 \text{ ms}) = -22.5 \text{ dB}$

KCTL

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0056-A

Page (27) of (45)

KCTL**Test results (Below 30 MHz) – Worst case: GFSK Low frequency**

Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
No spurious emissions were detected within 20 dB of the limit.									

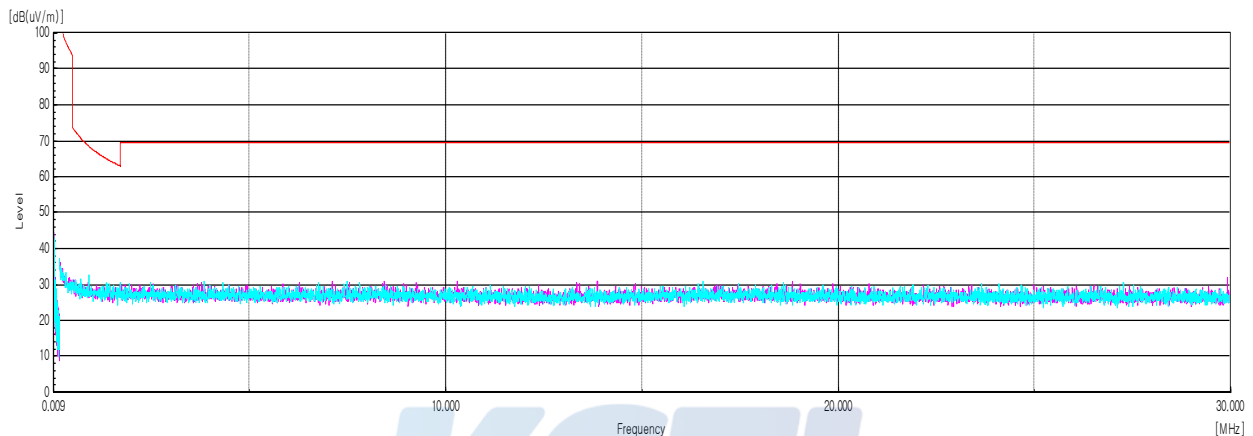Horizontal/Vertical

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0056-A

Page (28) of (45)


Test results (Below 1 000 MHz) – Worst case: GFSK Low frequency

Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Quasi peak data									
36.67	H	29.80	1.21	-27.08	12.67	-	16.60	40.00	23.40
160.22	V	28.00	2.77	-26.35	13.18	-	17.60	43.50	25.90
395.93	V	22.90	4.54	-26.05	15.61	-	17.00	46.00	29.00
438.37	H	22.50	4.78	-25.82	16.54	-	18.00	46.00	28.00
881.78	V	22.20	6.94	-25.86	23.42	-	26.70	46.00	19.30

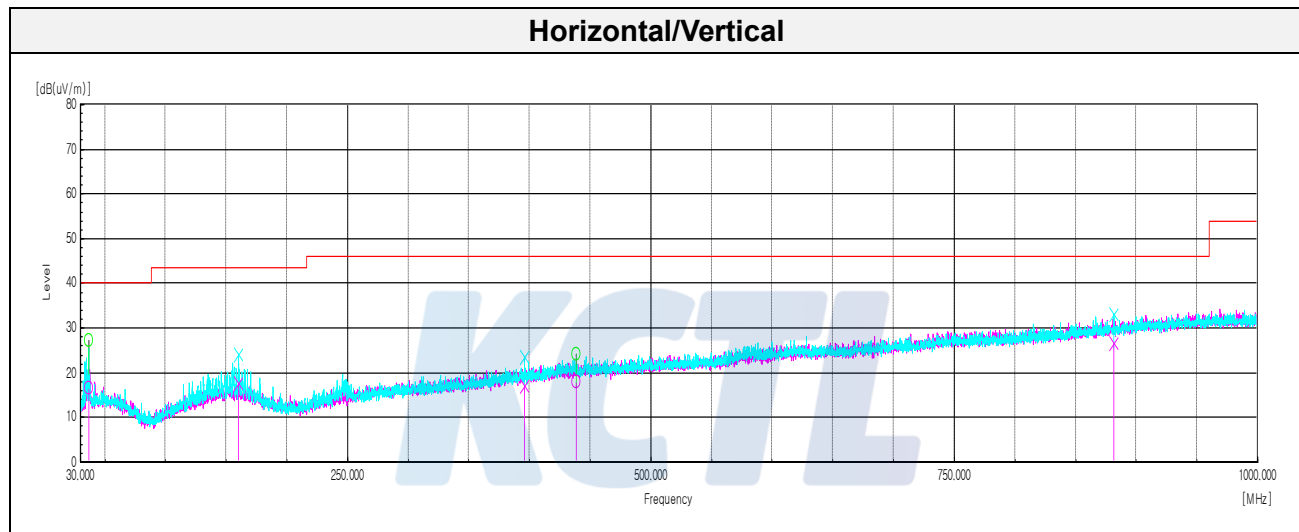Horizontal/Vertical


+

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr




Report No.:
KR19-SRF0056-A

Page (29) of (45)

**Test results (Above 1 000 MHz)****GFSK****Low Channel**

Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data									
1 980.55	V	55.54	3.41	-36.19	27.72	-	50.48	74.00	23.52
2 389.45 ¹⁾	H	43.13	3.70	-36.22	28.54	-	39.15	74.00	34.85
4 355.95 ¹⁾	V	67.88	5.03	-60.99	32.58	-	44.50	74.00	29.50
14 830.84	V	60.46	9.73	-59.25	40.42	-	51.36	74.00	22.64
Average Data									
No spurious emissions were detected within 20 dB of the limit.									



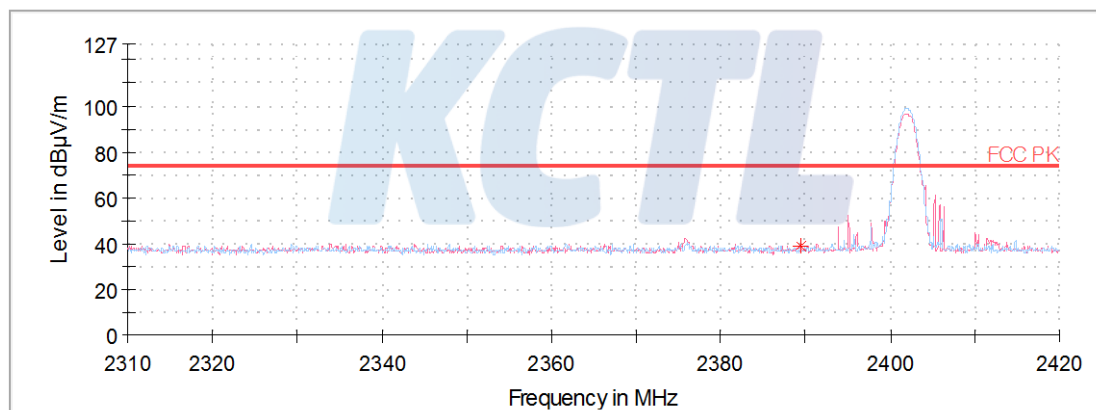
Horizontal/Vertical for Band-edge

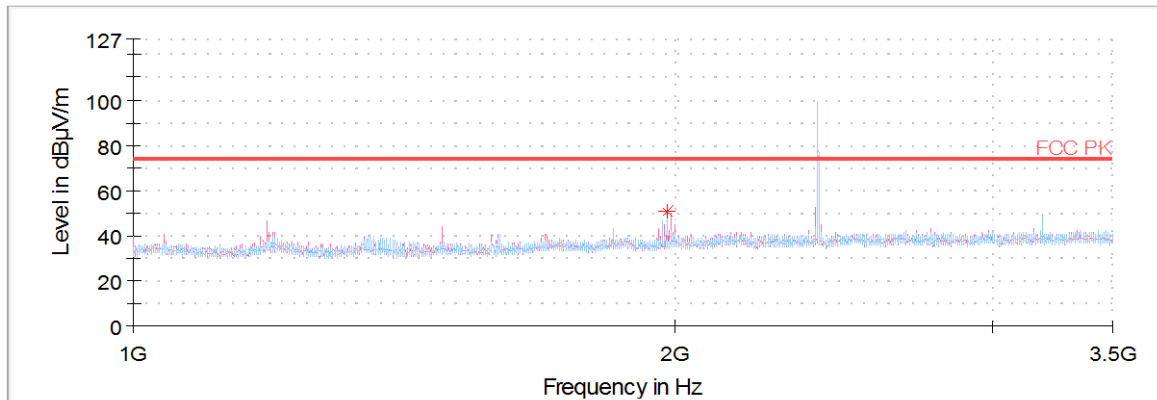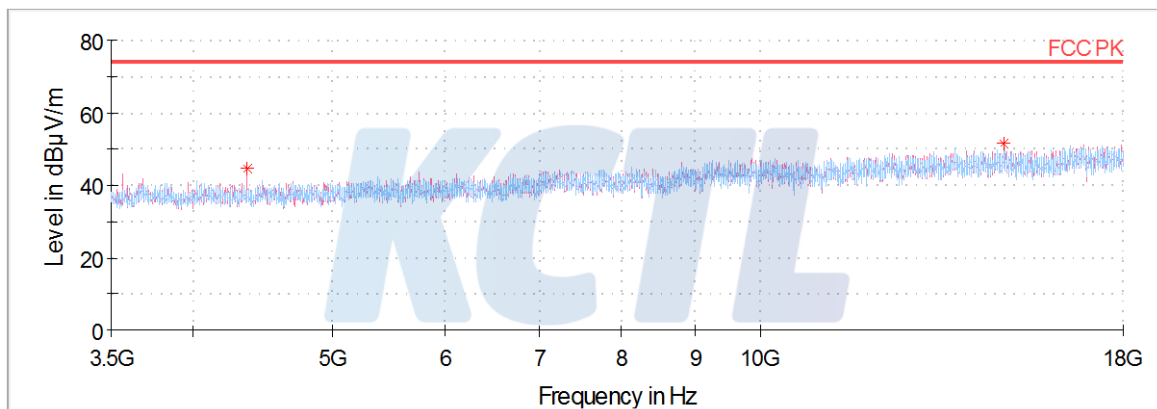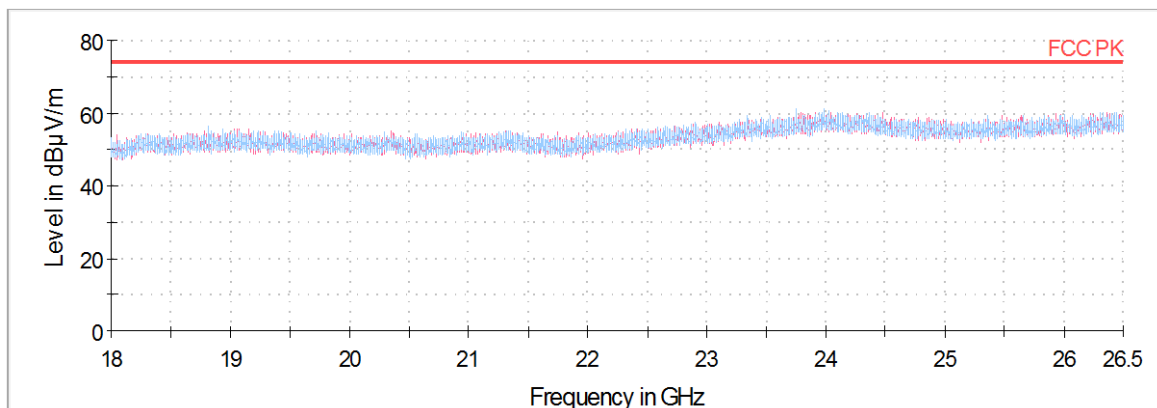Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

Middle Channel

Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data									
1 980.08	V	57.30	3.41	-36.19	27.72	-	52.24	74.00	21.76
3 997.98 ¹⁾	V	66.23	4.78	-61.18	32.39	-	42.21	74.00	31.79
16 537.31	H	59.26	10.28	-56.84	39.00	-	51.70	74.00	22.30
Average Data									
No spurious emissions were detected within 20 dB of the limit.									

KCTL

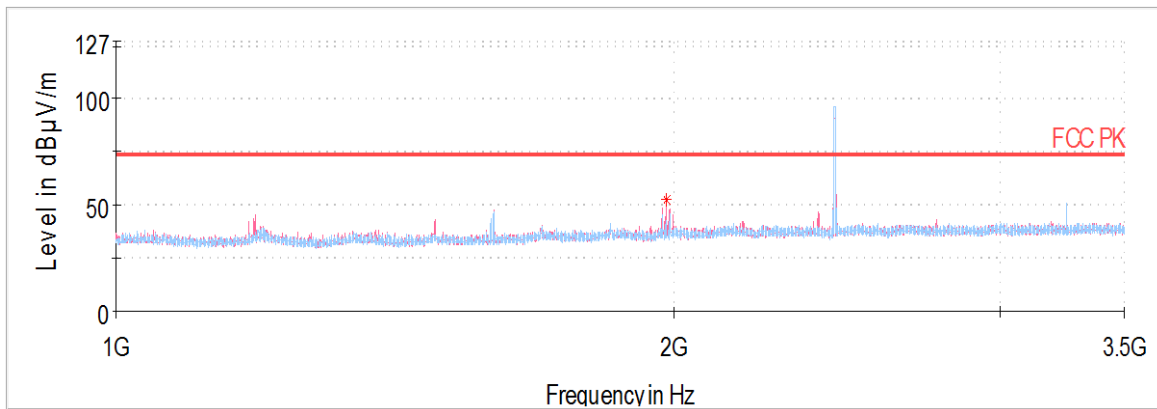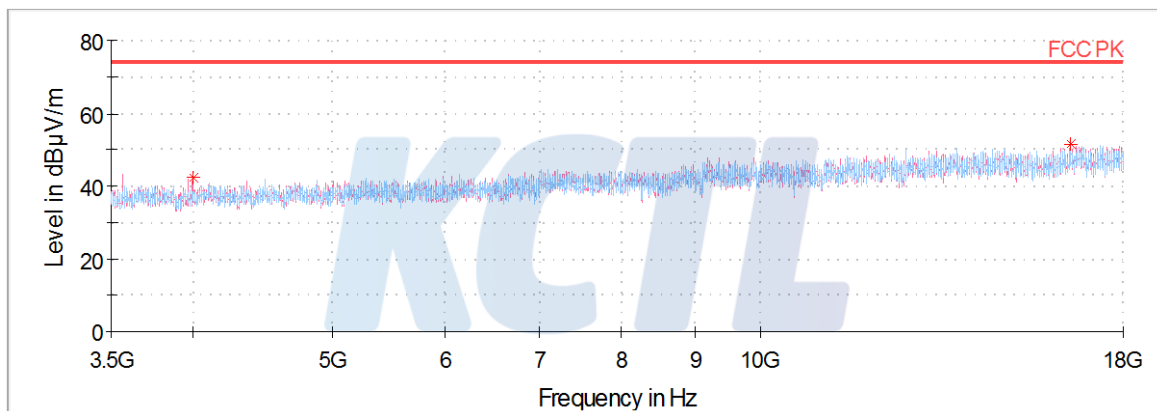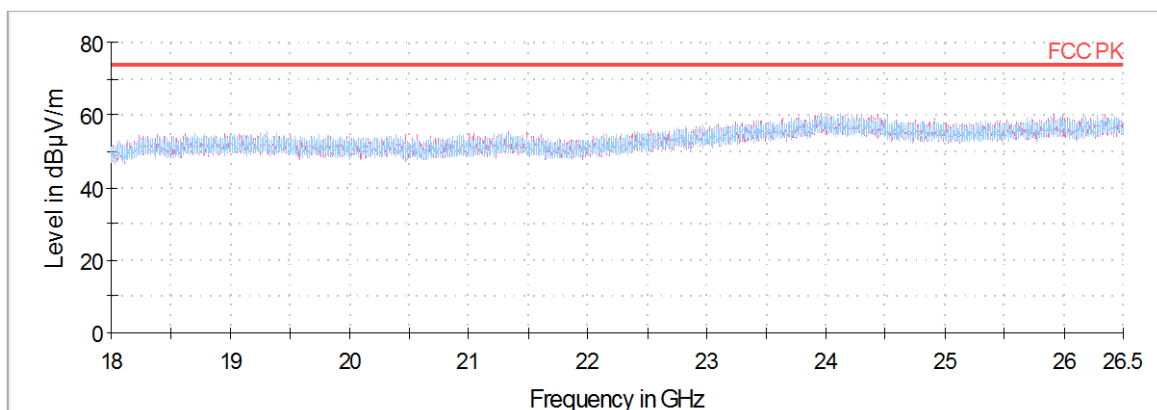Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr




Report No.:
KR19-SRF0056-A

Page (33) of (45)

**High Channel**

Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data									
1 979.69	V	55.68	3.41	-36.19	27.72	-	50.62	74.00	23.38
2 485.47 ¹⁾	H	48.49	3.77	-35.91	28.72	-	45.07	74.00	28.93
4 355.50 ¹⁾	V	66.42	5.03	-60.99	32.58	-	43.05	74.00	30.95
Average Data									
No spurious emissions were detected within 20 dB of the limit.									

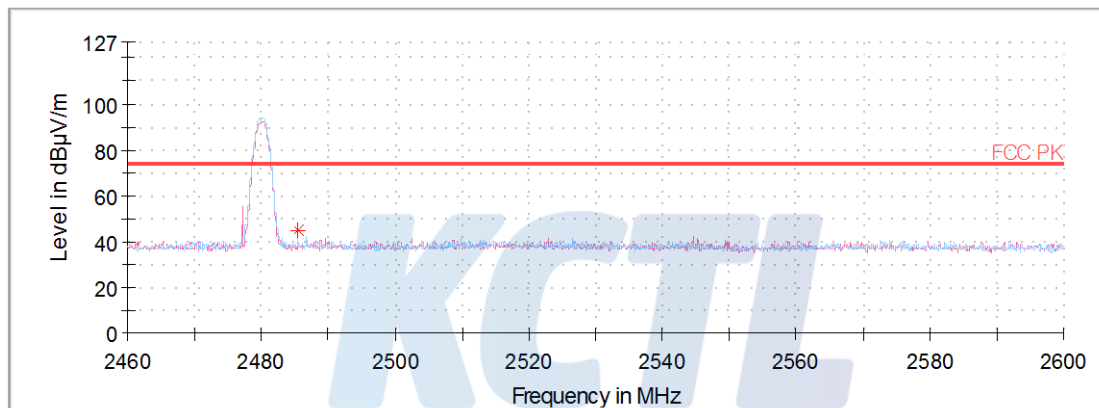Horizontal/Vertical for Band-edge

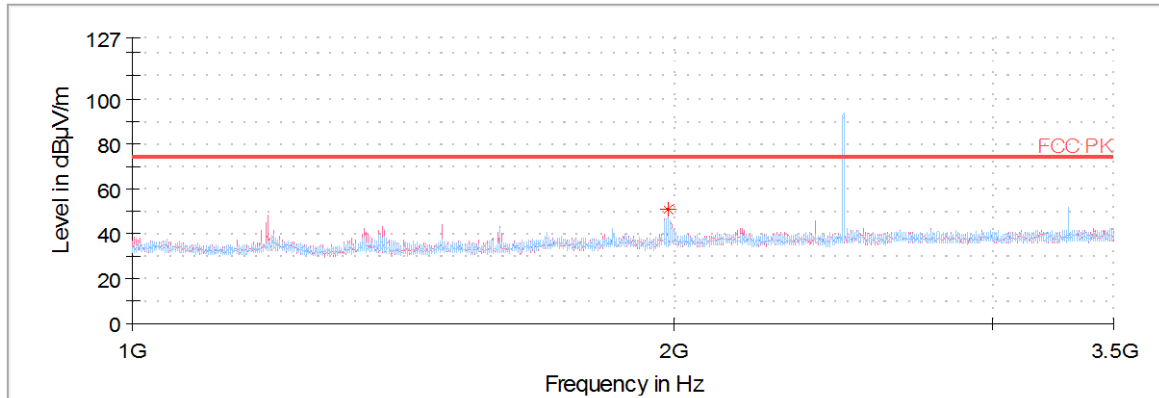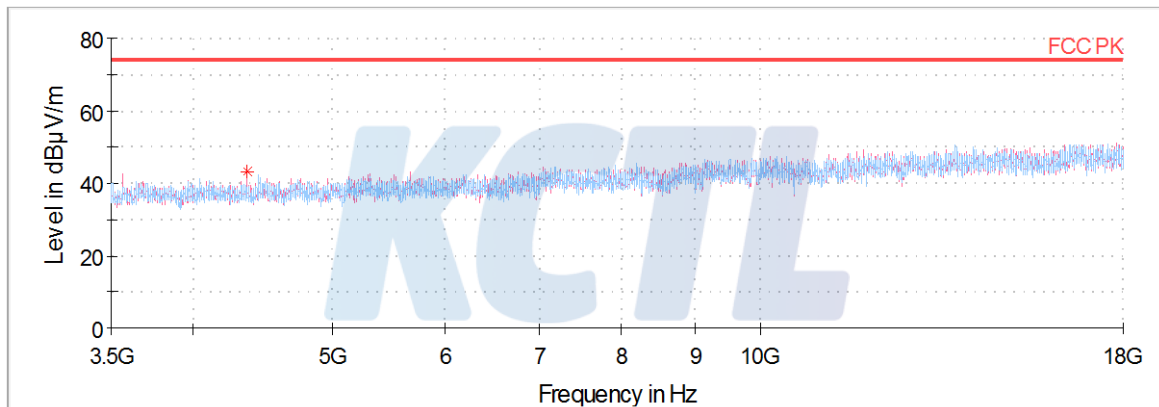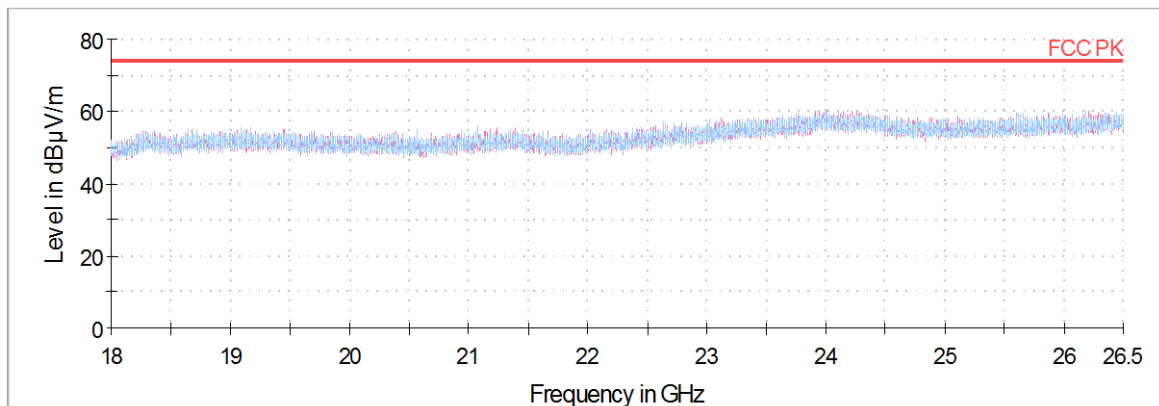Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr




Report No.:
KR19-SRF0056-A

Page (35) of (45)

**8DPSK****Low Channel**

Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data									
1 595.70 ¹⁾	V	53.57	3.04	-37.42	26.18	-	45.37	74.00	28.63
2 376.48 ¹⁾	V	46.22	3.69	-36.26	28.52	-	42.17	74.00	31.83
3 959.92 ¹⁾	V	66.13	4.76	-61.14	32.29	-	42.04	74.00	31.96
15 932.39 ¹⁾	V	58.71	10.10	-56.56	37.69	-	49.94	74.00	24.06
Average Data									
No spurious emissions were detected within 20 dB of the limit.									



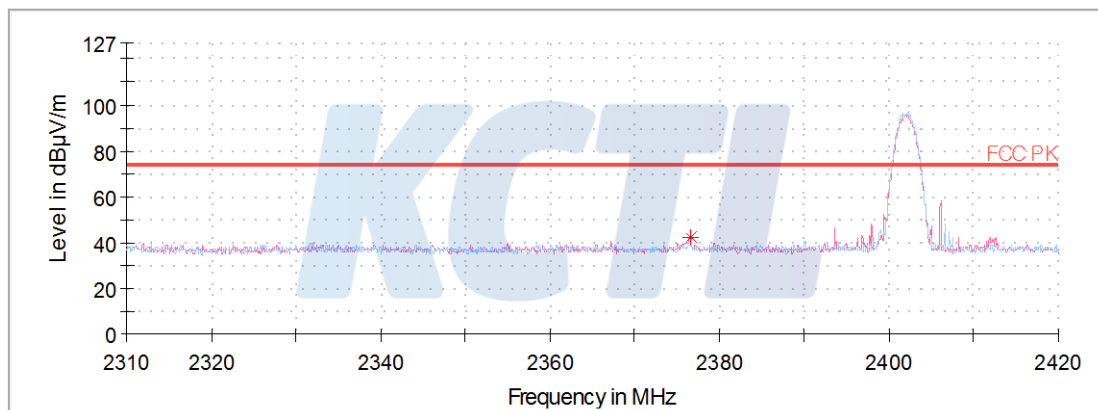
Horizontal/Vertical for Band-edge

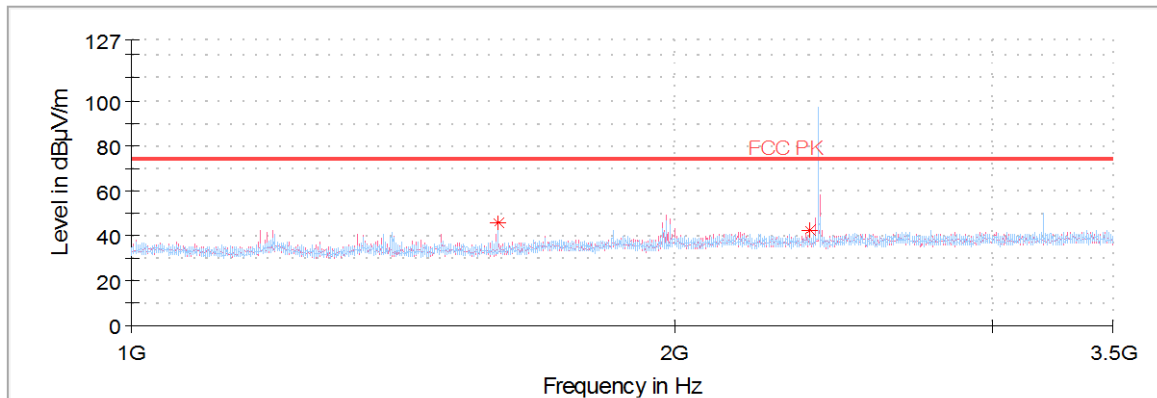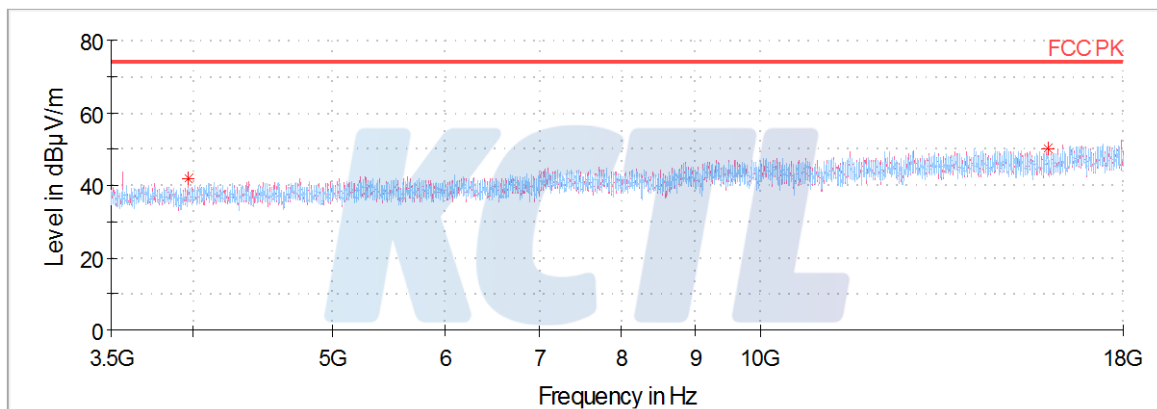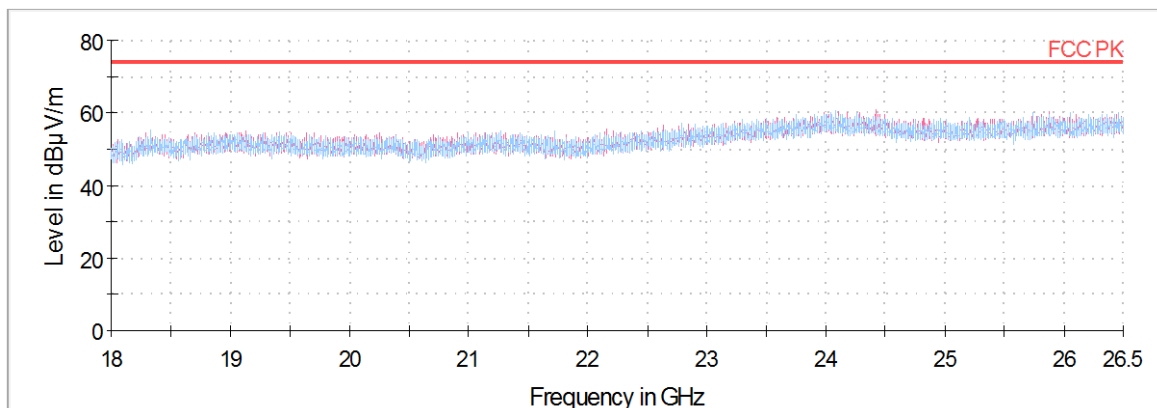Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

Middle Channel

Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data									
1 980.08	V	52.95	3.41	-36.19	27.72	-	47.89	74.00	26.11
3 563.89	V	68.14	4.50	-60.63	31.22	-	43.22	74.00	30.78
16 863.56	H	59.01	10.38	-57.64	39.92	-	51.67	74.00	22.33
Average Data									
No spurious emissions were detected within 20 dB of the limit.									

KCTL

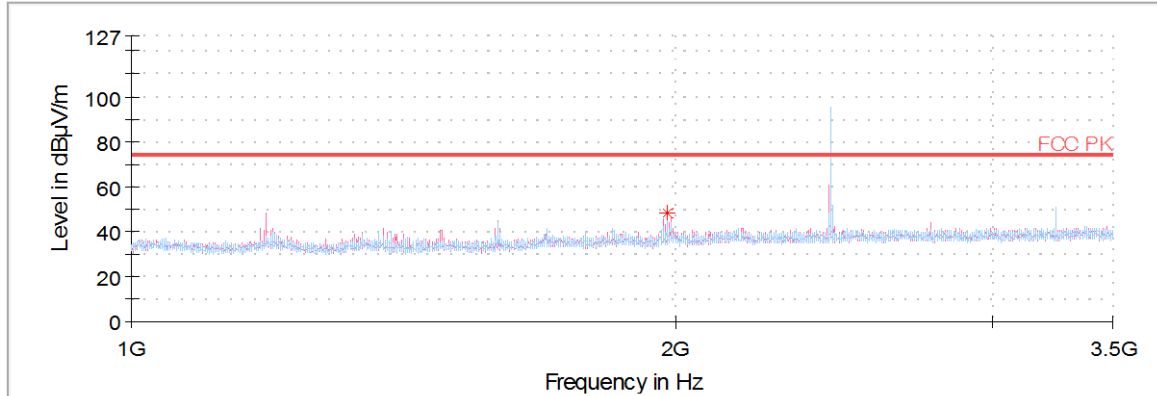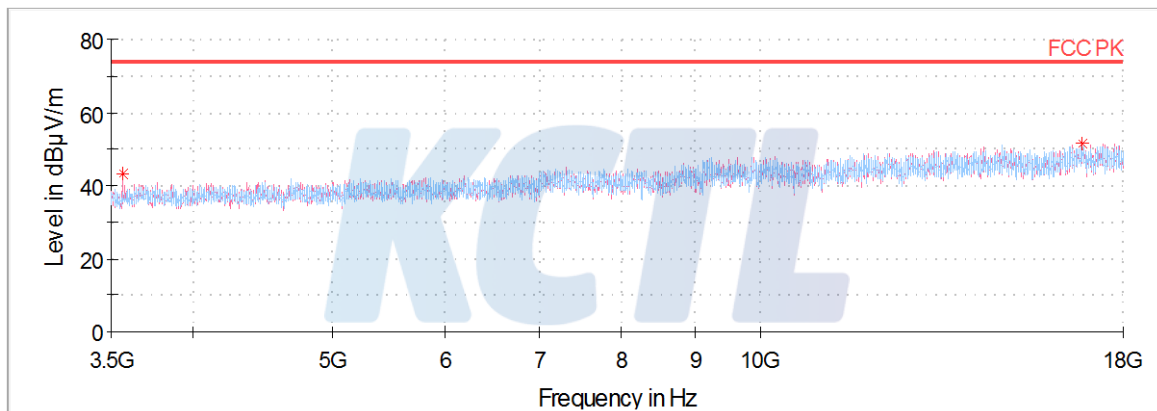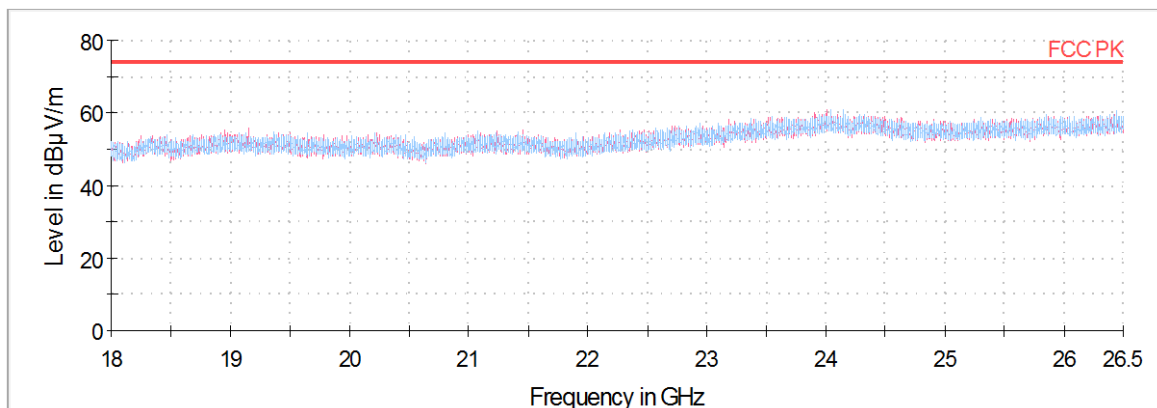Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr




Report No.:
KR19-SRF0056-A

Page (39) of (45)

**High Channel**

Frequency (MHz)	Pol. (V/H)	Reading (dB(μV))	Cable Loss (dB)	Amp Gain (dB)	Antenna Factor (dB)	DCCF (dB)	Result (dB(μV/m))	Limit (dB(μV/m))	Margin (dB)
Peak data									
1 599.22 ¹⁾	V	56.86	3.04	-37.42	26.20	-	48.68	74.00	25.32
2 485.78 ¹⁾	V	49.42	3.77	-35.91	28.72	-	46.00	74.00	28.00
3 563.89	V	69.85	4.50	-60.63	31.22	-	44.94	74.00	29.06
16 520.55	V	60.19	10.28	-56.81	38.96	-	52.62	74.00	21.38
Average Data									
No spurious emissions were detected within 20 dB of the limit.									

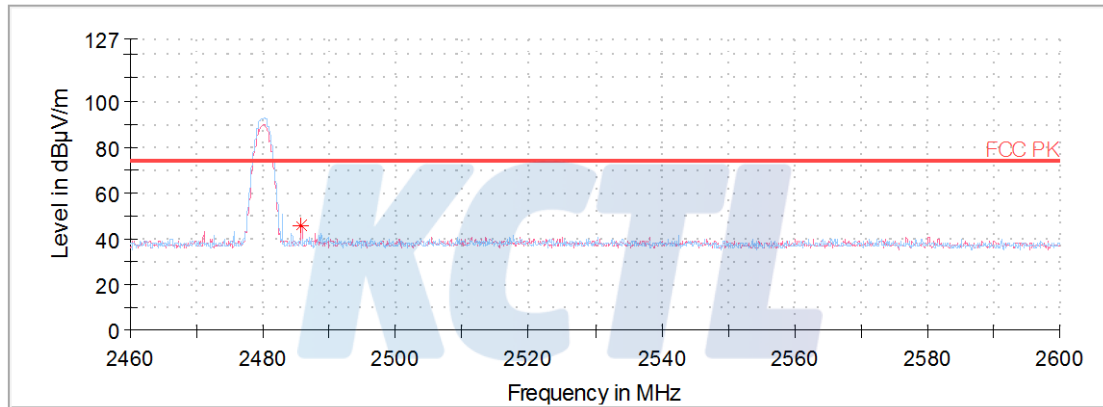Horizontal/Vertical for Band-edge

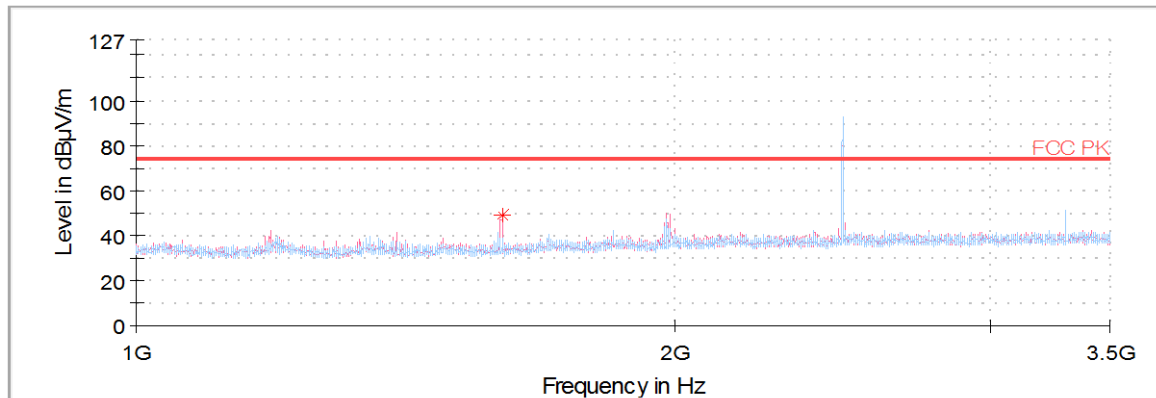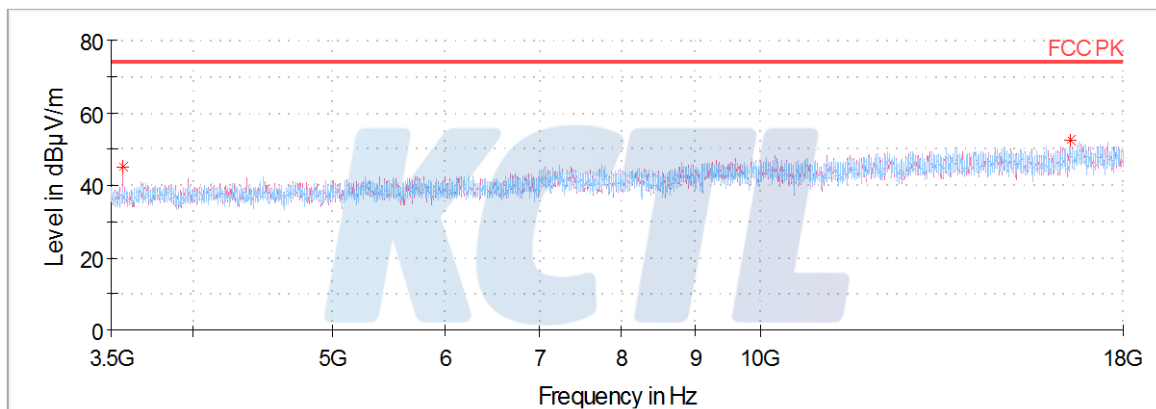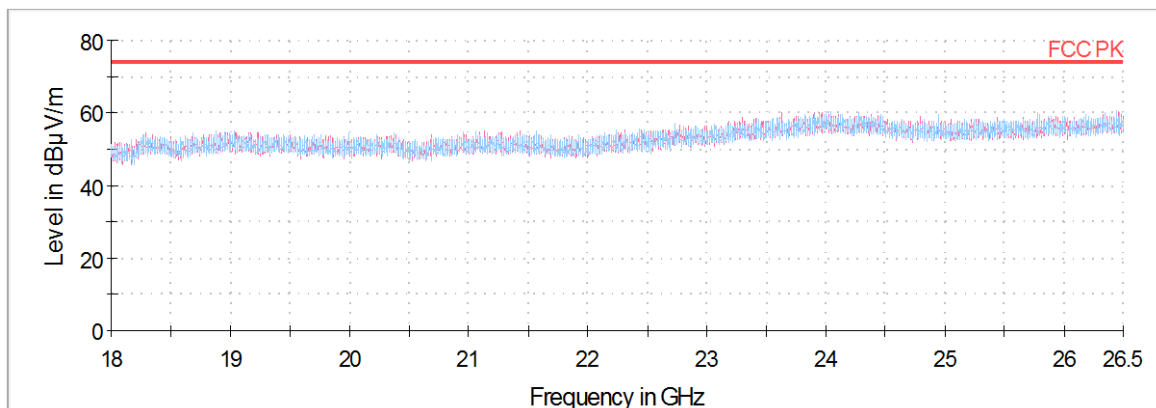Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0056-A


Page (41) of (45)




Test results

GFSK


Conducted band-edge

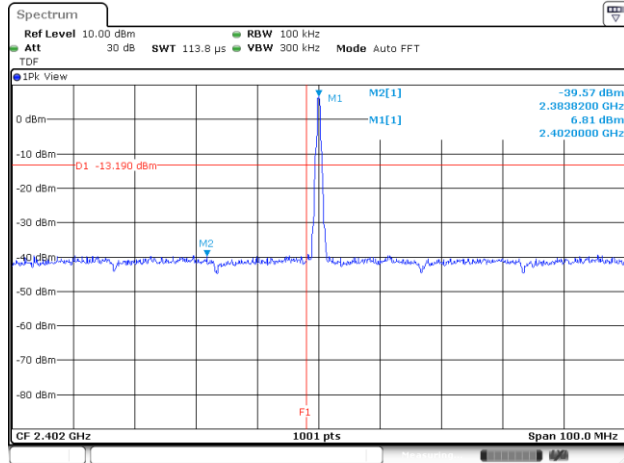

Lowest

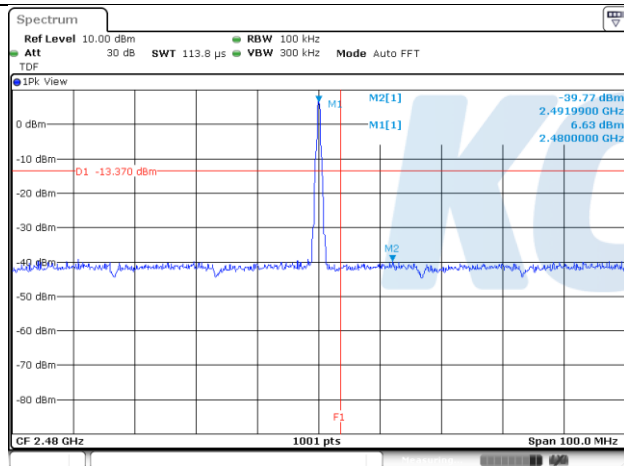


Highest

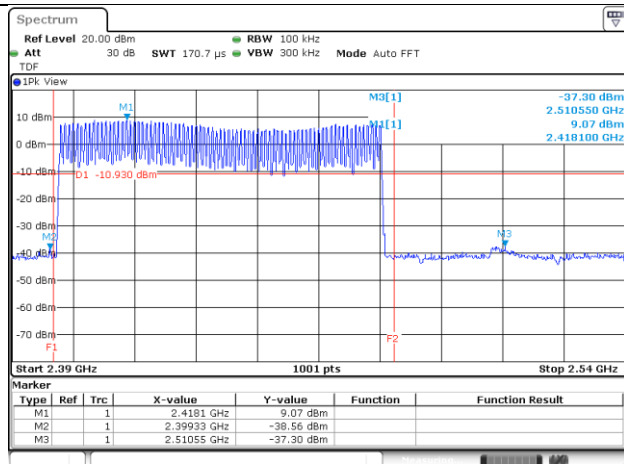


With Hopping Band-edge


Conducted spurious

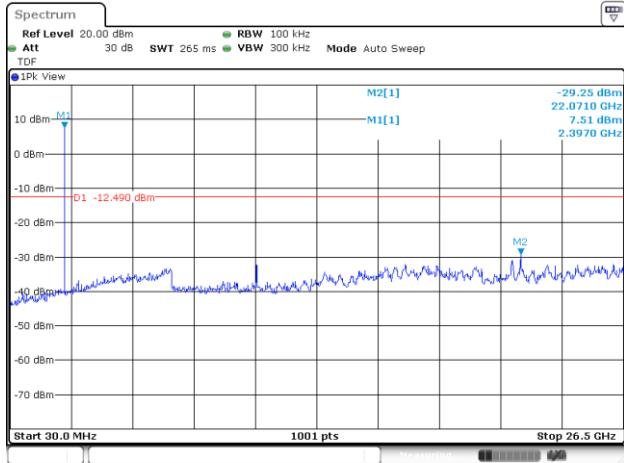

Lowest

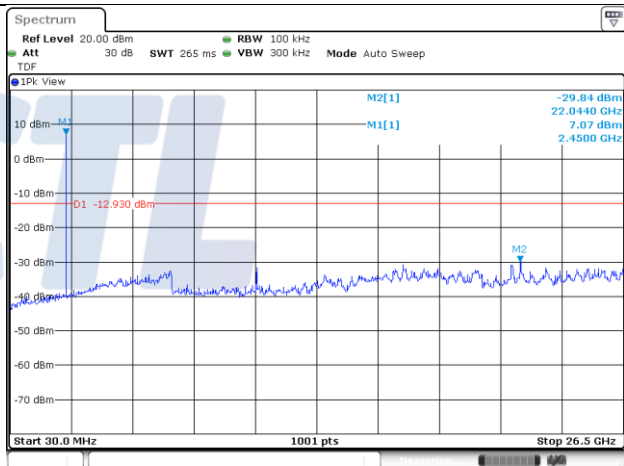

Middle

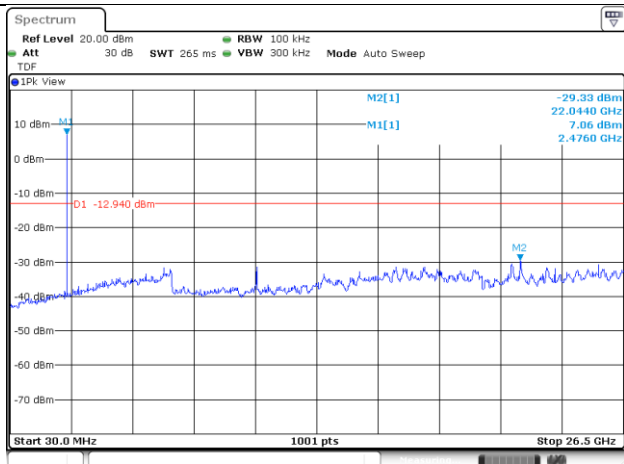

Highest

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0056-A


Page (42) of (45)




Test results

8DPSK


Conducted band-edge

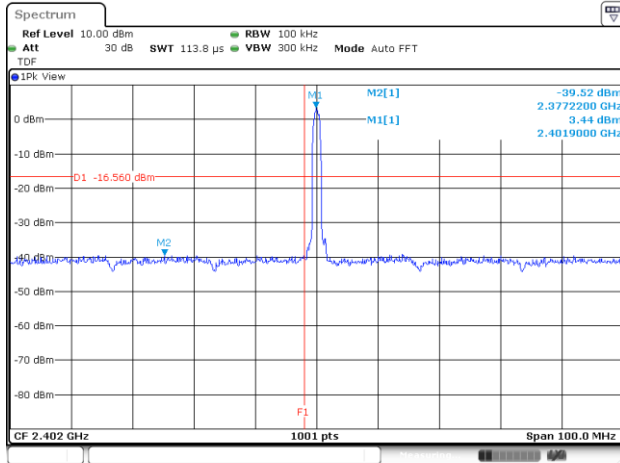

Lowest

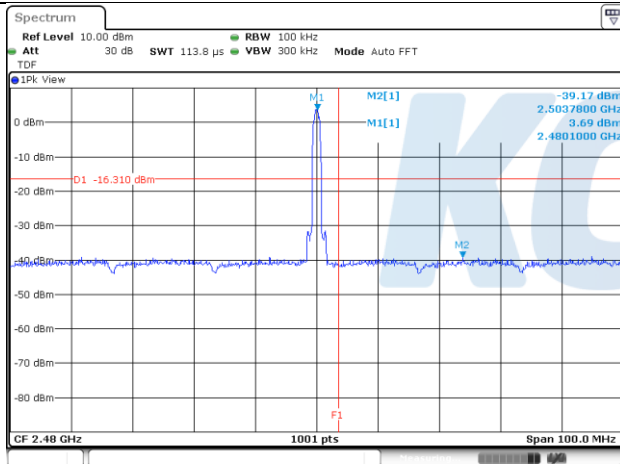


Highest

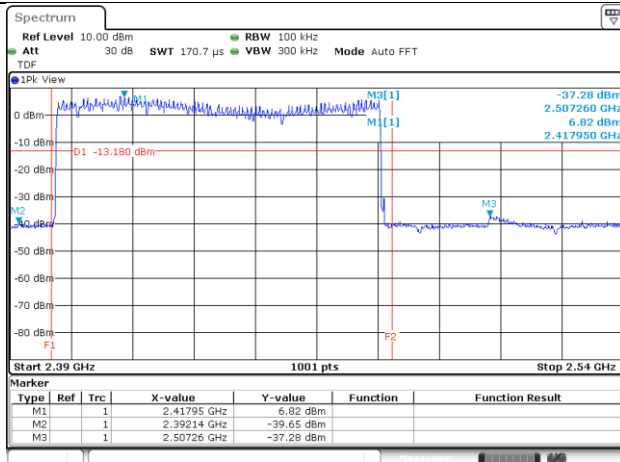


With Hopping Band-edge


Conducted spurious

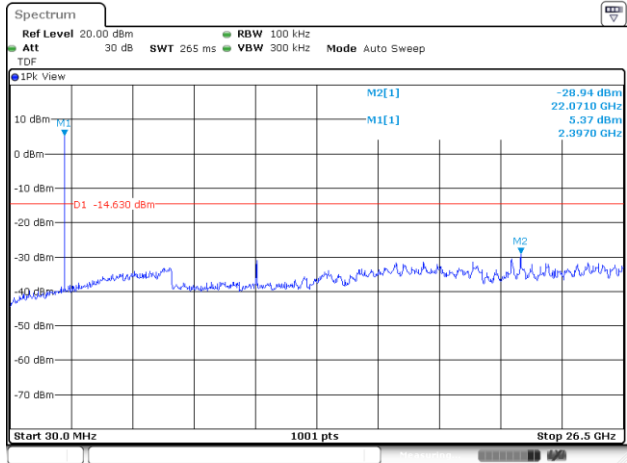

Lowest

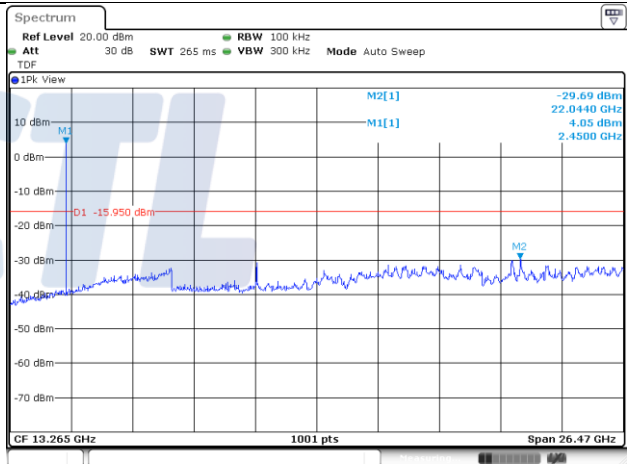

Middle

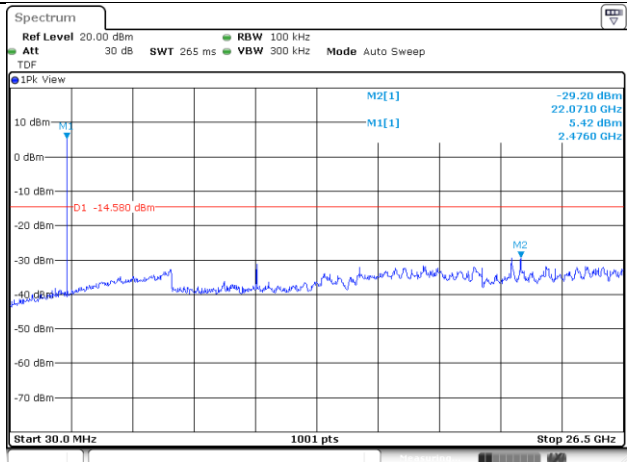


Highest

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

7.7. AC Conducted emission

Test setup

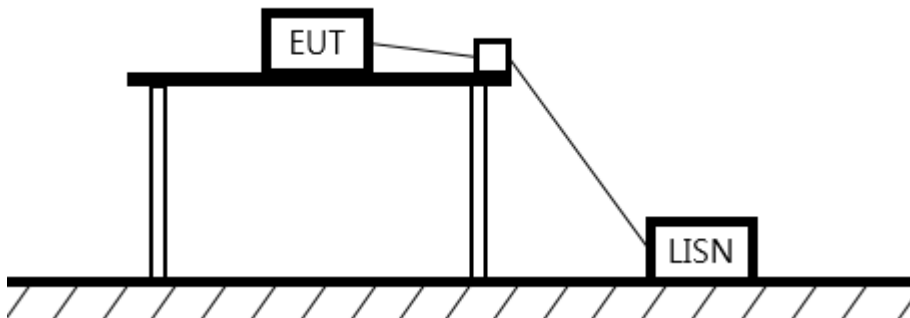

Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall be on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 Ω /50 μ H LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0056-A

Page (44) of (45)

KCTL

Test results

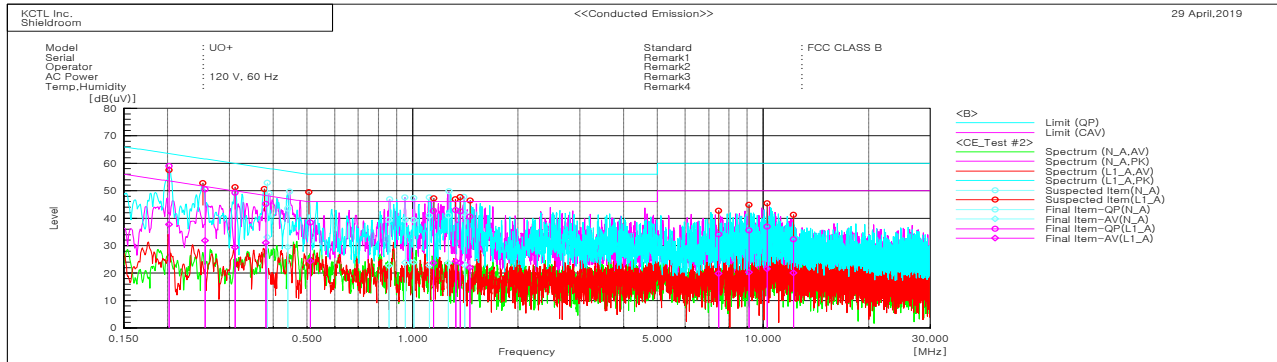

Final Result

--- N_A Phase ---									
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c. f. [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin [dB]
1	0.38544	42.9	23.1	9.9	52.8	33.0	56.2	46.2	5.4
2	0.4407	33.5	19.5	9.9	43.4	29.4	57.0	47.0	13.6
3	0.85588	29.5	12.9	9.8	39.3	22.7	56.0	46.0	16.7
4	0.95324	29.6	14.0	9.8	39.4	23.8	56.0	46.0	16.6
5	1.00872	29.5	14.1	9.8	39.3	23.9	56.0	46.0	16.7
6	1.11763	31.1	12.9	9.8	40.9	22.7	56.0	46.0	15.1
7	1.26504	31.2	13.9	9.8	41.0	23.7	56.0	46.0	15.0
8	1.40591	32.0	13.2	9.8	41.8	23.0	56.0	46.0	14.2

--- L1_A Phase ---									
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c. f. [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin [dB]
1	0.20203	49.1	27.8	9.9	59.0	37.7	63.5	53.5	4.5
2	0.25548	40.8	22.1	9.7	50.5	31.8	61.6	51.6	11.1
3	0.31148	39.5	19.6	9.8	49.3	29.4	59.9	49.9	10.6
4	0.38141	35.2	21.1	9.9	45.1	31.0	58.2	48.2	13.1
5	0.51048	28.5	14.4	9.9	38.4	24.3	56.0	46.0	17.6
6	1.14547	32.8	13.8	9.8	42.6	23.6	56.0	46.0	13.4
7	1.32689	33.1	14.4	9.8	42.9	24.2	56.0	46.0	13.1

8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R & S	FSV30	100806	19.08.01
Spectrum Analyzer	R & S	FSV40	100989	20.01.04
Wideband Power Sensor	R & S	NRP-Z81	102398	20.01.25
Power Divider	Aeroflex/ Weinschel, Inc	1580-1	RM986	20.01.08
Bluetooth Tester	TESCOM	TC-3000B	3000B640056	20.01.25
ATTENUATOR	R & S	DNF Dämpfungsglied 10 dB in N-50 Ohm	31212	19.05.14
EMI TEST RECEIVER	R & S	ESCI	100732	19.08.23
Bi-Log Antenna	SCHWARZBECK	VULB 9168	583	20.05.04
Amplifier	SONOMA INSTRUMENT	310N	284608	19.08.23
COAXIAL FIXED ATTENUATOR	Agilent	8491B-003	2708A18758	20.05.04
Horn antenna	ETS.lindgren	3116	00086635	19.05.10
Horn antenna	ETS.lindgren	3117	161225	19.05.18
AMPLIFIER	L-3 Narda-MITEQ	AMF-7D-01001800 -22-10P	2003683	19.05.15
AMPLIFIER	L-3 Narda-MITEQ	JS44-18004000-33 -8P	2000997	19.08.02
LOOP Antenna	R & S	HFH2-Z2	100355	20.08.24
Antenna Mast	Innco Systems	MA4640-XP-ET	-	-
Turn Table	Innco Systems	DT2000	79	-
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	DT2000	79	-
TWO-LINE V - NETWORK	R&S	ENV216	101584	20.04.05
EMI TEST RECEIVER	R & S	ESCI	101408	19.08.23
Highpass Filter	WT	WT-A1698-HS	WT160411001	19.05.14
Vector Signal Generator	R & S	SMBV100A	257566	20.01.04
Signal Generator	R & S	SMR40	100007	19.05.15
Cable Assembly	RadiAll	2301761768000PJ	1724.659	-
Cable Assembly	gigalane	RG-400	-	-
Cable Assembly	HUER+SUHNER	SUCOFLEX 104	MY4342/4	-

End of test report