





Puw test Plot

HCH SPURIOUS EMISSION_30MHz~10GHz

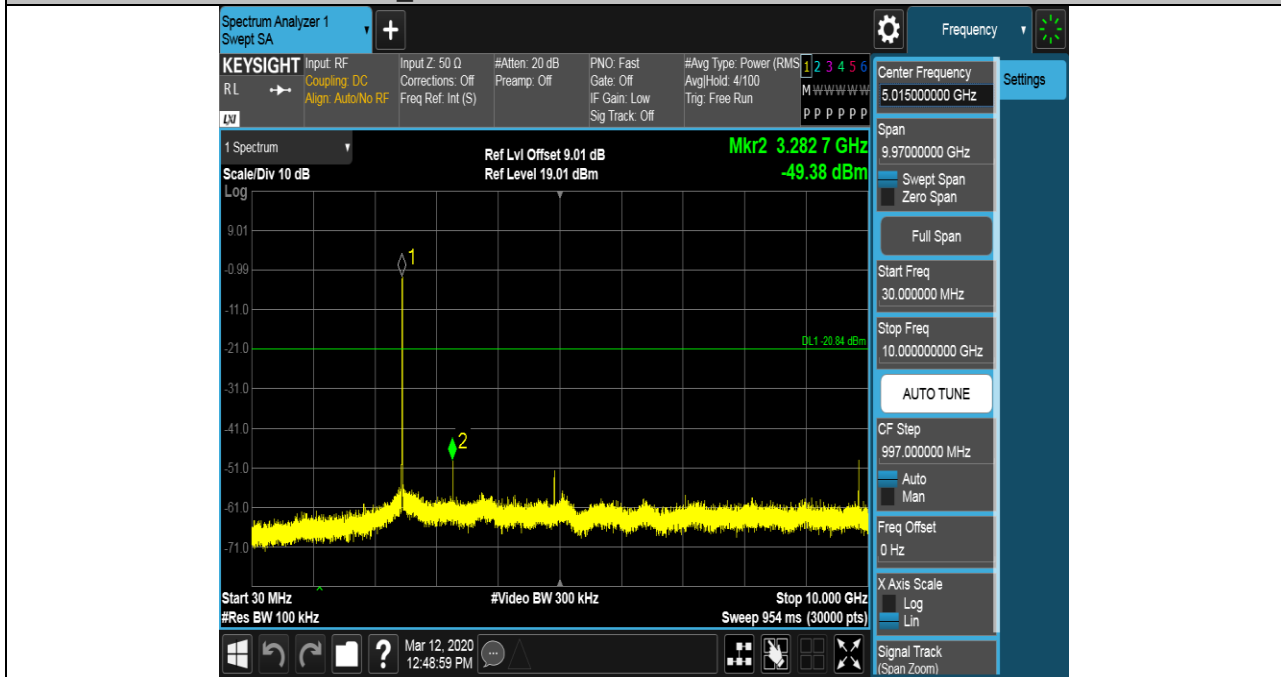


HCH SPURIOUS EMISSION_10GHz~26GHz

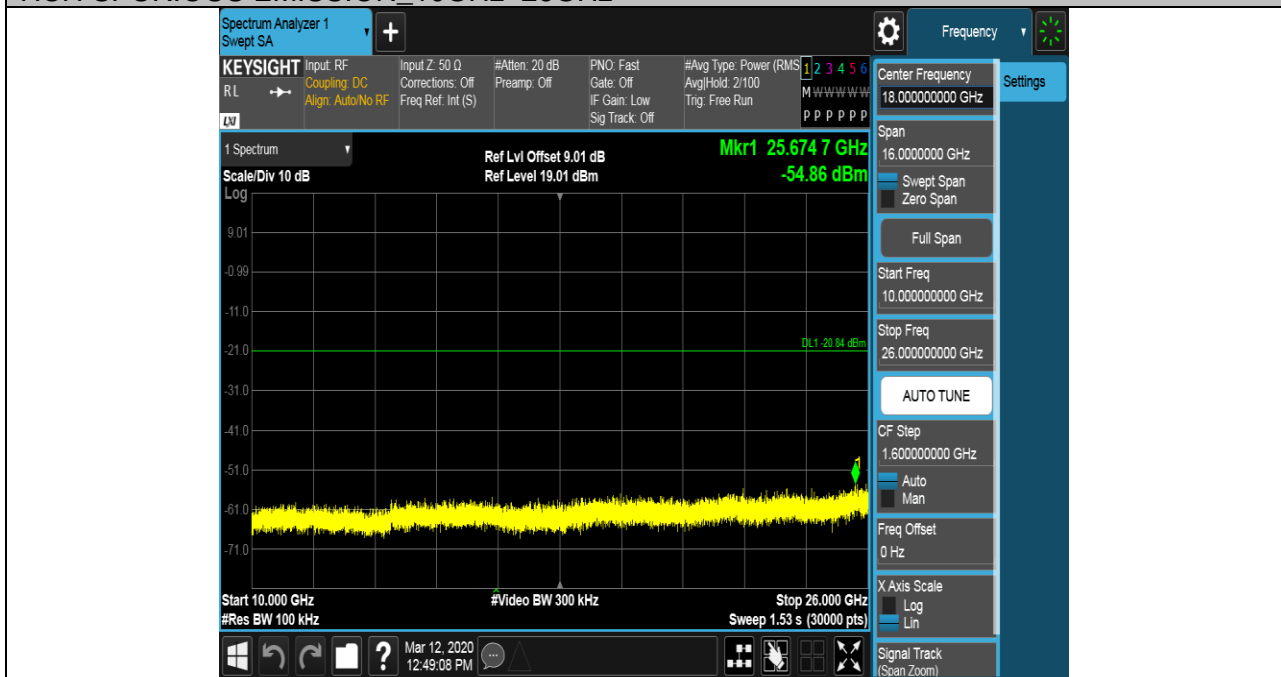



Test Mode	Channel	Verdict
11G	LCH	PASS


Pref test Plot

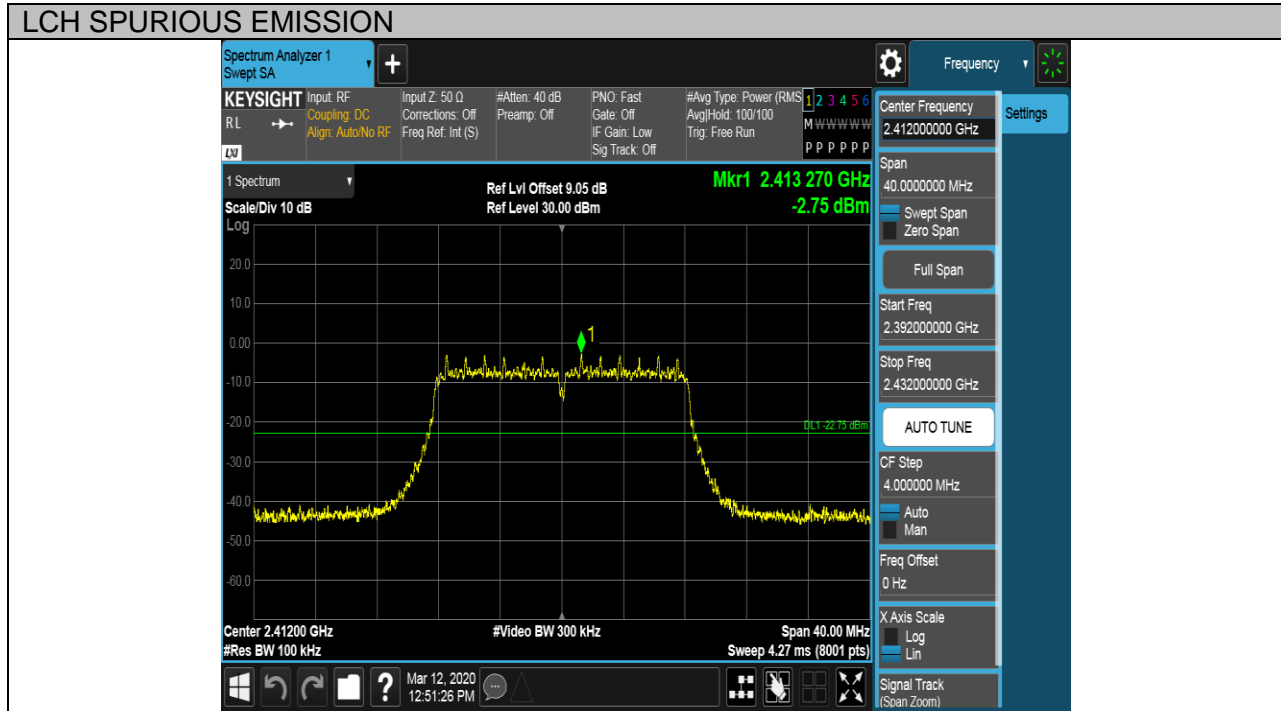




Puw test Plot

LCH SPURIOUS EMISSION_30MHz~10GHz

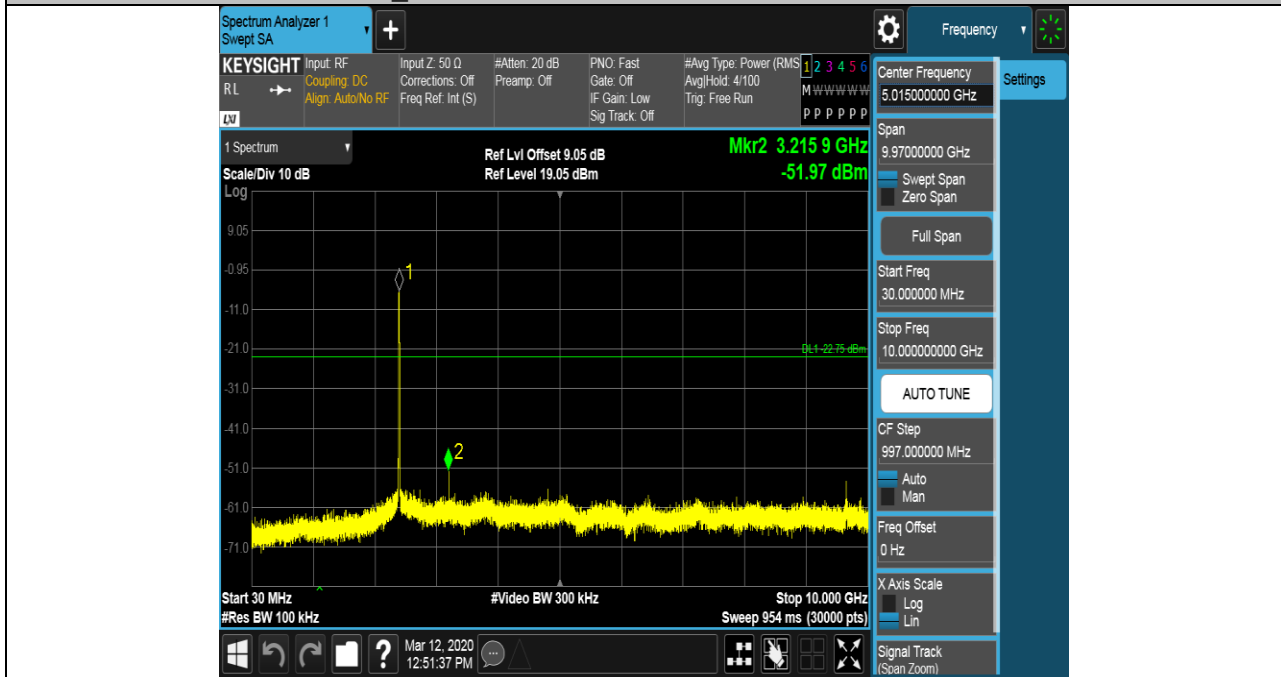


LCH SPURIOUS EMISSION_10GHz~26GHz

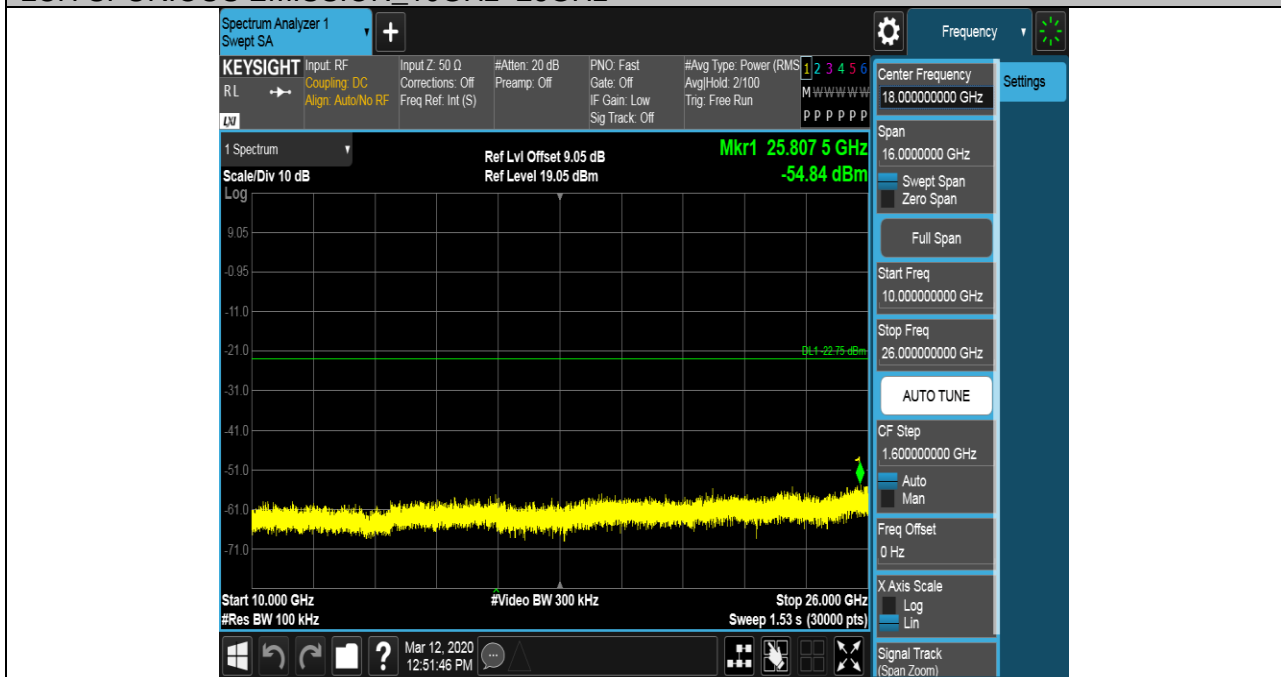



Test Mode	Channel	Verdict
11G	MCH	PASS


Pref test Plot

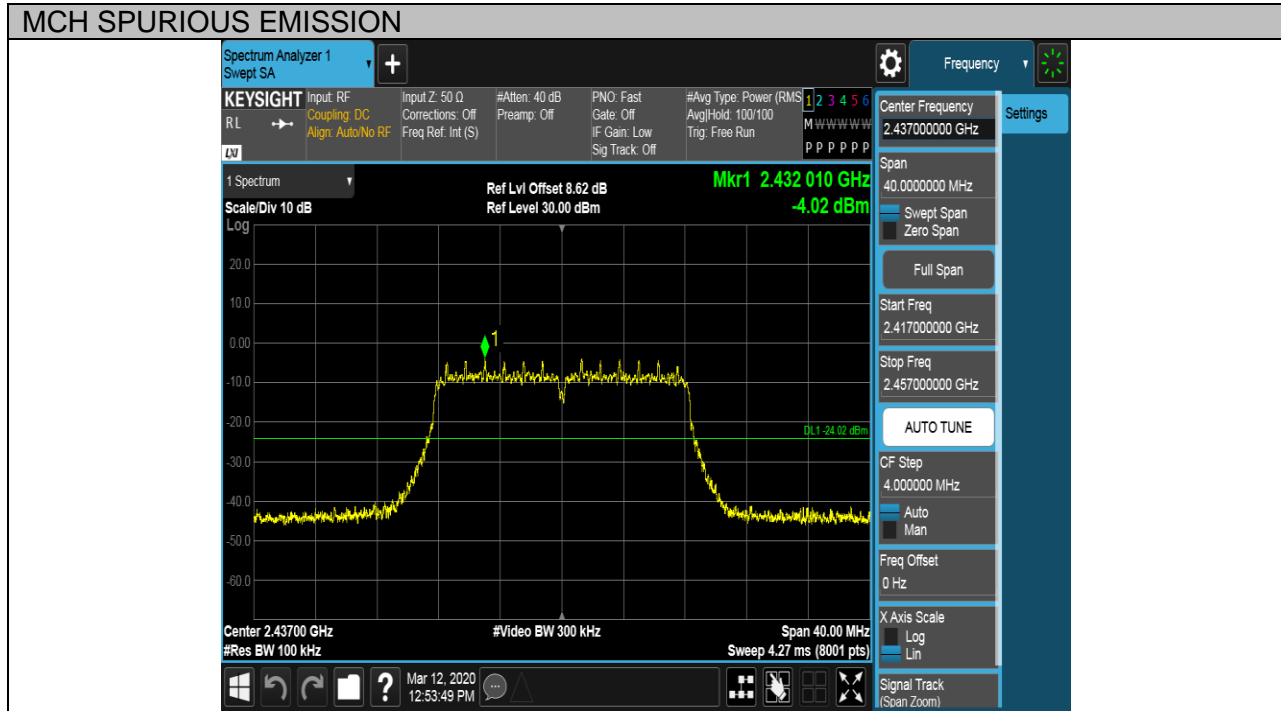




Puw test Plot

MCH SPURIOUS EMISSION_30MHz~10GHz

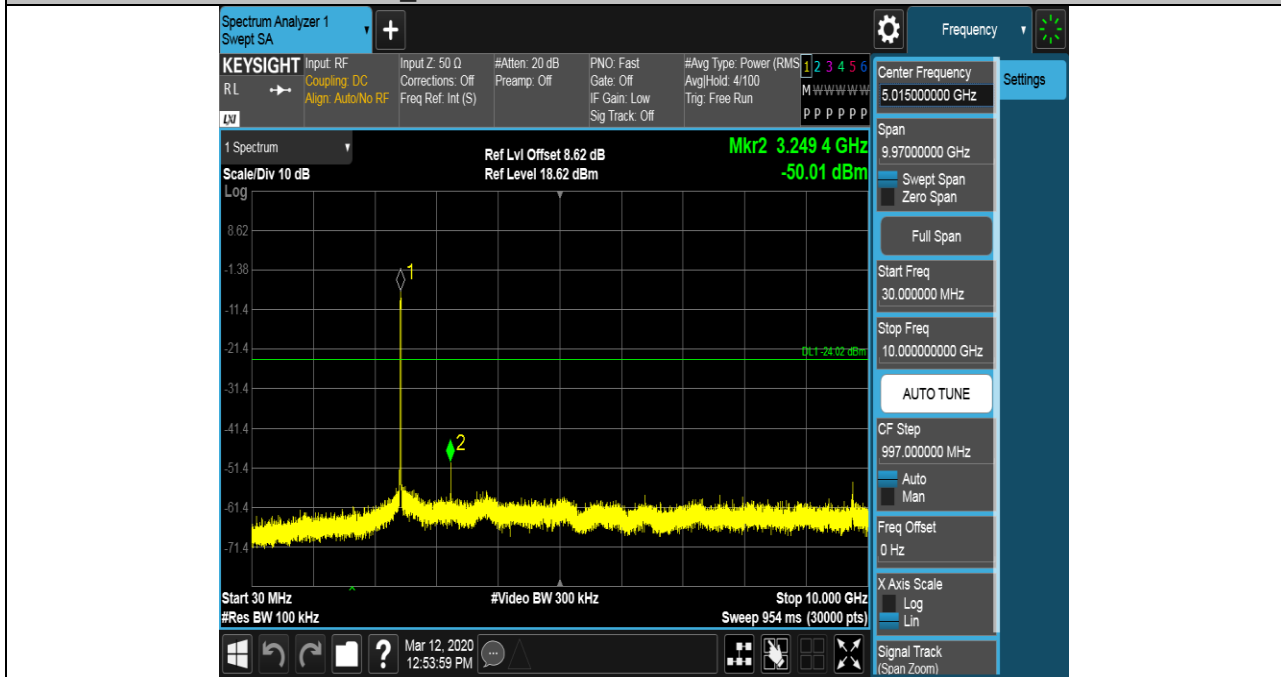


MCH SPURIOUS EMISSION_10GHz~26GHz

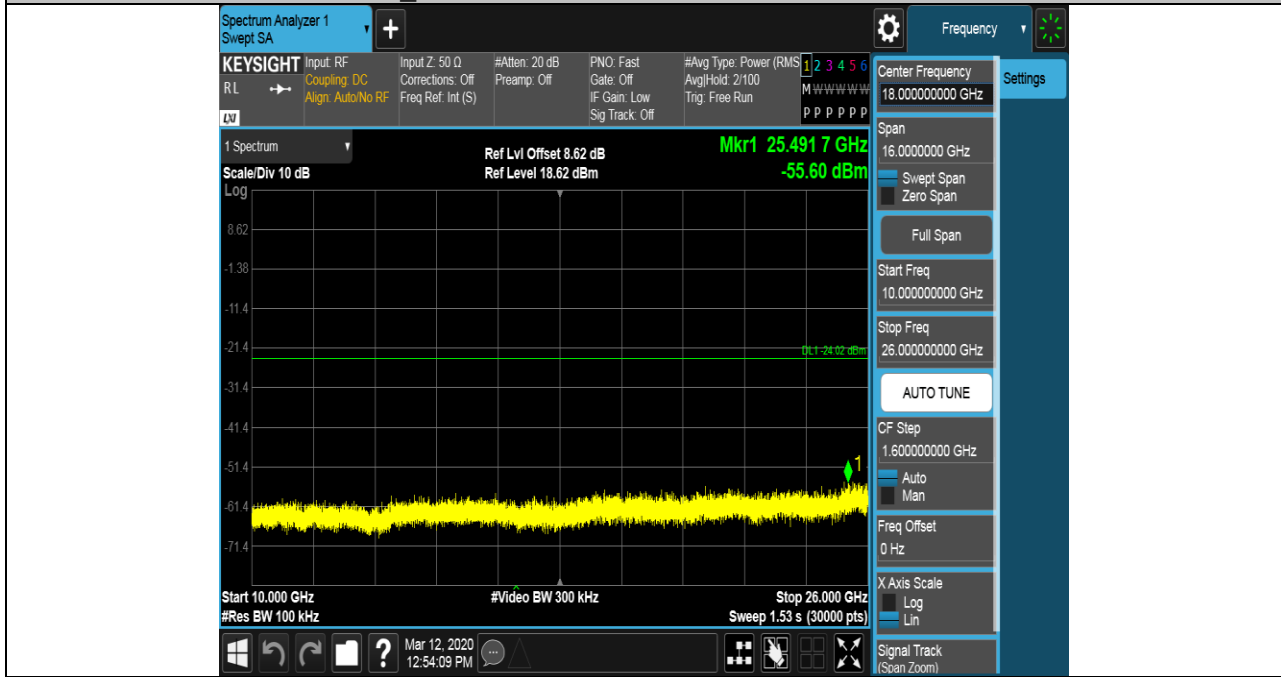





Test Mode	Channel	Verdict
11G	HCH	PASS

Pref test Plot

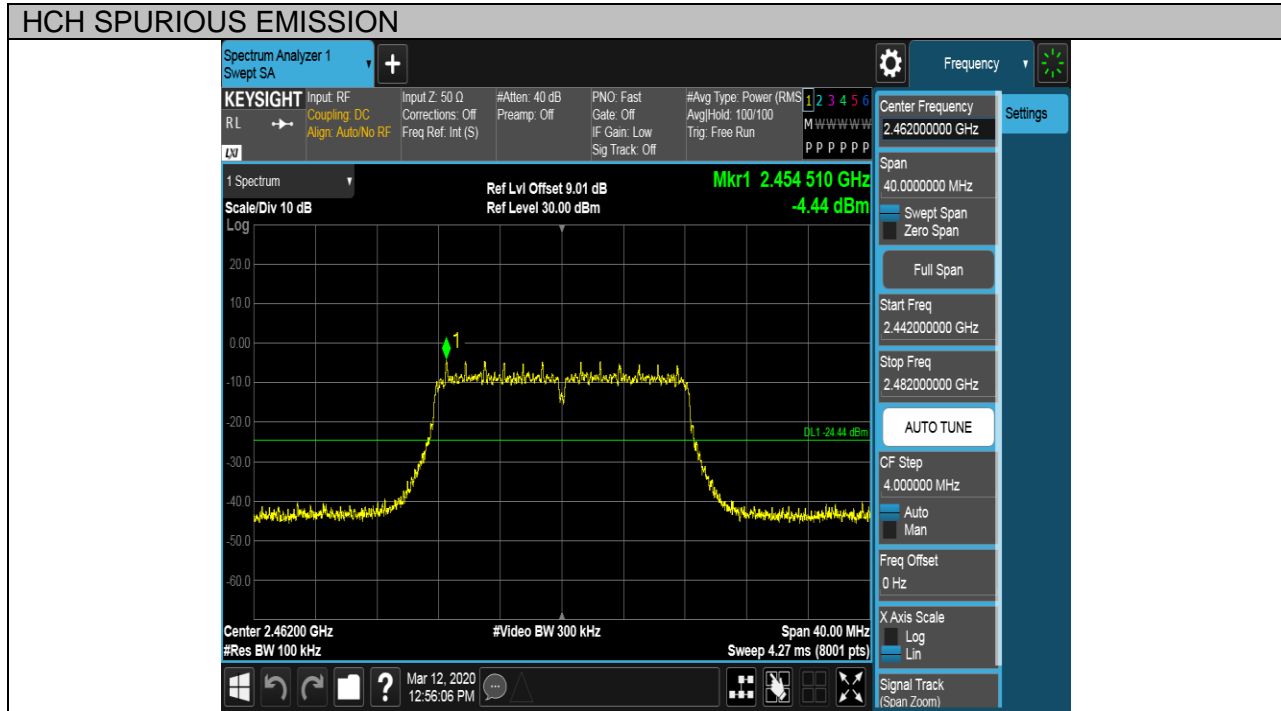




Puw test Plot

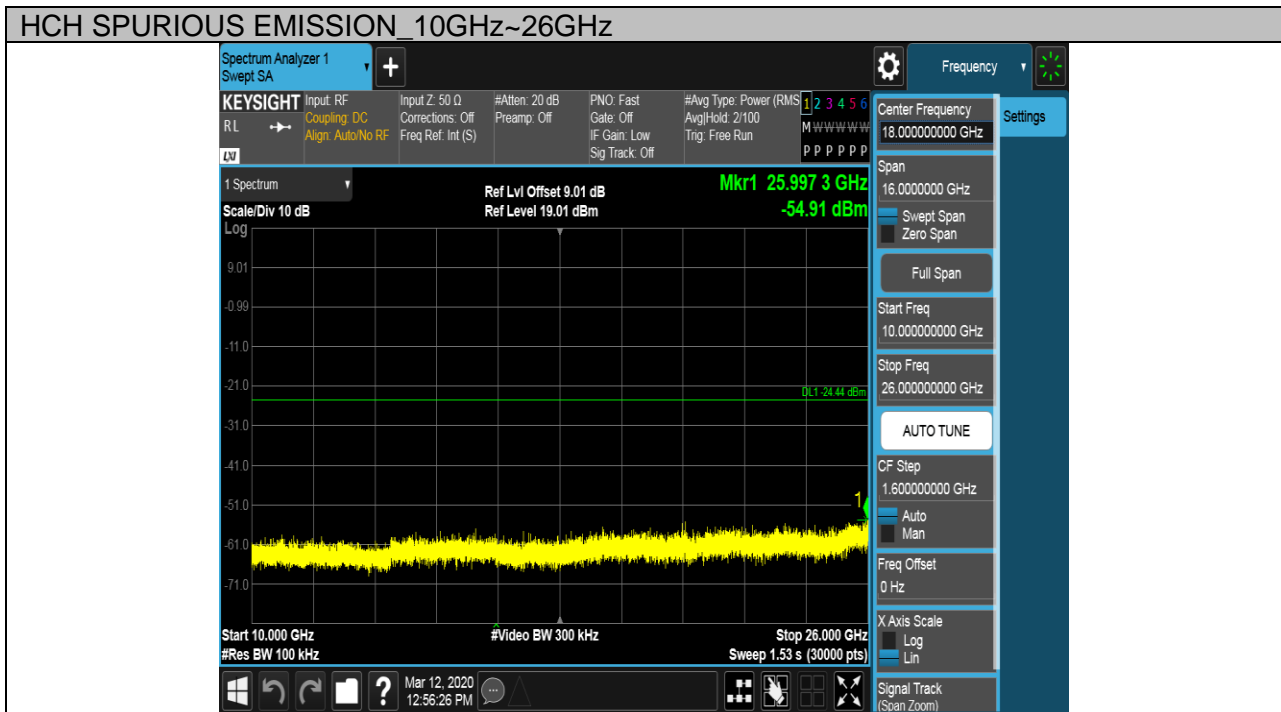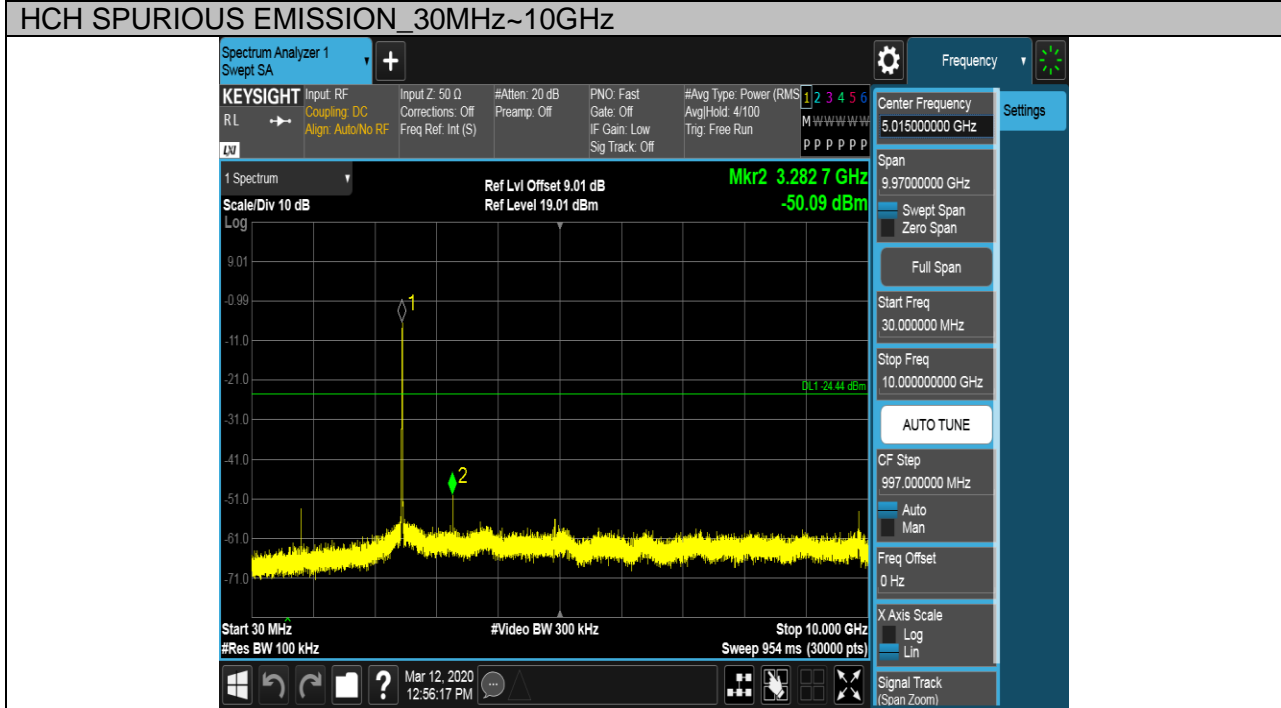





Test Mode	Channel	Verdict
11N HT20	LCH	PASS

Pref test Plot

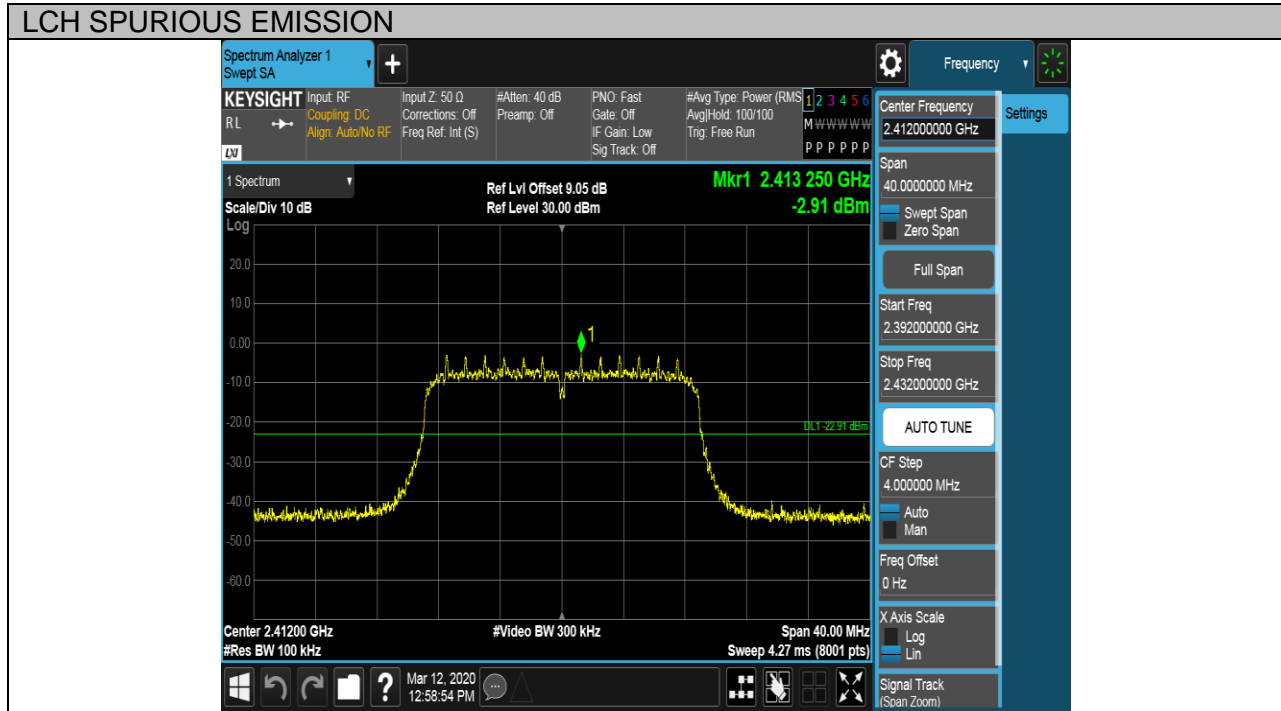




Puw test Plot

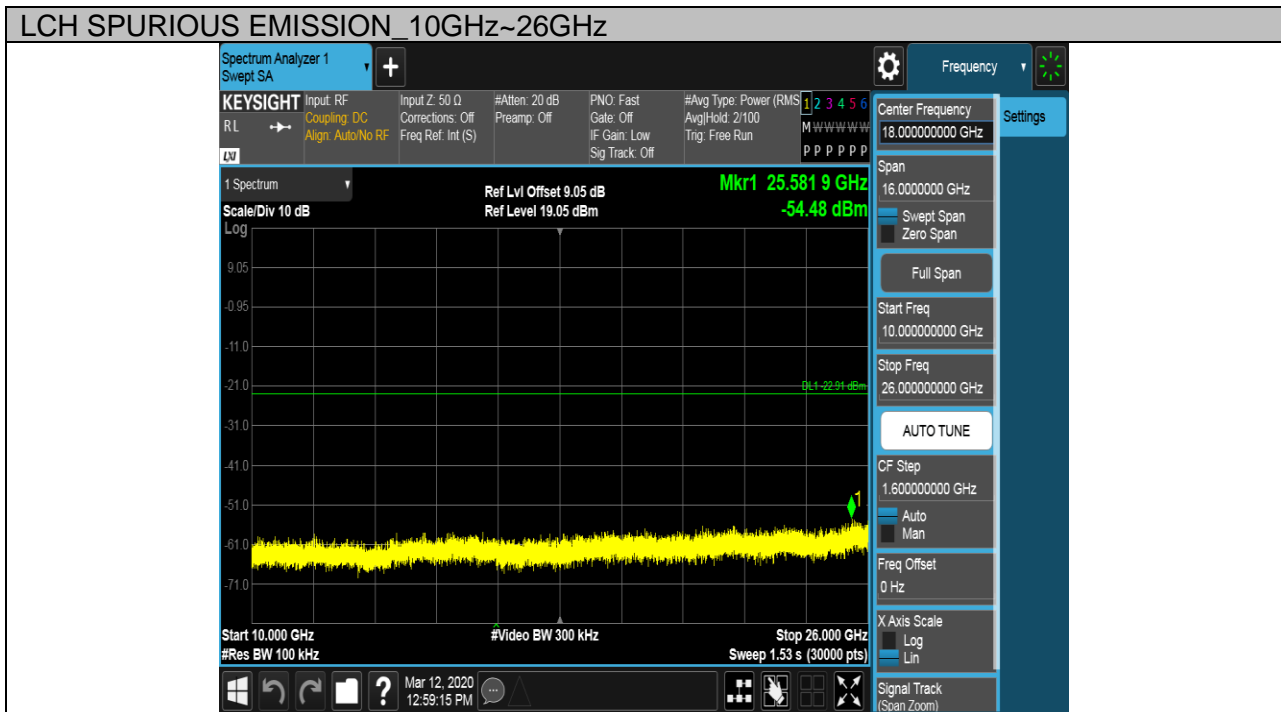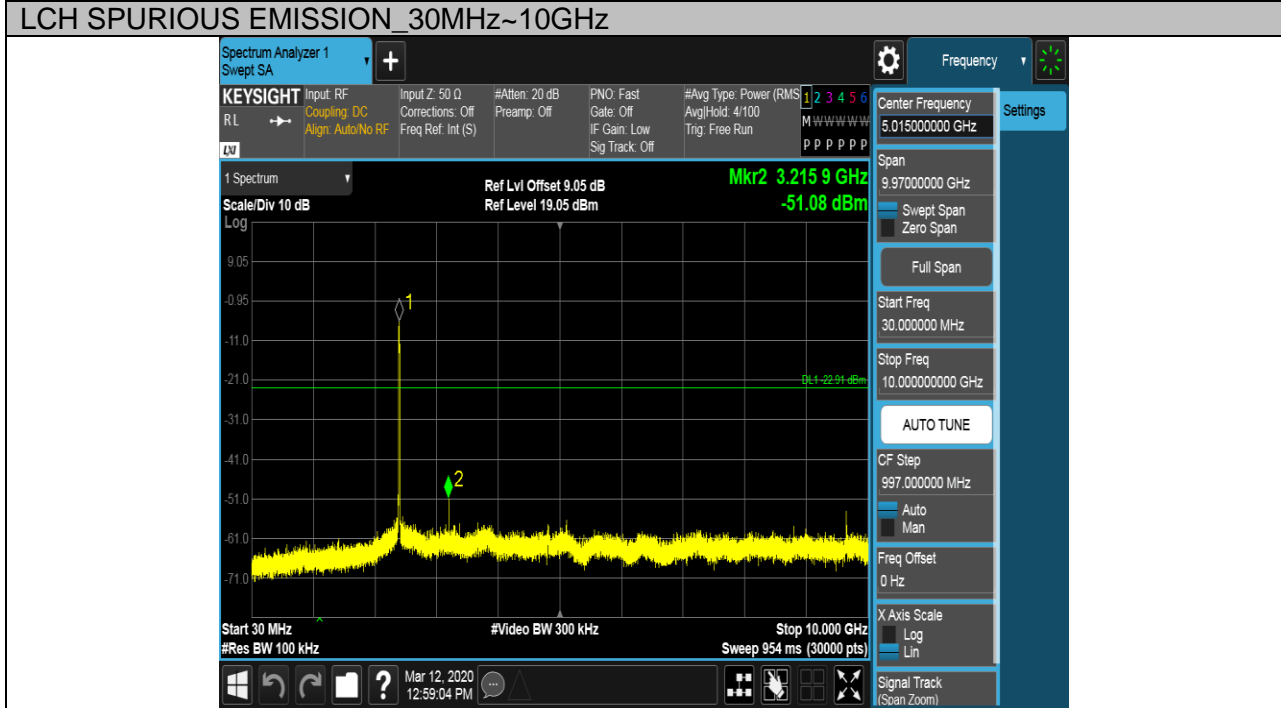



Test Mode	Channel	Verdict
11N HT20	MCH	PASS


Pref test Plot

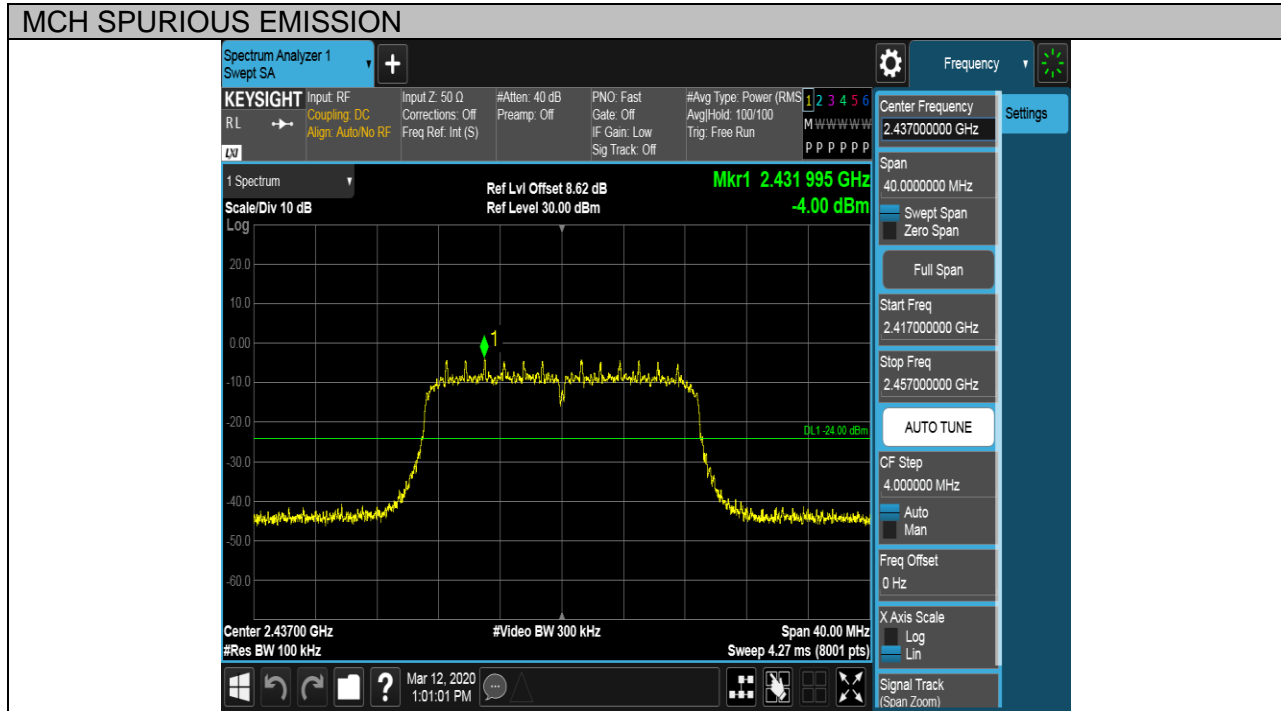



Puw test Plot

MCH SPURIOUS EMISSION_30MHz~10GHz

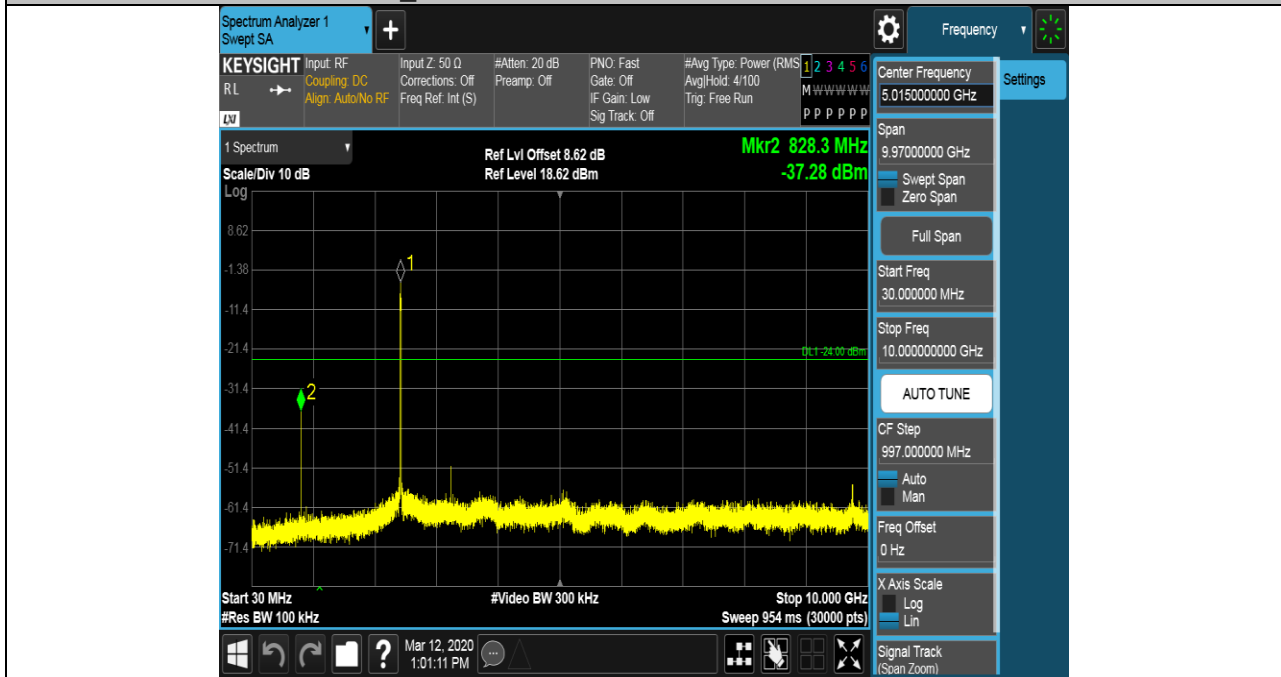


MCH SPURIOUS EMISSION_10GHz~26GHz





Test Mode	Channel	Verdict
11N HT20	HCH	PASS


Pref test Plot

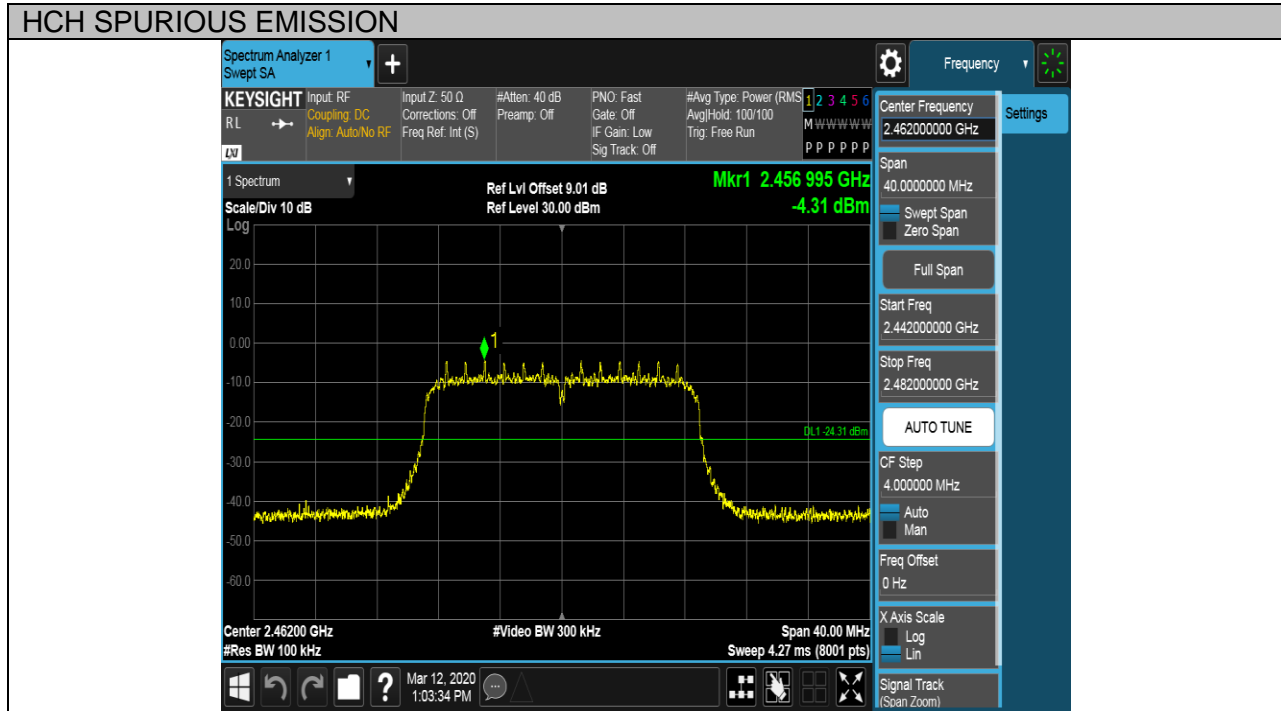




Puw test Plot

HCH SPURIOUS EMISSION_30MHz~10GHz

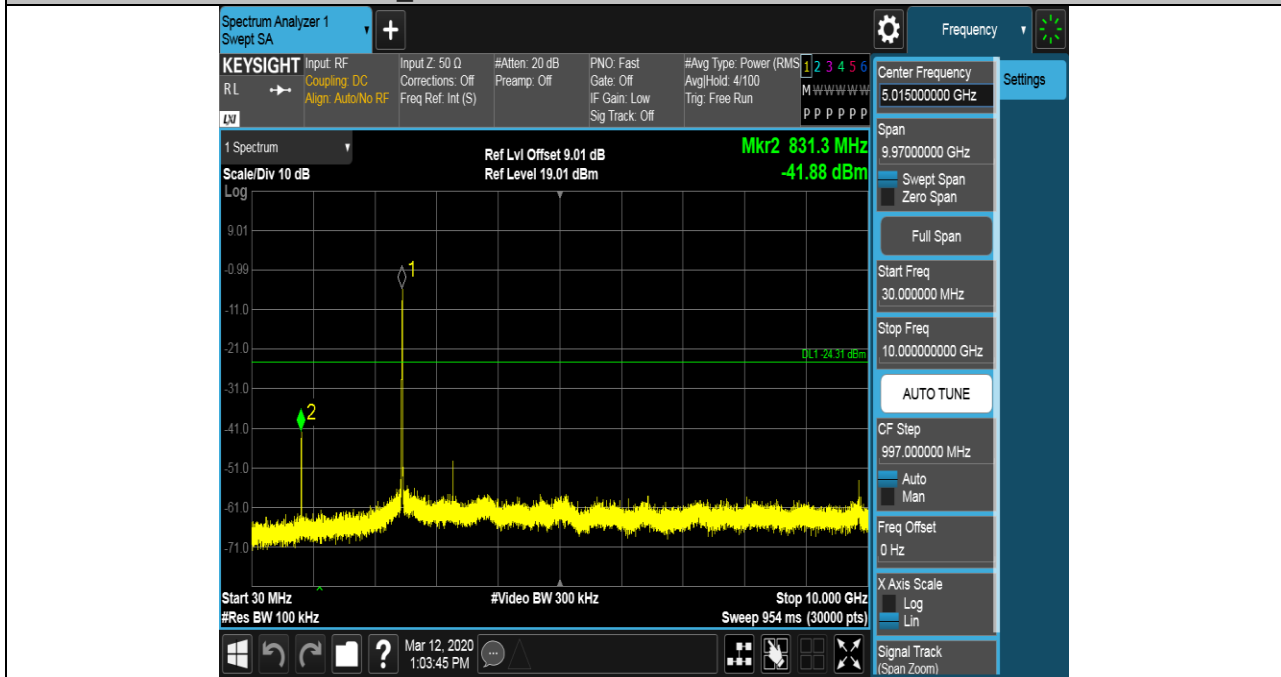

HCH SPURIOUS EMISSION_10GHz~26GHz

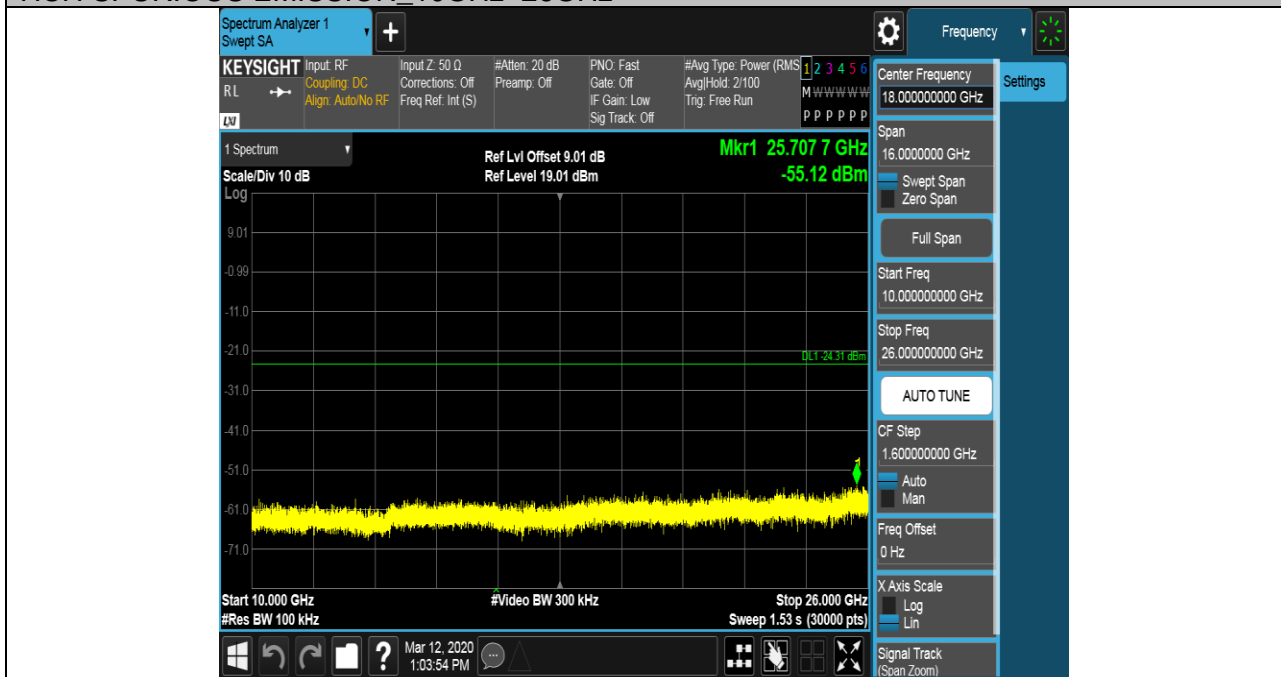



7.6. RADIATED TEST RESULTS

7.6.1. LIMITS AND PROCEDURE

LIMITS

Please refer to FCC §15.205&§15.209, ISED RSS-247 Clause 5.5, ISED RSS-GEN Clause 8.9&6.13

Please refer to FCC KDB 558074

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Limit for below 30MHz based on RSS-GEN table 6:

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the



specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Restricted bands of operation


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

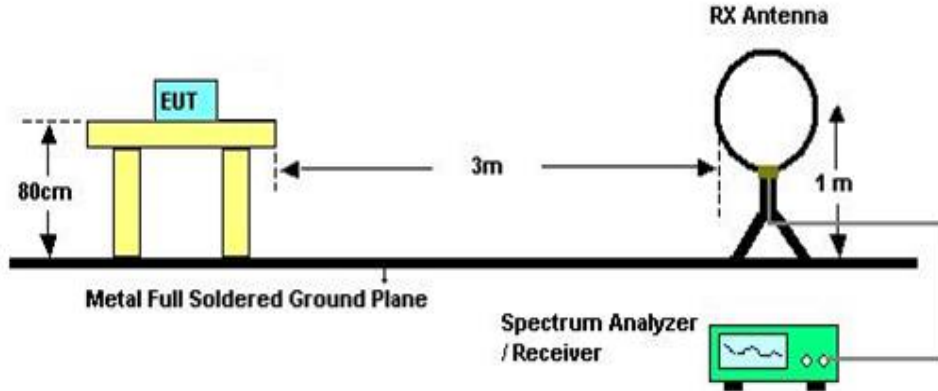


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Below 1G

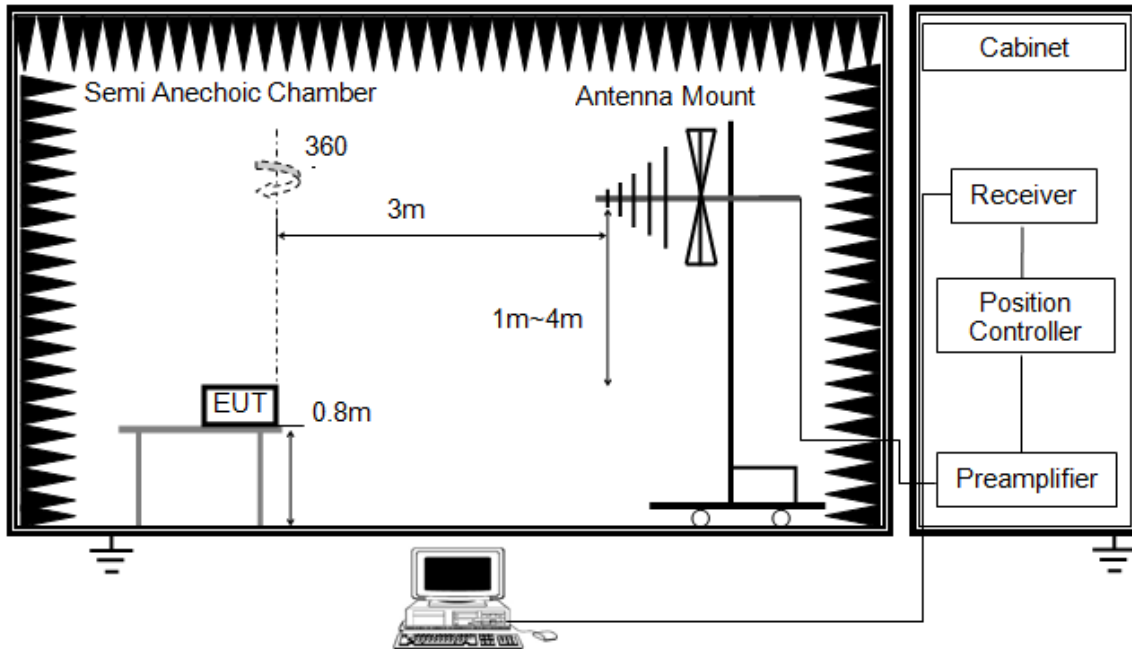


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration)

ABOVE 1G

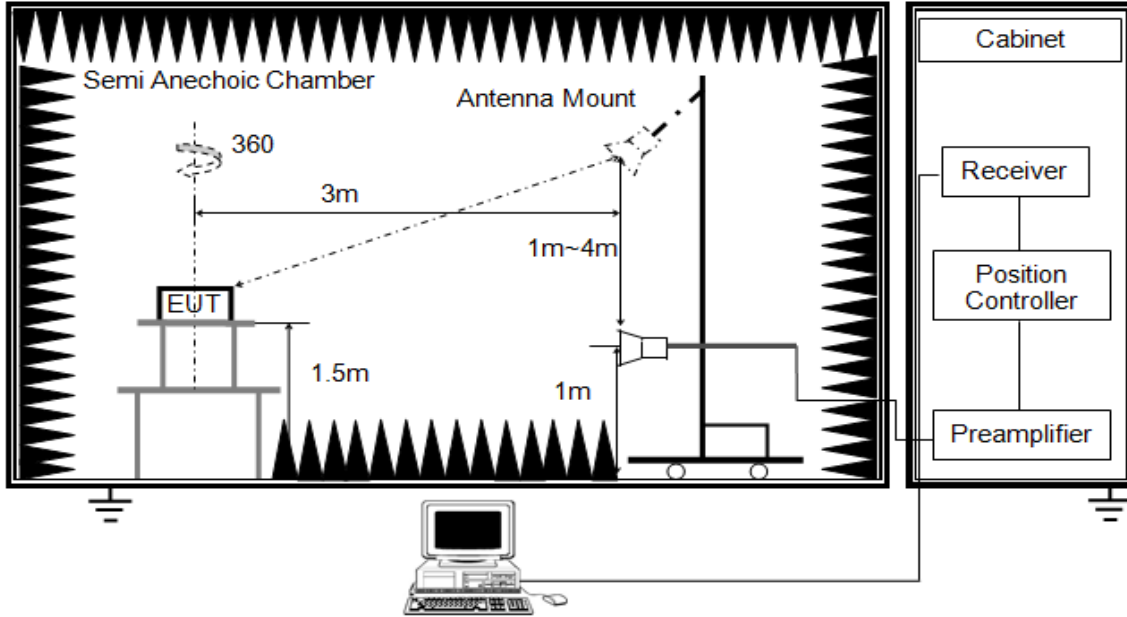


The setting of the spectrum analyser

RBW	1M
VBW	PEAK:3M AVG: See note6
Sweep	Auto
Detector	Peak/Average(Refer to section7.1 with average detector)
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with set $VBW \leq RBW/100$, but not less than list in section7.1 with average detector, max hold to be run for at least 50 traces for average measurements.
8. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

X axis, Y axis, Z axis positions:

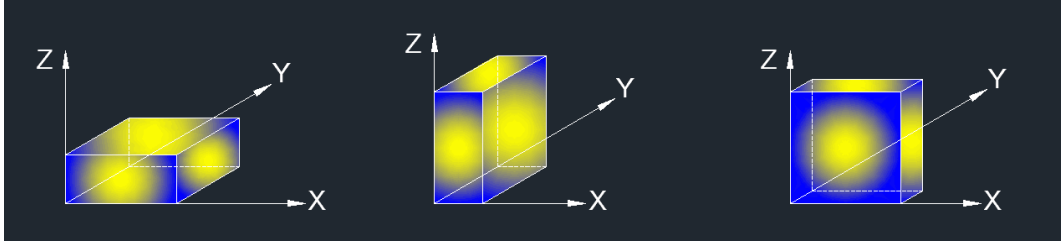

Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (Z axis) data recorded in the report.

7.6.2. TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	DC 21.6V

7.6.3. RESTRICTED BANDEDGE


Test Result Table

Test Mode	Test Antenna	Channel	P _{uw} (dBm)	Verdict
11B SISO	Antenna1	LCH	<Limit	PASS
		MCH	<Limit	PASS
		HCH	<Limit	PASS
11G SISO	Antenna1	LCH	<Limit	PASS
		MCH	<Limit	PASS
		HCH	<Limit	PASS
11N HT20	Antenna1	LCH	<Limit	PASS
		MCH	<Limit	PASS
		HCH	<Limit	PASS



Test Graphs:

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

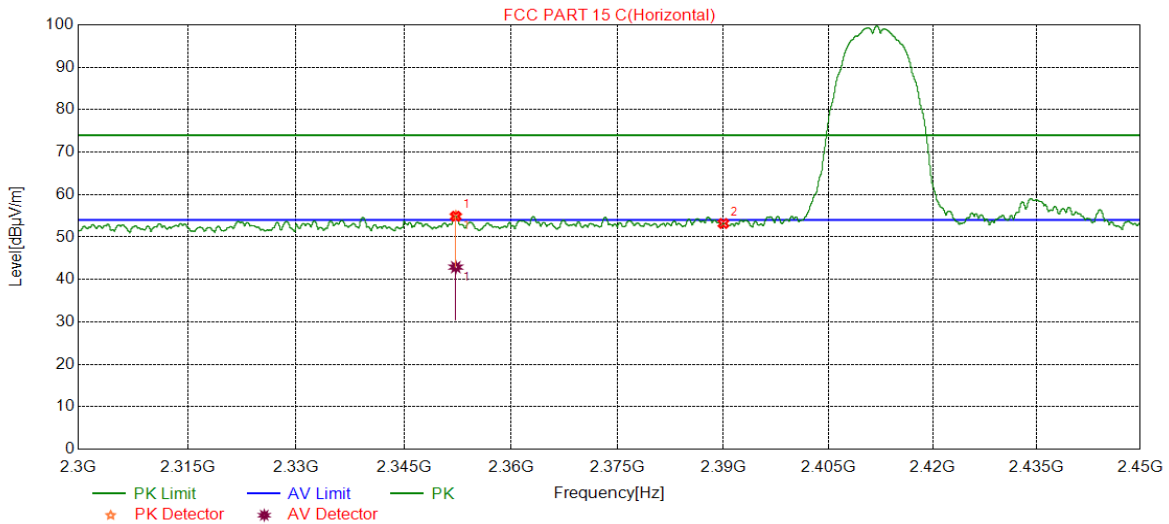


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2352.2440	41.21	13.68	54.89	74.00	-19.11	peak
		29.21	13.68	42.89	54.00	-11.11	average
2	2390.0000	39.09	14.09	53.18	74.00	-20.82	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For average power measurement, set the VBW refer to section 7.1.
 5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

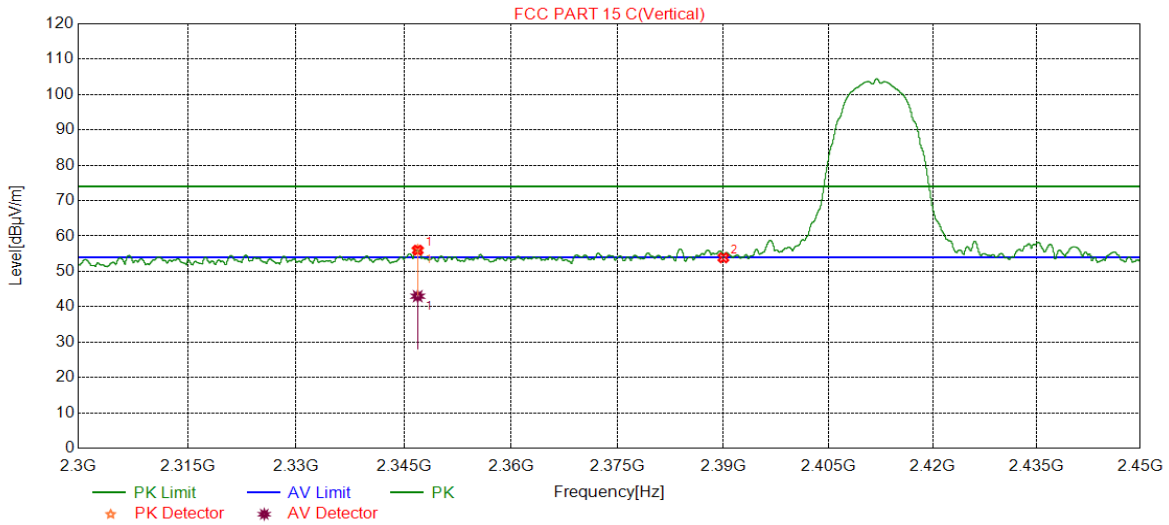


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2346.9184	42.34	13.65	55.99	74.00	-18.01	peak
		29.33	13.65	42.98	54.00	-11.02	average
2	2390.0000	39.75	14.09	53.84	74.00	-20.16	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For average power measurement, set the VBW refer to section 7.1.
 5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

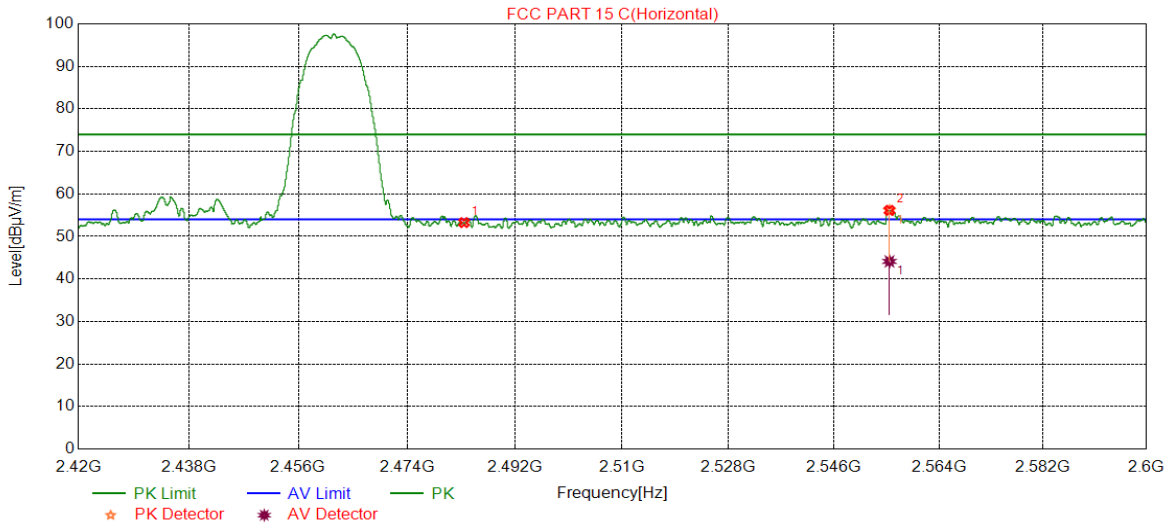


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	39.38	13.88	53.26	74.00	-20.74	peak
2	2555.4815	41.65	14.48	56.13	74.00	-17.87	peak
		29.65	14.48	44.13	54.00	-9.87	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For average power measurement, set the VBW refer to section 7.1.
 5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

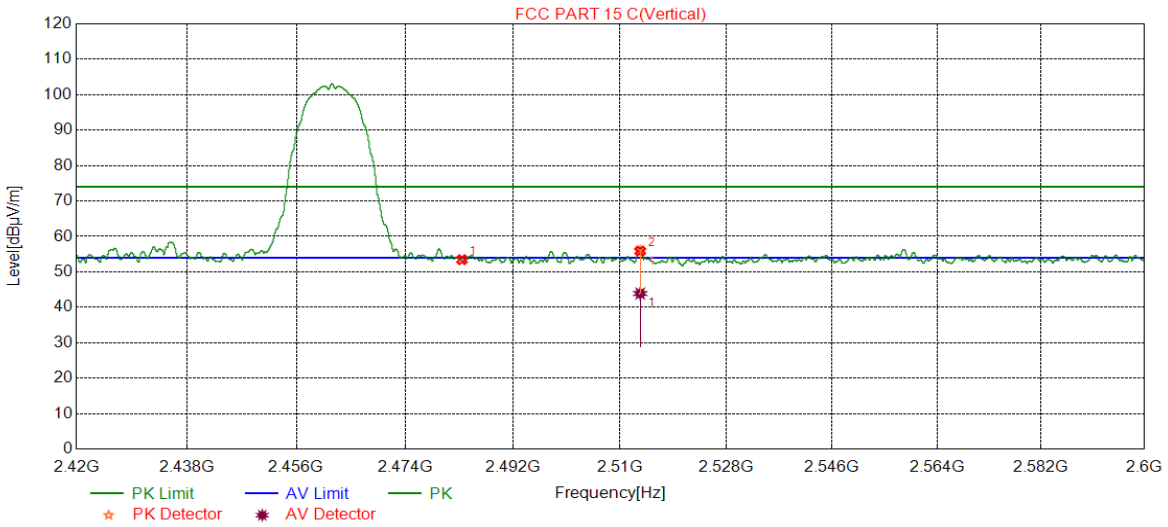


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	39.57	13.88	53.45	74.00	-20.55	peak
2	2513.3933	41.66	14.23	55.89	74.00	-18.11	peak
		29.66	14.23	43.89	54.00	-10.11	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For average power measurement, set the VBW refer to section 7.1.
 5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

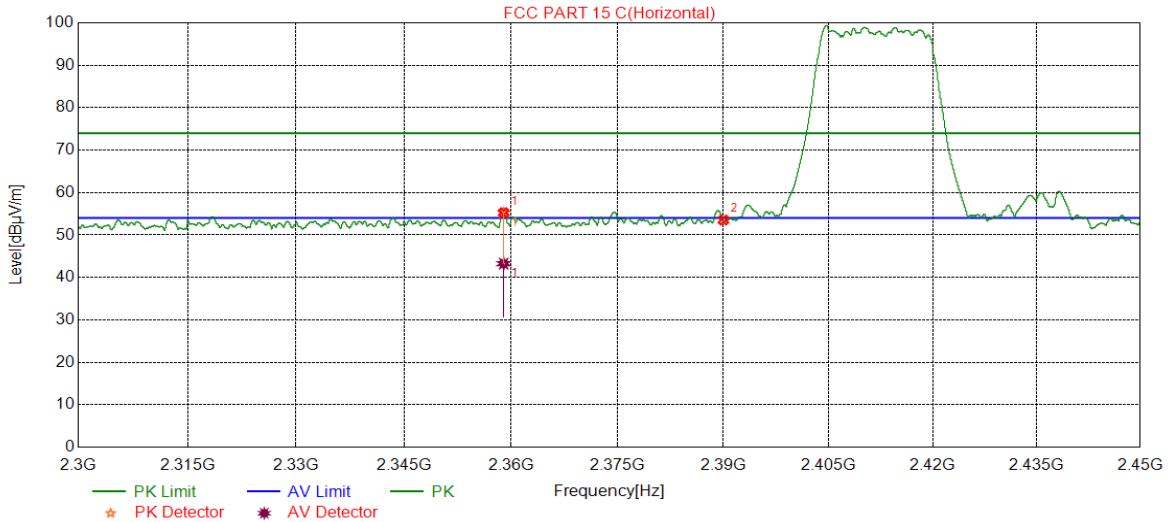


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2358.9574	41.53	13.72	55.25	74.00	-18.75	peak
		29.53	13.72	43.25	54.00	-10.75	average
2	2390.0000	39.43	14.09	53.52	74.00	-20.48	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For average power measurement, set the VBW refer to section 7.1.
 5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

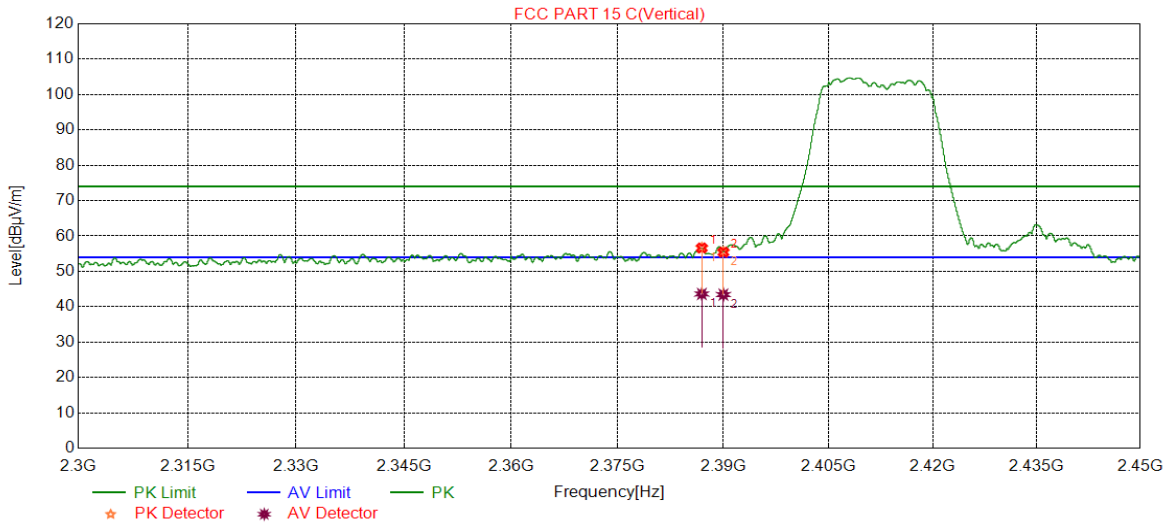


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2386.9359	42.58	14.04	56.62	74.00	-17.38	peak
		29.57	14.04	43.61	54.00	-10.39	average
2	2390.0000	41.34	14.09	55.43	74.00	-18.57	peak
		29.34	14.09	43.43	54.00	-10.57	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For average power measurement, set the VBW refer to section 7.1.
 5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

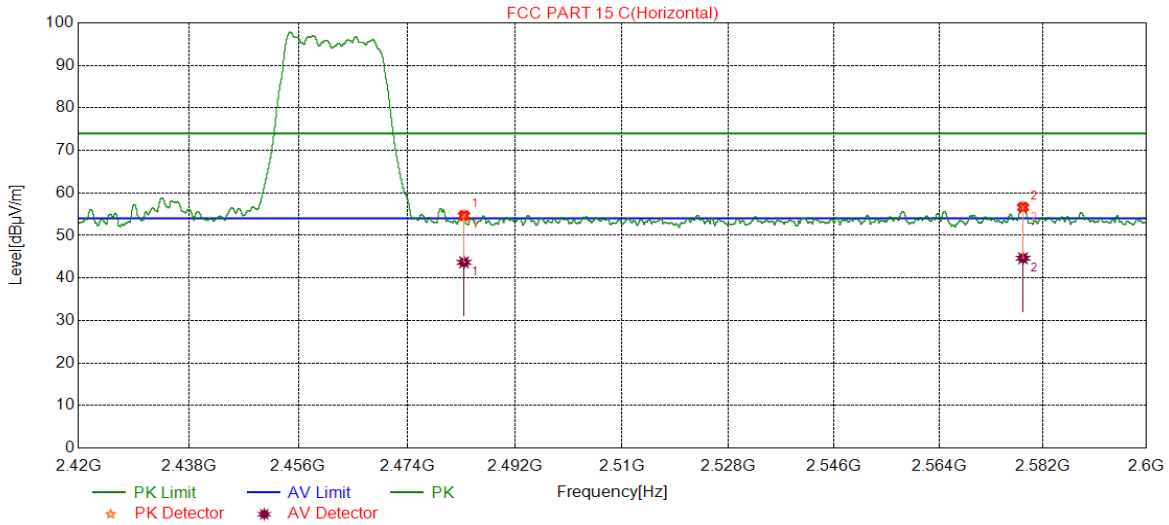


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	40.80	13.88	54.68	74.00	-19.32	peak
		29.80	13.88	43.68	54.00	-10.32	average
2	2578.5059	42.21	14.43	56.64	74.00	-17.36	peak
		30.21	14.43	44.64	54.00	-9.36	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For average power measurement, set the VBW refer to section 7.1.
 5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

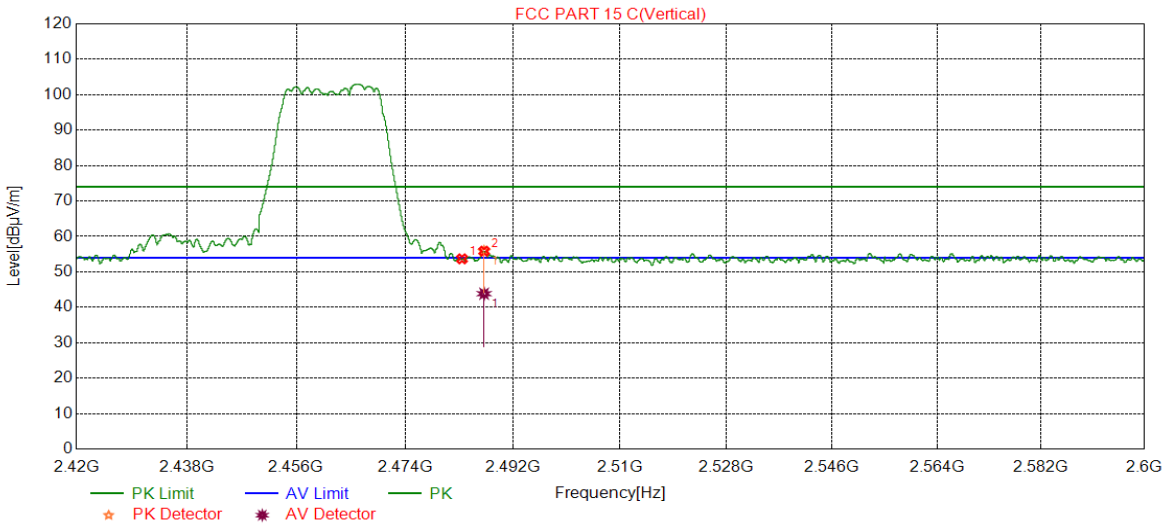


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	39.79	13.88	53.67	74.00	-20.33	peak
2	2487.1827	41.92	13.92	55.84	74.00	-18.16	peak
		29.92	13.92	43.84	54.00	-10.16	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For average power measurement, set the VBW refer to section 7.1.
 5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

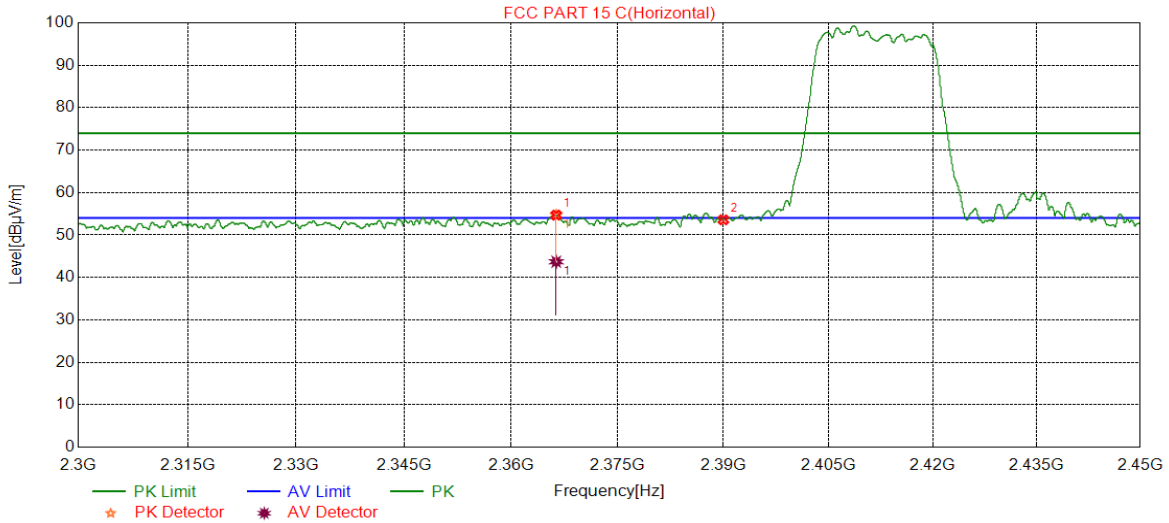


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2366.3458	40.89	13.80	54.69	74.00	-19.31	peak
		29.89	13.80	43.69	54.00	-10.31	average
2	2390.0000	39.49	14.09	53.58	74.00	-20.42	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For average power measurement, set the VBW refer to section 7.1.
 5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

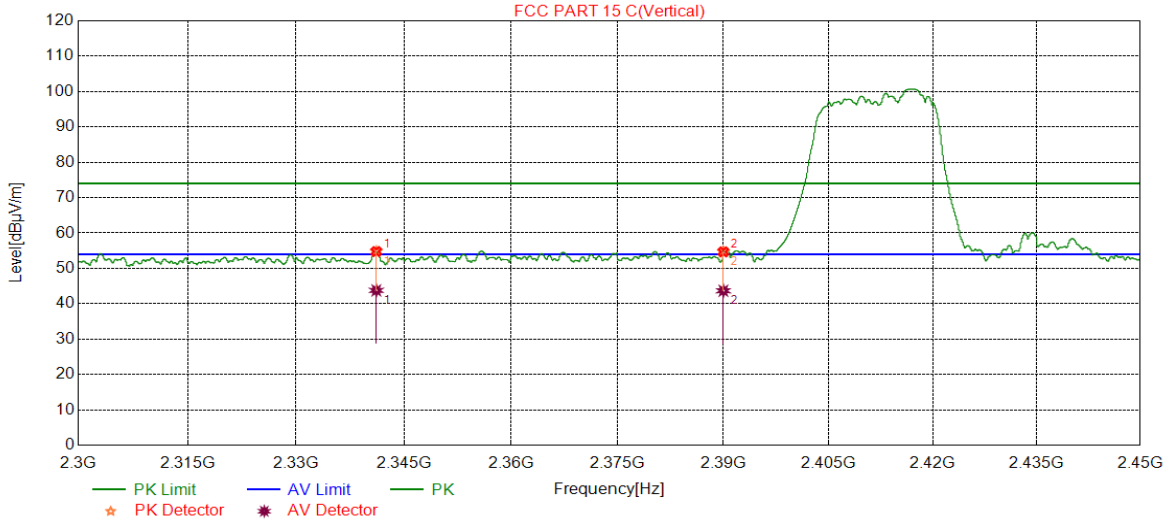


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2341.1426	41.18	13.59	54.77	74.00	-19.23	peak
		30.18	13.59	43.77	54.00	-10.23	average
2	2390.0000	40.58	14.09	54.67	74.00	-19.33	peak
		29.58	14.09	43.67	54.00	-10.33	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For average power measurement, set the VBW refer to section 7.1.
 5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

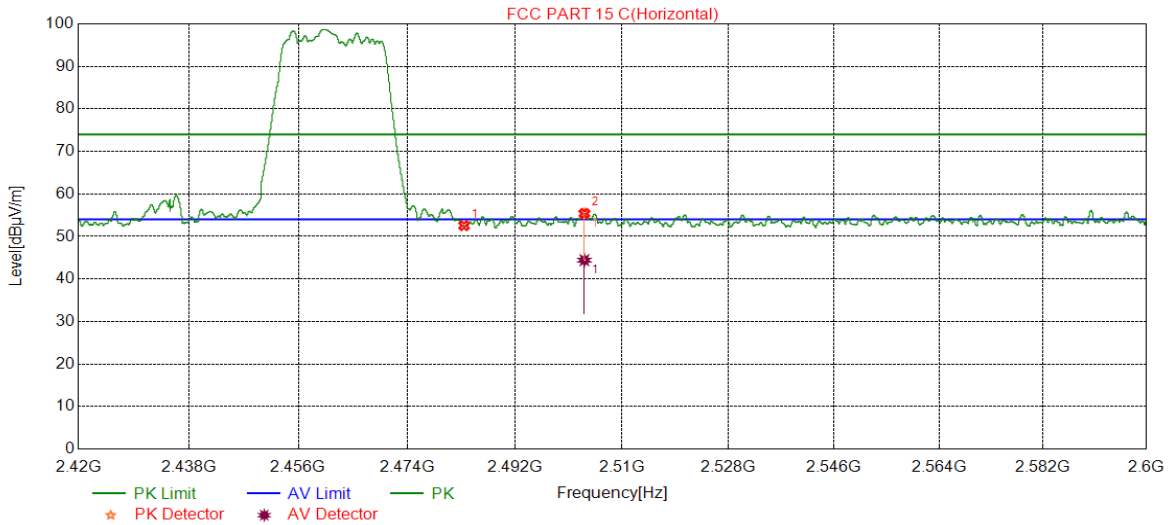


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	38.66	13.88	52.54	74.00	-21.46	peak
2	2503.6544	41.28	14.13	55.41	74.00	-18.59	peak
		30.28	14.13	44.41	54.00	-9.59	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For average power measurement, set the VBW refer to section 7.1.
 5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

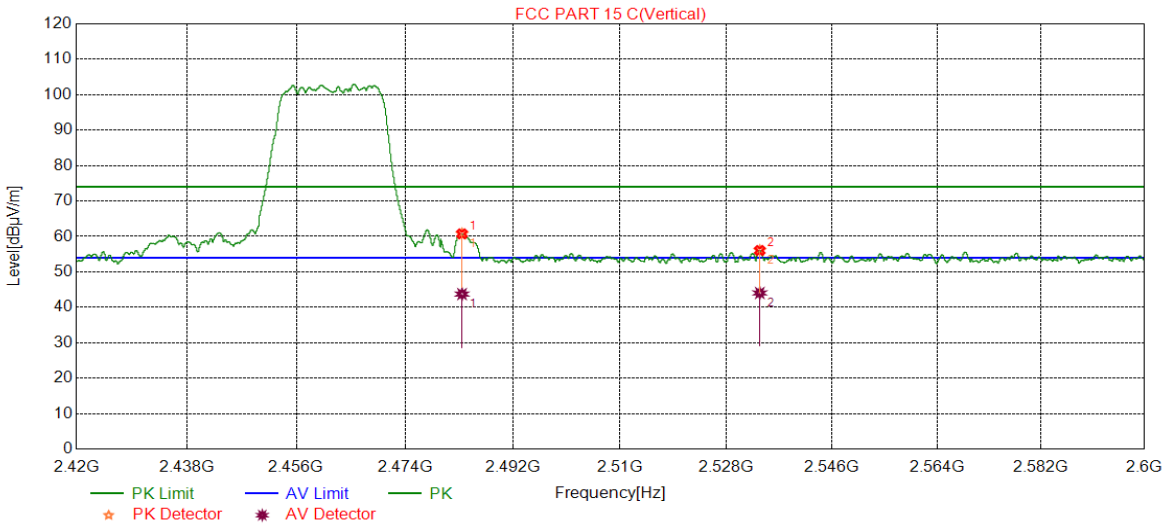

No.	Frequency (MHz)	Reading Level	Correct Factor	Result	Limit	Margin	Remark
		(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	46.85	13.88	60.73	74.00	-13.27	peak
		29.85	13.88	43.73	54.00	-10.27	average
2	2533.6634	41.76	14.28	56.04	74.00	-17.96	peak
		29.76	14.28	44.04	54.00	-9.96	average

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. For average power measurement, set the VBW refer to section 7.1.
 5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



7.6.4. SPURIOUS EMISSIONS

Test Result Table:

11B	Antenna1	LCH	<Limit	PASS
		MCH	<Limit	PASS
		HCH	<Limit	PASS
11G	Antenna1	LCH	<Limit	PASS
		MCH	<Limit	PASS
		HCH	<Limit	PASS
11n20	Antenna1	LCH	<Limit	PASS
		MCH	<Limit	PASS
		HCH	<Limit	PASS

2) For 9KHz~30MHz

Test Mode	Test Antenna	Channel	Puw(dBm)	Verdict
11G	Antenna1	LCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

3) For 30MHz~1GHz

Test Mode	Test Antenna	Channel	Puw(dBm)	Verdict
11G	Antenna1	LCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

4) For 18GHz~26.5GHz

Test Mode	Test Antenna	Channel	Puw(dBm)	Verdict
11G	Antenna1	LCH	<Limit	PASS

Remark:


1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.



Part I: 1GHz~18GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

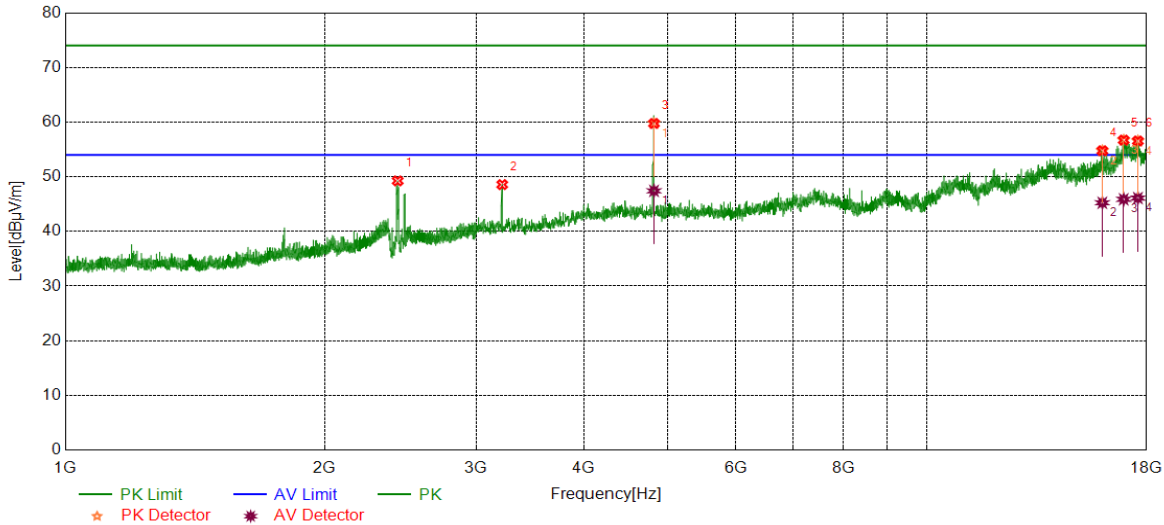


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2431.9290	50.36	-1.11	49.25	74.00	-24.75	peak
2	3215.6520	46.76	1.81	48.57	74.00	-25.43	peak
3	4824.6031	54.82	4.94	59.76	74.00	-14.24	peak
		42.48	4.94	47.42	54.00	-6.58	average
4	15989.7487	37.18	17.59	54.77	74.00	-19.23	peak
		27.65	17.59	45.24	54.00	-8.76	average
5	16929.2412	37.76	18.95	56.71	74.00	-17.29	peak
		26.93	18.95	45.88	54.00	-8.12	average
6	17585.5732	37.37	19.18	56.55	74.00	-17.45	peak
		26.93	19.18	46.11	54.00	-7.89	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

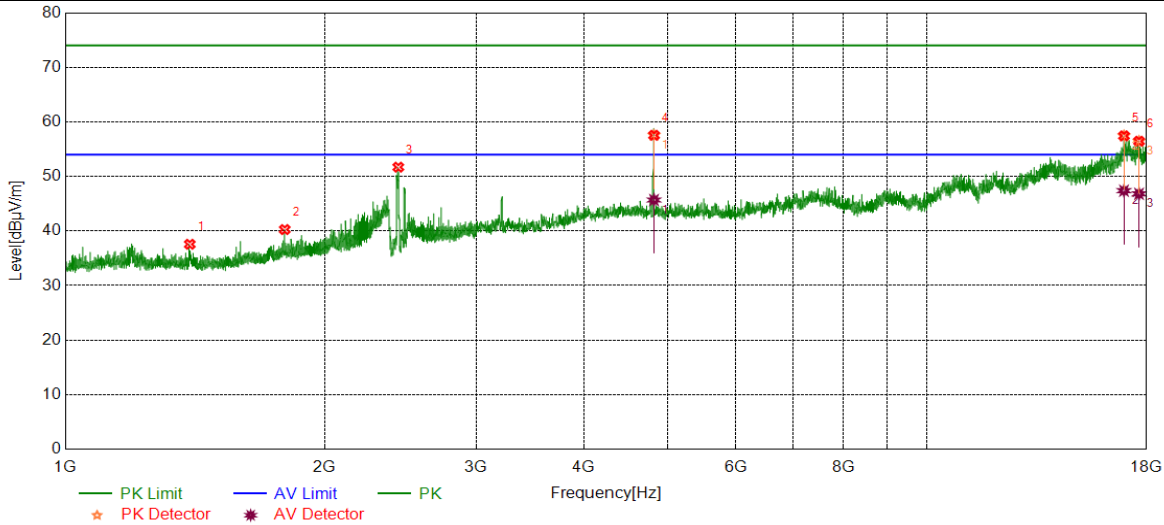


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1395.0494	43.22	-5.65	37.57	74.00	-36.43	peak
2	1798.0998	44.17	-3.90	40.27	74.00	-33.73	peak
3	2435.9295	52.78	-1.08	51.70	74.00	-22.30	peak
4	4824.6031	52.61	4.94	57.55	74.00	-16.45	peak
		40.74	4.94	45.68	54.00	-8.32	average
5	16942.3678	37.41	20.03	57.44	74.00	-16.56	peak
		27.36	20.03	47.39	54.00	-6.61	average
6	17638.0798	37.06	19.40	56.46	74.00	-17.54	peak
		27.42	19.40	46.82	54.00	-7.18	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

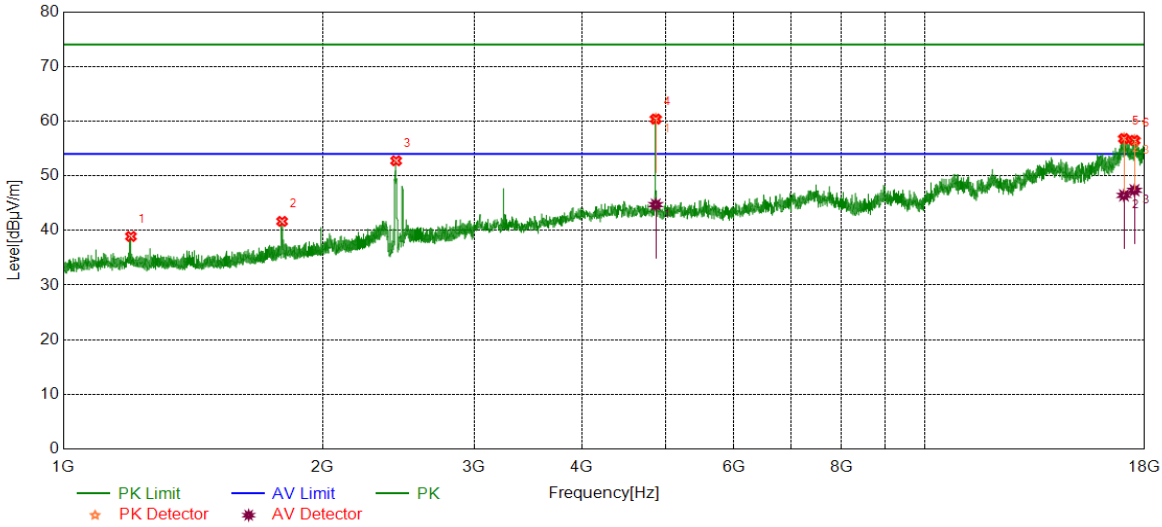


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1198.5248	44.44	-5.54	38.90	74.00	-35.10	peak
2	1795.0994	45.58	-3.93	41.65	74.00	-32.35	peak
3	2434.6793	53.84	-1.09	52.75	74.00	-21.25	peak
4	4873.3592	55.17	5.21	60.38	74.00	-13.62	peak
		39.51	5.21	44.72	54.00	-9.28	average
5	17034.2543	36.98	19.82	56.80	74.00	-17.20	peak
		26.60	19.82	46.42	54.00	-7.58	average
6	17519.9400	36.59	19.89	56.48	74.00	-17.52	peak
		27.46	19.89	47.35	54.00	-6.65	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

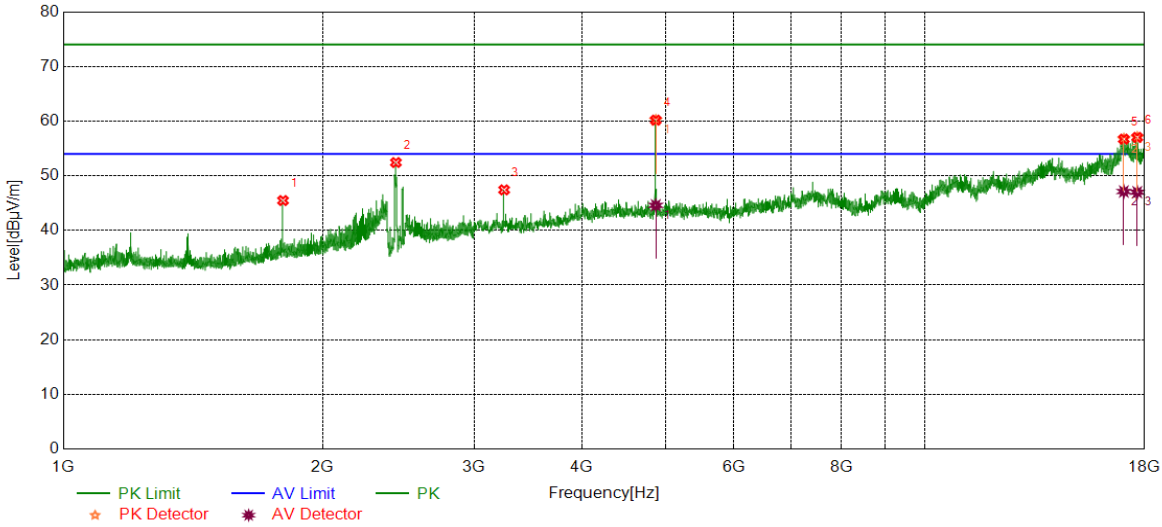


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1799.3499	49.35	-3.88	45.47	74.00	-28.53	peak
2	2433.4292	53.53	-1.10	52.43	74.00	-21.57	peak
3	3249.4062	45.60	1.82	47.42	74.00	-26.58	peak
4	4873.3592	54.97	5.21	60.18	74.00	-13.82	peak
		39.38	5.21	44.59	54.00	-9.41	average
5	17026.7533	36.51	20.20	56.71	74.00	-17.29	peak
		26.92	20.20	47.12	54.00	-6.88	average
6	17649.3312	37.94	19.08	57.02	74.00	-16.98	peak
		27.92	19.08	47.00	54.00	-7.00	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

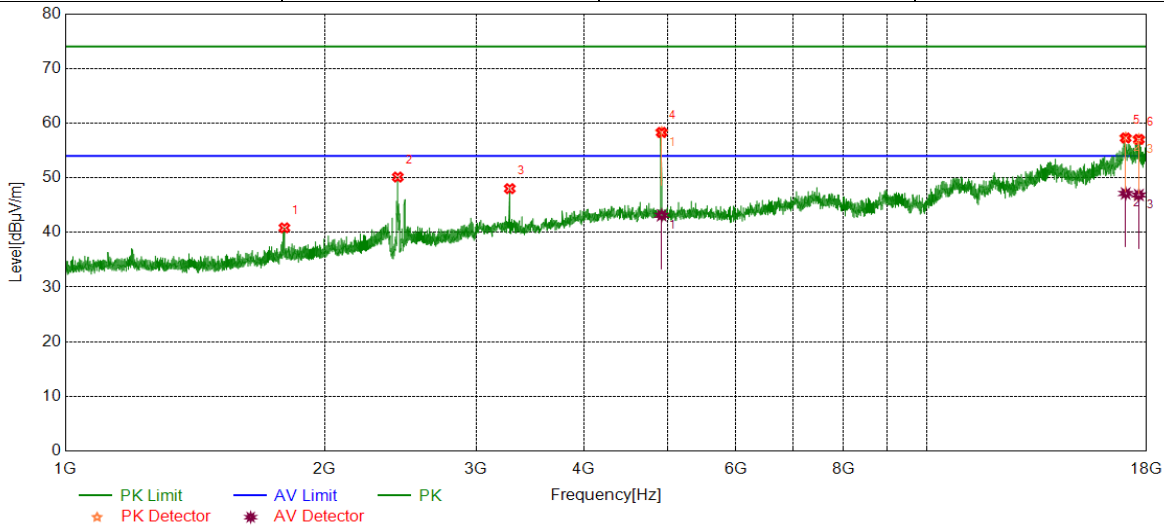


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1195.2744	43.65	-5.55	38.10	74.00	-35.90	peak
2	2435.4294	54.22	-1.08	53.14	74.00	-20.86	peak
3	3281.2852	46.48	2.37	48.85	74.00	-25.15	peak
4	4923.9905	54.08	5.22	59.30	74.00	-14.70	peak
		38.46	5.22	43.68	54.00	-10.32	average
5	17028.6286	37.84	20.21	58.05	74.00	-15.95	peak
		26.43	20.21	46.64	54.00	-7.36	average
6	17519.9400	36.78	19.89	56.67	74.00	-17.33	peak
		27.13	19.89	47.02	54.00	-6.98	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

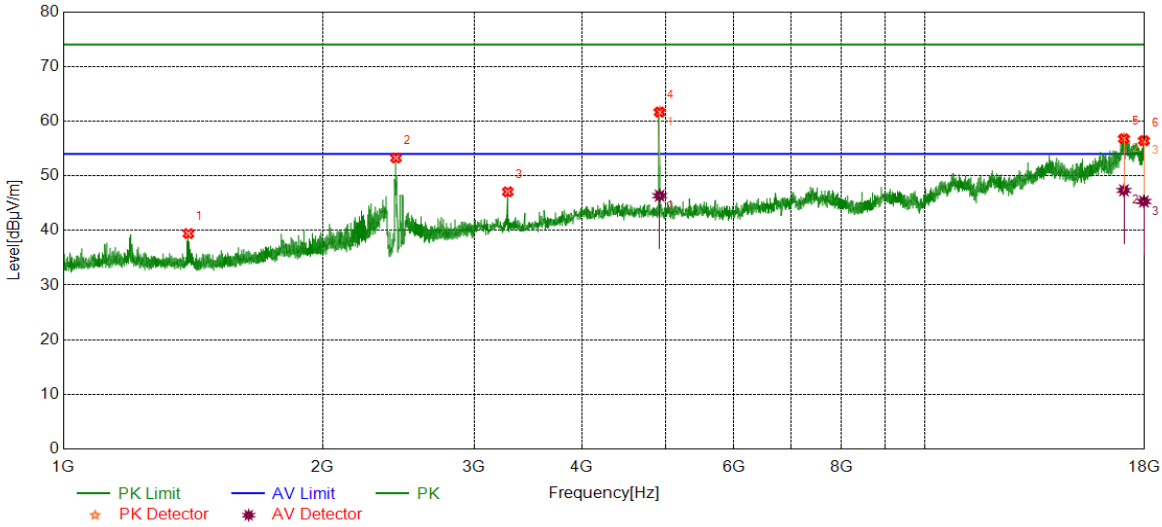


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1397.5497	45.02	-5.60	39.42	74.00	-34.58	peak
2	2433.6792	54.36	-1.10	53.26	74.00	-20.74	peak
3	3281.2852	44.70	2.37	47.07	74.00	-26.93	peak
4	4923.9905	56.44	5.22	61.66	74.00	-12.34	peak
		41.14	5.22	46.36	54.00	-7.64	average
5	17030.5038	36.60	20.18	56.78	74.00	-17.22	peak
		27.15	20.18	47.33	54.00	-6.67	average
6	17966.2458	38.00	18.43	56.43	74.00	-17.57	peak
		26.87	18.43	45.30	54.00	-8.70	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

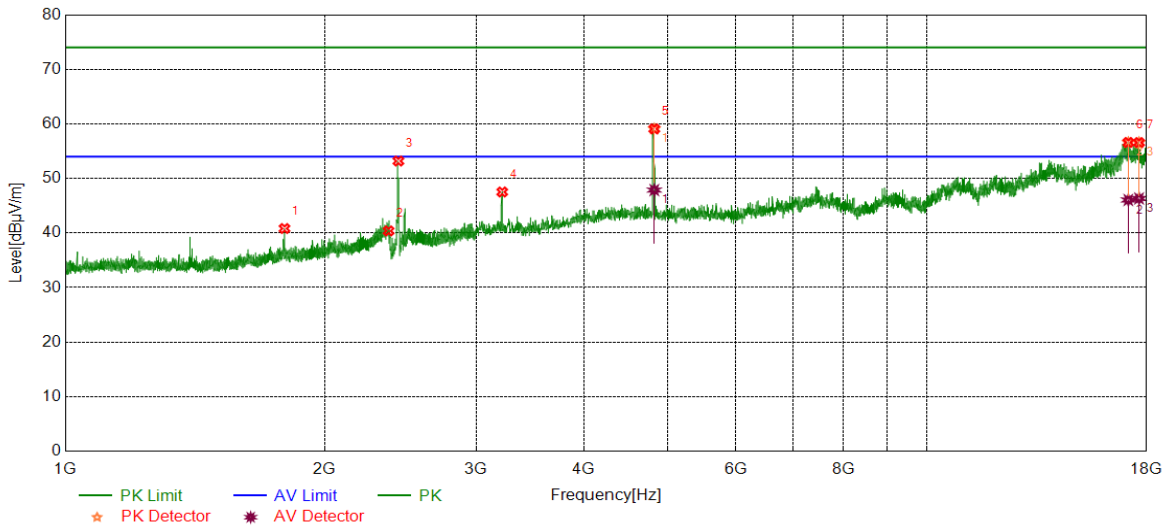


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1797.0996	44.73	-3.91	40.82	74.00	-33.18	peak
2	2373.6717	41.92	-1.54	40.38	74.00	-33.62	peak
3	2436.4296	54.27	-1.08	53.19	74.00	-20.81	peak
4	3215.6520	45.71	1.81	47.52	74.00	-26.48	peak
		54.17	4.92	59.09	74.00	-14.91	peak
5	4828.3535	42.95	4.92	47.87	54.00	-6.13	average
		37.30	19.30	56.60	74.00	-17.40	peak
6	17139.2674	26.75	19.30	46.05	54.00	-7.95	average
		37.15	19.43	56.58	74.00	-17.42	peak
7	17639.9550	26.90	19.43	46.33	54.00	-7.67	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

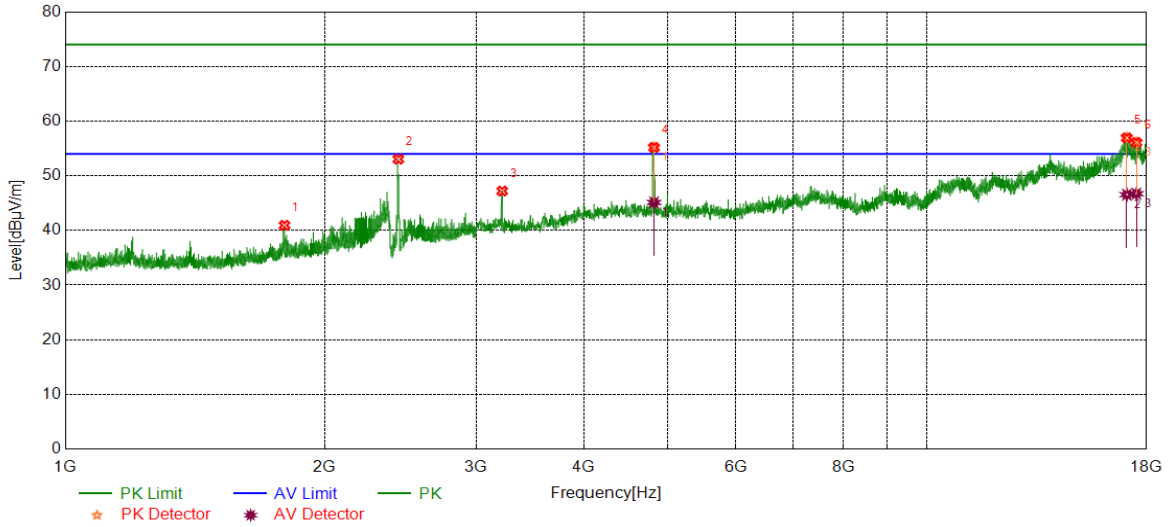


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1797.0996	44.85	-3.91	40.94	74.00	-33.06	peak
2	2436.1795	54.12	-1.08	53.04	74.00	-20.96	peak
3	3215.6520	45.40	1.81	47.21	74.00	-26.79	peak
4	4824.6031	50.25	4.94	55.19	74.00	-18.81	peak
		40.18	4.94	45.12	54.00	-8.88	average
5	17071.7590	36.61	20.34	56.95	74.00	-17.05	peak
		26.20	20.34	46.54	54.00	-7.46	average
6	17514.3143	36.88	19.22	56.10	74.00	-17.90	peak
		27.50	19.22	46.72	54.00	-7.28	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

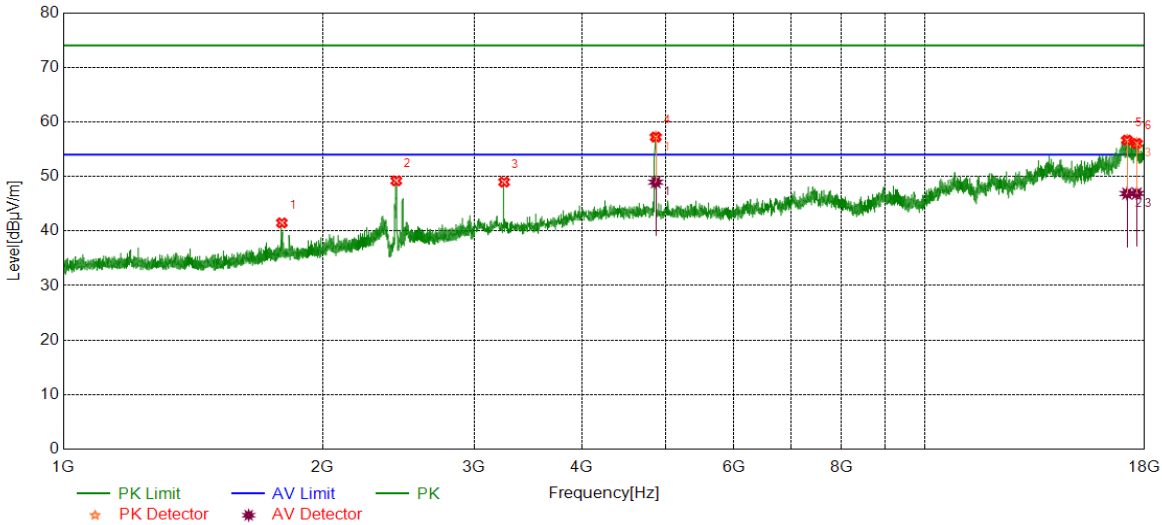


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1794.0993	45.43	-3.94	41.49	74.00	-32.51	peak
2	2435.6795	50.28	-1.08	49.20	74.00	-24.80	peak
3	3249.4062	47.15	1.82	48.97	74.00	-25.03	peak
4	4873.3592	52.02	5.21	57.23	74.00	-16.77	peak
		43.74	5.21	48.95	54.00	-5.05	average
5	17173.0216	37.18	19.48	56.66	74.00	-17.34	peak
		27.38	19.48	46.86	54.00	-7.14	average
6	17626.8284	36.96	19.09	56.05	74.00	-17.95	peak
		27.80	19.09	46.89	54.00	-7.11	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

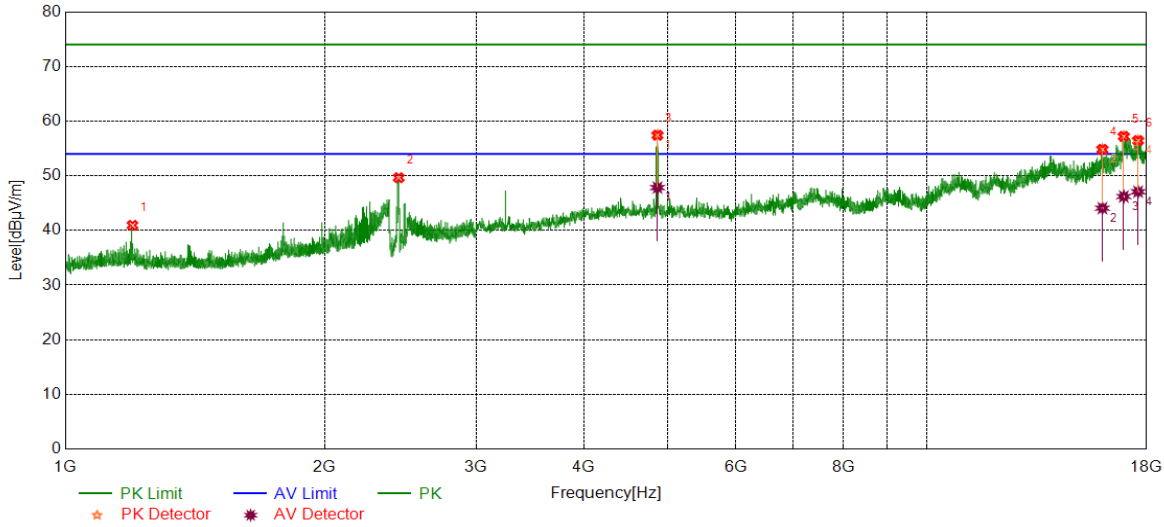


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1197.0246	46.47	-5.54	40.93	74.00	-33.07	peak
2	2438.6798	50.71	-1.06	49.65	74.00	-24.35	peak
3	4869.6087	52.20	5.23	57.43	74.00	-16.57	peak
		42.61	5.23	47.84	54.00	-6.16	average
4	15993.4992	37.31	17.52	54.83	74.00	-19.17	peak
		26.55	17.52	44.07	54.00	-9.93	average
5	16932.9916	37.92	19.29	57.21	74.00	-16.79	peak
		26.92	19.29	46.21	54.00	-7.79	average
6	17594.9494	36.87	19.58	56.45	74.00	-17.55	peak
		27.51	19.58	47.09	54.00	-6.91	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

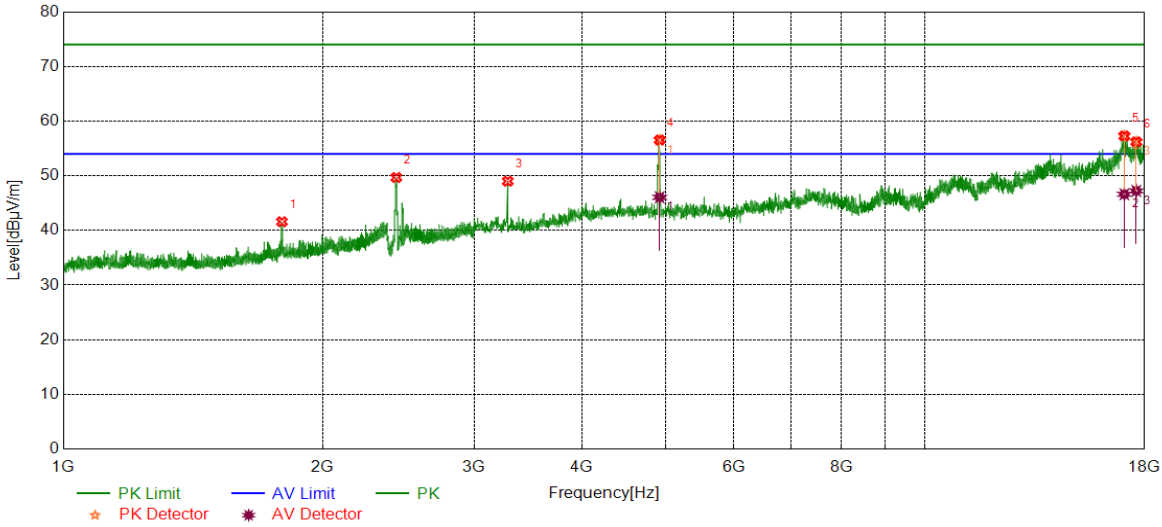


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1794.3493	45.53	-3.94	41.59	74.00	-32.41	peak
2	2435.9295	50.76	-1.08	49.68	74.00	-24.32	peak
3	3281.2852	46.63	2.37	49.00	74.00	-25.00	peak
4	4923.9905	51.32	5.22	56.54	74.00	-17.46	peak
		40.84	5.22	46.06	54.00	-7.94	average
5	17049.2562	36.91	20.38	57.29	74.00	-16.71	peak
		26.24	20.38	46.62	54.00	-7.38	average
6	17604.3255	37.12	19.09	56.21	74.00	-17.79	peak
		28.15	19.09	47.24	54.00	-6.76	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

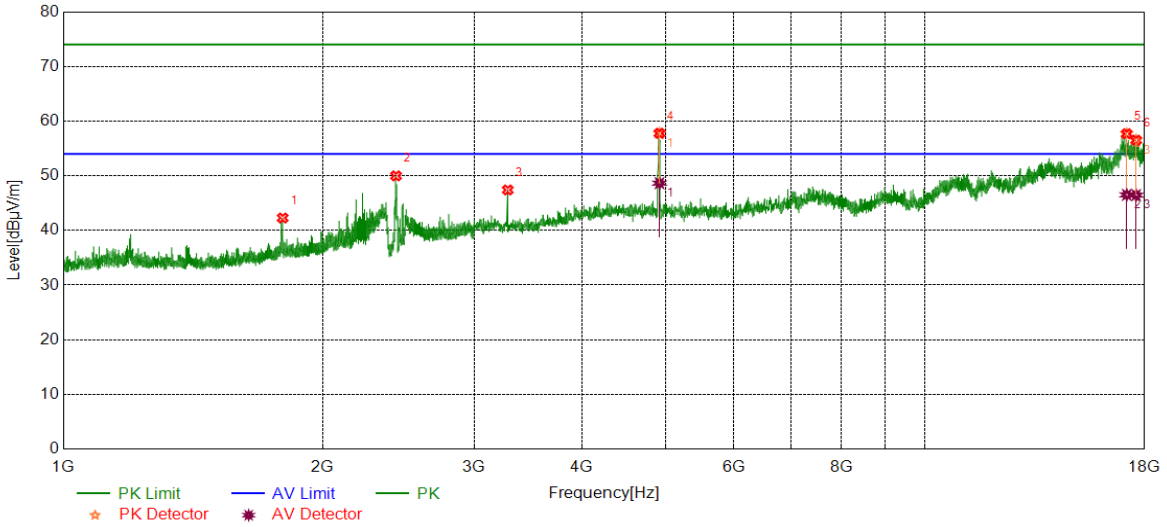


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1797.8497	46.18	-3.90	42.28	74.00	-31.72	peak
2	2433.9292	51.07	-1.09	49.98	74.00	-24.02	peak
3	3281.2852	45.04	2.37	47.41	74.00	-26.59	peak
4	4922.1153	52.52	5.26	57.78	74.00	-16.22	peak
		43.39	5.26	48.65	54.00	-5.35	average
5	17159.8950	37.95	19.74	57.69	74.00	-16.31	peak
		26.77	19.74	46.51	54.00	-7.49	average
6	17594.9494	36.94	19.58	56.52	74.00	-17.48	peak
		26.89	19.58	46.47	54.00	-7.53	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

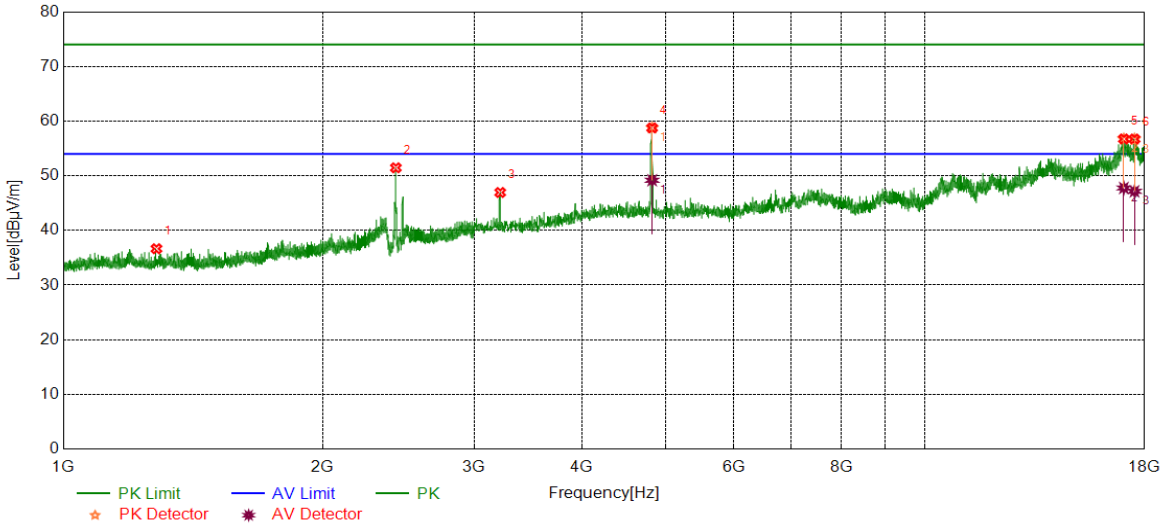


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1283.0354	42.26	-5.61	36.65	74.00	-37.35	peak
2	2432.9291	52.56	-1.10	51.46	74.00	-22.54	peak
3	3215.6520	45.13	1.81	46.94	74.00	-27.06	peak
4	4826.4783	53.83	4.93	58.76	74.00	-15.24	peak
		44.25	4.93	49.18	54.00	-4.82	average
5	17026.7533	36.54	20.20	56.74	74.00	-17.26	peak
		27.57	20.20	47.77	54.00	-6.23	average
6	17519.9400	36.83	19.89	56.72	74.00	-17.28	peak
		27.27	19.89	47.16	54.00	-6.84	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

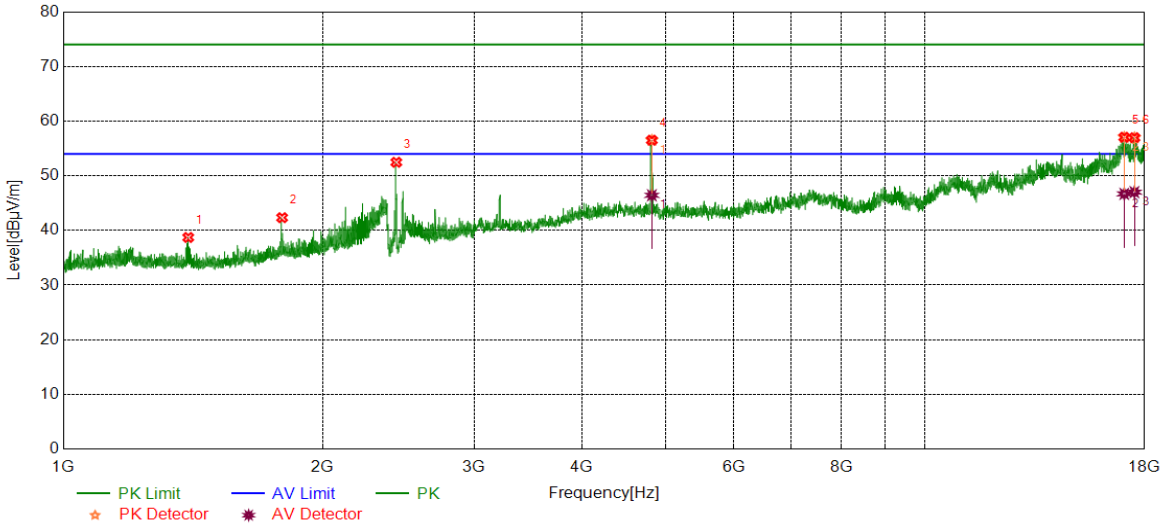


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1396.7996	44.32	-5.61	38.71	74.00	-35.29	peak
2	1795.0994	46.26	-3.93	42.33	74.00	-31.67	peak
3	2435.9295	53.55	-1.08	52.47	74.00	-21.53	peak
4	4822.7278	51.57	4.94	56.51	74.00	-17.49	peak
		41.49	4.94	46.43	54.00	-7.57	average
5	17045.5057	37.11	19.94	57.05	74.00	-16.95	peak
		26.75	19.94	46.69	54.00	-7.31	average
6	17518.0648	37.30	19.67	56.97	74.00	-17.03	peak
		27.34	19.67	47.01	54.00	-6.99	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

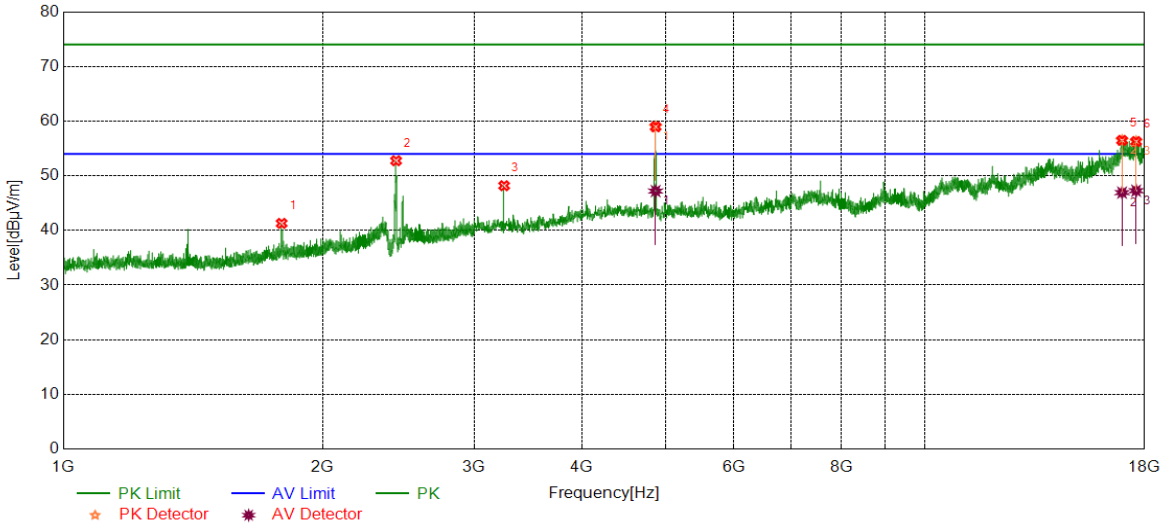


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1792.8491	45.24	-3.95	41.29	74.00	-32.71	peak
2	2434.4293	53.84	-1.09	52.75	74.00	-21.25	peak
3	3249.4062	46.36	1.82	48.18	74.00	-25.82	peak
4	4871.4839	53.73	5.23	58.96	74.00	-15.04	peak
		41.97	5.23	47.20	54.00	-6.80	average
5	16946.1183	36.54	19.94	56.48	74.00	-17.52	peak
		26.98	19.94	46.92	54.00	-7.08	average
6	17594.9494	36.69	19.58	56.27	74.00	-17.73	peak
		27.69	19.58	47.27	54.00	-6.73	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

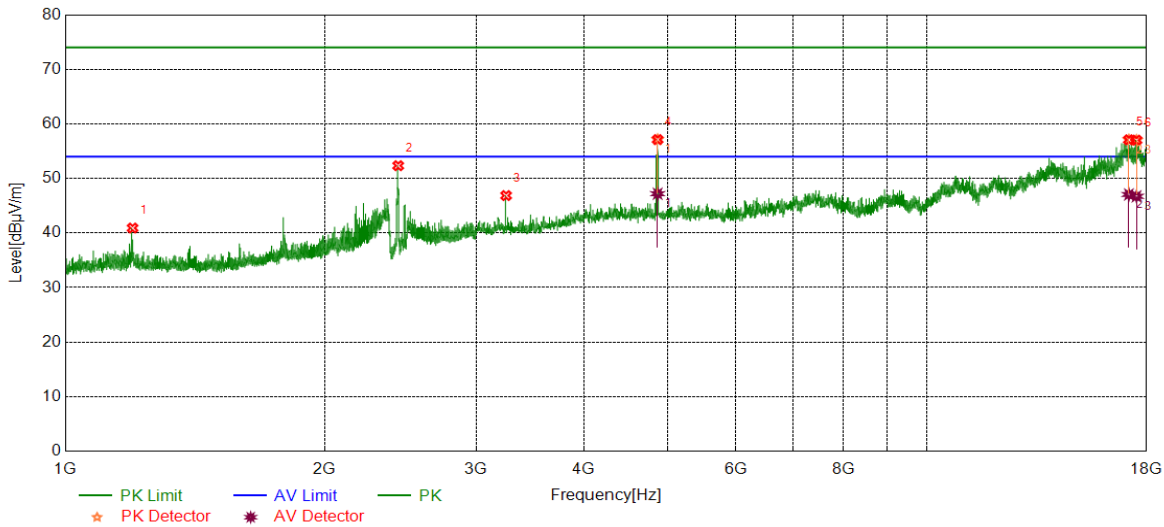


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1197.2747	46.45	-5.54	40.91	74.00	-33.09	peak
2	2435.1794	53.42	-1.08	52.34	74.00	-21.66	peak
3	3249.4062	45.04	1.82	46.86	74.00	-27.14	peak
4	4871.4839	51.90	5.23	57.13	74.00	-16.87	peak
		41.97	5.23	47.20	54.00	-6.80	average
5	17165.5207	37.52	19.57	57.09	74.00	-16.91	peak
		27.49	19.57	47.06	54.00	-6.94	average
6	17519.9400	37.13	19.89	57.02	74.00	-16.98	peak
		26.83	19.89	46.72	54.00	-7.28	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

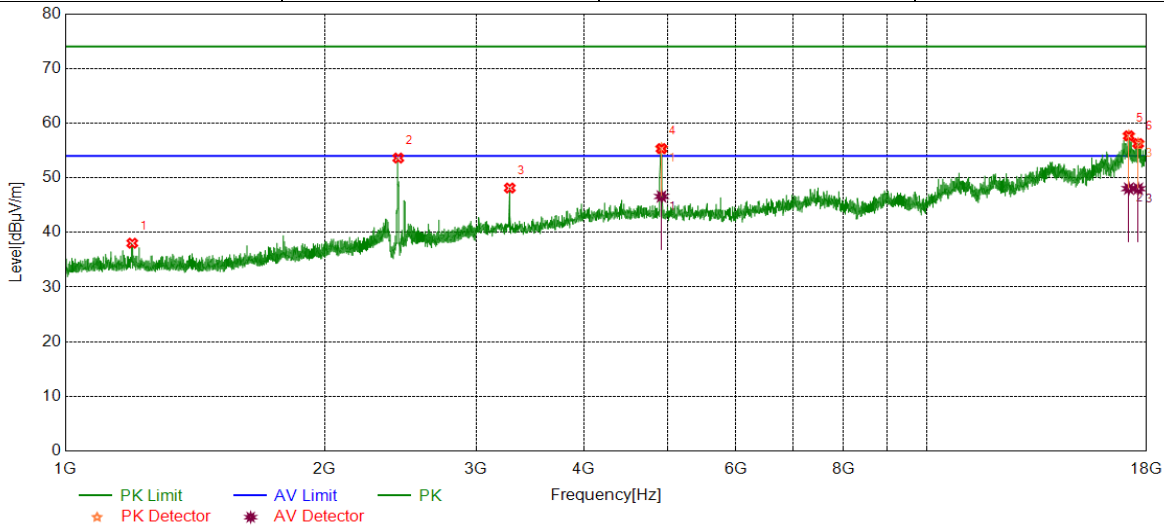


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1196.2745	43.57	-5.54	38.03	74.00	-35.97	peak
2	2435.6795	54.69	-1.08	53.61	74.00	-20.39	peak
3	3281.2852	45.76	2.37	48.13	74.00	-25.87	peak
4	4922.1153	50.08	5.26	55.34	74.00	-18.66	peak
		41.32	5.26	46.58	54.00	-7.42	average
5	17161.7702	37.99	19.69	57.68	74.00	-16.32	peak
		28.33	19.69	48.02	54.00	-5.98	average
6	17598.6998	36.75	19.51	56.26	74.00	-17.74	peak
		28.49	19.51	48.00	54.00	-6.00	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

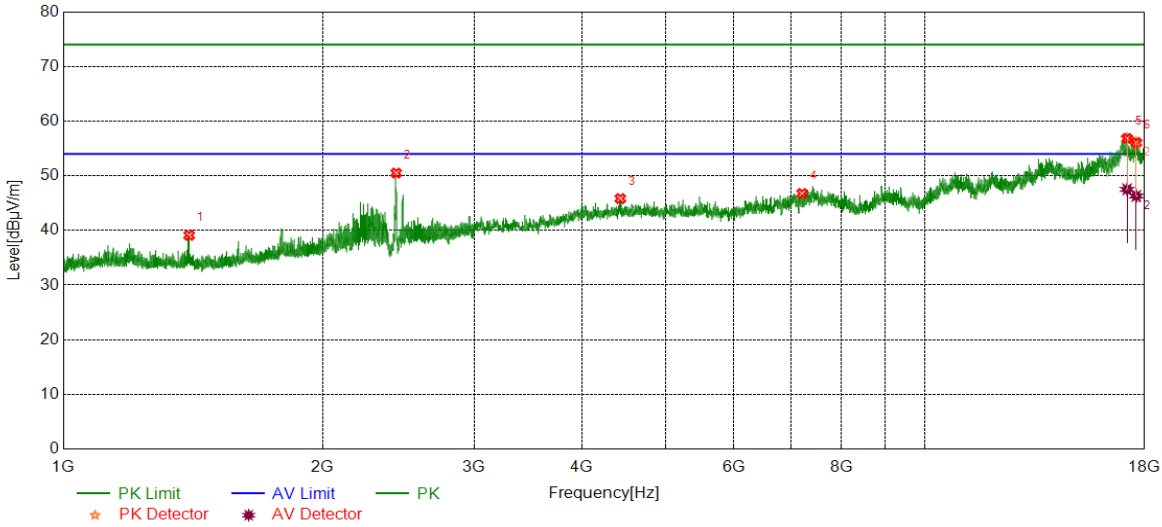

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1400.3000	44.65	-5.55	39.10	74.00	-34.90	peak
2	2435.1794	51.58	-1.08	50.50	74.00	-23.50	peak
3	4432.6791	40.62	5.21	45.83	74.00	-28.17	peak
4	7206.1508	37.80	8.96	46.76	74.00	-27.24	peak
5	17176.7721	37.29	19.54	56.83	74.00	-17.17	peak
		27.97	19.54	47.51	54.00	-6.49	average
6	17602.4503	36.82	19.26	56.08	74.00	-17.92	peak
		27.05	19.26	46.31	54.00	-7.69	average


- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 7.1.
 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part II: 18GHz~26.5GHz

SPURIOUS EMISSIONS 18GHz TO 26.5GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

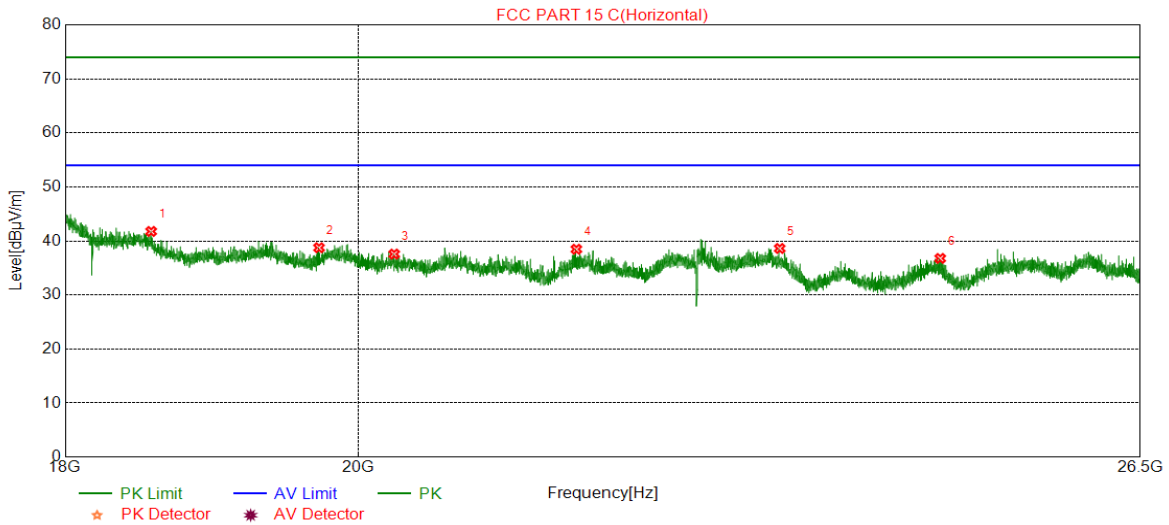


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	18565.3065	42.72	-0.96	41.76	74.00	-32.24	peak
2	19721.4221	39.40	-0.66	38.74	74.00	-35.26	peak
3	20262.0762	38.21	-0.64	37.57	74.00	-36.43	peak
4	21634.9635	38.80	-0.33	38.47	74.00	-35.53	peak
5	23277.3277	38.10	0.51	38.61	74.00	-35.39	peak
6	24661.2661	37.13	-0.36	36.77	74.00	-37.23	peak

Note: 1.If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

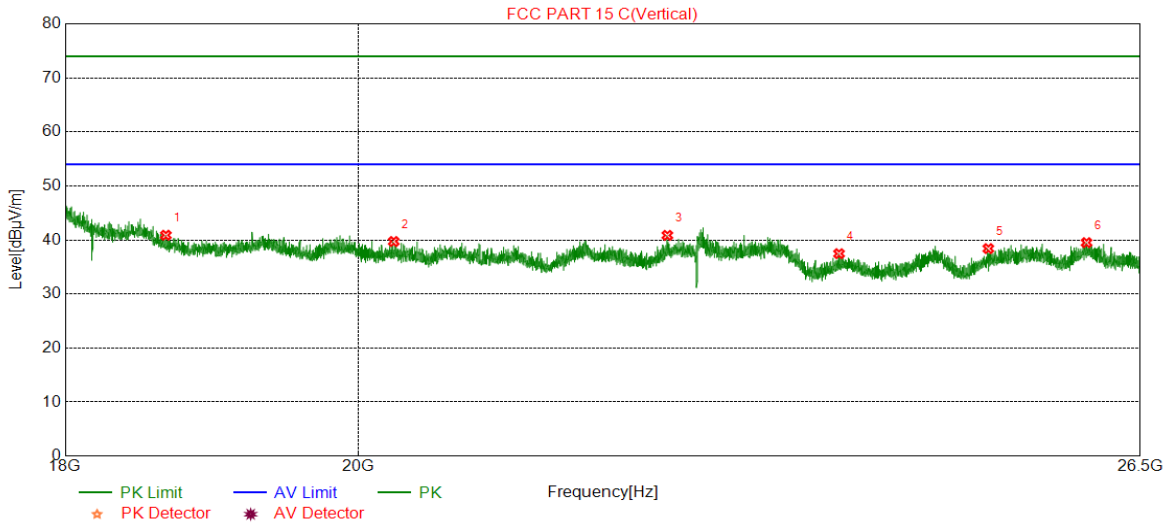

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	18663.9164	41.87	-0.99	40.88	74.00	-33.12	peak
2	20258.6759	40.35	-0.64	39.71	74.00	-34.29	peak
3	22354.9855	40.24	0.61	40.85	74.00	-33.15	peak
4	23779.7280	38.22	-0.76	37.46	74.00	-36.54	peak
5	25092.2592	38.23	0.17	38.40	74.00	-35.60	peak
6	25995.0495	37.85	1.65	39.50	74.00	-34.50	peak


Note: 1.If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.



Part III: 30MHz~1GHz

SPURIOUS EMISSIONS 30M TO 1GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

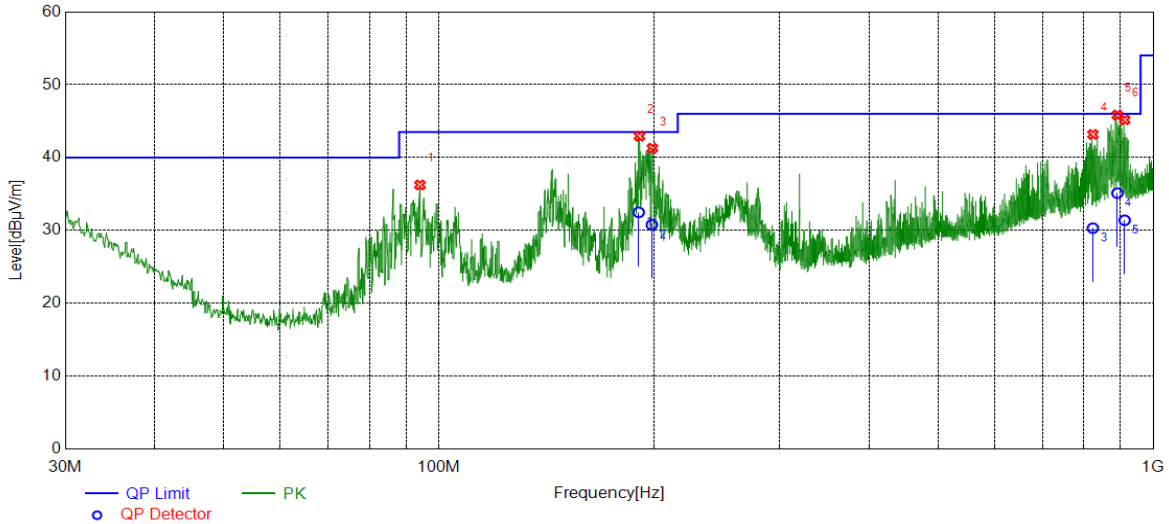


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	94.1234	20.86	15.38	36.24	43.50	-7.26	peak
2	190.9391	24.40	18.54	42.94	43.50	-0.56	peak
		13.97	18.51	32.48	43.50	-11.02	QP
3	199.0879	22.22	19.06	41.28	43.50	-2.22	peak
		11.75	19.03	30.78	43.50	-12.72	QP
4	823.4423	13.08	30.09	43.17	46.00	-2.83	peak
		0.22	30.09	30.31	46.00	-15.69	QP
5	890.6701	14.91	30.93	45.84	46.00	-0.16	peak
		4.18	30.94	35.12	46.00	-10.88	QP
6	912.1092	13.96	31.22	45.18	46.00	-0.82	peak
		0.18	31.22	31.40	46.00	-14.60	QP

Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

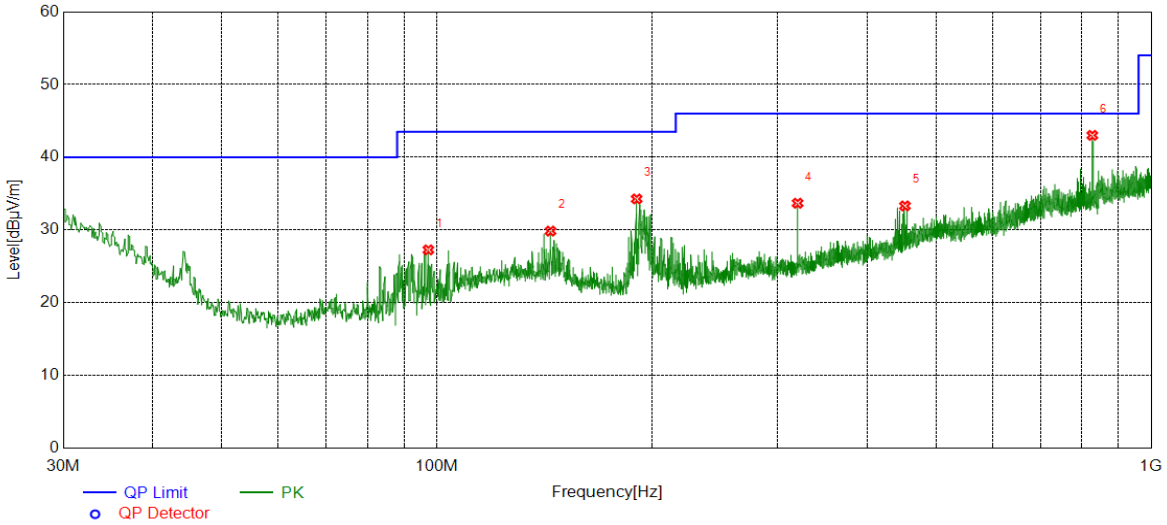

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	97.3247	11.10	16.17	27.27	43.50	-16.23	peak
2	144.2774	10.17	19.68	29.85	43.50	-13.65	peak
3	190.4540	15.76	18.51	34.27	43.50	-9.23	peak
4	319.9620	12.76	20.92	33.68	46.00	-12.32	peak
5	452.1862	8.95	24.36	33.31	46.00	-12.69	peak
6	827.1287	12.87	30.14	43.01	46.00	-2.99	peak


Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.



Part IV: 9KHz~30MHz

SPURIOUS EMISSIONS Below 30MHz (WORST CASE CONFIGURATION-FACE ON)

Test Mode	Channel	Frequency Range	Verdict
11G	LCH	9KHz~150KHz	PASS

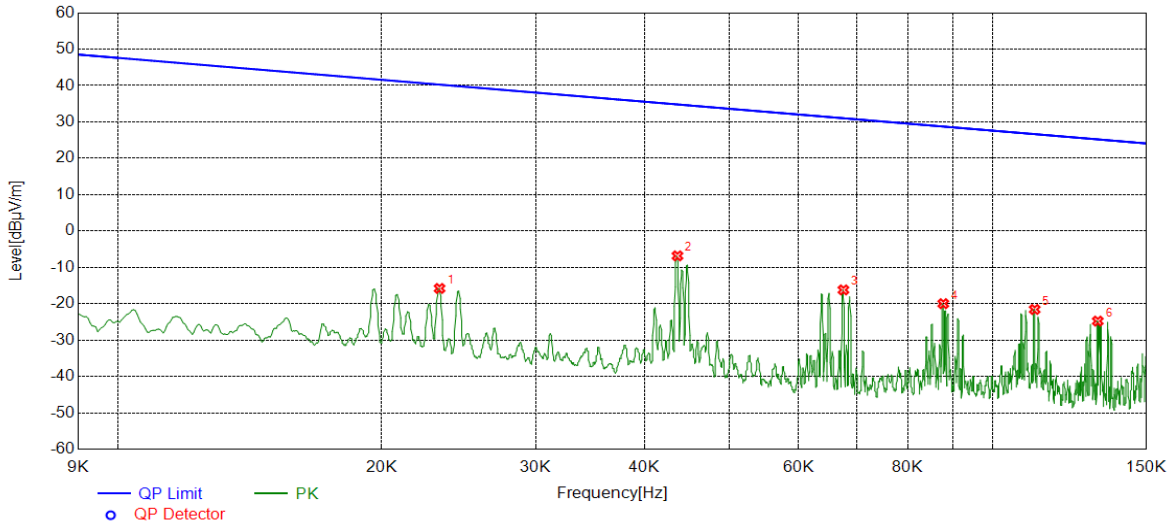

No.	Frequency	Reading Level	Correct Factor	FCC Result	FCC Limit	ISED Result	ISED Result	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.0233	45.19	-60.98	-15.79	40.26	-67.29	-11.24	-56.05	peak
2	0.0436	54.27	-61.11	-6.84	34.82	-58.34	-16.68	-41.66	peak
3	0.0675	45.24	-61.44	-16.20	31.02	-67.70	-20.48	-47.22	peak
4	0.0878	41.22	-61.20	-19.98	28.74	-71.48	-22.76	-48.72	peak
5	0.1117	39.42	-60.99	-21.57	26.65	-73.07	-24.85	-48.22	peak
6	0.1319	36.45	-61.23	-24.78	25.20	-76.28	-26.30	-49.98	peak

- Note: 1. Measurement = Reading Level + Correct Factor(dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report